

SECTION 905 -- PROPOSAL (CONTINUED)

I (We) further propose to execute the attached contract agreement (Section 902) as soon as the work is awarded to me (us), and to begin and complete the work within the time limit(s) provided for in the Specifications and Advertisement. I (We) also propose to execute the attached contract bond (Section 903) in an amount not less than one hundred (100) percent of the total of my (our) part, but also to guarantee the excellence of both workmanship and materials until the work is finally accepted.

I (We) enclose a certified check, cashier's check or bid bond for **five percent (5%) of total bid** and hereby agree that in case of my (our) failure to execute the contract and furnish bond within Ten (10) days after notice of award, the amount of this check (bid bond) will be forfeited to the State of Mississippi as liquidated damages arising out of my (our) failure to execute the contract as proposed. It is understood that in case I am (we are) not awarded the work, the check will be returned as provided in the Specifications.

Bidder acknowledges receipt of and has added to and made a part of the proposal and contract documents the following addendum (addenda):

ADDENDUM NO. 1 DATED 10/19/2004 ADDENDUM NO. _____ DATED _____
ADDENDUM NO. _____ DATED _____ ADDENDUM NO. _____ DATED _____

Number Description
1 Add Document 00910 Addendum No. 1.

TOTAL ADDENDA 1
(Must agree with total addenda issued prior to opening of bids)

Respectfully Submitted,

DATE _____

Contractor

Signature

TITLE _____

ADDRESS _____

(To be filled in if a corporation)


Our corporation is chartered under the Laws of the State of _____ and the names, titles and business addresses of the executives are as follows:

President Address

Secretary Address

Treasurer Address

The following is my (our) itemized proposal.

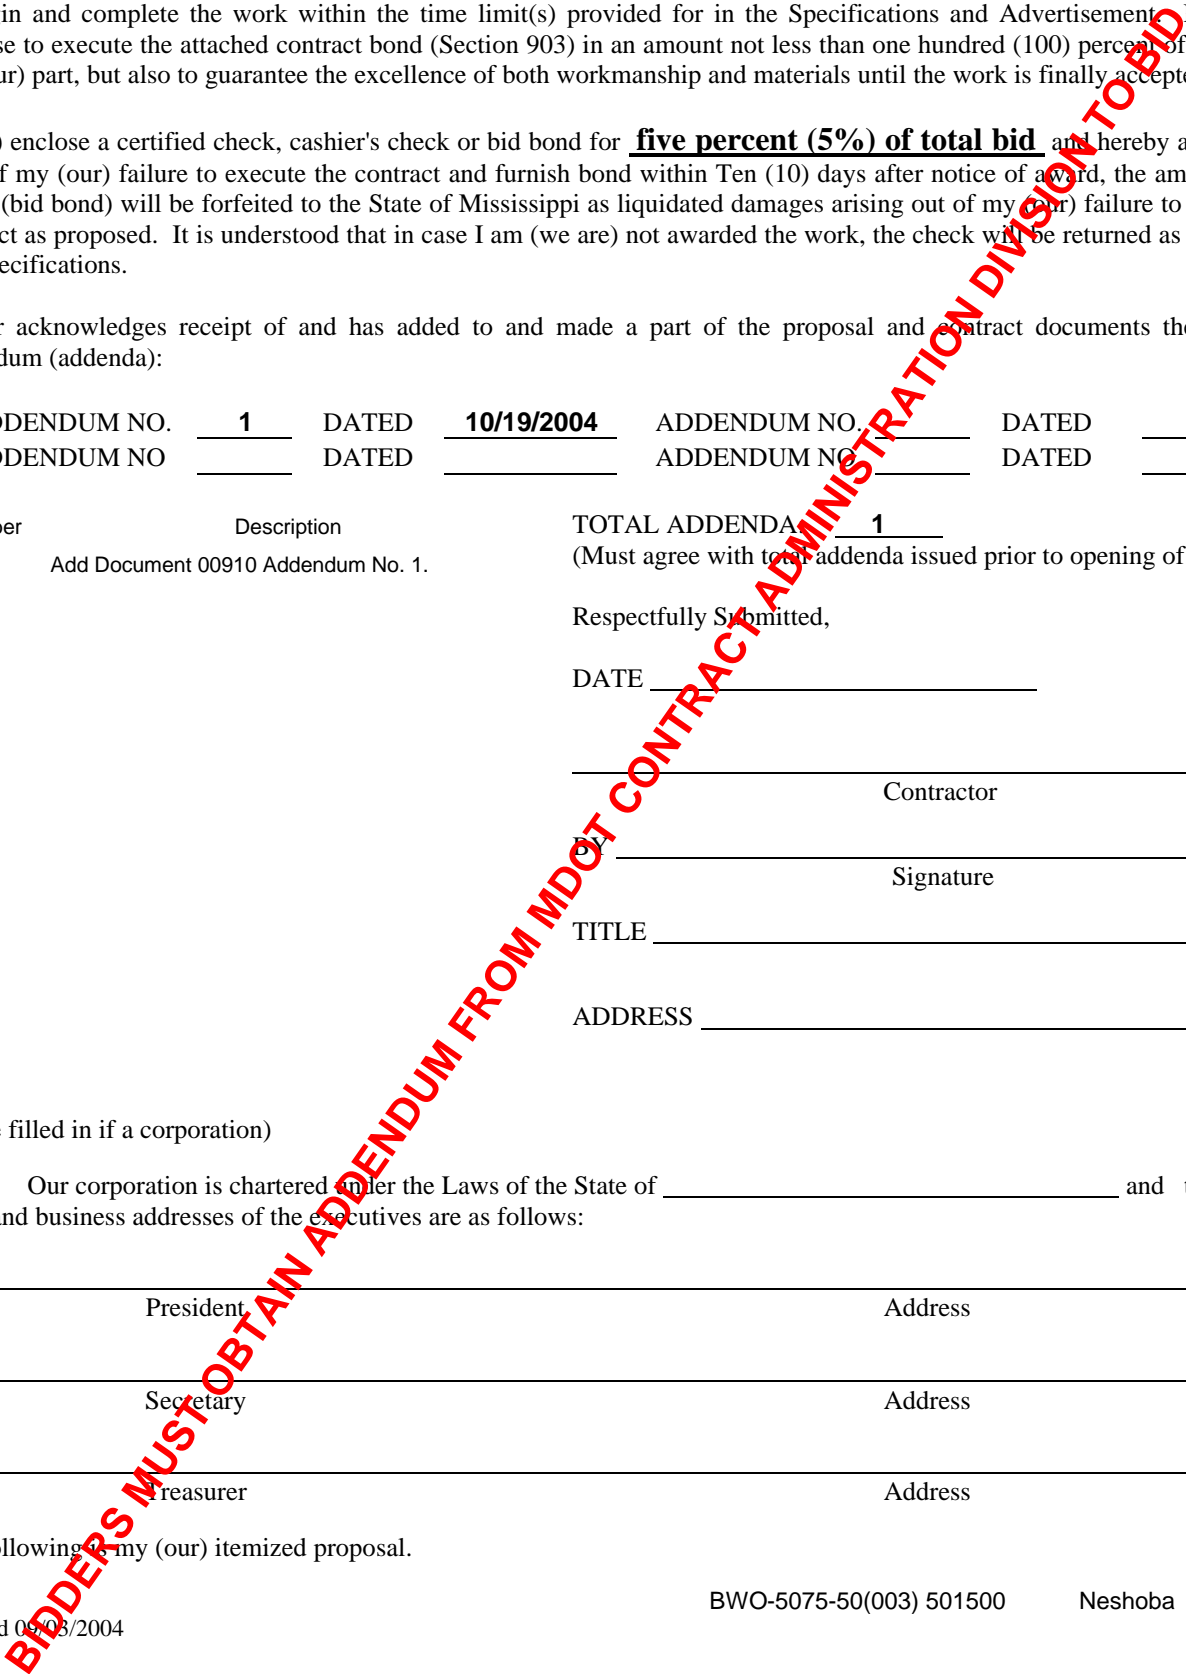

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

**ADDENDUM No. 1
DOCUMENT 00910**

DATE: 10-14-04

**PROJECT: ADDITION TO MAINTENANCE AREA
HEADQUARTERS AT PHILADELPHIA
NESHOPA COUNTY**

PROJECT NUMBER: BWO-5075-50(001) 501500

PART 1 GENERAL

1.01 DESCRIPTION: Bidders are hereby advised that the following changes are to be made to this Contract. Bidders shall acknowledge receipt of this Addendum by inserting its number and date in the designated spaces on their Proposal.

1.02 SPECIFICATIONS

A. Add Specification Section 15406 Sewage Pumping System.

1.03 DRAWINGS

A. Replace Sheet Number 20, Working Number P1.0 – Plumbing Site Plan with new Sheet Number 20, Working Number P1.0 (Revised 10-14-04). The following changes include:

1. Add sewage lift station and gravity sewer piping from existing project office and new maintenance building to lift station as shown on revised drawing.
2. Add sewage lift station detail 2/P1.0.

B. Replace Sheet Number 28, Working Number E1.0 – Site Plan – Electrical with new Sheet Number 28, Working Number E1.0 (Revised 10-14-04). The following changes include:

1. Added feed to sewer lift station as follows:
Key note 7 to read:
Install in-ground pull box as indicated. Pick up the ¾”C stubbed out five feet from the building (As shown on Sheet Number 30, Working Number E2.2) and run to in-ground flush mounted pull box and on to sewage lift station control panel at fence. Conduit to include 2#8,1#12(N),1#12(G) from Panel “M” in electrical room 114. Use circuit M-35,37. Coordinate with plumbing contractor.

- C. Replace Sheet Number 30, Working Number E2.2 – Floor Plan – Power/Communications with Sheet Number 30 (Revised 10-14-04). The following changes include:
 - 1. Key note 6 to read as follows:
Stub out 1-run of ¾” SCH 80 PVC conduit five feet out from building and cap off (no glue) with pull string for feed to sewage lift station control panel indicated in key note 7 listed above.

- D. Replace Sheet Number 33, Working Number E4.1 – Electrical Schedules with new Sheet Number 33, Working Number E4.1 (Revised 10-14-04). The following changes include:
 - 1. Add 1-40A2P circuit breaker in Panel “M” to serve sewage lift station control panel.

PART 2 PRODUCTS
Not Used

PART 3 EXECUTION
Not Used

END OF DOCUMENT