FED. ROAD REG. NO.	STATE	PROJECT NO.	SHEET NO.
4	MISS.	MP-3814-76(001)	1

GENERAL INDEX

FOR DETAILED INDEX OF PLANS SEE SHEET NO. 2

DESCRIPTION	NUMBER OF SHEETS
TITLE SHEET	1
DETAILED INDEX	1
GENERAL NOTES	
TYPICAL SECTIONS	1
QUANTITIES	2
PLAN AND PROFILES	
SPECIAL DESIGN – ROADWAY ITEMS	13
BRIDGE DRAWINGS	
SPECIAL DESIGN – BRIDGES	
CROSS-SECTIONS	
TOTAL SHEETS	18

05-16-05

STATE OF MISSISSIPPI

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

PLAN AND PROFILE OF PROPOSED STATE HIGHWAY STATE PROJECT NO. MP-3814-76(001)

MILL AND OVERLAY BROADWAY LOOP **FMS:302868/301000**

WASHINGTON COUNTY

SCALES

PLAN		1 IN. = 100 FT.
PROFILE	HOR.	1 IN. = 100 FT.
	VERT.	1 IN. = 10 FT.
LAYOUT		1 IN. = FT.

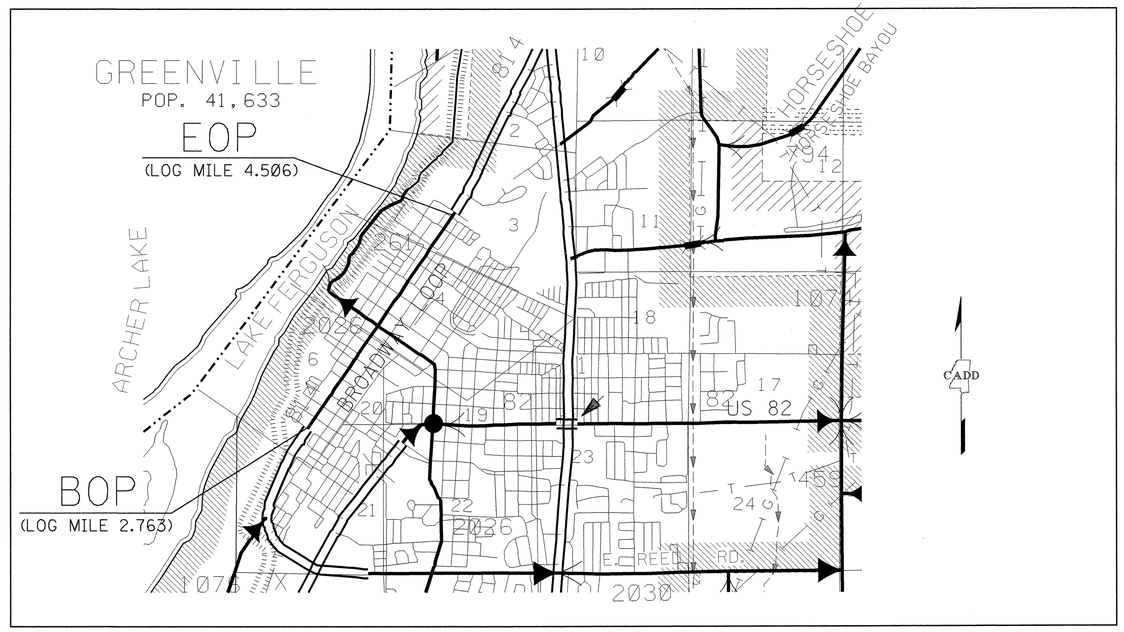

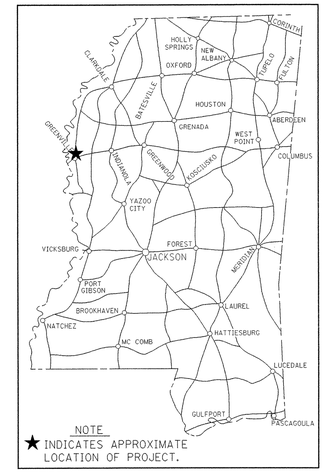

DESIGN CONTROL

_____ MPH = V (SPEED DESIGN)

ADT (____) = _____ : ADT (____) = _____

DHV = _____ : D = _____ % T = _____ %

PERMITS ACQUIRED BY MDOT

WETLANDS AND WATERS PERMITS (NECESSARY FOR ULTIMATE IMPROVEMENTS ONLY):

	WATERS	WETLANDS
NATIONWIDE #14	N	N
NATIONWIDE (OTHER)*	N	N
GENERAL*	N	N
INDIVIDUAL (404)*	N	N

* ACQUISITION OF PERMITS FOR TEMPORARY IMPACTS DURING CONSTRUCTION ARE THE RESPONSIBILITY OF THE CONTRACTOR

STORMWATER PERMIT N

Y	REQUIRED, CNOI SUBMITTED BY MDOT (DISTRIBUTED AREA = 5 ACRES +)(NTB 6484)
S	REQUIRED, SCNOI TO BE SUBMITTED BY CONTRACTOR (1 TO 4.99 ACRES)(NTB 6483)
N	NO STORMWATER PERMIT REQUIRED (<1 ACRE)

APPROVED BY: CKP DATE: 5/13/05

EQUATIONS

EXCEPTIONS

CONVENTIONAL SYMBOLS

COUNTY LINE

TOWN CORPORATION LINE

SECTION LINE

EXISTING ROAD OR TRAVELED WAY

PROPOSED ROAD OR TRAVELED WAY

RAILROAD

SURVEY LINE

BRIDGES

LENGTH DATA

LENGTH OF ROADWAY	9203 FT.	1.743 MI.
LENGTH OF BRIDGES	FT.	MI.
LENGTH OF PROJECT (NET)		1.743 MI.
LENGTH OF EXCEPTIONS	FT.	MI.
LENGTH OF PROJECT (GROSS)		1.743 MI.

98

REVISIONS | BY | DATE

APPROVED: Harry Lee James 5/16/05
CHIEF ENGINEER DATE

5/16/05
EXECUTIVE DIRECTOR DATE

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

APPROVED:

DIVISION ADMINISTRATOR DATE

FEDERAL HIGHWAY ADMINISTRATION
DEPARTMENT OF TRANSPORTATION

TITLE
ROADWAY DESIGN DIVISION
MISSISSIPPI DEPARTMENT OF TRANSPORTATION

5/13/2005 11:28AM TITLE.DGN

STATE	PROJECT NO.
MISS.	MP-3814-76(001)

DESCRIPTION OF SHEET		WKG. NO.	SH. NO.
TITLE SHEET (1)			1
DETAILED INDEX & GENERAL NOTES (1)		DI-1	2
TYPICAL SECTION SHEETS (1)			
TYPICAL SECTION		TS-1	3
QUANTITY SHEETS (2)			
SUMMARY OF QUANTITIES		SQ-1	4
ESTIMATED QUANTITIES FOR TRAFFIC CONTROL		TCPQ-1	5
SPECIAL DESIGN SHEETS (1)			
DETAIL OF CONSTRUCTION SIGNING		DCS-1	6
STANDARD DRAWINGS - ROADWAY SHEETS (12)			
PAVEMENT MARKING DETAILS FOR 4 & 5-LANE UNDIVIDED ROADWAYS	12-01-99	PM-2	121
STANDARD ROADSIDE SIGNS		SN-3A	223
STANDARD ROADSIDE SIGNS	3-01-02	SN-3B	224
STANDARD ROADSIDE SIGN ASSEMBLY & INSTALLATION		SN-4	225
STANDARD ROADSIDE SIGN ASSEMBLY & INSTALLATION		SN-4A	226
TRAFFIC CONTROL PLAN WITH FLAGGER (ONE-LANE CLOSURE OF TWO WAY TRAFFIC)		TCP-1	250
HIGHWAY SIGN AND BARRICADE DETAILS FOR CONSTRUCTION PROJECTS		TCP-10	259
TRAFFIC CONTROL PLAN MOBILE OPERATIONS MULTILANE ROADS AND TWO-LANE ROADS	12-01-99	TCP-11	260
TRAFFIC CONTROL PLAN : UNEVEN PAVEMENT DETAILS		TCP-14	263
TEMPORARY STRIPING FOR TRAFFIC CONTROL 2-LANE AND 4-LANE DIVIDED HIGHWAYS	12-01-99	TCP-15	264
TEMPORARY STRIPING FOR TRAFFIC CONTROL 4-LANE AND 5-LANE UNDIVIDED ROADWAYS		TCP-16	265
DRIVEWAYS, CURB & GUTTER, & SIDEWALK		SD-1	287
TOTAL SHEETS (18)			

GENERAL NOTES

1. THE LOCATION AND SPACING OF SIGNS, SHOWN ON THE TRAFFIC CONTROL PLANS, ARE APPROXIMATE AND MAY BE ADJUSTED AS NECESSARY TO FIT FIELD CONDITIONS.

2. ALL TRAFFIC CONTROL DEVICES ON THIS PROJECT SHALL COMPLY WITH PART VI OF THE MUTCD (LATEST EDITION).

3. FLUORESCENT ORANGE SHEETING SHALL BE USED ON ALL CONSTRUCTION AND TRAFFIC CONTROL SIGNS EXCEPT FOR THOSE DESIGNATED ON THE PLANS TO BE BLACK LEGEND AND BORDER ON WHITE BACKGROUND.

4. VOIDS CREATED BY THE REMOVAL OF POSTS, CONCRETE ANCHORS, FOOTINGS, ETC. SHALL BE BACKFILLED AND TAMPED IN ACCORDANCE WITH SECTION 203 OF THE MISSISSIPPI STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION.

5. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO PROTECT AGAINST EXISTING STRUCTURES SUCH AS PIPES, INLETS, APRONS, BRIDGES, ETC. THE CONTRACTOR SHALL REPLACE OR REPAIR AT NO COST TO THE STATE ANY STRUCTURES DAMAGED DURING THE LIFE OF THE CONTRACT.

6. INCIDENTAL WORK SUCH AS MOWING, REMOVING VEGITATION, SHAPING AND COMPACTING SHOULDERS (INCLUDING THE BASE FOR PAVED APRONS) AND OTHER INCIDENTAL WORK NECESSARY TO COMPLETE THE WORK WILL NOT BE MEASURED FOR SEPARATE PAYMENT. THE COST OF THIS WORK WILL BE ABSORBED IN OTHER BID ITEMS

7. OCCASIONAL FAILED AREAS EXIST WITHIN THE TERMINI OF THIS PROJECT. REMOVAL OF THE FAILED MATERIAL SHALL BE REQUIRED AS DIRECTED BY THE ENGINEER. TEMPORARY DAYTIME LANE CLOSURES SHALL BE ERECTED DURING RECONSTRUCTION OF THE FAILED AREAS. THE COST FOR THIS WORK IS TO BE INCLUDED IN THE PRICE FOR PAY ITEM NO. 618–A, MAINTENANCE OF TRAFFIC. REPAIR OF THE FAILED AREA SHALL BE COMPLETED BY THE END OF EACH WORK DAY. IN THE EVENT THE REPAIR IS NOT COMPLETED BY THE END OF THE WORK DAY DUE TO INCLEMENT WEATHER OR SOME UNFORESEEN EVENT, A TEMPORARY GRANULAR BACK FILL SHALL BE PLACED TO ALLOW SAFE OVERNIGHT TRAFFIC PASSAGE. THE BACK FILL SHALL THEN BE COMPLETELY REMOVED AND THE REPAIR COMPLETED AS SOON AS POSSIBLE.

8. REMOVE THE EXISTING RAILROAD TRACK, PADS AND CROSS TIES LOCATED AT ROACH STREET AND STORE ON ADJACENT RAILROAD RIGHT OF WAY. THESE ITEMS SHALL BE ABSORBED UNDER PAY ITEM 202–A "REMOVAL OF OBSTRUCTIONS". PAY ITEM 304–H, 3/4" AND DOWN CRUSHED STONE BASE; SHALL BE PLACED UP TO THE FINAL 7.5" OF THE ROAD BED. THEN 6" OF 19mm HOT MIX ASPHALT SHALL BE PLACED OVER THE CRUSHED STONE. THE FINAL 1.5" SHALL BE COVERED USING 9.5mm HOT MIX ASPHALT, OR AS DIRECTED BY THE ENGINEER.

FINAL PLANS-DATE 05/16/05		
FMS CON. # 302868/301000		
REVISIONS		
DATE	SHEET NO.	BY

DISTRICT 3

98

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

DETAILED INDEX

REVISION | BY | DATE

PROJECT NO. MP–3814–76(001)
COUNTY : WASHINGTON

FILENAME:
DESIGN TEAM CHECKED DATE

WORKING NUMBER DI-1

SHEET NUMBER 2

PLAN ROADWAY DESIGN DIVISION MISSISSIPPI DEPARTMENT OF TRANSPORTATION
5/13/2005 11:29AM GNOTES.DGN