1 st O. REV. GENERAL INDEX 1 st O. REV.

FOR DETAILED INDEX OF PLANS SEE SHEET NO. 2

DESCRIPTION	NUMBER OF SHEETS
TITLE SHEET	1
DETAILED INDEX	
GENERAL NOTES	1
TYPICAL SECTIONS	1
QUANTITIES	2
PLAN AND PROFILES	
SPECIAL DESIGN – ROADWAY ITEMS	11 1
BRIDGE DRAWINGS	
SPECIAL DESIGN – BRIDGES	
CROSS-SECTIONS	
TOTAL SHEETS	16 1

1 06-20-05

STATE OF MISSISSIPPI

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

PLAN AND PROFILE OF PROPOSED STATE HIGHWAY FEDERAL AID PROJECT NO. NH-0009-02(070)

2

OVERLAY US 61 THROUGH ROLLING FORK TO THE WASHINGTON COUNTY LINE

SHARKEY COUNTY

FMS: 104487/301000

SCALES

PLAN		1 IN. = 100 FT.
PROFILE	HOR.	1 IN. = 100 FT.
	VERT.	1 IN. = 10 FT.
LAYOUT		1 IN. = 5,280 FT.

FED. ROAD REG. NO.	STATE	PROJECT NO.	SHEET NO.
4	MISS.	NH-0009-002(070)	1

2

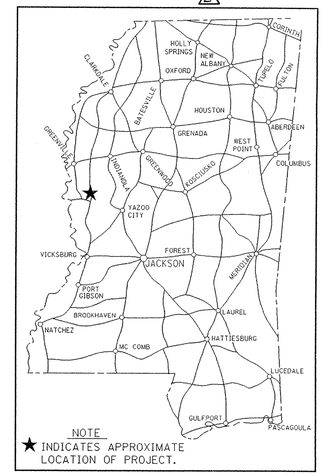

1 **BOP**
LOG MILE 20.170

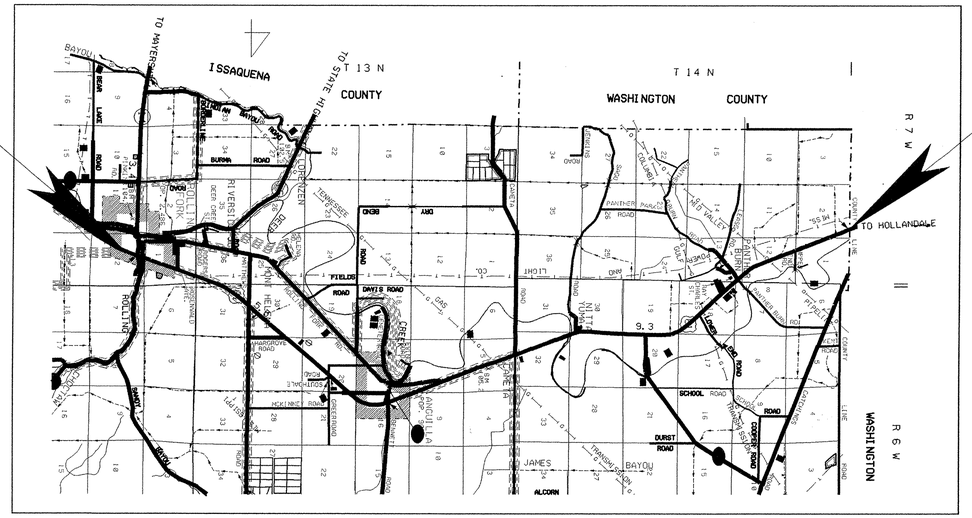

1 **EOP**
LOG MILE 35.156

PERMITS ACQUIRED BY MDOT		
WETLANDS AND WATERS PERMITS (NECESSARY FOR ULTIMATE IMPROVEMENTS ONLY):	WATERS	WETLANDS
NATIONWIDE #14	N	N
NATIONWIDE (OTHER)*	N	N
GENERAL*	N	N
INDIVIDUAL (404)*	N	N

* ACQUISITION OF PERMITS FOR TEMPORARY IMPACTS DURING CONSTRUCTION ARE THE RESPONSIBILITY OF THE CONTRACTOR

STORMWATER PERMIT	S
Y	REQUIRED, CNOI SUBMITTED BY MDOT (DISTRIBUTED AREA = 5 ACRES +)(NTB 6484)
S	REQUIRED, SCNOI TO BE SUBMITTED BY CONTRACTOR (1 TO 4.99 ACRES)(NTB 6483)
N	NO STORMWATER PERMIT REQUIRED (<1 ACRE)

APPROVED BY: CKP DATE: 6/17/05

CONVENTIONAL SYMBOLS

COUNTY LINE
TOWN CORPORATION LINE
SECTION LINE
EXISTING ROAD OR TRAVELED WAY
PROPOSED ROAD OR TRAVELED WAY
RAILROAD
SURVEY LINE
BRIDGES

LENGTH DATA

LENGTH OF ROADWAY	FT.	14.432 MI.
LENGTH OF BRIDGES	FT.	MI.
LENGTH OF PROJECT (NET)		MI.
LENGTH OF EXCEPTIONS	FT.	MI.
LENGTH OF PROJECT (GROSS)		14.432 MI.

DATE	REVISIONS	BY
06/06	REVISED PROJECT NO.	GTW 2
06/06	ADDED SHEET AND ADDED LOG MILES TO SHEET	GTW 1

101

APPROVED:
CHIEF ENGINEER — DATE 6/17/05
EXECUTIVE DIRECTOR — DATE 6-17-05
MISSISSIPPI DEPARTMENT OF TRANSPORTATION

APPROVED:
DIVISION ADMINISTRATOR — DATE
FEDERAL HIGHWAY ADMINISTRATION
DEPARTMENT OF TRANSPORTATION

TITLE
ROADWAY DESIGN DIVISION
MISSISSIPPI DEPARTMENT OF TRANSPORTATION

6/17/2005 9:28 AM TITLE.DGN

1 st O. REV.

STATE	PROJECT NO.
MISS.	STP-0009-002(070)

DESCRIPTION OF SHEET		WKG. NO.	SH. NO.
TITLE SHEET (1)			1
DETAILED INDEX & GENERAL NOTES (1)		DI-1	2
TYPICAL SECTION SHEETS (1)			
TYPICAL SECTION		TS-1	3
QUANTITY SHEETS (2)			
SUMMARY OF QUANTITIES		SQ-1	4
ESTIMATED QUANTITIES FOR TRAFFIC CONTROL		TCPQ-1	5
SPECIAL DESIGN SHEETS (4)			
DETAIL OF CONSTRUCTION SIGNING		DCS-1	6
LOCATION OF R-16 (DOUBLE FINE SIGNS)		MDS-1	7
SIGNING OF TWO-WAY TRAFFIC FOR NO PASSING ZONES		MDS-2	8
RUMBLE STRIPES (GROUND-IN)		RS-1	9
STANDARD DRAWINGS - ROADWAY SHEETS (7) 1			
PAVEMENT MARKING DETAILS FOR 2 & 4-LANE DIVIDED ROADWAYS	12-01-99	PM-1	120
PAVEMENT MARKING DETAILS FOR 4 & 5-LANE UNDIVED ROADWAYS	12-01-99	PM-2	121 1
TRAFFIC CONTROL PLAN WITH FLAGGER (ONE-LANE CLOSURE OF TWO WAY TRAFFIC)		TCP-1	250
HIGHWAY SIGN AND BARRICADE DETAILS FOR CONSTRUCTION PROJECTS		TCP-10	259
TRAFFIC CONTROL PLAN MOBILE OPERATIONS MULTILANE ROADS AND TWO-LANE ROADS	12-01-99	TCP-11	260
TRAFFIC CONTROL PLAN : UNEVEN PAVEMENT DETAILS		TCP-14	263
TEMPORARY STRIPING FOR TRAFFIC CONTROL 2-LANE AND 4-LANE DIVIDED HIGHWAYS	12-01-99	TCP-15	264
TOTAL SHEETS (16) 1			

GENERAL NOTES

1. THE LOCATION AND SPACING OF SIGNS, SHOWN ON THE TRAFFIC CONTROL PLANS, ARE APPROXIMATE AND MAY BE ADJUSTED AS NECESSARY TO FIT FIELD CONDITIONS.
2. ALL TRAFFIC CONTROL DEVICES ON THIS PROJECT SHALL COMPLY WITH PART VI OF THE MUTCD (LATEST EDITION).
3. FLUORESCENT ORANGE SHEETING SHALL BE USED ON ALL CONSTRUCTION AND TRAFFIC CONTROL SIGNS EXCEPT FOR THOSE DESIGNATED ON THE PLANS TO BE BLACK LEGEND AND BORDER ON WHITE BACKGROUND.
4. VOIDS CREATED BY THE REMOVAL OF POSTS, CONCRETE ANCHORS, FOOTINGS, ETC. SHALL BE BACKFILLED AND TAMPED IN ACCORDANCE WITH SECTION 203 OF THE MISSISSIPPI STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION.
5. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO PROTECT AGAINST EXISTING STRUCTURES SUCH AS PIPES, INLETS, APRONS, BRIDGES, ETC. THE CONTRACTOR SHALL REPLACE OR REPAIR AT NO COST TO THE STATE ANY STRUCTURES DAMAGED DURING THE LIFE OF THE CONTRACT.
6. INCIDENTAL WORK SUCH AS MOWING, REMOVING VEGITATION, SHAPING AND COMPACTING SHOULDERS (INCLUDING THE BASE FOR PAVED APRONS) AND OTHER INCIDENTAL WORK NECESSARY TO COMPLETE THE WORK WILL NOT BE MEASURED FOR SEPARATE PAYMENT. THE COST OF THIS WORK WILL BE ABSORBED IN OTHER BID ITEMS
7. GRANULAR MATERIAL REMOVED FROM THE SHOULDER INSIDE THE CITY LIMITS OF ROLLING FORK SHALL BE USED TO WIDEN SHOULDERS AND FLATTEN FORE SLOPES AS DIRECTED BY THE ENGINEER. IF THE ENGINEER DETERMINES THERE WILL BE EXCESS GRANULAR MATERIAL INSIDE THE CITY LIMITS IT SHALL BE PAID AS EXCESS.
8. GRANULAR MATERIAL REMOVED FROM TRENCH WIDENING SHALL BE USED ON THE SHOULDERS TO RAISE SHOULDER GRADE TO PROPOSED NEW ELEVATION
9. THE BOP OF THE PROJECT IS THE NORTH END OF THE BRIDGE ABUTMENT OVER DEER CREEK IN THE CITY LIMITS ROLLING FORK. HOWEVER, IT IS THE INTENT OF THIS PROJECT THAT ALL FOUR TERMINAL END SECTIONS OF THIS BRIDGEBE REPLACED.
10. 2 WHERE REFERENCE IS MADE TO PROJECT NO. STP–0009–002(070), IT SHALL BE UNDERSTOOD THAT NH–0009–002(070) IS THE CORRECT PROJECT NO.

FINAL PLANS-DATE.....6/17/05		
FMS CON. # 104487/301000		
REVISIONS		
DATE	SHEET NO.	BY
6/24/05	1, 2, 3, 4 AND 6	BHF
10/05/05	1 AND 2	GTW
10/25/05	3 & 4	BHF

DISTRICT 3

101

DATE	REVISION	BY
10/05/05	ADDED GENERAL NOTE	GTW
6/24/05	ADDED SHEET	BHF

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

DETAILED INDEX

PROJECT NO. STP–0009–002(070)
COUNTY : SHARKEY

FILENAME:
DESIGN TEAM CHECKED DATE

WORKING NUMBER DI-1
SHEET NUMBER 2

PLAN ROADWAY DESIGN DIVISION MISSISSIPPI DEPARTMENT OF TRANSPORTATION
10-25-2005 1:17:47 TIDE.DGN