FED. ROAD REG. NO.	STATE	PROJECT NO.	SHEET NO.
4	MISS.	STP–0059–03(081)	1

GENERAL INDEX

FOR DETAILED INDEX OF PLANS SEE SHEET NO. 2

DESCRIPTION	NUMBER OF SHEETS
TITLE SHEET	1
DETAILED INDEX	1
GENERAL NOTES	
TYPICAL SECTIONS	
QUANTITIES	2
PLAN AND PROFILES	
SPECIAL DESIGN – SITE IMPROVEMENTS	37
BRIDGE DRAWINGS	
SPECIAL DESIGN – BRIDGES	
CROSS–SECTIONS	
STANDARD PLANS	18
TOTAL SHEETS	59

STATE OF MISSISSIPPI

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

PLANS OF PROPOSED SITE IMPROVEMENTS TO LAUDERDALE COUNTY WELCOME CENTER FEDERAL AID PROJECT NO. STP–0059–03(081)

06-6-05

103146/302000

I–59 WESTBOUND
LAUDERDALE COUNTY

SCALE
LAYOUT 1 IN. = 5,280 FT.

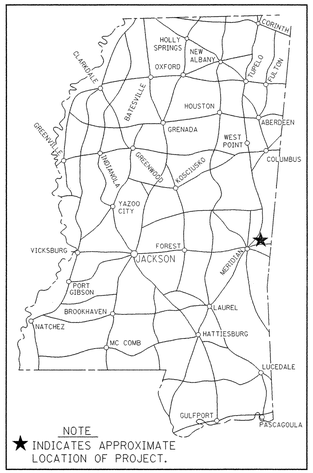

DESIGN CONTROL
_____ MPH = V (SPEED DESIGN)
ADT (____) = _____ : ADT (____) = _____
DHV = _____ : D = _____% T = _____%

PERMITS ACQUIRED BY MDOT		
WETLANDS AND WATERS PERMITS (NECESSARY FOR ULTIMATE IMPROVEMENTS ONLY):	WATERS	WETLANDS
NATIONWIDE #14	N	N
NATIONWIDE (OTHER)*	N	N
GENERAL*	N	N
INDIVIDUAL (404)*	N	N

* ACQUISITION OF PERMITS FOR TEMPORARY IMPACTS DURING CONSTRUCTION ARE THE RESPONSIBILITY OF THE CONTRACTOR

STORMWATER PERMIT	S
Y	REQUIRED, CNOI SUBMITTED BY MDOT (DISTRIBUTED AREA = 5 ACRES +)(NTB 6484)
S	REQUIRED, SCNOI TO BE SUBMITTED BY CONTRACTOR (1 TO 4.99 ACRES)(NTB 6483)
N	NO STORMWATER PERMIT REQUIRED (<1 ACRE)

APPROVED BY: _____ DATE: 6-3-05

WELCOME CENTER

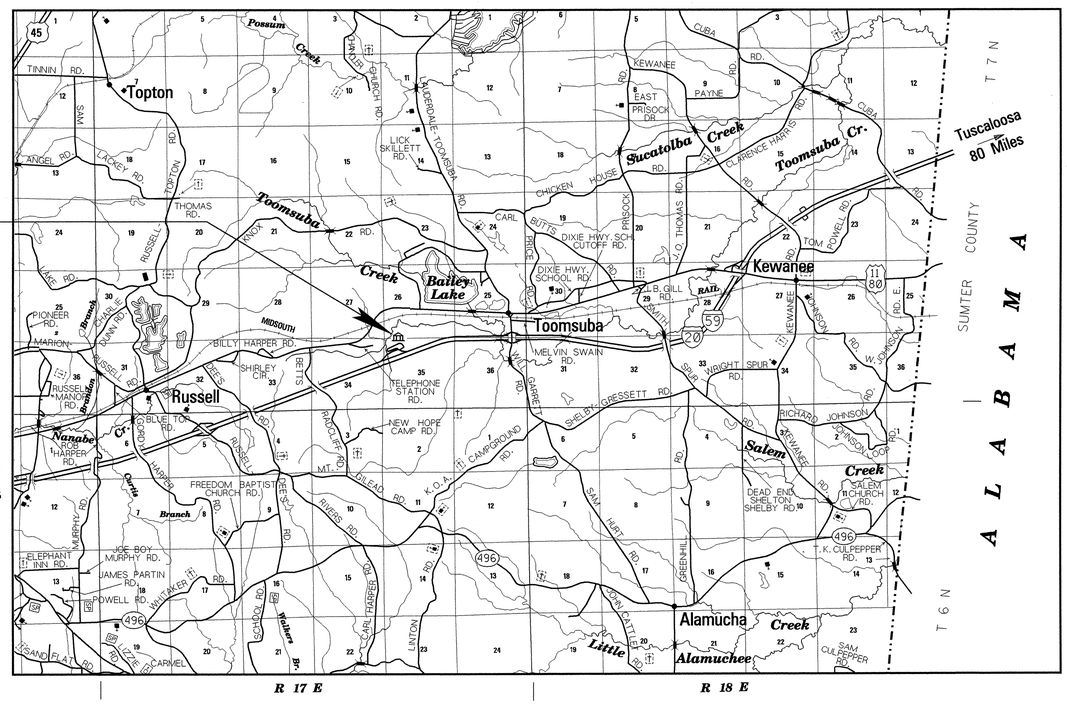

CONVENTIONAL SYMBOLS

COUNTY LINE
TOWN CORPORATION LINE
SECTION LINE
EXISTING ROAD OR TRAVELED WAY
PROPOSED ROAD OR TRAVELED WAY
RAILROAD
SURVEY LINE
BRIDGES

ASK

APPROVED:
CHIEF ENGINEER — DATE 6/6/05
EXECUTIVE DIRECTOR — DATE 6-6-05
MISSISSIPPI DEPARTMENT OF TRANSPORTATION

APPROVED:
DIVISION ADMINISTRATOR — DATE
FEDERAL HIGHWAY ADMINISTRATION
DEPARTMENT OF TRANSPORTATION

REVISIONS — BY — DATE

TITLE
ROADWAY DESIGN DIVISION
MISSISSIPPI DEPARTMENT OF TRANSPORTATION

6/3/2005 2:31 PM TITLE.DGN

1 st O. REV. 1 st O. REV. 1 st O. REV.

STATE	PROJECT NO.
MISS.	STP-0059-03(081)

INDEX TO DRAWINGS

DESCRIPTION OF SHEET	WORKING NUMBER	SHEET NUMBER
MDOT TITLE SHEET		1
DETAILED INDEX AND GENERAL NOTES	DI-1	2
SUMMARY OF QUANTITIES	SQ1	3
SUMMARY OF QUANTITIES	SQ2	4
SITE PLAN	SP	5
EXISTING CONDITIONS	EX	6
DEMOLITION PLAN	DM1	7
DEMOLITION PLAN	DM2	8
DEMOLITION PLAN	DM3	9
DEMOLITION PLAN	DM4	10
STORM WATER POLLUTION PREVENTION PLAN	SWPPP	11
OVERALL SITE PLAN	L	12
LAYOUT PLAN	L1	13
PAVING PLAN/DETAILED LAYOUT	L2	14
JOINT LAYOUT PLAN	JP	15
PAVEMENT DESIGN PLAN	P1	16
PAVEMENT DESIGN PLAN	P2	17
PAVEMENT DESIGN PLAN	P3	18
GRADING PLAN	G1	19
GRADING PLAN	G2	20
IRRIGATION PLAN	IR1	21
IRRIGATION PLAN	IR2	22
OVERALL PLANTING PLAN	LA1	23
PLANTING PLAN	LA2	24
PLANTING DETAILS	LA3	25
VEGETATION SCHEDULE	VS	26
MOWING LIMITS	ML	27
SITE DETAILS	D1	28
SIGN (MASONRY AND STONE)	SG1	29
STRIPING AND SIGNAGE PLAN	SSP1	30
STRIPING AND SIGNAGE PLAN	SSP2	31
STRIPING AND SIGNAGE PLAN	SSP3	32
TRAFFIC CONTROL PLAN	TC1	33
TRAFFIC CONTROL PLAN	TC2	34
TRAFFIC CONTROL PLAN	TC3	35
GENERAL NOTES, LEGEND, AND ABBREVIATIONS-ELECTRICAL	E0.1	36
SITE PLAN-ELECTRICAL	E1.0	37
SITE LIGHTING-DEMOLITION	E1.1	38
ELECTRICAL DETAILS	E2.1	39
ELECTRICAL DETAILS	E2.2	40
WATER AND SEWER IMPROVEMENTS	WS	41

STANDARD MDOT DRAWINGS

CONCRETE PAVEMENT JOINTS	PJ-1	104
CONCRETE PAVEMENT JOINTS (LONGITUDINAL)	PJ-2	105
PAVEMENT MARKING DETAILS FOR INTERCHANGE ENTRANCE RAMPS (PARALLEL AND TAPER)	PM-3	122
PAVEMENT MARKING DETAILS FOR INTERCHANGE EXIT RAMPS (PARALLEL AND TAPER)	PM-4	123
PAVEMENT MARKING LEGEND DETAILS	PM-6	125
TYPICAL, TEMPORARY EROSION CONTROL MEASURES (SILT FENCE, HAY BALES, AND BRUSH BARRIER)	TEC-1	142
STANDARD ROADSIDE SIGN ASSEMBLY AND INSTALLATION	SN-4	225
STANDARD ROADSIDE SIGN ASSEMBLY AND INSTALLATION	SN-4A	226
HIGHWAY SIGN AND BARRICADE DETAILS FOR CONSTRUCTION PROJECTS	TCP-10	259
DRIVEWAYS, CURB AND GUTTER, AND SIDEWALK	SD-1	287
DRIVEWAYS, CURB AND GUTTER, AND SIDEWALK	SD-2	288
PIPE CULVERT INSTALLATION	PI-1	300
PIPE COLLAR-CONCRETE	PC-1	301
JUNCTION BOX FOR PIPE CULVERTS	JB-1	302
DETAILS OF GRATES FOR GUTTER INLETS	IG-2	315
STORM SEWER STRUCTURE (REGULAR)	SS-2	322
STORM SEWER INLET TYPE SS-3	SS-3	323
FLARED END SECTION FOR CONCRETE PIPE	FE-1	328

TOTAL	59

GENERAL NOTES:

1. CONTRACTOR SHALL KEEP THE SITE OPEN AND ACCESSIBLE TO THE GENERAL PUBLIC DURING THE CONTRACT, WITH EXCEPTION OF THE TIME REQUIRED TO RESURFACE THE WELCOME CENTER ENTRANCE AND EXIT RAMPS FROM AND TO THE INTERSTATE. THE CONTRACTOR SHALL PROVIDE THE NECESSARY PEDESTRIAN BARRICADES, SURROUNDING THE ENTIRE WORK AREA, TO ROUTE THE GENERAL PUBLIC AROUND THE WORK AREAS IN ACCORDANCE WITH MUTCD (MANUAL OF UNIFORM TRAFFIC CONTROL DEVICES – LATEST EDITION. BARRICADES SHALL CONSIST OF KEYSTONE (OR APPROVED EQUAL) RED BRAND STUDDED T-POSTS (FENCE POSTS), GREEN, 6'-0" LONG, 10'-0" O.C.; TYPE III BARRICADES FOR TRUCK PARKING, TENEX (OR APPROVED EQUAL) ORANGE SAFETY FENCE, 4'-0" HIGH, SECURE WITH ALUMINUM FENCE TIES OR TIE WIRE. FLOURESCENT ORANGE SHEETING SHALL BE REQUIRED FOR CONSTRUCTION AND TRAFFIC CONTROL SIGNS.
2. EXISTING STRUCTURES OR UTILITIES, NOT DESIGNATED FOR DEMOLITION/UPGRADE, DAMAGED BY THE CONSTRUCTION OPERATION, AS DETERMINED BY THE ENGINEER, SHALL BE REPLACED OR REPAIRED BY THE CONTRACTOR, AT NO COST TO THE DEPARTMENT.
3. THE BRICK AND MORTAR FOR THE CONSTRUCTION OF THE WELCOME CENTER SIGN SHALL BE THE SAME TYPE AND KIND AND SHALL MATCH THE EXISTING BRICK USED ON THE BUILDING, OR APPROVED EQUAL. THE BRICK WILL NOT REQUIRE TESTING, BUT REQUIRES APPROVAL OF THE ENGINEER.
4. THE CONTRACTOR WILL BE PERMITTED TO USE WATER THAT IS AVAILABLE ON THE SITE DURING THE PLANTING AND ESTABLISHING OF THE TREES AND SHRUBS. FALLEN LIMBS, LITTER AND DEBRIS SHALL BE REMOVED FROM THE SITE FOR THE LIFE OF THE CONTRACT. THE CONTRACTOR SHALL PROVIDE TREE PROTECTION DURING CONSTRUCTION.
5. IF THE CONTRACTOR, IN THE COURSE OF THE WORK, FINDS OR SUSPECTS ANY DISCREPANCY BETWEEN THE DRAWINGS AND THE PHYSICAL CONDITIONS OF THE SITE OR WORK OR ANY ERRORS OR OMISSIONS IN THE CONTRACT DOCUMENTS OR SPECIFICATIONS, HE SHALL IMMEDIATELY NOTIFY THE ENGINEER, AND THE ENGINEER SHALL PROMPTLY VERIFY THE SAME. ANY WORK DONE AFTER SUCH DISCOVERY, UNLESS AUTHORIZED, SHALL BE DONE AT THE CONTRACTOR'S RISK.
6. DURING CONSTRUCTION, WHILE WELCOME CENTER IS OPEN, CONTRACTOR SHALL PROVIDE BARRIER FREE, ALL-WEATHER SURFACE ACCESS FROM THE VEHICULAR PARKING AREA TO THE WELCOME CENTER BUILDING. PLYWOOD WALKS WITH SLIP RESISTANT FINISH WITH ENGINEERS APPROVAL.

PS & E PLANS - DATE 6-6-05

REVISIONS

DATE	SHEET NO.	BY
7-05-05	3 & 4	MRS
7-29-05	2-4, 7, 14, 21-26, 28	MRS
7-29-05	37 & 39	DRO
12-08-05	3, 4, 39, 40 MRS &	DRO
1-04-06	3	MRS

BASE DATA PROVIDED BY MISSISSIPPI DEPT. OF TRANSPORTATION TO WEATHERFORD/ MCDADE ON CONSTRUCTION DOCUMENTS FOR LAUDERDALE COUNTY, MISSISSIPPI WELCOME CENTER STP-0059-03(081). ASW

PREPARED BY: Weatherford McDade, Ltd. PLANNING CONSULTANTS ■ LANDSCAPE ARCHITECTS

REVISION	BY

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SITE IMPROVEMENTS TO LAUDERDALE COUNTY WELCOME CENTER

DETAILED INDEX AND GENERAL NOTES

PROJECT NO.: STP-0059-03(081) LAUDERDALE CO.

FMS - 103146 / 302000

WORKING NUMBER: DI-1

DATE

FILENAME: 02102DI-1.dwg

DESIGN TEAM CEB CHECKED PLM DATE 5/18/05

SHEET NUMBER: 2