GENERAL INDEX

FOR DETAILED INDEX OF PLANS SEE SHEET NO. 2

DESCRIPTION	NUMBER OF SHEETS
TITLE SHEET	1
DETAILED INDEX	1
GENERAL NOTES	0
TYPICAL SECTIONS	6
QUANTITIES	3
PLAN AND PROFILES	0
SPECIAL DESIGN – ROADWAY ITEMS	15
BRIDGE DRAWINGS	0
SPECIAL DESIGN – BRIDGES	00
CROSS-SECTIONS	0
TOTAL SHEETS	26

11-14-05
RE: 12-21-05

STATE OF MISSISSIPPI

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

PLAN AND PROFILE OF PROPOSED STATE HIGHWAY FEDERAL AID PROJECT NO. IM-0055-01(089)

OVERLAY
I-55 BETWEEN THE LINCOLN C.L. AND HAZLEHURST
COPIAH COUNTY

FMS 104514/301000

FED. ROAD REG. NO.	STATE	PROJECT NO.	SHEET NO.
4	MISS.	IM-0055-01(089)	1

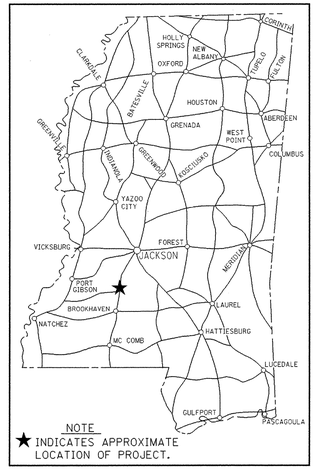

NOTE
★ INDICATES APPROXIMATE LOCATION OF PROJECT.

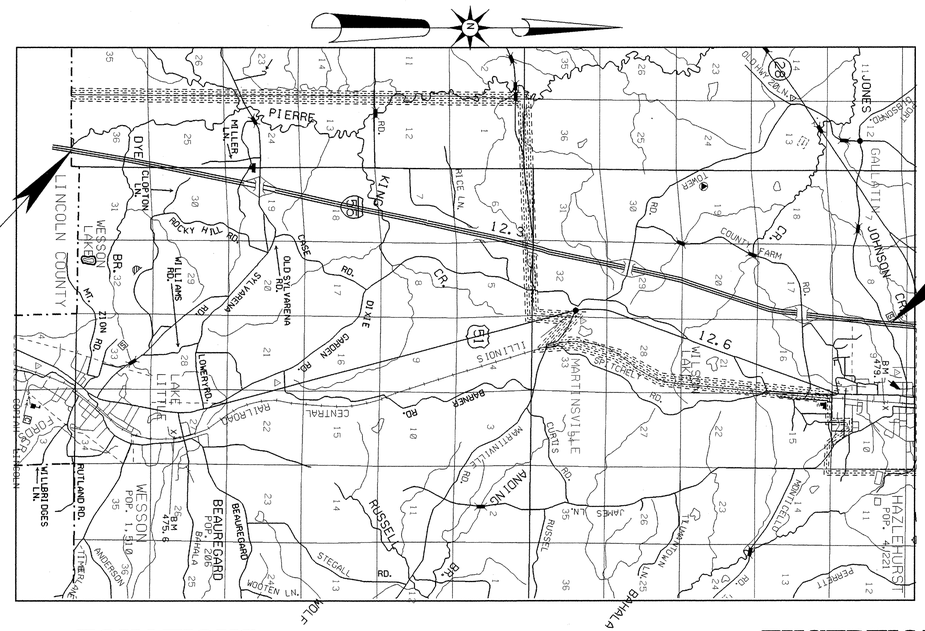

BOP LOG MILE 0.00
STA. 30+27.96 OLD PLANS IM-055-1(64)

EOP LOG MILE 11.21
STA. 621+25.00 OLD PLANS IM-055-1(64)

PERMITS ACQUIRED BY MDOT		
WETLANDS AND WATERS PERMITS (NECESSARY FOR ULTIMATE IMPROVEMENTS ONLY):	WATERS	WETLANDS
NATIONWIDE #14	N	N
NATIONWIDE (OTHER)*	N	N
GENERAL*	N	N
INDIVIDUAL (404)*	N	N

* ACQUISITION OF PERMITS FOR TEMPORARY IMPACTS DURING CONSTRUCTION ARE THE RESPONSIBILITY OF THE CONTRACTOR

STORMWATER PERMIT	N
Y	REQUIRED, CNOI SUBMITTED BY MDOT (DISTRIBUTED AREA = 5 ACRES +)(NTB 6484)
S	REQUIRED, SCNOI TO BE SUBMITTED BY CONTRACTOR (1 TO 4.99 ACRES)(NTB 6483)
N	NO STORMWATER PERMIT REQUIRED (<1 ACRE)

APPROVED BY: [illegible] DATE: 12/15/05

CONVENTIONAL SYMBOLS

COUNTY LINE
TOWN CORPORATION LINE
SECTION LINE
EXISTING ROAD OR TRAVELED WAY
PROPOSED ROAD OR TRAVELED WAY
RAILROAD
SURVEY LINE
BRIDGES

EQUATIONS

EXCEPTIONS

LENGTH DATA

LENGTH OF ROADWAY	59188.80 FT.	11.21 MI.
LENGTH OF BRIDGES	FT.	MI.
LENGTH OF PROJECT (NET)		MI.
LENGTH OF EXCEPTIONS	FT.	MI.
LENGTH OF PROJECT (GROSS)		11.21 MI.

119

REVISIONS

BY	DATE

APPROVED:
CHIEF ENGINEER — DATE 12/15/05

EXECUTIVE DIRECTOR — DATE 12-15-05

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

APPROVED:
DIVISION ADMINISTRATOR — DATE

FEDERAL HIGHWAY ADMINISTRATION
DEPARTMENT OF TRANSPORTATION

TITLE
ROADWAY DESIGN DIVISION
MISSISSIPPI DEPARTMENT OF TRANSPORTATION

12/15/2005 8:33 AM TITLE.DGN

STATE	PROJECT NO.
MISS.	IM-0055-01(089)

1 st O. REV.

DESCRIPTION OF SHEET

DESCRIPTION OF SHEET		WKG. NO.	SH. NO.
TITLE SHEET (1)			1
DETAILED INDEX & GENERAL NOTES (1)		DI-1	2
TYPICAL SECTION SHEETS (6)			
TYPICAL SECTION OPEN GRADED FRICTION COARSE		TS-1	3
TYPICAL SECTION MAINLINE		TS-2	5
TYPICAL SECTION RAMPS		TS-3	4
TYPICAL SECTION CROSS ROADS		TS-4	6
TYPICAL SECTION BRIDGE APPROACH		TS-5	7
TYPICAL SECTION BRIDGE APPROACH		TS-6	8
QUANTITY SHEETS (3)			
SUMMARY OF QUANTITIES		SQ-1	9
SUMMARY OF QUANTITIES		SQ-2	10
ESTIMATED QUANTITIES FOR TRAFFIC CONTROL		TCPQ-1	11
SPECIAL DESIGN SHEETS (5)			
DETAIL OF CONSTRUCTION SIGNING		DCS-1	12
LOCATION OF R-16 (DOUBLE FINE SIGNS)		MDS-1	13
RUMBLE STRIPES (GROUND-IN)		RS-1	14
RUMBLE STRIPS (GROUND-IN)		RS-2	15
FAILURE REPAIR DETAILS FOR JOINTED REINFORCED CONCRETE PAVEMENT		JCR-1	16
STANDARD DRAWINGS - ROADWAY SHEETS (10)			
BRIDGE END PAVEMENT		BE-1	107
CONCRETE PAVEMENT JOINTS (TRANSVERSE)		PJ-1	104
CONCRETE LUG ANCHORS		LA-1	106
BRIDGE END PAVEMENT		BE-1	107
PAVEMENT MARKING DETAILS FOR 2 & 4-LANE DIVIDED ROADWAYS	12-01-99	PM-1	120
65 OR 70 MPH (INTERSTATES AND OTHER 4-LANE DIVIDED			
HIGHWAYS)(MEDIAN LANE OR OUTSIDE LANE CLOSURE)			
(EXTENDED PERIOD)		TCP-4	253
HIGHWAY SIGN AND BARRICADE DETAILS FOR CONSTRUCTION			
PROJECTS		TCP-10	259
TRAFFIC CONTROL PLAN MOBILE OPERATIONS MULTILANE ROADS			
AND TWO-LANE ROADS	12-01-99	TCP-11	260
TRAFFIC CONTROL PLAN : UNEVEN PAVEMENT DETAILS		TCP-14	263
TEMPORARY STRIPING FOR TRAFFIC CONTROL 2-LANE AND 4-LANE			
DIVIDED HIGHWAYS	12-01-99	TCP-15	264
TOTAL SHEETS (26)			

GENERAL NOTES

1. THE LOCATION AND SPACING OF SIGNS, SHOWN ON THE TRAFFIC CONTROL PLANS, ARE APPROXIMATE AND MAY BE ADJUSTED AS NECESSARY TO FIT FIELD CONDITIONS.
2. ALL TRAFFIC CONTROL DEVICES ON THIS PROJECT SHALL COMPLY WITH PART VI OF THE MUTCD (LATEST EDITION).
3. FLUORESCENT ORANGE SHEETING SHALL BE USED ON ALL CONSTRUCTION AND TRAFFIC CONTROL SIGNS EXCEPT FOR THOSE DESIGNATED ON THE PLANS TO BE BLACK LEGEND AND BORDER ON WHITE BACKGROUND.
4. VOIDS CREATED BY THE REMOVAL OF POSTS, CONCRETE ANCHORS, FOOTINGS, ETC. SHALL BE BACKFILLED AND TAMPED IN ACCORDANCE WITH SECTION 203 OF THE MISSISSIPPI STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION.
5. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO PROTECT EXISTING STRUCTURES SUCH AS PIPES, INLETS, APRONS, BRIDGES, ETC. THE CONTRACTOR SHALL REPLACE OR REPAIR AT NO COST TO THE STATE ANY STRUCTURES DAMAGED DURING THE LIFE OF THE CONTRACT.
6. A RUMBLE STRIP SHALL BE USED INSTEAD OF A RUMBLE STRIPE WHERE AN OPEN GRADED FRICTION COARSE IS USED.
7. WHEN PLACING PERMANENT STRIPE A SPRAY DEVICE SHALL BE USED ONLY WHEN APPLYING RUMBLE STRIPES. AN EXTRUSION HEAD SHALL BE USED WHEN PLACING ALL OTHER THERMOPLASTIC STRIPE.
8. BRIDGE END PAVEMENT SHALL BE ADJUSTED TO MEET FIELD CONDITIONS AS DIRECTED BY THE ENGINEER

△1 9. EXISTING ASPHALT LOCATED IN THE NORTH AND SOUTH BOUND REST AREAS SHALL BE MILLED 1.5" AND OVERLAYIED WITH 1.5" OF 9.5 mm HT, HOT MIX ASPHALT AS DIRECTED BY THE ENGINEER

△1 10. HANDICAPED PARKING SPACES LOCATED AT THE REST AREAS SHALL BE REPLACED ACCORDING TO 2003 EDITION OF THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (MUTCD).

FINAL PLANS-DATE 12/15/05		
FMS CON. # 104514/301000		
REVISIONS		
DATE	SHEET NO.	BY
1/12/06	2, 9 & 10	BHF
1/17/06	3 & 9	BHF
1/19/06	9 & 10	BHF
1/23/06	9	BHF

DISTRICT 3

△ BHF BY

ADDED NOTES REVISION

1/12/06 DATE

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

DETAILED INDEX

PROJECT NO. IM-0055-01(089)
COUNTY : COPIAH

WORKING NUMBER DI-1

SHEET NUMBER 2

FILENAME:

DESIGN TEAM CHECKED DATE

ROADWAY DESIGN DIVISION
MISSISSIPPI DEPARTMENT OF TRANSPORTATION

1/24/2006 7:44 AM INDEX.DGN