

GENERAL INDEX

FOR DETAILED INDEX OF PLANS SEE SHEET NO. 2

DESCRIPTION	NUMBER OF SHEETS
TITLE SHEET	1
DETAILED INDEX	1
GENERAL NOTES	1
TYPICAL SECTIONS	3
QUANTITIES	3
PLAN AND PROFILES	
SPECIAL DESIGN - ROADWAY ITEMS	11
BRIDGE DRAWINGS	
SPECIAL DESIGN - BRIDGES	
CROSS-SECTIONS	
<b>TOTAL SHEETS</b>	<b>19</b>

**FEDERAL AID PROJECT NO. STP-0018-02(047)**

03-1-06

STATE OF MISSISSIPPI

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

**PLAN AND PROFILE OF PROPOSED STATE HIGHWAY**


OVERLAY LEXINGTON SQUARE AND SR 12 FROM THE SQUARE TO LOG MILE 15.792

104655/301000

HOLMES COUNTY


SCALES

PLAN	1 IN. = 100 FT.
PROFILE	HOR. 1 IN. = 100 FT.
	VERT. 1 IN. = 10 FT.
LAYOUT	1 IN. = FT.

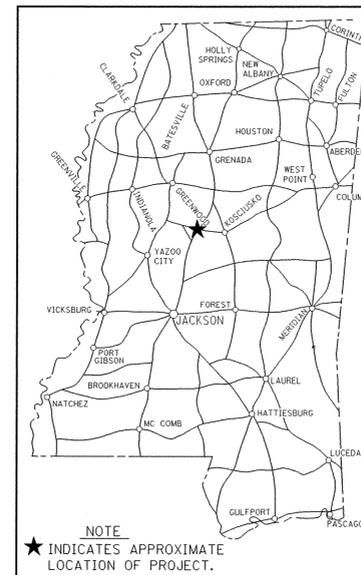

PERMITS ACQUIRED BY MDOT		
WETLANDS AND WATERS PERMITS (NECESSARY FOR ULTIMATE IMPROVEMENTS ONLY):		
	WATERS	WETLANDS
NATIONWIDE #14	N	N
NATIONWIDE (OTHER)*	N	N
GENERAL*	N	N
INDIVIDUAL (404)*	N	N
* ACQUISITION OF PERMITS FOR TEMPORARY IMPACTS DURING CONSTRUCTION ARE THE RESPONSIBILITY OF THE CONTRACTOR		
STORMWATER PERMIT	N	
Y	REQUIRED, CNOI SUBMITTED BY MDOT (DISTRIBUTED AREA = 5 ACRES + JNTB 6484)	
S	REQUIRED, SCNOI TO BE SUBMITTED BY CONTRACTOR (1 TO 4.99 ACRES)(NTB 6483)	
N	NO STORMWATER PERMIT REQUIRED (<1 ACRE)	
APPROVED BY:	JCR	DATE: 03/01/06

LOG MILE 14.430

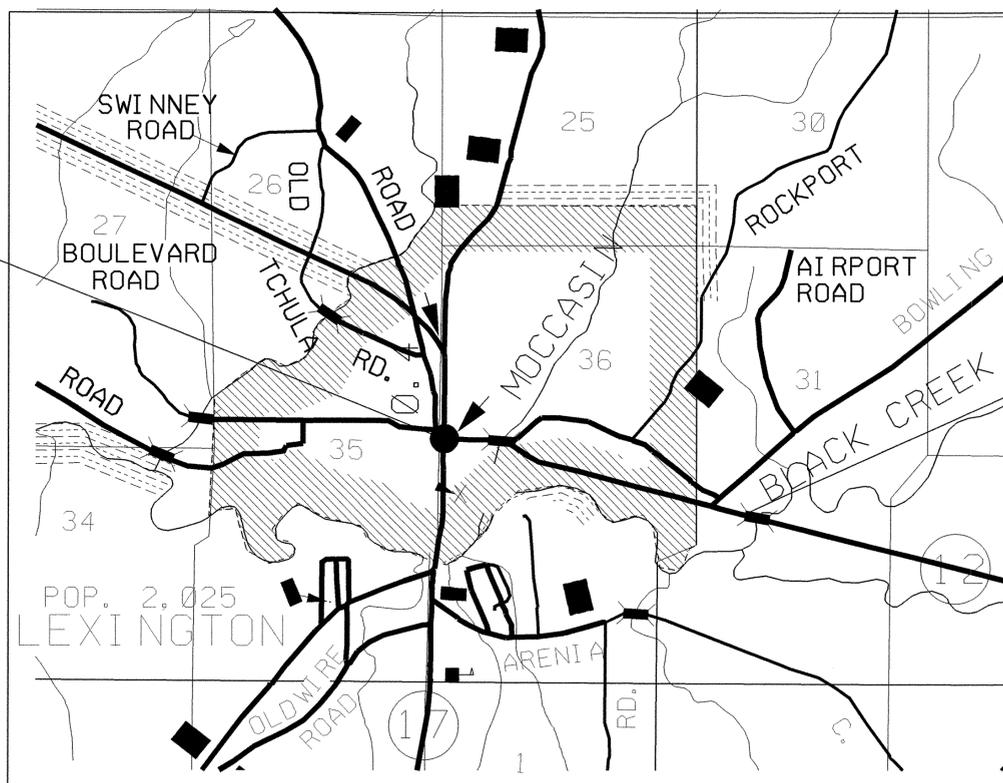

LOG MILE 15.792

CONVENTIONAL SYMBOLS

COUNTY LINE	-----
TOWN CORPORATION LINE	-----
SECTION LINE	-----
EXISTING ROAD OR TRAVELED WAY	-----
PROPOSED ROAD OR TRAVELED WAY	-----
RAILROAD	-----
SURVEY LINE	-----
BRIDGES	-----

LENGTH DATA

LENGTH OF ROADWAY	7191.36 FT.	1.362 MI.
LENGTH OF BRIDGES	FT.	MI.
LENGTH OF PROJECT (NET)	FT.	MI.
LENGTH OF EXCEPTIONS	FT.	MI.
LENGTH OF PROJECT (GROSS)		1.362 MI.

3/1/2006 8:11 AM TITLE.DGN MISSISSIPPI DEPARTMENT OF TRANSPORTATION

APPROVED:	<i>Harry Lee James</i>	3-1-06
CHIEF ENGINEER		DATE
APPROVED:	<i>Samuel P. Brown</i>	3-1-06
EXECUTIVE DIRECTOR		DATE
MISSISSIPPI DEPARTMENT OF TRANSPORTATION		
APPROVED:		
DIVISION ADMINISTRATOR		DATE
FEDERAL HIGHWAY ADMINISTRATION DEPARTMENT OF TRANSPORTATION		

DESCRIPTION OF SHEET

WKG.  
NO.      SH.  
NO.

TITLE SHEET (1)			1
DETAILED INDEX & GENERAL NOTES (1)		DI-1	2
TYPICAL SECTION SHEETS (3)			
LAYOUT OF SQUARE		SQR-1	3
TYPICAL SECTION		TS-1	4
TYPICAL SECTION		TS-2	5
QUANTITY SHEETS (3)			
SUMMARY OF QUANTITIES		SQ-1	6
SUMMARY OF QUANTITIES		SQ-2	7
ESTIMATED QUANTITIES FOR TRAFFIC CONTROL		TCPQ-1	8
SPECIAL DESIGN SHEETS (4)			
NEW CURB DETAIL		CD-1	9
DETAIL OF CONSTRUCTION SIGNING		DCS-1	10
LOCATION OF R-16 (DOUBLE FINE SIGNS)		MDS-1	11
SIGNING OF TWO-WAY TRAFFIC FOR NO PASSING ZONES		MDS-2	12
STANDARD DRAWINGS - ROADWAY SHEETS (7)			
PAVEMENT MARKING DETAILS FOR 2 & 4-LANE DIVIDED ROADWAYS	12-01-99	PM-1	120
PAVEMENT MARKING DETAILS FOR 4 & 5-LANE UNDIVED ROADWAYS	12-01-99	PM-2	121
TRAFFIC CONTROL PLAN WITH FLAGGER (ONE-LANE CLOSURE OF TWO WAY TRAFFIC)		TCP-1	250
HIGHWAY SIGN AND BARRICADE DETAILS FOR CONSTRUCTION PROJECTS		TCP-10	259
TRAFFIC CONTROL PLAN MOBILE OPERATIONS MULTILANE ROADS AND TWO-LANE ROADS	12-01-99	TCP-11	260
TRAFFIC CONTROL PLAN : UNEVEN PAVEMENT DETAILS		TCP-14	263
TEMPORARY STRIPING FOR TRAFFIC CONTROL 2-LANE AND 4-LANE DIVIDED HIGHWAYS	12-01-99	TCP-15	264
TOTAL SHEETS (19)			

GENERAL NOTES

- ① THE LOCATION AND SPACING OF SIGNS, SHOWN ON THE TRAFFIC CONTROL PLANS, ARE APPROXIMATE AND MAY BE ADJUSTED AS NECESSARY TO FIT FIELD CONDITIONS.
- ② ALL TRAFFIC CONTROL DEVICES ON THIS PROJECT SHALL COMPLY WITH PART VI OF THE MUTCD (LATEST EDITION).
- ③ FLUORESCENT ORANGE SHEETING SHALL BE USED ON ALL CONSTRUCTION AND TRAFFIC CONTROL SIGNS EXCEPT FOR THOSE DESIGNATED ON THE PLANS TO BE BLACK LEGEND AND BORDER ON WHITE BACKGROUND.
- ④ VOIDS CREATED BY THE REMOVAL OF POSTS, CONCRETE ANCHORS, FOOTINGS, ETC. SHALL BE BACKFILLED AND TAMPED IN ACCORDANCE WITH SECTION 203 OF THE MISSISSIPPI STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION.
- ⑤ IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO PROTECT AGAINST EXISTING STRUCTURES SUCH AS CURB AND GUTTER, PIPES, INLETS, APRONS, BRIDGES, ETC. THE CONTRACTOR SHALL REPLACE OR REPAIR AT NO COST TO THE STATE ANY STRUCTURES DAMAGED DURING THE LIFE OF THE CONTRACT.
- ⑥ INCIDENTAL WORK SUCH AS MOWING, REMOVING VEGETATION, SHAPING AND COMPACTING SHOULDERS (INCLUDING THE BASE FOR PAVED APRONS) AND OTHER INCIDENTAL WORK NECESSARY TO COMPLETE THE WORK WILL NOT BE MEASURED FOR SEPARATE PAYMENT. THE COST OF THIS WORK WILL BE ABSORBED IN OTHER BID ITEMS
- ⑦ MILLED MATERIAL SHALL BE STOCK PILED AT THE LEXINGTON MAINTENANCE HEADQUARTERS AS DIRECTED BY THE ENGINEER

3/1/2006 8:19 AM INDEX.DGN MISSISSIPPI DEPARTMENT OF TRANSPORTATION ROADWAY DESIGN DIVISION PLAN

FINAL PLANS-DATE 3/1/06		
FMS CON. # 104655/301000		
REVISIONS		
DATE	SHEET NO.	BY

DISTRICT 3

MISSISSIPPI DEPARTMENT OF TRANSPORTATION	
<b>DETAILED INDEX</b>	
PROJECT NO. STP-0018-02(047)	WORKING NUMBER DI-1
COUNTY : HOLMES	SHEET NUMBER 2
DATE: _____	FILENAME: _____
DESIGN TEAM: _____	CHECKED: _____ DATE: _____