

SECTION 905 -- PROPOSAL (CONTINUED)

I (We) further propose to execute the attached contract agreement (Section 902) as soon as the work is awarded to me (us), and to begin and complete the work within the time limit(s) provided for in the Specifications and Advertisement. I (We) also propose to execute the attached contract bond (Section 903) in an amount not less than one hundred (100) percent of the total of my (our) part, but also to guarantee the excellence of both workmanship and materials until the work is finally accepted.

I (We) enclose a certified check, cashier's check or bid bond for **five percent (5%) of total bid** and hereby agree that in case of my (our) failure to execute the contract and furnish bond within Ten (10) days after notice of award, the amount of this check (bid bond) will be forfeited to the State of Mississippi as liquidated damages arising out of my (our) failure to execute the contract as proposed. It is understood that in case I am (we are) not awarded the work, the check will be returned as provided in the Specifications.

Bidder acknowledges receipt of and has added to and made a part of the proposal and contract documents the following addendum (addenda):

ADDENDUM NO. 1 DATED 8/14/2006 ADDENDUM NO. _____ DATED _____
ADDENDUM NO. _____ DATED _____ ADDENDUM NO. _____ DATED _____

Number	Description
1	Replace Supplement to Notice To Bidders No. 696 with same, replace Notice To Bidders Nos. 1045 & 1047 with same, and replace proposal sheet nos. 2-4 and 2-5 with same. Requires a revised diskette.

TOTAL ADDENDA: 1
(Must agree with total addenda issued prior to opening of bids)

Respectfully Submitted,

DATE _____

Contractor

BY _____
Signature

TITLE _____

ADDRESS _____

CITY, STATE, ZIP _____

PHONE _____

FAX _____

E-MAIL _____

(To be filled in if a corporation)


Our corporation is chartered under the Laws of the State of _____ and the names, titles and business addresses of the executives are as follows:

_____ resident	_____ Address
_____ Secretary	_____ Address
_____ Treasurer	_____ Address

The following is my (our) itemized proposal.

MDPS-0000-03(001) / 104541303

District 3 County(ies)

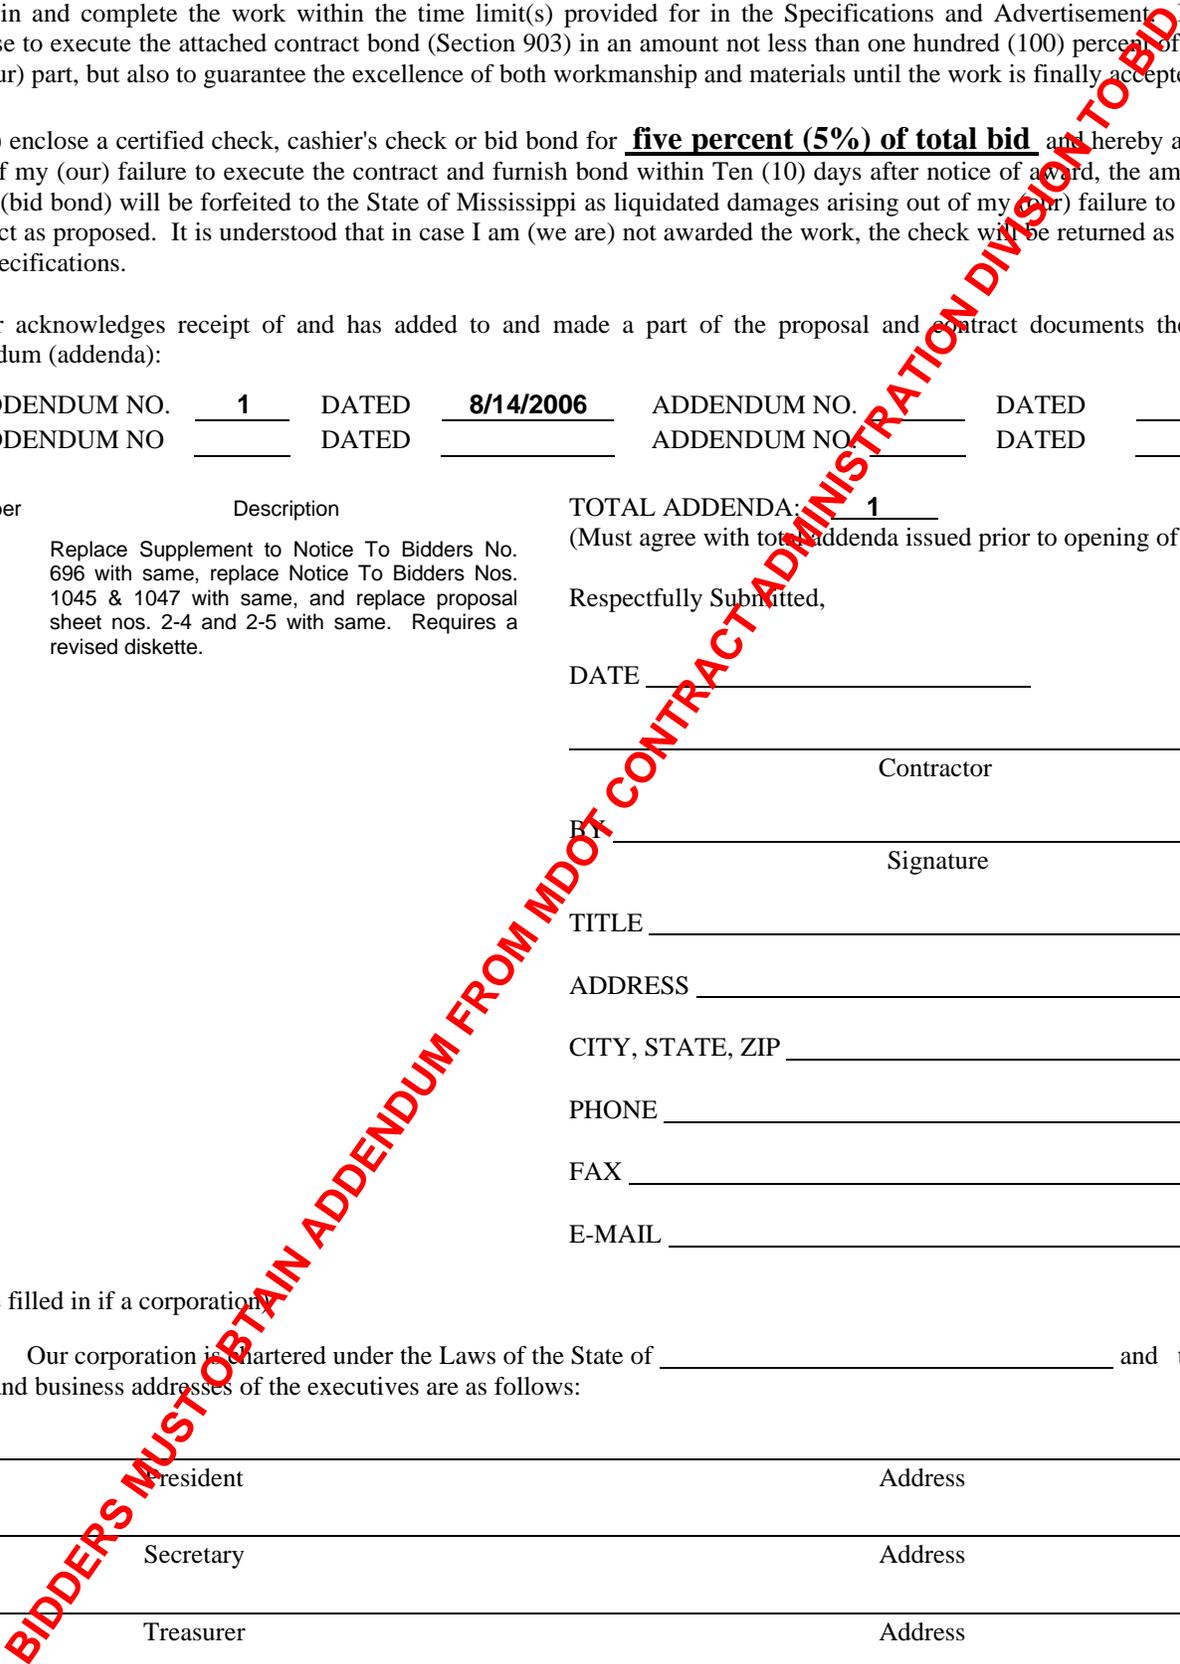

SUPPLEMENT TO NOTICE TO BIDDERS NO. 696

DATE: 04/06/2006

The goal is 10 percent for the Disadvantaged Business Enterprise. The low bidder is required to submit Form OCR-481 for all DBEs. Bidders are advised to check the bid tabulation link for this project on the MDOT website (<http://www.gomdot.com/bidsystem/>) for results. Bid tabulations are usually posted by 3:00 pm on Letting Day.

Form OCR-481 is available at http://www.gomdot.com/business/dbe/pdf/OCR_481.pdf or by calling 601-359-7466.

All OCR-481s must be returned within 10 days following the bid letting to the MDOT Office of Civil Rights, P.O. Box 1850, Jackson, MS 39215-1850.

For answers to questions, contact the MDOT Office of Civil Rights at (601) 359-7466.

The bidder's execution of the signature portion of the proposal shall constitute execution of the following assurance:

The bidder hereby gives assurance pursuant to the applicable requirements of "Safe, Accountable, Flexible, Efficient Transportation Equity Act, A Legacy For Users (SAFETEA-LU)" and "Part 26, Title 49, Code of Federal Regulation" that the bidder has made a good faith effort to meet the contract goal for DBE participation for which this proposal is submitted.

A pre-bid meeting will be held in the first floor auditorium of the Mississippi Department of Transportation Administration Building, 401 North West Street, Jackson, Mississippi at 2:00 P.M. on the day preceding the date of the bid opening.

This meeting is to inform DBE firms of subcontracting and material supply opportunities. Attendance at this meeting is considered of prime importance in demonstrating good faith effort to meet the contract goal.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 – NOTICE TO BIDDERS NO. 1045

CODE: (SP)

DATE: 08/07/2006

SUBJECT: Scope Of Work

PROJECT: MDPS-0000-03(001) / 104541303 – District 3

The contract documents do not include an official set of construction plans but may, by reference, include some Standard Drawings when so specified in a Notice to Bidders entitled “Standard Drawings.” All other references to plans in the contract documents and Standard Specifications for Road and Bridge Construction are to be disregarded.

In general the work to be accomplished using the pay items , corresponding specifications, applicable standard drawings, and typical sections set forth in this contract is to install guardrail and attenuators in various locations in Holmes, Bolivar, Sunflower and Washington counties.

The work on this segment of highway shall consist of the following:

All guardrail terminal end sections shall be Fleet-350, Regent, SRT-350, ROSS-350 or an approved equal to be installed following the manufacturer’s installation details, two copies of which the contractor shall provide the project engineer. Reflective adhesive sheeting with alternating black and yellow stripes (sloping downward at an angle of 45 degrees in the direction traffic is passing) is required on the end of the terminal section.

In guardrail sections where roadside ditches will be filled by added embankment, pipes may be required to carry the flow of water through the embankment. Pipes shall be installed as directed by the engineer. Any existing pipes that conflict with the new construction shall be extended or replaced as necessary.

Shoulders shall be constructed and paved as indicated by the typical section.

Vegetation shall be established on all new embankment slopes and disturbed areas.

Existing conflicting pavement markings shall be removed and replaced with the appropriate types included in the contract. It is the intent of this contract to replace all existing pavement markings on the roadway within the limits of the newly placed guardrail or attenuators including the bridges.

Pay item number 202-B, Removal of Asphalt Pavement, and pay item number 907-304-F, 3/4” and Down Crushed Stone Base, shall be used to remove, repair, or replace existing driveways inside the limits of this project as directed by the Engineer.

Incidental work such as removing vegetation, shaping and compacting shoulders (including the base for paved aprons) and other incidental work necessary to complete the work will not be measured for separate payment. The cost for this work will be absorbed in other bid items.

Attenuators: REACT-350, Quadguard, TAU II or approved equal, shall be installed following the manufacturer's recommendations. The contractor shall provide two copies of the manufacturer's installation details to the project engineer. All attenuators shall be designed for an impact speed of 60mph


The contractor shall erect and maintain construction signing and provide all signs and traffic handling devices in accordance with the Traffic Control Plan. (Cost to be included in the bid price for Pay Item No. 618-A, Maintenance of Traffic.)

One (1) W20-1 (AHEAD) sign is required at each local road or street entering the project. These signs shall be paid for under 619-D1, Standard Roadside Construction Less Than 10 Square Feet.

All Construction signing shall be included in the bid for pay item 618-A, Maintenance of Traffic. Fluorescent orange sheeting shall be used on all construction and traffic control signs except for those designated in the Proposal to be black legend and border on white background.

Location of Work Sites

COUNTY	ROUTE	COUNTY LOG MILE	BRIDGE NO.	REMARKS
HOLMES	14	5.4	66.0	ATTENUATOR REQUIRED
HOLMES	14	5.8	66.4	ATTENUATOR REQUIRED
HOLMES	19	0.3	115.1	GUARDRAIL REQUIRED
HOLMES	19	0.4	114.9	GUARDRAIL REQUIRED
BOLIVAR	446	6.2	6.3	GUARDRAIL REQUIRED
BOLIVAR	446	14.9	15.2	ATTENUATOR AND GUARDRAIL REQUIRED
BOLIVAR	32	6.9	7.1	GUARDRAIL REQUIRED
BOLIVAR	32	1.4	1.6	GUARDRAIL REQUIRED
BOLIVAR	8	12.9	12.5	GUARDRAIL REQUIRED
SUNFLOWER	32	1.7	29.0	GUARDRAIL REQUIRED
SUNFLOWER	3	7.5	92.0	ATTENUATOR REQUIRED
WASHINGTON	12	22.4	23.9	ATTENUATOR REQUIRED
WASHINGTON	12	6.2	7.9	GUARDRAIL REQUIRED
WASHINGTON	12	2.3	2.3	ATTENUATOR REQUIRED
WASHINGTON	438	9.0	9.0	ATTENUATOR REQUIRED

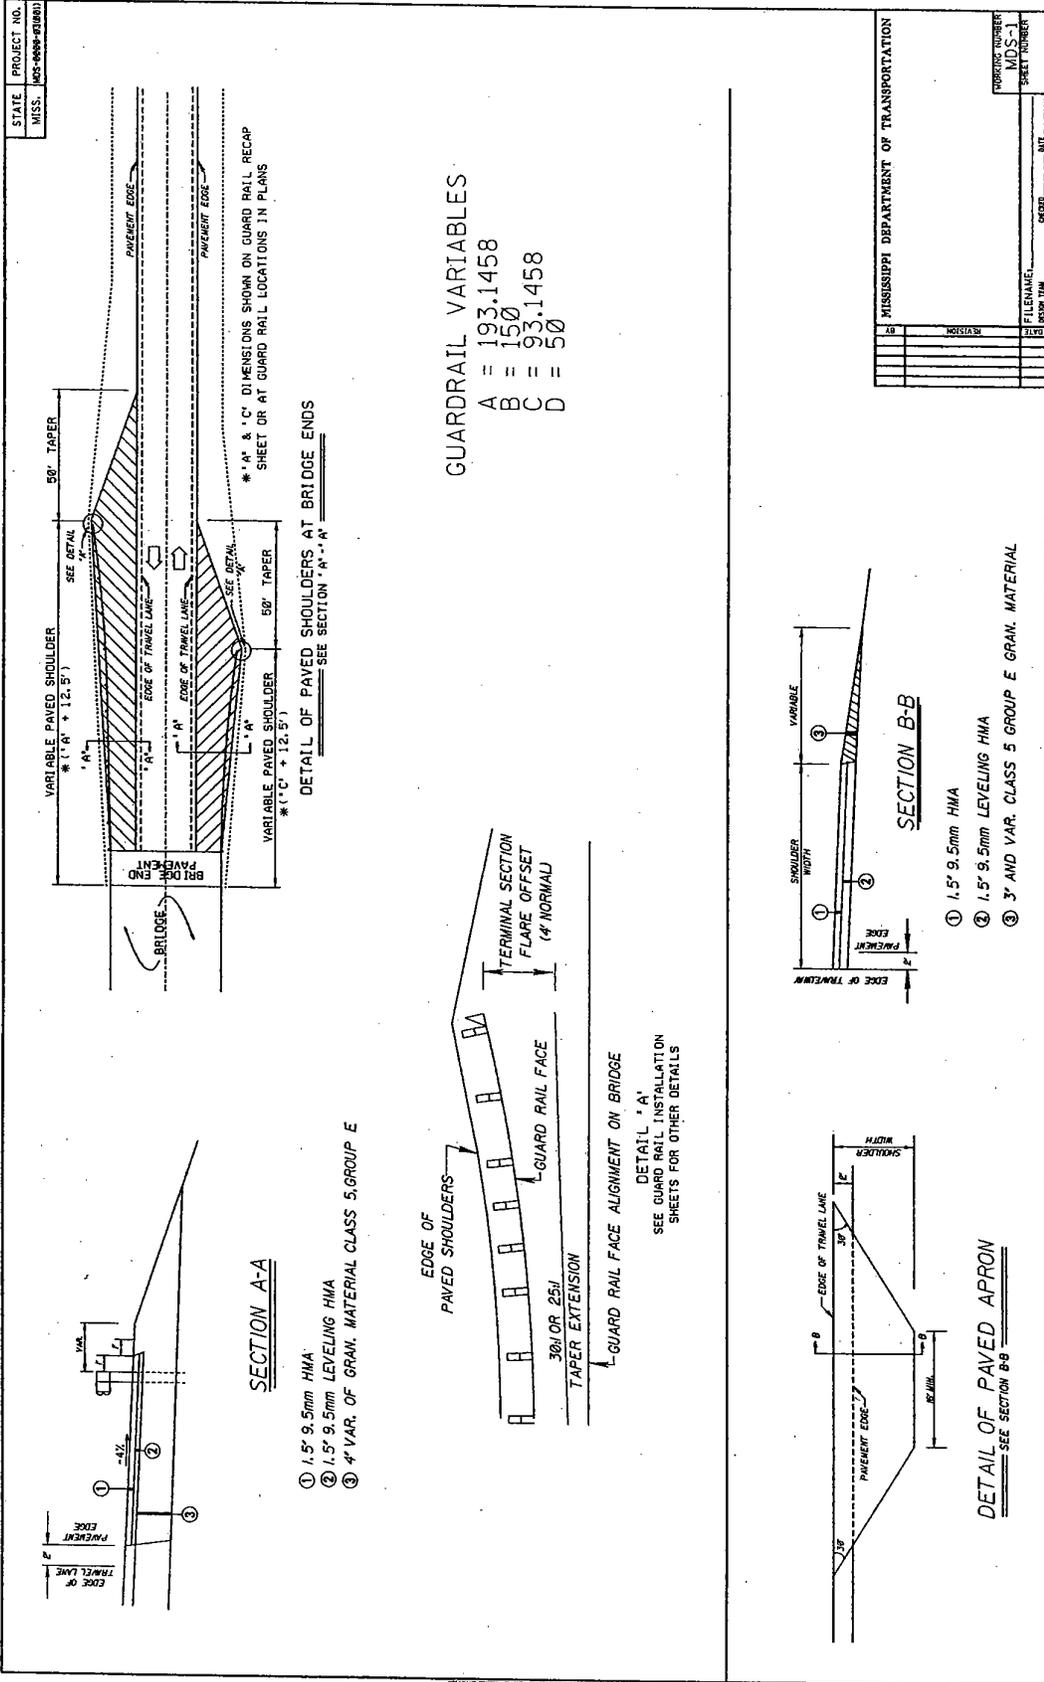

STATE PROJECT NO.
MISS. MS-9999-2(BRD)

STATE ROUTE NO.	COUNTY	BRIDGE NO.	STATE STD. (INSTAL.) SECTION	BR. END SECTION	BB BORROW C.Y.	TYPE 3 OBJECT MARKER	WHITE DELIN.	ATTENUATOR RECD.	REMARKS
14	HOLMES	68.0						4	
14	HOLMES	68.4						4	
19	HOLMES	115.1	200	4	600	4	22		
19	HOLMES	114.9	200	4	600	4	22		
446	BOLIVAR	6.3	200	4	600	4	22		
446	BOLIVAR	15.2						4	
32	BOLIVAR	7.1	200	4	600	4	22		
32	BOLIVAR	1.6	200	4	600	4	22		
8	BOLIVAR	12.5	200	4	600	4	22		
32	SUNFLOWER	29.0	200	4	600	4	22		
3	SUNFLOWER	92.0						4	
12	WASHINGTON	23.9						4	
12	WASHINGTON	7.9	200	4	600	4	22		UPSIDE DRAINAGE PIPE
12	WASHINGTON	2.3						4	
438	WASHINGTON	9.0						4	
TOTALS			3200 FT	32	4800	32	176	28	

- ① 7 DELINEATORS ON THE APPROACH SIDE, 4 ON THE EXIT SIDE (TOTAL OF 22 PER SITE)
- ② ESTIMATED QUANTITY
- ③ 150' ON THE APPROACH SIDE AND 50' ON THE EXIT SIDE
- ④ ATTENUATORS SHALL BE INSTALLED PER MANUFACTURERS INSTRUCTIONS

NOTES:

IN GUARDRAIL SECTIONS WHERE ROADSIDE DITCHES WILL BE FILLED BY ADDED EMBANKMENT, PIPES MAY BE REQUIRED TO CARRY FLOW OF THE WATER THROUGH THE EMBANKMENT. PIPES SHALL BE INSTALLED AS DIRECTED BY THE ENGINEER. ANY EXISTING PIPES THAT CONFLICT WITH CONSTRUCTION SHALL BE REMOVED AS DIRECTED BY THE ENGINEER. EXISTING 18" CROSS DRAIN PIPE AT BRIDGE SITE 7.9 IN WASHINGTON COUNTY SHALL BE EXTENDED OUTSIDE OF THE NEW EMBANKMENT. FLARED END SECTIONS SHALL BE INSTALLED ON NEW PIPE. PIPE COLLARS SHALL BE ABSORBED IN OTHER BID ITEMS.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

DESIGN NUMBER: MDS-2

SHEET NUMBER: _____

DATE: _____

FILE NAME: _____

GROUP: TUM

DATE: _____

DATE: _____

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 - NOTICE TO BIDDERS NO. 1047

CODE: (SP)

DATE: 06/26/2006

SUBJECT: Specialty Items

PROJECT: MDPS-0000-03(001) / 104541303--DISTRICT 3 COUNTY(IES)

Pursuant to the provisions of Section 108, the following work items are hereby designated as "Specialty Items" for this contract. Bidders are reminded that these items must be subcontracted in order to be considered as specialty items.

CATEGORY: GUARDRAIL

Ref No	Pay Item	Description
170	606-B	Guard Rail, Class A, Type 1
180	606-D	Guard Rail, Bridge End Section
190	606-E	Guard Rail, Terminal End Section

CATEGORY: PAVEMENT MARKING

Ref No	Pay Item	Description
230	628-J	6" High Performance Cold Plastic Traffic Stripe, Continuous White
240	628-L	6" High Performance Cold Plastic Traffic Stripe, Skip Yellow
250	628-M	6" High Performance Cold Plastic Traffic Stripe, Continuous Yellow

CATEGORY: TRAFFIC CONTROL

Ref No	Pay Item	Description
200	619-A1	Temporary Traffic Stripe, Continuous White
210	619-D1	Standard Roadside Construction Signs, Less than 10 Square Feet
255	629-A	Vehicular Impact Attenuator, 60 MPH

SECTION 905

MDPS-0000-03(001) / 104541303

PROPOSAL (Sheet No. 2- 5)

District 3 County

REF. NO.	PAY ITEM NO.	ADJ. CODE	APPROX. QUANTITY	UNIT	DESCRIPTION	UNIT PRICE		ITEM TOTAL	
						DOLLAR	CENT	DOLLAR	CENT
(250)	628-M		15,000	Linear Feet	6" High Performance Cold Plastic Traffic Stripe, Continuous Yellow				
(255)	629-A		28	Each	Vehicular Impact Attenuator, 60 MPH				
ADDED 08/07/2006									
(260)	630-F		176	Each	Delineators, Guard Rail, White				
(270)	630-G		32	Each	Type 3 Object Markers, OM-3R or OM-3L, Post Mounted				

SUBTOTAL - DIRECT PAY ITEMS.....\$ _____