FED. ROAD REG. NO.	STATE	PROJECT NO.	SHEET NO.
4	MISS.	STP-0010-01(093) (PHASE II)	1

GENERAL INDEX

FOR DETAILED INDEX OF PLANS SEE SHEET NO. 2

DESCRIPTION	NUMBER OF SHEETS
TITLE SHEET	1
DETAILED INDEX AND GENERAL NOTES	1
TYPICAL SECTIONS	
QUANTITIES	2
PLAN AND PROFILES	
SPECIAL DESIGN – SITE IMPROVEMENTS	27
BRIDGE DRAWINGS	
SPECIAL DESIGN – BRIDGES	
CROSS-SECTIONS	
STANDARD DRAWINGS	
TOTAL SHEETS	31

STATE OF MISSISSIPPI

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

PLANS OF PROPOSED SITE IMPROVEMENTS TO JACKSON COUNTY WELCOME CENTER PHASE II

FEDERAL AID PROJECT NO. STP-0010-01(093)

①06-07-06

FMS #103316/302000

I-10 WESTBOUND
JACKSON COUNTY

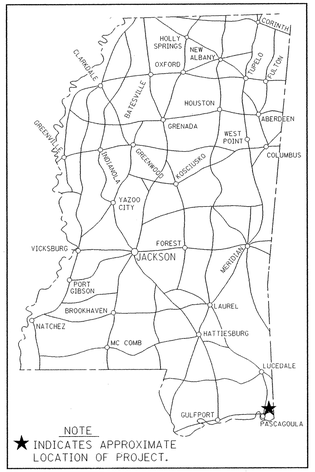

NOTE
★ INDICATES APPROXIMATE LOCATION OF PROJECT.

PROJECT LOCATION

WESTBOUND I-10, 2.4 MILES FROM MS/AL STATE LINE, BETWEEN FRANKLIN CREEK RD. AND THE ESCATAWPA RIVER

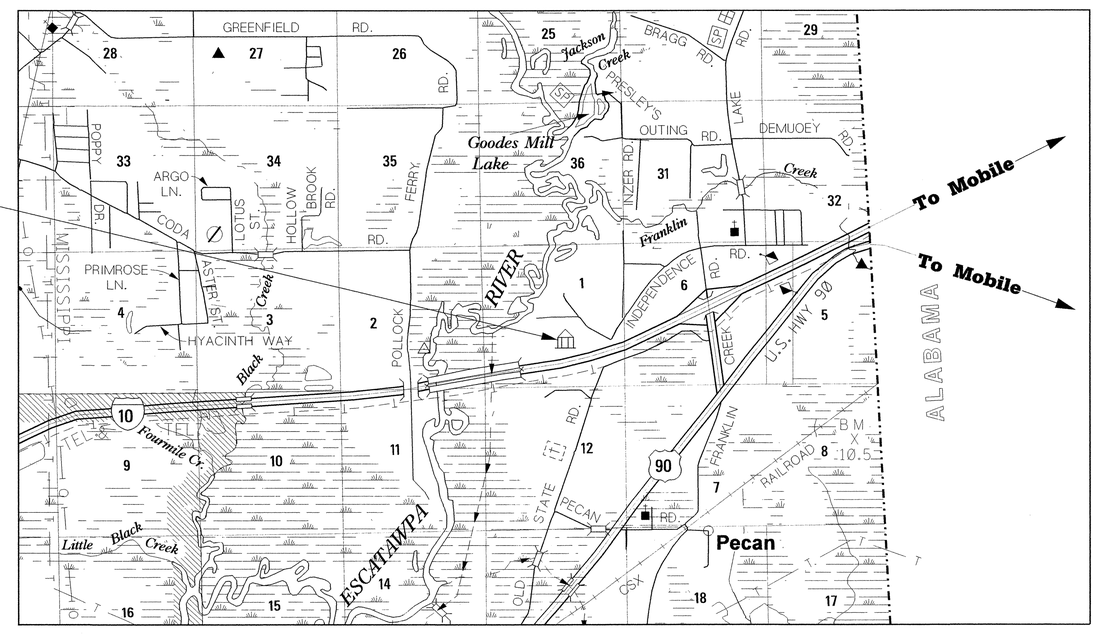

DESIGN CONTROL

_____ MPH = V (SPEED DESIGN)

ADT (____) = _____ : ADT (____) = _____

DHV = _____ : D = _____% T = _____%

PERMITS ACQUIRED BY MDOT

WETLANDS AND WATERS PERMITS (NECESSARY FOR ULTIMATE IMPROVEMENTS ONLY):

	WATERS	WETLANDS
NATIONWIDE #14	Y	N
NATIONWIDE (OTHER)*	N	N
GENERAL*	N	N
INDIVIDUAL (404)*	N	N

* ACQUISITION OF PERMITS FOR TEMPORARY IMPACTS DURING CONSTRUCTION ARE THE RESPONSIBILITY OF THE CONTRACTOR

STORMWATER PERMIT S

Y	REQUIRED, CNOI SUBMITTED BY MDOT (DISTRIBUTED AREA = 5 ACRES +)(NTB 6484)
S	REQUIRED, SCNOI TO BE SUBMITTED BY CONTRACTOR (1 TO 4.99 ACRES)(NTB 6483)
N	NO STORMWATER PERMIT REQUIRED (<1 ACRE)

APPROVED BY: JV DATE: 6-2-06

CONVENTIONAL SYMBOLS

COUNTY LINE
TOWN CORPORATION LINE
SECTION LINE
EXISTING ROAD OR TRAVELED WAY
PROPOSED ROAD OR TRAVELED WAY
RAILROAD
SURVEY LINE
BRIDGES

APPROVED:

Harry Lee James 6/2/06
CHIEF ENGINEER DATE

Larry L. Brumsher 6-2-06
EXECUTIVE DIRECTOR DATE

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

APPROVED:

DIVISION ADMINISTRATOR DATE

FEDERAL HIGHWAY ADMINISTRATION
DEPARTMENT OF TRANSPORTATION

REVISIONS BY DATE

TITLE ROADWAY DESIGN DIVISION MISSISSIPPI DEPARTMENT OF TRANSPORTATION

6/2/2006 8:02 AM TITLE.DGN

STATE	PROJECT NO.
MISS.	STP-0010-01(093)

ROADWAY DESIGN DIVISION C.A.D. SECTION
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
PLAN

INDEX TO DRAWINGS

DESCRIPTION OF SHEET	WORKING NUMBER	SHEET NUMBER
MDOT TITLE SHEET		1
DETAILED INDEX AND GENERAL NOTES	DI-1	2
SUMMARY OF QUANTITIES	SQ1	3
SUMMARY OF QUANTITIES	SQ2	4
OVERALL SITE PLAN	SP	5
EXISTING CONDITIONS/DEMOLITION PLAN	DM1	6
EXISTING CONDITIONS/DEMOLITION PLAN	DM2	7
EROSION CONTROL DETAILS	ECD	8
OVERALL LAYOUT PLAN	L1	9
LAYOUT PLAN	L2	10
PAVING PLAN	L3	11
OVERALL GRADING PLAN	G1	12
OVERALL IRRIGATION PLAN AND DETAILS	IR1	13
IRRIGATION PLAN	IR2	14
IRRIGATION PLAN	IR3	15
IRRIGATION PLAN	IR4	16
PLANTING PLAN	LA1	17
PLANTING PLAN	LA2	18
PLANTING PLAN	LA3	19
VEGETATION SCHEDULE	VS1	20
MOWING LIMITS/LANDSCAPE ESTABLISHMENT	ML	21
SITE DETAILS	D1	22
PAVILION	PAV1	23
PAVILION	PAV2	24
PAVILION	PAV3	25
GUARDHOUSE PLANS	GHP	26
SIGN (MASONRY AND STONE)	SG1	27
ELECTRICAL LEGEND, ABBREVIATIONS, AND GENERAL NOTES	E0.1	28
SITE LIGHTING – ELECTRICAL NEW/ DEMOLITION	E1.0	29
GUARDHOUSE – MECHANICAL/ELECTRIC, SCHEDULES AND POWER RISER	ME2.1	30
ELECTRICAL DETAILS	E3.1	31

TOTAL	31

GENERAL NOTES:

1. CONTRACTOR SHALL KEEP THE SITE OPEN AND ACCESSIBLE TO THE GENERAL PUBLIC DURING THE CONTRACT, PROVIDE AND MAINTAIN HARD SURFACE, SLIP RESISTANT, HANDICAP ACCESS WALKS FROM EACH PARKING AREA TO THE BUILDING (PLYWOOD WALKS ACCEPTABLE). SUBMIT AN ACCESSIBILITY PLAN AND RECEIVE APPROVAL FROM THE ENGINEER PRIOR TO WALK DEMOLITION IN THE WELCOME CENTER BUILDING AREA. COSTS OF TEMPORARY WALKS SHALL BE AN ABSORBED ITEM UNDER REMOVAL OF OBSTRUCTIONS. THE CONTRACTOR SHALL PROVIDE THE NECESSARY PEDESTRIAN BARRICADES, SURROUNDING THE ENTIRE WORK AREA, TO ROUTE THE GENERAL PUBLIC AROUND THE WORK AREAS IN ACCORDANCE WITH MUTCD (MANUAL OF UNIFORM TRAFFIC CONTROL DEVICES – LATEST EDITION. BARRICADES SHALL CONSIST OF STUDDED T–POSTS (FENCE POSTS), GREEN, 6'–0" LONG, 10'–0" O.C.; TYPE III BARRICADES FOR TRUCK PARKING, HEAVY DUTY ORANGE SAFETY/CONSTRUCTION FENCE, 4'–0" HIGH, SECURE WITH ALUMINUM FENCE TIES OR TIE WIRE. FLUORESCENT ORANGE SHEETING SHALL BE REQUIRED FOR CONSTRUCTION AND TRAFFIC CONTROL SIGNS.

2. STRUCTURES OR UTILITIES DAMAGED BY THE CONSTRUCTION OPERATION, AS DETERMINED BY THE ENGINEER, SHALL BE REPLACED OR REPAIRED BY THE CONTRACTOR AT NO COST TO THE DEPARTMENT.

3. THE BRICK AND MORTAR FOR THE CONSTRUCTION OF THE SIGN, GUARDHOUSE, AND PAVILION SHALL BE THE SAME TYPE AND KIND AND SHALL MATCH THE EXISTING BRICK USED ON THE BUILDING, OR APPROVED EQUAL. THE BRICK WILL NOT REQUIRED TESTING, BUT REQUIRES APPROVAL OF THE ENGINEER.

4. THE CONTRACTOR WILL BE PERMITTED TO USE WATER THAT IS AVAILABLE ON THE SITE DURING THE PLANTING AND ESTABLISHING OF THE TREES AND SHRUBS. FALLEN LIMBS, LITTER AND DEBRIS SHALL BE REMOVED FROM THE SITE FOR THE LIFE OF THE CONTRACT. THE CONTRACTOR SHALL PROVIDE TREE PROTECTION DURING CONSTRUCTION.

5. CARE SHOULD BE TAKEN BY THE CONTRACTOR AROUND EXISTING LIVE OAKS NEAR EXISTING WELCOME CENTER BUILDING TO NOT DAMAGE ROOT SYSTEMS. HAND DIG ONLY WITHIN THE TREE'S DRIPLINE AREA.

6. IF THE CONTRACTOR WITHIN THE COURSE OF THE WORK, FINDS OR SUSPECTS ANY DISCREPANCY BETWEEN THE DRAWINGS AND THE PHYSICAL CONDITIONS OF THE SITE OR WORK OR ANY ERRORS OR OMISSIONS IN THE CONTRACT DOCUMENTS OR SPECIFICATIONS, HE SHALL IMMEDIATELY NOTIFY THE ENGINEER, AND THE ENGINEER SHALL PROMPTLY VERIFY THE SAME. ANY WORK DONE AFTER SUCH DISCOVERY, UNLESS AUTHORIZED, SHALL BE DONE AT THE CONTRACTOR'S RISK.

7. ITEMS SHOWN HEREIN AS EXISTING MAY BE UNDER CONSTRUCTION IN THE CURRENT PHASE I PROJECT.

PS & E PLANS - DATE 06/07/06

REVISIONS		
DATE	SHEET NO.	BY

BASE DATA PROVIDED BY MISSISSIPPI DEPT. OF TRANSPORTATION TO WEATHERFORD/ MCDADE FOR JACKSON COUNTY, MISSISSIPPI WELCOME CENTER STP–0010–01(093).

ASU

PREPARED BY: Weatherford McDade, Ltd. PLANNING CONSULTANTS • LANDSCAPE ARCHITECTS

REVISION | BY

DATE

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SITE IMPROVEMENTS TO JACKSON COUNTY WELCOME CENTER-PHASE II

DETAILED INDEX AND GENERAL NOTES

PROJECT NO: STP-0010-01(093) JACKSON CO.

FILENAME: G:\1999\99124 Jackson County Welcome Center\May 06 Submittal CD\1002-99124-0100.dwg - 5/19/06

DESIGN TEAM CEB CHECKED PLM DATE 05/19/06

WORKING NUMBER DI-1

SHEET NUMBER 2