

GENERAL INDEX

FOR DETAILED INDEX OF PLANS SEE SHEET NO. 2

DESCRIPTION	NUMBER OF SHEETS
TITLE SHEET	1
DETAILED INDEX	1
GENERAL NOTES	
TYPICAL SECTIONS	
QUANTITIES	
PLAN AND PROFILES	
SPECIAL DESIGN - SITEWORK DRAWINGS	27
BRIDGE DRAWINGS	
SPECIAL DESIGN - BRIDGES	
CROSS-SECTIONS	
TOTAL SHEETS	29

STATE OF MISSISSIPPI

MISSISSIPPI DEPARTMENT OF TRANSPORTATION


**PLANS OF PROPOSED
SITE IMPROVEMENTS FOR
DISTRICT SEVEN AT McCOMB
STATE PROJECT NO. LWO-7031-57(005)**

501416/302000


① 10-11-06

PIKE COUNTY

FED. ROAD REG. NO.	STATE	PROJECT NO.	SHEET NO.
4	MISS.		1

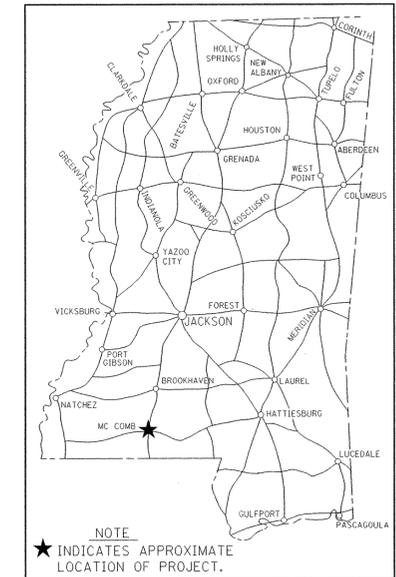

**DISTRICT 7 COMPLEX
HWY 51 NORTH**

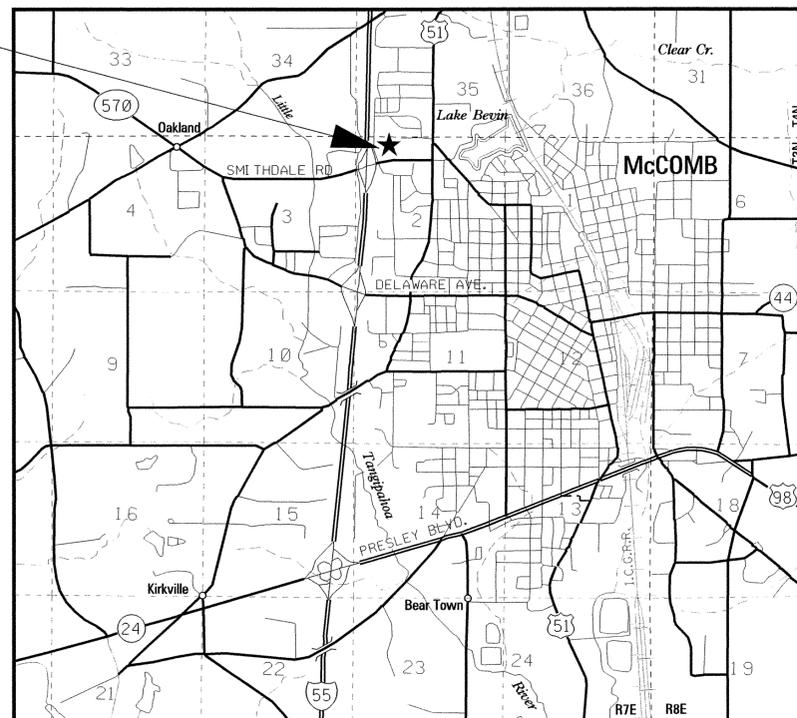

DESIGN CONTROL

MPH = V (SPEED DESIGN)

ADT () = : ADT () =

DHV = : D = % T = %

PERMITS ACQUIRED BY MDOT

WETLANDS AND WATERS PERMITS (NECESSARY FOR ULTIMATE IMPROVEMENTS ONLY):

	WATERS	WETLANDS
NATIONWIDE #14	N	N
NATIONWIDE (OTHER)*	N	N
GENERAL*	N	N
INDIVIDUAL (404)*	N	N

* ACQUISITION OF PERMITS FOR TEMPORARY IMPACTS DURING CONSTRUCTION ARE THE RESPONSIBILITY OF THE CONTRACTOR

STORMWATER PERMIT S

Y REQUIRED, CNOI SUBMITTED BY MDOT (DISTRIBUTED AREA = 5 ACRES + INTB 6484)

S REQUIRED, SCNOI TO BE SUBMITTED BY CONTRACTOR (1 TO 4.99 ACRES) (INTB 6483)

N NO STORMWATER PERMIT REQUIRED (<1 ACRE)

APPROVED BY: *JD* DATE: 10-9-06

CONVENTIONAL SYMBOLS

- COUNTY LINE -----
- TOWN CORPORATION LINE -----
- SECTION LINE -----
- EXISTING ROAD OR TRAVELED WAY -----
- PROPOSED ROAD OR TRAVELED WAY -----
- RAILROAD -----
- SURVEY LINE -----
- BRIDGES -----

APPROVED: *Larry Lee James* 10/6/06
CHIEF ENGINEER DATE

APPROVED: *Samuel R. Tompkins* 10-6-06
EXECUTIVE DIRECTOR DATE

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

APPROVED: _____ DATE _____
DIVISION ADMINISTRATOR

FEDERAL HIGHWAY ADMINISTRATION
DEPARTMENT OF TRANSPORTATION

INDEX TO DRAWINGS

DESCRIPTION OF SHEET	WORKING NUMBER	SHEET NUMBER
MDOT TITLE SHEET		1
DETAILED INDEX AND GENERAL NOTES	DI-1	2
SUMMARY OF QUANTITIES	SQ1	3
SUMMARY OF QUANTITIES	SQ2	4
EXISTING CONDITIONS	EX	5
DEMOLITION PLAN	DM	6
STORM WATER POLLUTION PREVENTION PLAN	SWPPP	7
PHASING PLAN	PH	8
LAYOUT PLAN	L1	9
LAYOUT PLAN	L2	10
GRADING PLAN	G	11
IRRIGATION PLAN & DETAILS	IR	12
PLANTING PLAN & DETAILS	LA	13
VEGETATION SCHEDULE	VS	14
MOWING LIMITS	ML	15
SITE DETAILS	D1	16
SITE DETAILS	D2	17
ELECTRICAL LEGEND, ABBREVIATIONS AND GENERAL NOTES	E0.1	18
SITE PLAN - ELECTRICAL	E1.0	19
ELECTRICAL DETAILS	E2.0	20
ELECTRICAL SCHEDULES	E3.0	21

STANDARD MDOT DRAWINGS

CONCRETE PAVING JOINTS (TRANSVERSE)	PJ-1	104
CONCRETE PAVING JOINTS (LONGITUDINAL)	PJ-2	105
DRIVEWAYS, CURB AND GUTTER, AND SIDEWALK	SD-1	287
PIPE COLLAR-CONCRETE	PC-1	301
JUNCTION BOX FOR PIPE CULVERTS	JB-1	302
DETAILS OF GRATES FOR GUTTER INLETS	IG-2	315
STORM SEWER STRUCTURE (REGULAR INLET) & (INLET WITH ONE EXTENSION)	SS-2	322
STORM SEWER INLET TYPE SS-3	SS-3	323

GENERAL NOTES:

- IF THE CONTRACTOR, IN THE COURSE OF THE WORK, FINDS OR SUSPECTS ANY DISCREPANCY BETWEEN THE DRAWINGS AND THE PHYSICAL CONDITIONS OF THE SITE OR WORK OR ANY ERRORS OR OMISSIONS IN THE CONTRACT DOCUMENTS OR SPECIFICATIONS, HE SHALL IMMEDIATELY NOTIFY THE ENGINEER, AND THE ENGINEER SHALL PROMPTLY VERIFY THE SAME. ANY WORK DONE AFTER SUCH DISCOVERY, UNLESS AUTHORIZED, SHALL BE DONE AT THE CONTRACTOR'S RISK.
- THE CONTRACTOR SHALL PROVIDE THE NECESSARY PEDESTRIAN BARRICADES, SURROUNDING THE ENTIRE WORK AREA, TO ROUTE THE GENERAL PUBLIC AROUND THE WORK AREAS IN ACCORDANCE WITH MUTCD (MANUAL OF UNIFORM TRAFFIC CONTROL DEVICES - LATEST EDITION). BARRICADES SHALL CONSIST OF KEYSTONE (OR APPROVED EQUAL) RED BRAND STUDDED T-POSTS (FENCE POSTS), GREEN, 6'-0" LONG, 10'-0" O.C.; TENEX (OR APPROVED EQUAL) ORANGE SAFETY FENCE, 4'-0" HIGH, SECURE WITH ALUMINUM FENCE TIES OR TIE WIRE. FLUORESCENT ORANGE SHEETING SHALL BE REQUIRED FOR CONSTRUCTION AND TRAFFIC CONTROL SIGNS.
- EXISTING STRUCTURES OR UTILITIES, NOT DESIGNATED FOR DEMOLITION/UPGRADE, DAMAGED BY THE CONSTRUCTION OPERATION, AS DETERMINED BY THE ENGINEER, SHALL BE REPLACED OR REPAIRED BY THE CONTRACTOR, AT NO COST TO THE DEPARTMENT.
- THE CONTRACTOR WILL BE PERMITTED TO USE WATER THAT IS AVAILABLE ON THE SITE DURING THE PLANTING AND ESTABLISHING OF THE TREES AND SHRUBS. FALLEN LIMBS, LITTER AND DEBRIS SHALL BE REMOVED FROM THE SITE FOR THE LIFE OF THE CONTRACT. THE CONTRACTOR SHALL PROVIDE TREE PROTECTION DURING CONSTRUCTION.
- DURING CONSTRUCTION, WHILE THE DISTRICT OFFICE IS OPEN, CONTRACTOR SHALL PROVIDE BARRIER FREE, ALL-WEATHER SURFACE ACCESS FROM THE VEHICULAR PARKING AREA IN USE DURING THAT PHASE TO THE DISTRICT OFFICE BUILDING. PLYWOOD WALKS WITH SLIP RESISTANT FINISH SHALL BE CONSIDERED WITH ENGINEERS APPROVAL.

FMS-501416/302000

PS & E PLANS - DATE 10/11/06		
REVISIONS		
DATE	SHEET NO.	BY
10-19-06	3, 4, 12	MRS

**Weatherford
McDade, Ltd.** *Asw*

DATE	MISSISSIPPI DEPARTMENT OF TRANSPORTATION SITE IMPROVEMENTS FOR DISTRICT SEVEN AT McCOMB		
	DETAILED INDEX AND GENERAL NOTES		
REVISION	PROJECT NO. LWO-7031-57(005) PIKE CO.		
	WORKING NUMBER DI-1		
	FILENAME: 002-04102DI-1.DWG	SHEET NUMBER	
	DESIGN TEAM MRS CHECKED PLM DATE 10/09/06	2	