


**GENERAL INDEX**

FOR DETAILED INDEX OF PLANS SEE SHEET NO. 2

DESCRIPTION	NUMBER OF SHEETS
TITLE SHEET	1
DETAILED INDEX	1
GENERAL NOTES	1
TYPICAL SECTIONS	1
QUANTITIES	5
PLAN AND PROFILES	13
SPECIAL DESIGN - ROADWAY ITEMS	23
BRIDGE DRAWINGS	
SPECIAL DESIGN - BRIDGES	
CROSS-SECTIONS	
<b>TOTAL SHEETS</b>	<b>45</b>

011-10-06



STATE OF MISSISSIPPI

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

**PLAN AND PROFILE OF PROPOSED STATE HIGHWAY FEDERAL AID PROJECT NO. PSB-0000-02(003)**


GUARDRAIL PLACEMENT IN VARIOUS LOCATIONS

FMS 104835 /301000

YALOBUSHA COUNTY

**SCALES**

PLAN	1 IN. = 100 FT.
PROFILE	HOR. 1 IN. = 100 FT.
	VERT. 1 IN. = 10 FT.
LAYOUT	1 IN. = 4 MI.

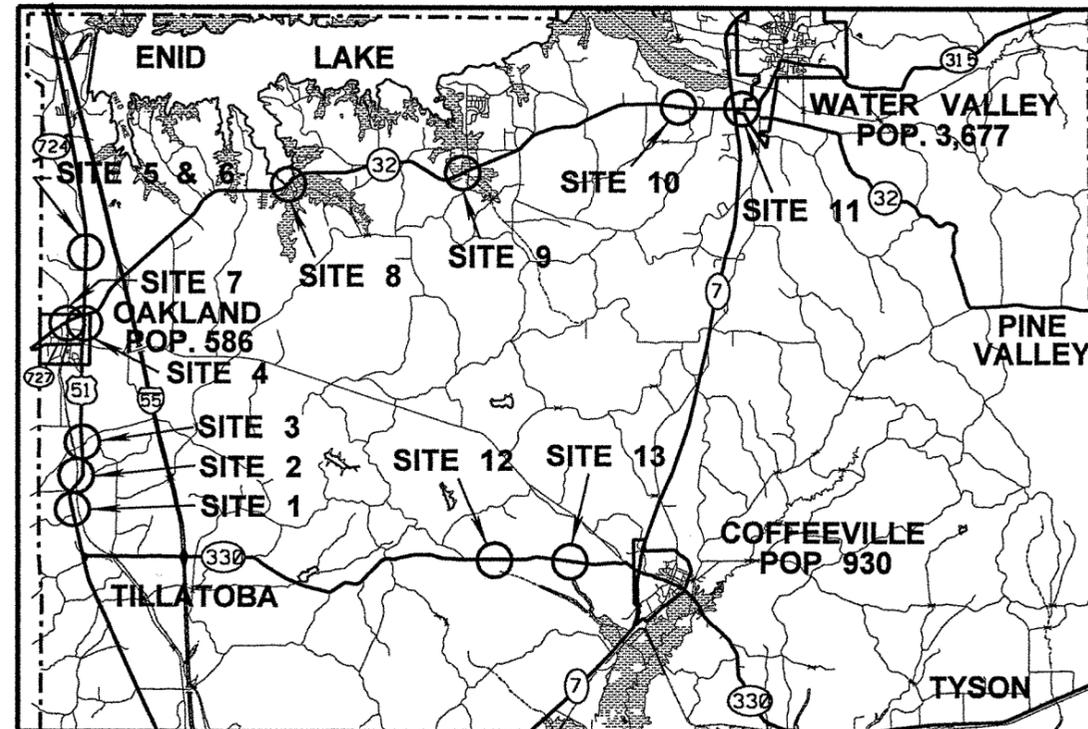

**EQUATIONS**

**EXCEPTIONS**


**LENGTH DATA**

**CONVENTIONAL SYMBOLS**

- COUNTY LINE .....
- TOWN CORPORATION LINE .....
- SECTION LINE .....
- EXISTING ROAD OR TRAVELED WAY .....
- PROPOSED ROAD OR TRAVELED WAY .....
- RAILROAD .....
- SURVEY LINE .....
- BRIDGES .....

- LENGTH OF ROADWAY
- LENGTH OF BRIDGES
- LENGTH OF PROJECT (NET)
- LENGTH OF EXCEPTIONS
- LENGTH OF PROJECT (GROSS)

FED. ROAD REG. NO.	STATE	PROJECT NO.	SHEET NO.
4	MISS.	PSB-0000-02(003)	1

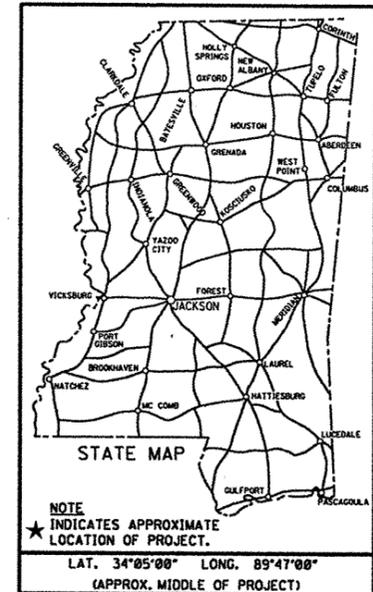

**DESIGN CONTROL**

MPH = V (SPEED DESIGN)

ADT ( ) = ; ADT ( ) =

DHV = ; D = % T = %

**PERMITS ACQUIRED BY MDOT**

WETLANDS AND WATERS PERMITS (NECESSARY FOR ULTIMATE IMPROVEMENTS ONLY):

	WATERS	WETLANDS
NATIONWIDE #14	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
NATIONWIDE (OTHER)*	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
GENERAL*	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
INDIVIDUAL (404)*	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

\* ACQUISITION OF PERMITS FOR TEMPORARY IMPACTS DURING CONSTRUCTION ARE THE RESPONSIBILITY OF THE CONTRACTOR

STORMWATER PERMIT  S

Y REQUIRED CNOI SUBMITTED BY MDOT (DISTRIBUTED AREA - 5 ACRES - (NTIB 8484))

S REQUIRED SCNOI TO BE SUBMITTED BY CONTRACTOR (1 TO 4.99 ACRES) (NTIB 8483)

N NO STORMWATER PERMIT REQUIRED (< 1 ACRE)

APPROVED BY: *UKP* DATE: *11/10/06*

APPROVED: *Harry Lee James* DATE: *11-9-06*

CHIEF ENGINEER

APPROVED: *[Signature]* DATE: *11-9-06*

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

APPROVED:

DIVISION ADMINISTRATOR DATE

FEDERAL HIGHWAY ADMINISTRATION DEPARTMENT OF TRANSPORTATION



GENERAL NOTES:

1. FLUORESCENT ORANGE SHEETING SHALL BE USED ON ALL CONSTRUCTION AND TRAFFIC CONTROL SIGNS EXCEPT FOR THOSE DESIGNATED IN PLANS TO BE BLACK LEGEND AND BORDER ON WHITE BACKGROUND.
2. DURING PERIODS OF WORK WHERE A LANE CLOSURE IS NOT REQUIRED THE CONTRACTOR SHALL HAVE IN PLACE AS A MINIMUM REQUIREMENT W20-1, AS SHOWN ON TCP-1.
3. REMOVAL & SITE GRADING OF EXISTING RAMPS AND THE NECESSARY SITE GRADING OF ROADWAY DITCHES AS DIRECTED BY THE PROJECT ENGINEER, TO BE ABSORBED IN OTHER PAY ITEMS.
4. SMALL AMOUNTS OF EXCAVATION MAY BE NECESSARY AT SOME OF THE SITES. THIS MATERIAL MAY BE USED AS E.S.F.E. MATERIAL AND WILL BE PAID FOR AS 203-EX BORROW EXCAVATION. NO E.S.F.E. SHALL BE REMOVED FROM THE PROJECT WITHOUT THE APPROVAL OF THE ENGINEER.
5. THE COST OF CLEARING AND GRUBBING TO BE ABSORBED IN OTHER ITEMS.
6. VOIDS CREATED BY THE REMOVAL OF POSTS, CONCRETE ANCHORS, FOOTINGS, ETC., SHALL BE BACKFILLED AND TAMPED IN ACCORDANCE WITH SECTION 203 OF MISSISSIPPI STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION.
7. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO PROTECT EXISTING STRUCTURES SUCH AS PIPES, INLETS, APRONS, BRIDGES, ETC. FROM DAMAGE WHICH MIGHT OCCUR DURING CONSTRUCTION. EXTREME CARE SHOULD BE EXERCISED IN UNDERCUT AREAS AND THE UNDERCUT DEPTH MAY BE ADJUSTED AT CROSS DRAINS, AS DIRECTED BY THE ENGINEER. THE CONTRACTOR SHALL REPLACE OR REPAIR, AS DIRECTED BY THE ENGINEER, ANY STRUCTURES DAMAGED DURING THE LIFE OF THE CONTRACT. NO PAYMENT WILL BE MADE FOR REPLACEMENT OR REPAIR OF DAMAGED ITEMS.
8. VEGETATIVE MATERIAL WILL BE REMOVED PRIOR TO PLACEMENT OF GRANULAR MATERIAL. COST TO BE ABSORBED IN OTHER ITEMS.
9. ALL DIMENSIONS AND SPACINGS FOR BRIDGE RAIL CONNECTORS TO BE VERIFIED IN THE FIELD BY THE CONTRACTOR PRIOR TO FABRICATION.

PLAN  
 DESIGN DIVISION  
 MISSISSIPPI DEPARTMENT OF TRANSPORTATION

		MISSISSIPPI DEPARTMENT OF TRANSPORTATION	
		<b>GENERAL NOTES</b>	
		PROJECT NO. PSB-0000-02(003)	
		COUNTY : YALOBUSHA	
		WORKING NUMBER	GN-1
		FILENAME: DI-1.DGN	SHEET NUMBER
		3	
DATE	DESIGN TEAM	CHECKED	DATE