

FED. ROAD REG. NO.	STATE	PROJECT NO.	SHEET NO.
4	MISS.	MP-2315-36(003)	1

STATE OF MISSISSIPPI
MISSISSIPPI DEPARTMENT OF TRANSPORTATION

PLAN OF PROPOSED
STATE HIGHWAY
STATE PROJECT NO. MP-2315-36(003)

BRIDGE TRUSS MAINTENANCE PAINTING ON HWY. 315
OVER YOCONA RIVER BRIDGE NO. 60.7
LAFAYETTE COUNTY


FMS 303342/301000

① 12-06-07




SCALES

PLAN	1 IN. = 100 FT.
PROFILE	HOR. 1 IN. = 100 FT.
	VERT. 1 IN. = 10 FT.
LAYOUT	1 IN. = 8,000 FT.

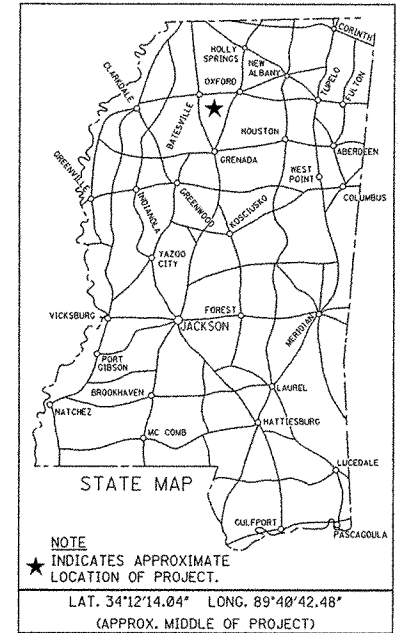

WORK SITE
BRIDGE NO. 60.7

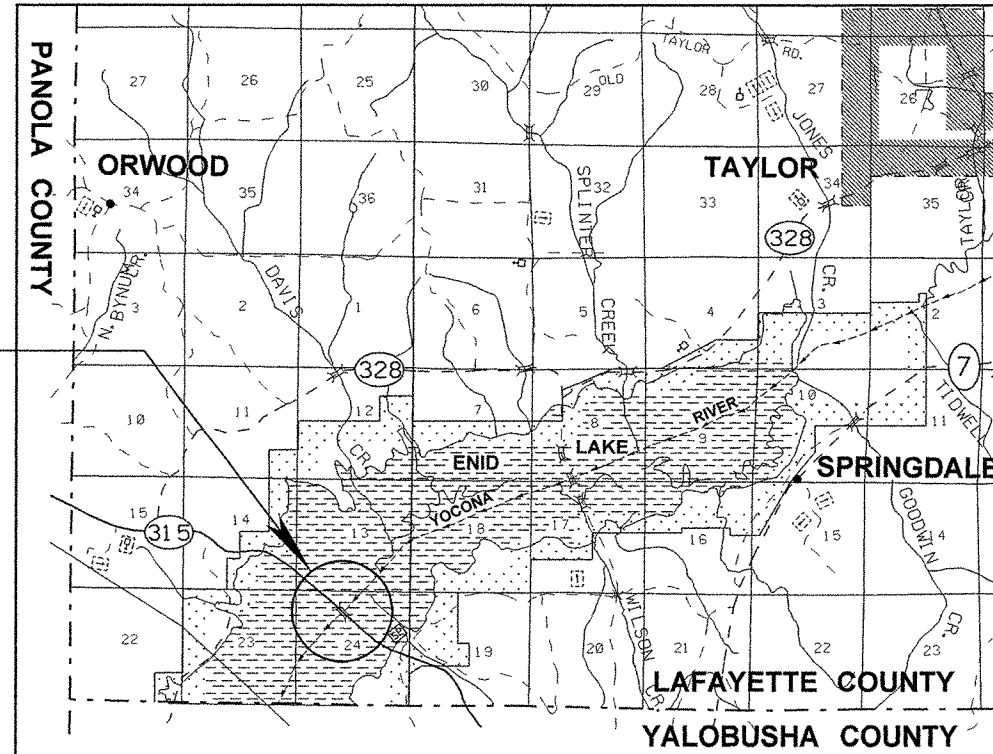

DESIGN CONTROL

MPH = V (SPEED DESIGN)

ADT () = : ADT () =

DHW = : D = % T = %

PERMITS ACQUIRED BY MDOT

WETLANDS AND WATERS PERMITS (NECESSARY FOR ULTIMATE IMPROVEMENTS ONLY):

NATIONWIDE #14	<input type="checkbox"/>	<input type="checkbox"/>
NATIONWIDE (OTHER)*	<input type="checkbox"/>	<input type="checkbox"/>
GENERAL*	<input type="checkbox"/>	<input type="checkbox"/>
INDIVIDUAL (404)*	<input type="checkbox"/>	<input type="checkbox"/>

* ACQUISITION OF PERMITS FOR TEMPORARY IMPACTS DURING CONSTRUCTION ARE THE RESPONSIBILITY OF THE CONTRACTOR

STORMWATER PERMIT

Y REQUIRED, CNOI SUBMITTED BY MDOT (DISTRIBUTED AREA = 5 ACRES + (NTB 6484)

S REQUIRED, SCHOI TO BE SUBMITTED BY CONTRACTOR (1 TO 4.99 ACRES) (NTB 6483)

N NO STORMWATER PERMIT REQUIRED (<1 ACRE)

APPROVED BY: JRP DATE: 12/6/07

CONVENTIONAL SYMBOLS

- COUNTY LINE -----
- TOWN CORPORATION LINE -----
- SECTION LINE -----
- EXISTING ROAD OR TRAVELED WAY -----
- PROPOSED ROAD OR TRAVELED WAY -----
- RAILROAD -----
- SURVEY LINE -----
- BRIDGES -----

EQUATIONS

EXCEPTIONS

LENGTH DATA

LENGTH OF ROADWAY	FT.	MI.
LENGTH OF BRIDGES	FT.	MI.
LENGTH OF PROJECT (NET)	FT.	MI.
LENGTH OF EXCEPTIONS (BRIDGES & I-69 INTERCHANGE)	FT.	MI.
LENGTH OF PROJECT (GROSS)	FT.	MI.

APPROVED BY:	<i>James Lee James</i>	DATE:	12-6-07
CHIEF ENGINEER			
EXECUTIVE DIRECTOR	<i>[Signature]</i>	DATE:	
MISSISSIPPI DEPARTMENT OF TRANSPORTATION			
APPROVED:		DATE:	
DIVISION ADMINISTRATOR		DATE	
FEDERAL HIGHWAY ADMINISTRATION DEPARTMENT OF TRANSPORTATION			

GENERAL NOTES:

1. THE CONTRACTOR SHALL MAKE A MISSISSIPPI ONE-CALL REQUEST PRIOR TO ANY EXCAVATION OPERATION.
2. IN ORDER TO EXPEDITE THE SAFE MOVEMENT OF TRAFFIC AND TO PROTECT EACH PHASE OF THE WORK AS IT IS PERFORMED, A FIRM SEQUENCE OF OPERATIONS IS ESSENTIAL. THE WORK SHALL BE BEGUN AND CONTINUALLY PROSECUTED.
3. THE CONTRACTOR SHALL PROVIDE ALL SIGNS AND TRAFFIC HANDLING DEVICES NECESSARY TO SAFELY MAINTAIN TRAFFIC AROUND OR THROUGH THE WORK AREAS.
4. INCIDENTAL WORK SUCH AS REMOVING VEGETATION AND OTHER INCIDENTAL WORK THAT IS NECESSARY TO COMPLETE THE WORK WILL NOT BE MEASURED FOR SEPARATE PAYMENT AND THE COST WILL BE INCLUDED IN THE ITEMS BID.
5. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO PROTECT THE ROADWAY AND ALL EXISTING STRUCTURES SUCH AS BRIDGES, CURBS AND OTHER FEATURES FROM DAMAGE DURING CONSTRUCTION. THE CONTRACTOR SHALL REPLACE OR REPAIR, AS DIRECTED BY THE ENGINEER, ANY STRUCTURES OR PORTION OF THE ROADWAY DAMAGED AS A RESULT OF CONTRACTOR'S OPERATIONS DURING THE LIFE OF THE CONTRACT. NO PAYMENT WILL BE MADE FOR REPLACEMENT OR REPAIR OF DAMAGED ITEMS, CAUSED BY THE CONTRACTOR'S OPERATIONS.
6. FLUORESCENT ORANGE SHEETING SHALL BE USED ON ALL CONSTRUCTION AND TRAFFIC CONTROL SIGNS EXCEPT FOR THOSE DESIGNATED IN PLANS TO BE BLACK LEGEND AND BORDER ON WHITE BACKGROUND.
7. DURING PERIODS OF WORK WHERE A LANE CLOSURE IS NOT REQUIRED THE CONTRACTOR SHALL HAVE IN PLACE AS A MINIMUM REQUIREMENT W20-1, AS SHOWN ON TCP-1.

ROADWAY DESIGN DIVISION C.A.D.D. SECTION
MISSISSIPPI DEPARTMENT OF TRANSPORTATION

		MISSISSIPPI DEPARTMENT OF TRANSPORTATION	
		GENERAL NOTES	
		PROJECT NO.: MP-2315-36(003)	
		COUNTY: LAFAYETTE	
		FILENAME: Generalnotes.DGN	WORKING NUMBER GN-1
		DESIGN TEAM _____	CHECKED _____
		DATE _____	DATE _____
			SHEET NUMBER 3