


FED. ROAD REG. NO.	STATE	PROJECT NO.	SHEET NO.
4	MISS.	MP-2149-14(001)	1

STATE OF MISSISSIPPI
MISSISSIPPI DEPARTMENT OF TRANSPORTATION

**PLAN AND PROFILE OF PROPOSED
STATE HIGHWAY
STATE PROJECT NO. MP-2149-14(001)**


**S.R. 149 FROM THE PAVEMENT MANAGEMENT SECTION
SOUTH OF U.S. 61 INTERCHANGE TO S.R. 161
COAHOMA COUNTY**

FMS 303347/301000

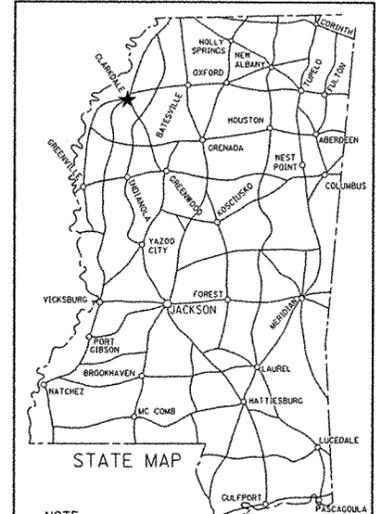


NOTE
★ INDICATES APPROXIMATE LOCATION OF PROJECT.
LAT. 34.168751° LONG. 90.549538°
(APPROX. MIDDLE OF PROJECT)

01270-07



SCALES
PLAN 1 IN. = 100 FT.
PROFILE { HOR. 1 IN. = 100 FT.
 VERT. 1 IN. = 10 FT.
LAYOUT 1 IN. = 5000 FT.

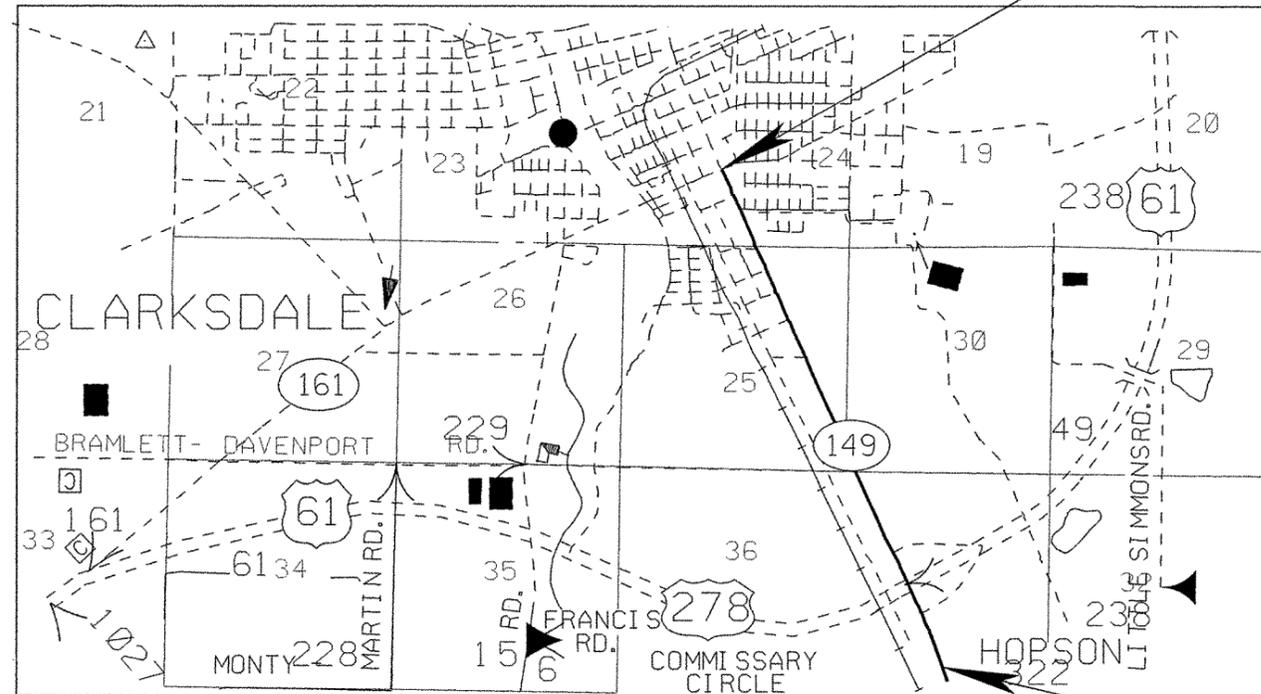

E.O.P.

B.O.P.

DESIGN CONTROL

MPH = V (SPEED DESIGN)

ADT () = ; ADT () =
DHV = ; D = % T = %

PERMITS ACQUIRED BY MDOT

WETLANDS AND WATERS PERMITS (NECESSARY FOR ULTIMATE IMPROVEMENTS ONLY):

NATIONWIDE #14	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
NATIONWIDE (OTHER)*	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
GENERAL*	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
INDIVIDUAL (404)*	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

* ACQUISITION OF PERMITS FOR TEMPORARY IMPACTS DURING CONSTRUCTION ARE THE RESPONSIBILITY OF THE CONTRACTOR

STORMWATER PERMIT

Y REQUIRED CNOI SUBMITTED BY MDOT (DISTRIBUTED AREA = 5 ACRES + INTB 6484)
S REQUIRED SCHOI TO BE SUBMITTED BY CONTRACTOR (1 TO 4.99 ACRES) (INTB 6483)
N NO STORMWATER PERMIT REQUIRED (<1 ACRE)

APPROVED BY: *JLP* DATE: 12/10/07

CONVENTIONAL SYMBOLS

- COUNTY LINE -----
- TOWN CORPORATION LINE -----
- SECTION LINE -----
- EXISTING ROAD OR TRAVELED WAY -----
- PROPOSED ROAD OR TRAVELED WAY -----
- RAILROAD -----
- SURVEY LINE -----
- BRIDGES -----

EQUATIONS

EXCEPTIONS

APPROXIMATELY 1500 L.F. AT U.S. 61 INTERCHANGE

LENGTH DATA

LENGTH OF ROADWAY	FT.	2.059	MI.
LENGTH OF BRIDGES	FT.		MI.
LENGTH OF PROJECT (NET)			MI.
LENGTH OF EXCEPTIONS	FT.	.250	MI.
LENGTH OF PROJECT (GROSS)		1.809	MI.

APPROVED: *Larry Lee James* DATE: 12-10-07
CHIEF ENGINEER

APPROVED: *[Signature]* DATE: *[Signature]*
SUPERVISOR

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

APPROVED: _____ DATE _____
DIVISION ADMINISTRATOR

FEDERAL HIGHWAY ADMINISTRATION
DEPARTMENT OF TRANSPORTATION

12/10/2007 8:33 AM TITLE.DGN MISSISSIPPI DEPARTMENT OF TRANSPORTATION

STATE	PROJECT NO.
MISS.	MP-2149-14(001)

DESCRIPTION OF SHEET	REVISION	WKG. NO.	SH. NO.	DESCRIPTION OF SHEET	REVISION	WKG. NO.	SH. NO.
<u>TITLE SHEETS (1)</u>				<u>STANDARD DRAWING SHEETS (7)</u>			
TITLE SHEET			1	PAVEMENT MARKING DETAILS FOR 2 & 4 LANE DIVIDED ROADWAYS	(12-01-99)	PM-1	120
<u>DETAILED INDEX & GENERAL NOTES SHEET (2)</u>				TYPICAL PLACEMENT OF WARNING SIGNS AND PAVEMENT MARKINGS AT RAILROAD HIGHWAY GRADE CROSSINGS	(03-01-02)	PM-7	126
DETAILED INDEX		DI-1	2	TRAFFIC CONTROL PLAN WITH FLAGGER (ONE LANE OF TWO WAY TRAFFIC)		TCP-1	250
GENERAL NOTES		GN-1	3	TRAFFIC CONTROL PLAN FOR POSTED SPEED LIMIT LESS THAN 65 MPH (4-LANE: MEDIAN LANE OR OUTSIDE LANE CLOSURE) (WORK DAY ONLY)		TCP-2	251
<u>TYPICAL SECTION SHEETS (3)</u>				SHORT DURATION CLOSING OF TWO-LANE TWO-WAY HIGHWAYS		TCP-8	257
TYPICAL SECTION - 2-LANE SECTION		TS-1	4	HIGHWAY SIGN & BARRICADE DETAILS FOR CONSTRUCTION PROJECTS		TCP-10	259
TYPICAL SECTION - 4-LANE SECTION		TS-2	5	TEMPORARY STRIPING FOR TRAFFIC CONTROL 2-LANE AND 4-LANE DIVIDED HIGHWAYS	(12-01-99)	TCP-15	264
TYPICAL SECTION - INTERCHANGE RAMPS		TS-3	6				
<u>QUANTITY SHEETS (2)</u>				TOTAL SHEETS (19)			
SUMMARY OF QUANTITY		SQ-1	7				
SUMMARY OF QUANTITY		SQ-2	8				
<u>SPECIAL DESIGN SHEETS (4)</u>							
DETAIL OF CONSTRUCTION SIGNING		DCS-1	9				
MISCELLANEOUS DETAIL SHEET		MDS-1	10				
RUMBLE STRIPE 2-LANE HIGHWAY		RS-2L	11				
RUMBLE STRIPE 4-LANE HIGHWAY		RS-4L	12				

PLAN
ROADWAY DESIGN DIVISION, C.A.D.D. SECTION
MISSISSIPPI DEPARTMENT OF TRANSPORTATION

M. FORD		
PS & E PLANS-DATE 12/10/07		
FMS CON. # 303347/301000		
REVISIONS		
DATE	SHEET NO.	BY

MISSISSIPPI DEPARTMENT OF TRANSPORTATION	
DETAILED INDEX	
PROJECT NO. MP-2149-14(001)	
COUNTY : COAHOMA	
DATE	WORKING NUMBER
DESIGN TEAM	DI-1
CHECKED	SHEET NUMBER
DATE	2

COUNTY: COAHOMA

PROJECT NO.: MP-2149-14(001)

STATE	PROJECT NO.
MISS.	MP-2149-14(001)

GENERAL NOTES:

1. THE CONTRACTOR SHALL MAKE A MISSISSIPPI ONE-CALL REQUEST PRIOR TO ANY EXCAVATION OPERATION, EXCEPTING BOTH TRENCH WIDENING AND PAVEMENT REMOVAL AND REPAIR.
2. ANY INCIDENTAL OR NECESSARY GRADING OF ROADWAY DITCHES, AS DIRECTED BY THE ENGINEER, TO BE ABSORBED IN OTHER PAY ITEMS.
3. THE COST OF CLEARING AND GRUBBING TO BE ABSORBED IN OTHER PAY ITEMS.
4. BIDDERS ARE ADVISED THAT CROSS-SLOPES FOR CURVE SUPERELEVATIONS ARE TO BE BUILT IN ACCORDANCE WITH INFORMATION PROVIDED BY THE DEPARTMENT AND AS DIRECTED BY THE ENGINEER. TO ASSIST THE CONTRACTOR IN CORRECTLY PLACING THE CROSS SLOPE TRANSITIONS, THE DEPARTMENT WILL PROVIDE, AT THE PRE-CONSTRUCTION CONFERENCE, STATIONING AND PERCENT SLOPE INFORMATION. SUFFICIENT MILLING, PRE-LEVELING, AND/OR LEVELING QUANTITIES ARE PROVIDED IN THIS CONTRACT TO FACILITATE THIS WORK. ALL TRANSITION CROSS-SLOPES ARE TO BE ESTABLISHED AND CHECKED PRIOR TO PLACEMENT OF THE TOP LIFT OF PAVEMENT.
5. IN ORDER TO EXPEDITE THE SAFE MOVEMENT OF TRAFFIC AND TO PROTECT EACH PHASE OF THE WORK AS IT IS PERFORMED, A FIRM SEQUENCE OF OPERATIONS IS ESSENTIAL. THE WORK SHALL BE BEGUN AND CONTINUALLY PROSECUTED.
6. AS DIRECTED BY THE ENGINEER, REMOVE ANY MATERIAL PRODUCED FROM THE EXCAVATION OPERATION FOR TRENCH WIDENING THAT CANNOT BE REASONABLY ANTICIPATED TO BE USED AS PART OF THE FINAL SHOULDER. THIS REMOVAL SHALL BE ACCOMPLISHED SIMULTANEOUS WITH THE EXCAVATION OPERATION. MATERIAL THAT CANNOT REASONABLY BE ANTICIPATED TO BE USED IN THE FINAL SHOULDER SHALL NOT REMAIN ROLLED UP ON THE EXISTING SHOULDER OR BLADED DOWN THE SLOPE. THERE WILL BE NO SEPARATE PAYMENT FOR THIS WORK WHICH WILL BE INCLUDED IN THE COST OF THE TRENCH WIDENING OPERATIONS.
7. TRENCH WIDENING EXCAVATION MAY INCLUDE THE REMOVAL OF ASPHALT ALONG THE SHOULDER DUE TO PREVIOUS MAINTENANCE REPAIRS. THERE WILL BE NO SEPARATE PAYMENT FOR THIS WORK WHICH WILL BE INCLUDED IN THE COST OF THE TRENCH WIDENING OPERATIONS.
8. SHOULDERS SHALL BE BLADED, SHAPED AND COMPACTED THROUGHOUT THE LENGTH OF THE PROJECT REGARDLESS OF WHETHER GRANULAR MATERIAL IS REQUIRED. MORE MATERIAL THAN IS NECESSARY TO PROPERLY ESTABLISH THESE SHOULDERS MAY RESULT FROM THE FINAL GRADING OF THE SHOULDERS. THE ENGINEER MAY DIRECT THAT SOME OF THIS MATERIAL BE REMOVED FROM THE PROJECT. MATERIAL REMOVED FROM THE PROJECT WILL BE PAID FOR AS 203-G, EXCESS EXCAVATION (LVM) (AH). THIS ITEM MAY INCLUDE SMALL AMOUNTS OF ASPHALT THAT MAY BE WITHIN THESE EXCAVATION LIMITS.
9. ALL DRIVEWAY PADS ARE TO BE PAVED A DISTANCE TO TEN (10) FEET AND SHALL BE TAPERED TO FIT EXISTING CONDITIONS, ALLOWING SMOOTH ENTRY AND EXIT. SEE THE ATTACHED MISCELLANEOUS DETAIL, ON SHEET NO. 10. COUNTY ROADS AND/OR CITY STREETS ARE TO BE PAVED AND/OR MILLED TO THE RIGHT-OF-WAY LINE AS DIRECTED BY THE PROJECT ENGINEER.
10. HIGHWAYS, COUNTY ROADS AND/OR CITY STREETS MAY REQUIRE NEW STRIPE, AS DIRECTED BY THE ENGINEER.
11. THE CONTRACTOR SHALL PROVIDE ALL SIGNS AND TRAFFIC HANDLING DEVICES NECESSARY TO SAFELY MAINTAIN TRAFFIC AROUND OR THROUGH THE WORK AREAS.
12. INCIDENTAL WORK SUCH AS REMOVING VEGETATION, SHAPING AND COMPACTION OF SHOULDERS, INCIDENTAL GRADING OF DRIVEWAYS FOR POSITIVE DRAINAGE AND SLOPE AND OTHER INCIDENTAL WORK THAT IS NECESSARY TO COMPLETE THE WORK WILL NOT BE MEASURED FOR SEPARATE PAYMENT AND THE COST WILL BE INCLUDED IN THE ITEMS BID.
13. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO PROTECT THE ROADWAY AND ALL EXISTING STRUCTURES SUCH AS BRIDGES, CURBS AND OTHER FEATURES FROM DAMAGE WHICH MIGHT OCCUR DURING CONSTRUCTION. THE CONTRACTOR SHALL REPLACE OR REPAIR, AS DIRECTED BY THE ENGINEER, ANY STRUCTURES OR PORTION OF THE ROADWAY DAMAGED AS A RESULT OF CONTRACTOR'S OPERATIONS DURING THE LIFE OF THE CONTRACT. NO PAYMENT WILL BE MADE FOR REPLACEMENT OR REPAIR OF DAMAGED ITEMS, CAUSED BY THE CONTRACTOR'S OPERATIONS.
14. DUE CARE SHALL BE TAKEN DURING BOTH THE TRENCH WIDENING AND GRANULAR MATERIAL OPERATIONS TO BLADE MATERIAL TOWARD THE ROADWAY AND AWAY FROM THE DITCH LINE. MATERIAL SHALL BE REMOVED FROM THE ROADWAY GRASS IF INADVERTENTLY BLADED THERE.
15. AT BRIDGE ENDS AND AT THE END OF WORK DAYS, THE CONTRACTOR SHALL PROVIDE A TAPER AT ANY VERTICAL JOINT ON A THREE (3) FOOT TO ONE (1) INCH VERTICAL SLOPE.
16. SHOULD MILLING BE REQUIRED WITHIN A CURB AND GUTTER SECTION, THE CONTRACTOR SHALL CONTINUOUSLY KEEP THE TRAVEL SURFACE FREE FROM SURFACE WATER. THIS MAY REQUIRE CONTINUOUS TWENTY-FOUR (24) HOUR MONITORING AND SWEEPING OF THE PROJECT.
17. CONTRACTOR SHALL CONFIRM BRIDGE CLEARANCES PRIOR TO STARTING WORK.
18. RAILROAD CONTACT INFORMATION:

MISSISSIPPI DELTA RAILROAD
P.O. BOX 1446
CLARKSDALE, MS. 38614
(662) 624-4051
CELL PHONE NO. FOR REGGIE HOWELL (662) 902-1838

C & J RAILROAD (PARENT COMPANY)
1710 L. EAST TENTH STREET
JEFFERSON, IN. 47130
(812) 282-8165

COAHOMA COUNTY ADMINISTRATOR
HUGH JACK STUBBS
P.O. BOX 579
CLARKSDALE, MS. 38614
(662) 624-3028 FAX (662) 624-3029
ccadmin@cableone.net

MISSISSIPPI DEPARTMENT OF TRANSPORTATION	
GENERAL NOTES	
PROJECT NO.: MP-2149-14-(001) COUNTY : COAHOMA	
DATE	WORKING NUMBER
DESIGN TEAM	GN-1
CHECKED	SHEET NUMBER
DATE	3

COUNTY : COAHOMA

PROJECT NO.: MP-2149-14-(001)

ROADWAY DESIGN PLAN C.A.D. SECTION MISSISSIPPI DEPARTMENT OF TRANSPORTATION