

SECTION 905 -- PROPOSAL (CONTINUED)

I (We) further propose to execute the attached contract agreement (Section 902) as soon as the work is awarded to me (us), and to begin and complete the work within the time limit(s) provided for in the Specifications and Advertisement. I (We) also propose to execute the attached contract bond (Section 903) in an amount not less than one hundred (100) percent of the total of my (our) part, but also to guarantee the excellence of both workmanship and materials until the work is finally accepted.

I (We) enclose a certified check, cashier's check or bid bond for **five percent (5%) of total bid** and hereby agree that in case of my (our) failure to execute the contract and furnish bond within Ten (10) days after notice of award, the amount of this check (bid bond) will be forfeited to the State of Mississippi as liquidated damages arising out of my (our) failure to execute the contract as proposed. It is understood that in case I am (we are) not awarded the work, the check will be returned as provided in the Specifications.

Bidder acknowledges receipt of and has added to and made a part of the proposal and contract documents the following addendum (addenda):

ADDENDUM NO. <u>1</u>	DATED <u>3/17/2009</u>	ADDENDUM NO. _____	DATED _____
ADDENDUM NO. _____	DATED _____	ADDENDUM NO. _____	DATED _____

Number	Description
1	Revised Table of Content; Add NTB No. 2438; Bidsheets, replace same; Amendment EBS Download Required.

TOTAL ADDENDA: 1
(Must agree with total addenda issued prior to opening of bids)

Respectfully Submitted,

DATE _____

Contractor

BY _____
Signature

TITLE _____

ADDRESS _____

CITY, STATE, ZIP _____

PHONE _____

FAX _____

E-MAIL _____

(To be filled in if a corporation)

Our corporation is chartered under the Laws of the State of _____ and the names, titles and business addresses of the executives are as follows:

_____ President	_____ Address
_____ Secretary	_____ Address
_____ Treasurer	_____ Address

The following is my (our) itemized proposal.

STP-0026-01(076) / 101648302 STP-0026-01(076) / 101648303 Newton & Neshoba County(ies)

Revised 09/21/2005

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

TABLE OF CONTENTS

PROJECT: STP-0026-01(076) / 101648302 & 303 – Newton & Neshoba Counties

901--Advertisement

904--Notice to Bidders:

- Governing Specs. - # 1
- Final Cleanup - # 3
- Fiber Reinforced Concrete - # 640
- Disadvantage Business Enterprise W/Supplement - # 696
- On-The-Job Training Program - # 777
- Cost Adjustment Factors for Maintained HMA - # 778
- Payroll Requirements - # 883
- Rumble Stripes - # 1312
- Use of Precast Drainage Units - # 1321
- Errata & Modifications to 2004 Standard Specifications - # 1405
- Safety Apparel - # 1808
- Minimum Wage Rate - # 1869
- DBE Forms, Participation and Payment - # 1918
- Non-Quality Control/Assurance Concrete - # 1922
- Federal Bridge Formula - # 1928
- Department of Labor Ruling - # 2239
- Contract Time - # 2319
- Specialty Items - # 2320
- Placement of Fill Material in Federally Regulated Areas - # 2321
- Petroleum Products Base Price - # 2345
- Storm Water Discharge Associated W/Construction Activities (>5 Acres)) - # 2348
- Current Traffic & Estimated Accumulated ESALs - # 2357
- Cooperation Between Contractors - # 2358
- Mississippi Resident Agent Requirement - # 2361
- Status of ROW, W/Attachments - # 2382
- Removal of Haul Permit - # 2400
- Project Number Change - # 2419
- Special Reporting Criteria - # 2420
- American Recovery & Reinvestment Act (ARRA) - # 2438

906: Required Federal Contract Provisions -- FHWA-1273, W/Supplement

907-104-1: Partnering Process

907-105-3: Cooperation By Contractors, W/Supplement

907-107-1: Liability Insurance, W/Supplement

907-107-3: Contractor's Protection Plan

907-107-6: Legal Relations & Responsibility to Public, W/Supplement

907-108-15: Cessation of Contract Time

907-108-16: Additional Construction Provisions

907-109-3: Partial Payment, W/Supplement

907-213-2: Agricultural Limestone

907-304-11: Granular Courses

907-306-1: Asphalt Drainage Course, W/Supplement

-CONTINUED ON NEXT PAGE-

**PAGE 2 - PROJECT NO. STP-0026-01(076) / 101648302 & 303 –
Newton & Neshoba Counties**

907-307-3: Lime Treated Courses
907-308-3: Cement Treated Courses
907-311-2: Lime-Fly Ash Treated Courses
907-401-2: Hot Mix Asphalt (HMA), W/Supplement
907-403-4: Hot Mix Asphalt (HMA), W/Supplement
907-403-6: Maintained Hot Mix Asphalt (HMA), W/Appendix
907-407-1: Tack Coat
907-601-1: Structural Concrete
907-603-8: Culverts & Storm Drains
907-605-3: Underdrains
907-618-4: Placement of Temporary Traffic Stripe
907-626-15: Thermoplastic Traffic Markings
907-701-3: Hydraulic Cement, W/Supplement
907-708-5: Non Metal Drainage Structures
907-709-1: Metal Pipe
907-711-3: Synthetic Structural Fiber Reinforcement
907-713-1: Admixtures for Concrete
907-714-5: Miscellaneous Materials, W/Supplement
907-715-3: Roadside Development Materials
907-720-1: Pavement Marking Material
907-804-8: Concrete Bridges and Structures, W/Supplement
906-3: MDOT On-the-Job Training Program
906-6: MDOT On-the-Job Training Program - Alternate Program

SECTION 905 - PROPOSAL,
PROPOSAL SHEET NOS. 2-1 THRU 2-18,
COMBINATION BID PROPOSAL,
CERTIFICATE OF PERFORMANCE - PRIOR FEDERAL-AID CONTRACTS,
NON-COLLUSION CERTIFICATE,
SECTION 902 - CONTRACT FORM, AND SECTION 903 - CONTRACT BOND FORMS,
ASPHALT MAINTENANCE BOND FORM,
OCR-485,

(REVISIONS TO THE ABOVE WILL BE INDICATED ON THE SECOND SHEET
OF SECTION 905 AS ADDENDA)

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 - NOTICE TO BIDDERS NO. 2438


CODE: (SP)

DATE: 03/16/2009

SUBJECT: American Recovery and Reinvestment Act (ARRA) Sign


Bidders are hereby advised that the Contractor shall install, maintain, and remove two (2) economic recovery signs at the beginning (BOP) and end (EOP) of this project, unless otherwise directed by the Engineer. A picture of the signs and the dimensions of the signs are shown on the attached sheets. The signs shall be constructed, installed and maintained in accordance with the MUTCD, and Sections 618 & 619 of the Standard Specifications. These signs shall be fabricated from 0.125" sheet aluminum. Signs shall be mounted on three (3) - three pounds per linear foot (3 lbs. / ft.) U-Section posts. Each post shall be 14 feet long mounted onto another 14-foot U-Section post driven halfway into the ground. All cost of installing and maintaining the signs, including material, labor, posts, hardware, etc., will be measured and paid for under the pay item no. 619-D4.

**PROJECT FUNDING SOURCE SIGN ASSEMBLY
AMERICAN RECOVERY AND REINVESTMENT ACT
SIGN LAYOUT DETAILS**

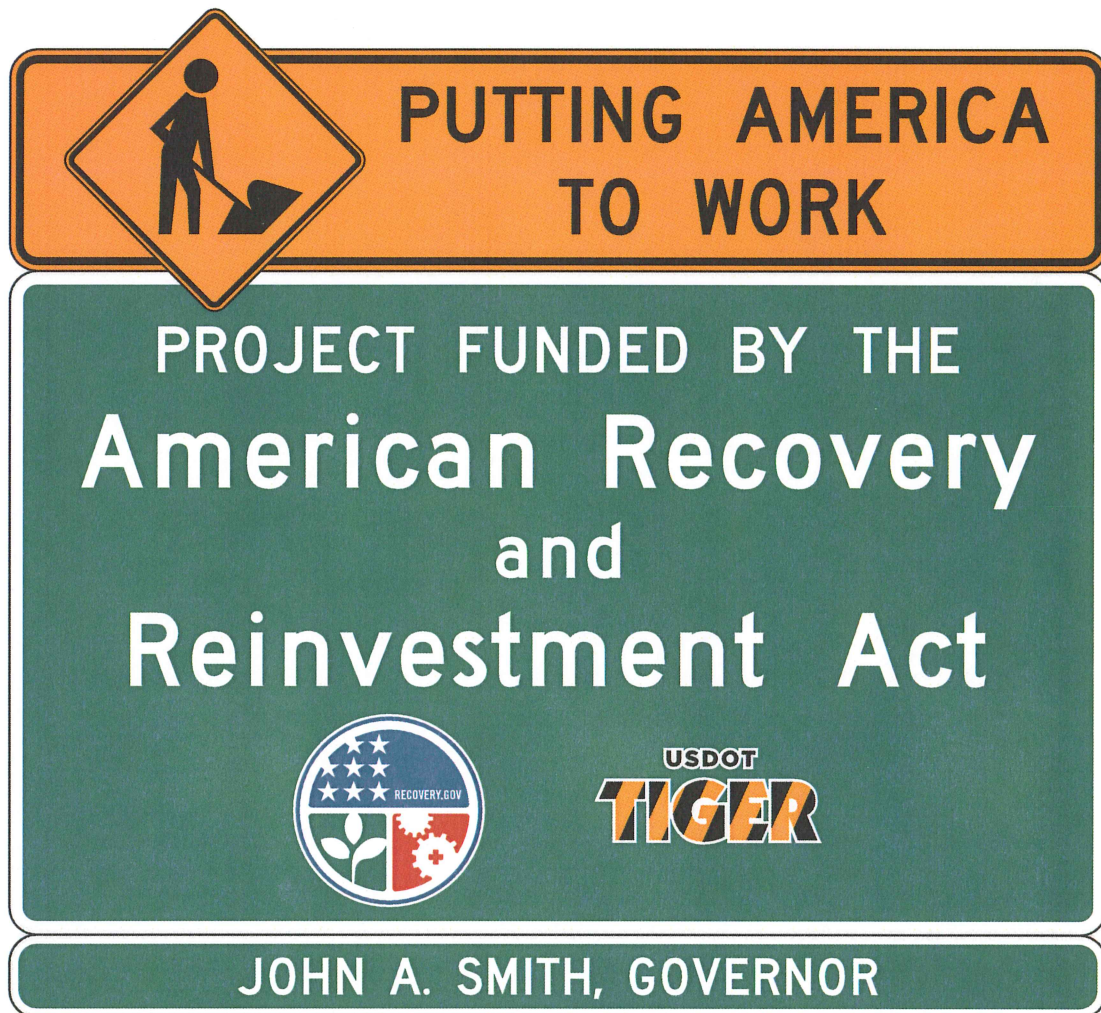

PROJECT FUNDING SOURCE
SIGN ASSEMBLY

PROJECT FUNDING SOURCE SIGN ASSEMBLY AMERICAN RECOVERY AND REINVESTMENT ACT SIGN LAYOUT DETAILS

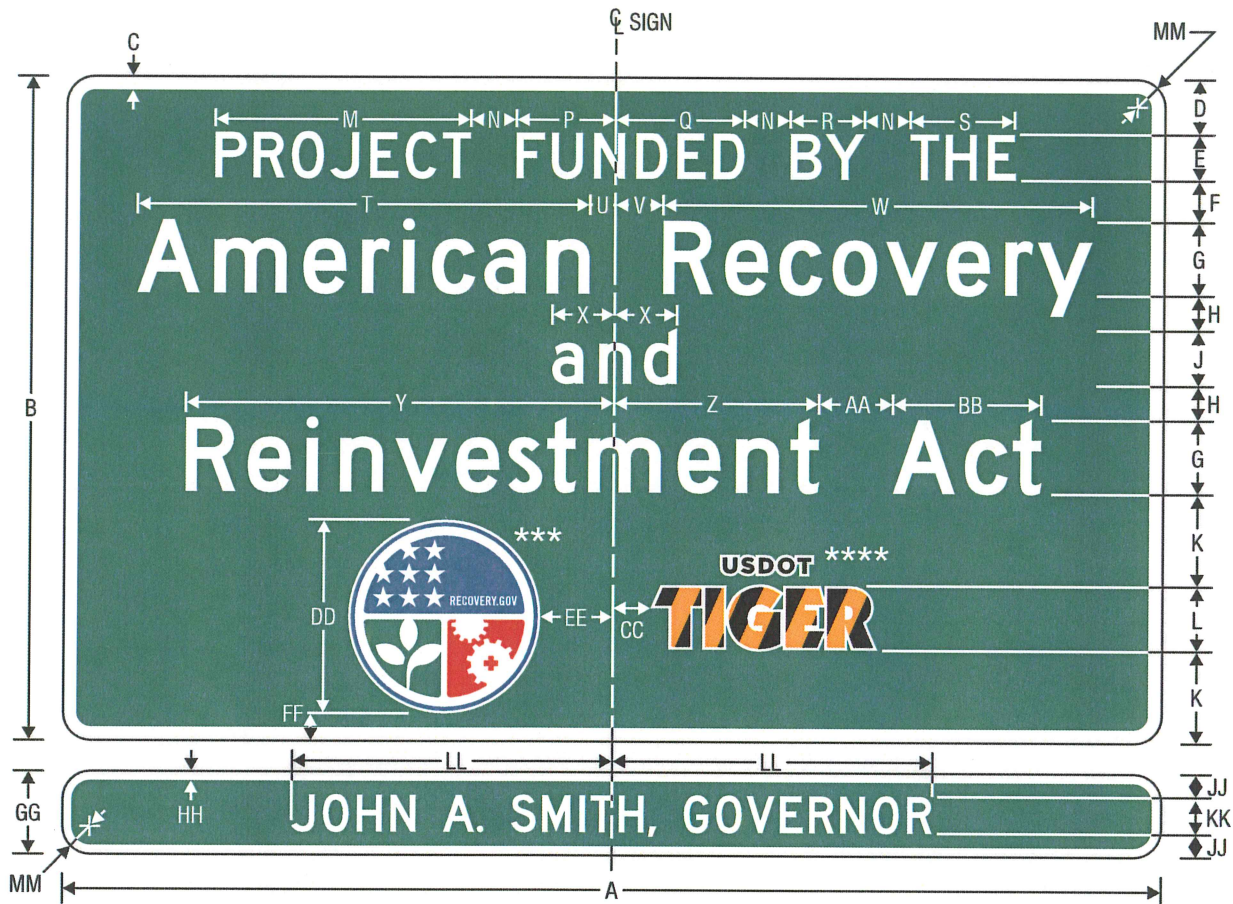

PROJECT FUNDING SOURCE SIGN AND OPTIONAL SUPPLEMENTAL PLAQUE

NOTE: SIGN SHALL NOT BE INSTALLED WITHOUT PROJECT FUNDING SOURCE PLAQUE (SEE SHEET 3).

NOTE: SEE SHEET NO. 6 FOR DETAILS OF SUPPLEMENTAL SIGN SHOWING COMMISSIONER'S NAMES.

A	B	C	D	E	F	G	H	J	K	L	M	N	P
84	54	1	5	4 C	3.5	6 C*	3	4D*(3 LC)	7.25	5	19.047	4	7.362


Q	R	S	T	U	V	W	X	Y	Z	AA	BB	CC	DD
9.484	5.162	7.763	31.722	2.415	3.585	30.552	4.542	30.911	14.737	6	10.175	3	15

EE	FF	GG	HH	JJ	KK	LL	MM
6	2.25	9	.75	2.75	3.5 C	VAR	2.25

- * Increase character spacing 50%
- ** Series C may be used for longer legends
- *** See Pictograph page 4
- **** See Pictograph page 5

COLORS: LEGEND, BORDER — WHITE (RETROREFLECTIVE)
BACKGROUND — GREEN (RETROREFLECTIVE)

PROJECT FUNDING SOURCE SIGN ASSEMBLY AMERICAN RECOVERY AND REINVESTMENT ACT SIGN LAYOUT DETAILS

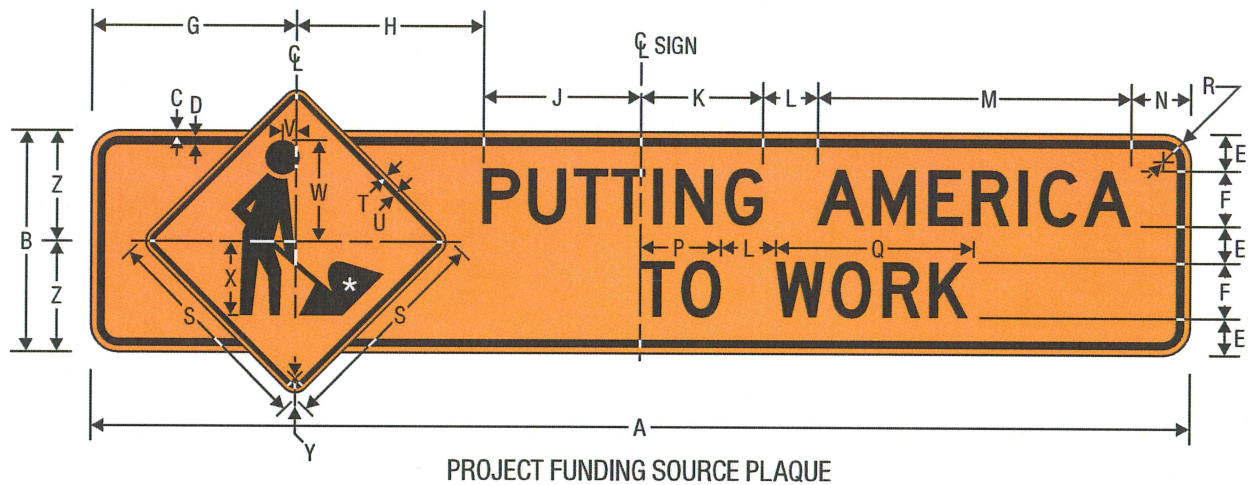

NOTE: PLAQUE SHALL NOT BE INSTALLED
WITHOUT SIGN (SEE SHEET 2).

* See *Standard Highway Signs*
Page 6-59 for symbol design.

A	B	C	D	E	F	G	H	J	K	L	M	N	P
84	18	0.375	0.625	3.5	4 D	16.607	15.686	9.707	10.667	4	22.813	5	5.843

Q	R	S	T	U	V	W	X	Y	Z
14.009	2.25	18	0.375	0.625	1	7	6	1.5	9

COLORS: LEGEND, BORDER — BLACK
BACKGROUND — ORANGE (RETROREFLECTIVE)


**PROJECT FUNDING SOURCE SIGN ASSEMBLY
AMERICAN RECOVERY AND REINVESTMENT ACT
SIGN LAYOUT DETAILS**



RECOVERY
Vector-Based, Vinyl-Ready Pictograph


COLORS: LEGEND, OUTLINE	— WHITE (RETROREFLECTIVE)
BORDER	— BLUE (RETROREFLECTIVE)
BACKGROUND (UPPER)	— BLUE (RETROREFLECTIVE)
BACKGROUND (LOWER RIGHT)	— RED (RETROREFLECTIVE)
BACKGROUND (LOWER LEFT)	— GREEN (RETROREFLECTIVE)

**PROJECT FUNDING SOURCE SIGN ASSEMBLY
AMERICAN RECOVERY AND REINVESTMENT ACT
SIGN LAYOUT DETAILS**

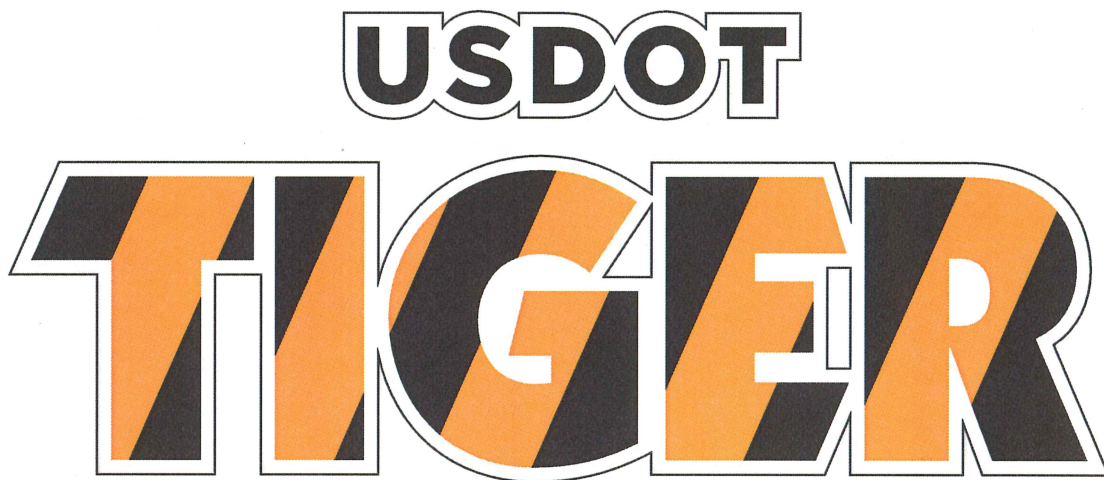

USDOT TIGER
Vector-Based, Vinyl-Ready Pictograph

COLORS: OUTLINE	— WHITE (RETROREFLECTIVE)
USDOT LEGEND	— BLACK
TIGER DIAGONALS	— BLACK, ORANGE (RETROREFLECTIVE)

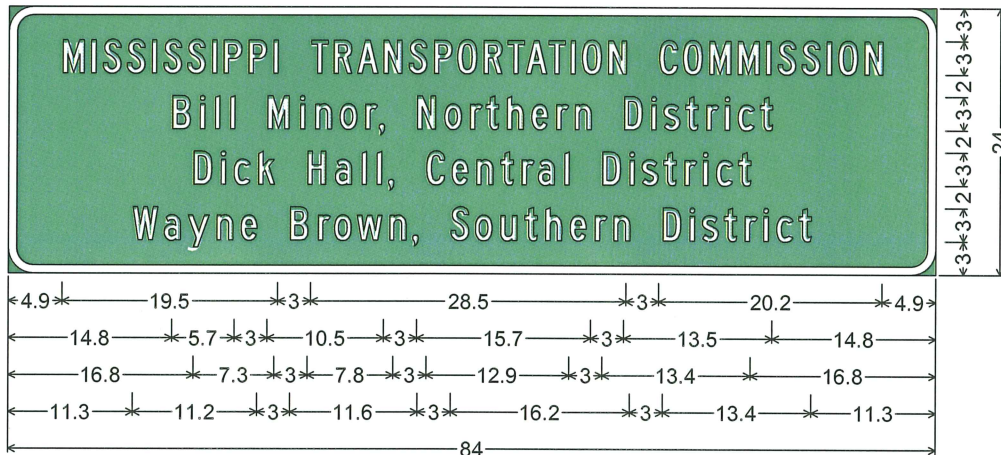

2.3" Radius, 0.8" Border, White on Green;

"MISSISSIPPI TRANSPORTATION COMMISSION" C; "Bill Minor, Northern District" C;

"Dick Hall, Central District" C; "Wayne Brown, Southern District" C;

Table of distances between letter and object lefts.

4.9	M	I	S	S	I	S	S	I	P	P	I
2.5	1.1	2.1	2.3	1.1	2.1	2.3	1.0	2.3	2.3		
	T	R	A	N	S	P	O	R	T	A	T
3.4	2.0	2.2	2.3	2.3	2.3	2.1	2.4	2.2	1.6	2.1	2.0
	C	O	M	M	I	S	S	I	O	N	
4.6	2.2	2.3	2.6	2.6	1.1	2.1	2.3	1.0	2.4	1.6	4.9
14.8	B	I	I	I	M	I	n	o	r	, N	o
2.5	1.4	1.4	3.4	2.9	1.4	2.2	2.3	1.3	3.4	2.5	2.3
	D	I	s	t	r	i	c	t			
4.4	2.5	1.1	2.0	1.9	1.7	1.2	2.0	1.1	14.8		
16.8	D	I	c	k	H	a	I	I	, C	e	n
2.4	1.2	2.2	4.5	2.5	2.4	1.4	1.0	3.5	2.2	2.3	2.2
	D	I	s	t	r	i	c	t			
3.4	2.5	1.1	1.9	1.9	1.7	1.2	2.0	1.1	16.8		
11.3	W	a	y	n	e	B	r	o	w	n	, S
2.8	2.1	2.6	2.3	4.4	2.6	1.4	2.1	3.0	2.1	3.4	2.2
	D	I	s	t	r	i	c	t			
4.5	2.5	1.1	1.9	1.9	1.7	1.2	2.0	1.1	11.3		

COLORS: LEGEND, BORDER — WHITE (RETROREFLECTIVE)
BACKGROUND — GREEN (RETROREFLECTIVE)

Section 905
Proposal (Sheet 2 - 1)

STP-0026-01(076) / 101648302 STP-0026-01(076) / 101648303
Neshoba & Newton Counties

Grade, Drain, Bridge, & Paving on SR 19 between Lauderdale County Line and SR 492, known as Federal Aid Project Nos. STP-0026-01(076) / 101648302 & STP-0026-01(076) / 101648303, in the Counties of Newton & Neshoba, State of Mississippi.

I (We) agree to complete the entire project within the specified contract time.

***** SPECIAL NOTICE TO BIDDERS *****

**BIDS WILL NOT BE CONSIDERED UNLESS BOTH UNIT PRICES AND ITEM TOTALS ARE ENTERED.
BIDS WILL NOT BE CONSIDERED UNLESS THE BID CERTIFICATION LOCATED AT THE END OF THE BID SHEETS IS SIGNED**

*****BID SCHEDULE*****

Line No.	Item Code	Adj Code	Quantity	Units	Description	Unit Price		Item Amount	
						Dollar	Ct	Dollar	Ct
Roadway Items									
0010	201-A001		1	Lump Sum	Clearing and Grubbing	XXXXXXXX	XXX		
0020	201-B001		12	Acre	Clearing and Grubbing				
0030	202-A001		1	Lump Sum	Removal of Obstructions	XXXXXXXX	XXX		
0040	202-B005		126,123	Square Yard	Removal of Asphalt Pavement, All Depths				
0050	202-B007		3	Each	Removal of Box Bridge				
0060	202-B024		1,126	Square Yard	Removal of Concrete Median & Island Pavement, All Depths				
0070	202-B038		2,017	Linear Feet	Removal of Curb, All Types				
0080	202-B064		4,829	Linear Feet	Removal of Pipe, 8" And Above				

Line No.	Item Code	Adj Code	Quantity	Units	Description	Unit Price		Bid Amount	
0090	202-B076		1,550	Linear Feet	Removal of Traffic Stripe				
0100	202-B080		346	Linear Feet	Removal of Box Culvert				
0110	202-B102		896	Linear Feet	Removal of Guard Rail				
0120	202-B105		52	Each	Removal of Pipe Headwall, All Sizes				
0130	203-A003	(E)	1,449,622	Cubic Yard	Unclassified Excavation, FM, AH				
0140	203-D002	(E)	12,150	Cubic Yard	Muck Excavation, LVM				
0150	203-EX029	(E)	78,115	Cubic Yard	Borrow Excavation, AH, FME, Class B15				
0160	203-F002	(E)	1,534	Cubic Yard	Channel Excavation, LVM				
0170	203-G004	(E)	379,082	Cubic Yard	Excess Excavation, LVM, AH				
0180	206-A001	(S)	27,423	Cubic Yard	Structure Excavation				
0190	206-B001	(E)	753	Cubic Yard	Select Material for Undercuts, Contractor Furnished, FM				
0200	209-A004		282,129	Square Yard	Geotextile Stabilization, Type V, Non-Woven				

Line No.	Item Code	Adj Code	Quantity	Units	Description	Unit Price		Bid Amount	
0210	211-B001	(E)	50,000	Cubic Yard	Topsoil for Slope Treatment, Contractor Furnished				
0220	212-A001		791,305	Square Yard	Light Ground Preparation				
0230	212-B001		1,591,171	Square Yard	Standard Ground Preparation				
0240	213-B001		206	Ton	Combination Fertilizer, 13-13-13				
0250	213-C001		164	Ton	Superphosphate				
0260	214-A001		8,175	Pounds	Seeding, Bahiagrass				
0270	214-A002		6,558	Pounds	Seeding, Bermudagrass				
0280	214-A003		3,305	Pounds	Seeding, Tall Fescue				
0290	214-A004		3,270	Pounds	Seeding, Crimson Clover				
0300	214-A005		4,113	Pounds	Seeding, Sericea Lespedeza				
0310	214-A014		3,270	Pounds	Seeding, Browntop Millet				
0320	214-A015		14,715	Pounds	Seeding, Oats				

Line No.	Item Code	Adj Code	Quantity	Units	Description	Unit Price		Bid Amount	
0330	214-A017		4,088	Pounds	Seeding, Rye Grass				
0340	215-A001		821	Ton	Vegetative Materials for Mulch				
0350	216-A001		3,924	Square Yard	Solid Sodding				
0360	217-A001		12,130	Square Yard	Ditch Liner				
0370	219-A001		78	Thousand Gallon	Watering	20.	00	1,560.	00
0380	220-A001		164	Acre	Insect Pest Control	30.	00	4,920.	00
0390	221-A001	(S)	1,416	Cubic Yard	Portland Cement Concrete Paved Ditch				
0400	223-A001		2	Acre	Mowing	40.	00	80.	00
0410	224-A001		19,216	Square Yard	Soil Reinforcing Mat				
0420	234-A001		45,746	Linear Feet	Temporary Silt Fence				
0430	235-A001		2,372	Bale	Temporary Erosion Checks				
0440	236-A004		40	Each	Silt Basin, Type D				

Section 905
Proposal (Sheet 2 - 5)

STP-0026-01(076) / 101648302 STP-0026-01(076) / 101648303
Neshoba & Newton Counties

Line No.	Item Code	Adj Code	Quantity	Units	Description	Unit Price		Bid Amount	
0450	236-B004		40	Each	Maintenance and Removal of Existing Silt Basins, Type D				
0460	239-A001		8,200	Linear Feet	Temporary Slope Drains				
0470	408-A003	(A3)	10,515	Gallon	Asphalt for Prime Coat, Cut-Back MC-70 or Emulsified EA-1				
0480	423-A001		25	Mile	Rumble Strips, Ground In				
0490	501-E001		172	Linear Feet	Expansion Joints, Without Dowels				
0500	501-K001		360	Square Yard	Transverse Grooving				
0510	502-A001	(C)	373	Square Yard	Reinforced Cement Concrete Bridge End Pavement				
0520	503-C007		500	Linear Feet	Saw Cut, Full Depth				
0530	602-A001	(S)	829,387	Pounds	Reinforcing Steel				
0540	603-CA002	(S)	2,748	Linear Feet	18" Reinforced Concrete Pipe, Class III				
0550	603-CA003	(S)	1,124	Linear Feet	24" Reinforced Concrete Pipe, Class III				
0560	603-CA004	(S)	528	Linear Feet	30" Reinforced Concrete Pipe, Class III				

Line No.	Item Code	Adj Code	Quantity	Units	Description	Unit Price		Bid Amount	
0570	603-CA005	(S)	828	Linear Feet	36" Reinforced Concrete Pipe, Class III				
0580	603-CA006	(S)	588	Linear Feet	42" Reinforced Concrete Pipe, Class III				
0590	603-CA008	(S)	488	Linear Feet	54" Reinforced Concrete Pipe, Class III				
0600	603-CA009	(S)	1,604	Linear Feet	60" Reinforced Concrete Pipe, Class III				
0610	603-CA010	(S)	268	Linear Feet	66" Reinforced Concrete Pipe, Class III				
0620	603-CA011	(S)	976	Linear Feet	72" Reinforced Concrete Pipe, Class III				
0630	603-CA014	(S)	404	Linear Feet	18" Reinforced Concrete Pipe, Class IV				
0640	603-CA016	(S)	704	Linear Feet	30" Reinforced Concrete Pipe, Class IV				
0650	603-CA018	(S)	736	Linear Feet	42" Reinforced Concrete Pipe, Class IV				
0660	603-CA019	(S)	372	Linear Feet	48" Reinforced Concrete Pipe, Class IV				
0670	603-CA021	(S)	304	Linear Feet	60" Reinforced Concrete Pipe, Class IV				
0680	603-CA023	(S)	316	Linear Feet	72" Reinforced Concrete Pipe, Class IV				

Line No.	Item Code	Adj Code	Quantity	Units	Description	Unit Price		Bid Amount	
0690	603-CB001	(S)	35	Each	18" Reinforced Concrete End Section				
0700	603-CB002	(S)	22	Each	24" Reinforced Concrete End Section				
0710	603-CB003	(S)	8	Each	30" Reinforced Concrete End Section				
0720	603-CB004	(S)	10	Each	36" Reinforced Concrete End Section				
0730	603-CB005	(S)	10	Each	42" Reinforced Concrete End Section				
0740	603-CB006	(S)	2	Each	48" Reinforced Concrete End Section				
0750	603-CB007	(S)	4	Each	54" Reinforced Concrete End Section				
0760	603-CB008	(S)	12	Each	60" Reinforced Concrete End Section				
0770	603-CB009	(S)	2	Each	66" Reinforced Concrete End Section				
0780	603-CB010	(S)	8	Each	72" Reinforced Concrete End Section				
0790	603-CE001	(S)	260	Linear Feet	22" x 13" Concrete Arch Pipe, Class A III				
0800	603-CE002	(S)	60	Linear Feet	29" x 18" Concrete Arch Pipe, Class A III				

Line No.	Item Code	Adj Code	Quantity	Units	Description	Unit Price		Bid Amount	
0810	603-CF001	(S)	2	Each	22" x 13" Concrete Arch Pipe End Section				
0820	603-CF002	(S)	2	Each	29" x 18" Concrete Arch Pipe End Section				
0830	603-SB025	(S)	1	Each	18" Branch Connections, Stub into 54" Concrete Pipe				
0840	603-SB029	(S)	1	Each	18" Branch Connections, Stub into 72" Concrete Pipe				
0850	603-SB034	(S)	2	Each	18" Branch Connections, Stub into 60" Concrete Pipe				
0860	603-SB035	(S)	3	Each	18" Branch Connections, Stub into Box Bridge				
0870	603-SB056	(S)	1	Each	24" Branch Connections, Stub into Box Bridge				
0880	604-B001		7,750	Pounds	Gratings				
0890	605-AA005	(S)	900	Square Yard	Geotextile for Subsurface Drainage, Type V, Non-Woven				
0900	605-J001	(S)	69,507	Linear Feet	Edge Drain & Edge Drain Outlet/Vent Inspection				
0910	605-W001	(GY)	95	Cubic Yard	Filter Material for Combination Storm Drain and/or Underdrains, Type A, FM				
0920	605-W002	(GY)	1,500	Cubic Yard	Filter Material for Combination Storm Drain and/or Underdrains, Type B, FM				

Line No.	Item Code	Adj Code	Quantity	Units	Description	Unit Price		Bid Amount	
0930	605-Z002		7	Each	Underdrain Appurtenances, Small Animal Guard				
0940	605-Z004		7	Each	Underdrain Appurtenances, Sign				
0950	606-B005		650	Linear Feet	Guard Rail, Class A, Type 1, 'W' Beam				
0960	606-D012		4	Each	Guard Rail, Bridge End Section, Type I				
0970	606-E001		4	Each	Guard Rail, Terminal End Section				
0980	609-D002	(S)	6,677	Linear Feet	Combination Concrete Curb and Gutter Type 2				
0990	614-A002	(S)	329	Square Yard	Concrete Driveway, Without Reinforcement, 6-inch Thickness				
1000	615-A015	(S)	80	Linear Feet	Concrete Bridge End Barrier, 32"				
1010	616-A001	(S)	2,013	Square Yard	Concrete Median and/or Island Pavement, 4-inch				
1020	616-A003	(S)	83	Square Yard	Concrete Median and/or Island Pavement, 10-inch				
1030	618-A001		1	Lump Sum	Maintenance of Traffic	XXXXXXXX	XXX		
1040	619-A1002		12	Mile	Temporary Traffic Stripe, Continuous White				

Line No.	Item Code	Adj Code	Quantity	Units	Description	Unit Price		Bid Amount	
1050	619-A2002		7	Mile	Temporary Traffic Stripe, Continuous Yellow				
1060	619-A3006		1	Mile	Temporary Traffic Stripe, Skip White				
1070	619-A4006		4	Mile	Temporary Traffic Stripe, Skip Yellow				
1080	619-A5001		9,703	Linear Feet	Temporary Traffic Stripe, Detail				
1090	619-A6001		1,356	Linear Feet	Temporary Traffic Stripe, Legend				
1100	619-C6001		7	Each	Red-Clear Reflective High Performance Raised Marker				
1110	619-C7001		697	Each	Two-Way Yellow Reflective High Performance Raised Marker				
1120	619-D1001		176	Square Feet	Standard Roadside Construction Signs, Less than 10 Square Feet				
1130	619-D2001		3,372	Square Feet	Standard Roadside Construction Signs, 10 Square Feet or More				
1140	619-D4001 Changed 03/16/2009		116	Square Feet	Directional Signs				
1150	619-F3004		4	Each	Delineators, Guard Rail, White				
1160	619-G4005		2,688	Linear Feet	Barricades, Type III, Double Faced				

Line No.	Item Code	Adj Code	Quantity	Units	Description	Unit Price		Bid Amount	
1170	619-G5001		526	Each	Free Standing Plastic Drums				
1180	619-K2001		2	Each	Installation and Removal of Guard Rail, Bridge End Section				
1190	619-K4001		2	Each	Installation and Removal of Guardrail, Terminal End Section				
1200	620-A001		1	Lump Sum	Mobilization	XXXXXXXX	XXX		
1210	621-A001		1	Each	Field Laboratory				
1220	627-K001		2,232	Each	Red-Clear Reflective High Performance Raised Markers				
1230	627-L001		236	Each	Two-Way Yellow Reflective High Performance Raised Markers				
1240	628-I002		520	Linear Feet	6" High Performance Cold Plastic Traffic Stripe, Skip White				
1250	628-J002		520	Linear Feet	6" High Performance Cold Plastic Traffic Stripe, Continuous White				
1260	628-M002		520	Linear Feet	6" High Performance Cold Plastic Traffic Stripe, Continuous Yellow				
1270	630-A001		246	Square Feet	Standard Roadside Signs, Sheet Aluminum, 0.080" Thickness				
1280	630-A002		1,662	Square Feet	Standard Roadside Signs, Sheet Aluminum, 0.125" Thickness				

Line No.	Item Code	Adj Code	Quantity	Units	Description	Unit Price		Bid Amount	
1290	630-B001		31	Square Feet	Interstate Directional Signs, Bolted Extruded Aluminum Panels, Ground Mounted				
1300	630-C002		75	Linear Feet	Steel U-Section Posts, 2.0 to 2.5 lb/ft				
1310	630-C004		1,961	Linear Feet	Steel U-Section Posts, 3.0 to 3.5 lb/ft				
1320	630-D003		64	Linear Feet	Structural Steel Beams, W6 x 9				
1330	630-E001		74	Pounds	Structural Steel Angles & Bars, 3" x 3" x 1/4" Angles				
1340	630-E004		1,056	Pounds	Structural Steel Angles & Bars, 7/16" x 2 1/2" Flat Bar				
1350	630-F001		12	Each	Delineators, Guard Rail, White				
1360	630-F002		12	Each	Delineators, Guard Rail, Yellow				
1370	630-F003		46	Each	Delineators, Flexible Post Mounted, Crossover, Type I, Green				
1380	630-F004		46	Each	Delineators, Flexible Post Mounted, Crossover, Type I, Yellow				
1390	630-K001		124	Linear Feet	Welded & Seamless Steel Pipe Posts, 3"				
1400	630-K003		380	Linear Feet	Welded & Seamless Steel Pipe Posts, 4"				

Line No.	Item Code	Adj Code	Quantity	Units	Description	Unit Price		Bid Amount	
1410	630-K004		185	Linear Feet	Welded & Seamless Steel Pipe Posts, 5"				
1420	631-A001		73	Cubic Yard	Flowable Fill				
1430	690-A001		6,081	Pounds	Grouting Abandoned Water Wells				
1440	699-A001		1	Lump Sum	Roadway Construction Stakes	XXXXXXXXX	XXX		
1450	815-A009	(S)	5,040	Ton	Loose Riprap, Size 300				
1460	815-F002	(S)	370	Ton	Sediment Control Stone				
1470	907-213-A001		981	Ton	Agricultural Limestone				
1480	907-304-C001	(GY)	52,672	Cubic Yard	Granular Material, AEA, Class 5, Group C				
1490	907-304-C005	(GY)	68,084	Cubic Yard	Granular Material, AEA, Class 9, Group C				
1500	907-306-A001	(DA6)	297,821	Square Yard	Asphalt Drainage Course				
1510	907-307-C003	(M)	141,064	Square Yard	6" Soil-Lime-Water Mixing, Class C				
1520	907-307-D001		1,904	Ton	Lime				

Line No.	Item Code	Adj Code	Quantity	Units	Description	Unit Price		Bid Amount	
1530	907-403-A006	(BA1)	5,307	Ton	Hot Mix Asphalt, MT, 12.5-mm mixture				
1540	907-403-A007	(BA1)	17,649	Ton	Hot Mix Asphalt, MT, 19-mm mixture				
1550	907-403-A010	(BA1)	4,854	Ton	Hot Mix Asphalt, MT, 9.5-mm mixture				
1560	907-403-F001	(BA1)	114,350	Ton	Maintained Hot Mix Asphalt				
1570	907-601-B001	(S)	59	Cubic Yard	Class "B" Structural Concrete, Minor Structures, Per Plans				
1580	907-603-ALT01	(S)	5,864	Linear Feet	18" Type A Alternate Pipe				
1590	907-603-ALT02	(S)	220	Linear Feet	24" Type A Alternate Pipe				
1600	907-603-ALT04	(S)	64	Linear Feet	36" Type A Alternate Pipe				
1610	907-603-ALT08	(S)	100	Linear Feet	18" Type B Alternate Pipe				
1620	907-603-ALT11	(S)	84	Linear Feet	36" Type B Alternate Pipe				
1630	907-605-H001	(S)	139,013	Linear Feet	Edge Drain				
1640	907-605-I001	(S)	12,747	Linear Feet	Edge Drain Outlets/Vents				

Line No.	Item Code	Adj Code	Quantity	Units	Description	Unit Price		Bid Amount	
1650	907-605-O001	(S)	1,250	Linear Feet	6" Perforated Sewer Pipe for Underdrains, SDR 23.5				
1660	907-605-P001	(S)	150	Linear Feet	6" Non-perforated Sewer Pipe for Underdrains, SDR 23.5				
1670	907-626-A003		15	Mile	6" Thermoplastic Traffic Stripe, Skip White				
1680	907-626-C004		17	Mile	6" Thermoplastic Edge Stripe, Continuous White				
1690	907-626-D004		1,528	Linear Feet	6" Thermoplastic Traffic Stripe, Skip Yellow				
1700	907-626-E004		4	Mile	6" Thermoplastic Traffic Stripe, Continuous Yellow				
1710	907-626-F004		13	Mile	6" Thermoplastic Edge Stripe, Continuous Yellow				
1720	907-626-G004		26,681	Linear Feet	Thermoplastic Detail Stripe, White				
1730	907-626-G005		23,318	Linear Feet	Thermoplastic Detail Stripe, Yellow				
1740	907-626-H004		5,810	Linear Feet	Thermoplastic Legend, White				
1750	907-626-H005		36	Square Feet	Thermoplastic Legend, White				
1760	907-804-B001	(S)	4,459	Cubic Yard	Box Bridge Concrete, Class B				
ALTERNATE GROUP AA NUMBER 1									

Line No.	Item Code	Adj Code	Quantity	Units	Description	Unit Price		Bid Amount	
1770	907-308-A001		4,306	Ton	Portland Cement				
1780	907-308-B002	(M)	406,483	Square Yard	Soil-Cement-Water Mixing, Optional Mixers, Design Soil				
ALTERNATE GROUP AA NUMBER 2									
1790	907-311-A003	(M)	406,483	Square Yard	Processing Lime and Fly Ash Treated Course, 6" Thick				
1800	907-311-B001		3,012	Ton	Lime				
1810	907-311-C002		12,046	Ton	Fly Ash, Class C or F				
Bridge Items									
1820	501-K001		1,920	Square Yard	Transverse Grooving				
1830	803-A001	(S)	6	Each	Test Pile				
1840	803-B001	(S)	6	Each	Conventional Static Loading Test	5,000.	00	30,000.	00
1850	803-C002	(S)	1,610	Linear Feet	14" x 14" Prestressed Concrete Piling				
1860	803-C003	(S)	1,530	Linear Feet	16" x 16" Prestressed Concrete Piling				
1870	803-D003	(S)	1,100	Linear Feet	HP 14 x 73 Steel Piling				

Section 905
Proposal (Sheet 2 - 17)

STP-0026-01(076) / 101648302 STP-0026-01(076) / 101648303
Neshoba & Newton Counties

Line No.	Item Code	Adj Code	Quantity	Units	Description	Unit Price		Bid Amount	
1880	803-J001	(S)	4	Each	Pile Restrike				
1890	805-A001	(S)	121,898	Pounds	Reinforcement				
1900	813-A001	(S)	966	Linear Feet	Concrete Railing				
1910	815-A009	(S)	392	Ton	Loose Riprap, Size 300				
1920	815-E001	(S)	179	Square Yard	Geotextile under Riprap				
1930	907-804-A001	(S)	790	Cubic Yard	Bridge Concrete, Class AA				
1940	907-804-C016	(S)	2,862	Linear Feet	40' Prestressed Concrete Beam, Type I+2				

*** BID CERTIFICATION ***

TOTAL BID.....\$_____

*** DBE/WBE SECTION ***

Complete item nos. 1, 2, and/or 3 as appropriate. See Notice to Bidders addressing Disadvantaged Business Enterprises in Highway Construction.

- 1. I/We agree that no less than _____ percent shall be expended with small business concerns owned and controlled by socially and economically disadvantaged individuals (DBE and WBE).
- 2. Classification of Bidder: Small Business (DBE)_____ Small Business (WBE)_____
- 3. A joint venture with a Small Business (DBE/WBE): _____

*** SIGNATURE STATEMENT ***

BIDDER ACKNOWLEDGES THAT HE/SHE HAS CHECKED ALL ITEMS IN THIS PROPOSAL FOR ACCURACY AND CERTIFIED THAT THE FIGURES SHOWN THEREIN CONSTITUTE THEIR OFFICIAL BID.

BIDDER'S SIGNATURE

BIDDER'S COMPANY

BIDDER'S FEDERAL TAX ID NUMBER