

SECTION 905 -- PROPOSAL (CONTINUED)

I (We) further propose to execute the attached contract agreement (Section 902) as soon as the work is awarded to me (us), and to begin and complete the work within the time limit(s) provided for in the Specifications and Advertisement. I (We) also propose to execute the attached contract bond (Section 903) in an amount not less than one hundred (100) percent of the total of my (our) part, but also to guarantee the excellence of both workmanship and materials until the work is finally accepted.

I (We) enclose a certified check, cashier's check or bid bond for **five percent (5%) of total bid** and hereby agree that in case of my (our) failure to execute the contract and furnish bond within Ten (10) days after notice of award, the amount of this check (bid bond) will be forfeited to the State of Mississippi as liquidated damages arising out of my (our) failure to execute the contract as proposed. It is understood that in case I am (we are) not awarded the work, the check will be returned as provided in the Specifications.

Bidder acknowledges receipt of and has added to and made a part of the proposal and contract documents the following addendum (addenda):

ADDENDUM NO. 1 DATED 3/16/2009 ADDENDUM NO. DATED
 ADDENDUM NO. DATED ADDENDUM NO. DATED

Number	Description
1	Revised Table of Contents; Revised Notice to Bidders #2355; Added Notice to Bidders #2438; Added Notice to Bidders #2439; Revised Bid Sheets; Revised Plan Sheets Nos. 2, 5, 18, 28 & 466; Amendment EBS Download Required.

TOTAL ADDENDA: 1
 (Must agree with total addenda issued prior to opening of bids)

Respectfully Submitted,

DATE _____

 Contractor

BY _____
 Signature

TITLE _____

ADDRESS _____

CITY, STATE, ZIP _____

PHONE _____

FAX _____

E-MAIL _____

(To be filled in if a corporation)

Our corporation is chartered under the Laws of the State of _____ and the names, titles and business addresses of the executives are as follows:

_____ President	_____ Address
_____ Secretary	_____ Address
_____ Treasurer	_____ Address

The following is my (our) itemized proposal.

Revised 09/21/2005

NH-0002-04(032) / 102087301

Lowndes County(ies)

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

TABLE OF CONTENTS

PROJECT: NH-0002-04(032) / 102087301 – Lowndes County

901--Advertisement

904--Notice to Bidders: Governing Specs. - # 1
Procedure for converting from TLTW to Divided 4-Lane - #5
Fiber Reinforced Concrete - #640
Disadvantage Business Enterprise, W/Supplement - # 696
On-The-Job Training Program - # 777
Payroll Requirements - # 883
Rumble Stripe - #1312
Use of Precast Drainage Units - #1321
Errata & Modifications to 2004 Standard Specifications - #1405
Railway-Highway Provision, W/Supplement - #1727
Safety Apparel - #1808
Minimum Wage Rate - #1869
DBE Forms, Participation and Payment - #1918
Non-Quality Control/Quality Assurance Concrete - #1922
Federal Bridge Formula - #1928
Department of Labor Ruling - #2239
Contract Time - #2339
Specialty Items - #2340
Petroleum Products Base Price - #2345
Storm Water Discharge Associated W/Construction Activities
(\geq 5 Acres) - #2348
Placement of Fill Material - #2355
Mississippi Resident Agent Requirement - #2361
Severe High Sulfate Areas Below Ground Level - #2366
Status of ROW, W/Attachments - #2382
Removal of Haul Permit - # 2400
Special Reporting Criteria - #2420
American Recovery and Reinvestment Act (ARRA) - #2438
Bridge Rail Requirements - #2439

906: Required Federal Contract Provisions -- FHWA-1273, W/Supplement

907-104-1: Partnering Process

907-105-3: Cooperation By Contractors, W/Supplement

907-107-1: Liability Insurance, W/Supplement

907-107-3: Contractor's Protection Plan

907-107-6: Legal Relations & Responsibility to Public, W/Supplement

CONTINUED ON NEXT PAGE

PAGE 2 PROJECT: NH-0002-04(032) / 102087301 – Lowndes County

- 907-108-15: Cessation of Contract Time
- 907-108-17: Prosecution and Progress
- 907-109-3: Partial Payment, W/Supplement
- 907-213-2: Agricultural Limestone
- 907-304-9: Crushed Aggregate Courses
- 907-306-1: Asphalt Drainage Course W/Supplement
- 907-307-3: Lime Treated Courses
- 907-308-3: Cement Treated Courses
- 907-401-2: Hot Mix Asphalt (HMA), W/Supplement
- 907-403-4: Hot Mix Asphalt (HMA), W/Supplement
- 907-407-1: Tack Coat
- 907-601-1: Structural Concrete
- 907-603-8: Culverts & Storm Drains
- 907-605-3: Underdrains
- 907-617-2: Right-Of-Way Markers
- 907-618-4: Placement of Temporary Traffic Stripe
- 907-626-15: Thermoplastic Traffic Markings
- 907-701-3: Hydraulic Cement, W/Supplement
- 907-703-6: Aggregate for Crushed Courses
- 907-708-5: Non-Metal Drainage Structures
- 907-709-1: Metal Pipe
- 907-711-3: Synthetic Structural Fiber Reinforcement
- 907-713-1: Admixtures for Concrete
- 907-714-5: Miscellaneous Materials, W/Supplement
- 907-715-3: Roadside Development Materials
- 907-720-1: Pavement Marking Materials
- 907-803-2: Maturity Meters in Drilled Shafts
- 907-804-8: Concrete Bridges and Structures, W/Supplement

- 906-3: MDOT On-the-Job Training Program
- 906-6: MDOT On-the-Job Training Program - Alternate Program

SECTION 905 - PROPOSAL,
PROPOSAL SHEET NOS. 2-1 THRU 2-16,
COMBINATION BID PROPOSAL,
CERTIFICATE OF PERFORMANCE - PRIOR FEDERAL-AID CONTRACTS,
CERTIFICATION REGARDING NON-COLLUSION, DEBARMENT AND SUSPENSION,
SECTION 902 - CONTRACT FORM, AND SECTION 903 - CONTRACT BOND FORM,
PILE DRIVING FORM
OCR-485

(REVISIONS TO THE ABOVE WILL BE INDICATED ON THE SECOND SHEET
OF SECTION 905 AS ADDENDA)

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 - NOTICE TO BIDDERS NO. 2355

CODE (SP)

DATE: January 22, 2009

SUBJECT: Placement of Fill Material in Federally Regulated Areas

PROJECT: NH-0002-02(032) / 102087301 – Lowndes County

A Permit (404, General, Nationwide, etc.) for placing fill material federally regulated sites is required.

The Department has acquired the following permits for permanently filling at regulated sites that are identified during project development:

Nationwide Permit No. 14 (Waters of the U. S.) - - All sites with area of less than 0.10 acres.

General Permit No. MSGHW02-03051-P (Wetlands and Waters of the U.S.)- - - - -

- - - Site Nos. 1, 1A, 2, 3, 4, 5

Copies of said permit(s) are on file with the Department.

Securing a permit(s) for the filling of any other regulated site, the purpose of which is temporary construction for the convenience of the Contractor, shall be the responsibility of the Contractor.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 - NOTICE TO BIDDERS NO. 2438


CODE: (SP)

DATE: 03/16/2009

SUBJECT: American Recovery and Reinvestment Act (ARRA) Sign


Bidders are hereby advised that the Contractor shall install, maintain, and remove two (2) economic recovery signs at the beginning (BOP) and end (EOP) of this project, unless otherwise directed by the Engineer. A picture of the signs and the dimensions of the signs are shown on the attached sheets. The signs shall be constructed, installed and maintained in accordance with the MUTCD, and Sections 618 & 619 of the Standard Specifications. These signs shall be fabricated from 0.125" sheet aluminum. Signs shall be mounted on three (3) - three pounds per linear foot (3 lbs. / ft.) U-Section posts. Each post shall be 14 feet long mounted onto another 14-foot U-Section post driven halfway into the ground. All cost of installing and maintaining the signs, including material, labor, posts, hardware, etc., will be measured and paid for under the pay item no. 619-D4.

**PROJECT FUNDING SOURCE SIGN ASSEMBLY
AMERICAN RECOVERY AND REINVESTMENT ACT
SIGN LAYOUT DETAILS**

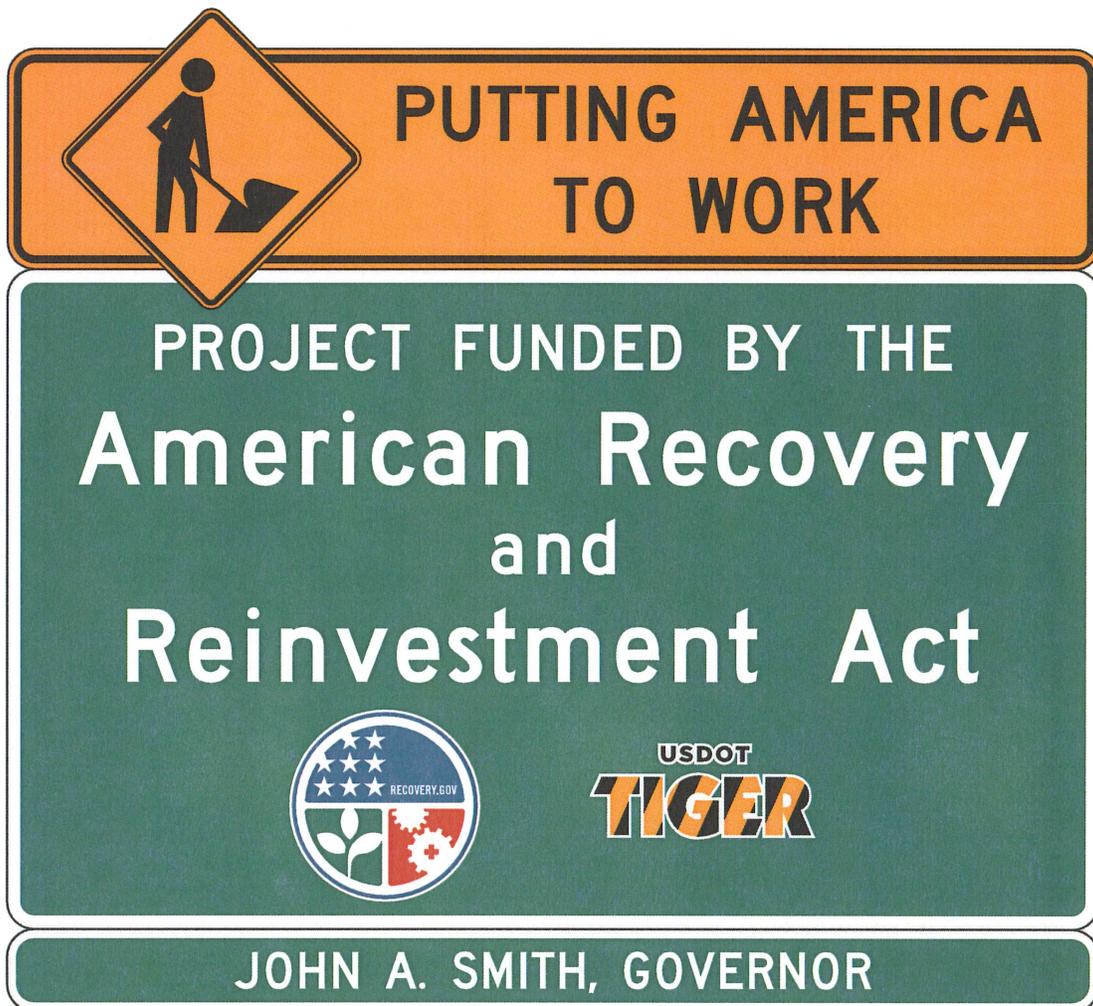

PROJECT FUNDING SOURCE
SIGN ASSEMBLY

PROJECT FUNDING SOURCE SIGN ASSEMBLY AMERICAN RECOVERY AND REINVESTMENT ACT SIGN LAYOUT DETAILS

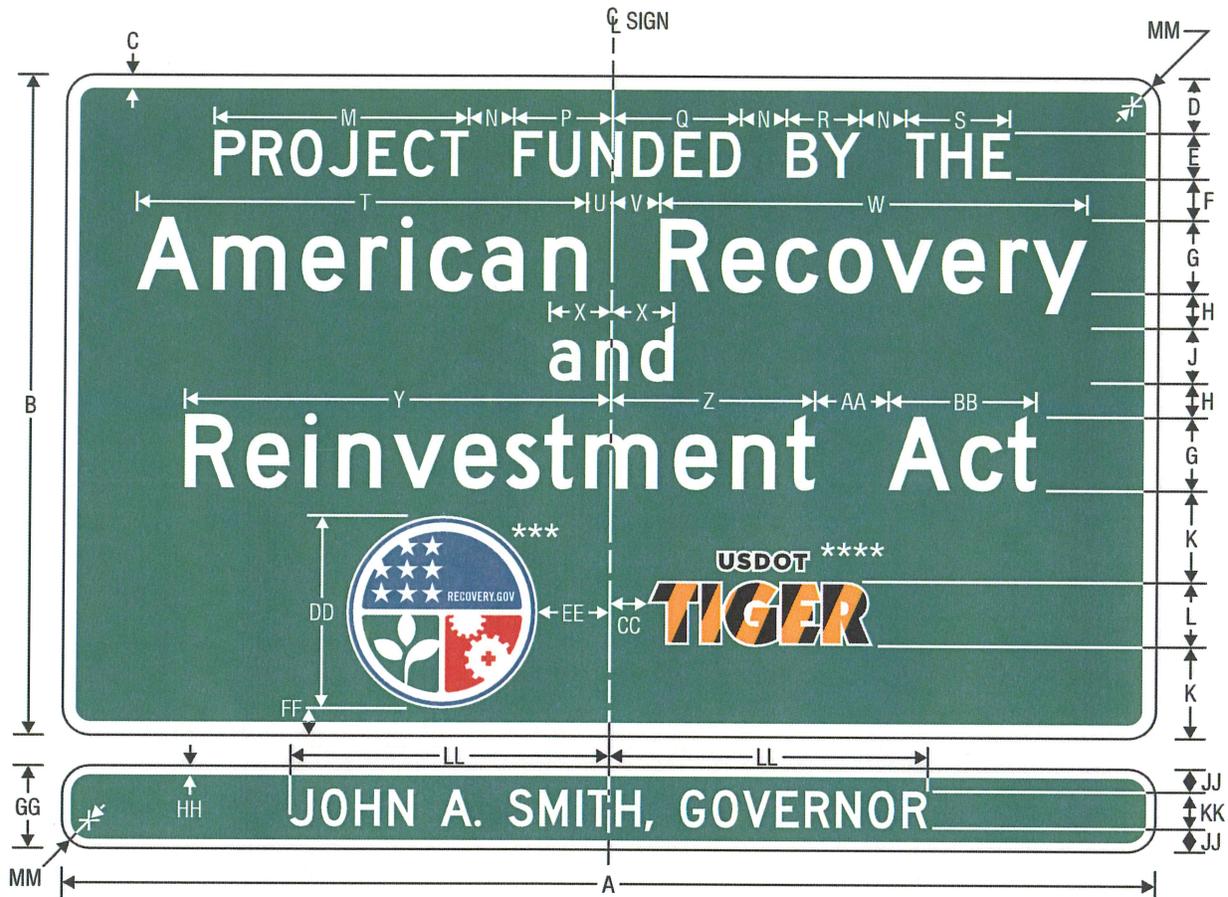

PROJECT FUNDING SOURCE SIGN AND OPTIONAL SUPPLEMENTAL PLAQUE

NOTE: SIGN SHALL NOT BE INSTALLED WITHOUT PROJECT FUNDING SOURCE PLAQUE (SEE SHEET 3).

NOTE: SEE SHEET NO. 6 FOR DETAILS OF SUPPLEMENTAL SIGN SHOWING COMMISSIONER'S NAMES.

A	B	C	D	E	F	G	H	J	K	L	M	N	P
84	54	1	5	4 C	3.5	6 C*	3	4D* (β LQ)	7.25	5	19.047	4	7.362


Q	R	S	T	U	V	W	X	Y	Z	AA	BB	CC	DD
9.484	5.162	7.763	31.722	2.415	3.585	30.552	4.542	30.911	14.737	6	10.175	3	15

EE	FF	GG	HH	JJ	KK	LL	MM
6	2.25	9	.75	2.75	3.5 C	VAR	2.25

- * Increase character spacing 50%
- ** Series C may be used for longer legends
- *** See Pictograph page 4
- **** See Pictograph page 5

COLORS: LEGEND, BORDER — WHITE (RETROREFLECTIVE)
BACKGROUND — GREEN (RETROREFLECTIVE)

PROJECT FUNDING SOURCE SIGN ASSEMBLY AMERICAN RECOVERY AND REINVESTMENT ACT SIGN LAYOUT DETAILS

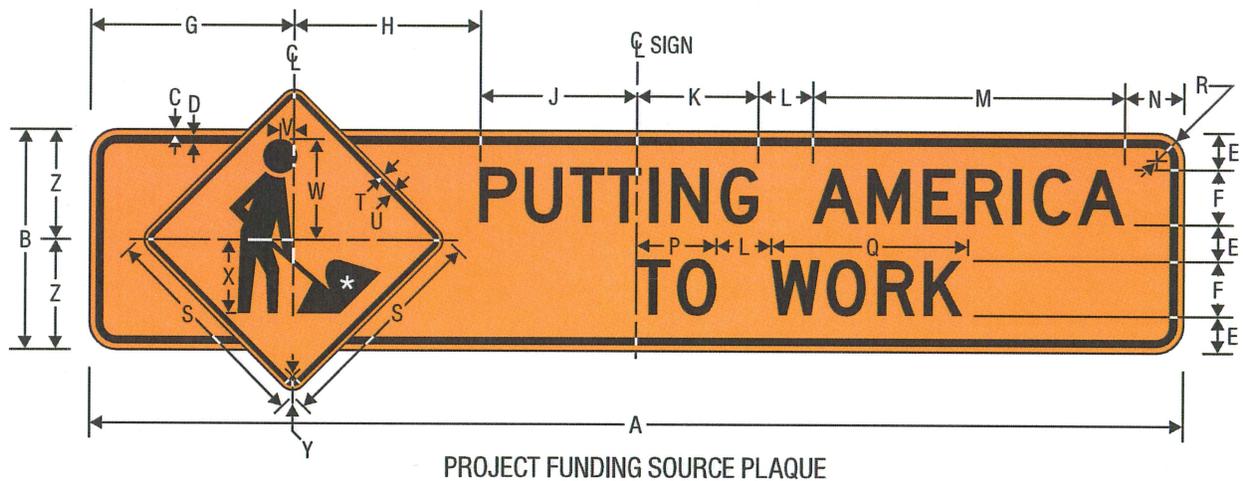

NOTE: PLAQUE SHALL NOT BE INSTALLED WITHOUT SIGN (SEE SHEET 2).

* See *Standard Highway Signs* Page 6-59 for symbol design.

A	B	C	D	E	F	G	H	J	K	L	M	N	P
84	18	0.375	0.625	3.5	4 D	16.607	15.686	9.707	10.667	4	22.813	5	5.843

Q	R	S	T	U	V	W	X	Y	Z
14.009	2.25	18	0.375	0.625	1	7	6	1.5	9

COLORS: LEGEND, BORDER — BLACK
BACKGROUND — ORANGE (RETROREFLECTIVE)

PROJECT FUNDING SOURCE SIGN ASSEMBLY AMERICAN RECOVERY AND REINVESTMENT ACT SIGN LAYOUT DETAILS



RECOVERY
Vector-Based, Vinyl-Ready Pictograph


- | | |
|--------------------------|---------------------------|
| COLORS: LEGEND, OUTLINE | — WHITE (RETROREFLECTIVE) |
| BORDER | — BLUE (RETROREFLECTIVE) |
| BACKGROUND (UPPER) | — BLUE (RETROREFLECTIVE) |
| BACKGROUND (LOWER RIGHT) | — RED (RETROREFLECTIVE) |
| BACKGROUND (LOWER LEFT) | — GREEN (RETROREFLECTIVE) |

**PROJECT FUNDING SOURCE SIGN ASSEMBLY
AMERICAN RECOVERY AND REINVESTMENT ACT
SIGN LAYOUT DETAILS**



USDOT TIGER
Vector-Based, Vinyl-Ready Pictograph

COLORS: OUTLINE — WHITE (RETROREFLECTIVE)
USDOT LEGEND — BLACK
TIGER DIAGONALS — BLACK,
ORANGE (RETROREFLECTIVE)

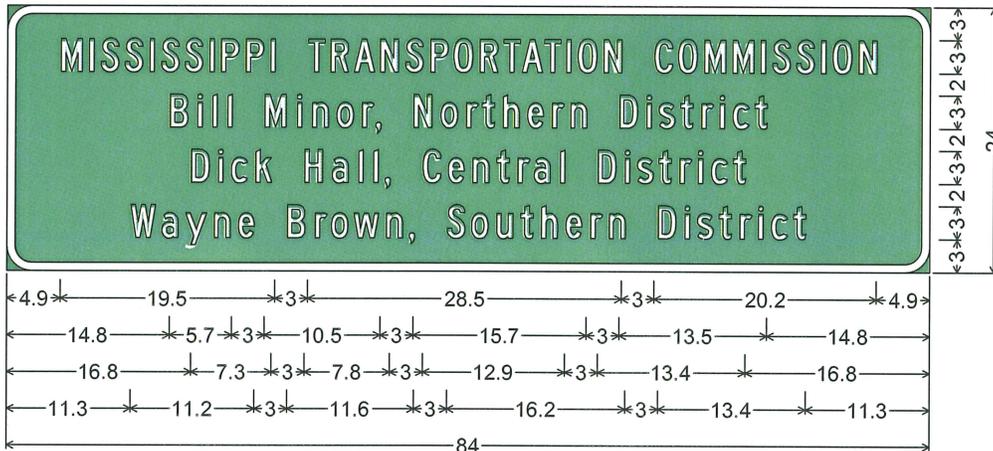

2.3" Radius, 0.8" Border, White on Green;

"MISSISSIPPI TRANSPORTATION COMMISSION" C; "Bill Minor, Northern District" C;

"Dick Hall, Central District" C; "Wayne Brown, Southern District" C;

Table of distances between letter and object lefts.

4.9	M	I	S	S	I	S	S	I	P	P	I								
2.5	1.1	2.1	2.3	1.1	2.1	2.3	1.0	2.3	2.3										
	T	R	A	N	S	P	O	R	T	A	T	I	O	N					
3.4	2.0	2.2	2.3	2.3	2.3	2.1	2.4	2.2	1.6	2.1	2.0	1.0	2.4						
4.6	C	O	M	M	I	S	S	I	O	N									
2.2	2.3	2.6	2.6	1.1	2.1	2.3	1.0	2.4	1.6	4.9									
14.8	B	I	L	L	M	I	N	O	R	,	N	O	R	T	H	E	R	N	
2.5	1.4	1.4	3.4	2.9	1.4	2.2	2.3	1.3	3.4	2.5	2.3	1.4	1.9	2.2	2.3	1.7			
4.4	D	I	S	T	R	I	C	T											
2.5	1.1	2.0	1.9	1.7	1.2	2.0	1.1	14.8											
16.8	D	I	C	K	H	A	L	L	,	C	E	N	T	R	A	I			
2.4	1.2	2.2	4.5	2.5	2.4	1.4	1.0	3.5	2.2	2.3	2.2	1.9	1.5	2.4					
3.4	2.5	1.1	1.9	1.9	1.7	1.2	2.0	1.1	16.8										
11.3	W	A	Y	N	E	B	R	O	W	N	,	S	O	U	T	H	E	R	N
2.8	2.1	2.6	2.3	4.4	2.6	1.4	2.1	3.0	2.1	3.4	2.2	2.3	2.1	2.0	2.2	2.2	1.7		
4.5	D	I	S	T	R	I	C	T											
2.5	1.1	1.9	1.9	1.7	1.2	2.0	1.1	11.3											

COLORS: LEGEND, BORDER — WHITE (RETROREFLECTIVE)
 BACKGROUND — GREEN (RETROREFLECTIVE)

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 - NOTICE TO BIDDERS NO. 2439

CODE: (SP)

DATE: March 16, 2009

SUBJECT: Bridge Rail Requirements

PROJECT: NH-0002-04(032) / 102087301 -- LOWNDES COUNTY

Bidders are hereby advised that the transition of bridge rail to guardrail shall be as indicated on **Sheet Number 100.07 Working Number BE-1A** and **Sheet Number 100.08 Working Number BEPR-1**. Any plan sheets that indicate otherwise will be disregarded.

Four lane grade, drain, bridge and pavement upgrade on US 45 from 4 miles south of US 82 to US 82, known as Federal Aid Project No. NH-0002-04(032) / 102087301, in the County of Lowndes, State of Mississippi.

I (We) agree to complete the entire project within the specified contract time.

***** SPECIAL NOTICE TO BIDDERS *****

**BIDS WILL NOT BE CONSIDERED UNLESS BOTH UNIT PRICES AND ITEM TOTALS ARE ENTERED.
 BIDS WILL NOT BE CONSIDERED UNLESS THE BID CERTIFICATION LOCATED AT THE END OF THE BID SHEETS IS SIGNED**

*****BID SCHEDULE*****

Line No.	Item Code	Adj Code	Quantity	Units	Description	Unit Price		Item Amount	
						Dollar	Ct	Dollar	Ct
Roadway Items									
0010	201-A001		1	Lump Sum	Clearing and Grubbing	XXXXXXXX	XXX		
0020	201-B001		1	Acre	Clearing and Grubbing				
0030	202-B005		8,788	Square Yard	Removal of Asphalt Pavement, All Depths				
0040	202-B008		3	Each	Removal of Box Culvert				
0050	202-B009		1	Each	Removal of Bridge				
0060	202-B024		150	Square Yard	Removal of Concrete Median & Island Pavement, All Depths				
0070	202-B064		1,252	Linear Feet	Removal of Pipe, 8" And Above				
0080	202-B076		1,000	Linear Feet	Removal of Traffic Stripe				

Line No.	Item Code	Adj Code	Quantity	Units	Description	Unit Price		Bid Amount	
0090	202-B079		2	Each	Removal of Headwall				
0100	202-B093		981	Linear Feet	Removal of Curb & Gutter, All Types				
0110	202-B097		30,111	Square Yard	Removal of Concrete Overlaid w/ Asphalt Pavement, All Depths				
0120	202-B102		250	Linear Feet	Removal of Guard Rail				
0130	203-A003	(E)	228,492	Cubic Yard	Unclassified Excavation, FM, AH				
0140	203-EX017	(E)	145,365	Cubic Yard	Borrow Excavation, AH, FME, Class B9				
0150	203-EX019	(E)	822,865	Cubic Yard	Borrow Excavation, AH, FME, Class B10				
0160	206-A001	(S)	2,836	Cubic Yard	Structure Excavation				
0170	206-B001	(E)	53	Cubic Yard	Select Material for Undercuts, Contractor Furnished, FM				
0180	212-A001		242,500	Square Yard	Light Ground Preparation				
0190	212-B001		485,000	Square Yard	Standard Ground Preparation				
0200	213-B001		63	Ton	Combination Fertilizer, 13-13-13				

Line No.	Item Code	Adj Code	Quantity	Units	Description	Unit Price		Bid Amount	
0210	213-C001		50	Ton	Superphosphate				
0220	214-A001		2,505	Pounds	Seeding, Bahiagrass				
0230	214-A002		2,004	Pounds	Seeding, Bermudagrass				
0240	214-A003		2,505	Pounds	Seeding, Tall Fescue				
0250	214-A004		1,002	Pounds	Seeding, Crimson Clover				
0260	214-A014		1,002	Pounds	Seeding, Browntop Millet				
0270	214-A015		4,509	Pounds	Seeding, Oats				
0280	214-A017		1,253	Pounds	Seeding, Rye Grass				
0290	215-A001		250	Ton	Vegetative Materials for Mulch				
0300	216-A001		444	Square Yard	Solid Sodding				
0310	217-A001		3,663	Square Yard	Ditch Liner				
0320	219-A001		9	Thousand Gallon	Watering	20.	00	180.	00

Line No.	Item Code	Adj Code	Quantity	Units	Description	Unit Price		Bid Amount	
0330	220-A001		50	Acre	Insect Pest Control	30.	00	1,500.	00
0340	221-A001	(S)	377	Cubic Yard	Portland Cement Concrete Paved Ditch				
0350	223-A001		1	Acre	Mowing	40.	00	40.	00
0360	224-A001		8,067	Square Yard	Soil Reinforcing Mat				
0370	234-A001		13,300	Linear Feet	Temporary Silt Fence				
0380	235-A001		2,708	Bale	Temporary Erosion Checks				
0390	236-A004		20	Each	Silt Basin, Type D				
0400	239-A001		2,800	Linear Feet	Temporary Slope Drains				
0410	304-C013	(GY)	24,055	Cubic Yard	Granular Material, AEA, Class 3, Group C				
0420	304-C043	(GY)	43,920	Cubic Yard	Granular Material, AEA, Class 9, Group C				
0430	406-A001		800	Square Yard	Cold Milling of Bituminous Pavement, All Depths				
0440	408-A003	(A3)	1,650	Gallon	Asphalt for Prime Coat, Cut-Back MC-70 or Emulsified EA-1				

Line No.	Item Code	Adj Code	Quantity	Units	Description	Unit Price		Bid Amount	
0450	423-A001		13	Mile	Rumble Strips, Ground In				
0460	501-E001		241	Linear Feet	Expansion Joints, Without Dowels				
0470	501-K001		568	Square Yard	Transverse Grooving				
0480	502-A001	(C)	578	Square Yard	Reinforced Cement Concrete Bridge End Pavement				
0490	503-C007		136	Linear Feet	Saw Cut, Full Depth				
0500	602-A001	(S)	24,460	Pounds	Reinforcing Steel				
0510	603-CA002	(S)	1,416	Linear Feet	18" Reinforced Concrete Pipe, Class III				
0520	603-CA003	(S)	940	Linear Feet	24" Reinforced Concrete Pipe, Class III				
0530	603-CA004	(S)	808	Linear Feet	30" Reinforced Concrete Pipe, Class III				
0540	603-CA007	(S)	312	Linear Feet	48" Reinforced Concrete Pipe, Class III				
0550	603-CA008	(S)	392	Linear Feet	54" Reinforced Concrete Pipe, Class III				
0560	603-CA020	(S)	320	Linear Feet	54" Reinforced Concrete Pipe, Class IV				

Line No.	Item Code	Adj Code	Quantity	Units	Description	Unit Price		Bid Amount	
0570	603-CA052	(S)	624	Linear Feet	30" Reinforced Concrete Pipe, Class V, Class B Bedding				
0580	603-CB001	(S)	15	Each	18" Reinforced Concrete End Section				
0590	603-CB002	(S)	19	Each	24" Reinforced Concrete End Section				
0600	603-CB003	(S)	11	Each	30" Reinforced Concrete End Section				
0610	603-CB006	(S)	2	Each	48" Reinforced Concrete End Section				
0620	603-CB007	(S)	6	Each	54" Reinforced Concrete End Section				
0630	603-CE004	(S)	400	Linear Feet	44" x 27" Concrete Arch Pipe, Class A III				
0640	603-CE007	(S)	48	Linear Feet	65" x 40" Concrete Arch Pipe, Class A III				
0650	603-CF004	(S)	4	Each	44" x 27" Concrete Arch Pipe End Section				
0660	603-CF007	(S)	2	Each	65" x 40" Concrete Arch Pipe End Section				
0670	604-A001		1,220	Pounds	Castings				
0680	604-B001		4,400	Pounds	Gratings				

Line No.	Item Code	Adj Code	Quantity	Units	Description	Unit Price		Bid Amount	
0690	605-J001	(S)	21,683	Linear Feet	Edge Drain & Edge Drain Outlet/Vent Inspection				
0700	606-B001		700	Linear Feet	Guard Rail, Class A, Type 1				
0710	606-D012		4	Each	Guard Rail, Bridge End Section, Type I				
0720	606-E002		4	Each	Guard Rail, Terminal End Section, Flared				
0730	609-D002	(S)	5,173	Linear Feet	Combination Concrete Curb and Gutter Type 2				
0740	614-A001	(S)	656	Square Yard	Concrete Driveway, Without Reinforcement				
0750	615-A015	(S)	60	Linear Feet	Concrete Bridge End Barrier, 32"				
0760	616-A001	(S)	1,107	Square Yard	Concrete Median and/or Island Pavement, 4-inch				
0770	616-A003	(S)	163	Square Yard	Concrete Median and/or Island Pavement, 10-inch				
0780	618-A001		1	Lump Sum	Maintenance of Traffic	XXXXXXXX	XXX		
0790	619-A1002		9	Mile	Temporary Traffic Stripe, Continuous White				
0800	619-A2002		3	Mile	Temporary Traffic Stripe, Continuous Yellow				

Line No.	Item Code	Adj Code	Quantity	Units	Description	Unit Price	Bid Amount	
0810	619-A3006		3	Mile	Temporary Traffic Stripe, Skip White			
0820	619-A4006		3	Mile	Temporary Traffic Stripe, Skip Yellow			
0830	619-A5001		8,000	Linear Feet	Temporary Traffic Stripe, Detail			
0840	619-A6001		1,600	Linear Feet	Temporary Traffic Stripe, Legend			
0850	619-C7001		400	Each	Two-Way Yellow Reflective High Performance Raised Marker			
0860	619-D1001		50	Square Feet	Standard Roadside Construction Signs, Less than 10 Square Feet			
0870	619-D2001		2,017	Square Feet	Standard Roadside Construction Signs, 10 Square Feet or More			
0875	619-D4001 Added 03/16/2009		116	Square Feet	Directional Signs			
0880	619-F3004		4	Each	Delineators, Guard Rail, White			
0890	619-G4001		336	Linear Feet	Barricades, Type III, Single Faced			
0900	619-G4005		24	Linear Feet	Barricades, Type III, Double Faced			
0910	619-G5001		111	Each	Free Standing Plastic Drums			

Line No.	Item Code	Adj Code	Quantity	Units	Description	Unit Price		Bid Amount	
0920	619-G7001		5	Each	Warning Lights, Type "B"				
0930	619-K2002		2	Each	Installation and Removal of Guard Rail, Type I Bridge End Section				
0940	619-K4001		2	Each	Installation and Removal of Guardrail, Terminal End Section				
0950	620-A001		1	Lump Sum	Mobilization	XXXXXXXXX	XXX		
0960	621-A001		1	Each	Field Laboratory				
0970	627-K001		901	Each	Red-Clear Reflective High Performance Raised Markers				
0980	627-L001		172	Each	Two-Way Yellow Reflective High Performance Raised Markers				
0990	628-I002		752	Linear Feet	6" High Performance Cold Plastic Traffic Stripe, Skip White				
1000	628-J002		752	Linear Feet	6" High Performance Cold Plastic Traffic Stripe, Continuous White				
1010	628-M002		752	Linear Feet	6" High Performance Cold Plastic Traffic Stripe, Continuous Yellow				
1020	630-A001		334	Square Feet	Standard Roadside Signs, Sheet Aluminum, 0.080" Thickness				
1030	630-A002		775	Square Feet	Standard Roadside Signs, Sheet Aluminum, 0.125" Thickness				

Line No.	Item Code	Adj Code	Quantity	Units	Description	Unit Price		Bid Amount	
1040	630-B001		639	Square Feet	Interstate Directional Signs, Bolted Extruded Aluminum Panels, Ground Mounted				
1050	630-C002		36	Linear Feet	Steel U-Section Posts, 2.0 to 2.5 lb/ft				
1060	630-C004		794	Linear Feet	Steel U-Section Posts, 3.0 to 3.5 lb/ft				
1070	630-D003		54	Linear Feet	Structural Steel Beams, W6 x 9				
1080	630-D005		132	Linear Feet	Structural Steel Beams, W6 x 15				
1090	630-D006		53	Linear Feet	Structural Steel Beams, W8 x 18				
1100	630-D007		57	Linear Feet	Structural Steel Beams, W8 x 21				
1110	630-E001		32	Pounds	Structural Steel Angles & Bars, 3" x 3" x 1/4" Angles				
1120	630-E002		247	Pounds	Structural Steel Angles & Bars, 3 1/2" x 3 1/2" x 1/4" Angles				
1130	630-E004		731	Pounds	Structural Steel Angles & Bars, 7/16" x 2 1/2" Flat Bar				
1140	630-F001		14	Each	Delineators, Guard Rail, White				
1150	630-F002		14	Each	Delineators, Guard Rail, Yellow				

Line No.	Item Code	Adj Code	Quantity	Units	Description	Unit Price		Bid Amount	
1160	630-F003		28	Each	Delineators, Flexible Post Mounted, Crossover, Type I, Green				
1170	630-F004		28	Each	Delineators, Flexible Post Mounted, Crossover, Type I, Yellow				
1180	630-G002		4	Each	Type 3 Object Markers, OM-3R or OM-3L, Post Mounted				
1190	630-K001		193	Linear Feet	Welded & Seamless Steel Pipe Posts, 3"				
1200	630-K002		31	Linear Feet	Welded & Seamless Steel Pipe Posts, 3 1/2"				
1210	630-K003		383	Linear Feet	Welded & Seamless Steel Pipe Posts, 4"				
1220	699-A001		1	Lump Sum	Roadway Construction Stakes	XXXXXXXXX	XXX		
1230	815-A009	(S)	2,880	Ton	Loose Riprap, Size 300				
1240	815-E001	(S)	4,025	Square Yard	Geotextile under Riprap				
1250	815-F002	(S)	42	Ton	Sediment Control Stone				
1260	907-213-A001		300	Ton	Agricultural Limestone				
1270	907-304-H002	(GY)	2,250	Cubic Yard	3/4" and Down Crushed Stone Base, LVM				

Line No.	Item Code	Adj Code	Quantity	Units	Description	Unit Price		Bid Amount	
1280	907-306-A001	(DA6)	101,070	Square Yard	Asphalt Drainage Course				
1290	907-307-B001	(M)	94,753	Square Yard	10" Soil-Lime-Water Mixing, Class B				
1300	907-307-D001		2,132	Ton	Lime				
1310	907-308-A001		1,102	Ton	Portland Cement				
1320	907-308-B001	(M)	94,753	Square Yard	Soil-Cement-Water Mixing, Optional Mixers, Base				
1330	907-403-A002	(BA1)	14,057	Ton	Hot Mix Asphalt, HT, 19-mm mixture				
1340	907-403-A003	(BA1)	24,000	Ton	Hot Mix Asphalt, HT, 25-mm mixture				
1350	907-403-A005	(BA1)	900	Ton	Hot Mix Asphalt, HT, 9.5-mm mixture				
1360	907-403-D002	(BA1)	14,630	Ton	Hot Mix Asphalt, HT, 19-mm mixture, Polymer Modified				
1370	907-403-D004	(BA1)	13,399	Ton	Hot Mix Asphalt, HT, 9.5-mm mixture, Polymer Modified				
1380	907-601-A001	(S)	186	Cubic Yard	Class "B" Structural Concrete				
1390	907-601-B003	(S)	50	Cubic Yard	Class "B" Structural Concrete, Minor Structures				

Line No.	Item Code	Adj Code	Quantity	Units	Description	Unit Price		Bid Amount	
1400	907-603-ALT01	(S)	2,784	Linear Feet	18" Type A Alternate Pipe				
1410	907-603-ALT02	(S)	96	Linear Feet	24" Type A Alternate Pipe				
1420	907-603-ALT07	(S)	56	Linear Feet	54" Type A Alternate Pipe				
1430	907-605-H001	(S)	39,423	Linear Feet	Edge Drain				
1440	907-605-I001	(S)	3,943	Linear Feet	Edge Drain Outlets/Vents				
1450	907-617-A001		72	Each	Right-of-Way Marker				
1460	907-626-A003		6	Mile	6" Thermoplastic Traffic Stripe, Skip White				
1470	907-626-C004		6	Mile	6" Thermoplastic Edge Stripe, Continuous White				
1480	907-626-E004		1	Mile	6" Thermoplastic Traffic Stripe, Continuous Yellow				
1490	907-626-F004		5	Mile	6" Thermoplastic Edge Stripe, Continuous Yellow				
1500	907-626-G004		13,780	Linear Feet	Thermoplastic Detail Stripe, White				
1510	907-626-G005		6,359	Linear Feet	Thermoplastic Detail Stripe, Yellow				

Line No.	Item Code	Adj Code	Quantity	Units	Description	Unit Price		Bid Amount	
1520	907-626-H004		1,160	Linear Feet	Thermoplastic Legend, White				
1530	907-626-H005		154	Square Feet	Thermoplastic Legend, White				
Bridge Items									
1540	501-K001		2,480	Square Yard	Transverse Grooving				
1550	803-A001	(S)	2	Each	Test Pile				
1560	803-B001	(S)	2	Each	Conventional Static Loading Test	5,000.	00	10,000.	00
1570	803-D003 Changed 03/16/2009	(S)	3,195	Linear Feet	HP 14 x 73 Steel Piling				
1580	803-J001	(S)	2	Each	Pile Restrike				
1590	803-N001	(S)	20	Linear Feet	Exploration				
1600	803-O009	(S)	180	Linear Feet	Temporary Casing, 54" Diameter				
1610	805-A001	(S)	214,551	Pounds	Reinforcement				
1620	813-A001	(S)	1,236	Linear Feet	Concrete Railing				

Line No.	Item Code	Adj Code	Quantity	Units	Description	Unit Price		Bid Amount	
1630	815-A009	(S)	1,823	Ton	Loose Riprap, Size 300				
1640	815-E001	(S)	2,619	Square Yard	Geotextile under Riprap				
1650	907-803-K003	(S)	360	Linear Feet	Drilled Shaft, 54" Diameter				
1660	907-803-M003	(S)	30	Linear Feet	Trial Shaft, 54" Diameter				
1670	907-804-A001	(S)	1,414	Cubic Yard	Bridge Concrete, Class AA				
1680	907-804-C150	(S)	1,317	Linear Feet	110' Prestressed Concrete Beam, Type IV				
1690	907-804-C171	(S)	2,394	Linear Feet	100' Prestressed Concrete Beam, Type IV				

*** BID CERTIFICATION ***

TOTAL BID.....\$_____

*** DBE/WBE SECTION ***

Complete item nos. 1, 2, and/or 3 as appropriate. See Notice to Bidders addressing Disadvantaged Business Enterprises in Highway Construction.

1. I/We agree that no less than _____ percent shall be expended with small business concerns owned and controlled by socially and economically disadvantaged individuals (DBE and WBE).
2. Classification of Bidder: Small Business (DBE)_____ Small Business (WBE)_____
3. A joint venture with a Small Business (DBE/WBE): _____

*** SIGNATURE STATEMENT ***

BIDDER ACKNOWLEDGES THAT HE/SHE HAS CHECKED ALL ITEMS IN THIS PROPOSAL FOR ACCURACY AND CERTIFIED THAT THE FIGURES SHOWN THEREIN CONSTITUTE THEIR OFFICIAL BID.

BIDDER'S SIGNATURE

BIDDER'S COMPANY

BIDDER'S FEDERAL TAX ID NUMBER