

SECTION 905 -- PROPOSAL (CONTINUED)

I (We) further propose to execute the attached contract agreement (Section 902) as soon as the work is awarded to me (us), and to begin and complete the work within the time limit(s) provided for in the Specifications and Advertisement. I (We) also propose to execute the attached contract bond (Section 903) in an amount not less than one hundred (100) percent of the total of my (our) part, but also to guarantee the excellence of both workmanship and materials until the work is finally accepted.

I (We) enclose a certified check, cashier's check or bid bond for **five percent (5%) of total bid** and hereby agree that in case of my (our) failure to execute the contract and furnish bond within Ten (10) days after notice of award, the amount of this check (bid bond) will be forfeited to the State of Mississippi as liquidated damages arising out of my (our) failure to execute the contract as proposed. It is understood that in case I am (we are) not awarded the work, the check will be returned as provided in the Specifications.

Bidder acknowledges receipt of and has added to and made a part of the proposal and contract documents the following addendum (addenda):

ADDENDUM NO. 1 DATED 3/16/2009 ADDENDUM NO. DATED
 ADDENDUM NO. DATED ADDENDUM NO. DATED

Number	Description
1	Revised Table of Contents; Added Notice to Bidders #2438; Added Special Provision #907-413-2; Revised Bid Sheets; Amendment EBS Download Required.

TOTAL ADDENDA: 1
 (Must agree with total addenda issued prior to opening of bids)

Respectfully Submitted,

DATE _____

 Contractor

BY _____
 Signature

TITLE _____

ADDRESS _____

CITY, STATE, ZIP _____

PHONE _____

FAX _____

E-MAIL _____

(To be filled in if a corporation)

Our corporation is chartered under the Laws of the State of _____ and the names, titles and business addresses of the executives are as follows:

_____ President	_____ Address
_____ Secretary	_____ Address
_____ Treasurer	_____ Address

The following is my (our) itemized proposal.

Revised 09/21/2005

NH-0009-01(123) / 105437301

Adams County(ies)

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

TABLE OF CONTENTS

PROJECT: NH-0009-01(123) / 105437301 -- Adams County

901--Advertisement

904--Notice to Bidders: Governing Specifications. - # 1
Final Cleanup - # 3
Fiber Reinforced Concrete - # 640
Disadvantage Business Enterprise in Federal-Aid Highway
Construction, w/ Supplement - # 696
On-The-Job Training Program - # 777
Payroll Requirements - # 883
Rumble Stripe - # 1312
Errata & Modifications to the 2004 Standard Specifications - #1405
Advancement of Materials - # 1546
Safety Apparel - # 1808
Minimum Wage Rate - # 1869
DBE Forms, Participation, and Payment - # 1918
Non-Quality Control / Quality Assurance Concrete - # 1922
Federal Bridge Formula - # 1928
Standard Drawings, w/ Supplement - # 2105
Department of Labor Ruling - # 2239
Contract Time - # 2291
Scope of Work - # 2292
Specialty Items - # 2293
Cooperation Between Contractor - # 2294
Petroleum Product Base Prices - # 2345
Mississippi Resident Agent Requirements - # 2361
Status of Right-of-Way, w/ Attachments - # 2382
Removal of Haul Permit - # 2400
Special Reporting Criteria - # 2420
American Recovery and Reinvestment Act (ARRA) - #2438

906: Required Federal Contract Provisions -- FHWA-1273, w/Supplement

907-105-3: Cooperation By Contractors, w/Supplement
907-107-1: Liability Insurance, W/Supplement
907-107-6: Legal Relations & Responsibility to Public, W/Supplement
907-108-17: Prosecution and Progress
907-109-3: Partial Payment, W/Supplement
907-401-2: Hot Mix Asphalt (HMA), w/Supplement
907-403-4: Hot Mix Asphalt (HMA), w/Supplement
907-407-1: Tack Coat
907-413-2: Sawing and Sealing Transverse Joints in Asphalt Pavement

-- CONTINUED ON NEXT PAGE --

- 907-618-1: Additional Signing Requirements, w/Supplement
- 907-618-4: Placement of Temporary Traffic Stripe
- 907-626-14: Double Drop Thermoplastic Markings, w/Supplement
- 907-626-15: Thermoplastic Traffic Markings
- 907-701-3: Hydraulic Cement, w/Supplement
- 907-707-2: Joint Material
- 907-711-3: Synthetic Structural Fiber Reinforcement
- 907-713-1: Admixtures for Concrete
- 907-714-5: Miscellaneous Materials, w/Supplement
- 907-720-1: Pavement Marking Materials
- 907-804-8: Concrete Bridges and Structures, w/Supplement
- 906-3: MDOT On-the-Job Training Program
- 906-6: MDOT On-the-Job Training Program - Alternate Program

SECTION 905 - PROPOSAL,
PROPOSAL SHEET NOS. 2-1 THRU 2-6,
COMBINATION BID PROPOSAL,
CERTIFICATE OF PERFORMANCE - PRIOR FEDERAL-AID CONTRACTS,
NON-COLLUSION CERTIFICATE,
SECTION 902 - CONTRACT FORM, AND SECTION 903 - CONTRACT BOND FORMS,
OCR-485.

REVISIONS TO THE ABOVE WILL BE INDICATED ON THE
SECOND SHEET OF SECTION 905 AS AN ADDENDUM

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 - NOTICE TO BIDDERS NO. 2438


CODE: (SP)

DATE: 03/16/2009

SUBJECT: American Recovery and Reinvestment Act (ARRA) Sign


Bidders are hereby advised that the Contractor shall install, maintain, and remove two (2) economic recovery signs at the beginning (BOP) and end (EOP) of this project, unless otherwise directed by the Engineer. A picture of the signs and the dimensions of the signs are shown on the attached sheets. The signs shall be constructed, installed and maintained in accordance with the MUTCD, and Sections 618 & 619 of the Standard Specifications. These signs shall be fabricated from 0.125" sheet aluminum. Signs shall be mounted on three (3) - three pounds per linear foot (3 lbs. / ft.) U-Section posts. Each post shall be 14 feet long mounted onto another 14-foot U-Section post driven halfway into the ground. All cost of installing and maintaining the signs, including material, labor, posts, hardware, etc., will be measured and paid for under the pay item no. 619-D4.

**PROJECT FUNDING SOURCE SIGN ASSEMBLY
AMERICAN RECOVERY AND REINVESTMENT ACT
SIGN LAYOUT DETAILS**

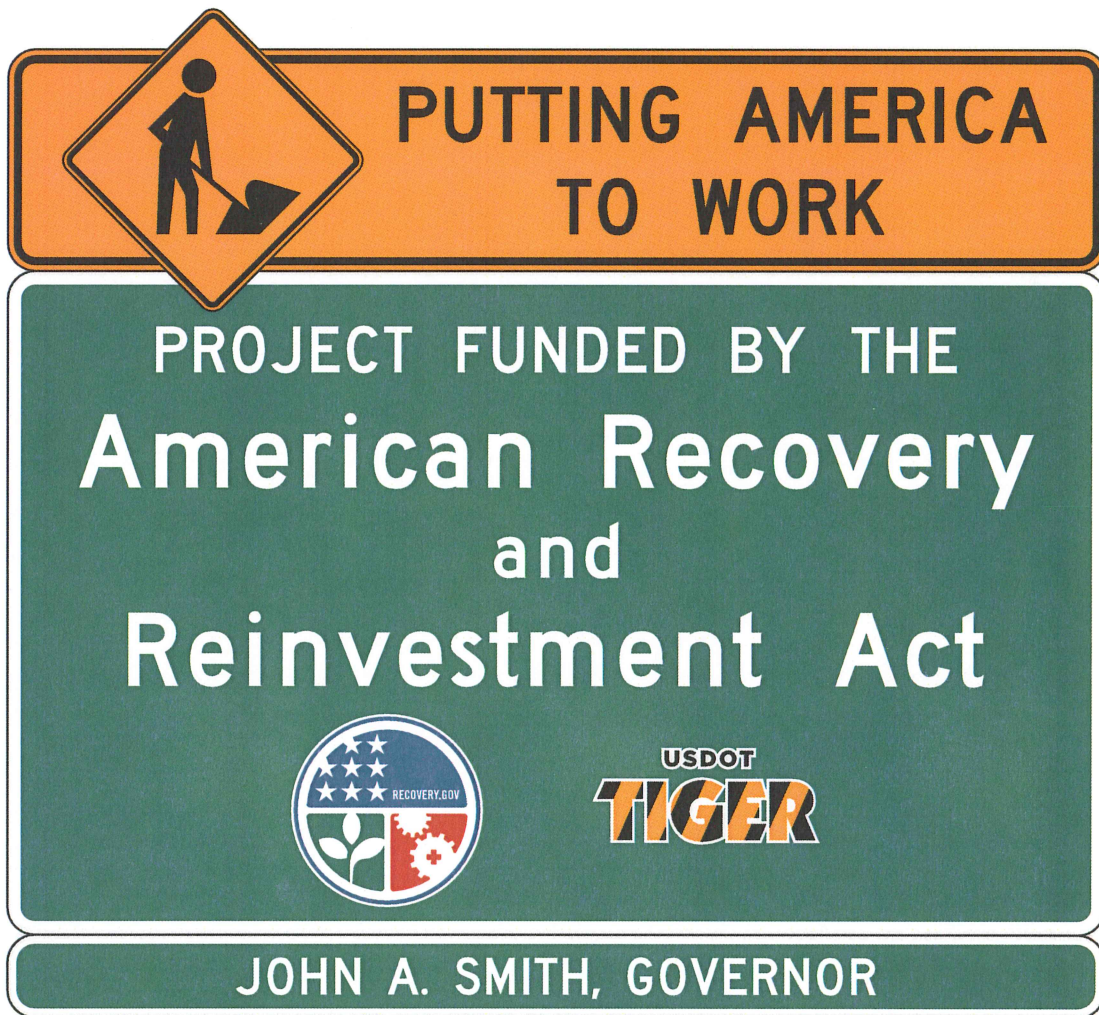

PROJECT FUNDING SOURCE
SIGN ASSEMBLY

PROJECT FUNDING SOURCE SIGN ASSEMBLY AMERICAN RECOVERY AND REINVESTMENT ACT SIGN LAYOUT DETAILS

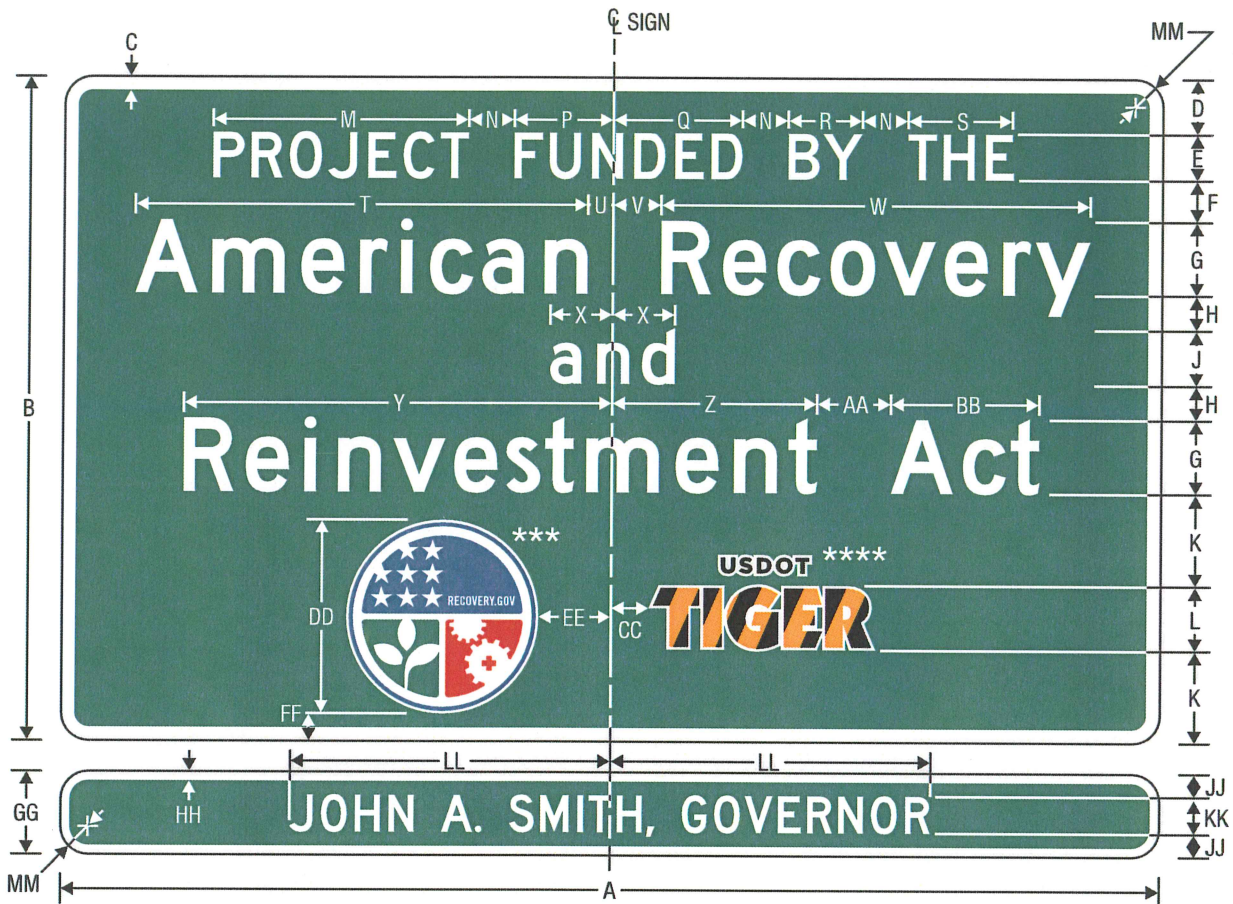

PROJECT FUNDING SOURCE SIGN AND OPTIONAL SUPPLEMENTAL PLAQUE

NOTE: SIGN SHALL NOT BE INSTALLED WITHOUT PROJECT FUNDING SOURCE PLAQUE (SEE SHEET 3).

NOTE: SEE SHEET NO. 6 FOR DETAILS OF SUPPLEMENTAL SIGN SHOWING COMMISSIONER'S NAMES.

A	B	C	D	E	F	G	H	J	K	L	M	N	P
84	54	1	5	4 C	3.5	6 C*	3	4D* (β LQ)	7.25	5	19.047	4	7.362


Q	R	S	T	U	V	W	X	Y	Z	AA	BB	CC	DD
9.484	5.162	7.763	31.722	2.415	3.585	30.552	4.542	30.911	14.737	6	10.175	3	15

EE	FF	GG	HH	JJ	KK	LL	MM
6	2.25	9	.75	2.75	3.5 C	VAR	2.25

- * Increase character spacing 50%
- ** Series C may be used for longer legends
- *** See Pictograph page 4
- **** See Pictograph page 5

COLORS: LEGEND, BORDER — WHITE (RETROREFLECTIVE)
BACKGROUND — GREEN (RETROREFLECTIVE)

PROJECT FUNDING SOURCE SIGN ASSEMBLY AMERICAN RECOVERY AND REINVESTMENT ACT SIGN LAYOUT DETAILS

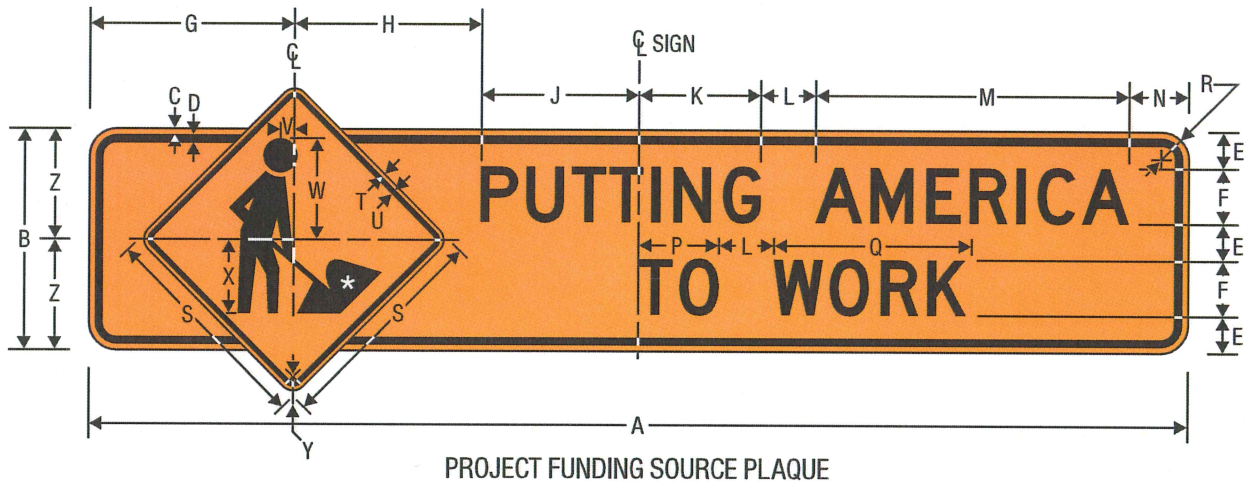

NOTE: PLAQUE SHALL NOT BE INSTALLED WITHOUT SIGN (SEE SHEET 2).

* See *Standard Highway Signs* Page 6-59 for symbol design.

A	B	C	D	E	F	G	H	J	K	L	M	N	P
■	■	■	■	■	■	■	■	■	■	■	■	■	■
84	18	0.375	0.625	3.5	4 D	16.607	15.686	9.707	10.667	4	22.813	5	5.843

Q	R	S	T	U	V	W	X	Y	Z
■	■	■	■	■	■	■	■	■	■
14.009	2.25	18	0.375	0.625	1	7	6	1.5	9

COLORS: LEGEND, BORDER — BLACK
BACKGROUND — ORANGE (RETROREFLECTIVE)

PROJECT FUNDING SOURCE SIGN ASSEMBLY AMERICAN RECOVERY AND REINVESTMENT ACT SIGN LAYOUT DETAILS



RECOVERY
Vector-Based, Vinyl-Ready Pictograph


- | | |
|--------------------------|---------------------------|
| COLORS: LEGEND, OUTLINE | — WHITE (RETROREFLECTIVE) |
| BORDER | — BLUE (RETROREFLECTIVE) |
| BACKGROUND (UPPER) | — BLUE (RETROREFLECTIVE) |
| BACKGROUND (LOWER RIGHT) | — RED (RETROREFLECTIVE) |
| BACKGROUND (LOWER LEFT) | — GREEN (RETROREFLECTIVE) |

**PROJECT FUNDING SOURCE SIGN ASSEMBLY
AMERICAN RECOVERY AND REINVESTMENT ACT
SIGN LAYOUT DETAILS**



USDOT TIGER
Vector-Based, Vinyl-Ready Pictograph

COLORS: OUTLINE — WHITE (RETROREFLECTIVE)
USDOT LEGEND — BLACK
TIGER DIAGONALS — BLACK,
ORANGE (RETROREFLECTIVE)

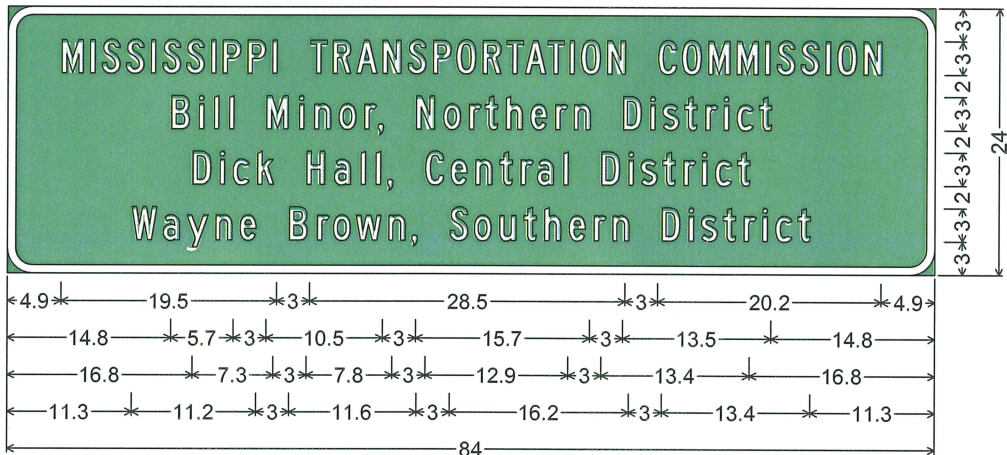

2.3" Radius, 0.8" Border, White on Green;

"MISSISSIPPI TRANSPORTATION COMMISSION" C; "Bill Minor, Northern District" C;

"Dick Hall, Central District" C; "Wayne Brown, Southern District" C;

Table of distances between letter and object lefts.

4.9	M	I	S	S	I	S	S	I	P	P	I
2.5	1.1	2.1	2.3	1.1	2.1	2.3	1.0	2.3	2.3		
	T	R	A	N	S	P	O	R	T	A	T
3.4	2.0	2.2	2.3	2.3	2.3	2.1	2.4	2.2	1.6	2.1	2.0
	I	O	N								
4.6	2.2	2.3	2.6	2.6	1.1	2.1	2.3	1.0	2.4	1.6	4.9
14.8	B	I	I	I	M	I	N	O	R	,	N
2.5	1.4	1.4	3.4	2.9	1.4	2.2	2.3	1.3	3.4	2.5	2.3
	I	N	O	R	T	H	E	R	R		
4.4	2.5	1.1	2.0	1.9	1.7	1.2	2.0	1.1	14.8		
16.8	D	I	C	K	H	A	I	I	,	C	E
2.4	1.2	2.2	4.5	2.5	2.4	1.4	1.0	3.5	2.2	2.3	2.2
	I	N	T	R	A	I					
3.4	2.5	1.1	1.9	1.9	1.7	1.2	2.0	1.1	16.8		
11.3	W	A	Y	N	E	B	R	O	W	N	,
2.8	2.1	2.6	2.3	4.4	2.6	1.4	2.1	3.0	2.1	3.4	2.2
	S	O	U	T	H	E	R	R			
4.5	2.5	1.1	1.9	1.9	1.7	1.2	2.0	1.1	11.3		

COLORS: LEGEND, BORDER — WHITE (RETROREFLECTIVE)
 BACKGROUND — GREEN (RETROREFLECTIVE)

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-413-2

CODE: (SP)

DATE: 05/09/2008

SUBJECT: Sawing and Sealing Transverse Joints in Asphalt Pavement

Section 413, Cleaning and Sealing Joints and Cracks, of the 2004 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

907-413.03--Construction Requirements.

907-413.03.3-- Sawing and Sealing Transverse Joints in Asphalt Pavement.

907-413.03.3.1--General. Delete the first paragraph of Subsection 413.03.3.1 on page 296 and substitute the following:

The Contractor's operation shall be conducted so that sawcutting of transverse joints, cleaning, and sealing is a continuous operation. The entire sawing and sealing operation shall be completed within seven (7) days after the placement of the final wearing course, unless the approved traffic control plan or sequence of operations provide otherwise. Traffic shall not be allowed on sawed unsealed joints in the final wearing course.

When intermediate lifts must be exposed to traffic for over seven (7) days, the Contractor shall be required to make an interim 1/8-inch wide saw cut which is one third (1/3) as deep as the hot mix asphalt layer. This interim saw cut does not require sealing. Costs of this interim cut(s) is to be absorbed the pay item for sawing and sealing transverse joints in asphalt pavement.

907-413.05--Basis of Payment. Add the "907" prefix to pay item no. 413-E on page 298.

Milling and overlaying approximatley 7 miles of U.S. Highway 61 in Natchez, known as Federal Aid Project No. NH-0009-01(123) / 105437301, in the County of Adams, State of Mississippi.

I (We) agree to complete the entire project within the specified contract time.

***** SPECIAL NOTICE TO BIDDERS *****

**BIDS WILL NOT BE CONSIDERED UNLESS BOTH UNIT PRICES AND ITEM TOTALS ARE ENTERED.
 BIDS WILL NOT BE CONSIDERED UNLESS THE BID CERTIFICATION LOCATED AT THE END OF THE BID SHEETS IS SIGNED**

*****BID SCHEDULE*****

Line No.	Item Code	Adj Code	Quantity	Units	Description	Unit Price		Item Amount	
						Dollar	Ct	Dollar	Ct
Roadway Items									
0010	202-B041		250	Linear Feet	Removal of Fence, All Types				
0020	202-B043		4	Each	Removal of Guard Rail Bridge End Section				
0030	202-B053		244	Linear Feet	Removal of Guard Rail Including Post, Blockouts & Hardware				
0040	202-B076		2,648	Linear Feet	Removal of Traffic Stripe				
0050	202-B135		92	Linear Feet	Removal of Guard Rail Double Faced Rail Including Rail & Posts				
0060	202-B136		6	Each	Removal of Guard Rail Terminal End Section				
0070	202-B255		3	Each	Removal of Guard Rail Cable Anchor, Including Post, Rail, Anchor & Hardware				
0080	304-A029	(GY)	1,712	Cubic Yard	Granular Material, LVM, Class 6, Group D				

Line No.	Item Code	Adj Code	Quantity	Units	Description	Unit Price		Bid Amount	
0090	406-A001		150,503	Square Yard	Cold Milling of Bituminous Pavement, All Depths				
0100	413-B001 Deleted 03/16/2009					XXXXXXXXXX	XXX	XXXXXXXXXX	XXX
0110	423-A001		15	Mile	Rumble Strips, Ground In				
0120	606-B002		150	Linear Feet	Guard Rail, Class A, Type 1, Double Faced				
0130	606-B005		288	Linear Feet	Guard Rail, Class A, Type 1, 'W' Beam				
0140	606-C003		3	Each	Guard Rail, Cable Anchor, Type 1				
0150	606-D001		2	Each	Guard Rail, Bridge End Section, Type A				
0160	606-D007		2	Each	Guard Rail, Bridge End Section, Type G, Modified				
0170	606-E002		4	Each	Guard Rail, Terminal End Section, Flared				
0180	606-E009		2	Each	Guard Rail, Terminal End Section, Double Faced				
0190	607-B001		250	Linear Feet	60" Type I Chain Link Fence, Class I				
0200	607-P1029		17	Each	Line Post, 5' x 2" Galvanized Steel				

Line No.	Item Code	Adj Code	Quantity	Units	Description	Unit Price		Bid Amount	
0210	607-P2017		4	Each	Brace Post, 5' x 2 1/2" Galvanized Steel				
0220	618-A001		1	Lump Sum	Maintenance of Traffic	XXXXXXXX	XXX		
0230	618-B001		1	Square Feet	Additional Construction Signs	10.	00	10.	00
0240	619-A1002		19	Mile	Temporary Traffic Stripe, Continuous White				
0250	619-A2002		19	Mile	Temporary Traffic Stripe, Continuous Yellow				
0260	619-A3006		19	Mile	Temporary Traffic Stripe, Skip White				
0270	619-A4001		1,050	Linear Feet	Temporary Traffic Stripe, Skip Yellow				
0280	619-A5001		20,000	Linear Feet	Temporary Traffic Stripe, Detail				
0290	619-A6001		10,500	Linear Feet	Temporary Traffic Stripe, Legend				
0295	619-D4001 Added 03/16/2009		116	Square Feet	Directional Signs				
0300	627-J001		231	Each	Two-Way Clear Reflective High Performance Raised Markers				
0310	627-K001		2,050	Each	Red-Clear Reflective High Performance Raised Markers				

Line No.	Item Code	Adj Code	Quantity	Units	Description	Unit Price		Bid Amount	
0320	627-L001		140	Each	Two-Way Yellow Reflective High Performance Raised Markers				
0330	628-I002		1,174	Linear Feet	6" High Performance Cold Plastic Traffic Stripe, Skip White				
0340	628-J002		1,174	Linear Feet	6" High Performance Cold Plastic Traffic Stripe, Continuous White				
0350	628-M002		1,174	Linear Feet	6" High Performance Cold Plastic Traffic Stripe, Continuous Yellow				
0360	630-F001		36	Each	Delineators, Guard Rail, White				
0370	630-F002		16	Each	Delineators, Guard Rail, Yellow				
0380	630-F003		2	Each	Delineators, Flexible Post Mounted, Crossover, Type I, Green				
0390	630-F004		2	Each	Delineators, Flexible Post Mounted, Crossover, Type I, Yellow				
0400	630-F005		32	Each	Delineators, Flexible Post Mounted, Crossover, Type II				
0410	635-A001		1,716	Linear Feet	Vehicle Loop Assemblies				
0420	907-403-D004 (BA1)		25,300	Ton	Hot Mix Asphalt, HT, 9.5-mm mixture, Polymer Modified				
0430	907-403-E004 (BA1)		300	Ton	Hot Mix Asphalt, HT, 9.5-mm mixture, Polymer Modified, Leveling				

Line No.	Item Code	Adj Code	Quantity	Units	Description	Unit Price		Bid Amount	
0435	907-413-E001 Added 03/16/2009		51,384	Linear Feet	Sawing and Sealing Transverse Joints in Asphalt Pavement				
0440	907-606-PP001		64	Each	Remove and Replace Guard Rail Blockouts				
0450	907-626-A003		13	Mile	6" Thermoplastic Traffic Stripe, Skip White				
0460	907-626-C006		13	Mile	6" Thermoplastic Double Drop Edge Stripe, Continuous White, 90 mil min				
0470	907-626-D004		1,050	Linear Feet	6" Thermoplastic Traffic Stripe, Skip Yellow				
0480	907-626-E003		1,300	Linear Feet	6" Thermoplastic Traffic Stripe, Continuous Yellow				
0490	907-626-F006		13	Mile	6" Thermoplastic Double Drop Edge Stripe, Continuous Yellow, 90 mil min				
0500	907-626-G004		24,000	Linear Feet	Thermoplastic Detail Stripe, White				
0510	907-626-G005		24,500	Linear Feet	Thermoplastic Detail Stripe, Yellow				
0520	907-626-H004		10,300	Linear Feet	Thermoplastic Legend, White				
0530	907-626-H005		1,000	Square Feet	Thermoplastic Legend, White				

*** BID CERTIFICATION ***

TOTAL BID.....\$_____

*** DBE/WBE SECTION ***

Complete item nos. 1, 2, and/or 3 as appropriate. See Notice to Bidders addressing Disadvantaged Business Enterprises in Highway Construction.

1. I/We agree that no less than _____ percent shall be expended with small business concerns owned and controlled by socially and economically disadvantaged individuals (DBE and WBE).
2. Classification of Bidder: Small Business (DBE)_____ Small Business (WBE)_____
3. A joint venture with a Small Business (DBE/WBE): _____

*** SIGNATURE STATEMENT ***

BIDDER ACKNOWLEDGES THAT HE/SHE HAS CHECKED ALL ITEMS IN THIS PROPOSAL FOR ACCURACY AND CERTIFIED THAT THE FIGURES SHOWN THEREIN CONSTITUTE THEIR OFFICIAL BID.

BIDDER'S SIGNATURE

BIDDER'S COMPANY

BIDDER'S FEDERAL TAX ID NUMBER