

FED. ROAD REG. NO.	STATE	PROJECT NO.	SHEET NO.
—	MISS.	STP-0015-01(065)	1

STATE OF MISSISSIPPI  
MISSISSIPPI DEPARTMENT OF TRANSPORTATION

# PLAN AND PROFILE OF PROPOSED STATE HIGHWAY

## FEDERAL AID PROJECT NO. STP-0015-01(065)

US 84 JUNKIN DRIVE  
LIGHTING & LANDSCAPING  
FROM US 61 TO THE MISSISSIPPI RIVER BRIDGE  
ADAMS COUNTY FMS CON 105579/301000

SCALES  
PLAN 1 IN. = 30 FT.  
PROFILE { HOR. VERT.  
LAYOUT

STA. 431 + 23.303 E.O.P.



J.R. JUNKIN DR.

STA. 308 + 00 B.O.P.

BRIDGE STRUCTURES REQ'D.

NONE

BOX BRIDGES REQ'D.  
NONE

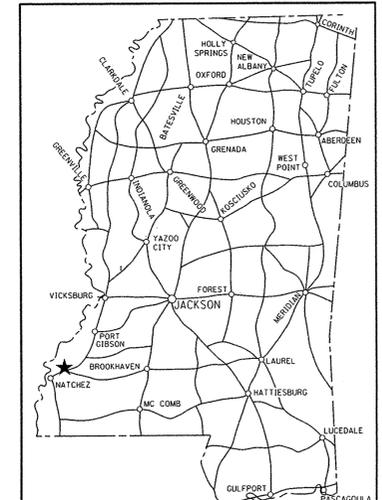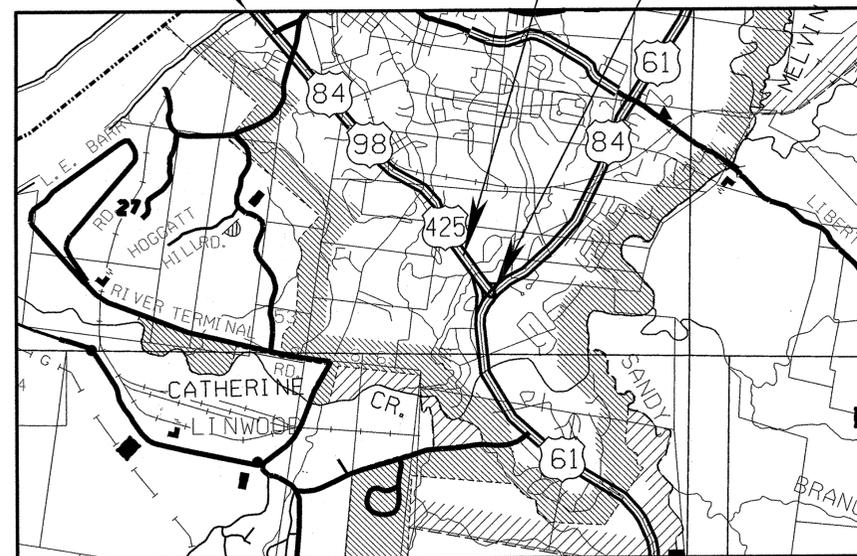

NOTE  
★ INDICATES APPROXIMATE LOCATION OF PROJECT.  
LAT. 31° 32' N LONG. 91° 23' W  
(APPROX. MIDDLE OF PROJECT)

PERMITS ACQUIRED BY MDOT		
WETLANDS AND WATERS PERMITS (NECESSARY FOR ULTIMATE IMPROVEMENTS ONLY):		
	WATERS	WETLANDS
NATIONWIDE #14	N	N
NATIONWIDE (OTHER)*	N	N
GENERAL*	N	N
INDIVIDUAL (404)*	N	N
* ACQUISITION OF PERMITS FOR TEMPORARY IMPACTS DURING CONSTRUCTION ARE THE RESPONSIBILITY OF THE CONTRACTOR		
STORMWATER PERMIT <input checked="" type="checkbox"/>		
Y	REQUIRED, CMO SUBMITTED BY MDOT (DISTRIBUTED AREA > 5 ACRES + INTD 6484)	
S	REQUIRED, SCMO TO BE SUBMITTED BY CONTRACTOR (1 TO 4.99 ACRES) (INTD 6483)	
N	NO STORMWATER PERMIT REQUIRED (<1 ACRE)	
APPROVED BY: JCT DATE: 9/15/09		

**CONVENTIONAL SYMBOLS**

- COUNTY LINE .....
- TOWN CORPORATION LINE .....
- SECTION LINE .....
- EXISTING ROAD OR TRAVELED WAY - - - - -
- PROPOSED ROAD OR TRAVELED WAY \_\_\_\_\_
- RAILROAD .....
- SURVEY LINE .....
- BRIDGES .....

**LENGTH DATA**

LENGTH OF ROADWAY	— FT.	0.475 MI.
LENGTH OF BRIDGES	— FT.	0.000 MI.
LENGTH OF PROJECT (NET)	— FT.	0.475 MI.
LENGTH OF EXCEPTIONS	— FT.	0.000 MI.
LENGTH OF PROJECT (GROSS)	— FT.	0.475 MI.

**EXCEPTIONS**  
NONE

108

APPROVED: *Michelle M. Smith* 9/17/09  
CHIEF ENGINEER DATE

APPROVED: *Ray R. Brown* 9/17/09  
EXECUTIVE DIRECTOR DATE

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

APPROVED: \_\_\_\_\_ DATE \_\_\_\_\_  
DIVISION ADMINISTRATOR  
FEDERAL HIGHWAY ADMINISTRATION  
DEPARTMENT OF TRANSPORTATION

8/15/2009 09:22:05 TITLE.DGN MISSISSIPPI DEPARTMENT OF TRANSPORTATION

1st O. REV.

DESCRIPTION OF SHEET

WKG. NO. SH. NO.

TITLE SHEET (1)		1
DETAILED INDEX & GENERAL NOTES (3)		
DETAILED INDEX	DI-1	2
GENERAL NOTES	GN-1	3
GENERAL NOTES	GN-2	4
QUANTITY SHEETS (4)		
SUMMARY OF QUANTITIES	SQ-1	5
ESTIMATED QUANTITIES - ROADWAY LIGHTING	EQ-1	6
ESTIMATED QUANTITIES - ROADWAY LIGHTING	EQ-2	7
ESTIMATED QUANTITIES FOR TRAFFIC CONTROL SIGNS	TCPQ-1	8
ALIGNMENT LAYOUT (4)		
ALIGNMENT LAYOUT	ALI-1	9
ALIGNMENT LAYOUT	ALI-2	10
ALIGNMENT LAYOUT	ALI-3	11
ALIGNMENT LAYOUT	ALI-4	12
LIGHTING PLAN SHEETS (16)		
LIGHTING KEY PLAN	L-1	13
LIGHTING PLAN	L-2	14
LIGHTING PLAN	L-3	15
LIGHTING PLAN	L-4	16
LIGHTING PLAN	L-5	17
LIGHTING PLAN	L-6	18
LIGHTING PLAN	L-7	19
LIGHTING PLAN	L-8	20
LIGHTING PLAN	L-9	21
LIGHTING PLAN	L-10	22
LIGHTING PLAN	L-11	23
LIGHTING PLAN	L-12	24
LIGHTING PLAN	L-13	25
LIGHTING PLAN	L-14	26
LIGHTING PLAN	L-15	27
LIGHTING PLAN	L-16	28
LIGHTING DETAIL SHEETS (3)		
SECONDARY POWER CONTROLLER DETAILS	LD-1	29
FOUNDATION/PULLBOX LIGHTING DETAIL	LD-2	30
ROADWAY LIGHTING POLE DETAIL	LD-3	31

DESCRIPTION OF SHEET

WKG. NO. SH. NO.

LANDSCAPE PLAN SHEETS (22)		
LANDSCAPE KEY PLAN	SP1	32
LANDSCAPE KEY PLAN	SP2	33
LANDSCAPE KEY PLAN	SP3	34
LANDSCAPE PLAN	LA1	35
LANDSCAPE PLAN	LA2	36
LANDSCAPE PLAN	LA3	37
LANDSCAPE PLAN	LA4	38
LANDSCAPE PLAN	LA5	39
LANDSCAPE PLAN	LA6	40
LANDSCAPE PLAN	LA7	41
LANDSCAPE PLAN	LA8	42
LANDSCAPE PLAN	LA9	43
LANDSCAPE PLAN	LA10	44
LANDSCAPE PLAN	LA11	45
LANDSCAPE PLAN	LA12	46
LANDSCAPE PLAN	LA13	47
LANDSCAPE PLAN	LA14	48
LANDSCAPE PLAN	LA15	49
LANDSCAPE PLAN	LA16	50
LANDSCAPE PLAN	LA17	51
LANDSCAPE PLAN	LA18	52
LANDSCAPE PLAN	LA19	53
CONSTRUCTION SIGNING SHEETS (2)		
CONSTRUCTION SIGNING	DCS-1	54
CONSTRUCTION SIGNING	DCS-2	55
MICS DETAIL SHEETS (4)		
65 MPH (4-LANE:MEDIAN LANE OR OUTSIDE LANE CLOSURE) (WORK DAY ONLY)	TCP-2	56
HIGHWAY SIGN AND BARRICADE DETAILS FOR CONSTRUCTION PROJECTS	TCP-10	57
TRAFFIC CONTROL PLAN MOBILE OPERATIONS MULTILANE ROADS AND TWO-LANE ROADS	TCP-11	58
LOCATION OF R16-3 SIGNS	MDS-1	59
VEGETATION SCHEDULE	VS-1	60

ROADWAY DESIGN DIVISION  
MISSISSIPPI DEPARTMENT OF TRANSPORTATION

10/22/2009 13:37:20 I:INDEX.DGN

PS & E PLANS-DATE: 9/10/09		
FMS CON. # 105579/301000		
REVISIONS		
DATE	SHEET NO.	BY
10/14/09	3-7, 14-25	BHF
10/22/09	5, 60	BHF

MISSISSIPPI DEPARTMENT OF TRANSPORTATION <b>HWY 84 LIGHTING AND LANDSCAPE          DETAILED INDEX</b>		WORKING NUMBER	
		DI-1	
PROJECT NO.: STP-0015-01(065)		SHEET NUMBER	
COUNTY : ADAMS		2	
DATE	FILENAME: INDEX.DGN	DESIGN TEAM	CHECKED
10/22/09		ABMB	

1 st O. REV.

STATE	PROJECT NO.
MISS.	STP-0015-01(065)

**GENERAL NOTES:**

1. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO PROTECT EXISTING STRUCTURES NOT DESIGNATED FOR DEMOLITION/UPGRADE SUCH AS PIPES, INLETS, APRONS, BRIDGES, UTILITIES, ETC. FROM DAMAGE WHICH MIGHT OCCUR DURING CONSTRUCTION. EXTREME CARE SHALL BE EXERCISED IN UNDERCUT AREAS AND THE UNDERCUT DEPTH MAY BE ADJUSTED AT CROSS DRAINS, AS DIRECTED BY THE ENGINEER. THE CONTRACTOR SHALL REPLACE OR REPAIR, AS DIRECTED BY THE ENGINEER, ANY STRUCTURES DAMAGED DURING THE LIFE OF THE CONTRACT. NO PAYMENT WILL BE MADE FOR REPLACEMENT OR REPAIR OF DAMAGED ITEMS.
2. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ALL LAYOUT AS DETAILED IN THESE CONSTRUCTION DOCUMENTS FOR THE PROJECT.
3. THE CONTRACTOR WILL BE PERMITTED TO USE WATER THAT IS AVAILABLE ON THE SITE DURING THE PLANTING AND ESTABLISHING OF THE TREES AND SHRUBS. THE CONTRACTOR SHALL CONFORM TO ALL APPLICABLE CITY/COUNTY, STATE AND FEDERAL CODES AND REGULATORY REQUIREMENTS IN REGARD TO ENVIRONMENTAL AND DISPOSAL OF DEBRIS. THE CONTRACTOR SHALL PROVIDE TREE PROTECTION DURING CONSTRUCTION.
4. ALL SILT FENCE SHALL CONTAIN WIRE BACK IN ACCORDANCE WITH WK. NO. TEC-1.
5. IT SHALL BE THE CONTRACTOR'S SOLE RESPONSIBILITY TO VERIFY THE EXISTENCE OF AND THE EXACT LOCATION OF ALL UTILITIES WITHIN AND ADJACENT TO THE PROJECT. THE CONTRACTOR MUST CONTACT ALL UTILITY COMPANIES FORTY-EIGHT HOURS PRIOR TO COMMENCEMENT OF CONSTRUCTION AND HAVE THEIR FACILITIES LOCATED IN THE FIELD PRIOR TO ANY WORK. ANY REQUEST FOR UNDERGROUND UTILITIES SHOULD BE MADE THROUGH MISSISSIPPI ONE CALL (1-800-227-6474) BEFORE DIGGING.
6. EXISTING UNDERGROUND UTILITY LINE ARE SHOWN ON THE DRAWINGS BASED UPON THE BEST INFORMATION AVAILABLE TO THE ENGINEER. THE ENGINEER CAN NOT AND DOES NOT WARRANT THAT THIS INFORMATION IS COMPLETE OR ACCURATE. THE CONTRACTOR MUST COORDINATE DIRECTLY WITH THE INVOLVED UTILITY OWNERS TO HAVE UNDERGROUND UTILITY LINES FIELD LOCATED IN ADVANCE OF CONSTRUCTION.
7. FLUORESCENCE ORANGE SHEETING SHALL BE USED ON ALL CONSTRUCTION AND TRAFFIC SIGNS EXCEPT FOR THOSE DESIGNATED ON THE PLANS TO BE LACK LEGEND AND BORDER ON WHITE BACKGROUND.
8. THE COST OF INCIDENTAL CLEARING AND GRUBBING TO BE ABSORBED IN OTHER ITEMS.
9. THE CONTRACTOR SHALL REPAIR ANY DAMAGE TO THE SURFACE TREATED SHOULDER WHICH MIGHT OCCUR DURING CONSTRUCTION. ANY REPAIR TO SHOULDER WILL BE IN ACCORDANCE WITH SECTION 410 OF THE MISSISSIPPI STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION. NO PAYMENT WILL BE MADE FOR REPAIR OF DAMAGED SHOULDER.
10. THE CONTRACTOR IS TO REMOVE AND RESET ANY SIGNS WHICH CONFLICT WITH CONSTRUCTION AS DIRECTED BY THE ENGINEER. THE COST IS TO BE ABSORBED IN OTHER ITEMS BID.
- △ 11. THE CONTRACTOR SHALL COORDINATE WITH CONTRACTORS FROM ADJACENT PROJECTS IN IMPLEMENTING THE TRAFFIC CONTROL PLAN AS DIRECTED BY THE ENGINEER.
12. ALL SITE GRADING IS TO BE DIRECTED BY THE ENGINEER AND ABSORBED.

PLAN ROADWAY DESIGN DIVISION MISSISSIPPI DEPARTMENT OF TRANSPORTATION

10/13/2009 1.5.07.06 GEN. NOTES.DGN

		MISSISSIPPI DEPARTMENT OF TRANSPORTATION	
		HWY 84 LIGHTING AND LANDSCAPE	
		<b>GENERAL NOTES</b>	
		PROJECT NO. : STP-0015-01(065)	
		COUNTY : ADAMS	
		WORKING NUMBER GN-1	
		FILENAME: GENOTES.DGN	
		SHEET NUMBER 3	
		DESIGN TEAM ABMB CHECKED DATE	

