FED. ROAD REG. NO.	STATE	PROJECT NO.	SHEET NO.
4	MISS.	STP-0073-01(001)	1

STATE OF MISSISSIPPI

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

PLAN AND PROFILE OF PROPOSED STATE HIGHWAY FEDERAL AID PROJECT NO. STP-0073-01(001)

FMS 105929/301000

OVERLAY AND WIDENING OF HWY. 9W
FROM JCT. 9 & 9W TO CALHOUN/LAFAYETTE CO. LINE

CALHOUN COUNTY

SCALES

PLAN		1 IN. = 100 FT.
PROFILE	HOR.	1 IN. = 100 FT.
	VERT.	1 IN. = 10 FT.
LAYOUT		1 IN. = 8800 FT.

E.O.P. STATION 660+72

B.O.P. STATION 54+55.6

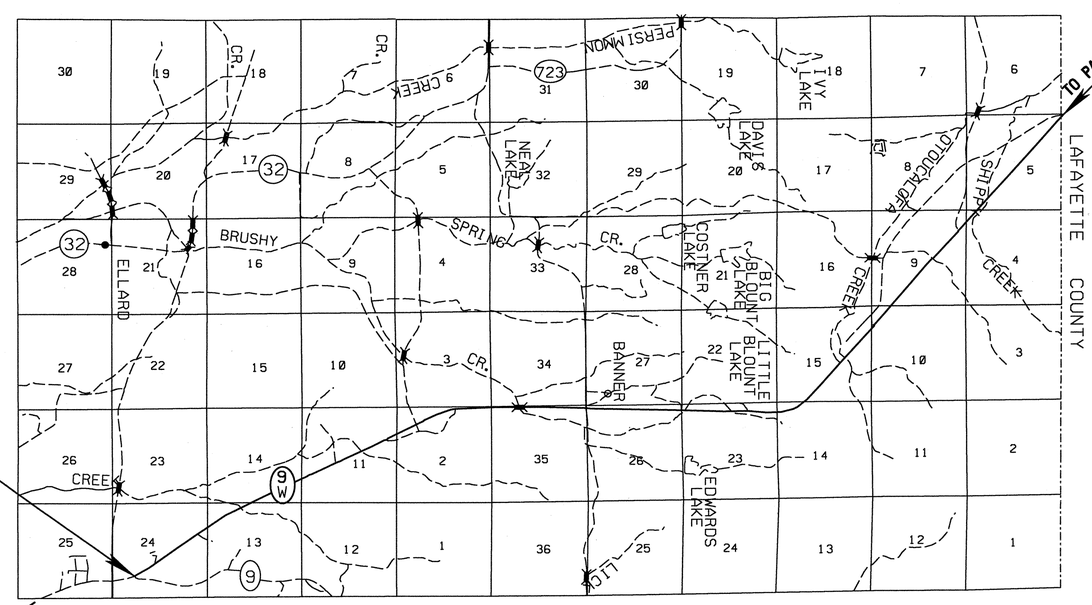

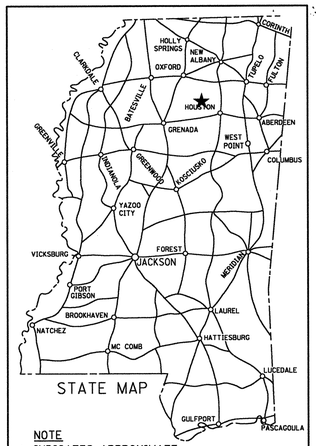

NOTE
★ INDICATES APPROXIMATE LOCATION OF PROJECT.

LAT. 34°10′ LONG. 89°22′
(APPROX. MIDDLE OF PROJECT)

DESIGN CONTROL

_____ MPH = V (SPEED DESIGN)

ADT (___) = _____ : ADT (___) = _____

DHV = _____ : D = _____% T = _____%

PERMITS ACQUIRED BY MDOT

WETLANDS AND WATERS PERMITS (NECESSARY FOR ULTIMATE IMPROVEMENTS ONLY):

	WATERS	WETLANDS
NATIONWIDE #14	N	N
NATIONWIDE (OTHER)*	N	N
GENERAL*	N	N
INDIVIDUAL (404)*	N	N

* ACQUISITION OF PERMITS FOR TEMPORARY IMPACTS DURING CONSTRUCTION ARE THE RESPONSIBILITY OF THE CONTRACTOR

STORMWATER PERMIT [N]

Y	REQUIRED, CNOI SUBMITTED BY MDOT (DISTRIBUTED) AREA = 5 ACRES +)(NTB 586)
S	REQUIRED, SCNOI TO BE SUBMITTED BY CONTRACTOR (1 TO 4.99 ACRES)(NTB 14)
N	NO STORMWATER PERMIT REQUIRED (<1 ACRE)

APPROVED BY: J.C.T. DATE: 6/4/10

CONVENTIONAL SYMBOLS

COUNTY LINE .....
TOWN CORPORATION LINE .....
SECTION LINE .....
EXISTING ROAD OR TRAVELED WAY .....
PROPOSED ROAD OR TRAVELED WAY .....
RAILROAD .....
SURVEY LINE .....
BRIDGES .....

EQUATIONS

STA. 321+94.25 BK. = STA. 322+03.68 AH. = -9.43'

EXCEPTIONS

NONE

LENGTH DATA

LENGTH OF ROADWAY	FT.	11.479 MI.
LENGTH OF BRIDGES	FT.	MI.
LENGTH OF PROJECT (NET)		11.479 MI.
LENGTH OF EXCEPTIONS	FT.	MI.
LENGTH OF PROJECT (GROSS)		11.479 MI.

2

REVISIONS | BY | DATE

APPROVED:
CHIEF ENGINEER — DATE 6/22/10

EXECUTIVE DIRECTOR — DATE 6/22/10

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

APPROVED:
DIVISION ADMINISTRATOR — DATE

FEDERAL HIGHWAY ADMINISTRATION
DEPARTMENT OF TRANSPORTATION

TITLE
ROADWAY DESIGN DIVISION
MISSISSIPPI DEPARTMENT OF TRANSPORTATION

6/22/2010 10:26:17 001TITLE.DGN

STATE	PROJECT NO.
MISS.	STP-0073-01(001)

DESCRIPTION OF SHEET	REVISION	WKG. NO.	SH. NO.
TITLE SHEETS (1)			
TITLE SHEET			1
DETAILED INDEX & GENERAL NOTES SHEET (2)			
DETAILED INDEX		DI-1	2
GENERAL NOTES		GN-1	3
TYPICAL SECTION SHEETS (1)			
TYPICAL SECTION MAINLINE		TS-1	4
QUANTITY SHEETS (2)			
SUMMARY OF QUANTITY		SQ-1	5
SUMMARY OF QUANTITY		SQ-2	6
SPECIAL DESIGN SHEETS (5)			
DETAIL OF CONSTRUCTION SIGNING		DCS-1	7
MISCELLANEOUS DETAIL		MDS-1	8
RUMBLE STRIPE (GROUND-IN) 2-LANE WITH PAVED SHOULDERS		RS-2La	9
BRIDGE APPROACH DETAIL		BAD-1	10
LOCATION OF R16-3 SIGNS		SSD-1	11

DESCRIPTION OF SHEET	REVISION	WKG. NO.	SH. NO.
STANDARD DRAWING SHEETS (6)			
PAVEMENT MARKING DETAILS FOR 2 & 4-LANE DIVIDED ROADWAYS	(12-01-99)	PM-1	120
TYPICAL INSTALLATION AND DETAILS OF DELINEATORS AND DISTANCE REFERENCE SIGNS		SN-8	233
TRAFFIC CONTROL PLAN WITH FLAGGER (ONE-LANE OF TWO-WAY TRAFFIC)		TCP-1	250
SHORT DURATION CLOSING OF TWO-LANE TWO-WAY HIGHWAYS		TCP-8	257
HIGHWAY SIGN & BARRICADE DETAILS FOR CONSTRUCTION PROJECTS		TCP-10	259
TEMPORARY STRIPING FOR TRAFFIC CONTROL 2-LANE & 4-LANE DIVIDED HIGHWAYS	(12-01-99)	TCP-15	264
TOTAL SHEETS (17)			

PLAN
ROADWAY DESIGN DIVISION C.A.D.D. SECTION
MISSISSIPPI DEPARTMENT OF TRANSPORTATION

M. FORD

PS & E PLANS-DATE 06/22/10		
FMS CON. #105929/301000		
REVISIONS		
DATE	SHEET NO.	BY

2

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

DETAILED INDEX

PROJECT NO.: STP-0073-01(001)
COUNTY : CALHOUN

DATE	REVISION	BY

FILENAME: DETAILEDINDEX.DGN
DESIGN TEAM _____ CHECKED _____ DATE _____

WORKING NUMBER: DI-1
SHEET NUMBER: 2

STATE	PROJECT NO.
MISS.	STP-0073-01(001)

GENERAL NOTES:

1. THE CONTRACTOR SHALL MAKE A MISSISSIPPI ONE-CALL REQUEST PRIOR TO ANY EXCAVATION OPERATION, EXCEPTING BOTH TRENCH WIDENING AND PAVEMENT REMOVAL AND REPAIR.

2. ANY INCIDENTAL OR NECESSARY GRADING OF ROADWAY DITCHES TO BE ABSORBED IN OTHER PAY ITEMS.

3. THE COST OF CLEARING AND GRUBBING TO BE ABSORBED IN OTHER PAY ITEMS.

4. BIDDERS ARE ADVISED THAT CROSS-SLOPES FOR CURVE SUPERELEVATIONS ARE TO BE BUILT IN ACCORDANCE WITH INFORMATION PROVIDED BY THE DEPARTMENT.
   TO ASSIST THE CONTRACTOR IN CORRECTLY PLACING THE CROSS SLOPE TRANSITIONS, THE DEPARTMENT WILL PROVIDE, AT THE PRE-CONSTRUCTION CONFERENCE, STATIONING AND PERCENT SLOPE INFORMATION.
   SUFFICIENT MILLING, PRE-LEVELING, AND/OR LEVELING QUANTITIES ARE PROVIDED, ON SHEET 5, IN THIS CONTRACT TO FACILITATE THIS WORK. ALL TRANSITION CROSS-SLOPES ARE TO BE ESTABLISHED AND CHECKED PRIOR TO PLACEMENT OF THE TOP LIFT OF PAVEMENT.

5. IN ORDER TO EXPEDITE THE SAFE MOVEMENT OF TRAFFIC AND TO PROTECT EACH PHASE OF THE WORK AS IT IS PERFORMED, A FIRM SEQUENCE OF OPERATIONS IS ESSENTIAL. THE WORK SHALL BE BEGUN AND CONTINUALLY PROSECUTED.

6. REMOVE ANY MATERIAL PRODUCED FROM THE EXCAVATION OPERATION FOR TRENCH WIDENING THAT CANNOT BE REASONABLY ANTICIPATED TO BE USED AS PART OF THE FINAL SHOULDER.
   THIS REMOVAL SHALL BE ACCOMPLISHED SIMULTANEOUS WITH THE EXCAVATION OPERATION. MATERIAL THAT CANNOT REASONABLY BE ANTICIPATED TO BE USED IN THE FINAL SHOULDER SHALL NOT REMAIN ROLLED UP ON THE EXISTING SHOULDER OR BLADED DOWN THE SLOPE. THERE WILL BE NO SEPARATE PAYMENT FOR THIS WORK WHICH WILL BE INCLUDED IN THE COST OF THE TRENCH WIDENING OPERATIONS.

7. TRENCH WIDENING EXCAVATION MAY INCLUDE THE REMOVAL OF ASPHALT ALONG THE SHOULDER DUE TO PREVIOUS MAINTENANCE REPAIRS. THERE WILL BE NO SEPARATE PAYMENT FOR THIS WORK WHICH WILL BE INCLUDED IN THE COST OF THE TRENCH WIDENING OPERATIONS.

8. SHOULDERS SHALL BE BLADED, SHAPED AND COMPACTED THROUGHOUT THE LENGTH OF THE PROJECT REGARDLESS OF WHETHER GRANULAR MATERIAL IS REQUIRED. MORE MATERIAL THAN IS NECESSARY TO PROPERLY ESTABLISH THESE SHOULDERS MAY RESULT FROM THE FINAL GRADING OF THE SHOULDERS. SOME OF THIS MATERIAL MAY BE REMOVED FROM THE PROJECT. MATERIAL REMOVED FROM THE PROJECT WILL BE PAID FOR AS 203-G, EXCESS EXCAVATION (LVM) (AH). THIS ITEM MAY INCLUDE SMALL AMOUNTS OF ASPHALT THAT MAY BE WITHIN THESE EXCAVATION LIMITS.

9. ALL DRIVEWAY PADS ARE TO BE PAVED A MAXIMUM DISTANCE OF TEN (10) FEET OR TO THE EXISTING RIGHT OF WAY AND SHALL BE TAPERED TO FIT EXISTING CONDITIONS, ALLOWING SMOOTH ENTRY AND EXIT. SEE THE ATTACHED MISCELLANEOUS DETAIL, ON SHEET NO. 8.
   COUNTY ROADS AND/OR CITY STREETS ARE TO BE PAVED AND/OR MILLED TO THE RIGHT-OF-WAY LINE.

10. HIGHWAYS, COUNTY ROADS AND/OR CITY STREETS MAY REQUIRE NEW STRIPE.

11. THE CONTRACTOR SHALL PROVIDE ALL SIGNS AND TRAFFIC HANDLING DEVICES NECESSARY TO SAFELY MAINTAIN TRAFFIC AROUND OR THROUGH THE WORK AREAS.

12. INCIDENTAL WORK SUCH AS REMOVING VEGETATION, SHAPING AND COMPACTION OF SHOULDERS, INCIDENTAL GRADING OF DRIVEWAYS FOR POSITIVE DRAINAGE AND SLOPE, AND OTHER INCIDENTAL WORK THAT IS NECESSARY TO COMPLETE THE WORK WILL NOT BE MEASURED FOR SEPARATE PAYMENT AND THE COST WILL BE INCLUDED IN THE ITEMS BID.

13. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO PROTECT THE ROADWAY AND ALL EXISTING STRUCTURES SUCH AS BRIDGES, CURBS AND OTHER FEATURES FROM DAMAGE WHICH MIGHT OCCUR DURING CONSTRUCTION.
   THE CONTRACTOR SHALL REPLACE OR REPAIR ANY STRUCTURES OR PORTION OF THE ROADWAY DAMAGED AS A RESULT OF CONTRACTOR'S OPERATIONS DURING THE LIFE OF THE CONTRACT.
   NO PAYMENT WILL BE MADE FOR REPLACEMENT OR REPAIR OF DAMAGED ITEMS CAUSED BY THE CONTRACTOR'S OPERATIONS.

14. DUE CARE SHALL BE TAKEN DURING BOTH THE TRENCH WIDENING AND GRANULAR MATERIAL OPERATIONS TO BLADE MATERIAL TOWARD THE ROADWAY AND AWAY FROM THE DITCH LINE.
   MATERIAL SHALL BE REMOVED FROM THE ROADWAY GRASS IF INADVERTENTLY BLADED THERE.

15. AT BRIDGE ENDS AND AT THE END OF WORK DAYS, THE CONTRACTOR SHALL PROVIDE A TAPER AT ANY VERTICAL JOINT ON A THREE (3) FOOT TO ONE (1) INCH VERTICAL SLOPE.

16. SHOULD MILLING BE REQUIRED WITHIN A CURB AND GUTTER SECTION, THE CONTRACTOR SHALL CONTINUOUSLY KEEP THE TRAVEL SURFACE FREE FROM SURFACE WATER. THIS MAY REQUIRE CONTINUOUS TWENTY-FOUR (24) HOUR MONITORING AND SWEEPING OF THE PROJECT.

PLAN
ROADWAY DESIGN DIVISION C.A.D.D. SECTION
MISSISSIPPI DEPARTMENT OF TRANSPORTATION

REVISION	BY	DATE

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

GENERAL NOTES

PROJECT NO.: STP-0073-01(001)
COUNTY : CALHOUN

WORKING NUMBER GN-1
SHEET NUMBER 3

FILENAME: Generalnotes.DGN
DESIGN TEAM _____ CHECKED _____ DATE _____