BEGIN WITH

SHEET

STATE OF MISSISSIPPI


		^ =	
/IISSISSIPPI	DEPARTMENT	Oŀ.	TRANSPORTATION

PLAN AND PROFILE OF PROPOSED STATE HIGHWAY (RESERVED) 5001 FEDERAL AID PROJECT NO. IM-0010-01(151)

I-10 AT ALABAMA STATE LINE FMS CONST 107074/301000

PAVEMENT RESTORATION

SCALES						
PLAN		1 IN.=				
PROFILE $\Big\{$	HOR. VERT.	1 IN.= 1 IN.=	100 N⁄A	FT.		
LAYOUT		1 IN.=	N/A			

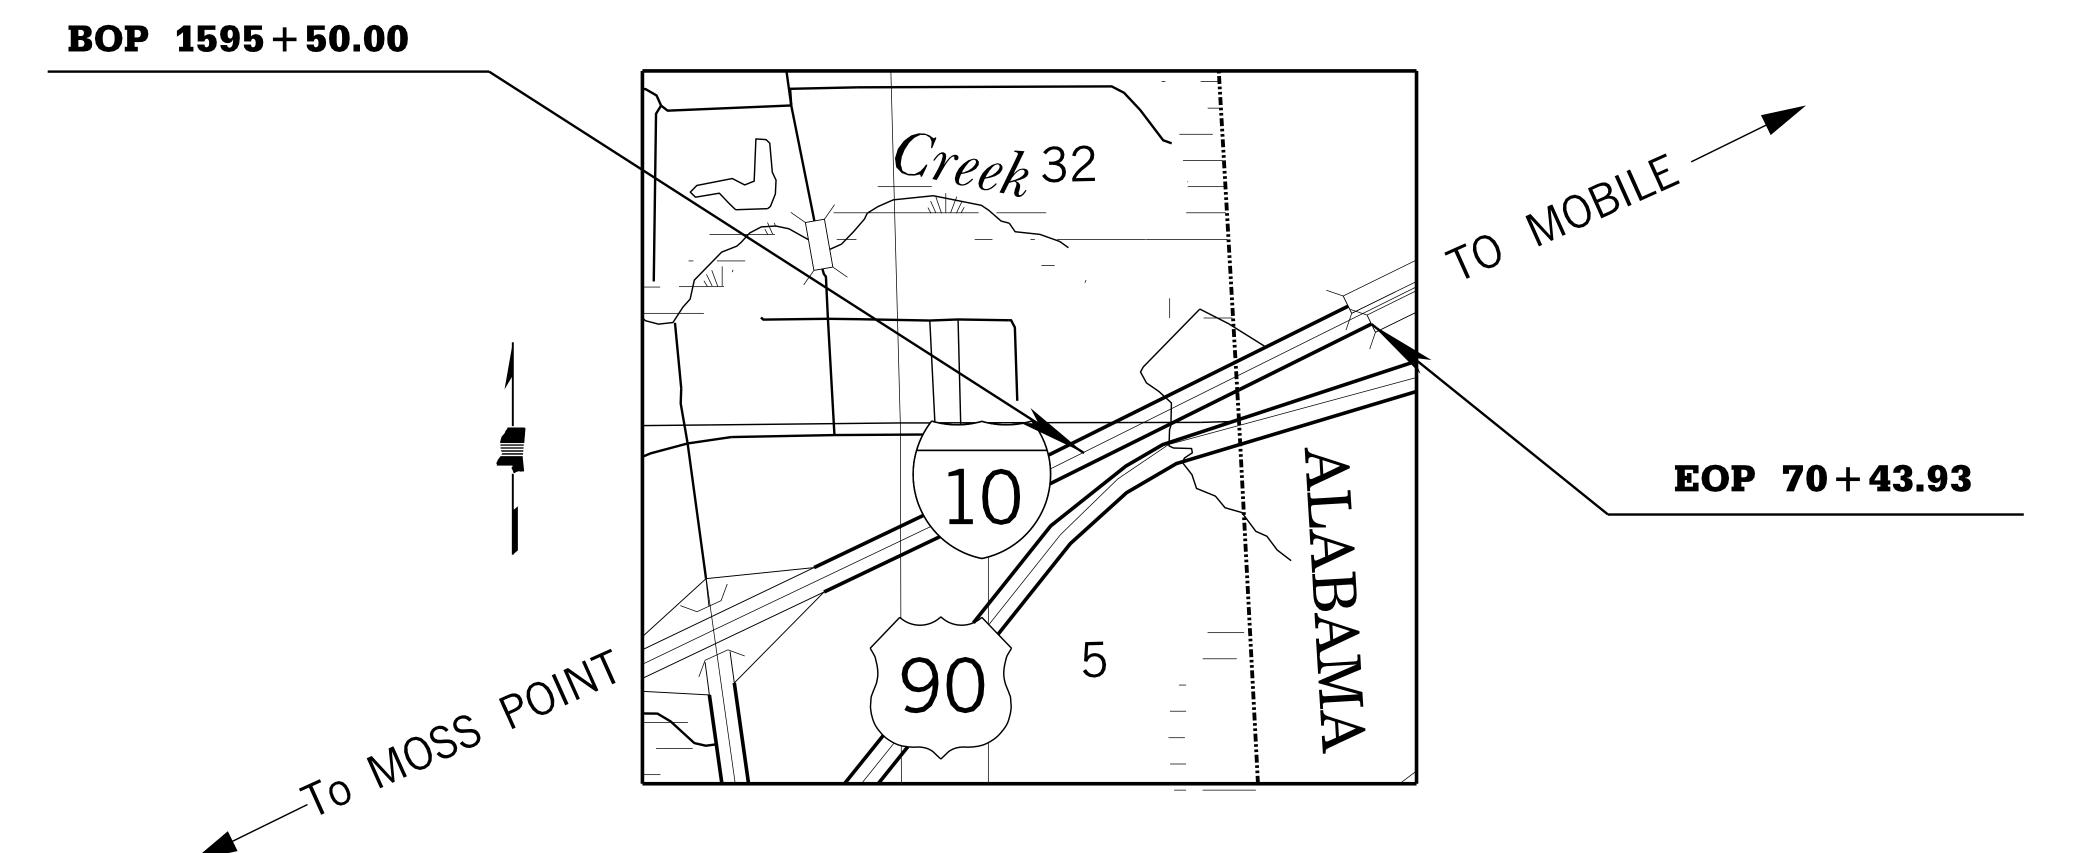

EQUATIONS

EXCEPTIONS


NONE


STA. 1598 + 99.15 BK. = STA. 56 + 00 AH. = -154,299.15 FT.


LENGTH DATA

LENGTH OF	ROADWAY	1,793.08	FT.	Ø.340 MI.
LENGTH OF	BRIDGES		FT.	MI.
LENGTH OF	PROJECT (NET)			MI.
LENGTH OF	EXCEPTIONS		FT.	MI.
LENGTH OF	PROJECT (GROSS)	1,793.08	FT.	Ø.340 MI.

PROJECT NUMBER IM-0010-01(151)

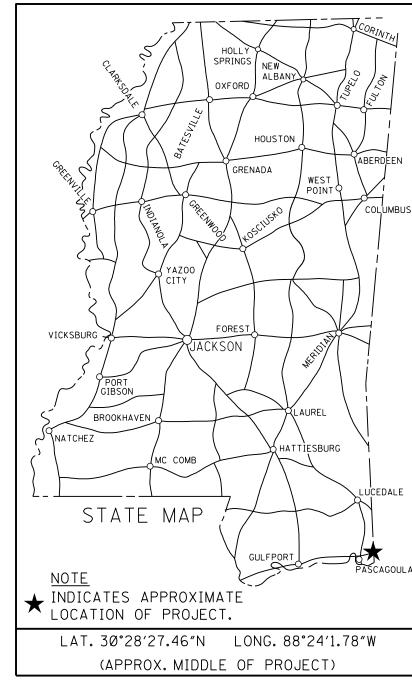

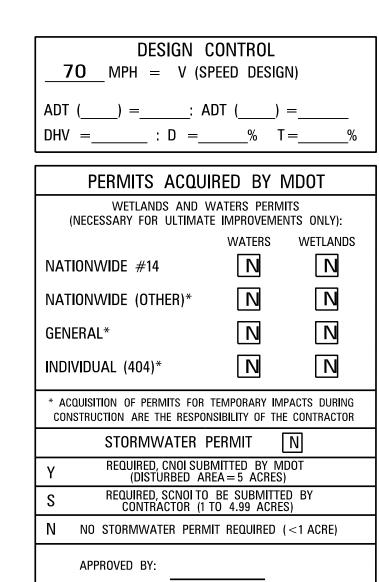

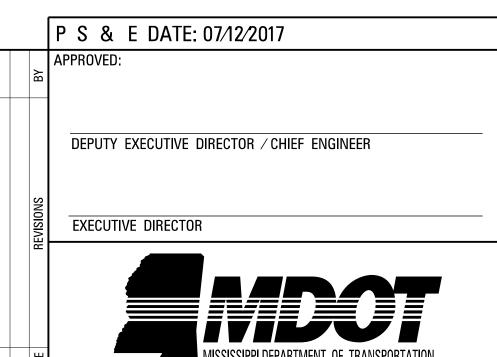

STATE	PROJECT	NO.
MISS.	IM-ØØ1Ø-Ø1(1	.51)

DESCRIPTION OF SHEET	REVISION DATE	WKG. NO.	SH. NO.
TITLE SHEET (1)			1
DETAIL INDEX AND GENERAL NOTES (2)			
DETAIL INDEX GENERAL NOTES		DI-1 GN-1	2 3
TYPICAL SECTIONS (4)			
TYPICAL SECTION - MAIN FACILITY		TS-1	4
TYPICAL SECTION - PAVING DETAILS TYPICAL SECTION - RUMBLE STRIPS DETAILS		TS-2 TS-3	5
TYPICAL SECTION - PAVING DETAILS AT SCALE RAMP		TS-4	7
QUANTITY SHEETS (4) SUMMARY OF QUANTITIES SUMMARY OF QUANTITIES ESTIMATED QUANTITIES - CONCRETE PUNCHOUTS		SQ-1 SQ-2 EQ-1	8 9 10
ESTIMATED QUANTITIES - TRAFFIC CONTROL SIGNS		TCP-EQ	11
PLAN & PROFILE SHEETS (1)			
STA. 1595+50.00 (B.O.P.) TO STA. 70+43.93 (E.O.P.)		WK3	12
SPECIAL DESIGN SHEETS (6)			
DETAIL OF EXISTING 9" REINFORCED CONCRETE PAVEMENT REPAIR DETAIL OF EXISTING REINFORCED CONCRETE PAVEMENT JOINT REPAIR TRAFFIC CONTROL PLAN - DETAILS FOR CONSTRUCTION SIGNING PAVEMENT MARKING DETAILS FOR INTERCHANGE EXIT RAMPS(PARALLEL AND TAPERS) HIGHWAY SIGN AND BARRICADE DETAILS FOR CONSTRUCTION PROJECTS TRAFFIC CONTROL DETAILS - DRUM PLACEMENT AND SHOULDER CLOSURE		PR-1 PR-2 TCP-17 SDPM-4 SDTCP-10 TCP-SC	13 14 15 16 17 18
STANDARD DRAWINGS (10)			
PAVEMENT MARKING DETAILS FOR 2-LANE AND 4-LANE DIVIDED HIGHWAYS	(12-Ø1-99)	PM-1	6120
GUARDRAIL: "W" BEAM (STEEL POSTS) GUARDRAIL: TYPICAL INSTALLATION AT BRIDGE APPROACHES FOR DIVIDED HIGHWAYS GUARDRAIL: MISCELLANEOUS HARDWARE TYPICAL GUARDRAIL DELINEATION TRAFFIC CONTROL PLAN FOR POSTED SPEED LIMIT OF 65 OR 70 MPH (INTERSTATES AND OTHER 4-LANE DIVIDED HIGHWAYS)(MEDIAN LANE OR OUTSIDE	(Ø3-Ø1-Ø2) (12-Ø1-99) (Ø3-Ø1-Ø2) (Ø3-Ø1-Ø2)	GR-1B GR-4 GR-HW SN-8C TCP-5	6182 6194 6202 6236 6254
LANE CLOSURE)(WORK DAY ONLY) TRAFFIC CONTROL PLAN - MOBILE OPERATIONS; MULTILANE ROADS AND TWO-LANE ROADS DETAILS OF OUTSIDE LANE CLOSURE AT EXIT AND ENTRANCE RAMPS	(12-Ø1-99)	TCP-11 TCP-12	626Ø 6261
TRAFFIC CONTROL PLANS FOR UNEVEN PAVEMENT DETAILS TEMPORARY STRIPING FOR TRAFFIC CONTROL 2-LANE AND 4-LANE DIVIDED HIGHWAYS		TCP-14 TCP-15	6263 6264
TOTAL NUMBER OF SHEETS (28)			

\prod		ВҮ	MISSISSIPPI DEPARTMENT OF DETAILED INDEX	TRANSPORTATION
		REVISION	COUNTY: JACKSON	OF TRANSPOR
				WORKING NUMBE
			PROJ. NUM.: IM-ØØ1Ø-Ø1(151)	D1-1
П		ΤE	FILENAME: DI.DGN	SHEET NUMBER
		DΑ	DESIGN TEAM CHECKED DATE	l 2

ROADWAY DESIGN DIVISION

STATE	PROJECT	NO
MISS.	IM-0010-010	(151)

GENERAL NOTES

- 1. THE LOCATION AND SPACING OF SIGNS SHOWN ON THE TRAFFIC CONTROL PLAN ARE APPROXIMATE AND MAY BE ADJUSTED TO SUIT FIELD CONDITIONS.
- 2. THE CONTRACTOR IS TO REMOVE AND RESET ANY SIGNS WHICH CONFLICT WITH CONSTRUCTION. (NOT A SEPARATE PAY ITEM)
- 3. TEMPORARY STRIPING SHALL CONFORM TO FINISHED STRIPE SPECIFICATIONS FOR ALIGNMENT. NEATNESS AND STRAIGHTNESS.
- 4. PRIOR TO PLACEMENT OF THE ASPHALT, ALL RAISED PAVEMENT MARKERS THROUGHOUT THE PROJECT SHALL BE REMOVED, PATCH SPALLING AT TRANSVERSE AND LONGITUDINAL PAVEMENT JOINTS, AND CLIP BULGING ASPHALT AT PAVEMENT JOINTS (COST ABSORBED).
- 5. THE CONTRACTOR SHALL PROVIDE 2 PORTABLE R16-3 SIGNS REQUIRED BY THE STANDARD DRAWINGS FOR LANE CLOSURES (THE COST IS TO BE INCLUDED IN THE PRICE BID FOR PAY ITEM NO. 618-A, MAINTENANCE OF TRAFFIC).
- 6. CONES SHALL BE NARROW PROFILE WITH A MINIMUM HEIGHT OF 28 INCHES AND A MINIMUM WEIGHT OF TEN (10) POUNDS. CONES EQUAL TO OR GREATER THAN 45 MPH SHALL BE NARROW PROFILE WITH A MINIMUM HEIGHT OF 28 INCHES AND A MINIMUM WEIGHT OF FIFTEEN (15) POUNDS. ALL CONES SHALL BE APPROVED BY THE ENGINEER PRIOR TO USE.
- 7. WHERE MILLING OF THE ROADWAY LANES IS REQUIRED, THE CONTRACTOR SHALL PROVIDE OUTLETS IN THE EXISTING SHOULDERS AT SUFFICIENT INTERVALS TO PREVENT POOLING OR STANDING WATER ON THE MILLED SURFACE (NOT A SEPARATE PAY ITEM).
- 8. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO PROTECT EXISTING STRUCTURES SUCH AS PIPES, INLETS, APRONS, BRIDGES, ETC. FROM DAMAGE WHICH MIGHT OCCUR DURING CONSTRUCTION. EXTREME CARE SHALL BE EXERCISED IN UNDERCUT AREAS AND THE UNDERCUT DEPTH MAY BE ADJUSTED AT CROSS DRAINS, AS DIRECTED BY THE ENGINEER. THE CONTRACTOR SHALL REPLACE OR REPAIR, AS DIRECTED BY THE ENGINEER, ANY STRUCTURES DAMAGED DURING THE LIFE OF THE CONTRACT. NO PAYMENT WILL BE MADE FOR REPLACEMENT OR REPAIR OF DAMAGED STRUCTURES.
- 9. VOIDS CREATED BY THE REMOVAL OF POSTS, CONCRETE ANCHORS, FOOTINGS, ETC., SHALL BE BACKFILLED AND TAMPED IN ACCORDANCE WITH SECTION 203 OF THE MISSISSIPPI STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION.
- 10. ALL TRAFFIC CONTROL DEVICES ON THIS PROJECT SHOULD COMPLY WITH PART VI OF THE MUTCD (LATEST EDITION).
- 11. ALL PLASTIC DRUMS SHALL HAVE A BALLASTING COLLAR MADE FROM RECYCLED TRUCK TIRES OR OTHER SUITABLE MATERIAL.
- 12. FLUORESCENT ORANGE SHEETING SHALL BE USED ON ALL CONSTRUCTION AND TRAFFIC CONTROL SIGNS EXCEPT FOR THOSE DESIGNATED IN THE PLANS TO BE BLACK LEGEND AND BORDER ON WHITE BACKGROUND.
- 13. THE CONTRACTOR IS RESPONSIBLE FOR PROVIDING BRACING, SHORING, OR ANY GROUND SUPPORT SYSTEM REQUIRED TO PREVENT A FAILURE FROM OCCURRING DURING EXCAVATION. PROTECTIVE MEASURES INCLUDING THE MATERIALS AND LABOR FOR DESIGNING AND CONSTRUCTING THE FACILITY ARE NOT CONSIDERED A SEPARATE PAY ITEM.
- 14. ALL GUARDRAIL IS TO BE PAVED UNDER UNLESS OTHERWISE DIRECTED BY THE PROJECT ENGINEER.
- 15. REMOVAL OF OBJECT MARKERS IS NOT CONSIDERED A SEPARATE PAY ITEM.
- 16. WORK REQUIRING A LANE CLOSURE WILL ONLY BE PERMITTED BETWEEN THE HOURS OF 9:00 PM AND 5:00 AM, SUNDAY THROUGH THURSDAY.
- 17. IF COLORS ARE USED ON PLAN/PROFILE SHEETS, THEY ARE INTENDED TO VISUALLY EASE THE LOCATION OF ELEMENTS FOR USERS OF THESE DRAWINGS. ALTHOUGH THE INTENT IS TO CATEGORIZE EVERYTHING AS EITHER EXISTING OR PROPOSED, IT IS THE END USER'S RESPONSIBILITY TO ENSURE ALL ELEMENTS ARE INTERPRETED CORRECTLY REGARDLESS OF COLOR.
- 18. BIDDERS ARE ADVISED THAT HARD COPIES OF ANY ADDENDA FOR THIS PROJECT WILL NO LONGER BE MAILED. ALL ADDENDA FOR THIS PROJECT WILL BE POSTED TO WWW.MDOT.MS.GOV UNDER THE PROPOSAL ADDENDA COLUMN. IT IS THE BIDDER'S RESPONSIBILITY TO CHECK AND SEE IF ANY ADDENDA HAVE BEEN POSTED FOR THIS PROJECT. PLEASE CONTACT CONTRACT ADMINISTRATION DIVISION AT 601-359-7700 FOR ANY QUESTIONS REGARDING ELECTRONIC ADDENDA.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

GENERAL NOTES

COUNTY: JACKSON
PROJ. NUM.: IM-ØØ1Ø-Ø1(151)

FILENAME: GENERAL NOTES.DGN
DESIGN TEAM SIXTH CHECKED DATE

MISSISSIPPI DEPARTMENT OF TRANSPORTATION
WORKING NUMBER

SHEET NUMBER

3

ROADWAY DESIGN DIVISION MISSISSIPPI DEPARTMENT OF TRANSPORTA

GENERAL NOTES, DGN