

STATE OF MISSISSIPPI
MISSISSIPPI DEPARTMENT OF TRANSPORTATION


**SIGNING IMPROVEMENTS FOR
I-59/US98 & US49/SR67
FEDERAL AID PROJECT NOS.
IM-0059-01(107) & NH-0008-01(125)**

I-59 AT US 98 FORREST COUNTY
AND US 49 AT SR 67 HARRISON COUNTY

FMS No.: 106124301000
FMS No.: 106125301000



RATIOS / SCALES
PLAN 1:1000
LAYOUT = 1:50000

FED. ROAD REG. NO.	STATE	PROJECT NO.	SHEET NO.
4	MISS.	IM-0059-01(107) NH-0008-01(125)	1

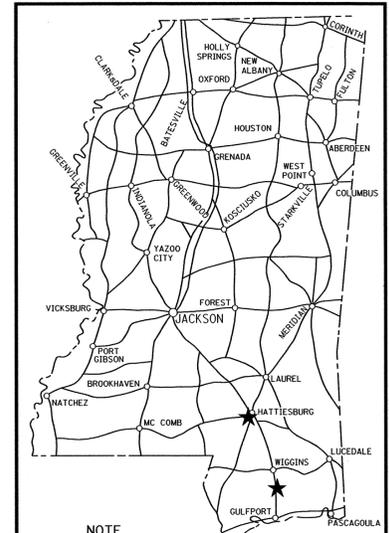

NOTE
★ INDICATES APPROXIMATE LOCATION OF PROJECT.
L.A.T. 31°14'13" N LONG 89°19'20" W (APPROX. MIDDLE OF FORREST CO. PROJECT)
L.A.T. 30°39'30" N LONG 89°08'00" W (APPROX. MIDDLE OF HARRISON CO. PROJECT)

ROADWAY DESIGN MISSISSIPPI DEPARTMENT OF TRANSPORTATION LAYOUT SHEET

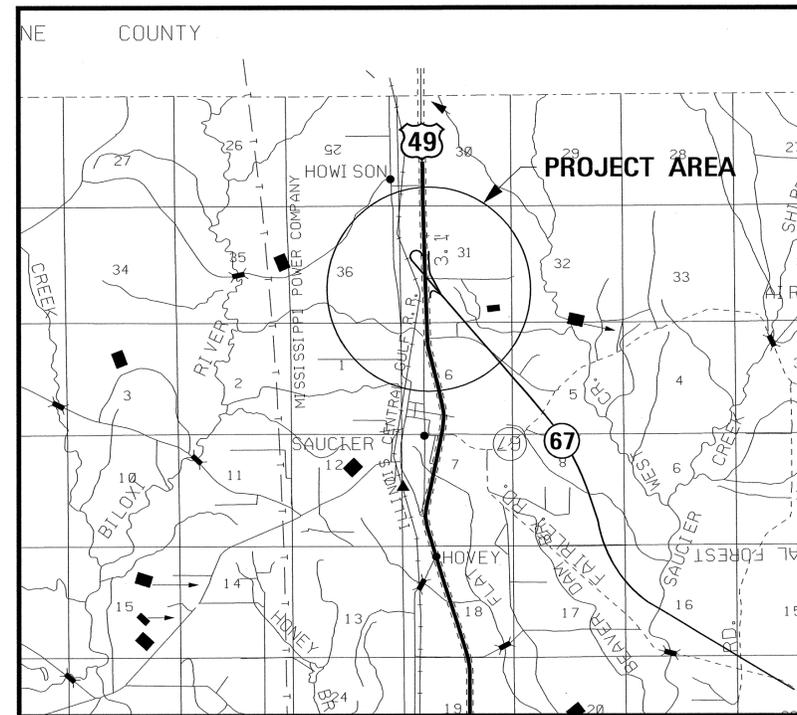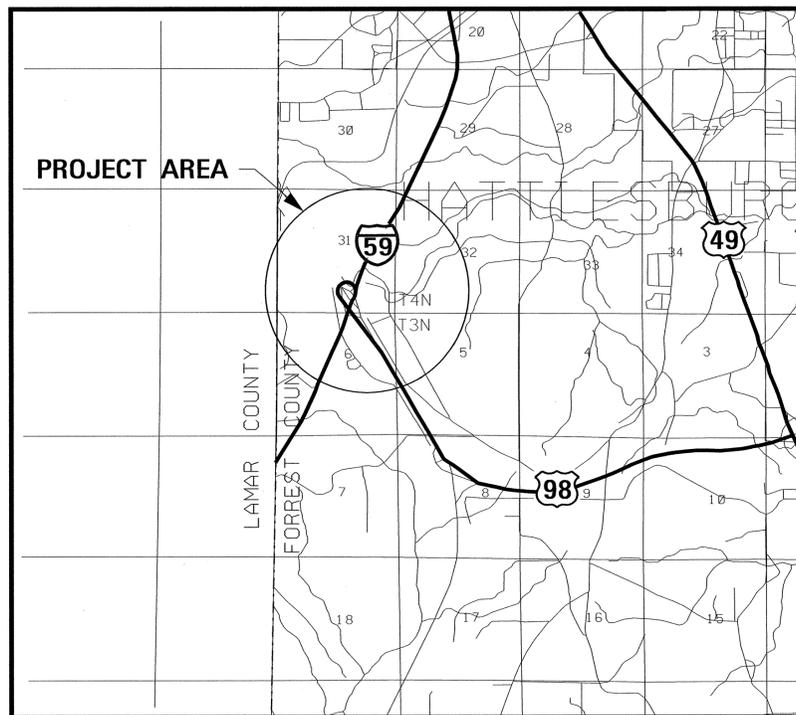

PERMITS ACQUIRED BY MDOT		
WETLANDS AND WATERS PERMITS (NECESSARY FOR ULTIMATE IMPROVEMENTS ONLY):		
	WATERS	WETLANDS
NATIONWIDE #14	<input type="checkbox"/>	<input type="checkbox"/>
NATIONWIDE (OTHER)*	<input type="checkbox"/>	<input type="checkbox"/>
GENERAL*	<input type="checkbox"/>	<input type="checkbox"/>
INDIVIDUAL (404)*	<input type="checkbox"/>	<input type="checkbox"/>
* ACQUISITION OF PERMITS FOR TEMPORARY IMPACTS DURING CONSTRUCTION ARE THE RESPONSIBILITY OF THE CONTRACTOR		
STORMWATER PERMIT <input type="checkbox"/>		
Y	REQUIRED, CNOI SUBMITTED BY MDOT (DISTRIBUTED AREA = 5 ACRES + INTB 840M)	
S	REQUIRED, SCNOI TO BE SUBMITTED BY CONTRACTOR (1 TO 4.99 ACRES/INTB 839M)	
N	NO STORMWATER PERMIT REQUIRED (<1 ACRE)	
APPROVED BY: JCT DATE: 9-27-11		

CONVENTIONAL SYMBOLS

- COUNTY LINE
- TOWN CORPORATION LINE
- SECTION LINE
- ROAD OR TRAVELED WAY
- RAILROAD
- SURVEY LINE
- BRIDGES

**FORREST COUNTY
LENGTH DATA**

LENGTH OF ROADWAY	0.000 m
LENGTH OF BRIDGES	0.000 m
LENGTH OF PROJECT (NET)	0.000 m
LENGTH OF EXCEPTIONS	0.000 m
LENGTH OF PROJECT (GROSS)	0.000 m

**HARRISON COUNTY
LENGTH DATA**

LENGTH OF ROADWAY	0.000 m
LENGTH OF BRIDGES	0.000 m
LENGTH OF PROJECT (NET)	0.000 m
LENGTH OF EXCEPTIONS	0.000 m
LENGTH OF PROJECT (GROSS)	0.000 m



APPROVED BY:	<i>Michelle M. Butler</i>	DATE:	11/16/11
CHIEF ENGINEER		DATE	
APPROVED BY:	<i>Michelle M. Butler</i>	DATE:	11/16/11
EXECUTIVE DIRECTOR		DATE	
MISSISSIPPI DEPARTMENT OF TRANSPORTATION			
APPROVED:		DATE:	
DIVISION ADMINISTRATOR		DATE	
FEDERAL HIGHWAY ADMINISTRATION DEPARTMENT OF TRANSPORTATION			

DESCRIPTION OF SHEET	WKG. NO.	SH. NO.
TITLE SHEET (1)		1
DETAILED INDEX & GENERAL NOTES (2)		
DETAILED INDEX	DI-1	2
GENERAL NOTES	GN-1	3
QUANTITY SHEETS (6)		
SUMMARY OF QUANTITIES	SQ-1	4
ESTIMATED QUANTITIES- STANDARD ROADSIDE SIGNS AND SIGN ASSEMBLIES I-59	EQ-1	5
ESTIMATED QUANTITIES- STANDARD ROADSIDE SIGN ASSEMBLIES US 49	EQ-2	6
ESTIMATED QUANTITIES- STANDARD ROADSIDE SIGNS US 49	EQ-3	7
ESTIMATED QUANTITIES- DIRECTIONAL SIGNS, OVERHEAD SIGNS I-59	DSQ-1	8
ESTIMATED QUANTITIES- DIRECTIONAL SIGNS, OVERHEAD AND GROUND MOUNTED US 49	DSQ-2	9
PLAN SHEETS (4)		
PERMANENT SIGNING PLAN - I-59 AT US 98	PSP-1	10
PERMANENT SIGNING PLAN - US 49 AT SR 67	PSP-2	11
PERMANENT SIGNING PLAN - US 49 AT SR 67	PSP-3	12
PERMANENT SIGNING PLAN - US 49 AT SR 67	PSP-4	13
SPECIAL DESIGN SHEETS (7)		
DIRECTIONAL SIGN DETAILS, I-59	DSD-1	14
DIRECTIONAL SIGN DETAILS, US 49	DSD-2	15
OVERHEAD SIGN ASSEMBLIES, I-59	OH-1	16
OVERHEAD SIGN ASSEMBLIES, US 49	OH-2	17
CHEVRON ALIGNMENT PLACEMENT DETAILS	CAPD	18
DETAIL CONSTRUCTION SIGNING	DCS-1	19
DETAIL CONSTRUCTION SIGNING	DCS-2	20

DESCRIPTION OF SHEET	REVISION DATE	WKG. NO.	SH. NO.
STANDARD DRAWINGS-ROADWAY SHEETS (18) ENGLISH			
STANDARD DIRECTIONAL (GUIDE) SIGNS	3/1/2002	SN-1	220
ROUTE SHIELDS AND "EXIT ONLY" PANELS		SN-2	221
STANDARD ROADSIDE SIGNS		SN-3	222
STANDARD ROADSIDE SIGNS		SN-3A	223
STANDARD ROADSIDE SIGNS	3/1/2002	SN-3B	224
STANDARD ROADSIDE SIGNS ASSEMBLY AND INSTALLATION		SN-4	225
STANDARD ROADSIDE SIGNS ASSEMBLY AND INSTALLATION		SN-4A	226
STANDARD ROADSIDE SIGNS ASSEMBLY AND INSTALLATION		SN-4B	227
TYPICAL INSTALLATION OF GROUND MOUNTED DIRECTIONAL SIGNS		SN-5	228
BREAKAWAY SIGN SUPPORTS		SN-6	229
BREAKAWAY SIGN SUPPORTS		SN-6A	230
BREAKAWAY SIGN SUPPORTS		SN-6B	231
SIGN FACE CONST. AND ATTACHMENT OF GROUND MOUNTED DIRECTIONAL SIGNS	3/1/2002	SN-7	232
TYPICAL INSTALLATION AND DETAILS OF DELINEATORS AND DISTANCE REF. SIGNS		SN-8	233
TYPICAL INSTALLATION OF DELINEATORS		SN-8A	234
TRAFFIC CONTROL PLAN FOR POSTED SPEED LIMIT OF 65 OR 70 MPH (INTERSTATES AND OTHER 4-LANE DIVIDED HIGHWAYS) (MEDIAN LANE OR OUTSIDE LANE CLOSURE) (WORK DAY ONLY)		TCP-5	254
SHORT DURATION CLOSING OF DIVIDED HIGHWAYS		TCP-9	258
HIGHWAY SIGN AND BARRICADE DETAILS FOR CONSTRUCTION PROJECTS		TCP-10	259
TOTAL SHEETS			38

MISSISSIPPI DEPARTMENT OF TRANSPORTATION
 PLAN DIVISION
 001-001-AMP/MDGN/FILENAME

ATKINS

PS & E PLANS-DATE 11/16/11		
FMS CON. # 106124&106125/301000		
REVISIONS		
DATE	SHEET NO.	BY

MISSISSIPPI DEPARTMENT OF TRANSPORTATION	
DETAILED INDEX	
I-59 AT US 98 & US 49 AT SR 67	
PROJ.No: IM-0059-01(107) PROJ.No: NH-0008-01(125) FORREST & HARRISON COUNTY	
FILENAME: DI_59AND49.DGN	WORKING NUMBER DI-1
DESIGN TEAM: ATKINS	CHECKED: JRY
DATE: 09/25/11	SHEET NUMBER 2

GENERAL NOTES (SIGNING)

- ① ALL TRAFFIC CONTROL DEVICES ON THIS PROJECT SHOULD COMPLY WITH PART VI OF THE MUTCD (LATEST EDITION).
- ② VOIDS CREATED BY THE REMOVAL OF POSTS, CONCRETE ANCHORS, FOOTINGS, etc. SHALL BE BACKFILLED AND TAMPED IN ACCORDANCE WITH SECTION 203 OF THE MISSISSIPPI STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION.
- ③ SIGN SUPPORT FOOTINGS SHALL BE REMOVED AND BACKFILLED WITH GRANULAR MATERIAL OR TOPSOIL AS APPROVED BY THE PROJECT ENGINEER. REMOVAL OF ALL SIGNS, SUPPORTS AND PLACEMENT OF THE BACKFILL MATERIAL IS NOT A SEPARATE PAY ITEM.
- ④ ALL EXISTING SIGNS AND SUPPORTS REMOVED UNDER THIS CONTRACT SHALL BECOME THE PROPERTY OF THE CONTRACTOR AND ARE NOT A SEPARATE PAY ITEM.
- ⑤ THE DATE OF ERECTION OF ALL PERMANENT SIGNS SHALL BE WRITTEN ON THE BACK OF THE SIGN WITH A SANFORD MEANSTREAK WATERPROOF FORMULA PERMANENT MARKING STICK OR EQUIVALENT.
- ⑥ DIRECT APPLIED LEGEND, BORDERS, AND SHIELD ARE TO BE USED ON ALL GUIDE SIGNS. RIVETS WILL NOT BE ALLOWED.
- ⑦ ALL POST, PIPE, AND I-BEAM LENGTHS ARE ESTIMATES. CONTRACTOR IS RESPONSIBLE FOR PERFORMING A FIELD SURVEY TO DETERMINE THE EXACT LENGTHS REQUIRED.
- ⑧ ALL EXISTING SIGNS WHICH WILL BE REMOVED AS A PART OF THIS PROJECT ARE TO REMAIN IN PLACE UNTIL NEW SIGNS HAVE BEEN ERECTED UNLESS OTHERWISE DIRECTED BY THE PROJECT ENGINEER.
- ⑨ FLUORESCENT ORANGE SHEETING SHALL BE USED ON ALL CONSTRUCTION AND TRAFFIC CONTROL SIGNS EXCEPT FOR THOSE DESIGNATED IN PLANS TO BE BLACK LEGEND AND BORDER ON WHITE BACKGROUND.
- ⑩ TREE STUMPS MUST BE GROUND 6" BELOW THE GROUND LINE AND ALL THE CHIPS INCORPORATED INTO THE SOIL.

PLAN DIVISION
ROADWAY DESIGN & CONSTRUCTION
MISSISSIPPI DEPARTMENT OF TRANSPORTATION

001.00 ANPM DGNFILENAME
MMDDYY

MISSISSIPPI DEPARTMENT OF TRANSPORTATION	
GENERAL NOTES	
I-59 AT US98 & US49 AT SR67	
PROJ NO: IM-0059-01(107) PROJ NO: NH-0008-01(125) COUNTY: FORREST/HARRISON	
FILENAME: GNOTES 49-59.DGN	WORKING NUMBER GN-1
DESIGN TEAM: ATKINS	CHECKED: JRY
DATE: 9/25/11	SHEET NUMBER 3

