

FED. ROAD REG. NO.	STATE	PROJECT NO.	SHEET NO.
4	MISS.	IM-0055-02(239)	1

GENERAL INDEX

INCLUDED THIS PROJECT	BEGIN WITH SHEET
<input checked="" type="checkbox"/> ROADWAY	1
<input type="checkbox"/> PERMANENT SIGNS	1001
<input type="checkbox"/> TRAFFIC SIGNALS	2001
<input type="checkbox"/> ITS COMPONENTS	3001
<input type="checkbox"/> LIGHTING	4001
<input type="checkbox"/> (RESERVED)	5001
<input checked="" type="checkbox"/> ROADWAY STANDARD DWGS ..	6001
<input type="checkbox"/> BRIDGE STANDARD DWGS	7001
<input type="checkbox"/> BRIDGE	8001
<input type="checkbox"/> CROSS SECTIONS	9001


STATE OF MISSISSIPPI

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

PLAN AND PROFILE OF PROPOSED STATE HIGHWAY FEDERAL AID PROJECT NO. IM-0055-02(239)

I-55 NORTHBOUND EXIT RAMP TO ATKINS - BEASLEY SIGN TRUSS HINDS COUNTY

FMS CONSTRUCTION: 106613/301000

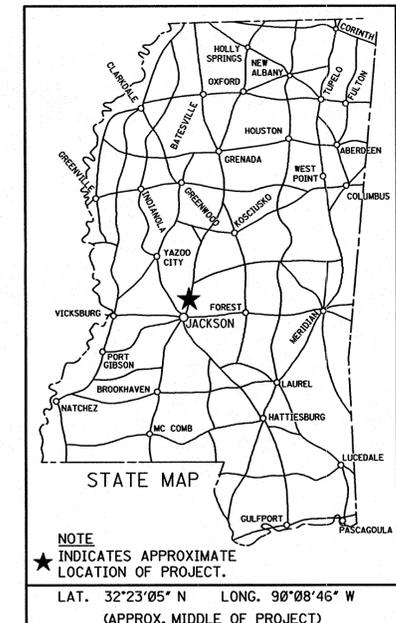

B.O.P. STA. 390 + 00


E.O.P. STA. 441 + 86

SCALES

PLAN	1 IN. = 100 FT.
PROFILE	HOR. 1 IN. = 100 FT.
	VERT. 1 IN. = 10 FT.
LAYOUT	1 IN. = FT.

BRIDGE STRUCTURES REQ'D.

BOX BRIDGES REQ'D.

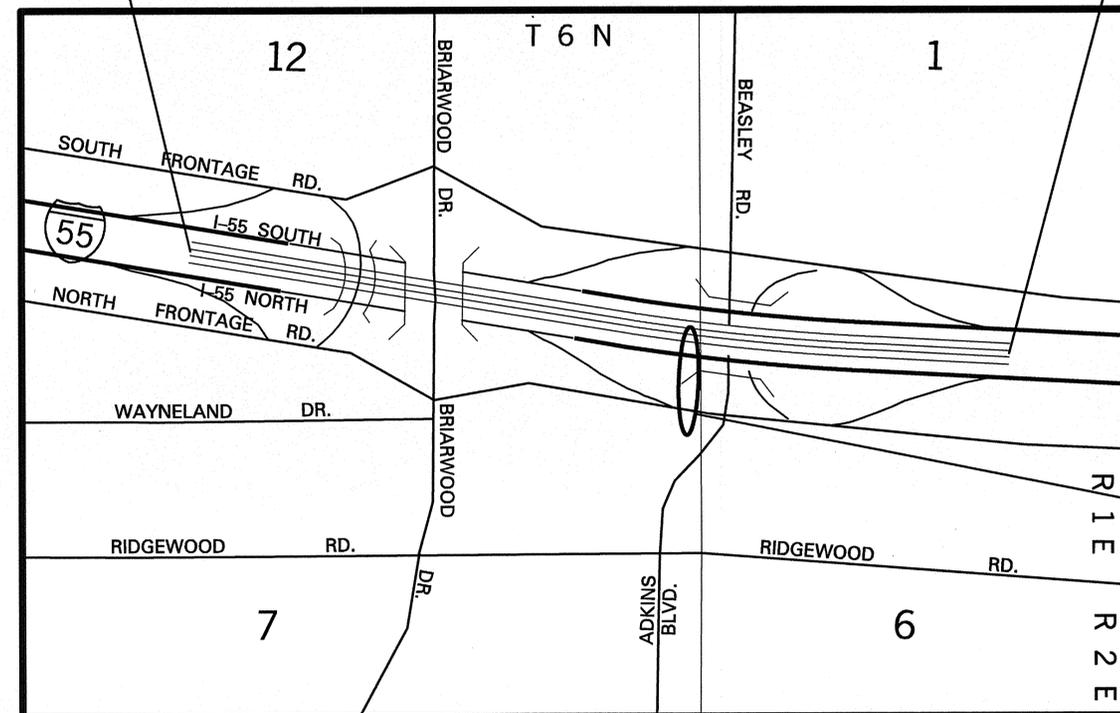

EQUATIONS

EXCEPTIONS

LENGTH DATA

LENGTH OF ROADWAY	FT.	MI.
LENGTH OF BRIDGES	FT.	MI.
LENGTH OF PROJECT (NET)	FT.	MI.
LENGTH OF EXCEPTIONS	FT.	MI.
LENGTH OF PROJECT (GROSS)	FT.	MI.

DESIGN CONTROL

MPH = V (SPEED DESIGN)

ADT () = : ADT () =

DHV = : D = % T = %

PERMITS ACQUIRED BY MDOT

WETLANDS AND WATERS PERMITS (NECESSARY FOR ULTIMATE IMPROVEMENTS ONLY):

	WATERS	WETLANDS
NATIONWIDE #14	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
NATIONWIDE (OTHER)*	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
GENERAL*	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
INDIVIDUAL (404)*	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

* ACQUISITION OF PERMITS FOR TEMPORARY IMPACTS DURING CONSTRUCTION ARE THE RESPONSIBILITY OF THE CONTRACTOR

STORMWATER PERMIT

Y REQUIRED CSMI SUBMITTED BY MDOT (DISTURBED AREA = 5 ACRES)

S REQUIRED SCNOI TO BE SUBMITTED BY CONTRACTOR (1 TO 4.99 ACRES)

N NO STORMWATER PERMIT REQUIRED (<1 ACRE)

APPROVED BY: *De* DATE: 12/11/13

APPROVED:

BY: *[Signature]* DATE: 12/11/13

CHIEF ENGINEER

BY: *[Signature]* DATE: 12/11/13

EXECUTIVE DIRECTOR

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

APPROVED:

DIVISION ADMINISTRATOR DATE

FEDERAL HIGHWAY ADMINISTRATION DEPARTMENT OF TRANSPORTATION



1st O.REV.

STATE	PROJECT NO.
MISS.	IM-0055-02(239)

DESCRIPTION OF SHEET	WKG. NO.	SH. NO.	DESCRIPTION OF SHEET	WKG. NO.	SH. NO.
TITLE SHEET (1)		1	STANDARD DRAWINGS - ROADWAY SHEETS (3)		
DETAILED INDEX & GENERAL NOTES (2)			TRAFFIC CONTROL PLAN FOR POSTED SPEED LIMIT LESS THAN 65 MPH (4-LANE;MEDIAN LANE OR OUTSIDE LANE CLOSURE) (WORK DAY ONLY)	TCP-2	6251
DETAILED INDEX	DI-1	2	SHORT DURATION CLOSING OF DIVIDED HIGHWAYS	TCP-9	6258
GENERAL NOTES	GN-1	3	TRAFFIC CONTROL PLAN MOBILE OPERATIONS MULTILANE ROADS AND TWO-LANE ROADS	TCP-11	6260
QUANTITY SHEETS (1)			DETAILS OF OUTSIDE LANE CLOSURE AT EXIT AND ENTRANCE RAMP	TCP-12	6261
SUMMARY OF QUANTITIES	SQ-1	4	TOTAL SHEETS		23
ESTIMATED QUANTITIES FOR TRAFFIC CONTROL SIGNS	TCP-Q	5			
SPECIAL DESIGN SHEETS ()					
DETAIL OF CONSTRUCTION SIGNING - NORTHBOUND LANE & FRONTAGE RD.	CS-1	6			
DETAIL OF CONSTRUCTION SIGNING - SOUTHBOUND LANE	CS-2	7			
SIGN TRUSS #9803	OH-1	8			
GENERAL NOTES AND ESTIMATED QUANTITIES	1 OF 4	9			
FOUNDATION DETAILS	2 OF 4	10			
POST ELEVATIONS	3 OF 4	11			
TRUSS LAYOUT	4 OF 4	12			
INFORMATION PLANS - INTERSTATE HWY. 55 BETWEEN CANTON MART ROAD AND WHITE OAK CREEK					
PROJECT NUMBER I-IR-055-2(107)101 - SHEET NO. 881	B3 OF 16	13			
PROJECT NUMBER I-IR-055-2(107)101 - SHEET NO. 882	B4 OF 16	14			
PROJECT NUMBER I-IR-055-2(107)101 - SHEET NO. 883	B5 OF 16	15			
PROJECT NUMBER I-IR-055-2(107)101 - SHEET NO. 884	B6 OF 16	16			
PROJECT NUMBER I-IR-055-2(107)101 - SHEET NO. 888	B10 OF 16	17			
PROJECT NUMBER I-IR-055-2(107)101 - SHEET NO. 890	B12 OF 16	18			
PROJECT NUMBER I-IR-055-2(107)101 - SHEET NO. 891	B13 OF 16	19			

1/21/2014 9:12 AM DI INDEX.DGN

C. BRELAND		
PS & E PLANS-DATE 12/13/13		
FMS CON. # 106613/301000		
REVISIONS		
DATE	SHEET NO.	BY
1/21/14	3, 4	CLB

REVISION	MISSISSIPPI DEPARTMENT OF TRANSPORTATION
	DETAILED INDEX
DATE	I-55/ BEASLEY & ADKINS
	SIGN TRUSS REPLACEMENT
DESIGN TEAM	PROJECT NO.: IM-0055-02(239)
	COUNTY: HINDS
CHECKED	WORKING NUMBER
	DI-1
DATE	FILENAME: DINDEX.DGN
	SHEET NUMBER
DATE	2



GENERAL NOTES

GENERAL NOTES

- (1) THE LOCATION AND SPACING OF SIGNS, SHOWN ON THE TRAFFIC CONTROL PLANS, ARE APPROXIMATE AND MAY BE ADJUSTED AS NECESSARY TO FIT FIELD CONDITIONS.
- (2) ALL TRAFFIC CONTROL DEVICES ON THIS PROJECT SHALL COMPLY WITH PART VI OF THE MUTCD (LATEST EDITION).
- (3) ALL PLASTIC DRUMS SHALL HAVE A BALLASTING COLLAR MADE FROM RECYCLED TRUCK TIRES OR OTHER SUITABLE MATERIAL.
- (4) THE CONTRACTOR SHALL BE RESPONSIBLE FOR PROTECTING EXISTING STRUCTURES SUCH AS, BUT NOT LIMITED TO, PIPES, INLETS, APRONS, AND BRIDGES FROM DAMAGE WHICH MIGHT OCCUR DURING CONSTRUCTION. THE CONTRACTOR SHALL REPLACE OR REPAIR, AS DIRECTED BY THE ENGINEER, ANY STRUCTURES DAMAGED DURING THE LIFE OF THE CONTRACT. NO PAYMENT WILL BE MADE FOR REPLACEMENT OR REPAIR OF DAMAGED ITEMS.
- (5) SOME WORK IS REQUIRED OUTSIDE THE PROJECT LIMITS. NO ADDITIONAL COMPENSATION WILL BE MADE FOR SUCH WORK EXCEPT AS PROVIDED BY SPECIFIC PAY ITEMS INCLUDED IN THE PLANS.
- (6) FLUORESCENT ORANGE SHEETING SHALL BE USED ON ALL CONSTRUCTION AND TRAFFIC CONTROL SIGNS EXCEPT FOR THOSE DESIGNATED ON THE PLANS TO BE BLACK LEGEND AND BORDER ON WHITE BACKGROUND.
- (7) THE CONTRACTOR SHALL REPAIR ANY DAMAGE TO THE SURFACE TREATED SHOULDER THAT MIGHT OCCUR DURING CONSTRUCTION. ANY REPAIR TO SHOULDER WILL BE IN ACCORDANCE WITH SECTION 410 OF THE MISSISSIPPI STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION. NO PAYMENT WILL BE MADE FOR REPAIR OF DAMAGED SHOULDER.
- (8) ROADWAY SIGNS THAT ARE IN CONFLICT WITH CONSTRUCTION OF THIS PROJECT SHALL BE REMOVED AND RELOCATED BY THE CONTRACTOR AS DIRECTED BY THE ENGINEER, THE COST OF WHICH SHALL BE ABSORBED IN OTHER ITEMS BID.
- (9) ERECTION DATES ARE TO BE LEGIBLY WRITTEN ON THE BACK OF ALL SIGNS WITH A SANFORD MEANSTREAK WATERPROOF FORMULA PERMANENT MARKING STICK.
- (10) IF COLORS ARE USED ON PLAN/PROFILE SHEETS, THEY ARE INTENDED TO VISUALLY EASE THE LOCATION OF ELEMENTS FOR USERS OF THESE DRAWINGS. ALTHOUGH THE INTENT IS TO CATEGORIZE EVERYTHING AS EITHER EXISTING OR PROPOSED, IT IS THE END USER'S RESPONSIBILITY TO ENSURE ALL ELEMENTS ARE INTERPRETED CORRECTLY REGARDLESS OF COLOR.
- (11) ALL ADDENDA TO THESE PLANS WILL BE POSTED TO WWW.MDOT.MS.GOV UNDER THE PROPOSAL ADDENDA COLUMN. BIDDERS ARE ADVISED THAT HARD COPIES OF ANY ADDENDA FOR THIS PROJECT WILL NOT BE MAILED. IT IS THE BIDDER'S RESPONSIBILITY TO CHECK AND SEE IF ANY ADDENDA HAVE BEEN POSTED FOR THIS PROJECT.
- (12) THE CONTRACTOR SHALL COORDINATE WITH THE CONTRACTOR FROM ADJACENT PROJECT(S) IN IMPLEMENTING THE TRAFFIC CONTROL PLAN AS DIRECTED BY THE ENGINEER. ALL CONFLICTING SIGNS SHALL BE COVERED OR REMOVED AS DIRECTED BY THE ENGINEER.
- (13) ANY CLEARING REQUIRED TO ACCESS SIGN FOOTINGS IS TO BE ABSORBED IN OTHER ITEMS BID.
- (14) ANY AREA DISTURBED DURING CONSTRUCTION SHALL BE REGRASSED. COST OF GRASSING TO BE ABSORBED IN OTHER ITEMS BID.
- △ (15) LIST OF PUBLIC UTILITIES
 - A. ENTERGY
 - B. COMCAST
 - C. AT&T
 - D. ATMOS
 - E. CITY OF JACKSON

GENERAL NOTES (CONT.)

- (16) THE CONTRACTOR SHALL SUBMIT A REMOVAL PLAN FOR THE OVERHEAD SIGN TRUSS TO THE ENGINEER FOR APPROVAL PRIOR TO COMMENCEMENT OF WORK.

1/21/2014 9:12 AM GN-55.DGN

MISSISSIPPI DEPARTMENT OF TRANSPORTATION GENERAL NOTES I-55/ BEASLEY & ADKINS SIGN TRUSS REPLACEMENT		 WORKING NUMBER GN-1
PROJECT NO.:IM-0055-02(239) COUNTY: HINDS		
FILENAME: GN-55.DGN DESIGN TEAM BRELAND CHECKED DATE	SHEET NUMBER 3	