

**SECTION 905 -- PROPOSAL (CONTINUED)**

I (We) further propose to execute the attached contract agreement (Section 902) as soon as the work is awarded to me (us), and to begin and complete the work within the time limit(s) provided for in the Specifications and Advertisement. I (We) also propose to execute the attached contract bond (Section 903) in an amount not less than one hundred (100) percent of the total of my (our) part, but also to guarantee the excellence of both workmanship and materials until the work is finally accepted.

I (We) enclose a certified check, cashier's check or bid bond for **five percent (5%) of total bid** and hereby agree that in case of my (our) failure to execute the contract and furnish bond within Ten (10) days after notice of award, the amount of this check (bid bond) will be forfeited to the State of Mississippi as liquidated damages arising out of my (our) failure to execute the contract as proposed. It is understood that in case I am (we are) not awarded the work, the check will be returned as provided in the Specifications.

Bidder acknowledges receipt of and has added to and made a part of the proposal and contract documents the following addendum (addenda):

ADDENDUM NO.   1   DATED   4/22/2015   ADDENDUM NO.            DATED             
ADDENDUM NO.            DATED            ADDENDUM NO.            DATED           

Number	Description
1	Revised Table of Contents; Revised NTB No. 5425; Add NTB No. 5511; Revised Bid Items; Revised Progress Schedule; Revised or Added Plan Sheet Nos. 2-6; Amendment EBS Download Required.

TOTAL ADDENDA:   1    
(Must agree with total addenda issued prior to opening of bids)

Respectfully Submitted,

DATE \_\_\_\_\_

\_\_\_\_\_  
Contractor

BY \_\_\_\_\_  
Signature

TITLE \_\_\_\_\_

ADDRESS \_\_\_\_\_

CITY, STATE, ZIP \_\_\_\_\_

PHONE \_\_\_\_\_

FAX \_\_\_\_\_

E-MAIL \_\_\_\_\_

(To be filled in if a corporation)

Our corporation is chartered under the Laws of the State of \_\_\_\_\_ and the names, titles and business addresses of the executives are as follows:

_____ President	_____ Address
_____ Secretary	_____ Address
_____ Treasurer	_____ Address

The following is my (our) itemized proposal.

Revised 09/21/2005

MP-1015-70(015) / 305423301

Tippah County(ies)

**MISSISSIPPI DEPARTMENT OF TRANSPORTATION  
TABLE OF CONTENTS**

**PROJECT: MP-1015-70(015) / 305423301 - Tippah**

Section 901 - Advertisement

Section 904 - Notice to Bidders

#1	Governing Specifications
#3	Final Cleanup
#1405	Errata & Modifications to 2004 Standard Specifications
#1928	Federal Bridge Formula
#2937	Reduced Speed Limit Signs
#3131	Temporary Traffic Paint
#3893	Petroleum Products Base Price
#4189	Rumble Stripe
#4214	Safety Apparel
#4473	Alternate Crushed Stone Base Bid Items
#4526	Electronic Addendum Process
#4565	Manual on Uniform Traffic Control Devices (MUTCD)
#4661	Payroll Requirements
#5044	Questions Regarding Bidding
#5050	Adjustments for Bituminous Materials
#5053	Contractor Correspondence
#5405	Traffic Control Devices
#5411	Safety Edge
#5412	Weight Limits
#5425	Contract Time
#5511	Concrete Testing Requirements

Section 907 - Special Provisions

907-101-4	Definitions
907-102-10	Bidding Requirements and Conditions
907-103-8	Award and Execution of Contract
907-104-5	Scope of Work
907-104-6	Partnering Process
907-105-8	Control of Work
907-107-13	Legal Relations and Responsibility to Public
907-108-37	Prosecution and Progress
907-109-7	Measurement and Payment
907-304-13	Granular Courses
907-401-7	Asphalt Pavements
907-403-14	Asphalt Pavements
907-407-2	Tack Coat
907-618-9	Placement of Temporary Traffic Stripe
907-618-13	Temporary Construction Signs
907-626-25	Thermoplastic Traffic Markings
907-702-5	Specifications for Bituminous Materials
907-703-12	Aggregates, w/ Supplement

**PROJECT: MP-1015-70(015) / 305423301 - Tippah**

907-710-1 Fast Dry Solvent Traffic Paint

907-720-2 Pavement Marking Materials

Section 905 - Proposal, Proposal Bid Items, Combination Bid Proposal

State Board of Contractors Requirement

State Certification Regarding Non-Collusion, Debarment and Suspensions(2)

Section 902 - Contract Form

Section 903 - Contract Bond Forms

Progress Schedule

(REVISIONS TO THE ABOVE WILL BE INDICATED ON THE SECOND SHEET  
OF SECTION 905 AS ADDENDA)

04/22/2015 10:40 AM

## MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 - NOTICE TO BIDDERS NO. 5425

CODE: (SP)

DATE: 4/22/2015

SUBJECT: Contract Time

PROJECT: MP-1015-70(015) / 305423301 – Tippah County

The completion of work to be performed by the Contractor for this project will not be a specified date but shall be when all allowable working days are assessed, or any extension thereto as provided in Subsection 907-108.06. It is anticipated that the Notice of Award will be issued no later than **May 12, 2015** and the effective date of the Notice to Proceed / Beginning of Contract Time will be between **July 1, 2015 and August 13, 2015**.

The Contractor shall request a Notice to Proceed / Beginning of Contract Time date between the date of **July 1, 2015 and August 13, 2015**.

Should the Contractor not request a Notice to Proceed by **August 13, 2015**, the date for the Notice to Proceed / Beginning of Contract Time will be **August 13, 2015**.

**40** Working Days have been allowed for the completion of work on this project.

The progress schedule for this project shows the Notice to Proceed / Beginning of Contract Time starting at the latest possible date. If the Contractor requests a Notice to Proceed earlier than this date, the Contractor shall submit a revised progress schedule showing the work beginning at the new Notice to Proceed / Beginning of Contract Time date.

**MISSISSIPPI DEPARTMENT OF TRANSPORTATION**

**SECTION 904 - NOTICE TO BIDDERS NO. 5511**

**CODE: (SP)**

**DATE: 04/07/2015**

**SUBJECT: Concrete Testing Requirements**

**PROJECT: MP-1015-70(015) / 305423301 – Tippah County**

Bidders are advised that the concrete for this project will not be accepted based on the Quality Control / Quality Assurance (QC/QA) requirements of Section 804 of the specifications. The acceptance of concrete on this project will be based on sampling and testing at the project site by MDOT forces. The Contractor is required to submit mix designs to accomplish this work in accordance with Section 804 and perform normal Quality Control functions at the concrete plant. Acceptance will be in accordance with the requirements of 907-601, Structural Concrete, and TMD-20-04-00-000.

Mill and Overlay approximately 5 miles of SR 15 from End 3-lane in Ripley to CR 407, known as State Project No. MP-1015-70(015) / 305423301 in Tippah County.

Line No.	Item Code	Adj Code	Quantity	Units	Description [Fixed Unit Price]
<b>Roadway Items</b>					
0010	203-G003	(E)	550	Cubic Yard	Excess Excavation, FM, AH
0020	406-A001		85,600	Square Yard	Cold Milling of Bituminous Pavement, All Depths
0030	423-A001		9	Mile	Rumble Strips, Ground In
0040	619-A1002		18	Mile	Temporary Traffic Stripe, Continuous White
0050	619-A2002		11	Mile	Temporary Traffic Stripe, Continuous Yellow
0060	619-A4006		6	Mile	Temporary Traffic Stripe, Skip Yellow
0070	619-A5001		20,660	Linear Feet	Temporary Traffic Stripe, Detail
0080	619-A6001		1,640	Linear Feet	Temporary Traffic Stripe, Legend
0090	627-J001		350	Each	Two-Way Clear Reflective High Performance Raised Markers
0100	627-L001		1,400	Each	Two-Way Yellow Reflective High Performance Raised Markers
0110	907-304-A008	(GY)	700	Cubic Yard	Granular Material, LVM, Class 3, Group C
0120	907-403-A022	(BA1)	7,600	Ton	9.5-mm, MT, Asphalt Pavement
0130	907-407-A001	(A2)	4,100	Gallon	Asphalt for Tack Coat
0140	907-604-PP003		1	Each	Modify Existing Inlet, Per Plans
0150	907-618-A001		1	Lump Sum	Maintenance of Traffic
0160	907-618-B001		1	Square Feet	Additional Construction Signs [\$10.00]
0170	907-626-B004		9	Mile	6" Thermoplastic Traffic Stripe, Continuous White
0180	907-626-D003		3	Mile	6" Thermoplastic Traffic Stripe, Skip Yellow
0190	907-626-E004		6	Mile	6" Thermoplastic Traffic Stripe, Continuous Yellow
0200	907-626-G004		2,950	Linear Feet	Thermoplastic Detail Stripe, White
0210	907-626-G005		7,450	Linear Feet	Thermoplastic Detail Stripe, Yellow
0220	907-626-H004		820	Linear Feet	Thermoplastic Legend, White
0230	907-626-H005		85	Square Feet	Thermoplastic Legend, White
<b>ALTERNATE GROUP AA NUMBER 1</b>					
0240	907-304-H002	(GY)	650	Cubic Yard	3/4" and Down Crushed Stone Base, LVM
<b>ALTERNATE GROUP AA NUMBER 2</b>					
0250	907-304-H003	(GY)	650	Cubic Yard	Size 610 Crushed Stone Base, LVM
<b>ALTERNATE GROUP AA NUMBER 3</b>					
0260	907-304-H004	(GY)	650	Cubic Yard	Size 825B Crushed Stone Base, LVM



# ADDENDUM

## DESCRIPTION OF SHEET

REVISION DATE

WKG. NO.

SH. NO.

TITLE SHEET			1
DETAIL INDEX & GENERAL NOTES		DI-1	2
TYPICAL OVERLAY SECTION - MAINLINE		TS-1	3
TYPICAL OVERLAY SECTION - FULL DEPTH FAILED AREAS		TS-2	4
SUMMARY OF QUANTITIES		SQ-1	5
ESTIMATED QUANTITIES - FAILED AREAS		EQ-1	6
DETAIL OF INLET - REPLACEMENT OF INLET LID		DE-1	7
DETAIL OF CONSTRUCTION SIGNING		DSC-1	8
DETAIL OF CONSTRUCTION SIGNING		DSC-2	9
STANDARD DRAWINGS - ROADWAY SHEETS (12)			
RUMBLE STRIPES 2-LANE HIGHWAYS (ASPH. LANES, 2-FT. ASPH. SHLD)	RS-1		6119
PAVEMENT MARKING DETAILS FOR 2-LANE AND 4-LANE DIVIDED HIGHWAYS	PM-1		6120
PAVEMENT MARKING LEGEND DETAILS	PM-6		6125
2-LANE, 2-WAY CLEAR RAISED PAVEMENT MARKERS PLACED ON SIDE ROADS	CRPMR-2		6126
TRAFFIC CONTROL PLAN WITH FLAGGER (ONE-LANE CLOSURE OF TWO-WAY TRAFFIC)	TCP-1		6250
HIGHWAY SIGN AND BARRICADE DETAILS FOR CONSTRUCTION PROJECTS	SDTCP-10		6254
TRAFFIC CONTROL PLAN MOBILE OPERATIONS MULTILANE ROADS AND TWO LANE ROADS	TCP-11		6260
TRAFFIC CONTROL PLAN UNEVEN PAVEMENT DETAILS	TCP-14		6263
TEMPORARY STRIPPING FOR 2-LANE AND 4-LANE DIVIDED HIGHWAYS	TCP-15		6264
TRAFFIC CONTROL DETAILS - DRUM PLACEMENT AND SHOULDER CLOSURE	TCP-SC		6265
DRIVEWAYS, CURB AND GUTTER AND SIDEWALK	SDSD-1		6287
STORM SEWER INLET TYPE SS-1	SS-1		6319

### GENERAL NOTES:

- (A) FLUORESCENT ORANGE SHEETING SHALL BE USED ON ALL CONSTRUCTION AND TRAFFIC CONTROL SIGNS EXCEPT FOR THOSE DESIGNATED ON THE PLANS TO BE BLACK LEGEND AND BORDER ON THE WHITE BACKGROUND.
- (B) THE LOCATION AND SPACING OF SIGNS, SHOWN ON THE TRAFFIC CONTROL PLANS, ARE APPROXIMATE AND MAY BE ADJUSTED AS NECESSARY TO FIT FIELD CONDITIONS.
- (C) ALL TRAFFIC CONTROL DEVICES ON THIS PROJECT SHALL COMPLY WITH PART VI OF THE MUTCD (LATEST EDITION).
- (D) THE BOUNDARY OF ALL FAILED AREAS NOT REMOVED BY MILLING WILL BE SAW CUT PRIOR TO REMOVAL OF ASPHALT. COST TO BE ABSORBED IN PAY ITEM NO. 406-A001, COLD MILLING OF BITUMINOUS PAVEMENT, ALL DEPTHS.
- (E) WHERE MILLING IS REQUIRED, THE CONTRACTOR SHALL PROVIDE OUTLETS IN THE EXISTING SHOULDERS AT SUFFICIENT INTERVALS TO PREVENT POOLING OR STANDING WATER ON THE MILLED SURFACE, THE COST OF WHICH SHALL BE ABSORBED IN OTHER ITEMS BID.
- (F) TEMPORARY STRIPING SHALL CONFORM TO FINISHED STRIPE SPECIFICATIONS FOR ALIGNMENT, NEATNESS, AND STRAIGHTNESS.
- (G) ALL ADDENDA TO THESE PLANS WILL BE POSTED TO WWW.MDOT.MS.GOV UNDER THE PROPOSAL ADDENDA COLUMN. BIDDERS ARE ADVISED THAT HARD COPIES OF ANY ADDENDA FOR THIS PROJECT WILL NOT BE MAILED. IT IS THE BIDDER'S RESPONSIBILITY TO CHECK AND SEE IF ANY ADDENDA HAVE BEEN POSTED FOR THIS PROJECT. PLEASE CONTACT CONTRACT ADMINISTRATION DIVISION AT 601-359-7700 FOR ANY QUESTIONS REGARDING ELECTRONIC ADDENDA.

PS & E PLANS-DATE 1/30/2015			
FMS CON. # 305423/301000			
REVISIONS			
DATE	SHEET NO.	BY	BY
3/9/15	8,9	DSP	
4/17/15	2,3,4,5,6	MJC	

DATE	DELETED MILL AND FILL NOTE	REVISION	BY
4/17/15			MJC


MISSISSIPPI DEPARTMENT OF TRANSPORTATION			
DETAILED INDEX			
COUNTY: TIPPAAH	WORKING NUMBER	DI-1	SHEET NUMBER
PROJ. NUM.: MP-1015-70(015)			
FILENAME: SR15_TIPPAH.DGN	DESIGN TEAM	CHECKED	DATE

STATE	PROJECT NO.
MISS.	MP-1015-70(015)



**ADDENDUM**

STATE	PROJECT NO.
MISS.	MP-1015-70(015)

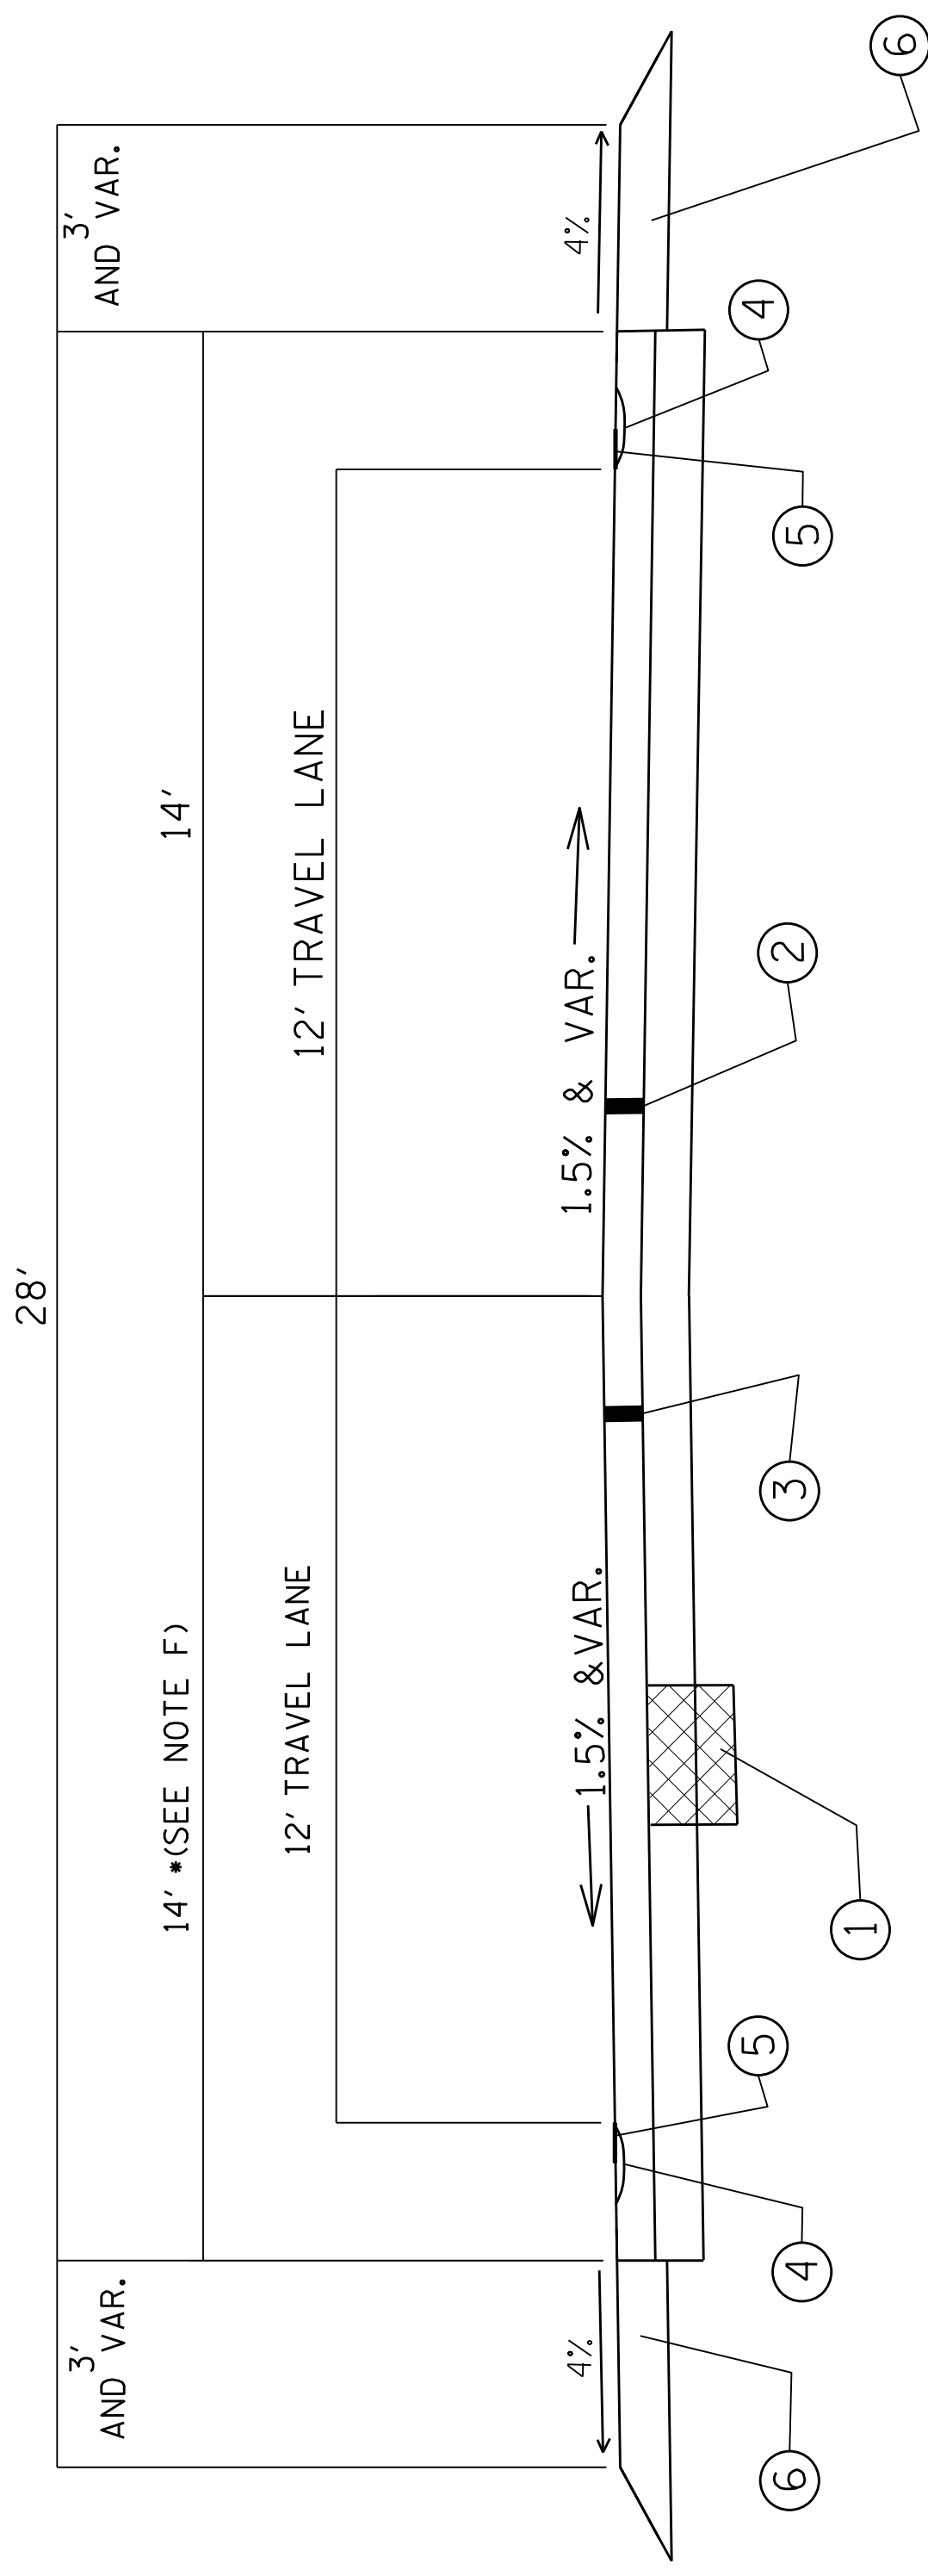

TYPICAL SECTION  
MAINLINE

SR 15

① REMOVE AND UNDERCUT FAILED AREAS AS DIRECTED BY THE ENGINEER. REMOVAL OF ASPHALT TO BE PAID FOR UNDER PAY ITEM NO. 406-A001, COLD MILLING OF BITUMINOUS PAVEMENT, ALL DEPTHS. REMOVAL OF UNDERCUT MATERIAL TO BE PAID FOR UNDER PAY ITEM NO. 203-G003, EXCESS EXCAVATION (EM) (AH). BACKFILL WITH ASPHALT PAVEMENT, MT, (9.5mm MIXTURE), PAY ITEM NO. 907-403-A022 FOR A DEPTH OF 1 FOOT. IF ADDITIONAL BACKFILL MATERIAL IS REQUIRED, USE 3/4" AND DOWN CRUSHED STONE BASE, PAY ITEM NO. 907-304-H002 OR SIZE 610 CRUSHED STONE BASE, PAY ITEM NO. 907-304-H003 OR SIZE 825B CRUSHED STONE BASE, PAY ITEM NO. 907-304-H004.


② 1-1/2" & VARIABLE COLD MILLING REQUIRED, PAY ITEM NO. 406-A001

③ 1-1/2" ASPHALT PAVEMENT, MT, (9.5mm MIXTURE) PAY ITEM 907-403-A022 REQUIRED ON SURFACE. COURSE.

④ RUMBLE STRIPS, GROUND IN, PAY ITEM NO. 423-A001. \*SEE SHEET NO. 6119 (RS-1) FOR ADDITIONAL DETAILS.

⑤ 6" THERMOPLASTIC STRIPE SHALL BE APPLIED OVER GROUND IN RUMBLE STRIP.



⑥ GRAVEL SHOULDER IN PLACE, GRANULAR MATERIAL (CLASS 3, GROUP C) (LVM) PAY ITEM NO. 907-304-A008 REQUIRED ON SHOULDERS.

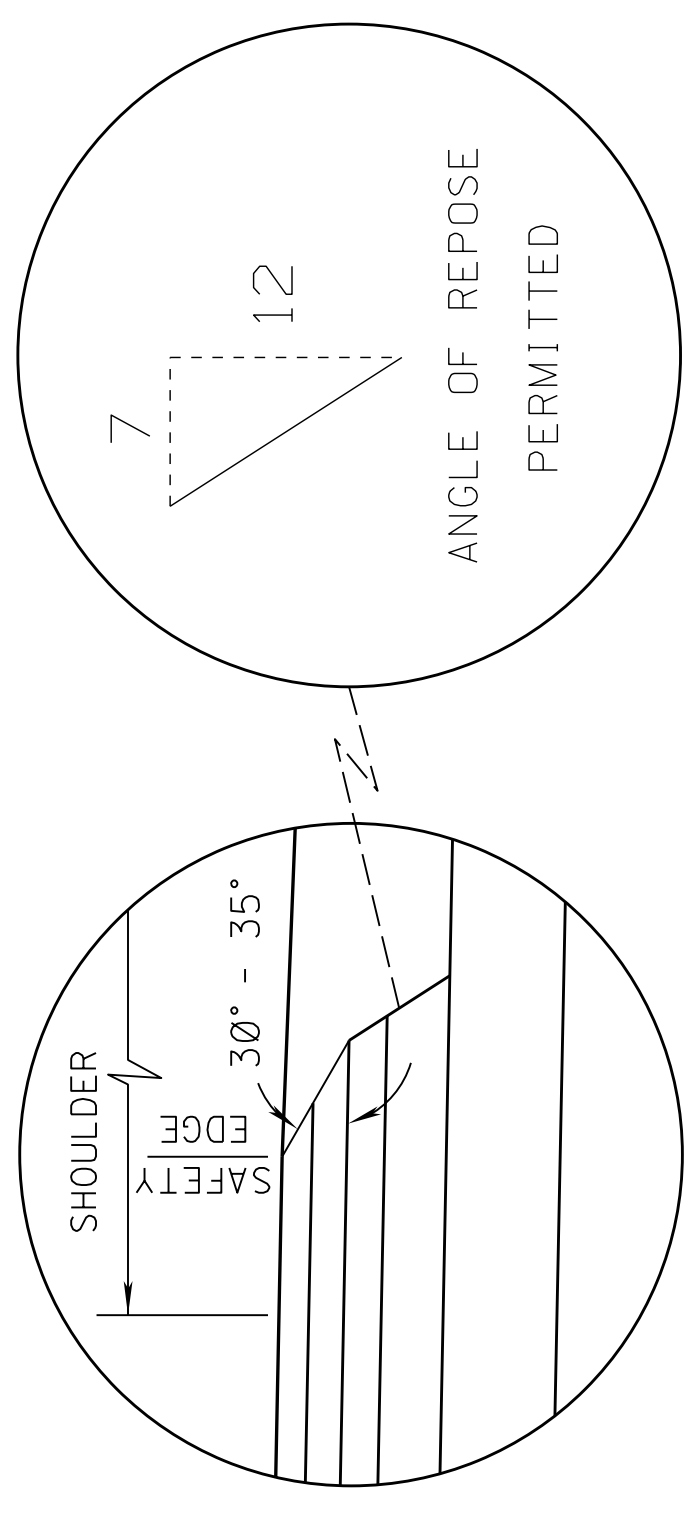

**SAFETY EDGE REQ'D  
TOP 2 LIFTS ONLY  
(NOT A PAY ITEM)  
OVERLAY 14' PAVEMENT**

△ NOTES:

A. LANE WIDTH VARIES FROM 14' - 28' DUE TO EXTRA WIDTH (TURN LANE / PAVED SHOULDER) AT THE FOLLOWING STATIONS:  
56+25 - 75+95 L.T.  
88+08 - 91+83 L.T.  
103+60 - 112+20 L.T.

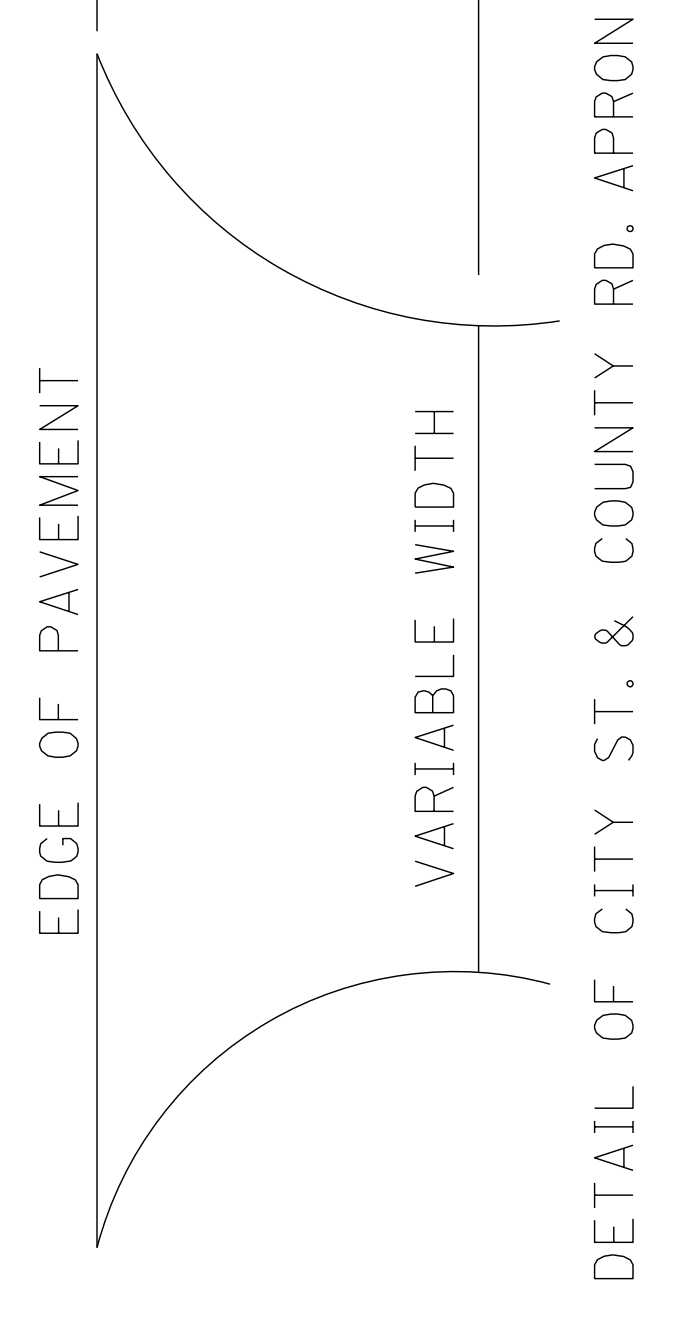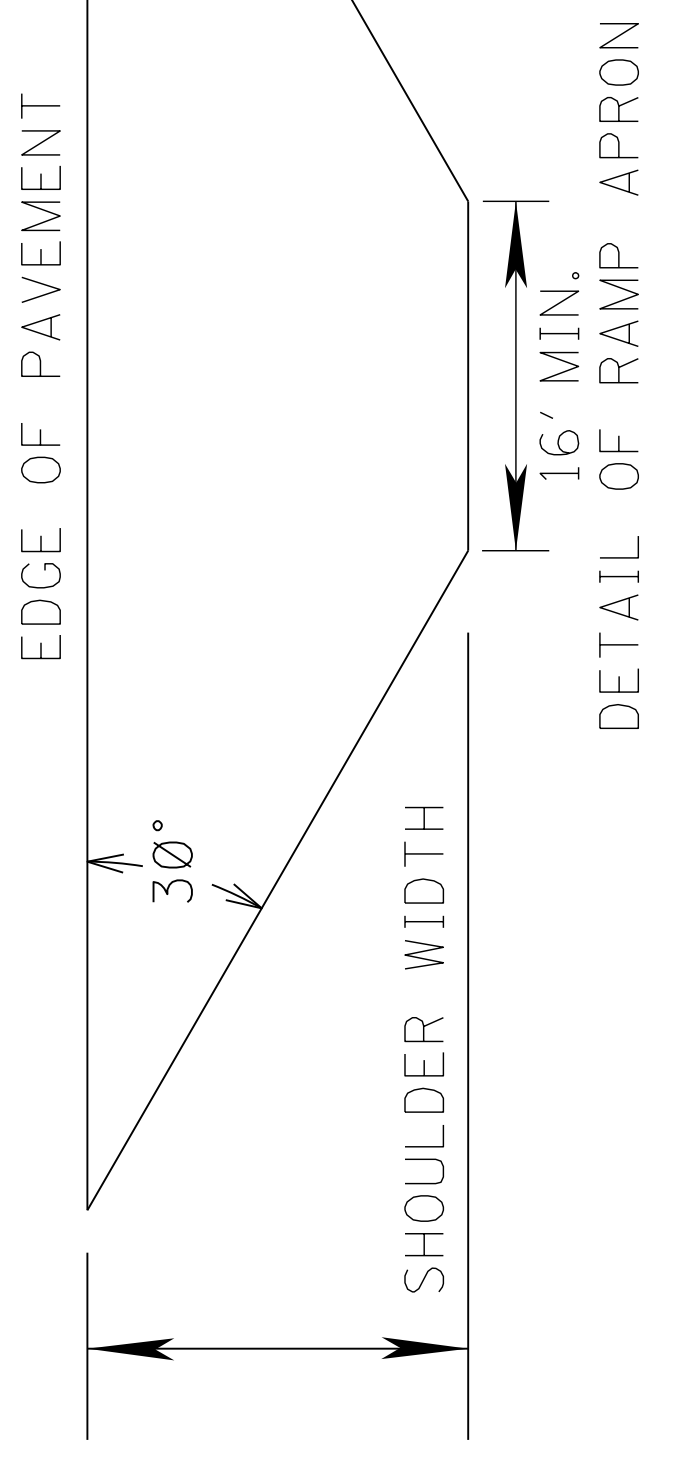

4/17/15	DELETED MILL AND FILL NOTE	BY	MJC
	REVISION		

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

TYPICAL OVERLAY SECTION  
MAINLINE

COUNTY: TIPPACH  
PROJ. NUM.: MP-1015-70(015)  
FILENAME: SR15\_TIPPAH.DGN


DESIGN TEAM \_\_\_\_\_ CHECKED \_\_\_\_\_ DATE \_\_\_\_\_

WORKING NUMBER  
TS-1  
SHEET NUMBER  
3

# ADDENDUM

STATE PROJECT NO.  
MISS. MP-1015-70(015)

FMS COM: 305423/301000

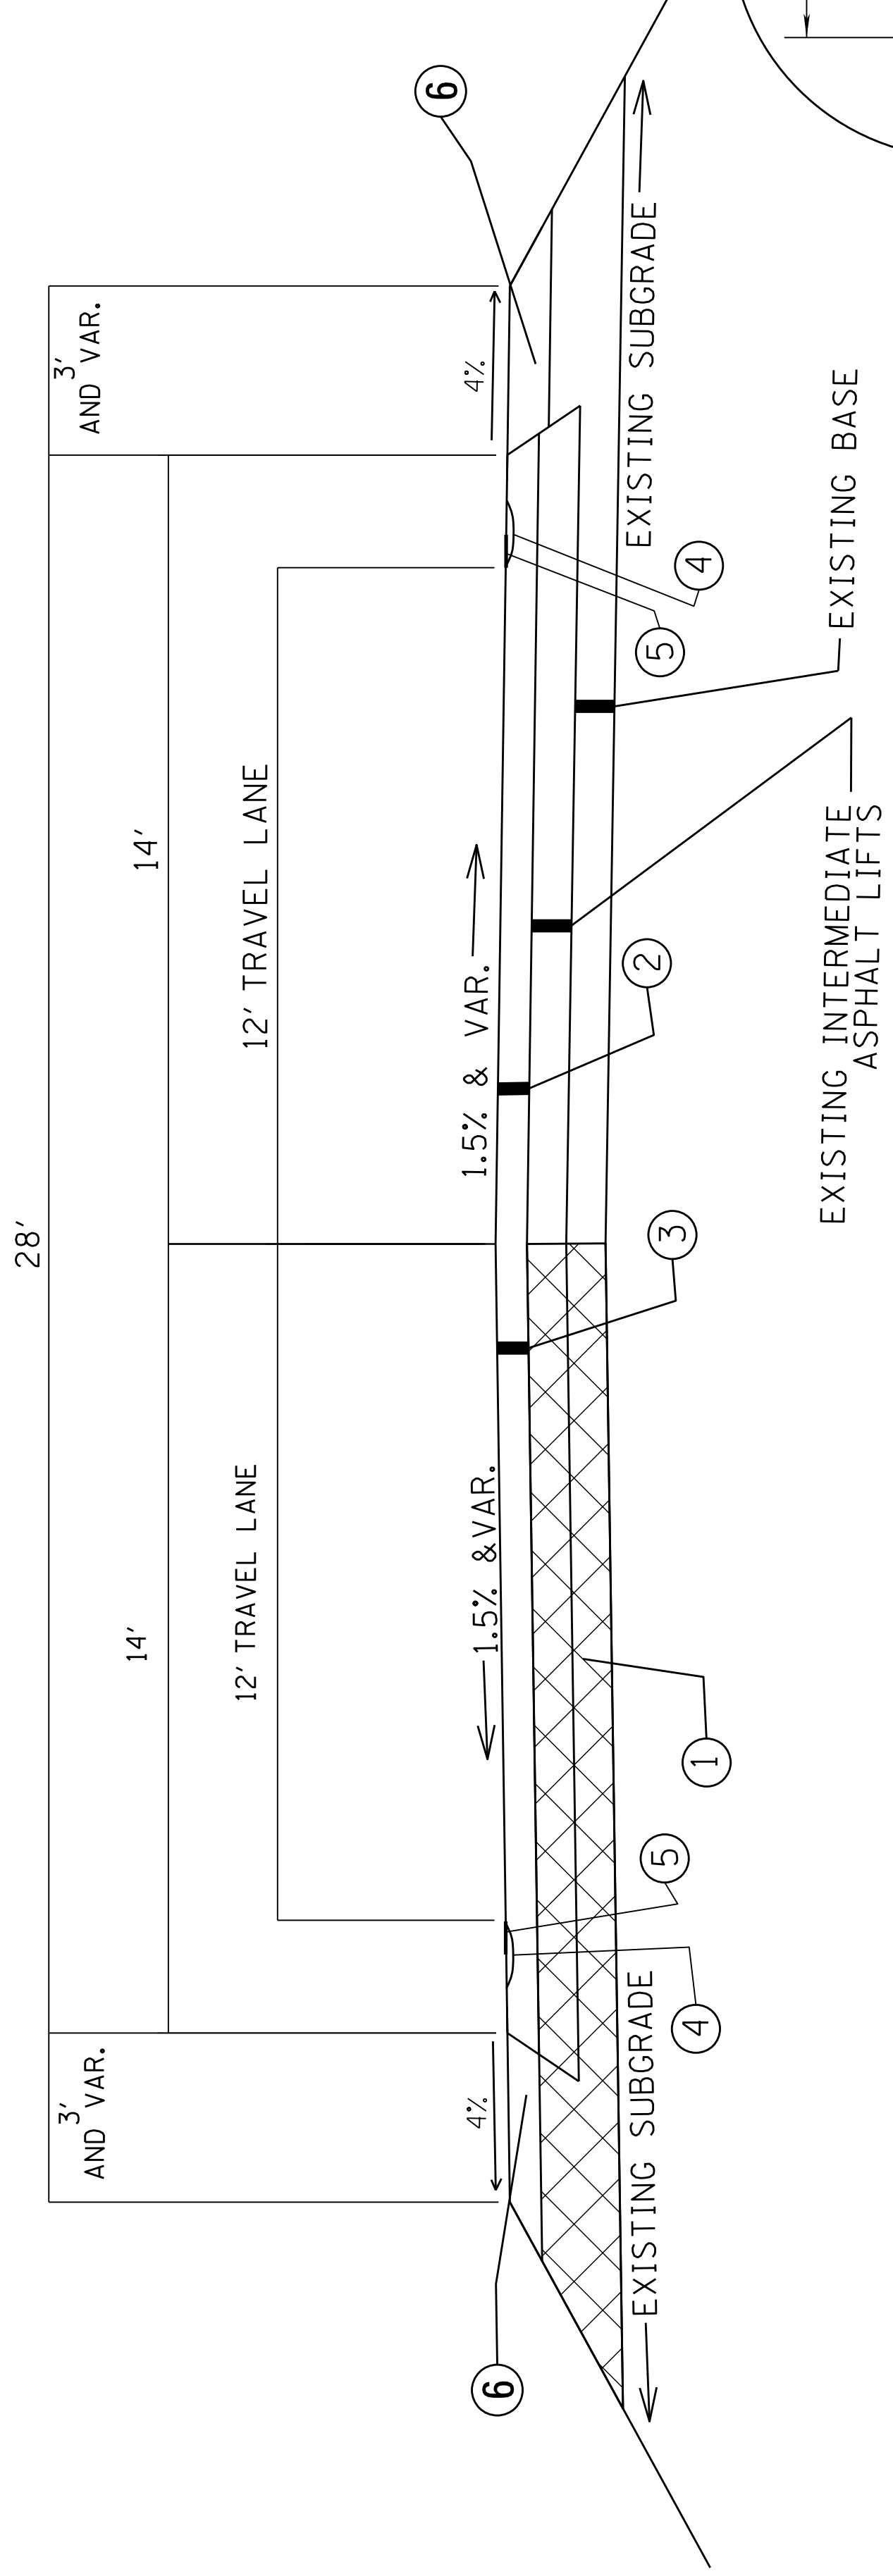


TYPICAL SECTION  
FULL DEPTH FAILED AREA

SR 15  
STA. 209+65 - 212+30

- ① REMOVE AND UNDERCUT FAILED AREAS AS DIRECTED BY THE ENGINEER. REMOVAL OF ASPHALT TO BE PAID FOR UNDER PAY ITEM NO. 406-A001, COLD MILLING OF BITUMINOUS PAVEMENT, ALL DEPTHS. REMOVAL OF UNDERCUT MATERIAL TO BE PAID FOR UNDER PAY ITEM NO. 203-G003, EXCESS EXCAVATION (FM) (AH), BACKFILL WITH ASPHALT PAVEMENT, MT, (9.5mm MIXTURE), PAY ITEM NO. 907-403-A022 FOR A DEPTH OF 1 FOOT. IF ADDITIONAL BACKFILL MATERIAL IS REQUIRED, USE 3/4" AND DOWN CRUSHED STONE BASE, PAY ITEM NO. 907-304-H002 OR SIZE 610 CRUSHED STONE BASE, PAY ITEM NO. 907-304-H003 OR SIZE 825B CRUSHED STONE BASE, PAY ITEM NO. 907-304-H004.
- ② 1-1/2" & VARIABLE COLD MILLING REQUIRED, PAY ITEM NO. 406-A001
- ③ 1-1/2" ASPHALT PAVEMENT, MT, (9.5mm MIXTURE) PAY ITEM 907-403-A022 REQUIRED ON SURFACE. COURSE.
- ④ RUMBLE STRIPS, GROUND IN, PAY ITEM NO. 423-A001. \*SEE SHEET NO. 6119 (RS-1) FOR ADDITIONAL DETAILS.
- ⑤ 6" THERMOPLASTIC STRIPE SHALL BE APPLIED OVER GROUND IN RUMBLE STRIP.
- ⑥ GRAVEL SHOULDER IN PLACE, GRANULAR MATERIAL (CLASS 3, GROUP C) (LVM) PAY ITEM NO. 907-304-A008 REQUIRED ON SHOULDERS.

△ NOTES:

- A. LANE WIDTH VARIES FROM 14' - 28' DUE TO EXTRA WIDTH (TURN LANE / PAVED SHOULDER) AT THE FOLLOWING STATIONS:  
56+25 - 75+95 L.T.  
88+08 - 91+83 L.T.  
103+60 - 112+20 L.T.

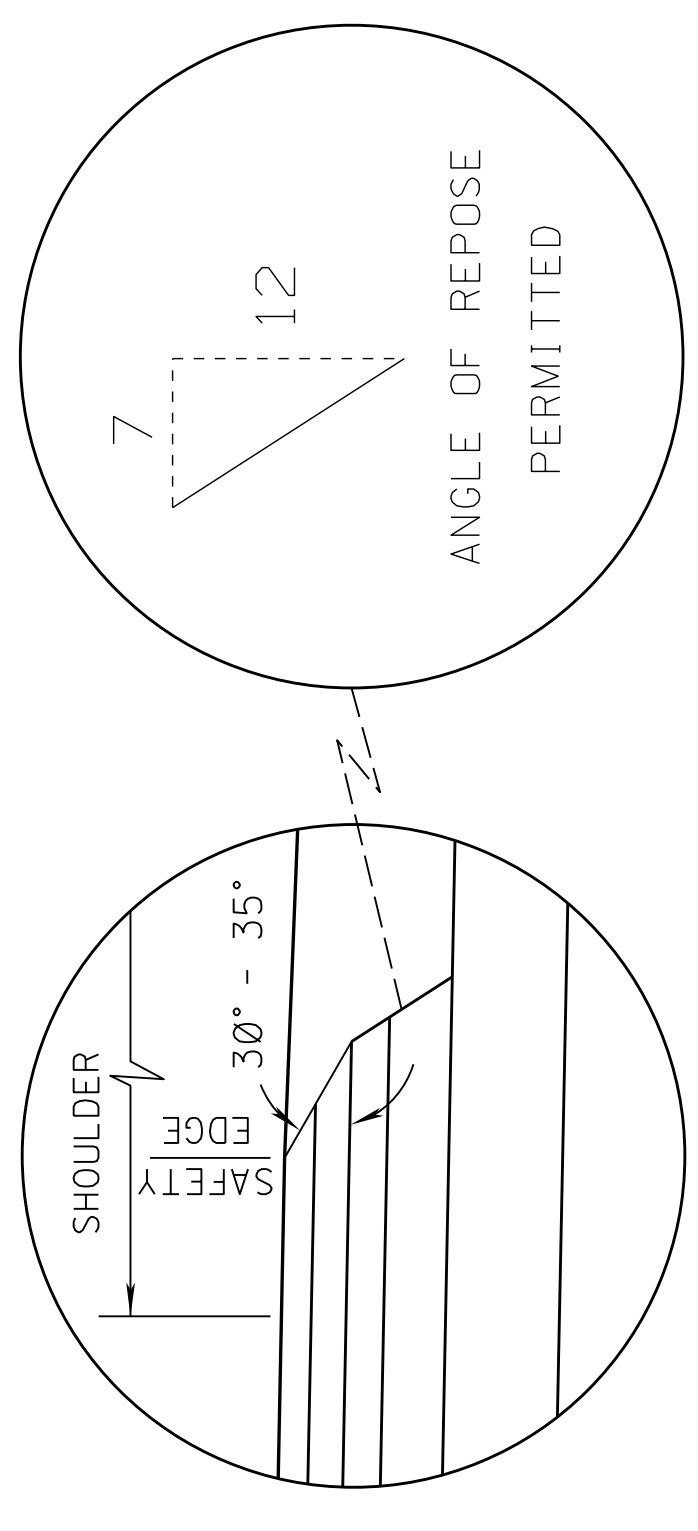

**SAFETY EDGE REQ'D  
TOP 2 LIFTS ONLY  
(NOT A PAY ITEM)  
OVERLAY 14' PAVEMENT**

MISSISSIPPI DEPARTMENT OF TRANSPORTATION	
BY	DATE
MJC	4/7/15
REVISION	DELETED MILL AND FILL NOTE
<b>TYPICAL OVERLAY SECTION FULL DEPTH FAILED AREAS</b>	
COUNTY: TIPPAH	WORKING NUMBER TS-2
PROJ. NUM.: MP-1015-70(015)	SHEET NUMBER
FILENAME: SR15_TIPPAH.DGN	DESIGN TEAM
CHECKED	DATE
	4

SUMMARY OF QUANTITIES (SHEET 1)

PAY ITEM NO.	PAY ITEM	UNIT	PRELIMINARY	FINAL
	*****EARTHWORK ITEMS*****			
203-G003	EXCESS EXCAVATION, FM, AH	CY	550	
	*****SUBBASE AND BASE ITEMS*****			
907-304-A008	GRANULAR MATERIAL, LVM, CLASS 3, GROUP C	CY	700	
	ALTERNATE BASE ITEMS			
907-304-H002	3/4" AND DOWN CRUSHED STONE BASE, LVM	CY	650	
	OR			
907-304-H003	SIZE 610 CRUSHED STONE BASE, LVM	CY	650	
	OR			
907-304-H004	SIZE 825B CRUSHED STONE BASE, LVM	CY	650	
	*****BITUMINOUS PAVEMENT ITEMS*****			
907-403-A022	9.5-MM, MT, ASPHALT PAVEMENT	TON	7600	
406-A001	COLD MILLING OF BITUMINOUS PAVEMENT, ALL DEPTHS	SY	85600	
907-407-A001	ASPHALT FOR TACK COAT	GAL	4100	
423-A001	RUMBLE STRIPS, GROUND IN	MI	9	
	*****INCIDENTAL CONSTRUCTION ITEMS*****			
907-604-PP003	MODIFY EXISTING INLET, PER PLANS	EA	1	
907-618-A001	MAINTENANCE OF TRAFFIC	LS	1	
907-618-B001	ADDITIONAL CONSTRUCTION SIGNS	SF	1	
	*****TRAFFIC CONTROL ITEMS*****			
619-A1002	TEMPORARY TRAFFIC STRIPE, CONTINUOUS WHITE	MI	18	
619-A2002	TEMPORARY TRAFFIC STRIPE, CONTINUOUS YELLOW	MI	11	
619-A4006	TEMPORARY TRAFFIC STRIPE, SKIP YELLOW	MI	6	
619-A5001	TEMPORARY TRAFFIC STRIPE, DETAIL	LF	20660	
619-A6001	TEMPORARY TRAFFIC STRIPE, LEGEND	LF	1640	
	*****PAVEMENT MARKING ITEMS*****			
907-626-B004	6" THERMOPLASTIC TRAFFIC STRIPE, CONTINUOUS WHITE	MI	9	
907-626-D003	6" THERMOPLASTIC TRAFFIC STRIPE, SKIP YELLOW	MI	3	
907-626-E004	6" THERMOPLASTIC TRAFFIC STRIPE, CONTINUOUS YELLOW	MI	6	
907-626-G004	THERMOPLASTIC DETAIL STRIPE, WHITE	LF	2950	
907-626-G005	THERMOPLASTIC DETAIL STRIPE, YELLOW	LF	7450	
907-626-H004	THERMOPLASTIC LEGEND, WHITE	LF	820	
907-626-H005	THERMOPLASTIC LEGEND, WHITE	SF	85	
627-J001	TWO-WAY CLEAR REFLECTIVE HIGH PERFORMANCE RAISED MARKERS	EA	350	
627-L001	TWO-WAY YELLOW REFLECTIVE HIGH PERFORMANCE RAISED MARKERS	EA	1400	

NOTES:

1 QUANTITY INCLUDES 204 TONS FOR INTERSECTIONS, 517 TONS FOR BACKFILLING FAILED AREAS AND 177 TONS FOR APRONS

4/7/15	REVISION	BY	
4/7/15	REVISION	DATE	
4/7/15	REVISOR		
4/7/15	QUANTITIES IN NOTE		
4/7/15	QUANTITIES		

MISSISSIPPI DEPARTMENT OF TRANSPORTATION  
**SUMMARY OF QUANTITIES**

COUNTY: TIPPAAH  
 PROJ. NUM.: MP-1015-70(015)  
 FILENAME: SR15\_TIPPAH.DGN

DESIGN TEAM: \_\_\_\_\_ CHECKED: \_\_\_\_\_ DATE: \_\_\_\_\_

WORKING NUMBER: SQ-1  
 SHEET NUMBER: 5

**ADDENDUM**

STATE PROJECT NO.

MISS. MP-1015-70(015)

**ESTIMATED QUANTITIES**

**FULL DEPTH FAILED AREAS**

STATION	STATION	LANE	LENGTH	WIDTH	REMARKS
95+56	96+00	LT.	44	8	
209+65	212+30	RT.	265	12	
209+65	212+30	LT.	265	12	
234+80	235+20	LT.	40	12	



NOTES:

- A. REMOVAL OF ASHALT TO BE PAID FOR UNDER PAY ITEM NO. 406-A001 COLD MILLING OF BITUMINOUS PAVEMENT, ALL DEPTHS FOR A DEPTH OF 1 FOOT. ADDITIONAL REMOVAL TO BE PAID FOR UNDER PAY ITEM NO. 203-G003 EXCESS EXCAVATION (FM) (AH).
- B. THE BOUNDARY OF ALL FAILED AREAS NOT REMOVED BY MILLING WILL BE SAW CUT PRIOR TO REMOVAL OF ASPHALT. COST TO BE ABSORBED IN PAY ITEM NO. 406-A001; COLD MILLING OF BITUMINOUS PAVEMENT, ALL DEPTHS.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION	
4/7/15	ADDED FAILED AREA
MJC	REVISION
BY	
COUNTY:	TIPPAAH
PROJ. NUM.:	MP-1015-70(015)
FILENAME:	SR15_TIPPAH.DGN
DESIGN TEAM	CHECKED _____ DATE _____
WORKING NUMBER	EQ-1
SHEET NUMBER	6

4/20/2015 09:10:17 SR15\_TIPPAH.DGN  
 ROADWAY DESIGN DIVISION  
 MISSISSIPPI DEPARTMENT OF TRANSPORTATION