

SECTION 905 -- PROPOSAL (CONTINUED)

I (We) hereby certify by digital signature and electronic submission via Bid Express of the Section 905 proposal below, that all certifications, disclosures and affidavits incorporated herein are deemed to be duly executed in the aggregate, fully enforceable and binding upon delivery of the bid proposal. I (We) further acknowledge that this certification shall not extend to the bid bond or alternate security which must be separately executed for the benefit of the Commission. This signature does not cure deficiencies in any required certifications, disclosures and/or affidavits. I (We) also acknowledge the right of the Commission to require full and final execution on any certification, disclosure or affidavit contained in the proposal at the Commission's election upon award. Failure to so execute at the Commission's request within the time allowed in the Standard Specifications for execution of all contract documents will result in forfeiture of the bid bond or alternate security.

Bidder acknowledges receipt of and has added to and made a part of the proposal and contract documents the following addendum (addenda):

ADDENDUM NO. 1 DATED 7/19/2016 ADDENDUM NO. DATED
 ADDENDUM NO. DATED ADDENDUM NO. DATED

Number	Description
1	Revised Table of Contents; Add SP 907-619-12; Revised Bid Items; Amendment EBS Download Required.

TOTAL ADDENDA: 1
 (Must agree with total addenda issued prior to opening of bids)

Respectfully Submitted,

DATE _____

 Contractor

BY _____
 Signature

TITLE _____

ADDRESS _____

CITY, STATE, ZIP _____

PHONE _____

FAX _____

E-MAIL _____

(To be filled in if a corporation)

Our corporation is chartered under the Laws of the State of _____ and the names, titles and business addresses of the executives are as follows:

 President Address

 Secretary Address

 Treasurer Address

The following is my (our) itemized proposal.

MP-2035-04(011)/ 305880301000

Attala County(ies)

Revised 01/26/2016

**MISSISSIPPI DEPARTMENT OF TRANSPORTATION
TABLE OF CONTENTS**

PROJECT: MP-2035-04(011)/305880301 - Attala

Section 901 - Advertisement

Section 904 - Notice to Bidders

#1	Governing Specifications
#3	Final Cleanup
#1405	Errata & Modifications to 2004 Standard Specifications
#1928	Federal Bridge Formula
#3131	Temporary Traffic Paint
#3893	Petroleum Products Base Price
#4214	Safety Apparel
#4526	Electronic Addendum Process
#4565	Manual on Uniform Traffic Control Devices (MUTCD)
#5044	Questions Regarding Bidding
#5053	Contractor Correspondence
#5080	Standard Drawings
#5405	Traffic Control Devices
#5411	Safety Edge
#5412	Weight Limits
#5824	Adjustments for Bituminous Materials
#5866	Payroll Requirements
#6499	Contract Time
#6500	Scope of Work

Section 907 - Special Provisions

907-101-4	Definitions
907-102-12	Bidding Requirements and Conditions
907-103-11	Award and Execution
907-104-5	Scope of Work
907-104-6	Partnering Process
907-105-9	Control of Work
907-107-13	Legal Relations and Responsibility to Public, w/Supplement
907-108-38	Prosecution and Progress
907-109-8	Measurement and Payment
907-304-13	Granular Courses
907-401-7	Asphalt Pavements, w/ Supplement
907-403-14	Asphalt Pavements
907-406-4	Cold Milling
907-407-2	Tack Coat
907-618-9	Placement of Temporary Traffic Stripe
907-618-13	Temporary Construction Signs
907-618-14	Additional Signing Requirements, w/ Supplement
907-619-12	Temporary Portable Rumble Strips
907-626-25	Thermoplastic Traffic Markings
907-702-5	Specifications for Bituminous Materials

PROJECT: MP-2035-04(011)/305880301 - Attala

907-703-12	Aggregates, w/ Supplement
907-710-1	Fast Dry Solvent Traffic Paint
907-720-2	Pavement Marking Materials

Section 905 - Proposal, Proposal Bid Items, Combination Bid Proposal
State Board of Contractors Requirement
State Certification Regarding Non-Collusion, Debarment and Suspensions
Section 902 - Contract Form
Section 903 - Contract Bond Forms

(REVISIONS TO THE ABOVE WILL BE INDICATED ON THE SECOND SHEET
OF SECTION 905 AS ADDENDA)

07/19/2016 10:56 AM

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-619-12

CODE: (SP)

DATE: 07/13/2016

SUBJECT: Temporary Portable Rumble Strips

Section 619, Traffic Control for Construction Zones, of the 2004 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

907-619.02--Materials. After Subsection 619.02.13 on page 424, add the following.

907-619.02.16--Temporary Portable Rumble Strips. Temporary portable rumble strips shall be made of engineered polymers and may be composed of interlocking segments or may have a hinge at the midpoint. The rumble strips shall consist of the following:

- capable of being installed without adhesives or bolts,
- have a minimum weight of 100 pounds,
- have a minimum overall length of 11 feet,
- have a minimum width of 12 inches, and
- have a maximum height of 3/4 inch.

Temporary portable rumble strips shall be installed in accordance with the attached details, or as directed by the Engineer.

907-619.03--Construction Requirements. After Subsection 619.03.9 on page 427, add the following.

907-619.03.12--Temporary Portable Rumble Strips. Temporary portable rumble strips shall be placed at locations shown on the traffic control plans, attached drawing, or as directed by the Engineer. The rumble strips shall be removed when lane closures are removed, relocated when lane closures are relocated, or as directed by the Engineer.

Prior to placement of the rumble strips, the roadway shall be cleaned to be free of dust, sand, and other materials that may cause slippage. The minimum roadway temperature at the time of installation shall be in accordance with manufacturer recommendations.

A minimum of three (3) temporary portable rumble strips shall be arranged in an array. The spacing of temporary portable rumble strips in each array shall be on 10-foot centers. The rumble strips shall be regularly monitored and maintained to ensure they stay in place under traffic.


907-619.04--Method of Measurement. At the end of Subsection 619.04 on page 428, add the following.

Temporary Portable Rumble Strips will be measured for payment by the linear foot only when a pay item for temporary portable rumble strips is included in the contract. Otherwise, temporary portable rumble strips will be included in the cost of pay item 907-618, Maintenance of Traffic. The quantity of temporary portable rumble strips will be the length of rumble strips approved by the Engineer to be in-place on the project at any one time.

907-619.05--Basis of Payment. Temporary Portable Rumble Strips measured as prescribed above, will be paid for at the contract unit price per linear foot, which price shall be full compensation for cleaning the roadway surface, installing the rumble strips, maintenance and repair of the strips, cleaning and resetting of the strips, removal and replacement, and for all labor, equipment, tools, and incidentals necessary to complete the work.

Add the following to the list of pay items on page 429.

907-619-B: Temporary Portable Rumble Strips - per linear foot

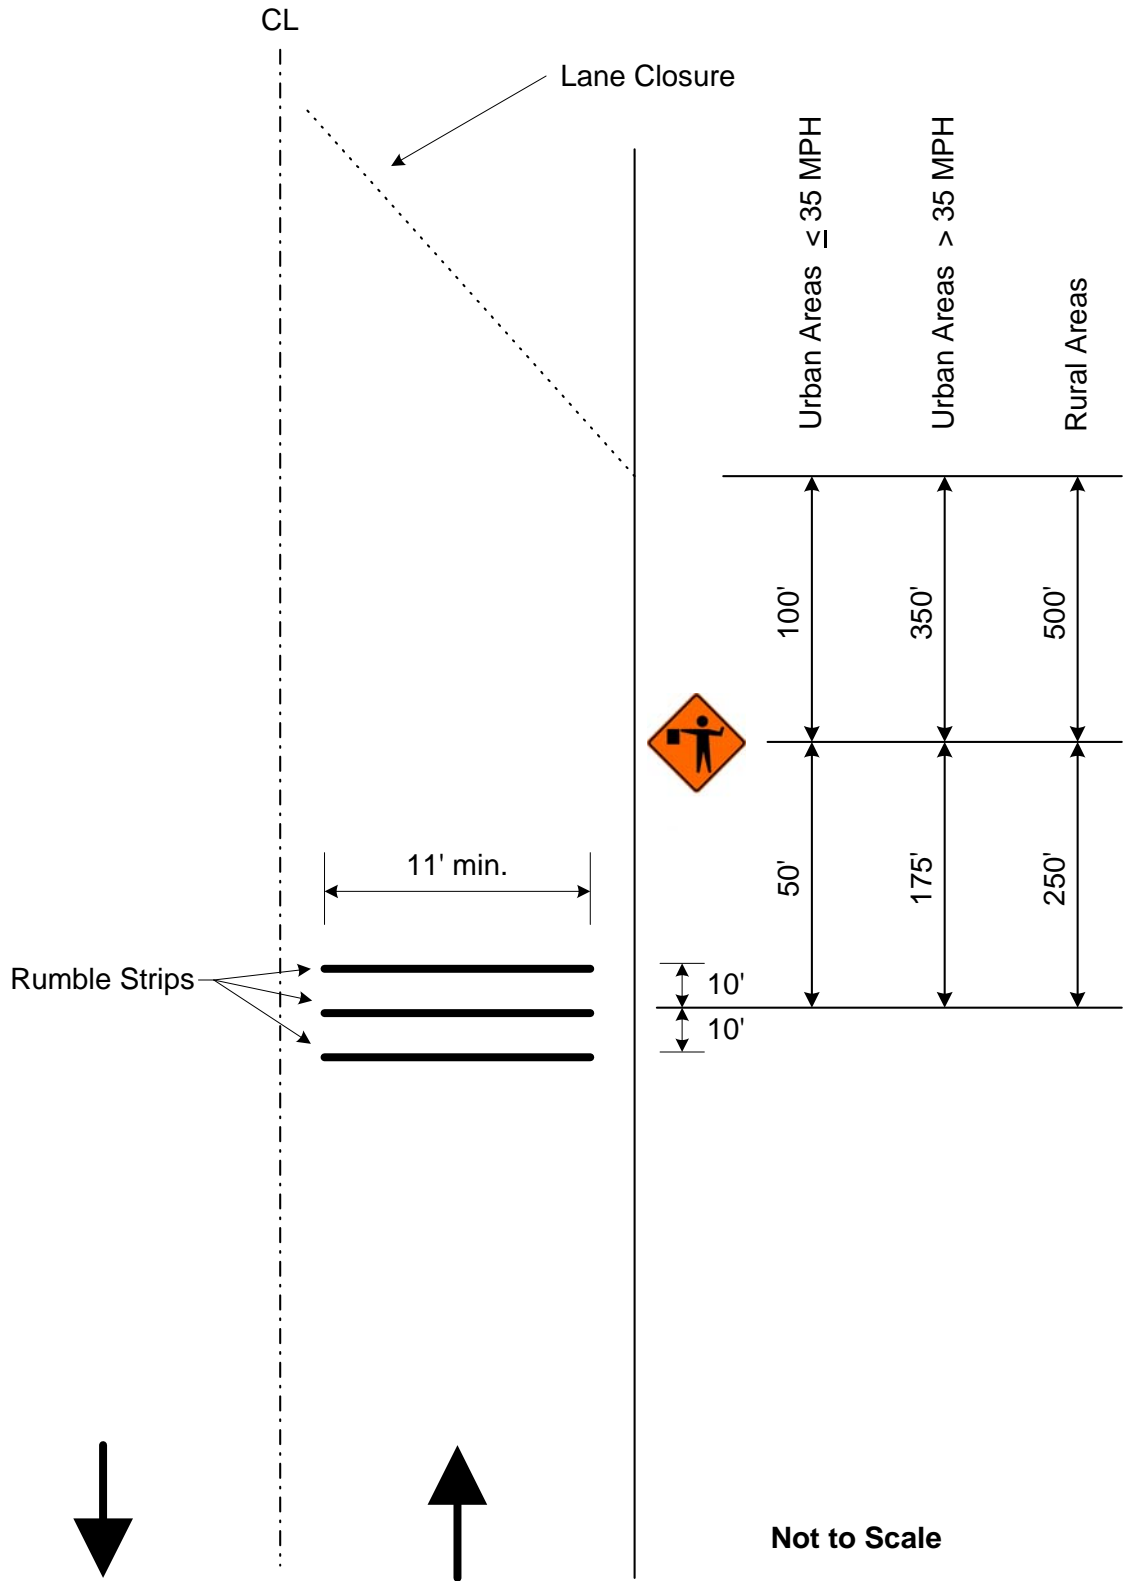

Detail of Temporary Portable Rumble Strips

Mill & Overlay approximately 5 miles of SR 35 from Hesterville to Carroll CL, known as State Project No. MP-2035-04(011) / 305880301 in Attala County.

Line No.	Item Code	Adj Code	Quantity	Units	Description [Fixed Unit Price]
Roadway Items					
0010	619-A1002		38	Mile	Temporary Traffic Stripe, Continuous White
0020	619-A2002		24	Mile	Temporary Traffic Stripe, Continuous Yellow
0030	619-A4006		10	Mile	Temporary Traffic Stripe, Skip Yellow
0040	619-A5001		5,200	Linear Feet	Temporary Traffic Stripe, Detail
0050	619-A6001		2,080	Linear Feet	Temporary Traffic Stripe, Legend
0060	620-A001		1	Lump Sum	Mobilization
0070	627-L001		950	Each	Two-Way Yellow Reflective High Performance Raised Markers
0080	907-304-B009	(GT)	2,600	Ton	Granular Material, Class 3, Group D
0090	907-403-A017	(BA1)	13,425	Ton	9.5-mm, ST, Asphalt Pavement
0100	907-403-B012	(BA1)	1,310	Ton	9.5-mm, ST, Asphalt Pavement, Leveling
0110	907-406-D001		157,266	Square Yard	Fine Milling of Bituminous Pavement, All Depths
0120	907-407-A001	(A2)	23,600	Gallon	Asphalt for Tack Coat
0130	907-618-A001		1	Lump Sum	Maintenance of Traffic
0140	907-618-B001		10	Square Feet	Additional Construction Signs [\$10.00]
0144	907-619-B001		66	Linear Feet	Temporary Portable Rumble Strips
0150	907-626-C004		19	Mile	6" Thermoplastic Edge Stripe, Continuous White
0160	907-626-D003		12	Mile	6" Thermoplastic Traffic Stripe, Skip Yellow
0170	907-626-E004		5	Mile	6" Thermoplastic Traffic Stripe, Continuous Yellow
0180	907-626-G004		2,600	Linear Feet	Thermoplastic Detail Stripe, White
0190	907-626-H004		1,040	Linear Feet	Thermoplastic Legend, White