

**SECTION 905 -- PROPOSAL (CONTINUED)**

I (We) hereby certify by digital signature and electronic submission via Bid Express of the Section 905 proposal below, that all certifications, disclosures and affidavits incorporated herein are deemed to be duly executed in the aggregate, fully enforceable and binding upon delivery of the bid proposal. I (We) further acknowledge that this certification shall not extend to the bid bond or alternate security which must be separately executed for the benefit of the Commission. This signature does not cure deficiencies in any required certifications, disclosures and/or affidavits. I (We) also acknowledge the right of the Commission to require full and final execution on any certification, disclosure or affidavit contained in the proposal at the Commission's election upon award. Failure to so execute at the Commission's request within the time allowed in the Standard Specifications for execution of all contract documents will result in forfeiture of the bid bond or alternate security.

Bidder acknowledges receipt of and has added to and made a part of the proposal and contract documents the following addendum (addenda):

ADDENDUM NO.   1   DATED   7/19/2016   ADDENDUM NO.        DATED         
 ADDENDUM NO.        DATED        ADDENDUM NO.        DATED       

Number	Description
1	Revised Table of Contents; Add Special Provision 907-619-12; Revised Bid Items; Amendment EBS Download Required.

TOTAL ADDENDA:   1    
 (Must agree with total addenda issued prior to opening of bids)

Respectfully Submitted,

DATE \_\_\_\_\_

\_\_\_\_\_  
 Contractor

BY \_\_\_\_\_  
 Signature

TITLE \_\_\_\_\_

ADDRESS \_\_\_\_\_

CITY, STATE, ZIP \_\_\_\_\_

PHONE \_\_\_\_\_

FAX \_\_\_\_\_

E-MAIL \_\_\_\_\_

(To be filled in if a corporation)

Our corporation is chartered under the Laws of the State of \_\_\_\_\_ and the names, titles and business addresses of the executives are as follows:

\_\_\_\_\_  
 President Address

\_\_\_\_\_  
 Secretary Address

\_\_\_\_\_  
 Treasurer Address

The following is my (our) itemized proposal.

MP-6043-55(028)/ 305883301000

Pearl River County(ies)

**MISSISSIPPI DEPARTMENT OF TRANSPORTATION  
TABLE OF CONTENTS**

**PROJECT: MP-6043-55(028)/305883301 - Pearl River**

Section 901 - Advertisement

Section 904 - Notice to Bidders

#1	Governing Specifications
#3	Final Cleanup
#1405	Errata & Modifications to 2004 Standard Specifications
#1928	Federal Bridge Formula
#3131	Temporary Traffic Paint
#3893	Petroleum Products Base Price
#4189	Rumble Stripe
#4214	Safety Apparel
#4526	Electronic Addendum Process
#4565	Manual on Uniform Traffic Control Devices (MUTCD)
#5044	Questions Regarding Bidding
#5053	Contractor Correspondence
#5080	Standard Drawings
#5405	Traffic Control Devices
#5411	Safety Edge
#5412	Weight Limits
#5824	Adjustments for Bituminous Materials
#6444	Contract Time
#6445	Scope of Work

Section 907 - Special Provisions

907-101-4	Definitions
907-102-12	Bidding Requirements and Conditions
907-103-11	Award and Execution
907-104-5	Scope of Work
907-104-6	Partnering Process
907-105-9	Control of Work
907-107-13	Legal Relations and Responsibility to Public, w/Supplement
907-108-38	Prosecution and Progress
907-109-8	Measurement and Payment
907-304-13	Granular Courses
907-401-7	Asphalt Pavements, w/ Supplement
907-403-14	Asphalt Pavements
907-406-4	Cold Milling
907-407-2	Tack Coat
907-618-9	Placement of Temporary Traffic Stripe
907-618-13	Temporary Construction Signs
907-618-14	Additional Signing Requirements, w/ Supplement
907-619-12	Temporary Portable Rumble Strips
907-626-25	Thermoplastic Traffic Markings
907-702-5	Specifications for Bituminous Materials

**PROJECT: MP-6043-55(028)/305883301 - Pearl River**

907-703-12	Aggregates, w/ Supplement
907-710-1	Fast Dry Solvent Traffic Paint
907-720-2	Pavement Marking Materials
907-823-9	Preformed Joint Seal, w/ Attachments

Section 905 - Proposal, Proposal Bid Items, Combination Bid Proposal  
State Board of Contractors Requirement  
State Certification Regarding Non-Collusion, Debarment and Suspensions  
Section 902 - Contract Form  
Section 903 - Contract Bond Forms

Progress Schedule

(REVISIONS TO THE ABOVE WILL BE INDICATED ON THE SECOND SHEET  
OF SECTION 905 AS ADDENDA)

07/19/2016 08:24 AM

# MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-619-12

CODE: (SP)

DATE: 07/13/2016

SUBJECT: Temporary Portable Rumble Strips

Section 619, Traffic Control for Construction Zones, of the 2004 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

**907-619.02--Materials.** After Subsection 619.02.13 on page 424, add the following.

**907-619.02.16--Temporary Portable Rumble Strips.** Temporary portable rumble strips shall be made of engineered polymers and may be composed of interlocking segments or may have a hinge at the midpoint. The rumble strips shall consist of the following:

- capable of being installed without adhesives or bolts,
- have a minimum weight of 100 pounds,
- have a minimum overall length of 11 feet,
- have a minimum width of 12 inches, and
- have a maximum height of 3/4 inch.

Temporary portable rumble strips shall be installed in accordance with the attached details, or as directed by the Engineer.

**907-619.03--Construction Requirements.** After Subsection 619.03.9 on page 427, add the following.

**907-619.03.12--Temporary Portable Rumble Strips.** Temporary portable rumble strips shall be placed at locations shown on the traffic control plans, attached drawing, or as directed by the Engineer. The rumble strips shall be removed when lane closures are removed, relocated when lane closures are relocated, or as directed by the Engineer.

Prior to placement of the rumble strips, the roadway shall be cleaned to be free of dust, sand, and other materials that may cause slippage. The minimum roadway temperature at the time of installation shall be in accordance with manufacturer recommendations.

A minimum of three (3) temporary portable rumble strips shall be arranged in an array. The spacing of temporary portable rumble strips in each array shall be on 10-foot centers. The rumble strips shall be regularly monitored and maintained to ensure they stay in place under traffic.


**907-619.04--Method of Measurement.** At the end of Subsection 619.04 on page 428, add the following.

Temporary Portable Rumble Strips will be measured for payment by the linear foot only when a pay item for temporary portable rumble strips is included in the contract. Otherwise, temporary portable rumble strips will be included in the cost of pay item 907-618, Maintenance of Traffic. The quantity of temporary portable rumble strips will be the length of rumble strips approved by the Engineer to be in-place on the project at any one time.

**907-619.05--Basis of Payment.** Temporary Portable Rumble Strips measured as prescribed above, will be paid for at the contract unit price per linear foot, which price shall be full compensation for cleaning the roadway surface, installing the rumble strips, maintenance and repair of the strips, cleaning and resetting of the strips, removal and replacement, and for all labor, equipment, tools, and incidentals necessary to complete the work.

Add the following to the list of pay items on page 429.

907-619-B: Temporary Portable Rumble Strips - per linear foot

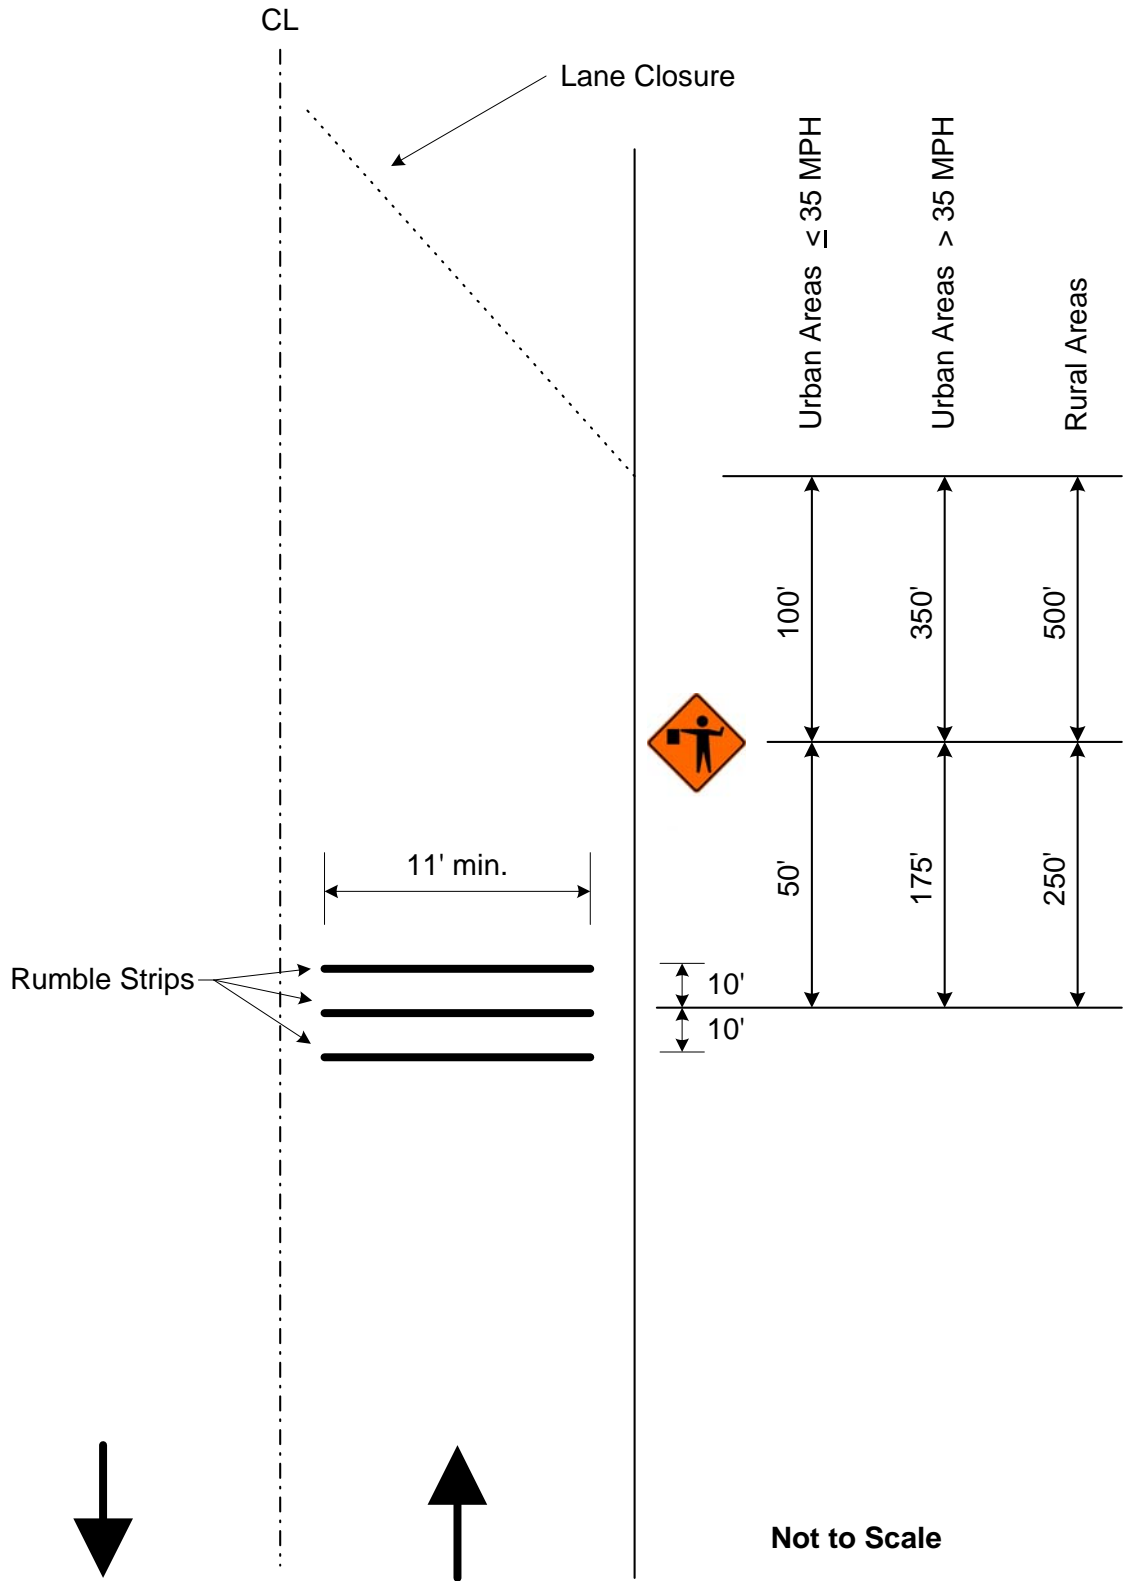

**Detail of Temporary Portable Rumble Strips**

Overlay approximately 8 miles of SR 43 from Hancock County Line to I-59, known as State Project No. MP-6043-55(028) / 305883301 in Pearl River County.

Line No.	Item Code	Adj Code	Quantity	Units	Description [Fixed Unit Price]
<b>Roadway Items</b>					
0010	202-B076		450	Linear Feet	Removal of Traffic Stripe
0020	423-A001		13	Mile	Rumble Strips, Ground In
0030	619-A1002		29	Mile	Temporary Traffic Stripe, Continuous White
0040	619-A2002		8	Mile	Temporary Traffic Stripe, Continuous Yellow
0050	619-A3006		2	Mile	Temporary Traffic Stripe, Skip White
0060	619-A4006		15	Mile	Temporary Traffic Stripe, Skip Yellow
0070	619-A5001		7,000	Linear Feet	Temporary Traffic Stripe, Detail
0080	619-A6001		4,100	Linear Feet	Temporary Traffic Stripe, Legend
0090	620-A001		1	Lump Sum	Mobilization
0100	627-J001		580	Each	Two-Way Clear Reflective High Performance Raised Markers
0110	627-K001		175	Each	Red-Clear Reflective High Performance Raised Markers
0120	627-L001		865	Each	Two-Way Yellow Reflective High Performance Raised Markers
0130	907-304-F004	(GT)	2,250	Ton	Size 825B Crushed Stone Base
0140	907-403-A022	(BA1)	13,400	Ton	9.5-mm, MT, Asphalt Pavement
0150	907-403-B016	(BA1)	4,500	Ton	9.5-mm, MT, Asphalt Pavement, Leveling
0160	907-406-D001		40,000	Square Yard	Fine Milling of Bituminous Pavement, All Depths
0170	907-407-A001	(A2)	2,100	Gallon	Asphalt for Tack Coat
0180	907-618-A001		1	Lump Sum	Maintenance of Traffic
0190	907-618-B001		1	Square Feet	Additional Construction Signs [\$10.00]
0192	907-619-B001		66	Linear Feet	Temporary Portable Rumble Strips
0200	907-626-A003		1	Mile	6" Thermoplastic Traffic Stripe, Skip White
0210	907-626-C003		15	Mile	6" Thermoplastic Double Drop Edge Stripe, Continuous White
0220	907-626-D003		7	Mile	6" Thermoplastic Traffic Stripe, Skip Yellow
0230	907-626-E004		4	Mile	6" Thermoplastic Traffic Stripe, Continuous Yellow
0240	907-626-G004		1,797	Linear Feet	Thermoplastic Detail Stripe, White
0250	907-626-G005		6,106	Linear Feet	Thermoplastic Detail Stripe, Yellow
0260	907-626-H004		4,110	Linear Feet	Thermoplastic Legend, White
0270	907-626-H005		1,050	Square Feet	Thermoplastic Legend, White
<b>Bridge Items</b>					
0280	808-A001	(S)	200	Linear Feet	Joint Preparation
0290	907-823-A001		100	Linear Feet	Prefomed Joint Seal, Type I
0300	907-823-B001		200	Linear Feet	Saw Cut, Type I