

STATE	PROJECT NUMBER	SHEET NO.
MISSISSIPPI	ER-0185-00(019) ER-0181-00(006) ER-0014-02(073)	1

GENERAL INDEX

INCLUDED THIS PROJECT	BEGIN WITH SHEET
<input checked="" type="checkbox"/> ROADWAY	1
<input type="checkbox"/> PERMANENT SIGNS	1001
<input type="checkbox"/> TRAFFIC SIGNALS	2001
<input type="checkbox"/> ITS COMPONENTS	3001
<input type="checkbox"/> LIGHTING	4001
<input type="checkbox"/> (RESERVED)	5001
<input checked="" type="checkbox"/> ROADWAY STANDARD DWGS ..	6001
<input type="checkbox"/> BRIDGE STANDARD DWGS	7001
<input type="checkbox"/> BRIDGE	8001
<input type="checkbox"/> CROSS SECTIONS	9001

STATE OF MISSISSIPPI

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

PLAN AND PROFILE OF PROPOSED STATE HIGHWAY FEDERAL AID PROJECT .NO.




**ER-0185-00(019)
ER-0014-02(073)
ER-0181-00(006)**

**S.R. 48
S.R. 198
U.S. 98
WALTHALL COUNTY**

FMS. CONST. NO. 107302/301000
107309/301000
107348/301000

SCALES

PLAN	1 IN. = 100 FT.
PROFILE	HOR. 1 IN. = 100 FT.
	VERT. 1 IN. = 10 FT.
LAYOUT	1 IN. = 2,595 FT.

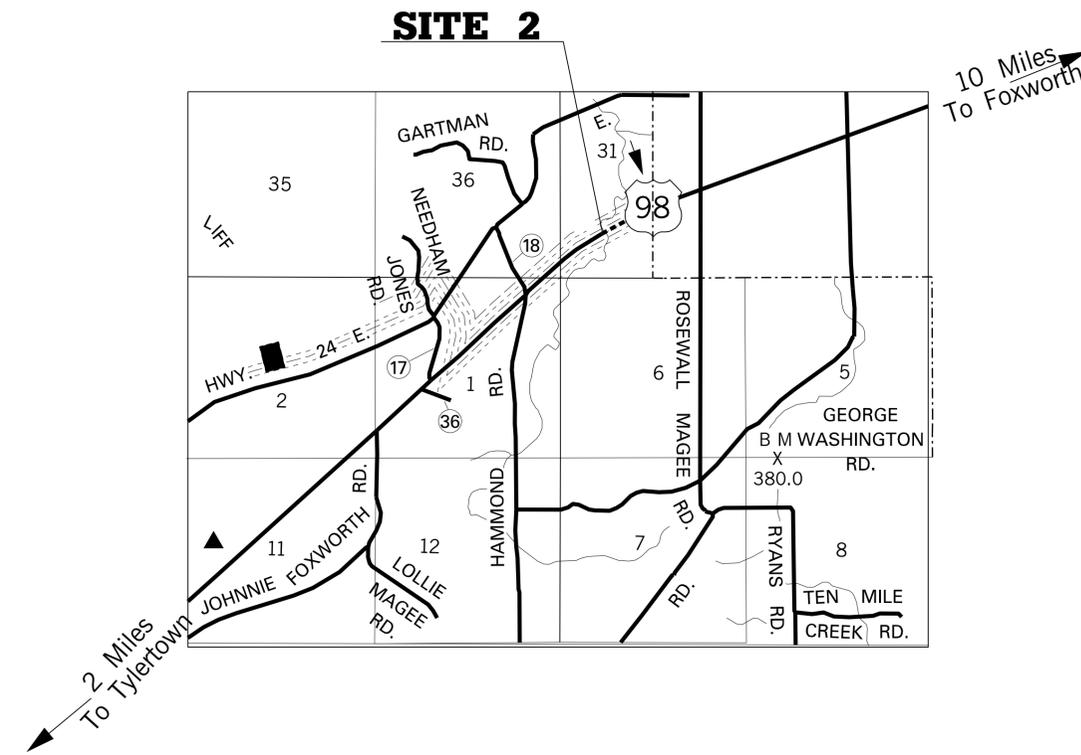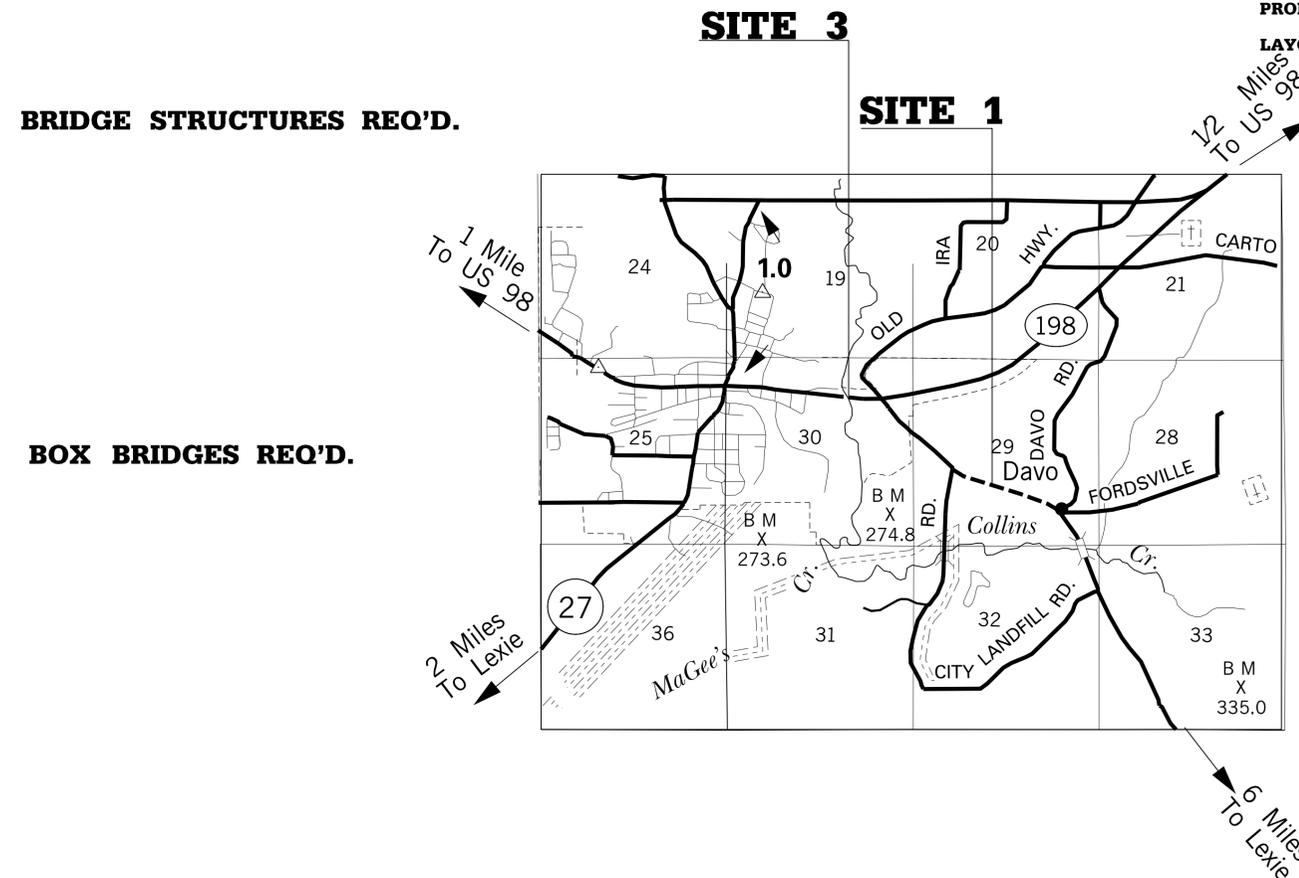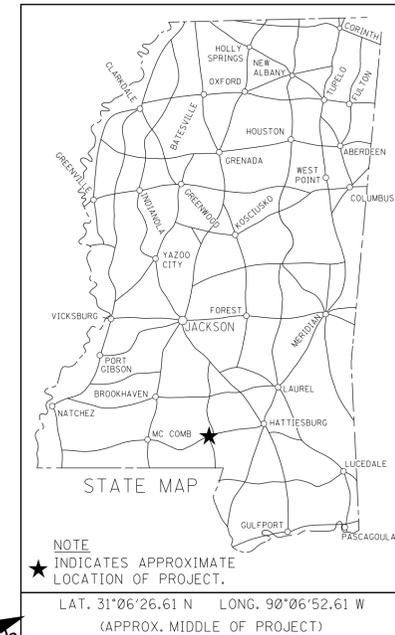

BRIDGE STRUCTURES REQ'D.

BOX BRIDGES REQ'D.

CONVENTIONAL SYMBOLS

COUNTY LINE	-----
TOWN CORPORATION LINE	-----
SECTION LINE	-----
EXISTING ROAD OR TRAVELED WAY	-----
PROPOSED ROAD OR TRAVELED WAY	-----
RAILROAD	-----
SURVEY LINE	-----
BRIDGES	-----

DESIGN CONTROL	
MPH = V (SPEED DESIGN)	
ADT () = : ADT () =	
DHV = : D = % T = %	
PERMITS ACQUIRED BY MDOT	
WETLANDS AND WATERS PERMITS (NECESSARY FOR ULTIMATE IMPROVEMENTS ONLY):	
	WATERS WETLANDS
NATIONWIDE #14	<input type="checkbox"/> <input type="checkbox"/>
NATIONWIDE (OTHER)*	<input type="checkbox"/> <input type="checkbox"/>
GENERAL*	<input type="checkbox"/> <input type="checkbox"/>
INDIVIDUAL (404)*	<input type="checkbox"/> <input type="checkbox"/>
* ACQUISITION OF PERMITS FOR TEMPORARY IMPACTS DURING CONSTRUCTION ARE THE RESPONSIBILITY OF THE CONTRACTOR	
STORMWATER PERMIT <input checked="" type="checkbox"/>	
Y	REQUIRED, SCNOI SUBMITTED BY MDOT (DISTURBED AREA = 5 ACRES)
S	REQUIRED, SCNOI TO BE SUBMITTED BY CONTRACTOR (1 TO 4.99 ACRES)
N	NO STORMWATER PERMIT REQUIRED (<1 ACRE)
APPROVED BY: _____	

11:28:35 AM 01/11/11 TITLE.DGN



P S & E DATE:	
APPROVED:	_____
DEPUTY EXECUTIVE DIRECTOR / CHIEF ENGINEER	_____
EXECUTIVE DIRECTOR	_____
DATE	_____

STATE	PROJECT NO.
MISS.	ER-0185-00(019) ER-0014-02(073) ER-0181-00(006)

DESCRIPTION OF SHEET	WKG. NO.	SH. NO.	DESCRIPTION OF SHEET	WKG. NO.	SH. NO.
TITLE AND LAYOUT SHEET (1)		1	STANDARD DRAWINGS (6)		
DETAILED INDEX (1)	DI-1	2			
GENERAL NOTES (1)	GN-1	3			
			TRAFFIC CONTROL PLAN WITH FLAGGER	TCP-1	6250
			TRAFFIC CONTROL PLAN FOR POSTED SPEED LIMIT OF 65 OR 70 MPH	TCP-5	6254
			SHORT DURATION CLOSING OF TWO-LANE TWO-WAY TRAFFIC	TCP-8	6257
			SHORT DURATION OF CLOSING DIVIDED HIGHWAYS	TCP-9	6258
			TRAFFIC CONTROL PLAN: MULTI-LANE ROADS AND TWO-LANE ROADS	TCP-11	6260
			MISCELLANEOUS DETAIL SHEET	MDS-1	6290
QUANTITY SHEETS (3)					
SUMMARY OF ESTIMATED QUANTITIES	SOS-1	4			
ESTIMATED QUANTITIES	EG-1	5			
ESTIMATED QUANTITY FOR TRAFFIC CONTROL SIGNING	TCP0-1	6			

PLAN-PROFILE SHEETS (9)					
S.R. 48 (SITE 1A) PLAN-PROFILE SHEET	WK-3	7			
S.R. 48 (SITE 1A) TYPICAL	WK-3A	8			
S.R. 48 (SITE 1B) PLAN-PROFILE	WK-4	9			
S.R. 48 (SITE 1B) BOX CULVERT-SLIDE DETAIL	WK-4A	10			
US 98 (SITE 2) PLAN-PROFILE SHEET	WK-5	11			
US 98 (SITE 2) BRIDGE INFORMATION SHEET	WK-5A	12			
S.R. 198 (SITE 3A) PLAN-PROFILE SHEET	WK-6	13			
S.R. 198 (SITE 3A) BRIDGE INFORMATION SHEET	WK-6A	14			
S.R. 198 (SITE 3B) TYPICAL SECTION	WK-6B	15			

SPECIAL DESIGN SHEETS (11)					
DETAIL OF CONSTRUCTION SIGNING	DCS-1	16			
DETAIL OF CONSTRUCTION SIGNING	DCS-2	17			
DETAIL OF CONSTRUCTION SIGNING	DCS-3	18			
VEGETATIVE SCHEDULE	VS-1	19			
EROSION CONTROL	EC-1	20			
DETAILS OF SILT FENCE INSTALLATION	ECD-3	21			
DETAILS OF EROSION CONTROL WATTLE DITCH CHECKS	ECD-6	22			
STABILIZED CONSTRUCTION ENTRANCE	ECD-15	23			
TRAFFIC CONTROL DETAIL OF DRUM PLACEMENT AND SHOULDER CLOSURE	TCP-SC	24			
HIGHWAY SIGN AND BARRICADE DETAILS FOR CONSTRUCTION PROJECTS	SDTCP-10	25			
LOCATION OF R16-3 SIGNS	LRS-1	26			

DISTRICT 7

PS & E PLANS-DATE: 5-25-16		
FMS CON. # 107302/301000 107309/301000 107348/301000		
REVISIONS		
DATE	SHEET NO.	BY

REVISION	MISSISSIPPI DEPARTMENT OF TRANSPORTATION	
	DETAILED INDEX	
	PROJECT NO. ER-0185-00(019) ER-0014-02(073) ER-0181-00(006)	
	COUNTY : WALTHALL	
DATE	FILENAME: (02)DETAIL INDEX.DGN	WORKING NUMBER
DESIGN TEAM	CHECKED	DATE
		DI-1
		SHEET NUMBER
		2



5/24/2016 11:28:40 AM(02) DETAIL INDEX.DGN

STATE	PROJECT NO.
MISS.	ER-0185-00(019) ER-0014-02(073) ER-0181-00(006)

GENERAL NOTES

- ① THE LOCATION AND SPACING OF SIGNS, SHOWN ON THE TRAFFIC CONTROL PLANS, ARE APPROXIMATE AND MAY BE ADJUSTED AS NECESSARY TO FIT FIELD CONDITIONS.
- ② ALL TRAFFIC CONTROL DEVICES ON THIS PROJECT SHALL COMPLY WITH THE MUTCD (LATEST EDITION).
- ③ ALL PLASTIC DRUMS SHALL HAVE A BALLASTING COLLAR MADE FROM RECYCLED TRUCK TIRES OR OTHER SUITABLE MATERIAL.
- ④ SOME WORK IS REQUIRED OUTSIDE THE PROJECT LIMITS. NO ADDITIONAL COMPENSATION WILL BE MADE FOR SUCH WORK EXCEPT AS PROVIDED BY SPECIFIC PAY ITEMS INCLUDED IN THE PLANS.
- ⑤ ROADWAY SIGNS THAT ARE IN CONFLICT WITH CONSTRUCTION OF THIS PROJECT SHALL BE REMOVED AND RELOCATED BY THE CONTRACTOR AS DIRECTED BY THE ENGINEER, THE COST OF WHICH SHALL BE ABSORBED IN OTHER ITEMS BID.
- ⑥ ALL ITEMS OF WORK ASSOCIATED WITH THE INSTALLATION OF A CONSTRUCTION ENTRANCE SHALL BE ABSORBED IN OTHER ITEMS OF WORK.
- ⑦ ALL ADDENDA TO THESE PLANS WILL BE POSTED TO WWW.MDOT.MS.GOV UNDER THE PROPOSAL ADDENDA COLUMN. BIDDERS ARE ADVISED THAT HARD COPIES OF ANY ADDENDA FOR THIS PROJECT WILL NOT BE MAILED. IT IS THE BIDDER'S RESPONSIBILITY TO CHECK AND SEE IF ANY ADDENDA HAVE BEEN POSTED FOR THIS PROJECT.
- ⑧ 25% SHRINKAGE FACTOR USED IN THE EARTHWORK CALCULATIONS IS FOR DESIGN ESTIMATING PURPOSES ONLY.
- ⑨ THE CONTRACTOR SHALL BE RESPONSIBLE FOR PROTECTING EXISTING STRUCTURES SUCH AS, BUT NOT LIMITED TO, PIPES, INLETS, APRONS, AND BRIDGES FROM DAMAGE WHICH MIGHT OCCUR DURING CONSTRUCTION. THE CONTRACTOR SHALL REPLACE OR REPAIR, AS DIRECTED BY THE ENGINEER, ANY STRUCTURES DAMAGED DURING THE LIFE OF THE CONTRACT. NO PAYMENT WILL BE MADE FOR REPLACEMENT OR REPAIR OF DAMAGED ITEMS.
- ⑩ FLUORESCENT ORANGE SHEETING SHALL BE USED ON ALL CONSTRUCTION AND TRAFFIC CONTROL SIGNS EXCEPT FOR THOSE DESIGNATED ON THE PLANS TO BE BLACK LEGEND AND BORDER ON WHITE BACKGROUND.
- ⑪ THE CONTRACTOR SHALL REPAIR ANY DAMAGE TO THE ASPHALT PAVEMENT AND/OR STRIPE THAT MIGHT OCCUR DURING CONSTRUCTION. ANY REPAIR TO ASPHALT PAVEMENT AND/OR STRIPE WILL BE IN ACCORDANCE WITH SECTION 403 OF THE MISSISSIPPI STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION. NO PAYMENT WILL BE MADE FOR REPAIR OF DAMAGED ASPHALT PAVEMENT AND/OR STRIPE.

5/24/2016 11:28:45 AM 03GENERAL NOTES.DGN

		MISSISSIPPI DEPARTMENT OF TRANSPORTATION	
		GENERAL NOTES	
		COUNTY: WALTHALL COUNTY PROJECT: ER-0185-00(019) ER-0014-02(073) ER-0181-00(006)	
		WORKING NUMBER GN-1	
		SHEET NUMBER 3	
REVISION	BY	FILENAME: (03) GENERAL NOTES.DGN DESIGN TEAM _____ CHECKED _____ DATE _____	

