

SECTION 905 -- PROPOSAL (CONTINUED)

I (We) hereby certify by digital signature and electronic submission via Bid Express of the Section 905 proposal below, that all certifications, disclosures and affidavits incorporated herein are deemed to be duly executed in the aggregate, fully enforceable and binding upon delivery of the bid proposal. I (We) further acknowledge that this certification shall not extend to the bid bond or alternate security which must be separately executed for the benefit of the Commission. This signature does not cure deficiencies in any required certifications, disclosures and/or affidavits. I (We) also acknowledge the right of the Commission to require full and final execution on any certification, disclosure or affidavit contained in the proposal at the Commission's election upon award. Failure to so execute at the Commission's request within the time allowed in the Standard Specifications for execution of all contract documents will result in forfeiture of the bid bond or alternate security.

Bidder acknowledges receipt of and has added to and made a part of the proposal and contract documents the following addendum (addenda):

ADDENDUM NO. <u>1</u>	DATED <u>9/19/2016</u>	ADDENDUM NO. _____	DATED _____
ADDENDUM NO. <u>2</u>	DATED <u>9/22/2016</u>	ADDENDUM NO. _____	DATED _____

Number	Description
1	Revised Table of Contents; Add NTB Nos. 3704, & 6691; Amendment EBS Download Required.
2	Revised Table of Contents; Add NTB Nos. 6694, 6695, & 6696; Revised Bid Items; Amendment EBS Download Required.

TOTAL ADDENDA: 2
(Must agree with total addenda issued prior to opening of bids)

Respectfully Submitted,

DATE _____

Contractor

BY _____
Signature

TITLE _____

ADDRESS _____

CITY, STATE, ZIP _____

PHONE _____

FAX _____

E-MAIL _____

(To be filled in if a corporation)

Our corporation is chartered under the Laws of the State of _____ and the names, titles and business addresses of the executives are as follows:

_____ President	_____ Address
--------------------	------------------

_____ Secretary	_____ Address
--------------------	------------------

_____ Treasurer	_____ Address
--------------------	------------------

The following is my (our) itemized proposal.

NHPP-0002-06(022)/ 107209301000

Lee County(ies)

Revised 01/26/2016

MISSISSIPPI DEPARTMENT OF TRANSPORTATION
TABLE OF CONTENTS

PROJECT: NHPP-0002-06(022)/107209301 - Lee

Section 901 - Advertisement

Section 904 - Notice to Bidders

#1	Governing Specifications
#3	Final Cleanup
#640	Fiber Reinforced Concrete
#927	Use of Fly Ash in Stone Matrix Asphalt (SMA)
#1405	Errata & Modifications to 2004 Standard Specifications
#1928	Federal Bridge Formula
#2382	Status of ROW, w/ Attachments
#3067	Storm Water Discharge Associated with Construction Activities (≥ 1 and < 5 Acres)
#3131	Temporary Traffic Paint
#3612	Additional Erosion Control Requirements
#3704	Use of Precast Drainage Units
#3893	Petroleum Products Base Price
#4189	Rumble Stripe
#4214	Safety Apparel
#4473	Alternate Crushed Stone Base Bid Items
#4526	Electronic Addendum Process
#4565	Manual on Uniform Traffic Control Devices (MUTCD)
#5044	Questions Regarding Bidding
#5053	Contractor Correspondence
#5405	Traffic Control Devices
#5411	Safety Edge
#5412	Weight Limits
#5545	Burn-in Period
#5556	DUNS Requirement for Federal Funded Projects
#5824	Adjustments for Bituminous Materials
#5865	Non-Quality Control / Quality Assurance Concrete
#5866	Payroll Requirements
#5896	DBE Forms, Participation and Payment
#6411	Disadvantaged Business Enterprise, w/ Supplement
#6601	Contract Time
#6602	Specialty Items
#6603	Road Closure Restrictions
#6691	Cooperation Between Contractors
#6694	Additional Detail Sheets
#6695	Additional Milling Requirements
#6696	Plan Correction
906	Required Federal Contract Provisions -- FHWA 1273, w/Supplements

Section 907 - Special Provisions

PROJECT: NHPP-0002-06(022)/107209301 - Lee

907-101-4	Definitions
907-102-12	Bidding Requirements and Conditions
907-103-11	Award and Execution
907-104-5	Scope of Work
907-104-6	Partnering Process
907-105-9	Control of Work, w/ Supplement
907-107-13	Legal Relations and Responsibility to Public, w/ Supplement
907-107-14	Contractor's Protection Plan, w/ Supplement
907-108-38	Prosecution and Progress
907-109-8	Measurement and Payment
907-110-2	Wage Rates
907-216-1	Solid Sodding
907-225-5	Grassing
907-226-3	Temporary Grassing
907-227-10	Hydroseeding
907-234-5	Siltation Barriers
907-237-4	Wattles
907-245-2	Triangular Silt Dikes
907-246-3	Sandbags & Rockbags
907-249-1	Riprap for Erosion Control
907-304-13	Granular Courses
907-401-5	Stone Matrix Asphalt (SMA), w/ Supplement
907-401-7	Asphalt Pavements, w/ Supplement
907-403-13	Stone Matrix Asphalt (SMA), w/ Supplement
907-403-14	Asphalt Pavements
907-406-4	Cold Milling
907-407-2	Tack Coat
907-601-1	Structural Concrete
907-618-9	Placement of Temporary Traffic Stripe
907-618-13	Temporary Construction Signs
907-626-25	Thermoplastic Traffic Markings
907-630-16	Sign Supports
907-639-8	Traffic Signal and ITS Equipment Poles
907-641-6	Signal Radar Detection
907-642-5	Solid State Traffic Actuated Controllers
907-645-5	Flashing Assembly
907-658-8	Networking Equipment
907-699-5	Construction Stakes
907-701-5	Hydraulic Cement, w/ Supplement
907-702-5	Specifications for Bituminous Materials
907-703-12	Aggregates, w/ Supplement
907-708-6	Non-Metal Drainage Structures
907-710-1	Fast Dry Solvent Traffic Paint
907-711-4	Synthetic Structural Fiber Reinforcement
907-713-6	Admixtures for Concrete
907-714-3	Stabilizing Fibers
907-714-8	Miscellaneous Materials

PROJECT: NHPP-0002-06(022)/107209301 - Lee

907-715-4	Roadside Development Materials
907-720-2	Pavement Marking Materials
907-721-5	Ground Mounted Sign Supports
907-804-19	Concrete Bridges and Structures, w/ Supplement
907-815-2	Sediment Control Stone

Section 905 - Proposal, Proposal Bid Items, Combination Bid Proposal

Certification of Performance - Prior Federal-Aid Contracts

Certification Regarding Non-Collusion, Debarment and Suspension

SAM.GOV Registration and DUNS Number

Section 902 - Contract Form

Section 903 - Contract Bond Forms

Form -- OCR-485

(REVISIONS TO THE ABOVE WILL BE INDICATED ON THE SECOND SHEET
OF SECTION 905 AS ADDENDA)

09/22/2016 01:52 PM

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 - NOTICE TO BIDDERS NO. 6694


CODE: (SP)

DATE: 09/22/2016

SUBJECT: Additional Detail Sheets

PROJECT: NHPP-0002-06(022) / 107209301 – Lee County

The Bidder is advised that Working Sheets SSD-1 and SSD-4C were inadvertently left out of the Contract Plans. The following drawings attached hereto shall govern appropriate items of required work.

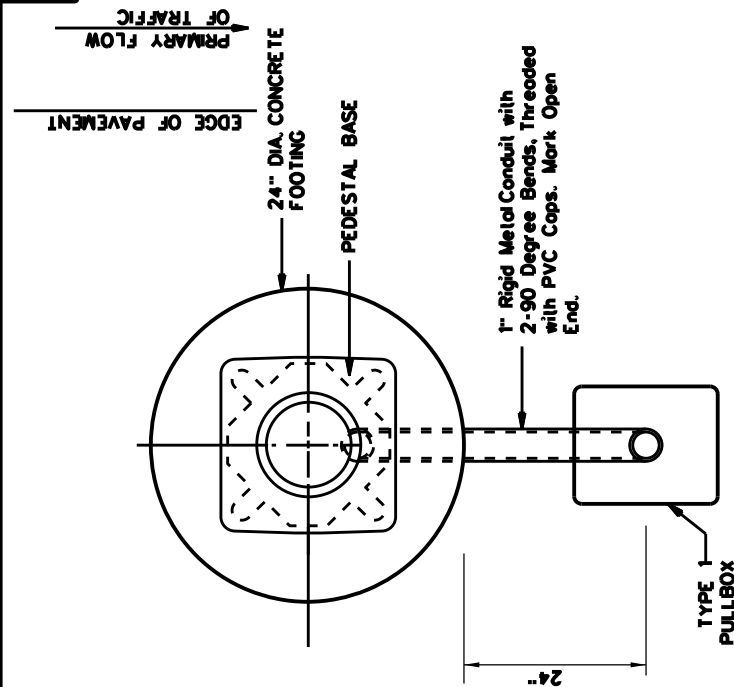


TOP VIEW OF FOOTING

VIEW NOT TO SCALE - SHOWS RELATIVE LOCATION OF ROADWAY, POST, PULLBOX, AND GALVANIZED STEEL CONDUIT.


NOTES:

1. PULLBOX TO BE PLACED FLUSH WITH GROUND AND INCLUDE CONC. COLLAR.
2. ALL ABOVE GROUND WIRING SHALL BE ENCLOSED IN THE 4" POST.
3. THE WIRING SHALL INCLUDE A WATERPROOF FUSE IN THE PULLBOX AND A WATERPROOF CUT-OFF SWITCH AT THE METER.
4. SIGN SHEETING SHALL BE TYPE VIOR BETTER.
5. CABLES SHALL BE TERMINATED IN PEDESTAL BASE WITH BREAKAWAY CONNECTORS.
6. ALL ITEMS SHOWN ON THIS SHEET SHALL BE PAID FOR UNDER PAY ITEM 907-645-B "BE PREPARED TO STOP WHEN FLASHING ASSEMBLY" - PER EACH ASSEMBLY.

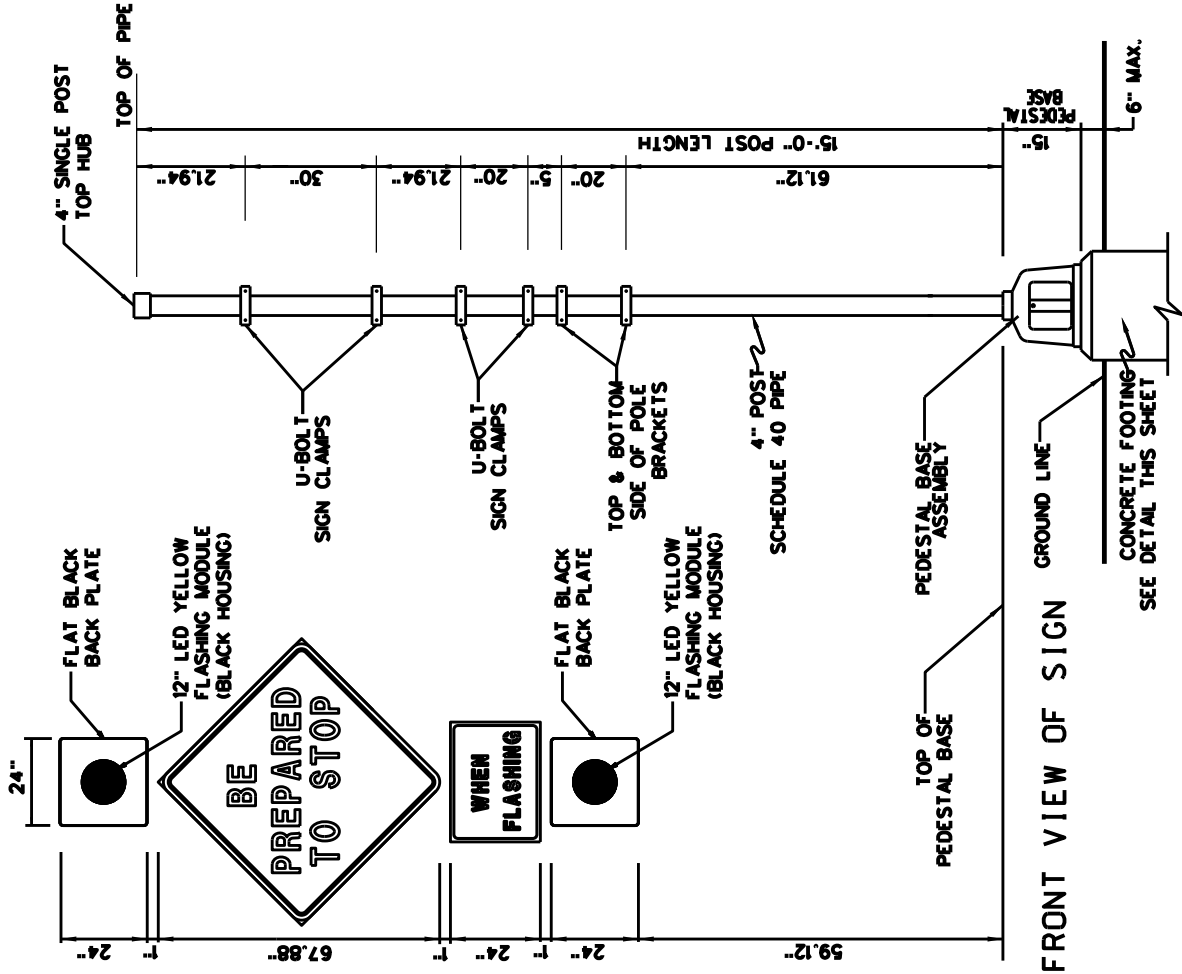


FRONT VIEW OF POST

SIGNAL AHEAD FLASHER ASSEMBLY
WITH 4" POST - 15'-0" LONG

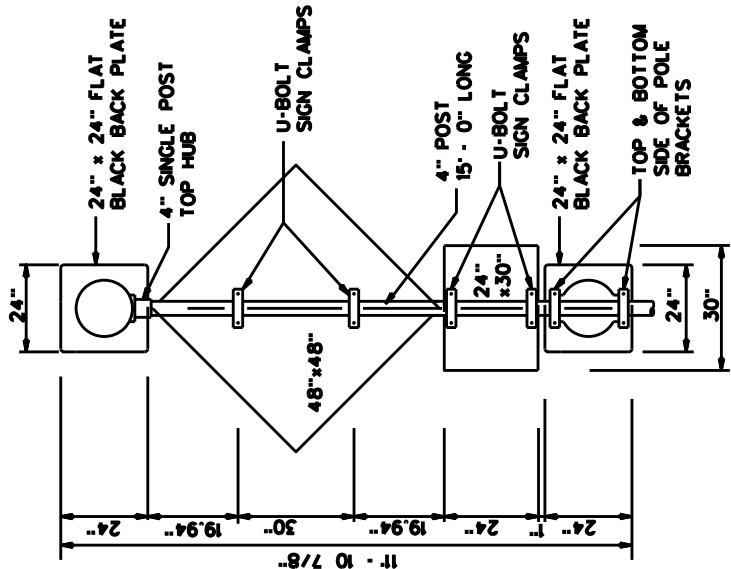


REAR VIEW OF SIGN

ATTACH SIGNS TO 4" POST USING:
U-BOLT SIGN CLAMPS/MOUNTING HARDWARE

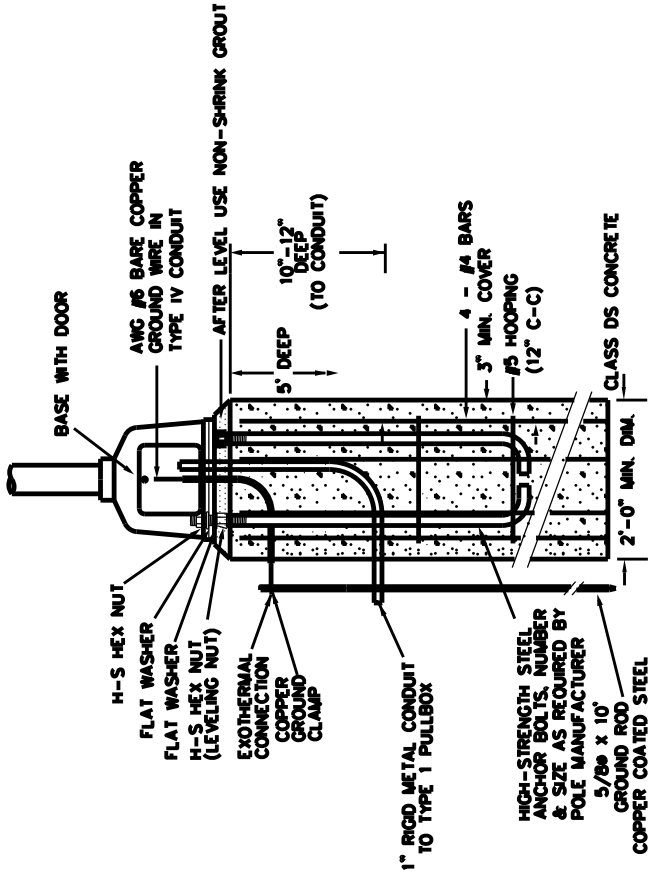


PEDESTAL POLE FOOTING DETAIL
FOR POST WITH FLASHING ASSEMBLY

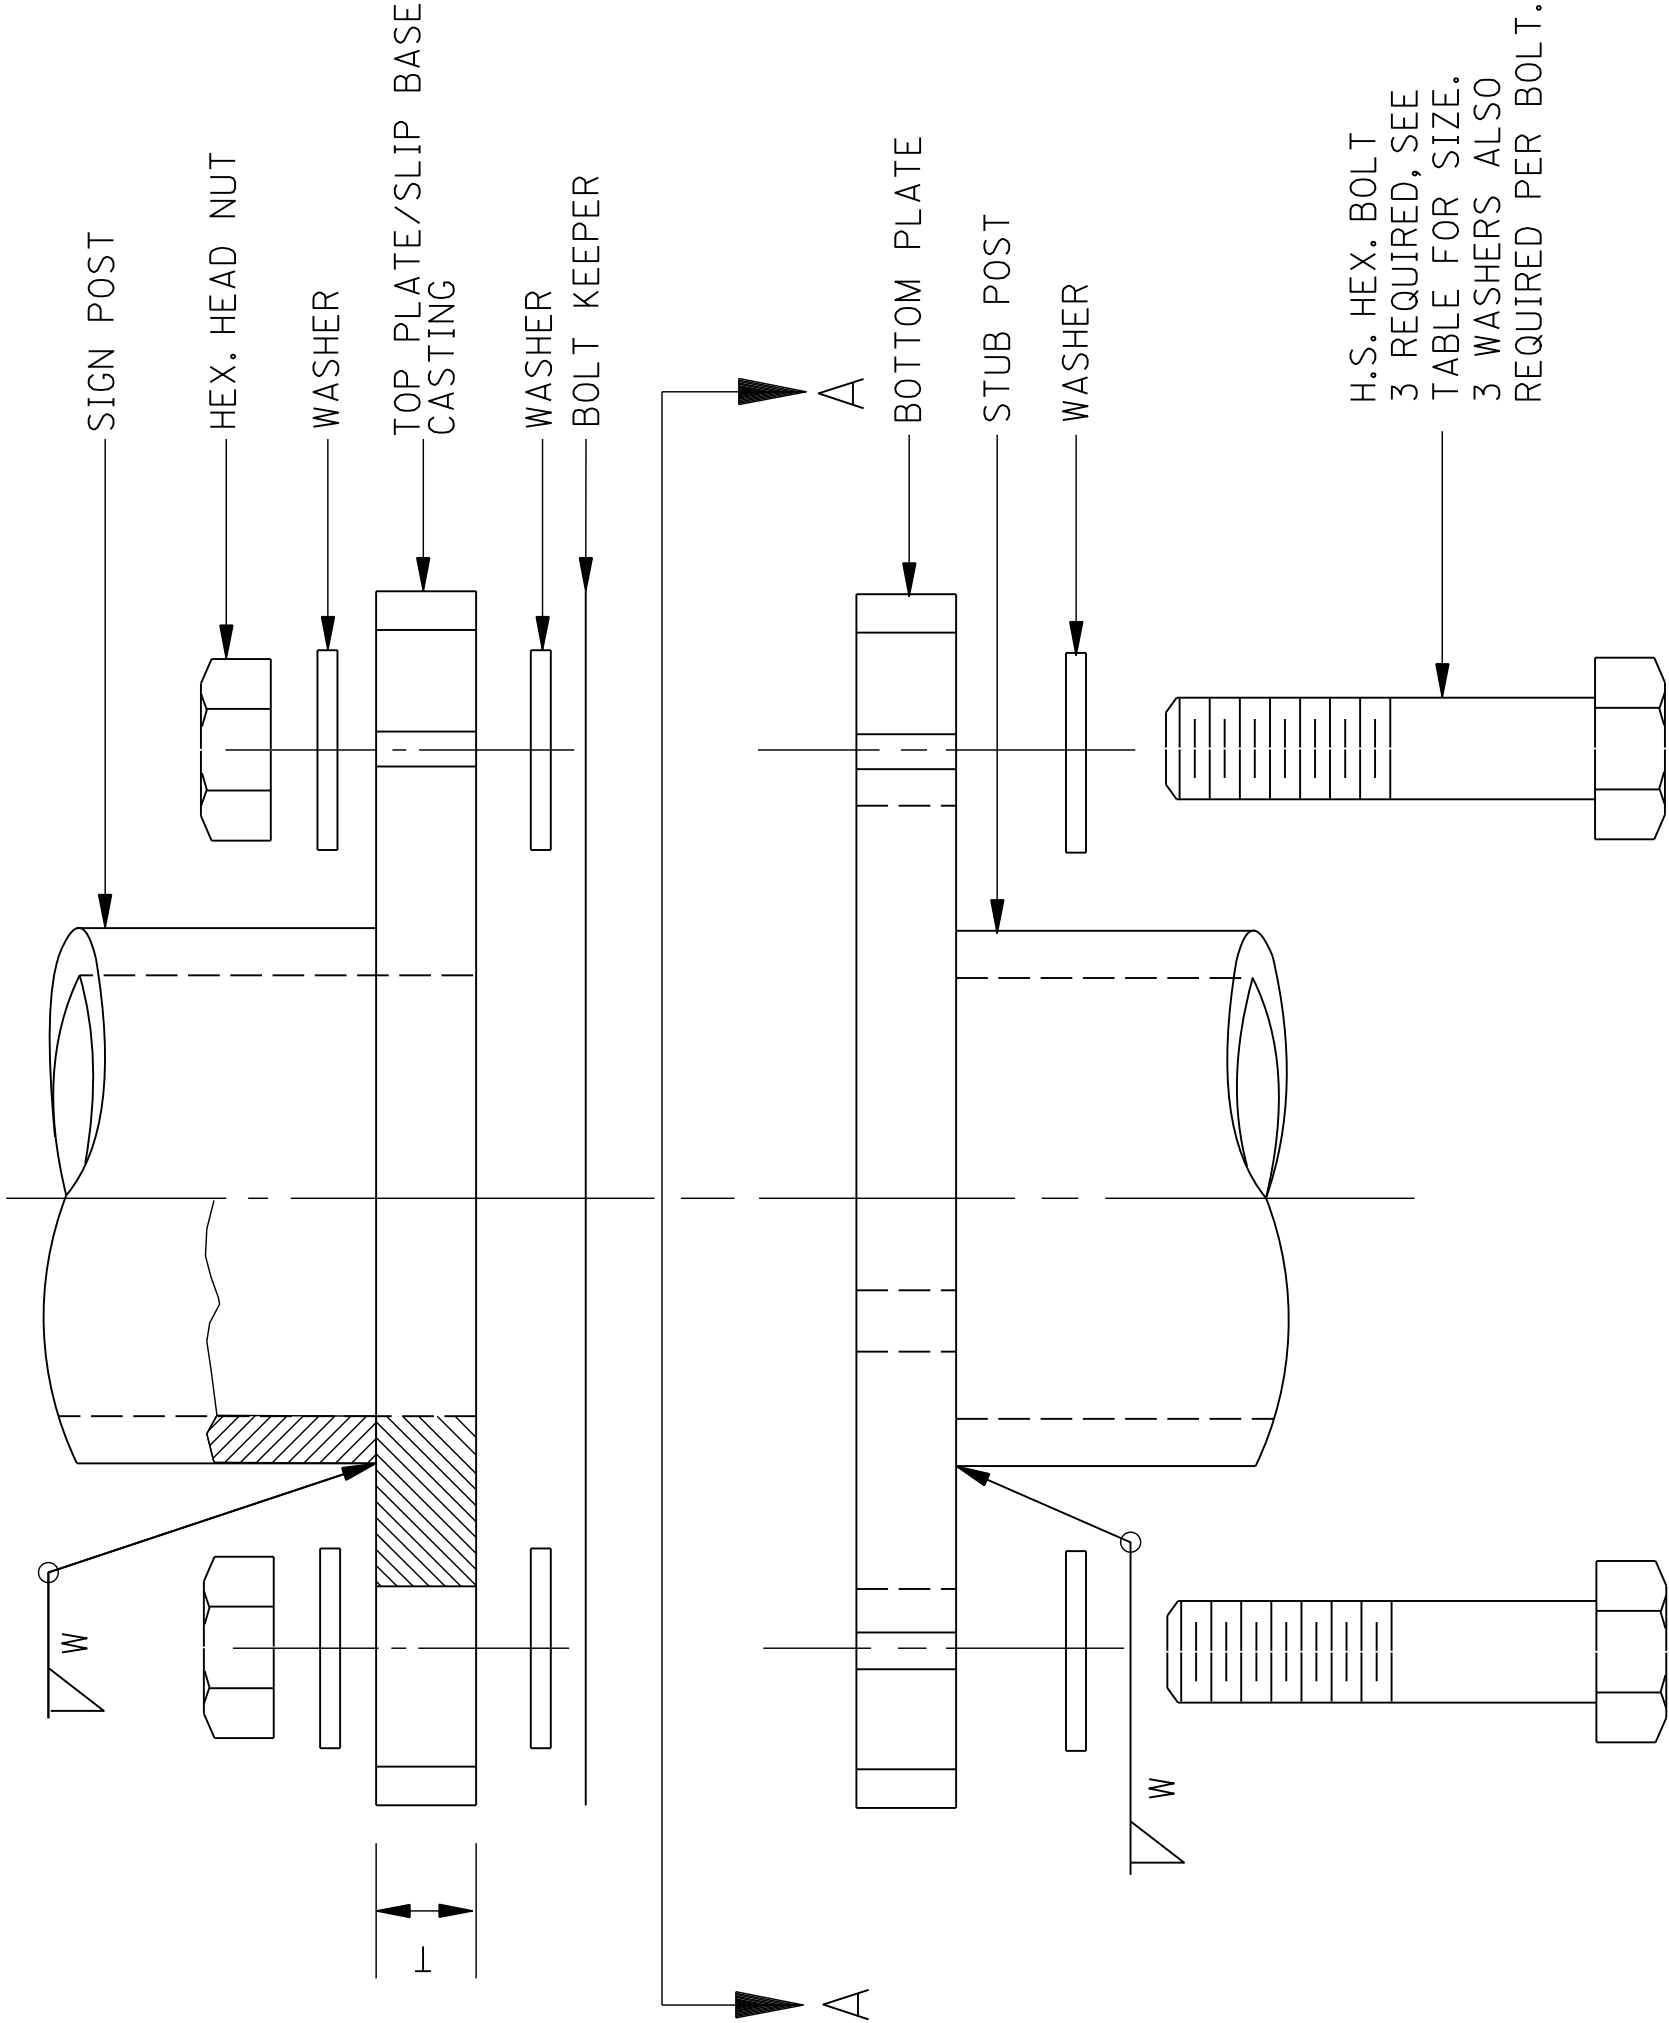


MULTI-DIRECTIONAL SIGN POST & STUB POST

USE MULTI-DIRECTION BOLTS WHEN SPECIFIED - SEE DETAILS ELSEWHERE IN PLANS.

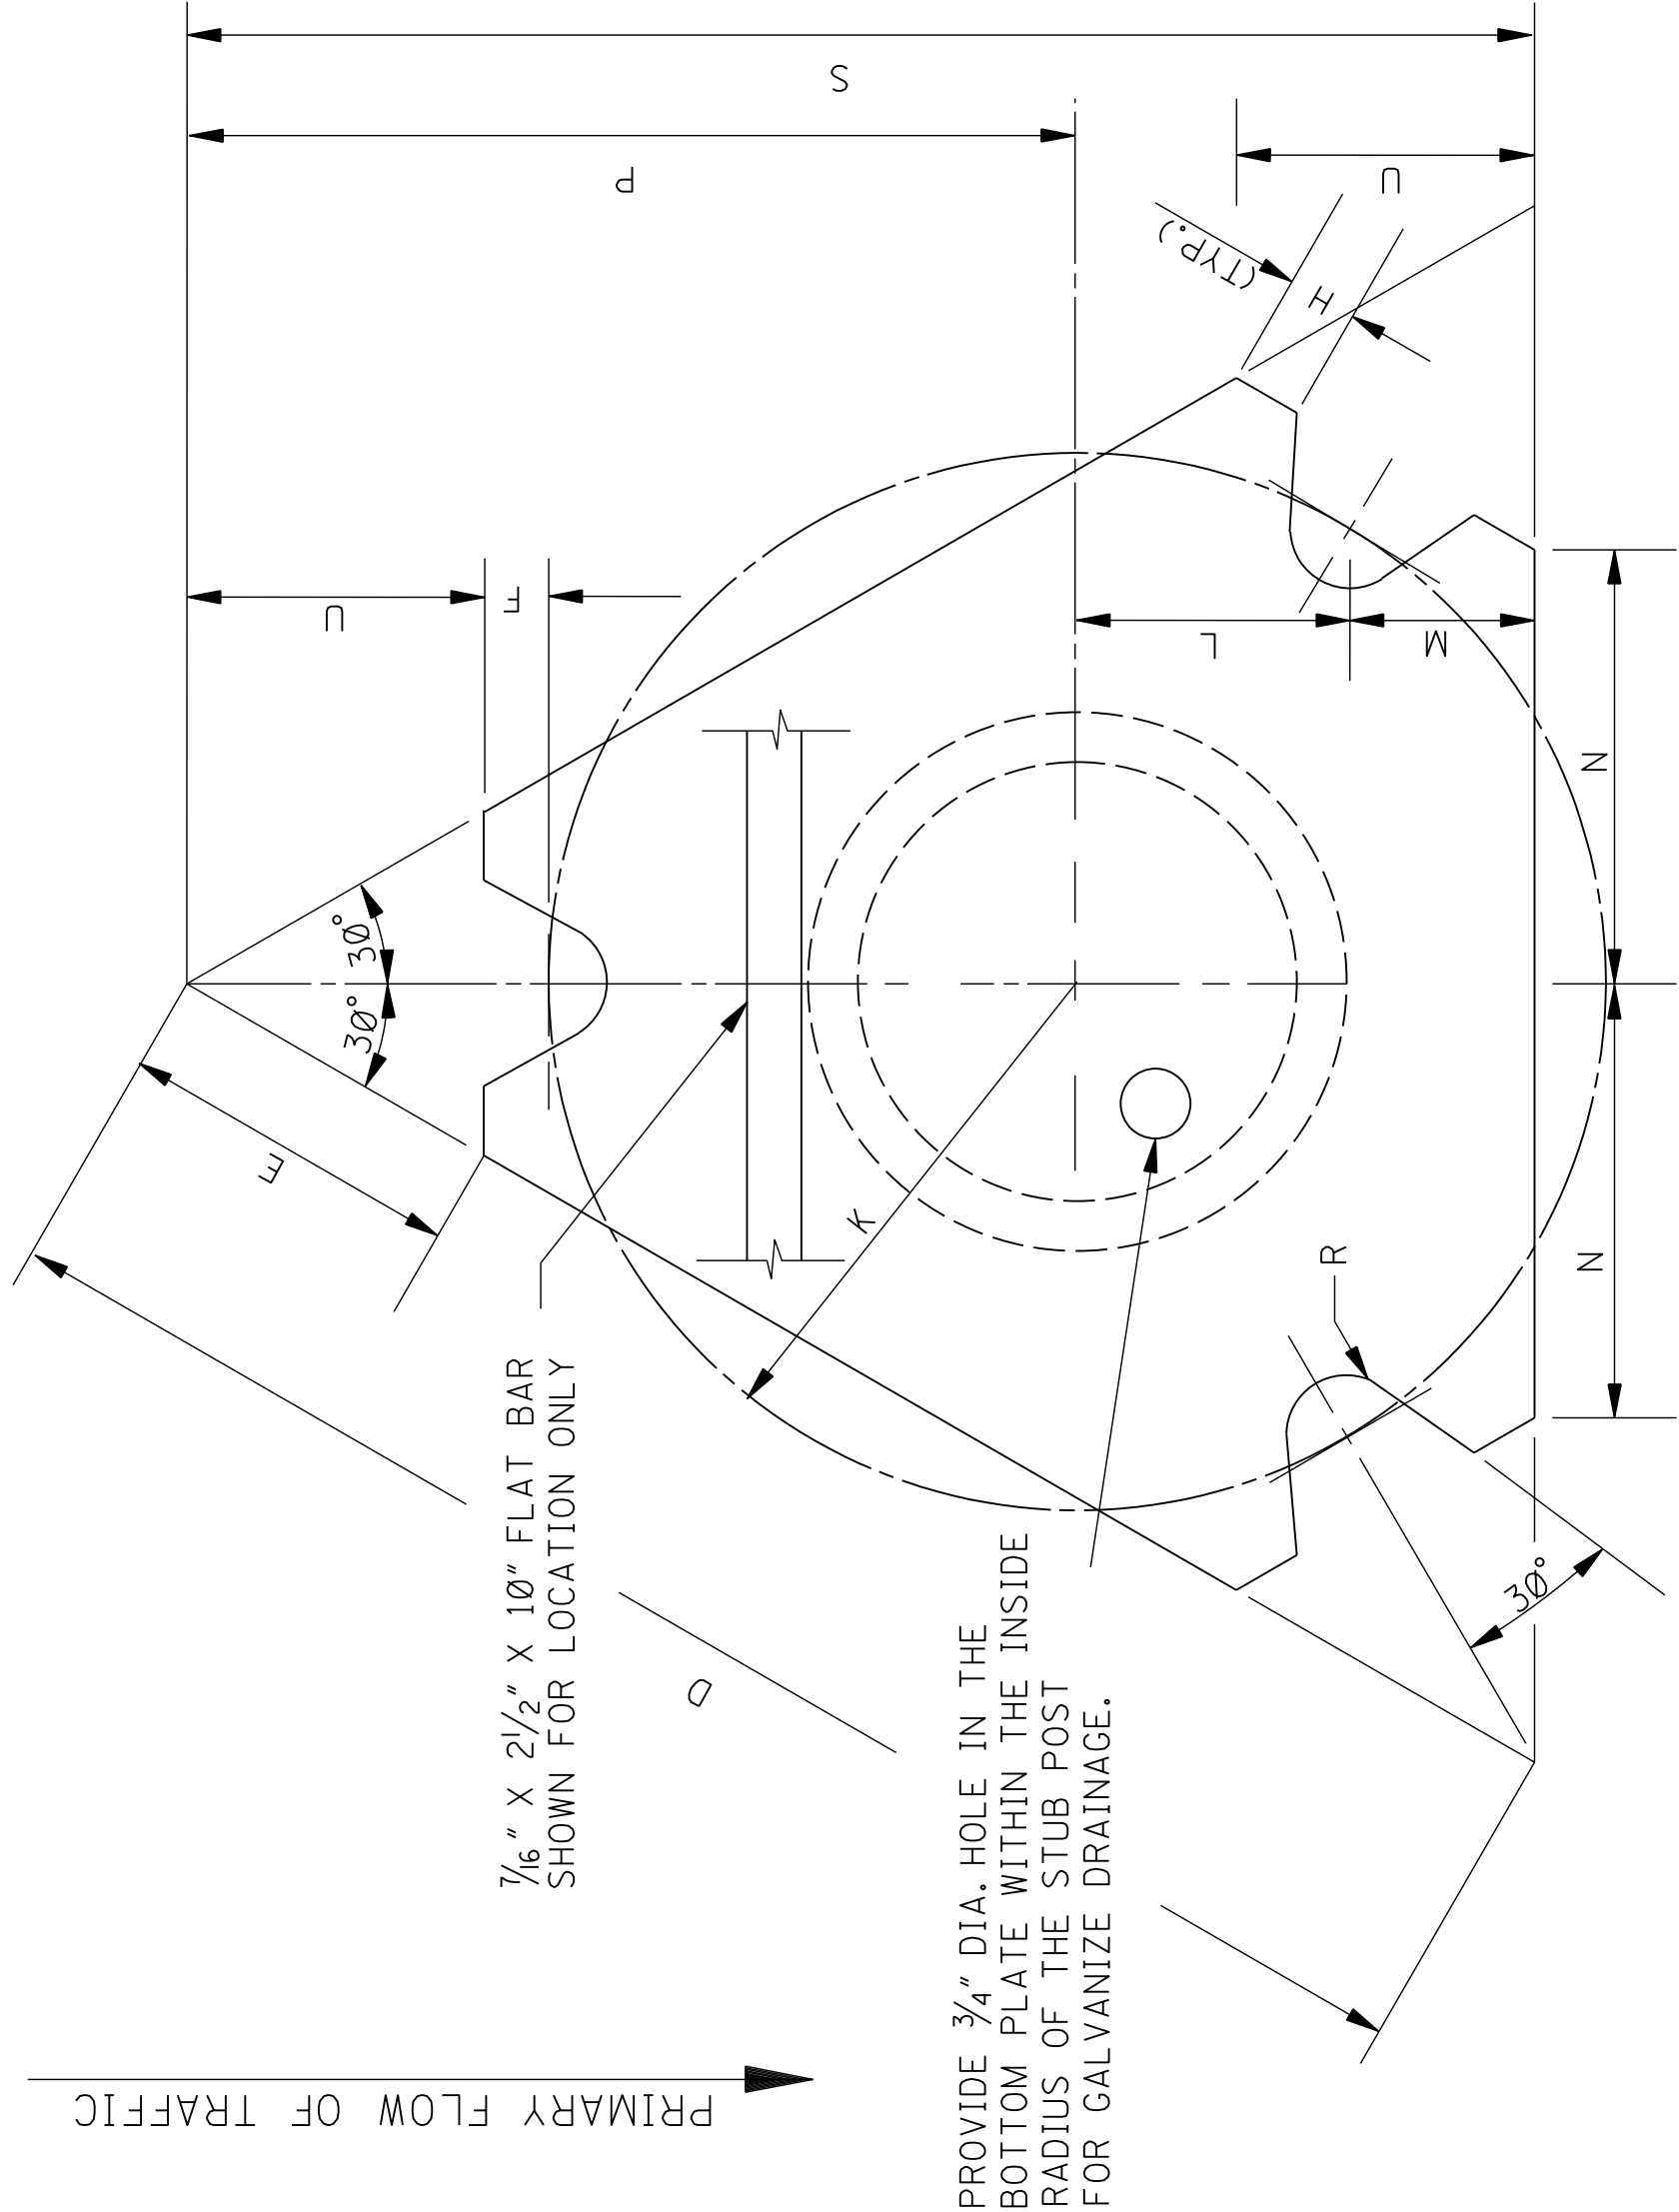


SECTION A-A

NOTE: SEE DATA TABLE FOR DIMENSIONS

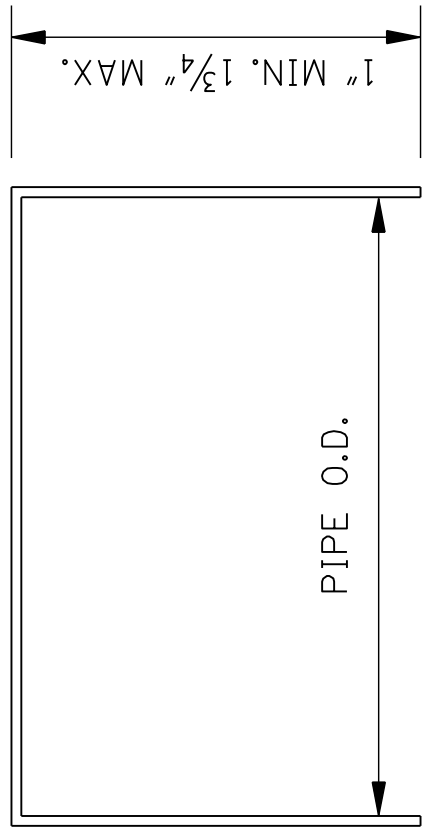


FRICTION CAP DETAIL

NOTE: SEE NOTE 3

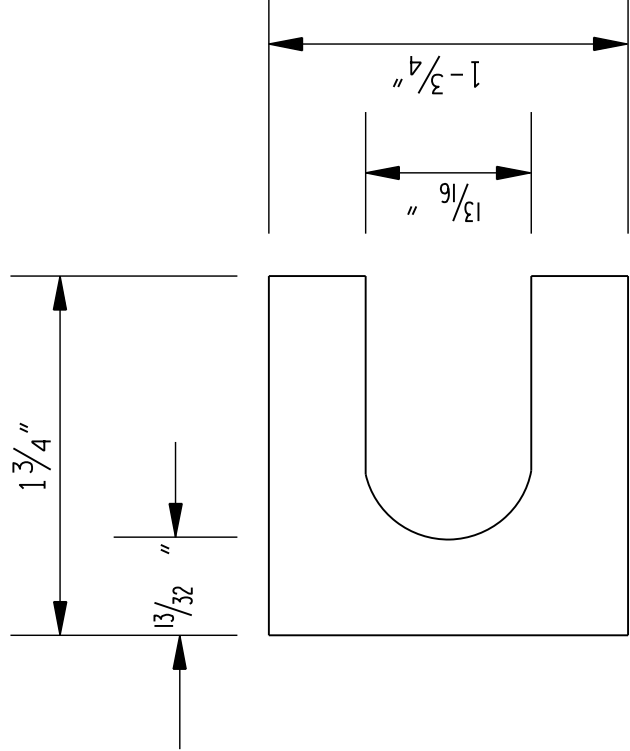

SHIM DETAIL

NOTE: FURNISH 2-0.012" +/- THICK AND 2-0.032" +/- THICK SHIMS PER POST. SHIMS SHALL BE FABRICATED FROM BRASS SHIM STOCK OR STRIP CONFORMING TO ASTM B-36.

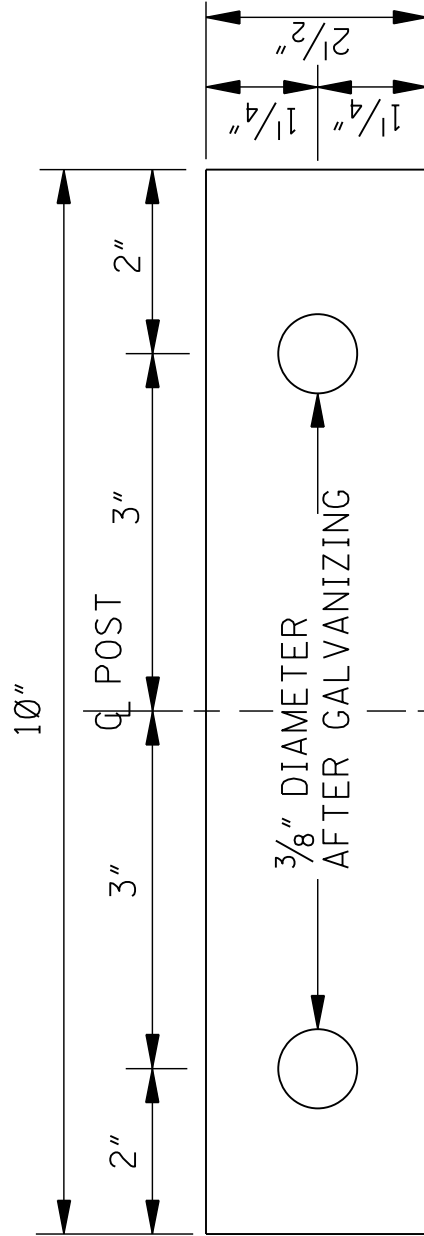

FLAT BAR DETAIL

NOTE: UNLESS OTHERWISE SPECIFIED, FLAT BARS ARE 1/16" X 2 1/2" X 10" STEEL BARS. FLAT BARS SHALL BE WELDED TO POST USING 3/4" FILLET WELD (SEE NOTES AND SECTION A-A). WHEN FABRICATION IS COMPLETE, POSTS SHALL BE GALVANIZED AS PER SECTION 630 OF THE STANDARD SPECIFICATIONS.

POST LENGTHS:

TYPE A POST 3" DIA X 12' - 6" LENGTH WITH FLAT BARS
TYPE B POST 3" DIA X 11' - 0" LENGTH WITH FLAT BARS
TYPE C POST 3" DIA X 11'-0" LENGTH WITH NO FLAT BARS
(SEE SSD-4D FOR DETAILS OF TYPE C POST)

TYPE D POST SPECIFY DIA, LENGTH AND WITH OR WITHOUT FLAT BARS. VERIFY LENGTHS TO MEET FIELD CONDITIONS.

FRICTION CAP
(SEE DETAIL)

FLAT BAR
SEE DETAIL

SIGN FACE

FLAT BAR
SEE DETAIL

WASHERS & BOLT KEEPER

SPACE BETWEEN PLATES DUE TO

SIGN POST

TOP OF FOOTING
FLUSH WITH GRADE

CONCRETE FOOTING

STUB POST

SEE DETAILS ELSEWHERE ON PLANS

STUB LENGTH


PAY LENGTH FOR POST = POST LENGTH + STUB LENGTH

POST ELEVATION

BASE CONNECTION DATA TABLE													
DIMENSIONS NOMINAL PIPE SIZES	BOLT SIZE & TORQUE	T	W	C	* D	* E	F	G	* H	J	K	L	M
3"	5/8" X 2 1/2" 3000 in • lbs	5/8"	3/8"	1"	10 3/8" 2 5/16"	1/2"	3/8"	3/8"	1/2"	1 3/4"	3 1/2"	1 3/4"	1 1/4"
4"	3/4" X 3" 5000 in • lbs	7/8"	7/16"	1 1/16"	13"	2 7/8"	1/2"	3/8"	5/8"	2 1/2"	4 1/2"	2 1/4"	1 1/2"
5"													

* NOTE: APPROXIMATE DIMENSIONS

STATE	PROJECT NO.
MISS.	

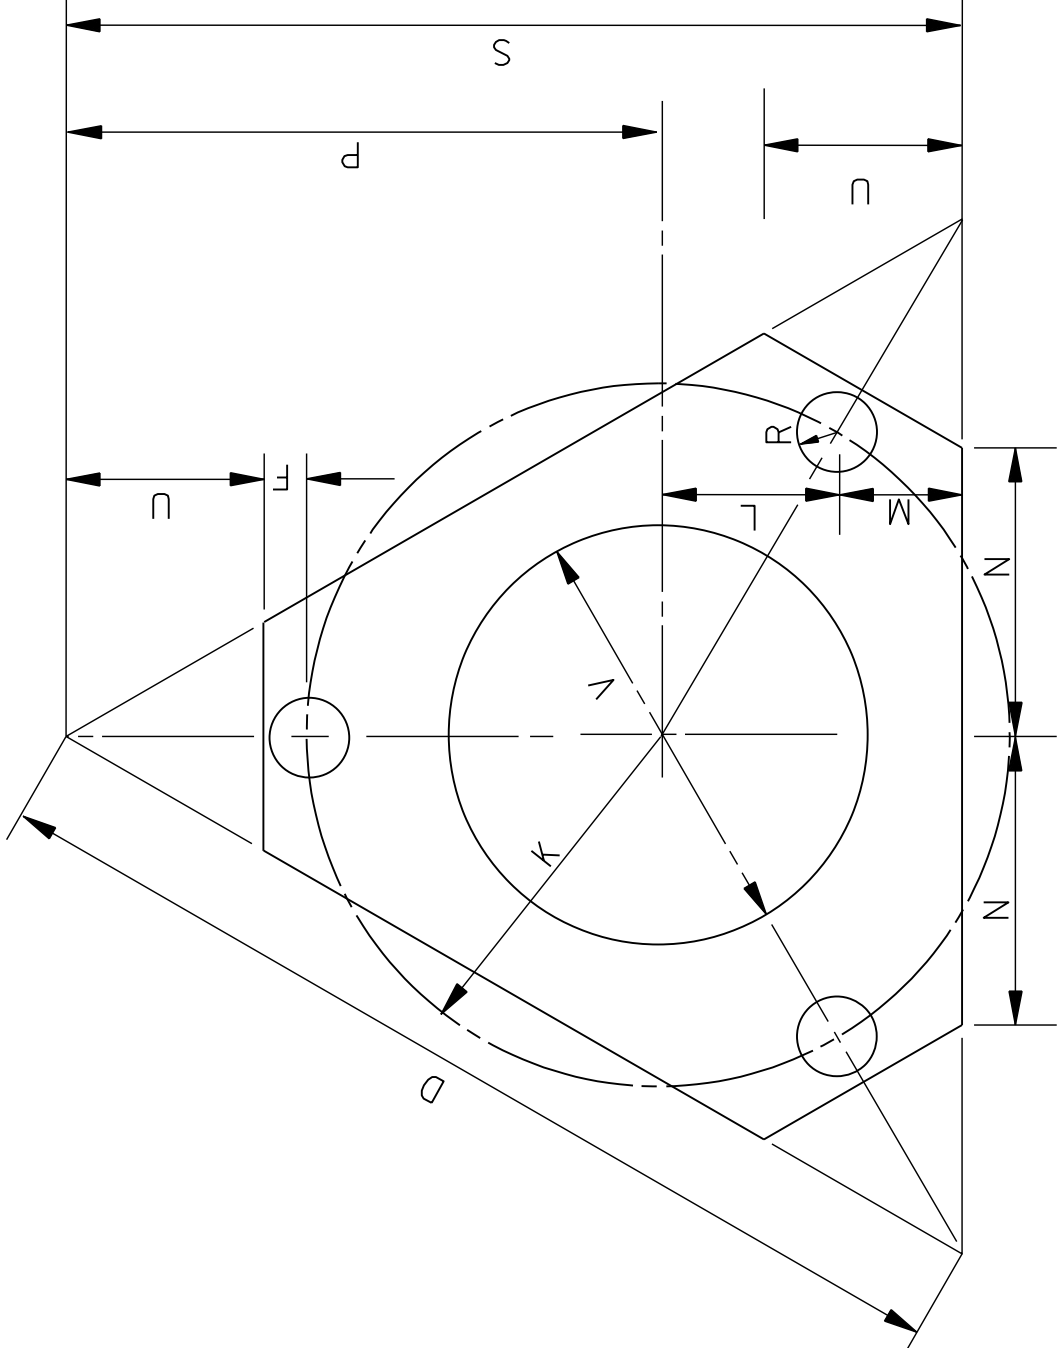

BOLT KEEPER PLATE DETAIL

NOTE: TO BE FABRICATED FROM 28 GAGE THICK GALVANIZED STEEL. TO BE INSTALLED AS SHOWN IN DETAIL AT UPPER LEFT.

GENERAL NOTES: (SEE SSD-6 FOR ADDITIONAL GENERAL NOTES)

- THE TOP PLATE OF THE TRIANGULAR SLIP BASE SHALL HAVE THE SAME EXTERIOR DIMENSIONS AS THE BOTTOM PLATE. TOP & BOTTOM PLATES SHALL BE SYMMETRICAL FOR THE PURPOSE OF ASSEMBLY IN ANY POSITION.
- BASE CONNECTION ASSEMBLY AS FOLLOWS:
 - ASSEMBLE POST TO STUB WITH 3 BOLTS AND WITH 3 FLAT WASHERS PER BOLT.
 - SHIM AS REQUIRED TO PLUMB POST.
 - TIGHTEN ALL BOLTS THE MAXIMUM POSSIBLE WITH A 12" TO 15" WRENCH TO BED WASHERS, KEEPER PLATE, SHIMS AND TO CLEAN THREADS.
 - LOOSEN EACH BOLT IN TURN & RETIGHTEN IN A SYSTEMATIC ORDER TO PRESCRIBED TORQUE. (SEE BASE CONNECTION DATA TABLE).
 - BURR THREADS AT JUNCTION WITH NUT WITH A CENTER PUNCH TO PREVENT NUT FROM LOOSENING.
- FRICTION CAPS TO BE MANUFACTURED FROM HOT ROLLED OR COLD ROLLED STEEL SHEETS. FOR ALL PIPE SIZES, MINIMUM THICKNESS SHALL BE 20 GAGE SHEET METAL. RIM EDGES SHALL BE REASONABLY STRAIGHT AND SMOOTH. CAPS SHALL BE SIZED AND FORMED IN SUCH A MANNER AS TO PROVIDE A DRIVE-ON FRICTION FIT AND HAVE NO TENDENCY TO ROCK WHEN SEATED ON PIPE. THE DEPTH SHALL BE SUFFICIENT TO GIVE POSITIVE PROTECTION AGAINST ENTRANCE OF RAINWATER. THEY SHALL BE FREE OF SHARP CREASES OR INDENTATIONS AND SHOW NO SIGNS OF METAL FRACTURE. ALL CAPS TO BE SAME IN SHAPE AND GENERAL APPEARANCE AS APPROVED BY THE ENGINEER.
- STUB PROJECTION SHOULD BE MEASURED OVER A 5'-0" CHORD AS PER AASHTO SPECIFICATIONS, LATEST EDITIONS. SEE SHEET SSD-6B FOR DIAGRAM.
FLAT BAR SHALL BE WELDED ON POST SO THAT SIGN FACES TRAFFIC AND IS ON SINGLE BOLT SIDE OF POST. SEE SECTION A-A.

SPECIAL DESIGN SHEET 10-02-2009

MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN

BREAKAWAY SIGN SUPPORTS

TYPE A, B, C AND D POSTS

Notice To Readers No. 624 ENGLISH	Working Number SSD-4C Cont'd.
REVISION	SHEET NUMBER

ISSUE DATE: May 21, 2009

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 - NOTICE TO BIDDERS NO. 6695

CODE: (SP)

DATE: 09/21/2016

SUBJECT: Additional Milling Requirements

PROJECT: NHPP-0002-06(022) / 107209301 – Lee County

Bidders are hereby advised of the following requirements regarding Milling:

Milling will be performed in a manner such that there is never a pavement differential in excess of 1.5". The Contractor's operations may require milling an area 1.5" followed by a separate 2" mill. **Milling will only be paid for by the square yard ONCE regardless of the amount of passes the Contractor elects to use.**

Areas milled a full 3.5", whether by one pass or two, will require a "mill and fill" operation. A 2" lift of asphalt must be placed prior to removing the lane closure. Where full depth milling is performed, a lane closure may not be left overnight.

Areas where traffic is allowed on the milled surface shall be covered within 10 calendar days of removal. If a milled area has not been covered after 10 calendar days, all other work will cease until that milled area is covered.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 - NOTICE TO BIDDERS NO. 6696

CODE: (SP)

DATE: 09/22/2016

SUBJECT: Plan Correction

PROJECT: NHPP-0002-06(022) / 107209301 – Lee County

The Bidder is advised that small amounts of excavation may be necessary at some of the sites. This Material may be used as E.S.F.E. Material and will be paid for as Borrow. No E.S.F.E. Material shall be removed from the project without the approval of the Engineer.

The Bidder's attention is called to the Summary of Quantities in the Contract Plans. Borrow Excavation is shown as being paid for by LVM. This is in error. The correct method of measurement is FME.

Bidders are hereby advised that Borrow Excavation will be paid for under the following pay item no. 203-EX017, Borrow Excavation, AH, FME, Class B9. A Quantity of **962 CY** for this pay item has been added to the bid items.

Bidders are further advised that a quantity of **40 SY** of pay item no. 202-B216, Removal of Island Pavement, All Types, has been added to the Bid Sheets. This pay item will be used in instances where existing island pavement must be removed prior to increasing the size of an island. For all other instances island pavement should be absorbed in other items bid.

Intersection Improvements on US 45 at Pratt, Fashion Way and SW Avenue, known as Federal Aid Project No. NHPP-0002-06(022) / 107209301 in Lee County.

Line No.	Item Code	Adj Code	Quantity	Units	Description [Fixed Unit Price]
Roadway Items					
0010	201-A001		1	Lump Sum	Clearing and Grubbing
0020	202-B005		523	Square Yard	Removal of Asphalt Pavement, All Depths
0030	202-B017		57	Linear Feet	Removal of Concrete Combination Curb & Gutter
0040	202-B025		22	Square Yard	Removal of Concrete Paved Ditch
0050	202-B057		1	Each	Removal of Inlets, All Sizes
0060	202-B069		53	Each	Removal of Sign
0062	202-B216		40	Square Yard	Removal of Island Pavement, All Types
0070	203-EX017	(E)	962	Cubic Yard	Borrow Excavation, AH, FME, Class B9
0080	203-G004	(E)	669	Cubic Yard	Excess Excavation, LVM, AH
0090	206-A001	(S)	28	Cubic Yard	Structure Excavation
0100	209-A004		6,420	Square Yard	Geotextile Stabilization, Type V, Non-Woven
0110	211-B001	(E)	260	Cubic Yard	Topsoil for Slope Treatment, Contractor Furnished
0120	213-C001		1	Ton	Superphosphate
0130	219-A001		30	Thousand Gallon	Watering [\$20.00]
0140	220-A001		1	Acre	Insect Pest Control [\$30.00]
0150	221-A001	(S)	5	Cubic Yard	Portland Cement Concrete Paved Ditch
0160	223-A001		1	Acre	Mowing [\$50.00]
0170	234-A001		4,400	Linear Feet	Temporary Silt Fence
0180	235-A001		20	Bale	Temporary Erosion Checks
0190	423-A001		3	Mile	Rumble Strips, Ground In
0200	503-C003		640	Linear Feet	Saw Cut, 6-inch
0210	503-C007		51	Linear Feet	Saw Cut, Full Depth
0220	602-A001	(S)	441	Pounds	Reinforcing Steel
0230	603-CA004	(S)	24	Linear Feet	30" Reinforced Concrete Pipe, Class III
0240	603-CB003	(S)	1	Each	30" Reinforced Concrete End Section
0250	604-B001		500	Pounds	Gratings
0260	609-D002	(S)	1,412	Linear Feet	Combination Concrete Curb and Gutter Type 2
0270	616-A001	(S)	174	Square Yard	Concrete Median and/or Island Pavement, 4-inch
0280	616-A003	(S)	522	Square Yard	Concrete Median and/or Island Pavement, 10-inch
0290	619-A1002		1	Mile	Temporary Traffic Stripe, Continuous White
0300	619-A2002		2	Mile	Temporary Traffic Stripe, Continuous Yellow
0310	619-A3006		3	Mile	Temporary Traffic Stripe, Skip White

Line No.	Item Code	Adj Code	Quantity	Units	Description [Fixed Unit Price]
0320	619-A5001		28,641	Linear Feet	Temporary Traffic Stripe, Detail
0330	619-A6001		1,336	Linear Feet	Temporary Traffic Stripe, Legend
0340	619-D1001		104	Square Feet	Standard Roadside Construction Signs, Less than 10 Square Feet
0350	619-D2001		981	Square Feet	Standard Roadside Construction Signs, 10 Square Feet or More
0360	619-D3001		10	Each	Remove and Reset Signs, All Sizes
0370	619-E1001		2	Each	Flashing Arrow Panel, Type C
0380	619-G4001		144	Linear Feet	Barricades, Type III, Single Faced
0390	619-G4005		72	Linear Feet	Barricades, Type III, Double Faced
0400	619-G5001		141	Each	Free Standing Plastic Drums
0410	619-G7001		16	Each	Warning Lights, Type "B"
0420	620-A001		1	Lump Sum	Mobilization
0430	627-J001		21	Each	Two-Way Clear Reflective High Performance Raised Markers
0440	627-K001		1,190	Each	Red-Clear Reflective High Performance Raised Markers
0450	627-L001		40	Each	Two-Way Yellow Reflective High Performance Raised Markers
0460	630-A001		299	Square Feet	Standard Roadside Signs, Sheet Aluminum, 0.080" Thickness
0470	630-A002		372	Square Feet	Standard Roadside Signs, Sheet Aluminum, 0.125" Thickness
0480	630-C001		56	Linear Feet	Steel U-Section Posts, 2.0 lb/ft
0490	630-C003		503	Linear Feet	Steel U-Section Posts, 3.0 lb/ft
0500	630-D003		128	Linear Feet	Structural Steel Beams, W6 x 9
0510	630-E001		128	Pounds	Structural Steel Angles & Bars, 3" x 3" x 1/4" Angles
0520	630-E004		455	Pounds	Structural Steel Angles & Bars, 7/16" x 2 1/2" Flat Bar
0530	630-K001		176	Linear Feet	Welded & Seamless Steel Pipe Posts, 3"
0540	630-K003		306	Linear Feet	Welded & Seamless Steel Pipe Posts, 4"
0550	640-A016		16	Each	Traffic Signal Heads, Type 1 LED
0560	640-A056		4	Each	Traffic Signal Heads, Type 2 FYA LED
0570	642-A001		1	Each	Solid State Traffic Actuated Controllers, Type 8M
0580	643-A001		1	Each	Closed Loop On-Street Master System
0590	647-A002		4	Each	Pullbox, Type 3
0600	647-A005		14	Each	Pullbox, Type 2
0610	648-A001		2	Each	Radio Interconnect, Installed in New Controller Cabinet
0620	653-B001		70	Square Feet	Street Name Sign, Encapsulated Lens
0630	666-B004		1,376	Linear Feet	Electric Cable, Underground in Conduit, IMSA 20-1, AWG 10, 2 Conductor
0640	666-B007		2,642	Linear Feet	Electric Cable, Underground in Conduit, IMSA 20-1, AWG 12, 4 Conductor
0650	666-B023		158	Linear Feet	Electric Cable, Underground in Conduit, IMSA 20-1, AWG 8, 3 Conductor

Line No.	Item Code	Adj Code	Quantity	Units	Description [Fixed Unit Price]
0660	666-B054		1,425	Linear Feet	Electric Cable, Underground in Conduit, IMSA 20-1, AWG 14, 8 Conductor
0670	668-A018		2,220	Linear Feet	Traffic Signal Conduit, Underground, Type 4, 2"
0680	668-A020		57	Linear Feet	Traffic Signal Conduit, Underground, Type 4, 3"
0690	668-B025		1,071	Linear Feet	Traffic Signal Conduit, Underground Drilled or Jacked, Rolled Pipe, 3"
0700	815-E001	(S)	224	Square Yard	Geotextile under Riprap
0710	907-216-A001		1,500	Square Yard	Solid Sodding
0720	907-225-A001		1	Acre	Grassing
0730	907-225-B001		3	Ton	Agricultural Limestone
0740	907-225-C001		2	Ton	Mulch, Vegetative Mulch
0750	907-226-A001		1	Acre	Temporary Grassing
0760	907-234-D001		6	Each	Inlet Siltation Guard
0770	907-234-E001		6	Each	Reset Inlet Siltation Guard
0780	907-237-A002		450	Linear Feet	Wattles, 12"
0790	907-237-A003		1,000	Linear Feet	Wattles, 20"
0800	907-245-A001		150	Linear Feet	Triangular Silt Dike
0810	907-246-A001		870	Linear Feet	Sandbags
0820	907-249-A001		129	Ton	Riprap for Erosion Control
0830	907-249-B001		65	Cubic Yard	Remove and Reset Riprap
0840	907-304-A008	(GY)	2,570	Cubic Yard	Granular Material, LVM, Class 3, Group C
0850	907-403-A022	(BA1)	708	Ton	9.5-mm, MT, Asphalt Pavement
0860	907-403-A023	(BA1)	12	Ton	12.5-mm, MT, Asphalt Pavement
0870	907-403-A024	(BA1)	735	Ton	19-mm, MT, Asphalt Pavement
0880	907-403-AA001	(BA1)	5,276	Ton	Stone Matrix Asphalt, 9.5 mm Mixture
0890	907-403-AA002	(BA1)	7,117	Ton	Stone Matrix Asphalt, 12.5 mm Mixture
0900	907-406-D001		67,010	Square Yard	Fine Milling of Bituminous Pavement, All Depths
0910	907-407-A001	(A2)	6,868	Gallon	Asphalt for Tack Coat
0920	907-601-B003	(S)	9	Cubic Yard	Class "B" Structural Concrete, Minor Structures
0930	907-618-A001		1	Lump Sum	Maintenance of Traffic
0940	907-626-A003		3	Mile	6" Thermoplastic Traffic Stripe, Skip White
0950	907-626-C003		1	Mile	6" Thermoplastic Double Drop Edge Stripe, Continuous White
0960	907-626-E003		1,828	Linear Feet	6" Thermoplastic Traffic Stripe, Continuous Yellow
0970	907-626-F003		1	Mile	6" Thermoplastic Double Drop Edge Stripe, Continuous Yellow
0980	907-626-G004		34,030	Linear Feet	Thermoplastic Detail Stripe, White

Line No.	Item Code	Adj Code	Quantity	Units	Description [Fixed Unit Price]
0990	907-626-G005		7,814	Linear Feet	Thermoplastic Detail Stripe, Yellow
1000	907-626-H004		1,348	Linear Feet	Thermoplastic Legend, White
1010	907-626-H005		1,112	Square Feet	Thermoplastic Legend, White
1020	907-630-C001		56	Linear Feet	Steel U-Section Posts, 2.0 lb/ft
1030	907-630-C003		503	Linear Feet	Steel U-Section Posts, 3.0 lb/ft
1040	907-630-PP010		148	Square Feet	Roadside Directional Signs, Sheet Aluminum, 0.125" Thickness, Ground Mounted
1050	907-639-A010		2	Each	Traffic Signal Equipment Pole, Type IV, 30' Shaft, 35' Arm
1060	907-639-A016		1	Each	Traffic Signal Equipment Pole, Type IV, 30' Shaft, 55' Arm
1070	907-639-A028		1	Each	Traffic Signal Equipment Pole, Type IV, 30' Shaft, 30' Arm
1080	907-639-A080		4	Each	Traffic Signal Equipment Pole, Type IV, 30' Shaft, 80' Arm
1090	907-639-C002		31	Cubic Yard	Pole Foundations, 36" Diameter
1100	907-639-D001		120	Linear Feet	Slip Casing, 36" Diameter
1110	907-641-C001		2	Each	Signal Radar Detection System
1120	907-641-D001		1	Lump Sum	Signal Radar Detection Training
1130	907-642-A003		1	Each	Solid State Traffic Actuated Controllers, Type 8A
1140	907-645-B001		4	Each	Be Prepared to Stop When Flashing Assembly
1150	907-658-D001		1	Each	Cellular Modem
1160	907-699-A002		1	Lump Sum	Roadway Construction Stakes
1170	907-815-F002	(S)	10	Cubic Yard	Sediment Control Stone
ALTERNATE GROUP AA NUMBER 1					
1180	907-304-F002	(GT)	2,800	Ton	Size 610 Crushed Stone Base
ALTERNATE GROUP AA NUMBER 2					
1190	907-304-F003	(GT)	2,800	Ton	3/4" and Down Crushed Stone Base
ALTERNATE GROUP AA NUMBER 3					
1200	907-304-F004	(GT)	2,800	Ton	Size 825B Crushed Stone Base