

SECTION 905 -- PROPOSAL (CONTINUED)

I (We) hereby certify by digital signature and electronic submission via Bid Express of the Section 905 proposal below, that all certifications, disclosures and affidavits incorporated herein are deemed to be duly executed in the aggregate, fully enforceable and binding upon delivery of the bid proposal. I (We) further acknowledge that this certification shall not extend to the bid bond or alternate security which must be separately executed for the benefit of the Commission. This signature does not cure deficiencies in any required certifications, disclosures and/or affidavits. I (We) also acknowledge the right of the Commission to require full and final execution on any certification, disclosure or affidavit contained in the proposal at the Commission's election upon award. Failure to so execute at the Commission's request within the time allowed in the Standard Specifications for execution of all contract documents will result in forfeiture of the bid bond or alternate security.

Bidder acknowledges receipt of and has added to and made a part of the proposal and contract documents the following addendum (addenda):

ADDENDUM NO. 1 DATED 2/23/2017 ADDENDUM NO. DATED
 ADDENDUM NO. DATED ADDENDUM NO. DATED

Number	Description
1	Revised Bid Items; Revised or Added Plan Sheet Nos. 2, 3, & 4; Amendment EBS Download Required.

TOTAL ADDENDA: 1
 (Must agree with total addenda issued prior to opening of bids)

Respectfully Submitted,

DATE _____

 Contractor

BY _____
 Signature

TITLE _____

ADDRESS _____

CITY, STATE, ZIP _____

PHONE _____

FAX _____

E-MAIL _____

(To be filled in if a corporation)

Our corporation is chartered under the Laws of the State of _____ and the names, titles and business addresses of the executives are as follows:

 President Address

 Secretary Address

 Treasurer Address

The following is my (our) itemized proposal.

BR-0020-01(235)/ 106991302000

Hinds County(ies)


Bridge Deck Repair on I-20 over Valley Street, known as Federal Aid Project No. BR-0020-01(235) / 106991302 in Hinds County.

Line No.	Item Code	Adj Code	Quantity	Units	Description [Fixed Unit Price]
Roadway Items					
0010	619-D1001		8	Square Feet	Standard Roadside Construction Signs, Less than 10 Square Feet
0020	619-D2001		196	Square Feet	Standard Roadside Construction Signs, 10 Square Feet or More
0030	619-E1001		1	Each	Flashing Arrow Panel, Type C
0040	619-F1002		204	Linear Feet	Portable Median Barrier
0050	619-G4001		132	Linear Feet	Barricades, Type III, Single Faced
0060	619-G5001		131	Each	Free Standing Plastic Drums
0070	620-A001		1	Lump Sum	Mobilization
0080	907-618-A001		1	Lump Sum	Maintenance of Traffic
0090	907-619-E3001		19	Each	Changeable Message Sign
0095	619-G7001		6	Each	Warning Lights, Type "B"
Bridge Items					
0100	808-A001	(S)	77	Linear Feet	Joint Preparation
0110	907-202-B004		73	Square Yard	Removal of Bridge Deck, Hydrodemolition
0120	907-804-A001	(S)	16	Cubic Yard	Bridge Concrete, Class AA
0130	907-823-A001		77	Linear Feet	Prefomed Joint Seal, Type I

STATE	PROJECT NO.
MISS.	BR-0020-01(235)

<u>DESCRIPTION OF SHEET</u>	REV. DATE	WK. SH.	SH. NO.
TITLE SHEET (1)			1
DETAILED INDEX		DI-1	2
GENERAL NOTES		GN-1	3
<u>SUMMARY OF QUANTITY SHEETS (1)</u>			
SUMMARY OF QUANTITIES		SQ-1	4
<u>ESTIMATED QUANTITY SHEETS - ROADWAY (1)</u>			
ESTIMATED QUANTITIES - CONSTRUCTION SIGNING - BRIDGE DECK REPAIR INTERSTATE 20 OVER VALLEY STREET		EQ-1	5
<u>TRAFFIC CONTROL SHEETS ROADWAY (6)</u>			
DMS BOARD LOCATIONS - INTERSTATE 20 OVER VALLEY STREET		DMS-1	6
CMS SIGN LOCATIONS - INTERSTATE 20 OVER VALLEY STREET		CMS-1	7
PHASE 1 LANE CLOSURE		TC-1	8
PHASE 1 LANE CLOSURE		TC-2	9
PHASE 1 LANE CLOSURE		TC-3	10
PHASE 1 LANE CLOSURE		TC-4	11
<u>SPECIAL DESIGN SHEETS (1)</u>			
SPECIAL DESIGN - HIGHWAY SIGN AND BARRICADE DETAILS FOR CONSTRUCTION PROJECTS		SDTCP-10	12
<u>STANDARD DRAWINGS (1)</u>			
TRAFFIC CONTROL PLAN FOR POSTED SPEED LIMIT OF 65 OR 70 MPH (INTERSTATE)(EXTENDED PERIOD)		TCP-4	6253
TOTAL ROADWAY SHEETS =			13

2/15/2017 11:36 AM BR-0020-01-235 INDEX.DGN ROADWAY PLAN DIVISION MISSISSIPPI DEPARTMENT OF TRANSPORTATION

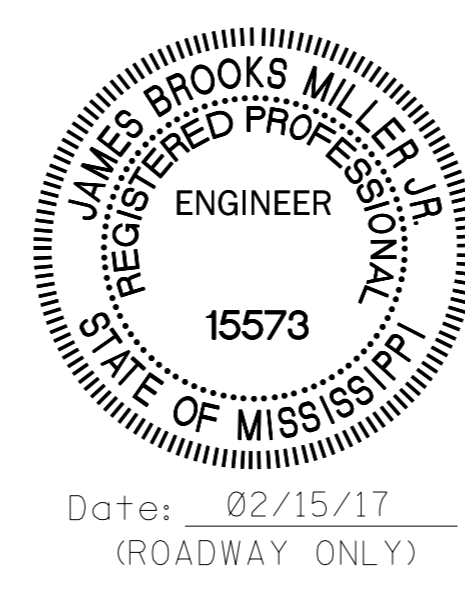

PS & E PLANS-DATE: 12-07-2016		
FMS CON.: # 106991 / 302000		
REVISIONS		
DATE	SHEET NO.	BY
01/31/17	4	JBM
02/15/17	3	JBM

REVISION	MISSISSIPPI DEPARTMENT OF TRANSPORTATION
	DETAILED INDEX
DATE	BRIDGE DECK REPAIR
	INTERSTATE 20 OVER VALLEY STREET
	COUNTY: HINDS
	PROJ. NUM.: BR-0020-01(235)
	FILENAME: BR-0020-01-235 INDEX.DGN
	DESIGN TEAM Michael Baker CHECKED KJC DATE 2016




WORKING NUMBER	DI-1
SHEET NUMBER	2


ADDENDUM

STATE	PROJECT NO.
MISS.	BR-0020-01(235)

GENERAL NOTES

- (1) THE LOCATION AND SPACING OF SIGNS, SHOWN ON THE TRAFFIC CONTROL PLANS, ARE APPROXIMATE AND MAY BE ADJUSTED AS NECESSARY TO FIT FIELD CONDITIONS.
- (2) ALL TRAFFIC CONTROL DEVICES ON THIS PROJECT SHALL COMPLY WITH THE MUTCD (LATEST EDITION).
- (3) ALL PLASTIC DRUMS SHALL HAVE A BALLASTING COLLAR MADE FROM RECYCLED TRUCK TIRES OR OTHER SUITABLE MATERIAL.
- (4) THE CONTRACTOR SHALL BE RESPONSIBLE FOR PROTECTING EXISTING STRUCTURES SUCH AS, BUT NOT LIMITED TO, PIPES, INLETS, APRONS, AND BRIDGES FROM DAMAGE WHICH MIGHT OCCUR DURING CONSTRUCTION. THE CONTRACTOR SHALL REPLACE OR REPAIR, AS DIRECTED BY THE ENGINEER, ANY STRUCTURES DAMAGED DURING THE LIFE OF THE CONTRACT. NO PAYMENT WILL BE MADE FOR REPLACEMENT OR REPAIR OF DAMAGED ITEMS.
- (5) VOIDS CREATED BY THE REMOVAL OF, BUT NOT LIMITED TO, POSTS, CONCRETE ANCHORS, AND FOOTINGS SHALL BE BACKFILLED AND TAMPED IN ACCORDANCE WITH SECTION 203 OF THE MISSISSIPPI STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION FOR THIS PROJECT.
- (6) SOME WORK IS REQUIRED OUTSIDE THE PROJECT LIMITS. NO ADDITIONAL COMPENSATION WILL BE MADE FOR SUCH WORK EXCEPT AS PROVIDED BY SPECIFIC PAY ITEMS INCLUDED IN THE PLANS.
- (7) FLUORESCENT ORANGE SHEETING SHALL BE USED ON ALL CONSTRUCTION AND TRAFFIC CONTROL SIGNS EXCEPT FOR THOSE DESIGNATED ON THE PLANS TO BE BLACK LEGEND AND BORDER ON WHITE BACKGROUND.
- (8) ROADWAY SIGNS THAT ARE IN CONFLICT WITH CONSTRUCTION OF THIS PROJECT SHALL BE REMOVED AND RELOCATED BY THE CONTRACTOR AS DIRECTED BY THE ENGINEER, THE COST OF WHICH SHALL BE ABSORBED IN OTHER ITEMS BID.
- (9) ALL ITEMS OF WORK ASSOCIATED WITH THE INSTALLATION OF A CONSTRUCTION ENTRANCE SHALL BE ABSORBED IN OTHER ITEMS OF WORK.
- (10) THE CONTRACTOR WILL COORDINATE WITH ADJACENT PROJECTS IN IMPLEMENTING THE TRAFFIC CONTROL PLAN. ALL CONFLICTING SIGNS SHALL BE COVERED OR REMOVED AS DIRECTED BY THE PROJECT ENGINEER.
- (11) BIDDERS ARE ADVISED THAT HARD COPIES OF ANY ADDENDA FOR THIS PROJECT WILL NO LONGER BE MAILED. ALL ADDENDA FOR THIS PROJECT WILL BE POSTED TO WWW.MDOT.MS.GOV UNDER THE PROPOSAL ADDENDA COLUMN. IT IS THE BIDDER'S RESPONSIBILITY TO CHECK AND SEE IF ANY ADDENDA HAVE BEEN POSTED FOR THIS PROJECT. PLEASE CONTACT CONTRACT ADMINISTRATION DIVISION AT 601-359-7700 FOR ANY QUESTIONS REGARDING ELECTRONIC ADDENDA.
- (12) FOR ESTIMATED QUANTITIES AND GENERAL NOTES PERTAINING TO THE BRIDGE REPAIR PLANS, SEE SHEET NO. 1 OF 5.
- 13) THE MDOT TRAFFIC MANAGEMENT CENTER WILL BE RESPONSIBLE FOR OPERATION AND MESSAGING OF THE PERMANENT DMS BOARDS.
- 14) THE CONTRACTOR SHALL COORDINATE WITH MDOT PROJECT ENGINEER ON THE FINAL CLOSURE DATES. THE MDOT PROJECT ENGINEER WILL CONTACT THE MDOT TRAFFIC MANAGEMENT CENTER AT 601-359-1993 AND COORDINATE WITH THE TRAFFIC MANAGEMENT CENTER ON THE APPROPRIATE DMS MESSAGING PRIOR TO AND DURING THE CLOSURE.
- 15) 

2/15/2017 11:36 AM BR-0020-01-235 NOTES.DGN PLAN DIVISION MISSISSIPPI DEPARTMENT OF TRANSPORTATION

REMOVED GENERAL NOTE IS		SUBMITTED BY		MISSISSIPPI DEPARTMENT OF TRANSPORTATION	
DATE				GENERAL NOTES	
				BRIDGE DECK REPAIR	
				INTERSTATE 20 OVER	
				VALLEY STREET	
				COUNTY: HINDS	
				PROJ. NUM.: BR-0020-01(235)	
				FILENAME: BR-0020-01-235 NOTES.DGN	
				DESIGN TEAM Michael Baker CHECKED KJC DATE 2016	
				 WORKING NUMBER GN-1 SHEET NUMBER 3	

ADDENDUM

STATE	PROJECT NO.
MISS.	BR-0020-01(235)

SUMMARY OF QUANTITIES (SHEET 1)

PAY ITEM NO.	PAY ITEM	UNIT	PRELIMINARY	FINAL
907-202-B004	REMOVAL OF BRIDGE DECK, HYDRODEMOLITION	SY	73	
907-618-A001	MAINTENANCE OF TRAFFIC	LS	100%	
619-D1001	STANDARD ROADSIDE CONSTRUCTION SIGNS, LESS THAN 10 SQUARE FEET	SF	8	
619-D2001	STANDARD ROADSIDE CONSTRUCTION SIGNS, 10 SQUARE FEET OR MORE	SF	196	
619-E1001	FLASHING ARROW PANEL, TYPE C	EA	1	
907-619-E3001	CHANGEABLE MESSAGE SIGN	EA	19	
619-G4001	BARRICADES, TYPE III, SINGLE FACED	LF	132	
619-F1002	PORTABLE MEDIAN BARRIER	LF	204	
619-G5001	FREE STANDING PLASTIC DRUMS	EA	131	
619-G7001	WARNING LIGHTS, TYPE "B"	EA	6	
620-A001	MOBILIZATION	LS	100%	
907-804-A001	BRIDGE CONCRETE, CLASS AA	CY	16	
808-A001	JOINT PREPARATION	LF	77	
907-823-A001	PREFORMED JOINT SEAL, TYPE I	LF	77	


⚠️ ① QUANTITY SHALL INCLUDE THE COST TO REPLACE ANY PERMANENT STRIPING THAT IS REMOVED OR DAMAGED DURING CONSTRUCTION. COLD PLASTIC WILL BE AN ACCEPTABLE REPLACEMENT.

① ⚠️

1/31/2017 3:11 PM BR-0020-01-235 SQS.DGN ROADWAY PLAN DIVISION MISSISSIPPI DEPARTMENT OF TRANSPORTATION

01/31/2017	ADDED NOTE FOR PAVEMENT MARKINGS	JBM	BY	
	REVISION			

MISSISSIPPI DEPARTMENT OF TRANSPORTATION
SUMMARY OF QUANTITIES
BRIDGE DECK REPAIR
INTERSTATE 20 OVER
VALLEY STREET
 COUNTY: HINDS
 PROJ. NUM.: BR-0020-01(235)
 FILENAME: BR-0020-01-235 SQS.DGN
 DESIGN TEAM Michael Baker CHECKED KJC DATE 2016



WORKING NUMBER
SQ-1
SHEET NUMBER
4