

STATE	PROJECT NUMBER	SHEET NO.
MISSISSIPPI	IM-0059-01(115)	1

GENERAL INDEX

INCLUDED THIS PROJECT	BEGIN WITH SHEET
<input checked="" type="checkbox"/> ROADWAY	1
<input type="checkbox"/> PERMANENT SIGNS	1001
<input type="checkbox"/> TRAFFIC SIGNALS	2001
<input type="checkbox"/> ITS COMPONENTS	3001
<input type="checkbox"/> LIGHTING	4001
<input type="checkbox"/> (RESERVED)	5001
<input checked="" type="checkbox"/> ROADWAY STANDARD DWGS ..	6001
<input type="checkbox"/> BRIDGE STANDARD DWGS	7001
<input type="checkbox"/> BRIDGE	8001
<input type="checkbox"/> CROSS SECTIONS	9001

STATE OF MISSISSIPPI

MISSISSIPPI DEPARTMENT OF TRANSPORTATION


PLAN AND PROFILE OF PROPOSED STATE HIGHWAY FEDERAL AID PROJECT NO. IM-0059-01(115)

I-59 FROM BLACK CREEK TO US 98 EAST


FMS CONST 107073/301000 FORREST
FMS CONST 107073/302000 LAMAR

SCALES

PLAN	1 IN. = 100 FT.
PROFILE {	HOR. 1 IN. = 100 FT.
	VERT. 1 IN. = N/A
LAYOUT	1 IN. = N/A

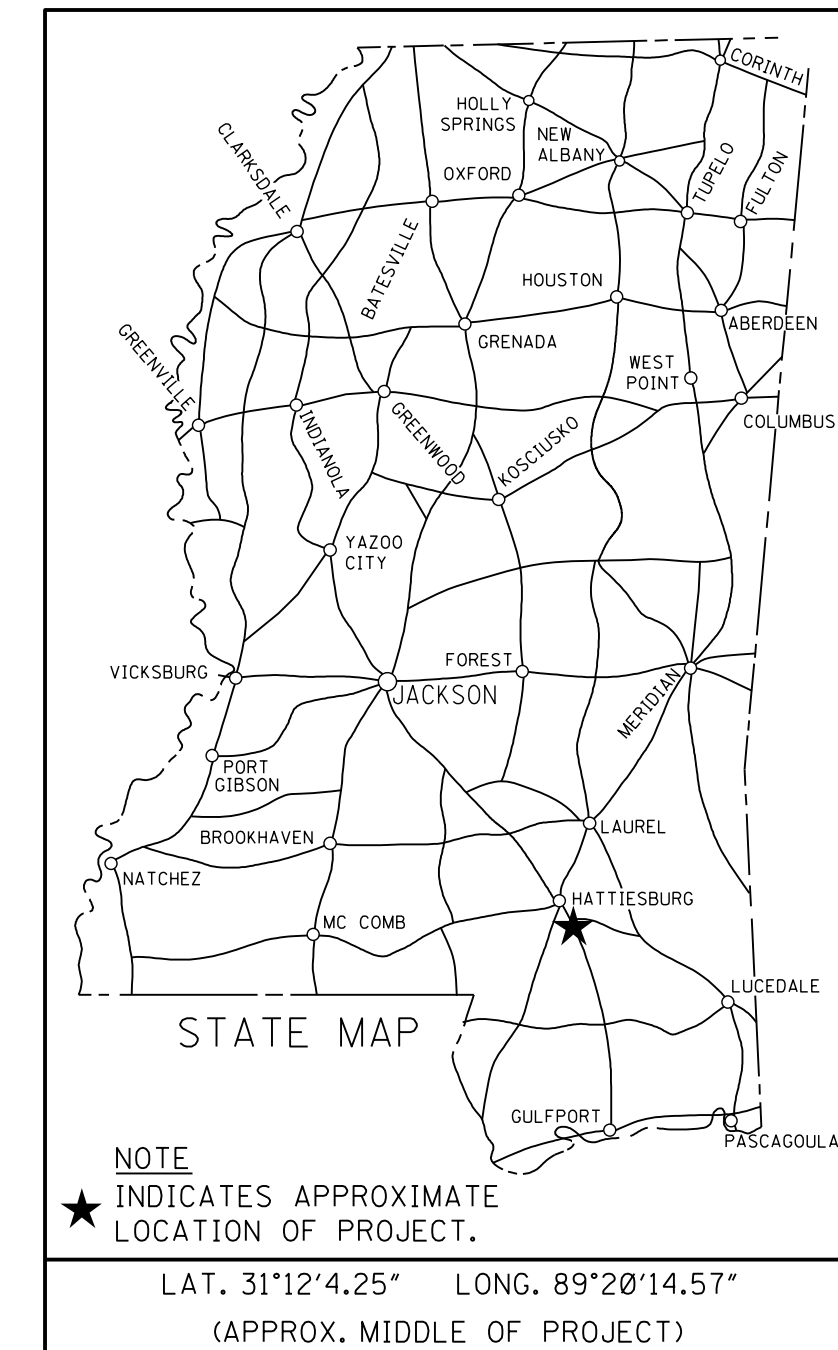

TO POPLARVILLE

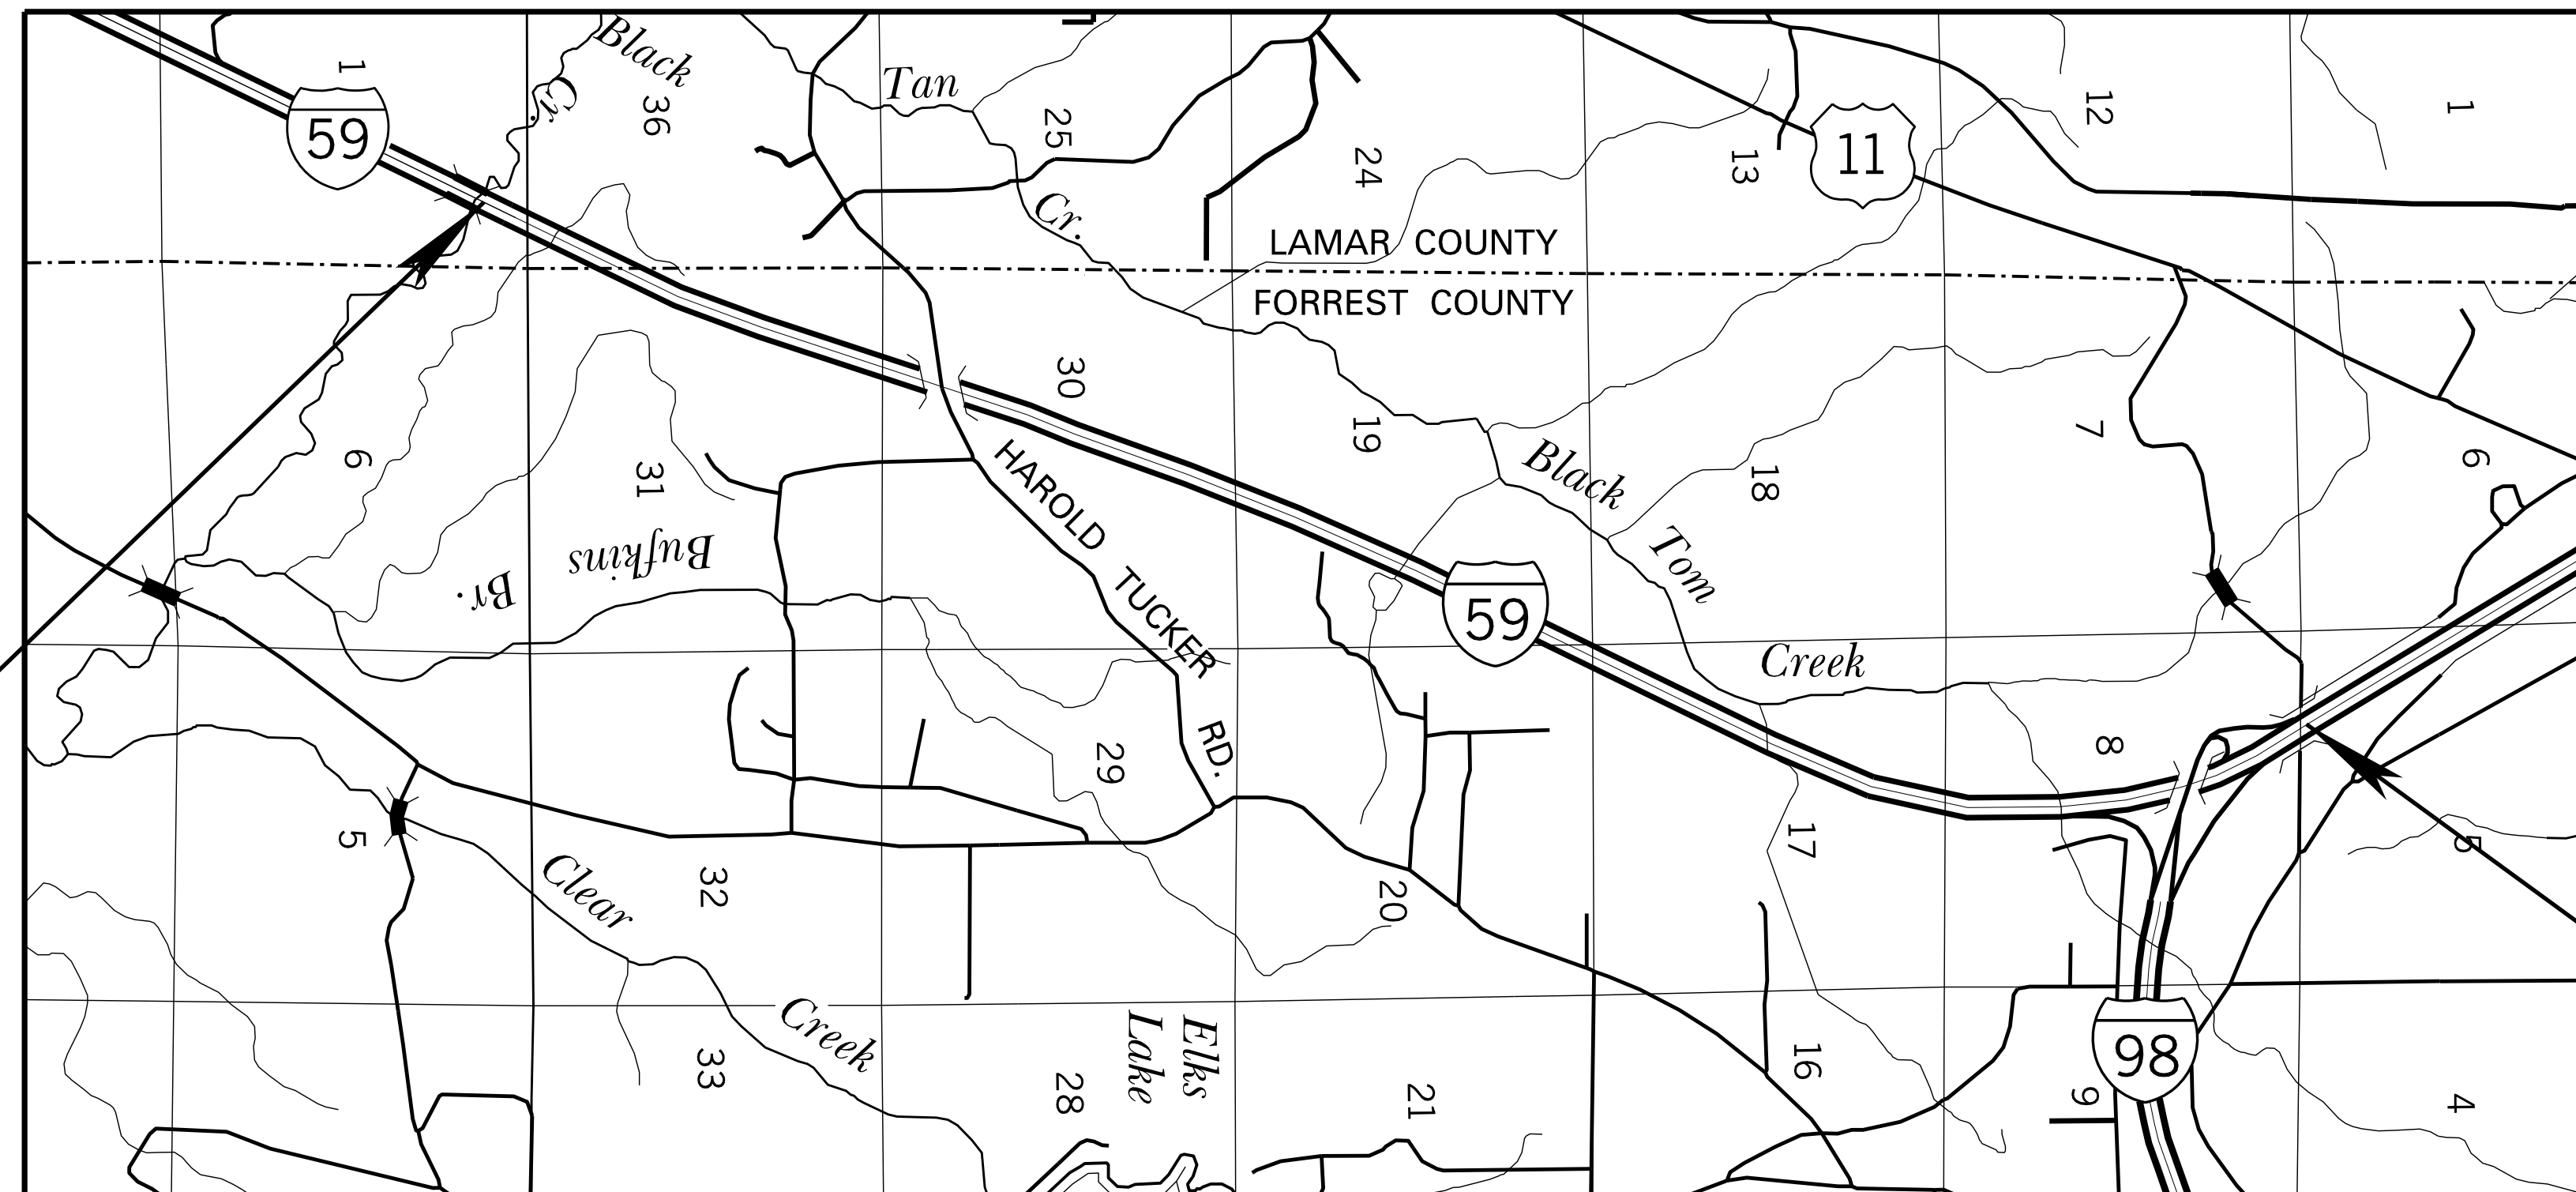

778 + 70.000 B.O.P

1071 + 04.80 E.O.P

EQUATIONS

1070 + 64.435 BK = 1070 + 16.130 AH + 48.305

EXCEPTIONS

LENGTH DATA

	LAMAR COUNTY		FORREST COUNTY		PROJECT	
LENGTH OF ROADWAY	2,149.949 FT.	0.407 MI.	27,133.156 FT.	5.139 MI.	29,283.105 FT.	5.546 MI.
LENGTH OF BRIDGES						
LENGTH OF PROJECT (NET)						
LENGTH OF EXCEPTIONS						
LENGTH OF PROJECT (GROSS)	2,149.949 FT.	0.407 MI.	27,133.156 FT.	5.139 MI.	29,283.105 FT.	5.546 MI.

DESIGN CONTROL
MPH = V (SPEED DESIGN)

ADT () = : ADT () =
DHV = : D = % T = %

PERMITS ACQUIRED BY MDOT
WETLANDS AND WATERS PERMITS (NECESSARY FOR ULTIMATE IMPROVEMENTS ONLY):

	WATERS	WETLANDS
NATIONWIDE #14	<input type="checkbox"/>	<input type="checkbox"/>
NATIONWIDE (OTHER)*	<input type="checkbox"/>	<input type="checkbox"/>
GENERAL*	<input type="checkbox"/>	<input type="checkbox"/>
INDIVIDUAL (404)*	<input type="checkbox"/>	<input type="checkbox"/>

* ACQUISITION OF PERMITS FOR TEMPORARY IMPACTS DURING CONSTRUCTION ARE THE RESPONSIBILITY OF THE CONTRACTOR

STORMWATER PERMIT

Y REQUIRED, SCNOI SUBMITTED BY MDOT (DISTURBED AREA = 5 ACRES)
S REQUIRED, SCNOI TO BE SUBMITTED BY CONTRACTOR (1 TO 4.99 ACRES)
N NO STORMWATER PERMIT REQUIRED (<1 ACRE)

APPROVED BY: _____

P S & E DATE: 01/06/2017

APPROVED: _____
DEPUTY EXECUTIVE DIRECTOR / CHIEF ENGINEER
EXECUTIVE DIRECTOR



STATE	PROJECT NO.
MISS.	IM-0059-01(115)

DESCRIPTION OF SHEET

REVISION DATE WKG. NO. SH. NO.

TITLE SHEET			1
DETAILED INDEX		DI-1	2
DETAILED INDEX		DI-1	3
GENERAL NOTES		GN-1	4
TYPICAL SECTION SHEETS (9)			
TYPICAL SECTION - MAIN FACILITY		TS-1	5
TYPICAL SECTION - I-59/US-98 BYPASS INTERCHANGE RAMPS		TS-2	6
TYPICAL SECTION - US-98 TO I-59 SOUTH LOOP		TS-3	7
TYPICAL SECTION - REST AREA RAMPS		TS-4	8
TYPICAL SECTION - REST AREA ACCELERATION LANE RECONSTRUCTION		TS-5	9
TYPICAL SECTION - PAVING DETAILS		TS-6	10
TYPICAL SECTION - RUMBLE STRIP DETAILS		TS-7	11
TYPICAL SECTION - PAVING DETAILS AT RAMPS		TS-8	12
TYPICAL SECTION - ROADSIDE CLEAR ZONES REQUIRED		TS-9	13
QUANTITY SHEETS (6)			
SUMMARY OF QUANTITIES		SQ-1	14
SUMMARY OF QUANTITIES		SQ-2	15
ESTIMATED QUANTITIES - GUARDRAIL REMOVAL ITEMS		EQ-1	16
ESTIMATED QUANTITIES - GUARDRAIL REQUIRED		EQ-2	17
ESTIMATED QUANTITIES FOR TRAFFIC CONTROL SIGNS - LAMAR COUNTY		TCP-EQ1	18
ESTIMATED QUANTITIES FOR TRAFFIC CONTROL SIGNS - FORREST COUNTY		TCP-EQ2	19
PLAN AND PROFILE SHEETS (17)			
STA. 778+70 (BOP) TO STA. 800+00		3	20
STA. 800+00 TO STA. 830+00		4	21
STA. 830+00 TO STA. 860+00		5	22
STA. 860+00 TO STA. 890+00		6	23
DETAIL - SOUTHBOUND REST AREA		6A	24
STA. 890+00 TO STA. 920+00		7	25
DETAIL - NORTHBOUND REST AREA		7A	26
STA. 920+00 TO STA. 950+00		8	27
STA. 950+00 TO STA. 980+00		9	28
STA. 980+00 TO STA. 1010+00		10	29
STA. 1010+00 TO STA. 1040+00		11	30
DETAIL OF RAMPS - RAMP TO HWY 98 EAST		11A	31
DETAIL OF RAMPS - HWY 98 WEST TO I59 NORTH RAMP		11B	32
DETAIL OF RAMPS - HWY 98 WEST TO I59 NORTH RAMP		11C	33
STA. 1040+00 TO STA. 1070+00		12	34
DETAIL OF RAMPS - US98 TO I59 S LOOP/I59S TO 98E LOOP		12A	35
STA. 1070+00 TO STA. 1071+04.80 (EOP)		13	36
PRELIMINARY EROSION CONTROL PLAN SHEETS (15)			
EROSION CONTROL PLAN - STA. 778+70 (BOP) TO STA. 800+00		ECP-3	37
EROSION CONTROL PLAN - STA. 800+00 TO STA. 830+00		ECP-4	38
EROSION CONTROL PLAN - STA. 830+00 TO STA. 860+00		ECP-5	39
EROSION CONTROL PLAN - STA. 860+00 TO STA. 890+00		ECP-6	40
EROSION CONTROL PLAN - STA. 890+00 TO STA. 920+00		ECP-7	41
EROSION CONTROL PLAN - STA. 920+00 TO STA. 950+00		ECP-8	42
EROSION CONTROL PLAN - STA. 950+00 TO STA. 980+00		ECP-9	43
EROSION CONTROL PLAN - STA. 980+00 TO STA. 1010+00		ECP-10	44
EROSION CONTROL PLAN - STA. 1010+00 TO STA. 1040+00		ECP-11	45
EROSION CONTROL PLAN - RAMP TO HWY 98 EAST		ECP-11A	46
EROSION CONTROL PLAN - HWY 98 WEST TO I59 NORTH RAMP		ECP-11B	47
EROSION CONTROL PLAN - HWY 98 WEST TO I59 NORTH RAMP		ECP-11C	48
EROSION CONTROL PLAN - STA. 1040+00 TO STA. 1070+00		ECP-12	49
EROSION CONTROL PLAN - US98 TO I59 S LOOP/I59S TO 98E LOOP		ECP-12A	50
EROSION CONTROL PLAN - STA. 1070+00 TO STA. 1071+04.80 (EOP)		ECP-13	51

DESCRIPTION OF SHEET

REVISION DATE WKG. NO. SH. NO.

SPECIAL DESIGN SHEETS (37)			
TRAFFIC CONTROL PLAN - DETAILS FOR CONSTRUCTION SIGNING		TCP-17	52
TRAFFIC CONTROL PLAN - DETAILS FOR CONSTRUCTION SIGNING		TCP-18	53
PAVEMENT MARKING DETAILS FOR INTERCHANGE ENTRANCE RAMPS (PARALLEL AND TAPERS)		SDPM-3	54
PAVEMENT MARKING DETAILS FOR INTERCHANGE EXIT RAMPS (PARALLEL AND TAPERS)		SDPM-4	55
TYPICAL INSTALLATION AND DETAILS OF DELINEATORS AND DISTANCE REFERENCE SIGNS		SDSN-8	56
HIGHWAY SIGN AND BARRICADE DETAILS FOR CONSTRUCTION PROJECTS		SDTCP-10	57
GUARDRAIL: RUB RAIL HARDWARE SHEET		GR-RR	58
GUARDRAIL: BRIDGE END SECTIONS TYPE "I" (STEEL POSTS)		GR-2G	59
ROADSIDE HAZARD - CONCRETE MEDIAN BARRIER, TYPE 4 MODIFIED (CAST IN PLACE) 42" HT.		MB-5	60
ROADSIDE HAZARD - CONCRETE MEDIAN BARRIER, CONCRETE FOOTING DETAIL		MB-6	61
MILLING TRANSITIONS - MAIN FACILITY AT U.S. 98		RD-1	62
TYPICAL TEMPORARY EROSION/SEDIMENT CONTROL APPLICATIONS		ECD-1	63
DETAILS OF SEDIMENT BARRIER APPLICATIONS		ECD-2	64
DETAILS OF SILT FENCE INSTALLATION		ECD-3	65
DITCH CHECK STRUCTURES, TYPICAL APPLICATIONS AND DETAILS		ECD-4	66
TEMPORARY EROSION, SEDIMENT & WATER POLLUTION CONTROL MEASURES, SILT FENCE AND HAY BALE DITCH CHECKS		ECD-5	67
DETAILS OF EROSION CONTROL - WATTLE DITCH CHECK		ECD-6	68
DETAILS OF SILT DIKE DITCH CHECK		ECD-7	69
ROCK DITCH CHECK		ECD-8	70
ROCK FILTER DAM		ECD-9	71
ROCK DITCH CHECK WITH SUMP EXCAVATION & ROCK FILTER DAM		ECD-10	72
INLET PROTECTION TYPICAL APPLICATIONS AND DETAILS		ECD-11	73
INLET PROTECTION DETAILS FOR COARSE AGGREGATE ON GRADES & SAGS		ECD-12	74
INLET PROTECTION DETAILS OF WATTLES		ECD-13	75
INLET PROTECTION DETAILS OF MANUFACTURED INLET PROTECTION DEVICE		ECD-14	76
INLET PROTECTION DETAILS OF SAND BAGS		ECD-15	77
STABILIZED CONSTRUCTION ENTRANCE		ECD-16	78
TEMPORARY CULVERT STREAM CROSSING		ECD-17	79
TEMPORARY STREAM DIVERSION		ECD-18	80
TEMPORARY STREAM DIVERSION (BOX EXTENSIONS)		ECD-19	81
FLOATING TURBIDITY CURTAIN		ECD-20	82
DETAILS OF EROSION CONTROL SANDBAG DITCH CHECK		ECD-21	83
SEDIMENT RETENTION BARRIER		ECD-22	84
EROSION CONTROL		EC-1	85
DETAILS OF TYPICAL DITCH TREATMENTS		DT-1	86
TYPICAL TEMPORARY EROSION CONTROL MEASURES (SLOPE DRAIN AND TYPE A SILT BASIN)		TEC-2	87
TYPICAL TEMPORARY EROSION CONTROL MEASURES (TYPE B SILT BASIN)		TEC-3	88

1/26/2017 1:41:56 DI.DGN

PS & E PLANS- 01/06/2017		
FMS CON. # 107073/301000 & 302000		
REVISIONS		
DATE	SHEET NO.	BY

REVISION	MISSISSIPPI DEPARTMENT OF TRANSPORTATION	
	DETAILED INDEX	
	COUNTY: LAMAR & FORREST	
	PROJ. NUM.: IM-0059-01(115)	
DATE	FILENAME: DI.DGN	WORKING NUMBER
	DESIGN TEAM SIXTH CHECKED DATE	DI-1
		SHEET NUMBER
		2



