

SECTION 905 -- PROPOSAL (CONTINUED)

I (We) hereby certify by digital signature and electronic submission via Bid Express of the Section 905 proposal below, that all certifications, disclosures and affidavits incorporated herein are deemed to be duly executed in the aggregate, fully enforceable and binding upon delivery of the bid proposal. I (We) further acknowledge that this certification shall not extend to the bid bond or alternate security which must be separately executed for the benefit of the Commission. This signature does not cure deficiencies in any required certifications, disclosures and/or affidavits. I (We) also acknowledge the right of the Commission to require full and final execution on any certification, disclosure or affidavit contained in the proposal at the Commission's election upon award. Failure to so execute at the Commission's request within the time allowed in the Standard Specifications for execution of all contract documents will result in forfeiture of the bid bond or alternate security.

Bidder acknowledges receipt of and has added to and made a part of the proposal and contract documents the following addendum (addenda):

ADDENDUM NO. <u> 1 </u>	DATED <u> 5/23/2019 </u>	ADDENDUM NO. <u> </u>	DATED <u> </u>
ADDENDUM NO. <u> </u>	DATED <u> </u>	ADDENDUM NO. <u> </u>	DATED <u> </u>
ADDENDUM NO. <u> </u>	DATED <u> </u>	ADDENDUM NO. <u> </u>	DATED <u> </u>

Number	Description
1	Plan Sheet Nos. 2, 8, & 9; Amendment EBS Download Required.

TOTAL ADDENDA: 1
(Must agree with total addenda issued prior to opening of bids)

Respectfully Submitted,

DATE _____

Contractor

BY _____
Signature

TITLE _____

ADDRESS _____

CITY, STATE, ZIP _____

PHONE _____

FAX _____

E-MAIL _____

(To be filled in if a corporation)

Our corporation is chartered under the Laws of the State of _____ and the names, titles and business addresses of the executives are as follows:

_____ President	_____ Address
_____ Secretary	_____ Address
_____ Treasurer	_____ Address

The following is my (our) itemized proposal.

MP-1025-71(019) / 306681301000

Tishomingo County(ies)

Revised 01/26/2016

ADDENDUM

DESCRIPTION OF SHEET

REVISION DATE	WKG. NO.	SH. NO.
		1
		2
		3
		4
		5
		6
		7
		8
		9
		6051
		6055
		6056
		6061
		6064
		6351
		6358
		6359
		6362
		6363
		6366

TITLE SHEET

DETAILED INDEX & GENERAL NOTES (1)

DETAILED INDEX & GENERAL NOTES

TYPICAL SECTION SHEETS (1)

TYPICAL SECTION - MILL AND OVERLAY

QUANTITY SHEETS (1)

SUMMARY OF QUANTITIES

SPECIAL DESIGN SHEETS (5)

DETAIL OF CONSTRUCTION SIGNING
DETAIL OF CONSTRUCTION SIGNING
DETAIL OF CONSTRUCTION SIGNING
SIGNING OF TWO-WAY TRAFFIC FOR NO PASSING ZONES
VEGETATION SCHEDULE


STANDARD DRAWINGS - ROADWAY SHEETS (11)

PAVEMENT MARKING DETAILS FOR 2-LANE AND 4-LANE DIVIDED HIGHWAYS
PAVEMENT MARKING LEGEND DETAILS
PAVEMENT MARKING LEGEND DETAILS
2-WAY RAISED PAVEMENT MARKERS AT INTERSECTING ROADS (2-LANE)
RUMBLE STRIPES 2-LANE HIGHWAYS (ASPHALT LANES, 2-FT. OR WIDER ASPHALT SHOULDERS)
TRAFFIC CONTROL PLAN WITH FLAGGER (ONE-LANE CLOSURE OF TWO-WAY TRAFFIC)
HIGHWAY SIGN AND BARRICADE DETAILS FOR CONSTRUCTION PROJECTS
TRAFFIC CONTROL PLAN MOBILE OPERATIONS MULTILANE ROADS AND TWO-LANE ROADS
TRAFFIC CONTROL PLANS UNEVEN PAVEMENT DETAILS
TEMPORARY STRIPING FOR TRAFFIC CONTROL, 2-LANE AND 4-LANE DIVIDED HIGHWAYS
TRAFFIC CONTROL DETAILS DRUM PLACEMENT AND SHOULDER CLOSURE

GENERAL NOTES:


- THE LOCATION AND SPACING OF SIGNS, SHOWN ON THE TRAFFIC CONTROL PLANS, ARE APPROXIMATE AND MAY BE ADJUSTED AS NECESSARY TO FIT FIELD CONDITIONS.
- ALL TRAFFIC CONTROL DEVICES ON THIS PROJECT SHALL COMPLY WITH PART VI OF THE MUTCD (LATEST EDITION).
- ALL PLASTIC DRUMS SHALL HAVE A BALLASTING COLLAR MADE FROM RECYCLED TRUCK TIRES OR OTHER SUITABLE MATERIAL.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR PROTECTING EXISTING STRUCTURES SUCH AS, BUT NOT LIMITED TO, PIPES, INLETS, APRONS, AND BRIDGES FROM DAMAGE WHICH MIGHT OCCUR DURING CONSTRUCTION. THE CONTRACTOR SHALL REPLACE OR REPAIR AS DIRECTED BY THE ENGINEER. ANY STRUCTURES DAMAGED DURING THE LIFE OF THE CONTRACT, NO PAYMENT WILL BE MADE FOR REPLACEMENT OR REPAIR OF DAMAGED ITEMS.
- FLUORESCENT ORANGE SHEETING SHALL BE USED ON ALL CONSTRUCTION AND TRAFFIC CONTROL SIGNS EXCEPT FOR THOSE DESIGNATED ON THE PLANS TO BE BLACK LEGEND AND BORDER ON WHITE BACKGROUND.
- VEGETATIVE MATERIAL WILL BE REMOVED PRIOR TO PLACEMENT OF GRANULAR MATERIAL. THE COST OF WHICH SHALL BE ABSORBED IN OTHER BID ITEMS.
- ROADWAY SIGNS THAT ARE IN CONFLICT WITH CONSTRUCTION OF THIS PROJECT SHALL BE REMOVED AND RELOCATED BY THE CONTRACTOR AS DIRECTED BY THE ENGINEER, THE COST OF WHICH SHALL BE ABSORBED IN OTHER ITEMS BID.
- REMOVAL OF RAISED PAVEMENT MARKERS THAT ARE IN CONFLICT WITH REQUIRED CONSTRUCTION IS NOT CONSIDERED A SEPARATE PAY ITEM. COST TO BE ABSORBED IN OTHER ITEMS BID.
- WHERE MILLING IS REQUIRED, THE CONTRACTOR SHALL PROVIDE OUTLETS IN THE EXISTING SHOULDERS AT SUFFICIENT INTERVALS TO PREVENT POOLING OR STANDING WATER ON THE MILLED SURFACE, THE COST OF WHICH SHALL BE ABSORBED IN OTHER ITEMS BID.
- TEMPORARY STRIPING SHALL CONFORM TO FINISHED STRIPE SPECIFICATIONS FOR ALIGNMENT, NEATNESS, AND STRAIGHTNESS.
- ERECTION DATES ARE TO BE LEGIBLY WRITTEN IN BOLD, BLACK MARKINGS ON THE BACK OF ALL PERMANENT SIGNS WITH A PERMANENT MARKING STICK THAT IS WATERPROOF, FADE RESISTANT, AND MARKS ON WET OR DRY SURFACES.
- ALL ADDENDA TO THESE PLANS WILL BE POSTED TO WWW.MDOT.MS.GOV UNDER THE PROPOSAL ADDENDA COLUMN. BIDDERS ARE ADVISED THAT HARD COPIES OF ANY ADDENDA FOR THIS PROJECT WILL NOT BE MAILED. IT IS THE BIDDER'S RESPONSIBILITY TO CHECK AND SEE IF ANY ADDENDA HAVE BEEN POSTED FOR THIS PROJECT.
- WHERE A PAPER JOINT IS REQUIRED, A TAPER SHALL BE PLACED AT (3) THREE HORIZONTAL FEET PER EACH (1) VERTICAL INCH.

PS & E PLANS - DATE: 03/28/19	
FMS CON. # 306681/301000	
REVISIONS	
DATE	SHEET NO. BY
5/22/19	8,9 RCE


MISSISSIPPI DEPARTMENT OF TRANSPORTATION	
 DETAILED INDEX & GENERAL NOTES	
PROJ. NO.: MP-1025-71(019) COUNTY: TISHOMINGO	
WORKING NUMBER	DI-1
SHEET NUMBER	2

FILENAME: 306681_SR25_TISH1	DATE: 2019-05-07
DESIGN TEAM	CHECKED

ADDENDUM



ADDED SHEET

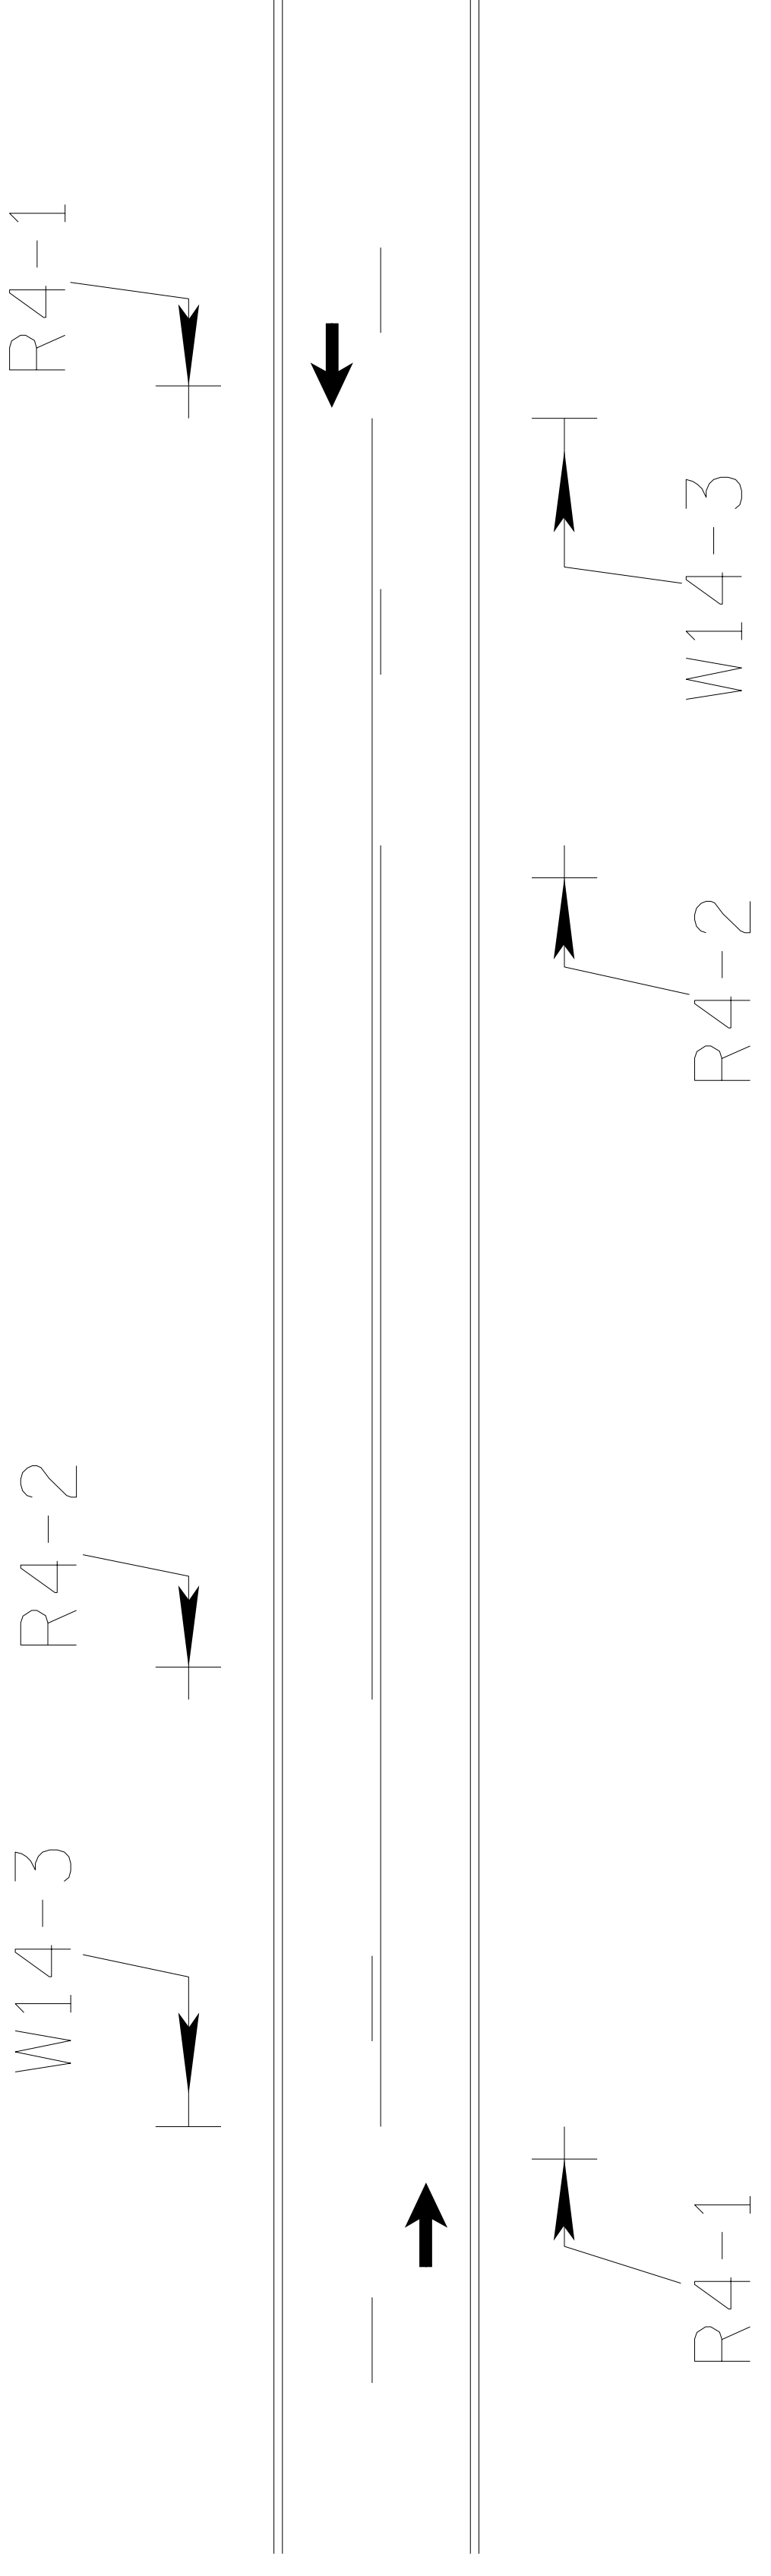


- ① THE R4-1, DO NOT PASS SIGNS, SHALL BE PLACED ON THE RIGHT SIDE OF THE ROAD AT THE BEGINNING OF THE NO PASSING ZONE. ADDITIONAL R4-1 SIGNS SHALL BE PLACED RIGHT AND LEFT IN INCREMENTS OF 750 FT TO 1000 FT THROUGHOUT THE LENGTH OF THE NO PASSING ZONE.
- ② THE R4-2, PASS WITH CARE SIGN, SHALL BE PLACED ON THE RIGHT SIDE OF THE ROAD AT THE END OF THE NO PASSING ZONE.
- ③ THE W14-3, NO PASSING ZONES SIGNS, SHALL BE PLACED ON THE LEFT SIDE OF THE ROAD AT THE BEGINNING OF EACH NO PASSING ZONE.
- ④ THE R4-1, R4-2 AND W14-3 SIGNS ARE TO REMAIN IN PLACE UNTIL PERMANENT PAVEMENT MARKINGS ARE COMPLETE.

NOTE:

ESTIMATED REQUIRED CONSTRUCTION SIGNING
(TO BE PAID FOR UNDER PAY ITEM NO. 618-A001.

<u>25</u>	W14-3
<u>95</u>	R4-1
<u>25</u>	R4-2

5/22/19	ADDED SHEET		
DATE	REVISION	BY	RCE
MISSISSIPPI DEPARTMENT OF TRANSPORTATION			
SIGNING FOR TWO-WAY TRAFFIC FOR NO PASSING ZONES			
PROJ. NO.: MP-1025-71(019) COUNTY: TISHOMINGO			
FILENAME: 306681_SR25_TISH1	DESIGN TEAM	CHECKED	DATE 2019-09-07
WORKING NUMBER	TC-1	SHEET NUMBER	8



ADDENDUM

VEGETATION SCHEDULE			
EROSION CONTROL ITEMS	SEASONAL APPLICATIONS-DATES & RATES		
	SPRING & SUMMER		FALL & WINTER
PAY ITEM NO.	ITEMS	RATES	DATES
225-A001	STANDARD GROUND PREPARATION	PER SQ.YD.	SEPTEMBER 1 TO MARCH 1
225-B001	AGRICULTURAL LIMESTONE	TONS/ACRE	SEPTEMBER 1 TO MARCH 1
225-A001	COMBINATION FERTILIZER (13-13-13)	250 LBS./ACRE	SEPTEMBER 1 TO MARCH 1
① 213-C001	SUPERPHOSPHATE	0.5 TONS/ACRE (EST.)	SEPTEMBER 1 TO MARCH 1
② 225-A001	SEEDING (BERMUDAGRASS)	80 LBS./ACRE	SEPTEMBER 1 TO MARCH 1
225-A001	SEEDING (TALL FESCUE)	25 LBS./ACRE	OCTOBER 1 TO MARCH 1
③ 225-A001	SEEDING (BAHIAGRASS)	80 LBS./ACRE	SEPTEMBER 1 TO MARCH 1
④ 225-A001	SEEDING (CRIMSON CLOVER)	20 LBS./ACRE	AUGUST 1 TO APRIL 1
225-C001	MULCH - VEGETATIVE MULCH	2 TONS ACRE (EST.)	MARCH 1 TO SEPTEMBER 1
216-A001			
219-A001			
④ 220-A001	INSECT PEST CONTROL	PER ACRE	
	TEMPORARY EROSION CONTROL ITEMS		
226-A001	LIGHT GROUND PREPARATION	PER SQ.YD.	
226-A001	COMBINATION FERTILIZER (13-13-13)		
226-A001	SEEDING (BROWN TOP MILLET)	20 LBS./ACRE	APRIL 1 TO AUGUST 31
226-A001	SEEDING (RYE GRASS)		
226-A001	SEEDING (OATS)		
226-A001	VEGETATIVE MATERIAL FOR MULCH	2 TON /ACRE (EST.)	

REQUIREMENTS

GROUND PREPARATION REQUIRED ON AREAS TO RECEIVE SOLID SODDING OR SEEDING, AS APPLICABLE. LIMESTONE SHALL BE MECHANICALLY SPREAD UNIFORMLY AND INCORPORATED INTO THE SOIL PRIOR TO PLANTING. FERTILIZER SHALL BE MECHANICALLY SPREAD UNIFORMLY AND INCORPORATED INTO THE SOIL PRIOR TO PLANTING. SUPERPHOSPHATE (FOR BID ITEM PURPOSES). SEED REQUIRED ON DISTURBED AREAS. UNHULLED SEED MAY BE REQUIRED DURING THE DORMANT SEASON AS DIRECTED. SEED REQUIRED ON DISTURBED AREAS. SEED REQUIRED ON DISTURBED AREAS. UNHULLED SEED MAY BE REQUIRED DURING THE DORMANT SEASON AS DIRECTED. SEED REQUIRED ON DISTURBED AREAS. UNHULLED SEED MAY BE REQUIRED DURING THE DORMANT SEASON AS DIRECTED.

THE ENGINEER WILL DESIGNATE THE RATES OF APPLICATION (SEE SUBSECTION 215.03.3).

SEE SECTION 220.

APPROXIMATELY HALF SQ. YD. STANDARD GROUND PREPARATION

QUANTITY BASED ON LIGHT GROUND PREPARATION

QUANTITY BASED ON LIGHT GROUND PREPARATION

QUANTITY BASED ON LIGHT GROUND PREPARATION

QUANTITY BASED ON LIGHT GROUND PREPARATION

① ALL AREAS THAT HAVE BEEN VEGETATED, UNDER THIS CONTRACT FOR AT LEAST (60) SIXTY DAYS, RECEIVE ADDITIONAL APPLICATIONS OF FERTILIZERS OF THE TYPE(S) AND RATE(S) OF APPLICATIONS AS DETERMINED BY SOIL TESTS OR AS DIRECTED DURING THE GROWING SEASONS THE CONTRACT IS IN FORCE. GROUND PREPARATION WILL NOT BE REQUIRED FOR THE ADDITIONAL APPLICATIONS. PAYMENT FOR ALL FERTILIZERS ACCEPTABLY APPLIED AS AN ADDITIONAL APPLICATION(S) WILL BE MADE IN ACCORDANCE WITH SUPERPHOSPHATE BID ITEM 213-C001.

② PROPOSAL QUANTITIES ESTIMATED ON THE BASIS THAT 100% OF THE ACREAGE WILL BE SEEDED.

③ PROPOSAL QUANTITIES ESTIMATED ON THE BASIS THAT 50% OF THE ACREAGE WILL BE SEEDED.

④ QUANTITY ESTIMATED ON THE BASIS 50% OF THE ACREAGE VEGETATED MAY REQUIRE TREATMENT.

* BERMUDA GRASS SEED MIX - 50% HOLLER
 50% UNHOLLER

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

VEGETATION SCHEDULE

PROJ. NO.: MP-1025-71(019)
 COUNTY: TISHOMINGO

WORKING NUMBER VS-1

FILE NAME: 306681_SR25_TISH1
 DESIGN TEAM CHECKED

DATE 2019-09-07
 SHEET NUMBER 9

DATE	REVISION	BY	RCE
5/22/19			