SECTION 905 -- PROPOSAL (CONTINUED)

I (We) hereby certify by digital signature and electronic submission via Bid Express of the Section 905 proposal below, that all certifications, disclosures and affidavits incorporated herein are deemed to be duly executed in the aggregate, fully enforceable and binding upon delivery of the bid proposal. I (We) further acknowledge that this certification shall not extend to the bid bond or alternate security which must be separately executed for the benefit of the Commission. This signature does not cure deficiencies in any required certifications, disclosures and/or affidavits. I (We) also acknowledge the right of the Commission to require full and final execution on any certification, disclosure or affidavit contained in the proposal at the Commission's election upon award. Failure to so execute at the Commission's request within the time allowed in the Standard Specifications for execution of all contract documents will result in forfeiture of the bid bond or alternate security.

Bidder acknowledges receipt of and has added to and made a part of the proposal and contract documents the following addendum (addenda):

Didder deknowledges ie	ccipi of and n	ias added to an	d made a part of t	ne proposar and contract do	edificitis the following	addendam (ad	idenda).
ADDENDUM NO.	1	DATED	9/23/2020	ADDENDUM NO.	DATED		
ADDENDUM NO		DATED		ADDENDUM NO.	DATED		
ADDENDUM NO		DATED	-	ADDENDUM NO.	DATED	1	
			-	_			
lumber	Descript	tion		TOTAL ADDENDA: (Must agree with total ad	1 1		`
1 Revised Table of Co	ontents; Revis	ed NTB No. 28	15; Added NTB	(Must agree with total ad	denda issued prior to o	pening of bids	s)
Nos. 2830 & 283				Respectfully Submitted,	63		
Revised Bid Items;	Amendment E	BSX Download	d Required.	respectantly swemmers,			
				DATE			
				DATE			
					Contractor		
				BY			
					Signature		
				TITLE	*		
				ADDRESS			
				CITY, STATE, ZIP			
				PHONE			
			4/7/	FAX			
				E-MAIL			
/TE 1 ("11 1 ' ' C		- 2					
(To be filled in if a corp	oration)						
Our corporation is chart	ered under the	e Laws of the	State of			and the	names,
titles and business addre	esses of the ex	ecutives are as	s follows:				
	President				Address		
-	Secretary				Address		
	Γreasurer				Address		

The following is my (our) itemized proposal.

ER-0006-03(043)/ 108056301000, ER-0006-03(043)/ 108057301000 & ER-0006-03(043)/ 108058301000 Itawamba County(ies)

Revised 01/26/2016

MISSISSIPPI DEPARTMENT OF TRANSPORTATION TABLE OF CONTENTS

PROJECT: ER-0006-03(043)/108056301 - Itawamba

ER-0006-03(043)/108057301 - Itawamba ER-0006-03(043)/108058301 - Itawamba

Section 901 - Advertisement

907-707-2

Joint Material

Section 904 - Notice to	o Bidders					
#1	Governing Specification					
#2	Status of ROW, w/ Attachments					
#9	Federal Bridge Formula					
#296	Reduced Speed Limit Signs					
#445	Mississippi Agent or Qualified Nonresident Agent					
#516	Errata and Modifications to the 2017 Standard Specifications					
#757	Additional Erosion Control Requirements					
#977	DUNS Requirement For Federal Funded Projects					
#1226	Material Storage Under Bridges					
#1241	Fuel and Material Adjustments					
#1434	Erosion Control Plan					
#1878	Storm Water Discharge Associated with Construction Activities (≥1 and <5 Acres)					
#2206	MASH Compliant Devices					
#2207	Reflective Sheeting for Signs					
#2273	Mississippi Special Fuel Tax Law					
#2611	Disadvantaged Business Enterprise In Federal-Aid Highway Construction, w/					
	Supplement					
#2814	Contract Time					
#2815	Specialty Items					
#2816	Project Number Change					
#2817	Pile Driving Operations					
#2818	Project Milestone					
#2829	Liquidated Damages					
#2830	Department Furnished Erosion Control Plan					
#2831	Erosion Control Pay Item Changes					
906	Required Federal Contract Provisions FHWA 1273, w/Supplements					
Section 907 - Special 1	Provisions					
907-102-2	Bidding Requirements and Conditions					
907-107-3	Department's Erosion Control Plan					
907-109-1	Measurement and Payment					
907-228-1	Erosion Control Blankets					
907-619-5	Traffic Control for Construction Zones					
907-701-2	Hydraulic Cement					
907-702-4	Bituminous Materials					
907-703-1	Gradation					
907-705-1	Stone Riprap					

PROJECT: ER-0006-03(043)/108056301 - Itawamba ER-0006-03(043)/108057301 - Itawamba ER-0006-03(043)/108058301 - Itawamba

907-711-2 Plain Steel Wire

907-720-2 Acceptance Procedure for Glass Beads

907-721-2 Materials for Signs

Section 905 - Proposal, Proposal Bid Items, Combination Bid Proposal

Certification of Performance - Prior Federal-Aid Contracts

Certification Regarding Non-Collusion, Debarment and Suspension

SAM.GOV Registration and DUNS Number

Section 902 - Contract Form

Section 903 - Contract Bond Forms

Form -- OCR-485

(REVISIONS TO THE ABOVE WILL BE INDICATED ON THE SECOND SHEET OF SECTION 905 AS ADDENDA)

09/23/2020 12:12 PM

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 - NOTICE TO BIDDERS NO. 2815

DATE: 09/23/2020

SUBJECT: Specialty Items

PROJECT: ER-0006-03(043)/108056301 & ER-0006-03(043)/108057301 & ER-0006-03(043)/108058301 - ITAWAMBA

Pursuant to the provisions of Section 108, the following work items are hereby designated as "Specialty Items" for this contract.

Bidders are reminded that these items must be subcontracted in order to be considered as specialty items.

CATEGORY: EROSION CONTROL

Line No	Pay Item	Description
0090	213-C001	Superphosphate
0100	216-A001	Solid Sodding
0110	219-A001	Watering
0120	220-A001	Insect Pest Control
0130	221-A001	Concrete Paved Ditch
0140	223-A001	Mowing
0150	225-A001	Grassing
0160	225-B001	Agricultural Limestone
0170	225-C001	Mulch, Vegetative Mulch
0180	226-A001	Temporary Grassing
0190	234-A001	Temporary Silt Fence
0194	234-D001	Inlet Siltation Guard
0200	237-A002	Wattles, 20"
0202	239-A001	Temporary Slope Drains
0210	246-B001	Rockbags
0220	249-A001	Riprap for Erosion Control
0400	907-228-A002	Erosion Control Blanket, Type II

CATEGORY: SURVEY AND STAKING

Line No	Pay Item	Description
0360	699-A001	Roadway Construction Stakes

CATEGORY: TRAFFIC CONTROL - TEMPORARY

Line No	Pay Item	Description
0320	619-D1001	Standard Roadside Construction Signs, Less than 10 Square Feet
0330	619-D2001	Standard Roadside Construction Signs, 10 Square Feet or More
0340	619-G4005	Barricades, Type III, Single Faced
0410	907-619-E3001	Changeable Message Sign

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 - NOTICE TO BIDDERS NO. 2830 CODE: (SP)

DATE: 09/23/2020

SUBJECT: Department Furnished Erosion Control Plan

PROJECT: ER-0006-03(043) / 108056301, 108057301 & 108058301 – Itawamba County

Bidders are advised that the Department has included an Erosion Control Plan within the contract which the Contractor may elect to use or modify as the Erosion Control Plan for this project. Special Provision 907-107-3 addresses the use and requirements of Department furnished and Contractor furnished Erosion Control Plans. The attached narrative may be used in lieu of the one shown in Special Provision 907-107-3. Any delays from the Contractor electing to modify the Department Furnished Erosion Control Plan or submit a Contractor Furnished Erosion Control Plan will not be the basis for a claim for additional time.

Special Provision 907-107-3 includes the statement "The time between the Notice of Award and Notice to Proceed/Beginning of Contract Time in the proposal, has been allowed for the submittal and concurrence of the erosion control plan, MDOT's review of the plan, and any revisions that may be necessary." **This statement should be disregarded.**

MISSISSIPPI DEPARTMEN T OF TRANSPORTATION Storm Water Pollution Prevention Plan (SWPPP)

MDEQ Small Construction Permit No:

Project No: ER-0006-03(043)

County: Itawamba
Route: Interstate 22

SITE INFORMATION

This emergency project consists of the repair and stabilization of two slides on Interstate 22, two sites occurring adjacent to the eastbound lanes at Mile Marker #114.5/#115 and the other site occurring adjacent to the westbound lanes near Mile Marker #116. The project sites will be cleared and grubbed, underdrains installed, drainage layers placed and reinforcement piles driven. The sites will then be graded and permanent vegetation will be planted.

The project sites at Mile Marker #114.5/#115 has a paved ditch between the roadway and the construction area with a positive back slope extending well beyond the construction zone. Much of the drainage from the back slope will flow towards the construction zone.

The project site at Mile Marker #116 has a paved ditch beyond the construction area with a negative fore slope. All drainage from the construction zone will flow towards the paved ditch.

SEDIMENT AND EROSION CONTROLS

- A. **Vegetative Controls:** Soil stabilization-vegetative stabilization measures will be initiated whenever any clearing, grading, excavating or other land-disturbing activities have temporarily or permanently ceased on any portion of the site and will not resume for fourteen (14) days or more. The appropriate temporary or permanent vegetative practices will be implemented immediately (no later than the next work day).
- B. **Structural Controls:** Construction entrances will be placed at the exit of both construction sites. Net wire-reinforced silt fence will be installed between the construction zones and the paved ditches with "J-hooks" in the silt fence at approximately 100' spacing increments. Rock bags will be placed in the paved ditches to minimize runoff velocity. Wattles will be placed within the construction zone for sediment and/or erosion control.

At the project site adjacent to Mile Marker #114.5/#115, a diversion ditch/berm will be placed along the upper edge of the construction clearing limits, appropriately sized and constructed to accommodate 8" slope drains that will be installed at 50'-75 spacing and will extend downgrade to the paved ditch. BMP's of adequate size, shape and configuration necessary to protect the paved ditch and surrounding grades near the outfall of each slope drain will be placed to minimize runoff velocities associated with a significant rainfall event.

- C. **Housekeeping Practices:** Structural BMP's will be cleaned when sediment reaches 1/3 to 1/2 of the effective height of the BMP. Construction equipment maintenance and repair will be performed off-site. Any material wash-out will occur off-site.
- D. **Post-Construction Control Measures:** Following completion of project construction, permanent vegetative growth will be established on disturbed soils to gain increased soil stability.

IMPLEMENTATION SEQUENCE


- Install construction entrances and silt fences.
- 2. Following clearing and grubbing, diversion ditch/berm, slope drains and rock bags will be installed.
- 3. After completion of slope stabilization, construction entrances, diversion berm and slope drains will be removed and permanent vegetation will be established within construction zone.
- 4. After permanent vegetation is established, all silt fences will be removed.


MAINTENANCE PLAN

A Certified Erosion Control Person will be onsite during all construction activities. All erosion and sediment control devices and outfall/discharge points will be inspected weekly for a minimum of four (4) inspections per month and after significant rainfall events. All inspection reports will be maintained on the project site.

Any poorly functioning erosion or sediment control will be corrected as soon as possible. Any sediment that has accumulated or been trapped by sediment control devices will be removed when the device is at 1/3 to 1/2 capacity.

Prime Contractor's signature	Date	

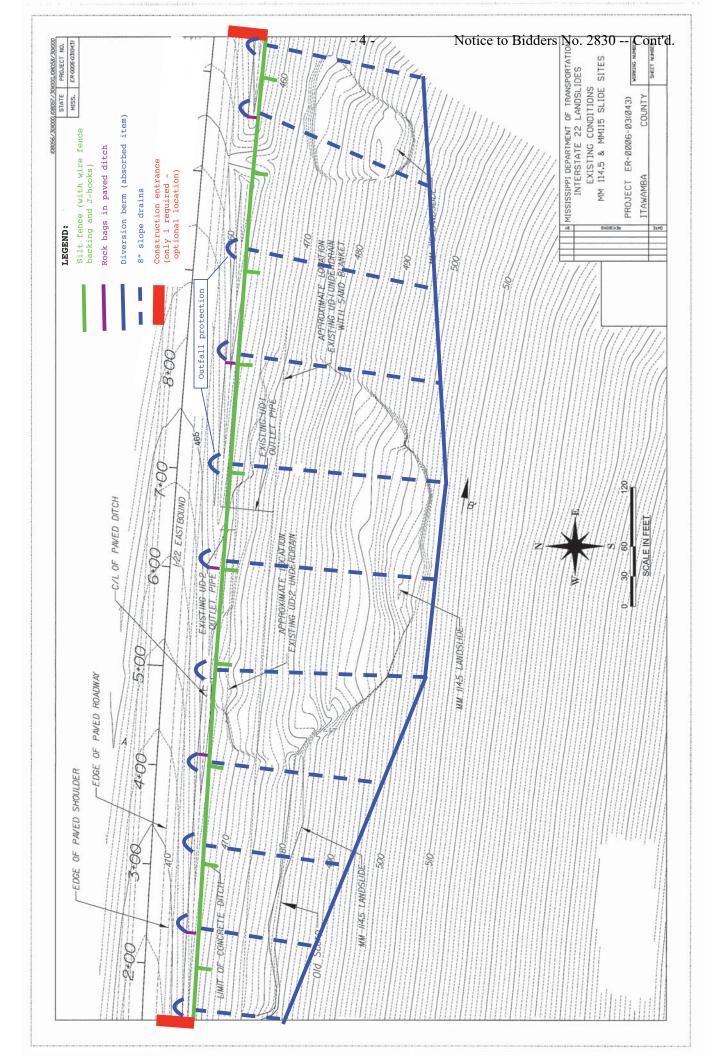

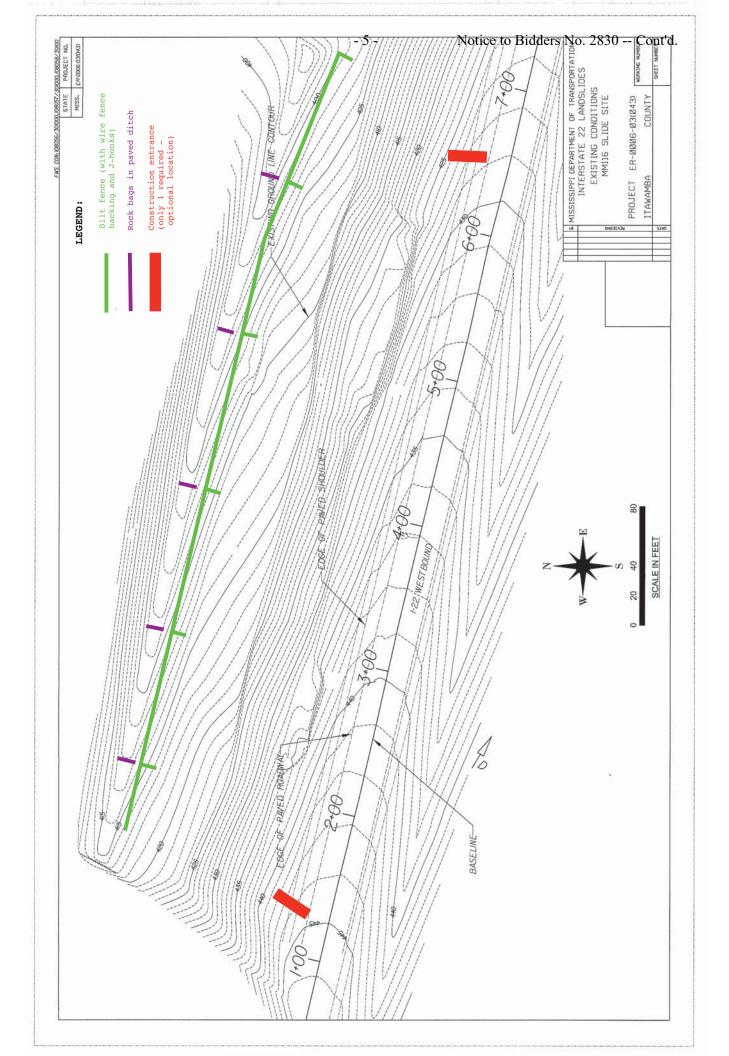

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

CODE: (SP)

SECTION 904 - NOTICE TO BIDDERS NO. 2831

DATE: 09/23/2020

SUBJECT: Erosion Control Pay Item Changes

PROJECT: ER-0006-03(043) / 108056301, 108057301 & 108058301 – Itawamba County

Bidders are hereby advised that the quantities for pay item no. 234-A001, Temporary Silt Fence, 246-B001, Rockbags, shown in Plans are in error. Bidders are also advised that the Summary of Quantities sheets in the Plans do not include pay item no. 239-A001, Temporary Slope Drains and 234-D001, Inlet Siltation Guard. The correct estimated quantities are shown in the table below. The quantities on the bid sheets are correct.

Pay Item No.	Description	Original Quantity	Revised Quantity
234-A001	Temporary Silt Fence	1,440 LF	2,178 LF
234-D001	Inlet Siltation Guard	0 EA	2 EA
239-A001	Temporary Slope Drains	0 LF	2,145 LF
246-B001	Rockbags	25 EA	55 EA

ITAWAMBA

Proposal (Sheet 2 - 1)

& ER-0006-03(043) / 108058301 in Itawamba County.

Slide Repairs on I-22 near Mile Marker 116 in the Fill Slope of the Westbound Lane, near Mile Marker 114.5 in the Backslope of the Eastbound Lane, and Mile Marker 115 in the Backslope of the Eastbound Lane, known as Federal Aid Project Nos. ER-0006-03(043) / 108056301, ER-0006-03(043) / 108057301

Line No.	Item Code	Adj Code	Quantity	Units	Description [Fixed Unit Price]
Roadway Items					
0010	201-B001		5	Acre	Clearing and Grubbing
0020	202-B116		200	Cubic Yard	Removal of Debris, LVM
0030	203-EX021	(E)	5,630	Cubic Yard	Borrow Excavation, AH, FME, Class B9-6
0040	203-EX041	(E)	680	Cubic Yard	Borrow Excavation, AH, LVM, Class B9-6
0050	203-G002	(E)	1,590	Cubic Yard	Excess Excavation, LVM, AH
0060	203-1002		6,770	Square Yard	Site Grading
0070	206-A001	(S)	105	Cubic Yard	Structure Excavation
0080	211-B001	(E)	1,614	Cubic Yard	Topsoil for Slope Treatment, Contractor Furnished
0090	213-C001		3	Ton	Superphosphate
0100	216-A001		8,100	Square Yard	Solid Sodding
0110	219-A001		162	Thousand Gallon	Watering [\$20.00]
0120	220-A001		4	Acre	Insect Pest Control [\$30.00]
0130	221-A001	(S)	4	Cubic Yard	Concrete Paved Ditch
0140	223-A001		8	Acre	Mowing [\$50.00]
0150	225-A001		4	Acre	Grassing
0160	225-B001		8	Ton	Agricultural Limestone
0170	225-C001		8	Ton	Mulch, Vegetative Mulch
0180	226-A001		4	Acre	Temporary Grassing
0190	234-A001		2,178	Linear Feet	Temporary Silt Fence
0194	234-D001		2	Each	Inlet Siltation Guard
0200	237-A002		1,220	Linear Feet	Wattles, 20"
0202	239-A001		2,145	Linear Feet	Temporary Slope Drains
0210	246-B001		55	Each	Rockbags
0220	249-A001		30	Ton	Riprap for Erosion Control
0230	605-AA003	(S)	480	Square Yard	Geotextile for Subsurface Drainage, Type V, Non-Woven
0240	605-O004	(S)	660	Linear Feet	6" Perforated Sewer Pipe for Underdrains, SDR 23.5
0250	605-P004	(S)	35	Linear Feet	6" Non-perforated Sewer Pipe for Underdrains, SDR 23.5
0260	605-X002	(GY)	55	Cubic Yard	Filter Material for Filter Beds, Type A
0270	605-X003	(GY)	1,205	Cubic Yard	Filter Material for Filter Beds, Type B
0280	605-Z002		1	Lump Sum	Underdrain Appurtenances, Elbows, Couplings, etc.
0290	605-Z003		3	Each	Underdrain Appurtenances, Sign

Proposal (Sheet 2 - 2)

Line No.	Item Code	Adj Code	Quantity	Units	Description [Fixed Unit Price]
0300	605-Z006		3	Each	Underdrain Appurtenances, Small Animal Guard
0310	618-A001		1	Lump Sum	Maintenance of Traffic
0320	619-D1001		32	Square Feet	Standard Roadside Construction Signs, Less than 10 Square Feet
0330	619-D2001		456	Square Feet	Standard Roadside Construction Signs, 10 Square Feet or More
0340	619-G4005		48	Linear Feet	Barricades, Type III, Single Faced
0350	620-A001		1	Lump Sum	Mobilization
0360	699-A001		1	Lump Sum	Roadway Construction Stakes
0380	815-A002	(S)	740	Ton	Loose Riprap, Size 100
0390	815-E001	(S)	1,500	Square Yard	Geotextile under Riprap
0400	907-228-A002		8,100	Square Yard	Erosion Control Blanket, Type II
0410	907-619-E3001		1	Each	Changeable Message Sign
0420	803-D006	(S)	6,105	Linear Feet	HP 14 x 73 Steel Piling