

SECTION 905 -- PROPOSAL (CONTINUED)

I (We) hereby certify by digital signature and electronic submission via Bid Express of the Section 905 proposal below, that all certifications, disclosures and affidavits incorporated herein are deemed to be duly executed in the aggregate, fully enforceable and binding upon delivery of the bid proposal. I (We) further acknowledge that this certification shall not extend to the bid bond or alternate security which must be separately executed for the benefit of the Commission. This signature does not cure deficiencies in any required certifications, disclosures and/or affidavits. I (We) also acknowledge the right of the Commission to require full and final execution on any certification, disclosure or affidavit contained in the proposal at the Commission's election upon award. Failure to so execute at the Commission's request within the time allowed in the Standard Specifications for execution of all contract documents will result in forfeiture of the bid bond or alternate security.

Bidder acknowledges receipt of and has added to and made a part of the proposal and contract documents the following addendum (addenda):

ADDENDUM NO.	<u>1</u>	DATED	<u>10/8/2025</u>	ADDENDUM NO.	_____	DATED	_____
ADDENDUM NO.	<u>2</u>	DATED	<u>10/9/2025</u>	ADDENDUM NO.	_____	DATED	_____
ADDENDUM NO.	<u>3</u>	DATED	<u>10/20/2025</u>	ADDENDUM NO.	_____	DATED	_____

Number

Description

- 1 Revised Table of Contents; Revised Advertisement; Deleted NTB Nos. 5605 w/ Supplement & No. 7077; Deleted OCR-485; Amendment EBSx Download Required.
- 2 Amendment EBSx Download Required.
- 3 Revised Bid Items; Revised Plan Sheet Nos. 2, 3, 5 & 10; Amendment EBSx Download Required.

TOTAL ADDENDA: 3

(Must agree with total addenda issued prior to opening of bids)

Respectfully Submitted,

DATE _____

Contractor

BY _____

Signature

TITLE _____

ADDRESS _____

CITY, STATE, ZIP _____

PHONE _____

FAX _____

E-MAIL _____

(To be filled in if a corporation)

Our corporation is chartered under the Laws of the State of _____ and the names, titles and business addresses of the executives are as follows:

President

Address

Secretary

Address

Treasurer

Address

The following is my (our) itemized proposal.

NHPP-0014-02(096)/ 109667301000

Waltham County(ies)

Revised 01/26/2016


Bridge Repair on US 98 Magees Creek and Relief Bridges Nos. 99.0, 99.0B, 99.1 & 99.1B, known as Federal Aid Project No. NHPP-0014-02(096) / 109667301 in Walthall County.

Line No.	Item Code	Adj Code	Quantity	Units	Description [Fixed Unit Price]
Roadway Items					
0008	202-B007		696	Square Yard	Removal of Asphalt Pavement, All Depths
0010	202-B158		1,600	Linear Feet	Removal of Guard Rail, Including Rails, Posts and Terminal Ends
0012	304-D002	(GT)	170	Ton	Granular Material, Crushed Stone
0014	503-C010		1,600	Linear Feet	Saw Cut, Full Depth
0020	606-B001		800	Linear Feet	Guard Rail, Class A, Type 1
0030	606-D001		8	Each	Guard Rail, Bridge End Section
0040	606-E005		8	Each	Guard Rail, Terminal End Section, Flared
0050	619-A1002		1,130	Linear Feet	Temporary Traffic Stripe, Continuous White
0060	619-A2002		1,130	Linear Feet	Temporary Traffic Stripe, Continuous Yellow
0070	619-A3002		1,130	Linear Feet	Temporary Traffic Stripe, Skip White
0080	619-D1001		16	Square Feet	Standard Roadside Construction Signs, Less than 10 Square Feet
0090	619-D2001		72	Square Feet	Standard Roadside Construction Signs, 10 Square Feet or More
0100	619-G4005		192	Linear Feet	Barricades, Type III, Single Faced
0110	619-G5001		82	Each	Free Standing Plastic Drums
0120	620-A001		1	Lump Sum	Mobilization
0130	630-F006		40	Each	Delineators, Guard Rail, White
0140	630-G005		8	Each	Type 3 Object Markers, OM-3R or OM-3L, Post Mounted
0150	907-618-A001		1	Lump Sum	Maintenance of Traffic
0160	907-626-A008		1,130	Linear Feet	6" Thermoplastic Double Drop Traffic Stripe, Skip White
0170	907-626-B003		1,130	Linear Feet	6" Thermoplastic Double Drop Traffic Stripe, Continuous White
0180	907-626-E004		1,130	Linear Feet	6" Thermoplastic Double Drop Traffic Stripe, Continuous Yellow
0190	907-627-K001		15	Each	Red-Clear Reflective High Performance Raised Markers
Bridge Items					
0200	815-A009	(S)	12,272	Ton	Loose Riprap, Size 500
0210	815-E001	(S)	7,133	Square Yard	Geotextile under Riprap
0220	907-417-A001		4,135	Square Yard	Polymer Cement Surface System
0230	907-420-A001		8,356	Pounds	Undersealing
0240	907-808-A002	(S)	1,458	Linear Feet	Joint Repair
0250	907-823-A001		729	Linear Feet	Preformed Joint Seal, Type I
0260	907-823-B001		810	Linear Feet	Saw Cut, Type I
0270	907-824-C001		22	Each	Cap Cleaning
0280	907-824-D001		24	Each	Bearing Replacements

Section 905
Proposal (Sheet 2 - 2)

NHPP-0014-02(096)/109667301
WALTHALL

Line No.	Item Code	Adj Code	Quantity	Units	Description [Fixed Unit Price]
0290	907-824-PP004		1	Lump Sum	Bridge Repair, Bank Reshaping
0300	907-824-PP008		1,860	Linear Feet	Bridge Repair, Class 2, Spray Finish, Per Plans

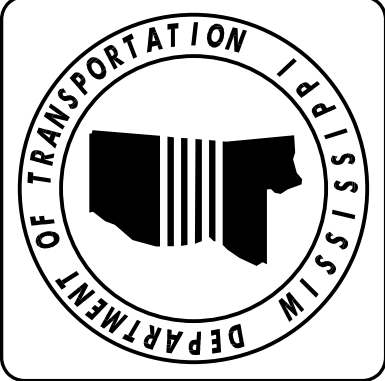

ADDENDUM

DESIGNED BY: BASS

DETAILED BY:

CHECKED BY:

DATE:

FMS CON: 109667/301000

PROJECT NO.: NHP-0014-02(096)

COUNTY: WALTHALL

SUMMARY OF REVISIONS

SHEET ID
REV-1

SHEET NO.
3

SUMMARY OF REVISIONS					
DATE	1st ORDER	ADDENDUM	2nd ORDER	BY	SHEET ID DESCRIPTION
9/10/2025	X			TG	UPDATED PERMIT BLOCK
10/14/2025		X		TG	ADDED PS&E STAMP
10/14/2025		X		TG	UPDATED PAGE NUMBERS
10/14/2025		X		TG	ADDED PAY ITEMS
10/14/2025		X		TG	ADDED NEW SHEET




ADDENDUM

DESIGNED BY: BASS
DETAILED BY:
CHECKED BY:
DATE:

FMS CON: 109667/301000
PROJECT NO.: NHP-0014-02(096)
COUNTY: WALTHALL


GUARDRAIL: POST INSTALLATION
IN PAVED AREAS

SHEET ID
SDGR-PI
SHEET NO.
10

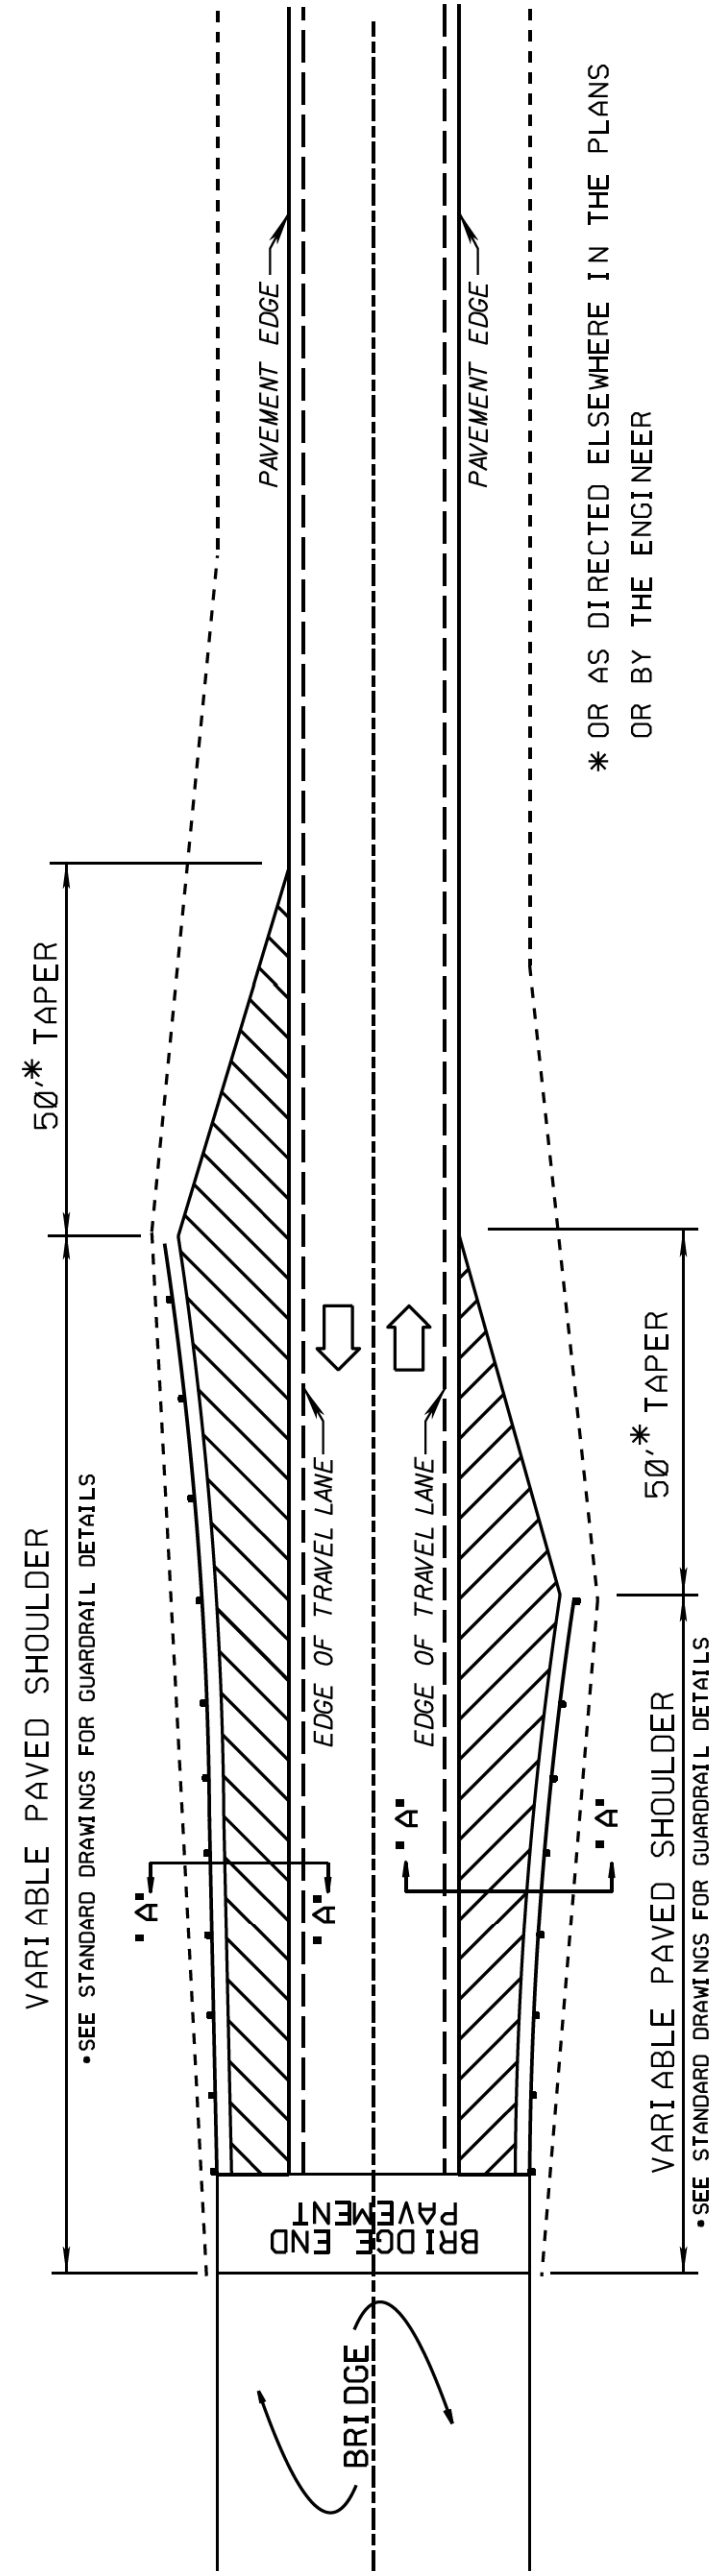


TYPICAL DETAIL OF PAVED SHOULDERS AT BRIDGE ENDS
(2-WAY TRAFFIC)

SEE SECTION 'A'-A

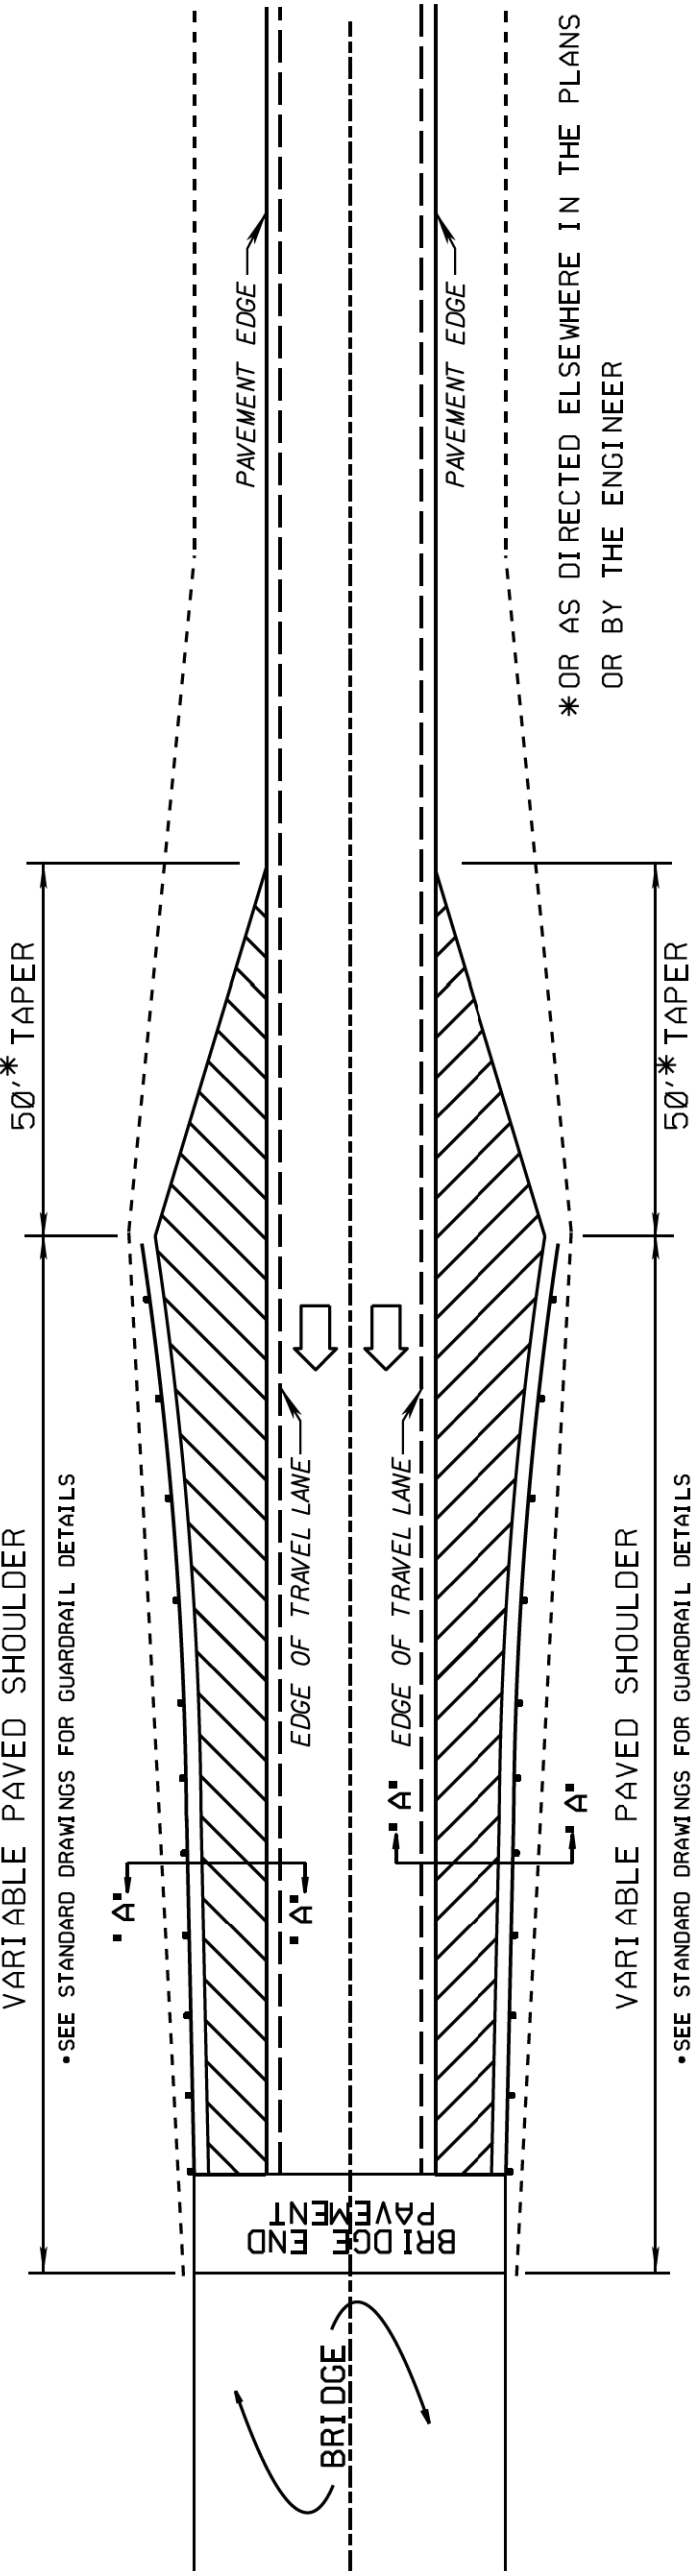


TYPICAL DETAIL OF PAVED SHOULDERS AT BRIDGE ENDS
(1-WAY TRAFFIC)


SEE SECTION 'A'-A

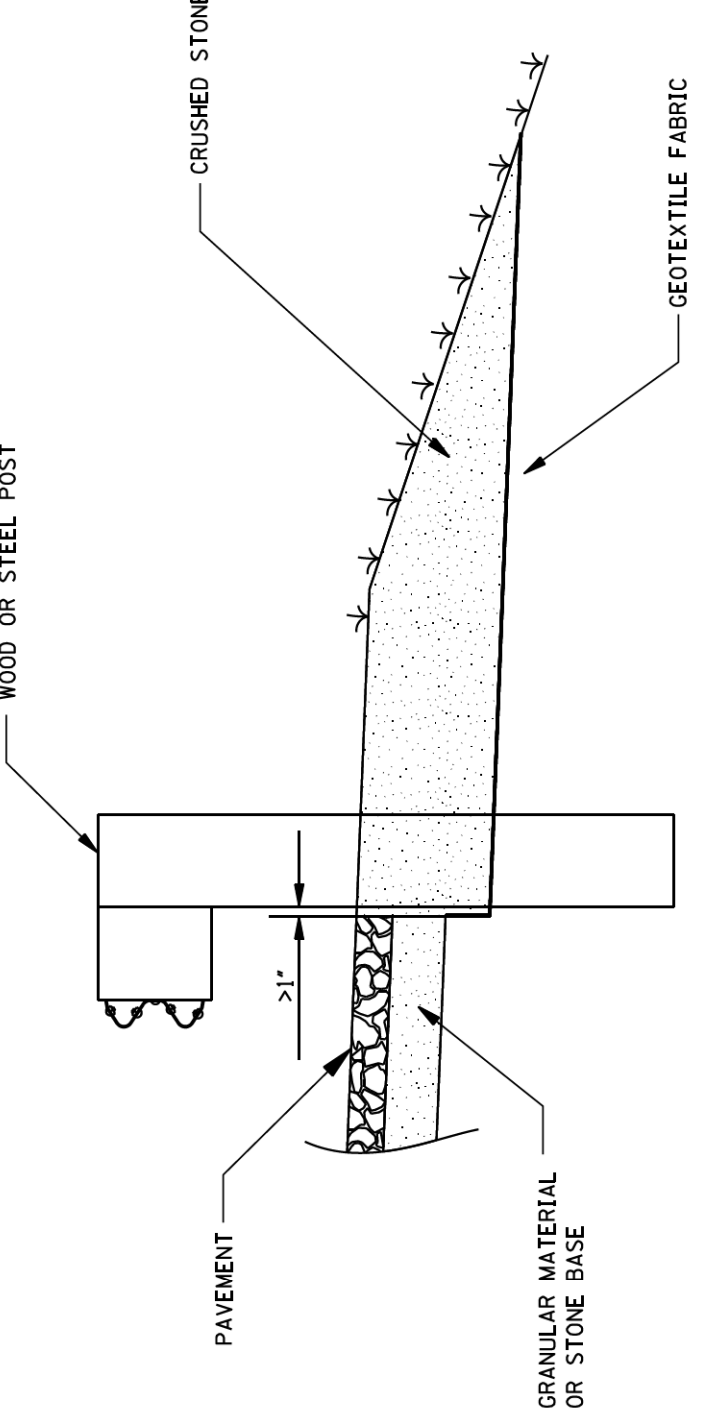


SECTION A-A

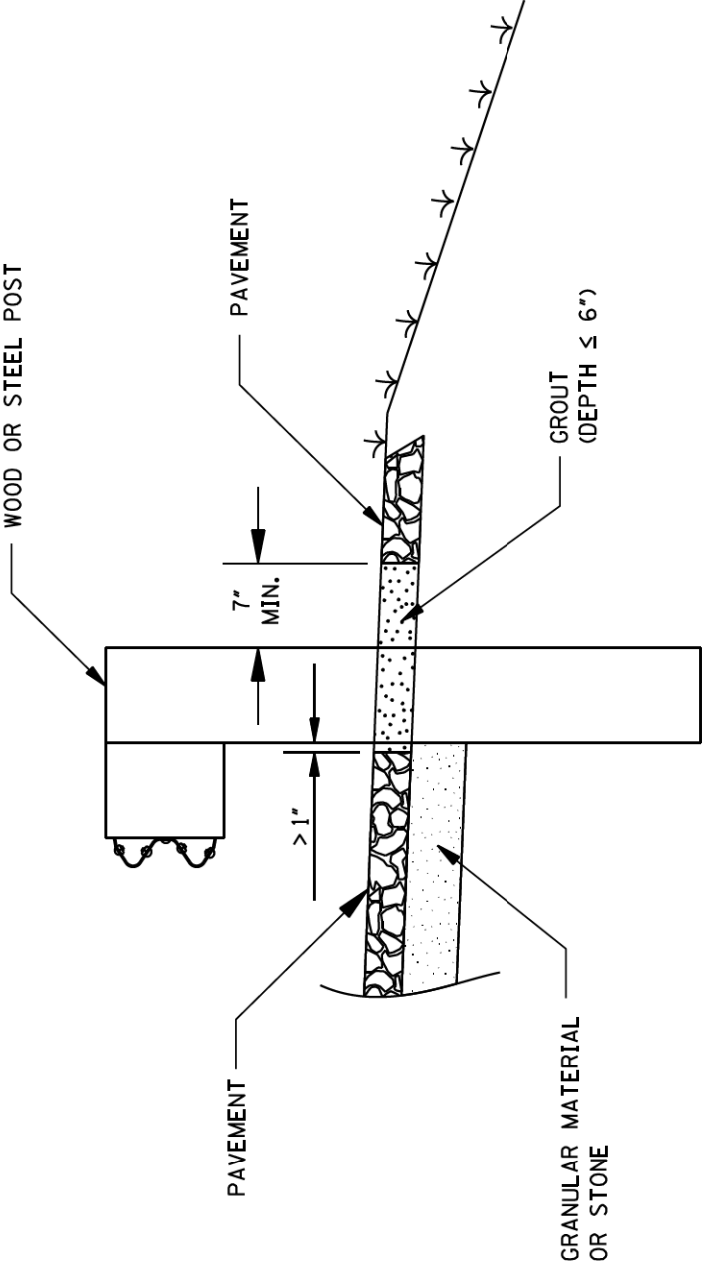


SECTION A-A

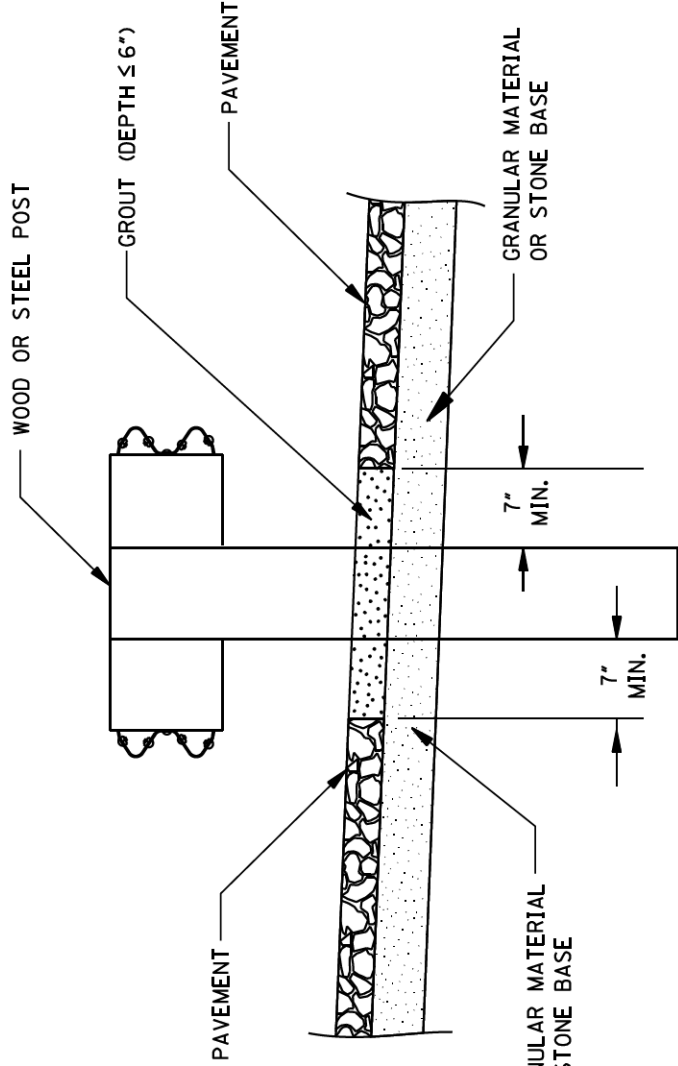


SECTION B-B

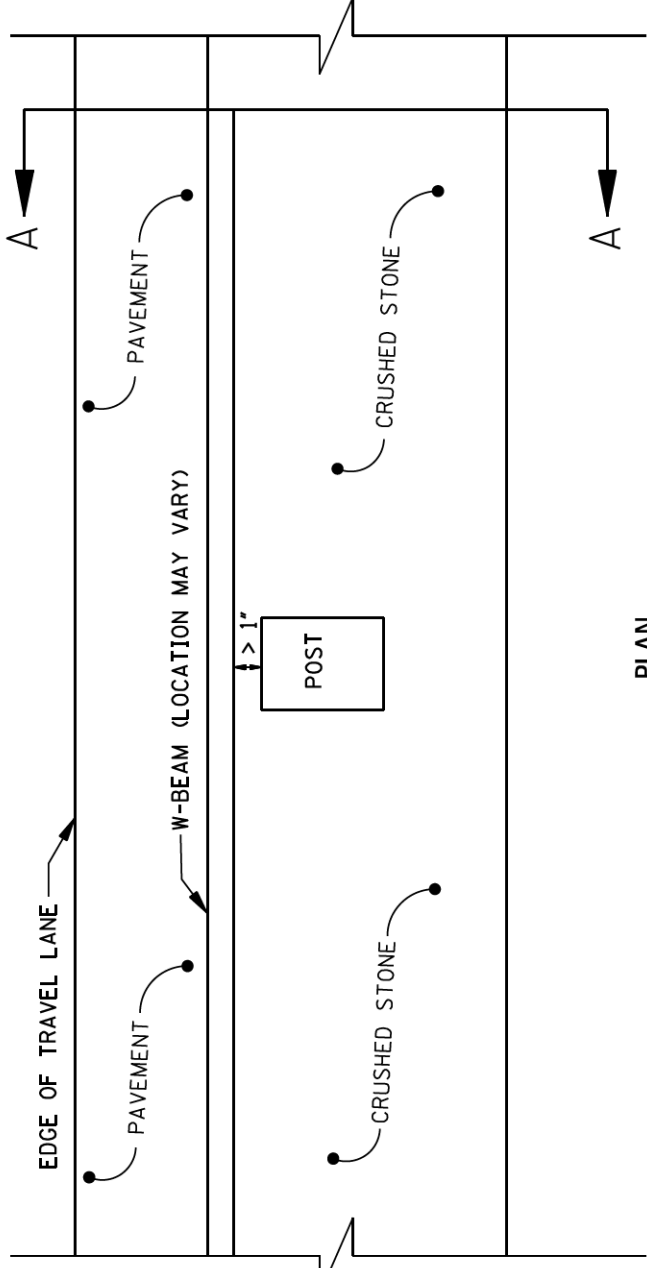

PAVEMENT LEAVE-OUT AREA FOR GUARDRAIL POSTS
SINGLE-FACED GUARDRAIL (CRUSHED STONE OPTION)

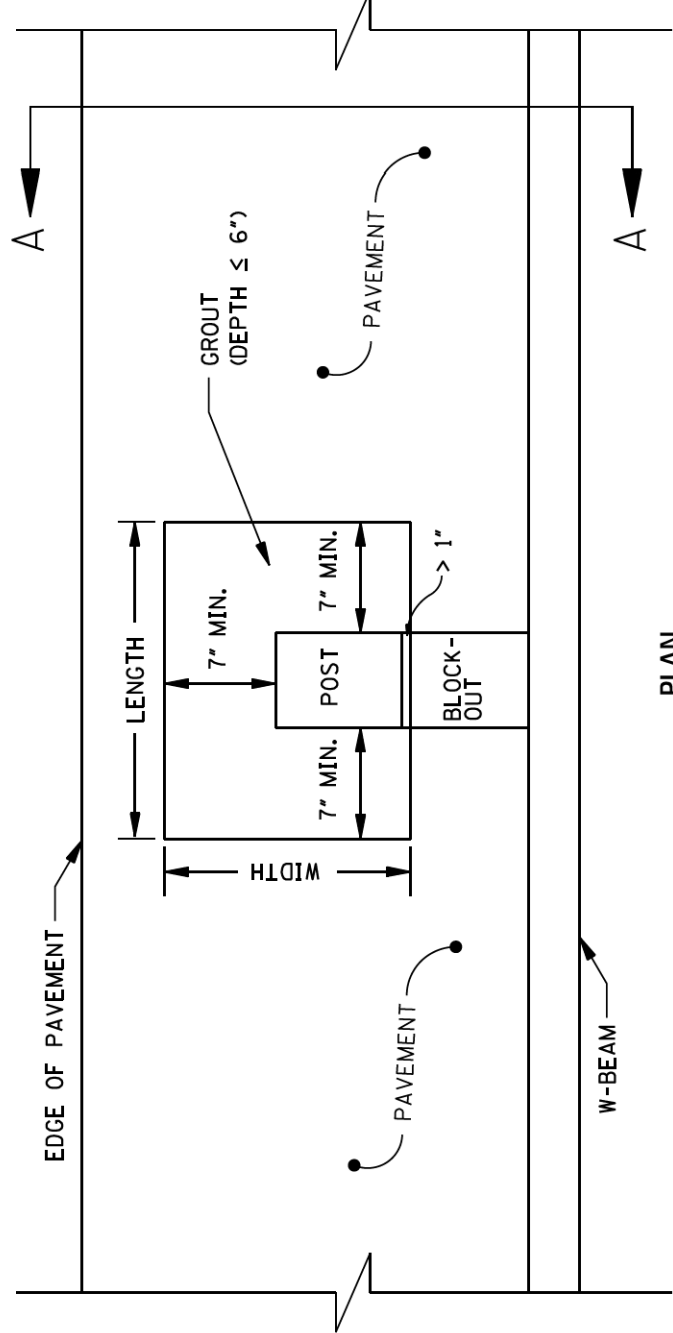

PAVEMENT LEAVE-OUT AREA FOR GUARDRAIL POSTS
SINGLE-FACED GUARDRAIL (GROUT OPTION)

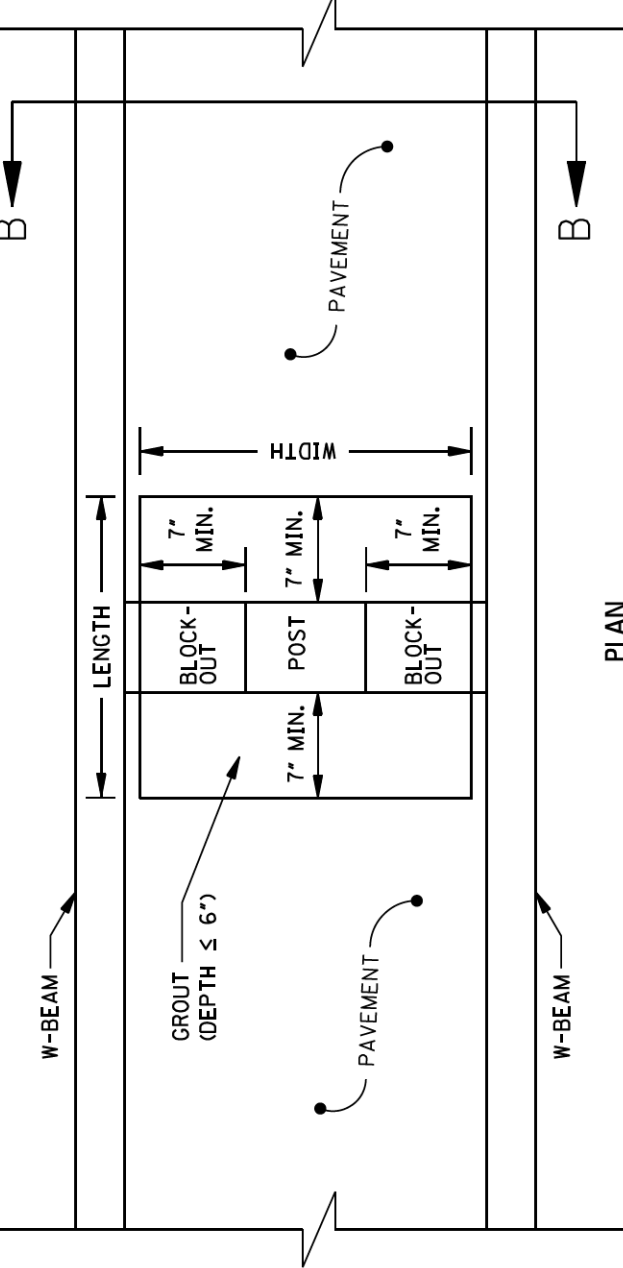

PAVEMENT LEAVE-OUT AREA FOR GUARDRAIL POSTS
DOUBLE-FACED GUARDRAIL

GENERAL NOTES FOR GROUT OPTION

- GUARDRAIL POSTS SHALL NOT BE COMPLETELY SURROUNDED BY PAVEMENT THE AREA BEHIND AND LATERAL OF THE POST SHALL HAVE A MINIMUM 7" CLEARANCE FROM THE PAVEMENT. THIS AREA SHALL BE FILLED WITH A LOW STRENGTH GROUT WITH A MAXIMUM 28 DAY COMPRESSIVE STRENGTH OF 120 PSI.
- GROUT SHALL BE INSTALLED AT A DEPTH EQUAL TO THE SURROUNDING PAVEMENT, UP TO A MAXIMUM OF 6". IF SURROUNDING PAVEMENT IS GREATER THAN 6", THE DIFFERENCE SHALL BE FILLED IN WITH SHOULDER GRANULAR MATERIAL.
- COST OF GROUT SHALL BE ABSORBED IN THE COST OF OTHER ITEMS BID.
- PAVEMENT LEAVE-OUT AREAS ARE REQUIRED FOR STEEL AND WOOD POSTS.
- STANDARD EMBEDMENT DEPTHS STILL APPLY MEASURED FROM THE TOP OF THE PROJECTED PAVEMENT SURFACE.

GENERAL NOTES FOR CRUSHED STONE OPTION

- GUARDRAIL POSTS SHALL NOT BE COMPLETELY SURROUNDED BY PAVEMENT.
- PAVEMENT LEAVE-OUT AREAS ARE REQUIRED FOR STEEL AND WOOD POSTS.
- STANDARD EMBEDMENT DEPTHS STILL APPLY MEASURED FROM THE TOP OF THE PROJECTED PAVEMENT SURFACE.
- IMMEDIATELY PRIOR TO PLACING GEOTEXTILE FABRIC AND CRUSHED STONE ON THE GUARDRAIL PAD THE ENTIRE AREA SHALL BE TREATED UNIFORMLY WITH A SOIL STERILANT. THE SOIL STERILANT SHALL BE APPLIED AT THE MAXIMUM RATE RECOMMENDED ON THE MANUFACTURER'S LABEL FOR PERENNIAL WEED CONTROL. ANY GRANULAR OR PELLETIZED SOIL STERILANT THAT IS APPROVED BY THE ENGINEER MAY BE USED. SEPARATE PAYMENT WILL NOT BE MADE FOR TREATING THE GUARDRAIL PAD AREA WITH SOIL STERILANT.

NOTE: THE ALTERNATIVES SHOWN HEREIN APPLY TO ALL GUARDRAIL CONSTRUCTION WHERE MOW STRIPS ARE ADDED.

POST	MIN. PAV'T LEAVE-OUT AREA	
	SINGLE-FACED	DOUBLE-FACED
	LENGTH (IN.)	WIDTH (IN.)
6"x8" WOOD	20	15
8"x8" WOOD	22	15
10"x10" WOOD	24	17
W6x9 STEEL	18	13
	18	20