

SECTION 905 -- PROPOSAL (CONTINUED)

I (We) hereby certify by digital signature and electronic submission via Bid Express of the Section 905 proposal below, that all certifications, disclosures and affidavits incorporated herein are deemed to be duly executed in the aggregate, fully enforceable and binding upon delivery of the bid proposal. I (We) further acknowledge that this certification shall not extend to the bid bond or alternate security which must be separately executed for the benefit of the Commission. This signature does not cure deficiencies in any required certifications, disclosures and/or affidavits. I (We) also acknowledge the right of the Commission to require full and final execution on any certification, disclosure or affidavit contained in the proposal at the Commission's election upon award. Failure to so execute at the Commission's request within the time allowed in the Standard Specifications for execution of all contract documents will result in forfeiture of the bid bond or alternate security.

Bidder acknowledges receipt of and has added to and made a part of the proposal and contract documents the following addendum (addenda):

ADDENDUM NO. <u> 1 </u>	DATED <u> 5/22/2026 </u>	ADDENDUM NO. _____	DATED _____
ADDENDUM NO. _____	DATED _____	ADDENDUM NO. _____	DATED _____
ADDENDUM NO. _____	DATED _____	ADDENDUM NO. _____	DATED _____

Number	Description
1	Revised Bid Items; Revised Plan Sheet Nos.RVP-1, 4, & 7; Amendment EBSx Download Required.

TOTAL ADDENDA: 1
 (Must agree with total addenda issued prior to opening of bids)

Respectfully Submitted,

DATE _____

 Contractor

BY _____
 Signature

TITLE _____

ADDRESS _____

CITY, STATE, ZIP _____

PHONE _____

FAX _____

E-MAIL _____

(To be filled in if a corporation)

Our corporation is chartered under the Laws of the State of _____ and the names, titles and business addresses of the executives are as follows:

President	Address
Secretary	Address
Treasurer	Address

The following is my (our) itemized proposal.

MP-1172-71(002)/ 310038301000


Tishomingo County(ies)

Revised 01/26/2016

Scrub Seal & Overlay approximately 12 miles of MS 172 from the junction of US 72 to the Junction of US 72, known as State Project No. MP-1172-71(002) / 310038301 in Tishomingo County.

Line No.	Item Code	Adj Code	Quantity	Units	Description [Fixed Unit Price]
Roadway Items					
0010	202-B007		50	Square Yard	Removal of Asphalt Pavement, All Depths
0020	202-B240		2,150	Linear Feet	Removal of Traffic Stripe
0030	203-G001	(E)	25	Cubic Yard	Excess Excavation, FM, AH
0040	209-A009		50	Square Yard	Geotextile Stabilization, Type VII, Non-Woven
0050	304-A002	(GY)	3,140	Cubic Yard	Granular Material, LVM, Class 3, Group C
0060	406-D001		12,500	Square Yard	Fine Milling of Bituminous Pavement, All Depths
0070	412-A001		3,540	Square Feet	Pre-Grinding [\$3.25]
0080	423-A001		16	Mile	Rumble Strips, Ground In
0090	503-C010		50	Linear Feet	Saw Cut, Full Depth
0100	618-B001		1	Square Feet	Additional Construction Signs [\$10.00]
0110	619-A1001		42	Mile	Temporary Traffic Stripe, Continuous White
0120	619-A2001		34	Mile	Temporary Traffic Stripe, Continuous Yellow
0130	619-A4002		9	Mile	Temporary Traffic Stripe, Skip Yellow
0140	619-A5001		15,825	Linear Feet	Temporary Traffic Stripe, Detail
0150	619-A6001		235	Square Feet	Temporary Traffic Stripe, Legend
0160	619-A6002		2,605	Linear Feet	Temporary Traffic Stripe, Legend
0170	620-A001		1	Lump Sum	Mobilization
0180	630-A001		440	Square Feet	Standard Roadside Signs, Sheet Aluminum, 0.080" Thickness
0190	630-A003		195	Square Feet	Standard Roadside Signs, Sheet Aluminum, 0.125" Thickness
0200	630-A005		540	Square Feet	Standard Roadside Signs, Sheet Aluminum, 0.1" Thickness
0210	630-C001		185	Linear Feet	Square Tube Posts, 4.0 lb/ft
0220	630-C005		2,135	Linear Feet	Square Tube Posts, 2.0 lb/ft
0230	630-G005		44	Each	Type 3 Object Markers, OM-3R or OM-3L, Post Mounted
0240	907-204-A003		50	Square Yard	Geogrid, Type II, Biaxial
0250	907-403-A005	(BA1)	50	Ton	19-mm, MT, Asphalt Pavement
0260	907-403-A014	(BA1)	15,040	Ton	9.5-mm, MT, Asphalt Pavement
0270	907-407-A001	(A2)	13,670	Gallon	Asphalt for Tack Coat
0280	907-414-A001		169,200	Square Yard	Scrub Seal
0290	907-618-A001		1	Lump Sum	Maintenance of Traffic
0300	907-619-B001		66	Linear Feet	Temporary Portable Rumble Strips
0310	907-626-B006		22	Mile	6" Thermoplastic Traffic Stripe, Continuous White
0320	907-626-D005		5	Mile	6" Thermoplastic Traffic Stripe, Skip Yellow

Line No.	Item Code	Adj Code	Quantity	Units	Description [Fixed Unit Price]
0330	907-626-E005		18	Mile	6" Thermoplastic Traffic Stripe, Continuous Yellow
0340	907-626-G004		9,280	Linear Feet	Thermoplastic Detail Stripe, White
0350	907-626-G005		6,550	Linear Feet	Thermoplastic Detail Stripe, Yellow
0360	907-626-H009		235	Square Feet	Thermoplastic Legend, White
0370	907-626-H010		3,475	Linear Feet	Thermoplastic Legend, White
0380	907-627-J001		620	Each	Two-Way Clear Reflective High Performance Raised Markers
0390	907-627-K001		20	Each	Red-Clear Reflective High Performance Raised Markers
0400	907-627-L001		1,640	Each	Two-Way Yellow Reflective High Performance Raised Markers
ALTERNATE GROUP AA NUMBER 1					
0410	304-H001	(GY)	110	Cubic Yard	3/4" and Down Crushed Stone Base, LVM
ALTERNATE GROUP AA NUMBER 2					
0420	304-H002	(GY)	110	Cubic Yard	Size 610 Crushed Stone Base, LVM
ALTERNATE GROUP AA NUMBER 3					
0430	304-H003	(GY)	110	Cubic Yard	Size 825B Crushed Stone Base, LVM

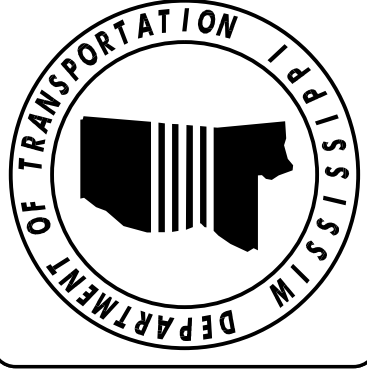

ADDENDUM


DESIGNED BY:
 DETAILED BY:
 CHECKED BY:
 DATE:

FMS CON: 310038/301000
 PROJECT NO.: MP-1172-71(002)
 COUNTY: TISHOMINGO

TYPICAL SECTION

SHEET ID
TS-2
 SHEET NO.
4

REVISIONS	DATE	BY
①	3/18/26	RCE
②	4/20/26	RCE
③	5/18/26	RCE

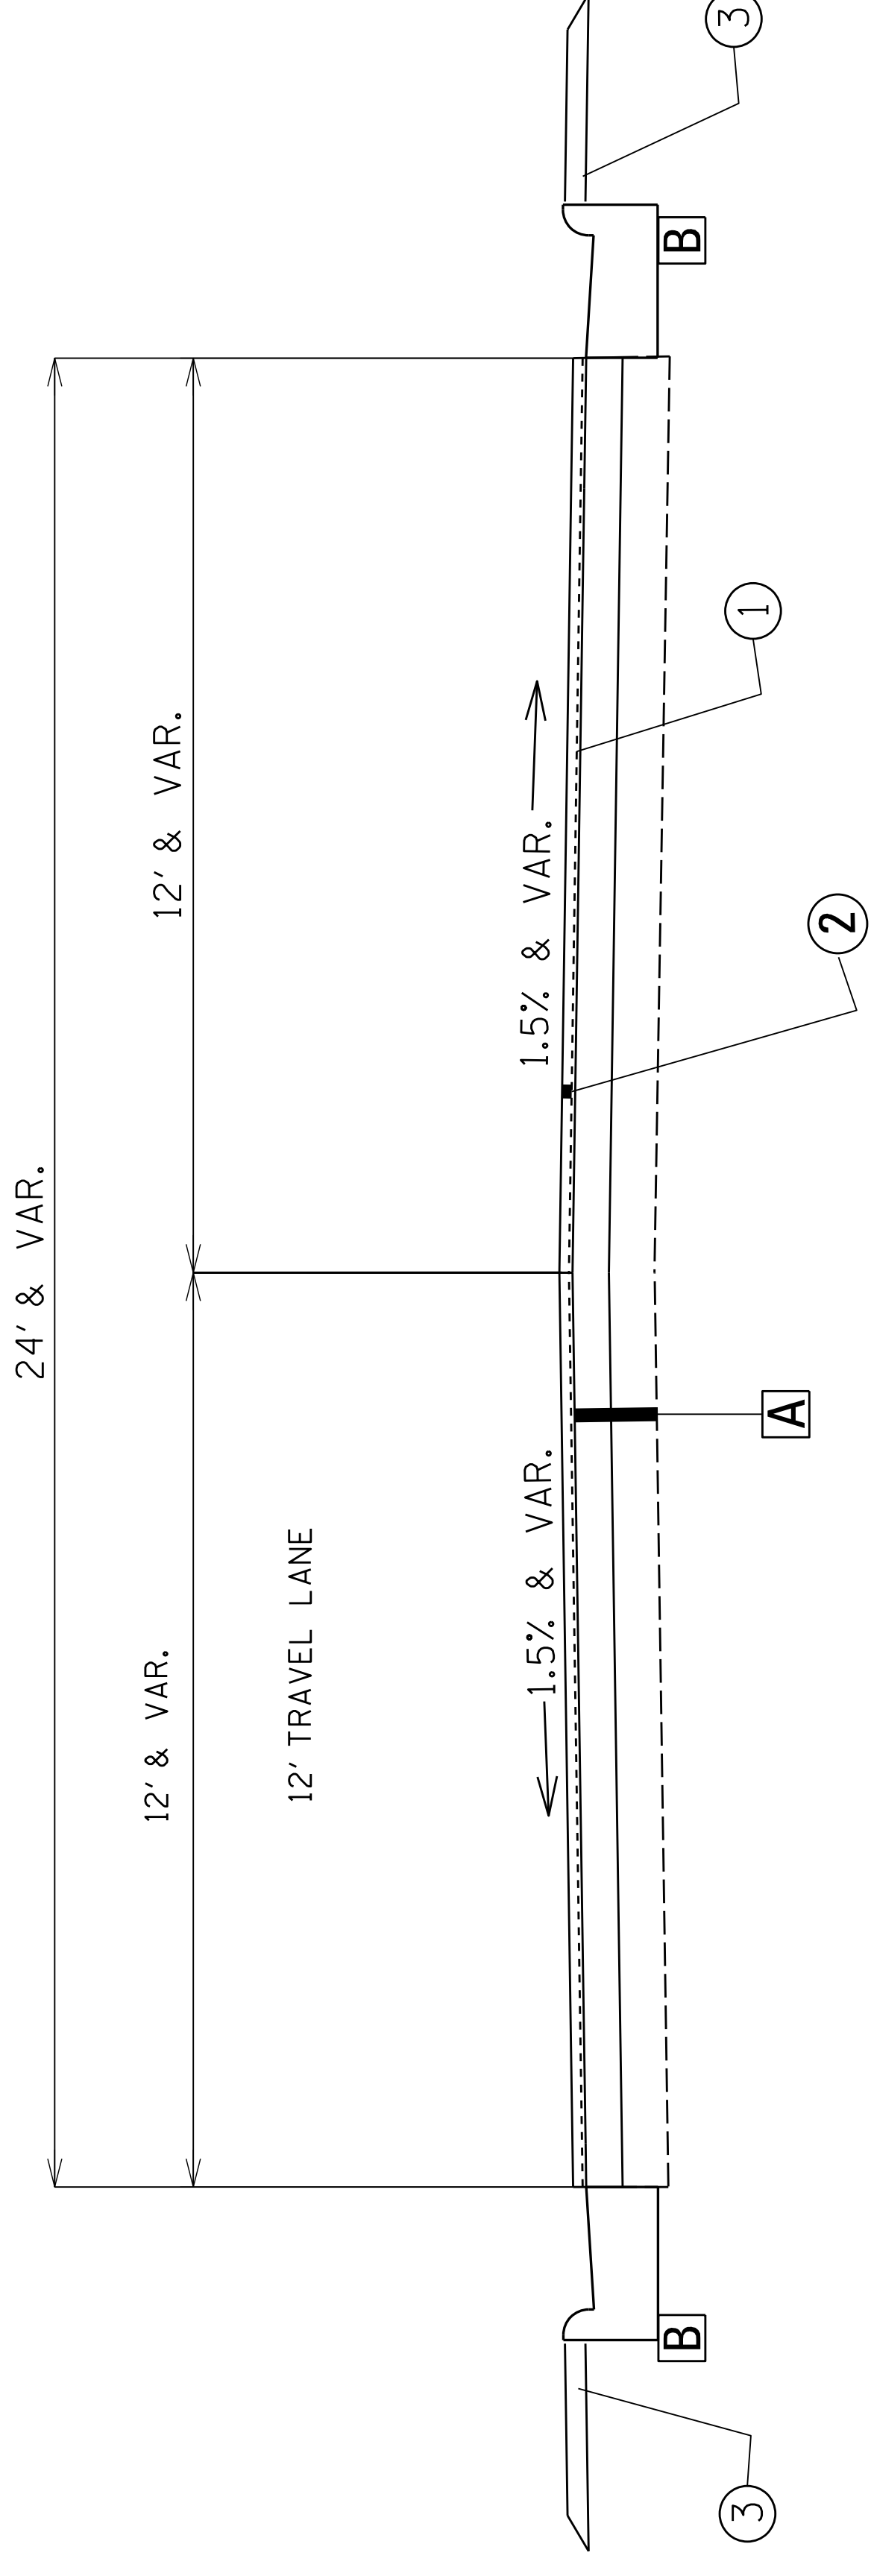

TYPICAL SECTION - MAINLINE
 TWO-LANE


① STA. 409+70 - 441+70

- ① 1.5" AND VARIABLE FINE MILLING OF BITUMINOUS PAVEMENT, ALL DEPTHS, PAY ITEM NO. 406-D001 REQUIRED.
- ② 1.5" 9.5mm, MT, ASPHALT PAVEMENT, PAY ITEM 907-403-A014 REQUIRED ON SURFACE COURSE.
- ③ 1.5" AND VARIABLE GRANULAR MATERIAL (CLASS 3, GROUP C) (LYM) PAY ITEM NO. 304-A002 REQUIRED ON SHOULDERS.


- A VAR. THICKNESS ASPHALT PAVEMENT IN PLACE.
- B GRANULAR MATERIAL IN PLACE.

NOTES:

- A. ALL FAILED AREAS ARE TO BE SAW CUT PRIOR TO REMOVAL. SAW CUTS TO BE PAID UNDER PAY ITEM NO. 503-C010 SAW CUT, FULL DEPTH.
- B. EXISTING RAISED PAVEMENT MARKERS TO BE REMOVED PRIOR TO PLACEMENT OF ASPHALT PAVEMENT (NOT A PAY ITEM).
- C. NO GRANULAR MATERIAL SHALL BE PLACED DIRECTLY UPON THE SURFACE COURSE.
- D. PRIOR TO PLACING ASPHALT PAVEMENT THE EXISTING GRAVEL SHOULDERS ARE TO BE BLADED FOR A MINIMUM DISTANCE OF ONE FOOT BEYOND EXISTING PAVEMENT TO REMOVE VEGETATION AND EXCESS SHOULDER MATERIAL. (NOT A PAY ITEM)

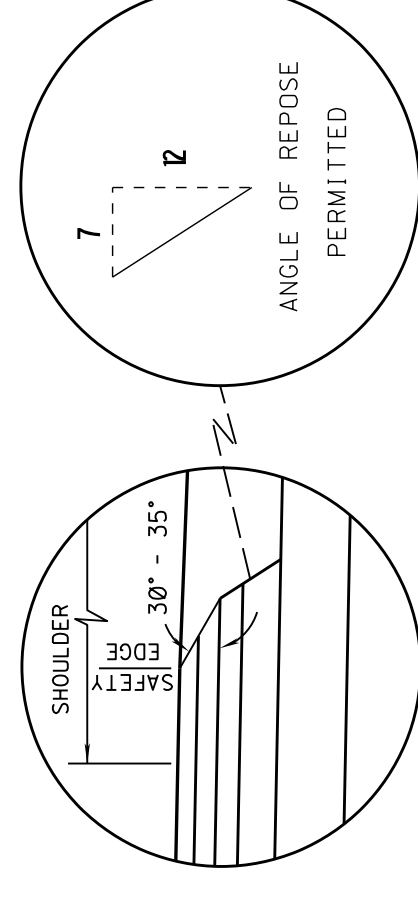

SAFETY EDGE REQ'D
 TOP 2 LIFTS ONLY
 (NOT A PAY ITEM)
 OVERLAY 14' PAVEMENT

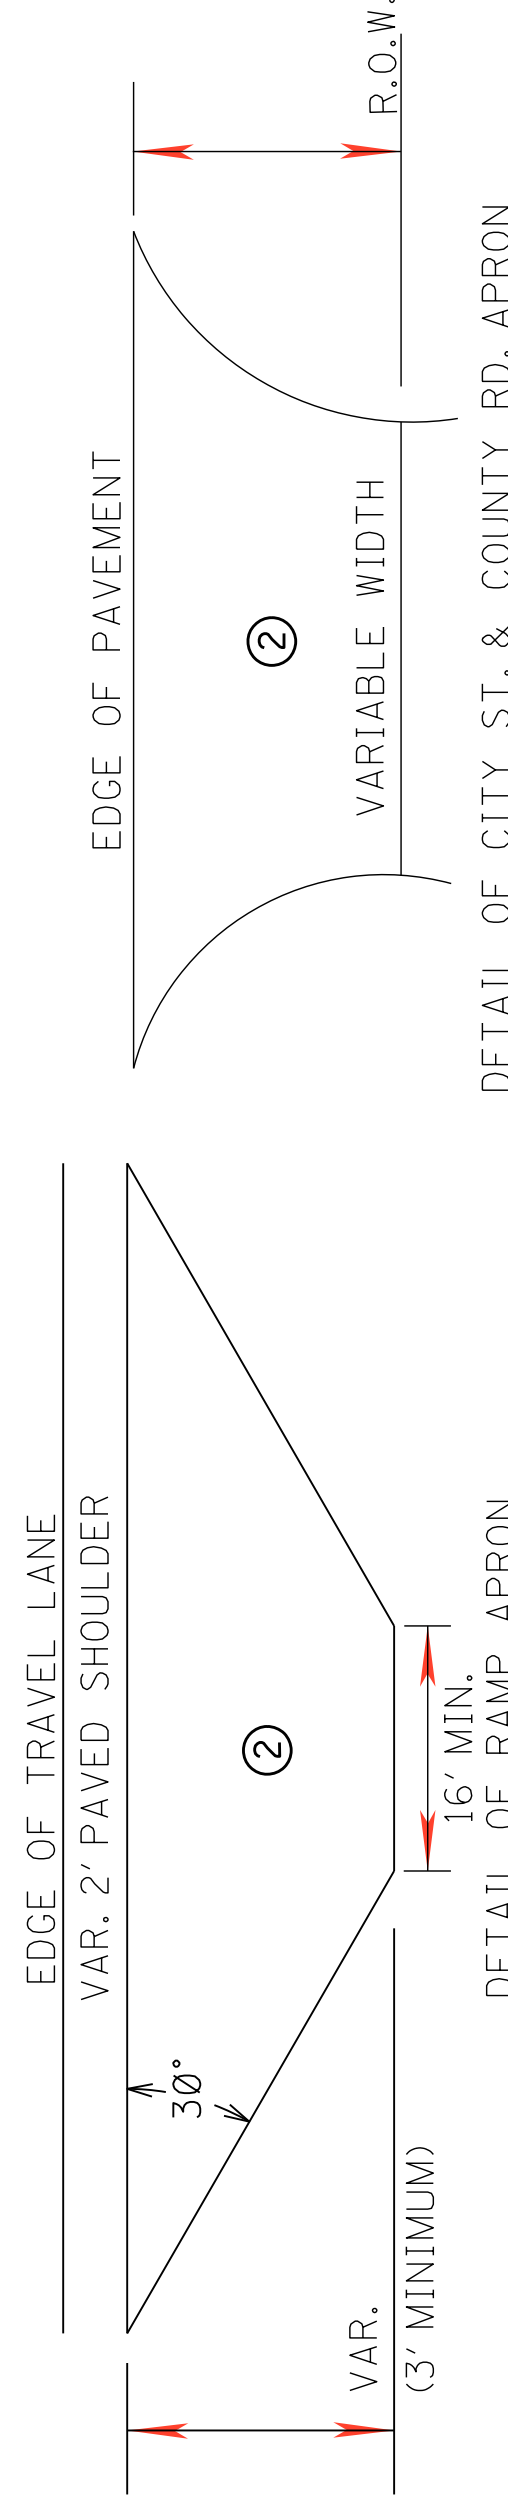

DETAIL OF RAMP APRON

DETAIL OF CITY ST. & COUNTY RD. APRON

