MDOT Use Only
Checked _____
Loaded _____
Keyed _____

02 -

SM No. CNH0008030501

PROPOSAL AND CONTRACT DOCUMENTS

FOR THE CONSTRUCTION OF

02
Pavement Restoration of US 49 from the Hinds County Line to the Yazoo County Line, and ITS Improvements on US 49 from Northside Drive to the Madison County Line, US 49 from the Hinds County Line to the Yazoo County Line, and US 49 from the Madison County Line to approximately 500 feet north of the Madison County Line, known as Federal Aid Project Nos. NH-0008-03(050) / 105530301 in Madison County, CRP-0008-03(050) / 105530302 in Madison County, CRP-0008-03(050) / 105530303 in Hinds County, and CRP-0008-03(050) / 105530304 in Yazoo County.

Project Completion: 07/09/2027

(STATE DELEGATED)

NOTICE

BIDDERS MUST COMPLETE AN ONLINE REQUEST FOR PERMISSION TO BID THIS PROJECT.

Electronic addendum updates will be posted on www.gomdot.com

SECTION 900

OF THE CURRENT 2017 STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION

JACKSON, MISSISSIPPI

MISSISSIPPI DEPARTMENT OF TRANSPORTATION
TABLE OF CONTENTS

PROJECT: NH-0008-03(050)/105530301 - Madison
CRP-0008-03(050)/105530302 - Madison
CRP-0008-03(050)/105530303 - Hinds
CRP-0008-03(050)/105530304 - Yazoo

Section 901 - Advertisement

Section 904 - Notice to Bidders

#1	Governing Specification, w/ Supplement
#2	Status of ROW, w/ Attachments
#3	Final Cleanup
#13	Safety Edge
#296	Reduced Speed Limit Signs
#445	Mississippi Agent or Qualified Nonresident Agent
#516	Errata and Modifications to the 2017 Standard Specifications
#1225	Early Notice to Proceed
#1226	Material Storage Under Bridges
#1241	Fuel and Material Adjustments
#1963	Guardrail Pads
#2206	MASH Compliant Devices
#2273	Mississippi Special Fuel Tax Law
#2812	Traffic Signal and ITS Components
#2895	Exploratory Joint Cleanout
#2954	Reflective Sheeting for Signs
#3676	Asphalt Gyratory Compactor Internal Angle Calibration
#3875	General ITS Requirements
#4113	Unique Entity ID Requirement For Federal Funded Projects
#4702	App for Traffic Control Report
#5086	Detail of Square Tube Sign Posts
#5551	Federal Bridge Formula
#5570	Special Provisions Related to Concrete
#7578	Obligation Date
#7624	Standard Drawings w/Supplement
#7682	Contract Time
#7683	Specialty Items
#7684	Scope of Work
#7685	Cooperation Between Contractors
#7686	Temporary Construction Signs
#7687	Underground Utilities

906	Required Federal Contract Provisions -- FHWA 1273, w/Supplements

Section 907 - Special Provisions

907-101-1	Definitions and Terms
907-102-2	Bidding Requirements and Conditions
907-104-2	Minor Alterations to the Contract
907-105-2	Control of Work

PROJECT: **NH-0008-03(050)/105530301 - Madison**
CRP-0008-03(050)/105530302 - Madison
CRP-0008-03(050)/105530303 - Hinds
CRP-0008-03(050)/105530304 - Yazoo

907-106-5	Control of Materials
907-108-4	Subletting of Contract
907-108-6	Default and Termination of Contract
907-109-5	Measurement and Payment
907-201-1	Clearing and Grubbing
907-401-4	Asphalt Pavements - General
907-403-4	Asphalt Pavements
907-407-1	Tack Coat
907-413-2	Cleaning and Sealing Joints and Cracks
907-420-4	Undersealing
907-601-1	Structural Concrete
907-605-1	Underdrains
907-618-12	Traffic Control Management
907-626-12	Thermoplastic Traffic Markings
907-627-1	Raised Pavement Markings
907-631-1	Traffic Signal Systems - General, w/Supplement
907-632-1	Traffic Signal Cabinet Assemblies
907-634-4	Traffic Signal and ITS Equipment Poles
907-636-3	Electrical Cable
907-637-3	Traffic Signal Conduit and Pull Boxes
907-650-5	On-Street Video Equipment
907-659-5	Traffic Management Center (TMC) Modifications
907-660-1	ITS Equipment Cabinets
907-661-6	Fiber Optic Cable (OSP), w/ Supplement
907-663-6	Networking Equipment
907-700-3	Materials and Tests w/Attachment
907-701-4	Hydraulic Cement, w/ Supplement
907-702-4	Bituminous Materials
907-703-2	Gradation
907-705-1	Stone Riprap
907-707-3	Joint Materials
907-711-2	Plain Steel Wire
907-712-1	Fence and Guardrail
907-714-4	Miscellaneous Materials
907-718-1	Timber and Dimension Lumber
907-720-4	Pavement Marking Materials
907-721-4	Materials for Signing
907-722-1	Materials for Traffic Signal Installation
907-799-1	Hydraulic Cement Concrete Mixtures, w/ Supplement
907-808-1	Joint Repair
907-823-8	Preformed Joint Seal
907-824-4	Routine Bridge Repair

Section 905 - Proposal, Proposal Bid Items, Combination Bid Proposal
Certification of Performance - Prior Federal-Aid Contracts
Certification Regarding Non-Collusion, Debarment and Suspension

PROJECT: **NH-0008-03(050)/105530301 - Madison**
CRP-0008-03(050)/105530302 - Madison
CRP-0008-03(050)/105530303 - Hinds
CRP-0008-03(050)/105530304 - Yazoo

SAM.GOV Registration and Unique Entity ID
Section 902 - Contract Form
Section 903 - Contract Bond Forms

(REVISIONS TO THE ABOVE WILL BE INDICATED ON THE SECOND SHEET OF SECTION 905 AS ADDENDA)

05/01/2026 08:12 AM

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 901 - ADVERTISEMENT

Electronic bids will be received by the Mississippi Transportation Commission at 10:00 o'clock A.M., Wednesday, May 27, 2026, from the Bid Express Service and shorty thereafter publicly read on the Sixth Floor For:

Pavement Restoration of US 49 from the Hinds County Line to the Yazoo County Line, and ITS Improvements on US 49 from Northside Drive to the Madison County Line, US 49 from the Hinds County Line to the Yazoo County Line, and US 49 from the Madison County Line to approximately 500 feet north of the Madison County Line, known as Federal Aid Project Nos. NH-0008-03(050) / 105530301 in Madison County, CRP-0008-03(050) / 105530302 in Madison County, CRP-0008-03(050) / 105530303 in Hinds County, and CRP-0008-03(050) / 105530304 in Yazoo County.

The attention of bidders is directed to the Contract Provisions governing selection and employment of labor. Minimum wage rates have been predetermined by the Secretary of Labor and are subject to Public Law 87-581, Work Hours Act of 1962, as set forth in the Contract Provisions.

The specifications are on file in the offices of the Mississippi Department of Transportation.

Contractors may request permission to bid online at http://shop.mdot.ms.gov at no cost. Upon approval, Contractors shall be eligible to submit a bid using Bid Express at http://bidx.com. Specimen proposals may be viewed and downloaded online at no cost at http://mdot.ms.gov or purchased online at http://shop.mdot.ms.gov at a cost of Ten Dollars ($10.00) per proposal plus a small convenience fee. Cash or checks will not be accepted as payment.

Bid bond, signed or countersigned by a Mississippi Agent or Qualified Nonresident Agent, with Power of Attorney attached, a Cashier's check or Certified Check for five (5%) percent of bid, payable to STATE OF MISSISSIPPI, must accompany each proposal.

The attention of bidders is directed to the provisions of Subsection 102.07 pertaining to irregular proposals and rejection of bids.

BRAD WHITE
EXECUTIVE DIRECTOR

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SUPPLEMENT TO NOTICE TO BIDDERS NO. 1

DATE: **06/08/2021**

SUBJECT: **Governing Specifications**

Change the web address at the end of the first paragraph to the following.

https://shop.mdot.ms.gov/default.aspx?StoreIndex=1

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 - NOTICE TO BIDDERS NO. 1 **CODE: (IS)**

DATE: 03/01/2017

SUBJECT: Governing Specifications

The current (2017) Edition of the Standard Specifications for Road and Bridge Construction adopted by the Mississippi Transportation Commission is made a part hereof fully and completely as if it were attached hereto, except where superseded by special provisions, or amended by revisions of the Specifications contained within this proposal. Copies of the specification book may be purchased from the MDOT Construction Division, or online at shopmdot/default.aspx?StoreIndex=1.

A reference in any contract document to controlling requirements in another portion of the contract documents shall be understood to apply equally to any revision or amendment thereof included in the contract.

In the event the plans or proposal contain references to the 2004 Edition of the Standard Specifications for Road and Bridge Construction, it is to be understood that such references shall mean the comparable provisions of the 2017 Edition of the Standard Specifications.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 - NOTICE TO BIDDERS NO. 2 **CODE: (IS)**

DATE: 03/01/2017

SUBJECT: Status of Right-of-Way

Although it is desirable to have acquired all rights-of-way and completed all railroad agreements, utility adjustments and work to be performed by others prior to receiving bids, sometimes it is not considered to be in the public interest to wait until each and every such clearance has been obtained. The bidder is hereby advised of possible unacquired rights-of-way, relocates, railroad agreements and utilities adjustments which have not been completed.

The status of right-of-way acquisition, utility adjustments, encroachments, potentially contaminated sites, railroad facilities, improvements, and asbestos contamination are set forth in the following attachments.

In the event right of entry is not available to ALL parcels of right-of-way and/or all work that is to be accomplished by others on the date set forth in the contract for the Notice to Proceed is not complete, the Department will issue a restricted Notice to Proceed.

STATUS OF RIGHT-OF-WAY
NH-0008-03(050) 105530/301000
CRP-0008-03(050) 105530/302000
CRP-0008-03(050) 105530/303000
CRP-0008-03(050) 105530/304000
Madison, Hinds and Yazoo Counties

All rights of way and legal rights of entry have been acquired **except:**

None.

STATUS OF POTENTIALLY CONTAMINATED SITES REPORT

NH-0008-03(050) 105530-301000
CRP-0008-03(050) 105530-302000
CRP-0008-03(050) 105530-303000
CRP-0008-03(050) 105530-304000

Madison, Madison, Hinds, Yazoo Counties

April 2, 2026

THERE IS NO RIGHT-OF-WAY REQUIRED FOR THIS PROJECT. NO INITIAL SITE ASSESSMENT WILL BE PERFORMED. IF CONTAMINATION ON THE EXISTING RIGHT-OF-WAY IS DISCOVERED, IT WILL BE HANDLED BY THE DEPARTMENT.

ASBESTOS ABATEMENT STATUS REPORT

NH-0008-03(050) 105530-301000
CRP-0008-03(050) 105530-302000
CRP-0008-03(050) 105530-303000
CRP-0008-03(050) 105530-304000

Madison, Madison, Hinds, Yazoo Counties

April 2, 2026

Reference is made to notices to bidders entitled "Asbestos National Emission Standards for Hazardous Air Pollutants (NESHAP)" and "Removal of Obstructions".

The following pertinent information is furnished concerning asbestos-containing materials (ACMs), if any, found in buildings to be removed by the Contractor.

There is no right-of-way required for this project, and the contractor will not need to remove any buildings.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

Inter-Departmental Memorandum

DATE: April 14, 2026

TO: Don Drake
ROW Division

FROM: Adam L. McDaniel
District Five

Digitally signed by Adam McDaniel
Date: 2026.04.14 08:08:58-05'00'

SUBJECT OR PROJECT NO: NH-0008-03(050)/105530-301000
CRP-0008-03(050)/105530-302000
CRP-0008-03(050)/105530-303000
CRP-0008-03(050)/105530-304000
ROW Documentation

COUNTIES: Hinds, Madison, and Yazoo

INFORMATION COPY TO:

Project File
Construction Division

District Status Report

1. STATUS OF RIGHT OF WAY: No new ROW required.

2. RIGHT OF WAY CLEARANCE: There are no visible encroachments that conflict with construction.

3. STATUS OF AFFECTED RAILROAD OPERATING FACILITIES: No railroads are affected.

4. STATUS OF REQUIRED UTILITY RELOCATIONS: There are no known utility conflicts. Permits showing the approximate location of utilities within or along the ROW are on file with the Department. The Department cannot and does not warrant that this information is complete and accurate. The Contractor is advised to contact MS 811 and MDOT to have utility lines marked prior to subsurface work. The Contractor must coordinate directly with the involved utility owners to have underground utility lines field located in advance of construction.

5. STATUS OF CONSTRUCTION AGREEMENT: None required.

ALM:alm

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

Inter-Departmental Memorandum

To: Right of Way Division
Don Drake

Date: March 31, 2026

From: Pre-Construction Engineer District 3
Adam Boggan

Project No: 105530/304000
CRP-0008-03(050)

County: Yazoo

DISTRICT STATUS REPORT

1. **STATUS OF RIGHT OF WAY:** All work to be done within existing ROW.
2. **RIGHT OF WAY CLEARANCE:** There are no encroachments.
3. **STATUS OF AFFECTED RAILROAD OPERATING FACILITIES:** None affected.
4. **STATUS OF REQUIRED UTILITY RELOCATIONS:** No utility conflicts.
5. **STATUS OF CONSTRUCTION AGREEMENT:** None required.

AB:ab

pc: Joel Bellipanni (District Three)
James Burks (District Three)
Alex Zivic (Construction Division)
Sir Johnathan Rucker (Construction Utility & Permitting)
Don Drake (Right of Way)
File

IMPROVEMENTS STATUS REPORT

Improvements to be included in the Notice to Bidders to be removed by the Construction Contractor

FMS Construction Project No: 105530-301000
105530-302000
105530-303000
105530-304000

FMS ROW Project No:

External ROW No: NH-0008-03(050)
CRP-0008-03(050)
CRP-0008-03(050)
CRP-0008-03(050)

Parcel No:
Station No:
Property Owner:
Description/Pictures:

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 - NOTICE TO BIDDERS NO. 3 **CODE: (SP)**

DATE: 01/17/2017

SUBJECT: Final Clean-Up

Immediately prior to final inspection for release of maintenance, the Contractor shall pick up, load, transport and properly dispose of all litter from the entire highway right-of-way that is within the termini of the project.

Litter shall include, but not be limited to, solid wastes such a glass, paper products, tires, wood products, metal, synthetic materials and other miscellaneous debris.

Litter removal is considered incidental to other items of work and will not be measured for separate payment.


MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 - NOTICE TO BIDDERS NO. 13 **CODE: (IS)**

DATE: 03/01/2017

SUBJECT: Safety Edge

Bidders are hereby advised that the Shoulder Wedge (Safety Edge) specified in Section 401, Asphalt Pavements, shall only apply to the top two (2) lifts of asphalt. Open Graded Friction Courses (OGFC) are not to be considered a lift as it pertains to safety edge. Attached is a drawing showing the safety edge. Note that the shoulder dimensions in the bottom two drawings will be less than three feet (3').

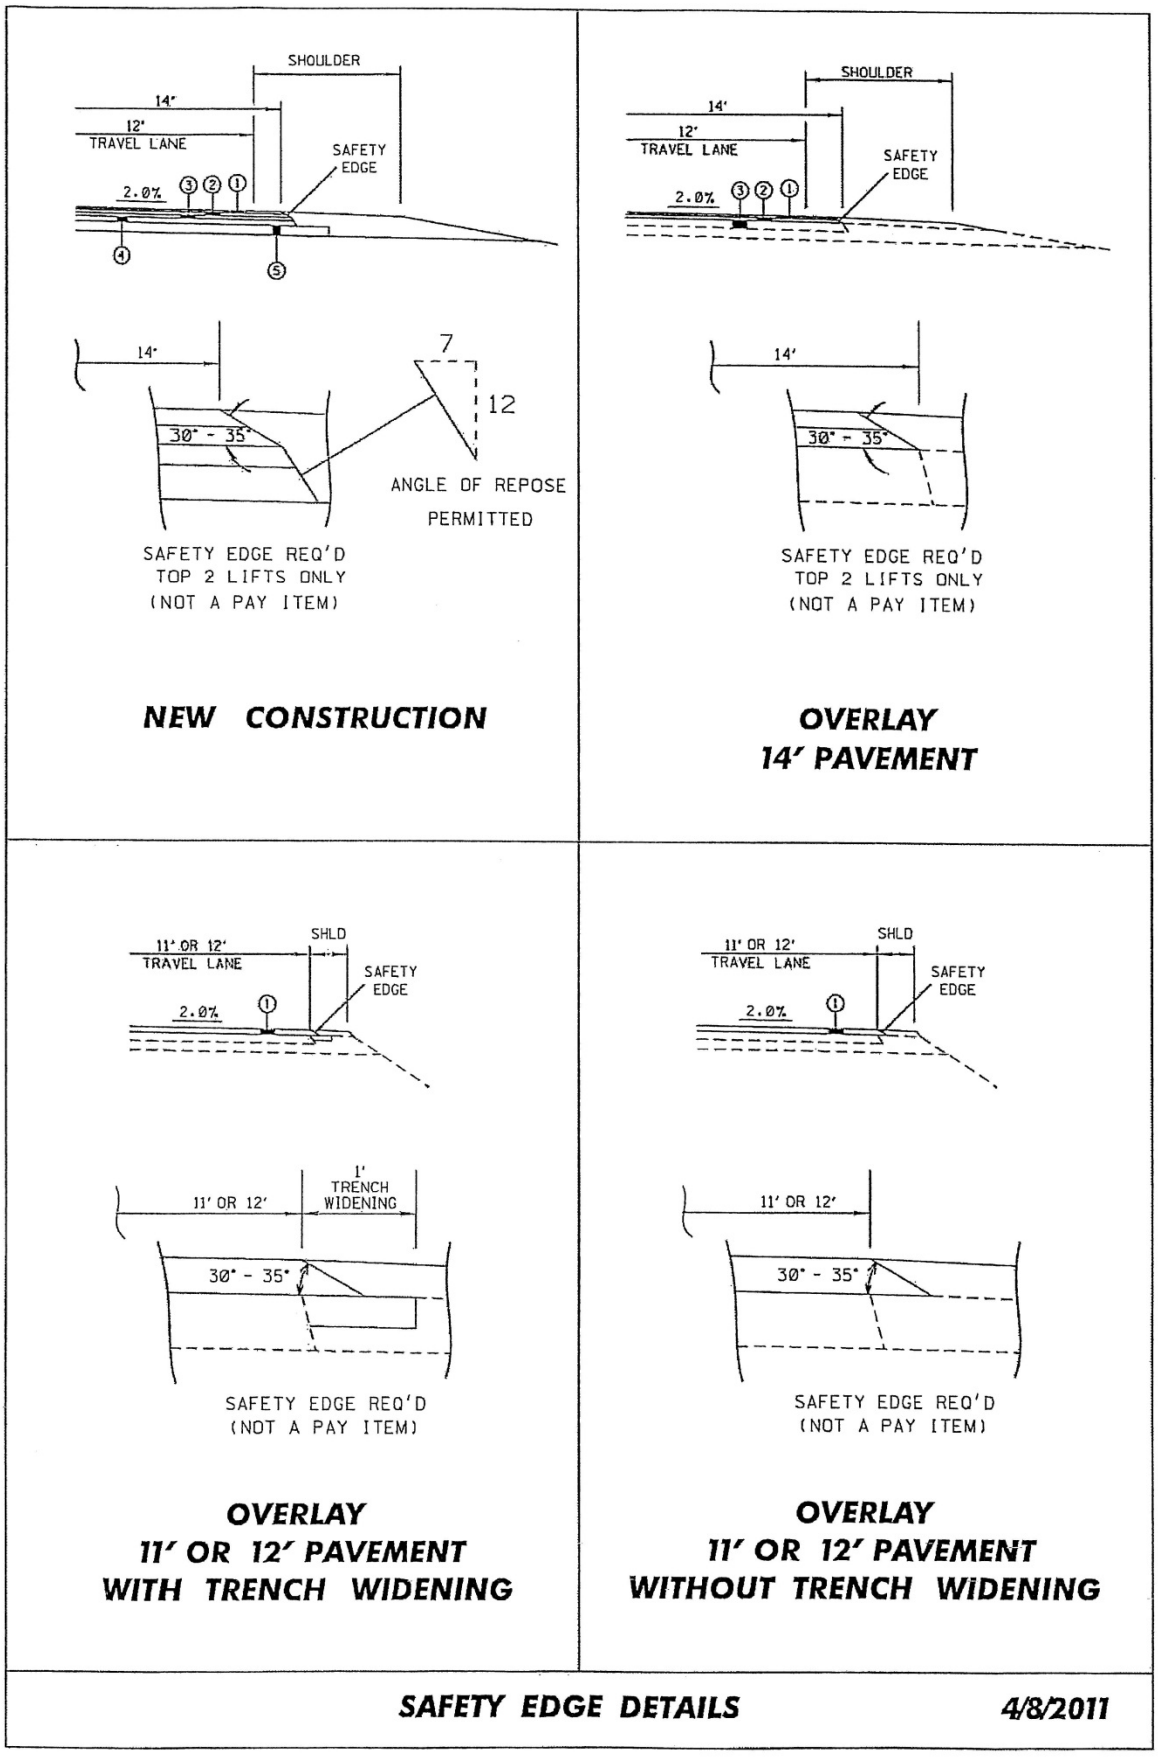
SHOULDER
14'
12'
TRAVEL LANE
SAFETY EDGE
2.0%
③ ② ①
④
⑤
14'
7
12
30° - 35°
ANGLE OF REPOSE PERMITTED
SAFETY EDGE REQ'D TOP 2 LIFTS ONLY (NOT A PAY ITEM)
NEW CONSTRUCTION
SHOULDER
14'
12'
TRAVEL LANE
SAFETY EDGE
2.0%
③ ② ①
14'
30° - 35°
SAFETY EDGE REQ'D TOP 2 LIFTS ONLY (NOT A PAY ITEM)
OVERLAY 14' PAVEMENT
11' OR 12'
TRAVEL LANE
SHLD
SAFETY EDGE
2.0%
①
1' TRENCH WIDENING
11' OR 12'
30° - 35°
SAFETY EDGE REQ'D (NOT A PAY ITEM)
OVERLAY 11' OR 12' PAVEMENT WITH TRENCH WIDENING
11' OR 12'
TRAVEL LANE
SHLD
SAFETY EDGE
2.0%
①
11' OR 12'
30° - 35°
SAFETY EDGE REQ'D (NOT A PAY ITEM)
OVERLAY 11' OR 12' PAVEMENT WITHOUT TRENCH WIDENING
SAFETY EDGE DETAILS
4/8/2011

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 - NOTICE TO BIDDERS NO. 296 **CODE: (SP)**

DATE: 07/25/2017

SUBJECT: Reduced Speed Limit Signs

Bidders are advised that when the plans or contract documents require the speed limit on a project to be reduced, the Contractor shall begin work within 48 hours of installing the reduced speed limit signs. Should the Contractor not start work or have no plans to start work within 48 hours of installing the signs, the reduced speed limit signs shall be covered and existing speed limit signs uncovered.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 - NOTICE TO BIDDERS NO. 445 **CODE: (SP)**

DATE: 10/10/2017

SUBJECT: Mississippi Agent or Qualified Nonresident Agent

Bidders are hereby advised of the requirements of Subsections 102.08, 103.05.2, and 107.14.2.1 of the *2017 Standard Specifications for Road and Bridge Construction* as it refers to bonding agents. Proposal guaranties, bonds, and liability insurance policies must be signed by a **Mississippi Agent or Qualified Nonresident Agent.**

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 - NOTICE TO BIDDERS NO. 516 **CODE: (IS)**

DATE: 11/28/2017

SUBJECT: Errata and Modifications to the 2017 Standard Specifications

Page	Subsection	Change
16	102.06	In the seventh full paragraph, change "Engineer" to "Director."
33	105.05.1	In the sixth sentence, change "Contract Administration Engineer" to "Contract Administration Director."
34	105.05.2.1	In subparagraph 2, change "SWPPP, ECP" to "SWPPP and the ECP"
35	105.05.2.2	In subparagraphs 2, add " and" to the end of the sentence. In subparagraph 3, remove ", and" and add ".".
90	109.04.2	In the last paragraph of subparagraph (a), place a period "." at the end of the sentence.
93	109.04.2	In the last paragraph of subparagraph (g), place a period "." at the end of the sentence. Also, in the first paragraph of subparagraph (h), place a period "." at the end of the sentence.
97	109.07	Under ADJUSTMENT CODE, subparagraph (A1), change "HMA mixture" to "Asphalt mixtures."
98	109.11	In the third sentence, change "Engineer" to "Director."
219	308.04	In the last sentence of the last paragraph, change "Contractor's decision" to "Engineer's decision."
300	405.02.5.9	In the first sentence of the second paragraph, change "Hot Mix Asphalt" to "Asphalt Mixtures."
502	630.01.1	In the first paragraph, change "AASHTO" to "AASHTO's LRFD".
636	646.05	Change "each" to "per each" for the pay item units of payment.
640	656.02.6.2	In item 7), change "down stream" to "downstream".
688	630.03.2	Change the subsection number from "630.03.2" to "680.03.2."

725	702.08.3	In the second sentence of the first paragraph, change "hot-mix" to "asphalt."
954	804.02.13.1.6	In the definition for "M" in the % Reduction formulas, change "paragraph 7.3" to "paragraph 5.3."

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 - NOTICE TO BIDDERS NO. 1225 **CODE: (SP)**

DATE: 11/13/2018

SUBJECT: Early Notice to Proceed

Bidders are advised that if an early notice to proceed is allowed by the Department and the Contractor experiences problems or delays between the early notice to proceed date and the original notice to proceed date, this shall not be justification for any monetary compensation or an extension of contract time.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 - NOTICE TO BIDDERS NO. 1226 **CODE: (IS)**

DATE: 11/16/2018

SUBJECT: Material Storage Under Bridges

Bidders are advised that Subsection 106.08 of the Standard Specifications allows the Contractor to store materials and equipment on portions of the right-of-way. However, the Contractor will not be allowed to store or stockpile materials under bridges without written permission from the Project Engineer. The Contractor shall submit a detailed request of all proposed materials to be stored under bridges to the Engineer a minimum of 14 calendar days prior to anticipated storage. This detail shall include, but not limited to, bridge location, material type, material quantity, and duration of storage. The Project Engineer and any other needed Division will review this information and determine whether to grant approval. The Contractor shall not store any material under any bridge without written approval from the Project Engineer.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 - NOTICE TO BIDDERS NO. 1241 **CODE: (IS)**

DATE: 11/27/2018

SUBJECT: Fuel and Material Adjustments

Bidder's attention is brought to the last paragraph of Subsection 109.07 of the Standard Specifications which states that no fuel or material adjustment will be made after the completion of contract time. Any fuels consumed or materials incorporated into the work during the monthly estimate period falling wholly after the expiration of contract time will not be subject a fuel or material adjustment.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 - NOTICE TO BIDDERS NO. 1963 **CODE: (SP)**

DATE: 9/23/2019

SUBJECT: Guardrail Pads

Bidders are hereby advised that prior to construction of the guardrail pads, the Contractor shall coordinate with the guardrail Subcontractor to determine the guardrail pad dimensions necessary to meet MASH compliance.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 - NOTICE TO BIDDERS NO. 2206 **CODE: (IS)**

DATE: 01/14/2020

SUBJECT: MASH Compliant Devices

Bidders are hereby advised that compliance associated with the requirements of meeting either the National Cooperative Highway Research Program (NCHRP) Report 350 or the Manual for Assessing Safety Hardware (MASH) for installations of certain traffic control devices and permanent safety hardware devices (guardrails, guardrail terminals, permanent portable barriers, cast-in-place barriers, all other permanent longitudinal barriers, crash cushions, cable barriers, cable barrier terminals, bridge rails, bridge rail transitions, all other terminals, sign supports, and all other breakaway hardware) as listed throughout the Standard Specifications and/or the Standard Drawings, or both, is now replaced with the requirements of meeting the 2016 version of MASH after December 31, 2019. This change applies to new permanent installations and to full replacements of existing installations.

At the preconstruction conference or prior to starting any work on the project, the Contractor shall submit a letter stating that the traffic control devices and permanent safety hardware devices as outlined within the paragraph above that are to be used on the project are certified to meet MASH 2016.

When a MASH 2016-compliant device does not exist for the new permanent installations and/or full replacement installations of permanent safety hardware devices, as listed above, a MASH 2009-compliant or a NCHRP 350-compliant device may be proposed by the Contractor for the project. A written request for such instances must be submitted by the Contractor either at the preconstruction conference or prior to starting any work on the project. The Contractor shall submit the following items to the Project Engineer: (1) a detailed list of the proposed devices and locations thereof; and (2) certification letters indicating that the proposed devices are compliant with either MASH 2009 or NCHRP 350.

When a MASH 2016-compliant device does not exist for the temporary work zone traffic control devices (Category 1, Category 2, and Category 3 devices) , a MASH 2009-compliant or a NCHRP 350-compliant device may be proposed by the Contractor for the project. Temporary work zone traffic control devices (Category 1, Category 2, and Category 3 devices) that are MASH 2009-compliant or NCHRP 350–compliant that have been in use prior to December 31, 2019, and that have a remaining service life may be proposed for use throughout their normal service life on the project by the Contractor. For either of these scenarios for temporary work zone traffic control devices, a written request must be submitted by the Contractor either at the preconstruction conference or prior to starting any work on the project. The Contractor shall submit the following items to the Project Engineer: (1) a detailed list of the proposed devices and locations thereof; and (2) certification letters indicating that the proposed devices are compliant with either MASH 2009 or NCHRP 350.

Work will only be allowed to proceed after the Department has granted written concurrence(s) with the proposed request(s) as listed above.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 - NOTICE TO BIDDERS NO. 2273 **CODE: (SP)**

DATE: 02/12/2020

SUBJECT: Mississippi Special Fuel Tax Law

Bidder's attention is brought to the second paragraph of Subsection 107.02 of the Standard Specifications which states that all Contractors and Subcontractors must comply with all requirements contained in the Mississippi Special Fuel Tax Law, Section 27-55-501, *et seq*. Attached are two Fact Sheets provided by the Mississippi Department of Revenue (MDOR) with additional information.

DEPARTMENT OF REVENUE
STATE OF MISSISSIPPI

Gasoline and Dyed Diesel Used for Non-Highway Purposes

Mississippi provides a reduced rate for gasoline and dyed diesel used for non-highway purposes. The reduced rates are 6.44 cents per gallon and 5.75 cents per gallon of gasoline or dyed diesel. These fuels are generally taxed at 18 cents per gallon if for on road use.

Gasoline Used for Non-Highway Purposes

You may be entitled to a refund of 11.56 cents per gallon (making this an equivalent to a tax rate of 6.44 cents per gallon) if you desire to purchase gasoline to be used off road. The gasoline must be used for agricultural, maritime, industrial, manufacturing, domestic or non-highway purposes only.

Examples of non-highway include gasoline used in boats, golf carts, machinery used for manufacturing or farm equipment used exclusively in plowing, planting or harvesting farm products.

Refund Gasoline User

The refund is based on the amount of gallons used. Before a refund is issued, you are required to…

1. Obtain a refund gasoline user's permit and a certificate for refund booklet from the Department of Revenue;
2. Have a storage tank marked "REFUND GASOLINE"; and,
3. Purchase the gasoline from someone who holds a refund gasoline dealer's permit.

No refund will be allowed for gasoline used in motor vehicles owned or operated by a government entity or used in Mississippi government contracts.

Refund Gasoline Dealer

You must obtain a refund gasoline dealer's permit from the Department of Revenue before selling refund gasoline. At no time should the gasoline be delivered to a tank that is not properly marked. The gasoline must be dyed a distinctive mahogany color at the time of delivery.

The Department of Revenue may waive the dye requirement if the dye may cause damage to the equipment. The refund gasoline user is required to obtain the waiver from the Department of Revenue.

Dyed Diesel Used for Non-Highway Purposes

Unlike gasoline, you are not required to apply for a refund if you desire to purchase dyed diesel to be used off road. Mississippi provides a reduced rate of 5.75 cents per gallon on dyed diesel used off road. Diesel used on road is subjected to 18 cents per gallon. Dyed diesel used in motor vehicles owned or operated by a government entity or used in Mississippi government contracts will be subjected to 18 cents per gallon.

Dyed Diesel Used on the Highway

Any person who purchases, receives, acquires or uses dyed diesel for highway use will be liable to pay 18 cents per gallon and subject to a penalty in the amount of $1000.

Identifying Dyed Diesel

Storage facilities for dyed diesel must be plainly marked "NONHIGHWAY DIESEL FUEL" or "NONHIGHWAY KEROSENE". Retailers are also required to mark all pumps or dispensing equipment.

This fact sheet is intended to help you become more familiar with Mississippi tax laws and your rights and responsibilities under the laws. Nothing in this fact sheet supersedes, alters, or otherwise changes any provisions of the tax law, regulations, court decisions, or notices.

Revised March 2017

Petroleum Tax Bureau
P. O. Box 1033
Jackson, MS 39215-1033
Phone: (601) 923-7150

DEPARTMENT OF REVENUE
STATE OF MISSISSIPPI

Special Fuel Used on Government Contracts

State and Local Government Contracts

Special fuel purchased, acquired or used in performing contracts with the State of Mississippi, counties, municipalities or any political subdivision is taxed at a rate of 18 cents per gallon. Special fuel includes but is not limited to the following:

- Dyed diesel fuel;
- Kerosene;
- Undyed diesel fuel; and,
- Fuel oil.

State and local government contracts include construction, reconstruction and maintenance or repairs of projects such as roads, bridges, water systems, sewer systems, buildings, drainage canals and recreational facilities. The Department of Revenue may require contractors to remit the excise tax directly to the state in lieu of paying the tax to a distributor.

Special Fuel Direct Pay Permit

Contractors that remit the excise tax to the state will be issued a Special Fuel Direct Pay Permit. This permit relieves the distributor from collecting the tax and requires the contractor to file a monthly special fuel return. The distributor should include the contractor's permit number on all invoices that are related to tax-free sales.

The contractor is required to furnish a surety or cash bond guaranteeing the payment of the excise tax prior to receiving the Special Fuel Direct Pay Permit. The Department of Revenue may accept a contractors tax bond if the bond covers the excise tax levied on special fuel.

Special Fuel Distributors

If the contractor does not have a Special Fuel Direct Pay Permit, distributors are required to collect the 18 cents excise tax and remit the tax to the Department of Revenue. The additional 12.25 cents levied on special fuel (excluding undyed diesel) should be reported on schedules 5F and 5G of the special fuel return.

Environmental Protection Fee

Special fuel distributors are required to collect the environmental protection fee even if the contractor has a Special Fuel Direct Pay Permit. The fee is levied at 4/10^{ths} of a cent per gallon. The fee is suspended or reinstated when the trust fund has exceeded or fallen below the obligatory balance.

Penalties

Any person who knowingly and willfully purchases untaxed fuel for use in equipment utilized on a road or highway construction site in this state is guilty of a misdemeanor and, upon conviction, shall be fined not less than $1,000 or more than $100,000, or imprisoned in the county jail for not more than one year, or both.

This fact sheet is intended to help you become more familiar with Mississippi tax laws and your rights and responsibilities under the laws. Nothing in this fact sheet supersedes, alters, or otherwise changes any provisions of the tax law, regulations, court decisions, or notices.

Petroleum Tax Bureau
P. O. Box 1033
Jackson, MS 39215-1033
Phone: (601) 923-7150

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 - NOTICE TO BIDDERS NO. 2812 **CODE; (SP)**

DATE: 09/01/2020

SUBJECT: Traffic Signal and ITS Components

Bidders are hereby advised that all products selected for use on this project shall be in compliance with 2 CFR 200.216. No telecommunication and video surveillance equipment or services shall be manufactured by the following companies: Huawei Technologies Company, ZTE Corporation, Hytera Communications Corporation, Hangzhou Hikvision Digital Technology Company, Dahua Technology Company, and any subsidiary or affiliate of these entities.

The Contractor shall provide a Certification Statement that the referenced product(s) is not manufactured by any of the following: Huawei Technologies Company, ZTE Corporation, Hytera Communications Corporation, Hangzhou Hikvision Digital Technology Company, Dahua Technology Company, and any subsidiary or affiliate of these entities. (as per 2 CFR 200.216)

.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 - NOTICE TO BIDDERS NO. 2895 **CODE: (SP)**

DATE: 10/14/2020

SUBJECT: Exploratory Joint Cleanout

Bidders are hereby advised that work on this project shall consist of exploratory investigation of bridge joints to determine the appropriate level of repair and will include removal of any trash and debris (including, but not limited to, compacted dirt, vegetation and trash) located at any depth within the joint. Costs of this work will be absorbed in the cost of other items of work if further joint repair work is not required.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 - NOTICE TO BIDDERS NO. 2954 **CODE: (IS)**

DATE: **12/01/2020**

SUBJECT: **Reflective Sheeting for Signs**

Bidders are hereby advised that the retroreflective sign sheeting used for signs on this project shall be as listed below and shall meet the requirements of Subsection 721.06.

Temporary Construction Signs

Temporary traffic control (orange) sign sheeting shall be a minimum Type IX Fluorescent Orange sheeting as shown in Special Provision 907-721.

Permanent Signs

Permanent signs, except signs on traffic signal poles/mast arms, shall be as follows:

- Brown background sheeting on guide signs shall be a minimum Type VIII sheeting,
- Green and blue background sheeting on guide signs shall be a minimum Type IX sheeting, and
- All white, yellow, red, fluorescent yellow, and fluorescent yellow/green sheeting shall be Type XI sheeting.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 - NOTICE TO BIDDERS NO. 3676 **CODE: (SP)**

DATE: 09/21/2021

SUBJECT: Asphalt Gyratory Compactor Internal Angle Calibration

Bidders are advised that by March 1, 2022, all asphalt gyratory compactors shall be calibrated to an internal angle of 1.16° ±0.02°. This requirement will be reflected in updates made to MT-78, MT-80, and MT-83. This calibration requirement also extends to all QC/QA testing.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 - NOTICE TO BIDDERS NO. 3875 **CODE: (IS)**

DATE: 12/15/2021

SUBJECT: ITS General Requirements

For this Notice to Bidders, the "Engineer" shall mean the Project Engineer and/or their designee(s) throughout the rest of this NTB, unless stated otherwise.

Submittals

All submittals covered under this section shall be made electronically to the Project Engineer and to the ITS Engineer, shall clearly state the project name and project number, and should be in as few separate submittals as possible.

All products selected for use on this project shall be in compliance with 2 CFR 200.216, in addition to all other contract requirements as outlined throughout the specifications, special provisions and plans. No telecommunication and video surveillance equipment or services shall be manufactured by the following companies: Huawei Technologies Company, ZTE Corporation, Hytera Communications Corporation, Hangzhou Hikvision Digital Technology Company, Dahua Technology Company, and any subsidiary or affiliate of these entities.

Product Data. Manufacturers' product data including specifications/cut-sheets, design guides, installation manuals, operating manuals, and maintenance/service manuals shall be submitted by the Contractor for each component of the ITS system, including but not limited to cabinets, controllers, sensors, conduit, pull boxes, hardware, and all other parts of the system selected for installation.

The complete information for the original product data submittal shall be contained in as few submittals as possible and be in an organized fashion.

The product data submittal shall be accompanied by a specification checklist. At a minimum, this checklist shall clearly state the following:

1) The project name and project number
2) The date of the submittal
3) The pay item number and description
4) The part and/or model number, matching the cut-sheet
5) The manufacturer
6) A Certification Statement that the referenced product is not manufactured by any of the following: Huawei Technologies Company, ZTE Corporation, Hytera Communications Corporation, Hangzhou Hikvision Digital Technology Company, Dahua Technology Company, and any subsidiary or affiliate of these entities. (as per 2 CFR 200.216)
7) Every material requirement as stated in in this Notice to Bidders and as outlined elsewhere within this contract.

8) A statement of whether the product complies with the requirements set forth in the specifications, special provisions, plans and NTB. If product is not compliant, an explanation of non-compliance shall be provided.

All subsections of a particular section may be omitted if the section heading is included, is indicated to be not applicable, and that it is evident that all subsections being omitted are also not applicable.

It shall be the responsibility of the Contractor to guarantee the accuracy of the checklist.

Other Submittals. The following submittals shall be required:

1) Shop Drawings
2) Cabinet wiring diagrams with system labeling schedule.
3) Site wiring/connection drawings.
4) Rack diagrams showing rack mounted equipment.
5) All documentation as described in the Project Testing Plan Requirements section below.
6) Project Record Drawings:
   a. The purpose of Project Record Drawings is to provide factual information regarding all aspects of the Work, to enable future service, modifications, and additions to the Work.
   b. Project Record Drawings are an important element of this Work. Contractor shall accurately maintain Project Record Drawings throughout the course of this project.
   c. Project Record Drawings shall include documentation of all Work, including the conduit locations, pull box locations, equipment locations, foundation details, setup parameters and wiring and block diagrams.
   d. Project Record Drawings shall accurately show the physical placement of the following:
      i. Cabinets, sensors, pull boxes, and other materials installed at each site.
      ii. Conduit runs and splicing information.
   e. Project Record Drawings shall show the physical placement of each system component installed during the project at each site. Where the plan details do not depict actual field conditions, the Contractor shall amend the construction plan as required.
7) Upon completion of Work, and prior to Final Acceptance, the Contractor shall prepare and submit the final record set of Project Record Drawings. This set shall reflect the installed Work.
8) Closeout Submittals - A set of Project Record Drawings shall be provided to the Project Engineer and ITS Engineer for any items that changed or were not previously submitted, including:
   a. Project Record Drawings
   b. Product Data
   c. Installation Manuals
   d. Operating Manuals
   e. Maintenance/Service Manuals

As-Built Plans. The Contractor shall provide GPS locations of all pull boxes, splices,

termination equipment cabinets, ITS field locations and all pole locations. The Contractor shall record and submit the sequential footage markers from the fiber optic trunk and drop cables for each GPS location. The Contractor shall provide scanned PDF files of all plan sheets with pen and ink markups. The Contractor shall provide a site location inventory of ITS devices to include manufacturer model, serial numbers, MAC addresses, and IP addresses (as applicable) for all installed devices. All documentation will be due to the Department a minimum of thirty (30) calendar days after the installation.

Additional Quality Assurance Measures

The project shall be constructed in such a manner as to comply with environmental regulations and erosion control as specified in the plans and elsewhere in MDOT standard specifications.

At the completion of the Work, the site shall be cleaned, restored, grassed and otherwise stabilized to a condition consistent with conditions before work began. This work shall be paid for under other items of work.

All disturbed signs, guardrail, markers, fencing, and other roadway appurtenances shall be restored. Disturbed roadway appurtenances that require complete removal and replacement will be identified within the contract and will have separate pay items and quantities set forth for such work.

The Contractor shall clean-up debris caused by Contractor's activities on a daily basis as the work progresses. This work shall be paid for under other items of work.

All work-related accidents shall be reported immediately to the Project Engineer or his/her representative.

Maintenance and Technical Support. The supplier must provide and have a parts support system capable of providing parts for the length of the warranty period.

Project Testing Plan Requirements

The Contractor shall conduct a Project Testing Plan as required below in addition to all other project testing and acceptance procedures required elsewhere in the specifications and Plans. Some specifications contain details regarding the testing for individual device types or attributes, but this section outlines the overall testing plans for the entire project as a whole. The Project Testing Plan shall include a series of tests on all project materials occurring at various stages in the project. All costs associated with the Project Testing Plan shall be absorbed in contract pay items; no separate payment will be made for any testing.

General Requirements. The Contractor is responsible for planning, coordinating, conducting and documenting all aspects of the Project Testing Plan as detailed below and providing all required equipment for the tests. The Engineer reserves the right to attend and observe all tests.

Each test shall be an individual and separate event for each type of test and for each type of equipment as defined elsewhere within this NTB. The Contractor shall follow the testing sequence as described in this NTB and shall perform the required tests on all applicable

devices and infrastructure.

Test procedures shall be submitted and approved for each test as part of the project submittals programs. Test procedures shall include every action necessary to fully demonstrate that the material under test is clearly and definitively in full compliance with all project requirements. Test procedure actions shall cross-reference to the specifications or Plans requirement that is the subject of the test action. Test procedure actions shall cross-reference the applicable sections of the final approved Project Submittal Compliance Form and the submittal materials for the subject of the test action. Test procedures shall contain test setup and block/wiring diagrams showing all materials being tested and all test and measurement equipment, with calibration documentation, and shall contain documentation regarding the equipment configurations and programming. Test procedures shall include checkoff blanks for each project requirement included in that test and shall include forms for the documentation of all measured test results.

No testing shall be scheduled until approval of all project submittals for all materials covered under a given test and approval of the test procedures for the given test has been granted.

Unless otherwise required herein, the Contractor shall request in writing the Engineer's approval for each test occurrence a minimum of 14 days prior to the requested test date. Test requests shall include the test to be performed and the material to be tested. The Engineer reserves the right to reschedule tests if needed.

For any series of tests on different installations of a given material (e.g., different sections of cable), the Contractor shall request in writing the Engineer's approval for the first test occurrence of the series a minimum of 14 days prior to the requested test date, regardless of the notification requirements for subsequent test occurrences.

The Contractor shall provide all ancillary equipment, materials, diagnostic and test software, and computers as required in the approved test procedures.

All test results shall be documented in writing by the Contractor in accordance with the test procedure and submitted to the Engineer within seven (7) days of the completion of the test. Any given test session is considered incomplete until the Engineer has approved the documentation for that test session.

The Contractor shall provide test results documentation in electronic format and printed format (3 copies). Electronic formats shall be provided in both PDF and Microsoft Excel or other approved application. Printed copies shall be bound and organized by test, equipment type, and individual unit.

- Two sets are for the Traffic Engineering ITS Department
- One set is for the Engineer

All test results shall be provided in English units of measure.

All test results deemed by the Engineer to be unsatisfactorily completed shall be repeated by the Contractor, following all test requirements as defined elsewhere in this NTB and contract specifications. This shall include a request in writing for the Engineer's approval for the repeated test a minimum of 14 days prior to the requested test date, unless this requirement is waived by the Engineer. In the written request for each test occurrence that is a repeat of a previous test, the Contractor shall summarize the diagnosis and correction of each aspect of the previous test that was deemed unsatisfactory. Any revisions to the test procedures for a repeated test occurrence shall meet all requirements for the original test procedures, including review and approval by the Engineer.

The satisfactory completion of any test shall not relieve the Contractor of his responsibility to provide a completely acceptable and operating system that meets all requirements of this project.

It is possible for the Contractor to schedule multiple test dates and revise the actual test being performed on a particular day if; 1) the Engineer approves of the change, 2) all test scheduling requirements above have still been met for the actual test to be performed on the date, and 3) there is not an unreasonable change of location, time, duration, or requirement of the Engineer.

Factory Acceptance Test (FAT). FATs shall be conducted at the Manufacturer or Contractor's facility or at a facility acceptable to all parties prior to shipping from the factory. The goal of the FAT is to verify that the equipment meets the requirements of the specifications. All equipment to be utilized for this project shall be subject to tests that demonstrate the suitability of the design and manufacturing procedures and compliance with the contract requirements, unless an exception for a specific equipment item is granted by the Engineer. The tests shall be performed on production units identified to be delivered under this Contract. As a minimum, a FAT is required for each of the following project materials:

- Dynamic Message Signs

The FAT testing procedures and results for specifically identified materials shall demonstrate that all testing requirements as outlined within the contract (standard specifications, plans, special provisions, and notice to bidders) are met, including, but not limited to: functional/system performance requirements, electrical requirements, data transmission/communication requirements, safety/password requirements, environmental requirements, and interface requirements with other components of the project system.

The Engineer reserves the right to waive FATs which are deemed to be unnecessary and reserves the right to witness all FATs that are determined to be critical to the project. At the Engineer's discretion, the Engineer may be in attendance at the FAT for any units tested. The FAT for the first three (3) units shall be conducted during the same time period and shall be completed before additional units are produced.

The Engineer shall be notified a minimum of 45 calendar days in advance of such tests. Salary and travel expenses of the Engineer and his/her representatives will be the responsibility of the Department. In case of equipment or other failures that make a retest necessary, travel expenses associated with retests for the Engineer and his/her representatives shall be the responsibility of

the Contractor. The travel expenses shall include all costs associated with having a two-person Engineer review team on site, including but not limited to airfare, automobile rental, lodging, and per diem. These costs, excluding airfare, shall not exceed $500.00 per representative, per day. These costs shall be deducted from the payments due or charged to the withholding account of the Contractor when the project is terminated.

The vendor must complete the FAT on all remaining units on their own and submit documentation to the Engineer that the FATs were completed. The Engineer reserves the right to randomly attend those FAT tests.

No equipment for which a FAT is required shall be shipped to the project site without successful completion of factory acceptance testing as approved by the Engineer and the Engineer's approval to ship.

Bench Test Components (BTC). The Contractor shall perform a complete BTC on the lesser of the full contract quantity of units of equipment and materials or the number of units required as specified in this subsection below. The quantity listed in the subsection below is a "minimum" quantity and the Engineer reserves the right to require testing of additional quantities if the initial testing is not deemed adequate. The Contractor shall provide the testing location and facility, which shall be in Mississippi and within a 25-mile radius of the project limits. The test location must be approved by the Engineer as part of the BTC test procedure submittal.

The BTC shall demonstrate that all equipment and materials are in full compliance with all project requirements and works "out of the box" by visual inspection, setup and operation "on the bench", functional testing of the component including manufacturer's recommended startup diagnostics, and testing prior to any field installation of that equipment or material. Test results documentation shall be provided for each equipment item and material in the full contract quantity; test results documentation shall include the manufacturer's serial number and the project location ID for each item.

As a minimum, a BTC is required for each of the following project materials for quantities as shown.

- Closed Circuit Television Equipment, 4 PTZ units & 6 fixed units
- Dynamic Message Sign, 2 complete units of each type
- Travel Time Signs, 2 compete units
- Network Switches Type A, 4 units
- Network Switches Type B & F, 2 units each
- Network Switches, Type C, D, & E, 1 unit each
- ITS Radar Vehicle Detection Sensors, 6 units
- Highway Advisory Radios, 2 units
- Radio Interconnect System, 4 units of each type
- Bluetooth Detection System, 6 units
- DSRC devices, 6 units
- Roadway Weather Information System, 2 complete units
- Traveler Information Video Kiosk, 2 complete units

- Smart Work Zone System
  - Portable CCTV station, 2 complete units
  - Non-Intrusive Vehicle Detection Devices / Portable Traffic Sensors, 4 complete units
  - Highway Advisory Radio, 2 complete units
  - Portable Changeable Message Signs, 2 complete units
  - Portable Traffic Signal, 2 complete units
- Off-the-shelf and Vendor Software, all necessary
- Equipment Cabinet (Type A), 2 cabinets
- Equipment Cabinet (Type B), 4 cabinets
- Equipment Cabinet (Type C), 2 cabinets

Pre-Installation Tests (PIT). The Contractor shall perform Pre-Installation Tests (PIT) on all device quantities that are not included in the BTC. The Contractor shall provide the testing location and facility, which shall be within a 25-mile radius of the project limits or as approved by the Engineer. The test location must be approved by the Engineer as part of the PIT test procedure submittal. The PIT shall be a shortened version of the BTC to ensure the equipment will power up, operate, and was not damaged during shipment. The Engineer reserves the right to attend any PIT as desired; however, the contractor shall submit documentation of the PITs whether the Engineer is present or not. In addition to these requirements, see the DMS, TTS, and Fiber Optic Cable Special Provisions for more details.

Stand Alone Site Tests (SAT). The Contractor shall perform a complete SAT on all equipment and materials associated with the field device site, including but not limited to electrical service, conduit, pull boxes, communication links infrastructure (fiber, leased copper, wireless), cable, poles, camera lowering devices, device communication cables, cabinet apparatus, etc. The goal of the SAT is to verify that the equipment has been properly installed and commissioned according to the manufacturer requirements. A SAT shall be conducted at every field device site including communications hubs. A SAT shall be conducted for a fully installed and completed control center in the TMC as described in the TMC modification NTB. A SAT shall be conducted for all fiber optic infrastructure.

The SAT shall demonstrate that all equipment and materials are in full compliance with all project requirements, are fully functional as installed, and are in their final configuration. As part of this demonstration, SATs shall include but are not limited to the following:

- A visual inspection of the cabinet and all construction elements at the site to ensure they are compliant with the Specifications and have no physical damage or deformities.
- The inspection of the cabinet at each site shall include the functional test of all cabinet equipment, including circuit breaker, receptacles, fan and thermostat, lights, and door switches.
- Verify that manufacturer documentation for each device is present.
- A measurement of the DC power supply shall be made at the cabinet when it is operating under full load.
- Verify that all equipment has proper power, surge protector, and grounding connections.
- Inspect the integrity of all cable connections and terminations and verify that the cables are

connected and terminated as specified in the Plans.

The SATs for each site type shall include but are not limited to the following:

- *CCTV Stand Alone Site Test*: Shall be conducted at the CCTV Cabinet and shall demonstrate the complete operation of the CCTV, Network Switch, and the link(s) to any devices that are connected to the Power Supply in the CCTV Cabinet. The SAT shall include a 5-minute recording of each PTZ and Fixed camera showing the field of view and video quality. Two copies of the recording shall be provided to the Engineer on USB flash drives. The recording will start at the preset default position(s) and will demonstrate the full zoom capabilities of the cameras, as well as the full range of the pan and tilt functions of PTZ cameras. This recording shall be in a format playable with Windows Media Player or pre-approved by the Engineer.
- *ITS Communications HUT Stand Alone Site Test:* Shall be conducted at the HUT and shall demonstrate the complete operation of all equipment inside the HUT including Network Switches. This also includes visual inspection of the Site elements associated with the HUT.
- *ITS Termination Cabinet Stand Alone Site Test:* Shall be conducted at the termination cabinet and shall demonstrate the complete operation of all equipment inside the cabinet including Network Switches. This also includes visual inspection of the Site elements associated with the termination cabinet.
- *Radio Interconnect System Stand Alone Site Test:* Shall be conducted from the cabinets at both ends of the communications link (even if one end consists of existing equipment) and shall demonstrate that the radios, the antennas, the entire link, the Network Switch, and the transmission of video and/or data are fully operational. See Radio Interconnect Special Provision for more details.
- *Highway Advisory Radio Site Test:* Shall be conducted at the HAR cabinet, antenna, and advisory signs and shall demonstrate complete operation of recordings, transmissions, and remote flashing beacon unit(s). See HAR Special Provision for more details.
- *Fiber Optic Cable Stand Alone Site Test*: Shall be conducted at each Cabinet and at each HUB and shall include both power meter tests and OTDR tests. See Fiber Optic Special Provision for more details.
- *Conduit Detection Wire Stand Alone Site Test*: Shall be conducted at each pull box and shall demonstrate that a continuous run of conduit detection wire was installed between pull boxes, vaults, cabinets, and structures as required.
- *ITS Radar Vehicle Detection Stand Alone Site Test*: Shall be conducted at the IRVD Cabinet and shall demonstrate the complete operation, proper configuration, and verification of detection for each lane of traffic or zone of the IRVD unit(s).
- *BDS Stand Alone Site Test*: Shall be conducted at the Device Cabinet and shall demonstrate the complete operation and proper configuration of the unit(s), verify network connection to the BDS through ping and telnet sessions from a remote PC, and confirm that the system is fully functional by detecting Bluetooth devices at a sample rate approved by the Engineer.
- *RWIS Stand Alone Site Test*: Shall be conducted at the RWIS Cabinet and shall demonstrate the complete operation and proper configuration of the RWIS and shall verify that the remote flashing beacon unit(s) on the warning signs are activated properly as

specified and will de-activate automatically without renewal at preset intervals.

- *SWZ Stand Alone Site Test*: Shall be conducted at each device at its initial location and shall demonstrate the complete operation and proper configuration of the device as described in the Smart Work Zone Special Provision and NTB. At any subsequent locations, at a minimum, a document verifying that the device is configured for the new location shall be submitted to the Engineer.
- *Kiosk Stand Alone Site Test*: Shall be conducted at the device, verify all required video layouts and displays, demonstrate all required software features, and demonstrate the complete operation of the device and Network Switch. Refer to the Traveler Information Video Kiosk specification for more details.
  DMS & TTS Stand Alone Site Test: Shall be conducted at the Device Cabinet, verify that all pixels are operational, verify that the sign can be controlled locally through both the serial and Ethernet ports, and demonstrate the complete operation of the device and Network Switch. The signs shall be delivered with and tested using default fonts and sizes that are provided by the MDOT ATMS drivers.

The Contractor shall request in writing the Engineer's approval for each test occurrence a minimum of 14 days prior to the requested test date. The Contractor shall arrange, at no additional expense to the State, the attendance of a qualified technical representative of the equipment manufacturer to attend each test until a minimum of two (2) sites of that type are approved.

Sub-System Test (SST). The Contractor shall perform an SST on each DMS and TTS to verify and document that all remote TTS and DMS functions and alarms are operational from the TMC.

An SST is required for at least ten percent (10%) of each of the following devices being placed for the project, taken by a random sampling: BDS, Network Switch, IRVD, HAR, Radio, CCTV, Video Vehicle Detection, and RWIS including beacons. The SST will require the Contractor to demonstrate and document that all functions and alarms are operational from the TMC.

An SST is required for each Traveler Information Kiosk in the project and will require the Contractor to demonstrate and document the features demonstrated in the Kiosk SAT using remote access from the TMC.

An SST is required for each Smart Work Zone device in the project and will require the Contractor to demonstrate and document the connection between the device and the central data/video collection site. Once a Smart Work Zone device has been verified to be properly configured, working, and communicating at its current location, the device can be utilized without further testing. The Conditional System Acceptance Test, Burn-in period, Final Inspection, or Final System Acceptance is not required for a device being solely utilized as part of the temporary Smart Work Zone System. Devices moved to a new location do require verification that they are still working as intended in the new location.

The Contractor shall coordinate the SST to be performed with the Project Engineer or designee present. The Contractor shall provide an SST plan to the Project Engineer for review and approval a minimum of two weeks in advance of tests being performed.

Conditional System Acceptance Test. The Contractor shall perform a complete conditional system acceptance test on all equipment and materials in the project. The Contractor shall not request the conditional system acceptance test until the SATs have been satisfactorily completed, all as-built documentation has been submitted and approved, and all other project work has been completed to the satisfaction of the Engineer. Prior to a Conditional System Acceptance Test, the Contractor shall provide advance notice of and written test results documenting that the Contractor has performed a dry-run of the conditional system acceptance test. The Engineer reserves the right to attend a dry-run test session.

The Contractor shall coordinate the CSAT with the Engineer. The Contractor shall provide a CSAT plan to the Engineer and be approved a minimum of fourteen (14) calendar days in advance of tests being performed. The CSAT plan shall be inclusive of steps and procedures to be performed and scheduled times to perform test procedures.

The Contractor shall test all project systems simultaneously from the State TMC in a manner equivalent to the normal day-to-day operation of the system. The Conditional System Acceptance Test shall demonstrate that all equipment and materials in the network are in full compliance with all project requirements and fully functional as installed and in final configuration, communicating with and being controlled through the control center at the State TMC. If pre-processing systems (e.g., edge computing) or post-processing systems (e.g., video image processing and analytics, detection in one device triggering an alarm or event in another device, etc.) are present, these shall be tested, verified, and documented as working as intended during the CSAT. Edge computing is where data-handling activities, such as analysis and event-triggering, takes place near the physical location that the data is collected.

The Engineer reserves the right to require, at no additional expense to the State, the attendance of a qualified technical representative of the equipment and/or software manufacturers to attend any given Conditional System Acceptance Test.

Upon completion and full approval of the Conditional System Acceptance Test for all equipment in all phases, Conditional System Acceptance will be given and the Burn-in Period will begin.

Burn-In Period. Following the Engineer's written notice of successful completion of the Conditional System Acceptance Test, the entire newly installed system must operate successfully for a thirty (30) day burn-in period. The Contractor shall be responsible for the full maintenance of the newly installed equipment during the burn-in period. This maintenance includes all troubleshooting and repairs as well as providing preventive maintenance that meets the equipment manufacturer's recommendations. However, no separate payment will be made during the burn-in period. Successful completion of the burn-in period will occur at the end of thirty (30) complete days of operation without a system failure attributable to hardware, software or communications components. Each system failure during the burn-in period will require an additional thirty (30) days of successful operation prior to being eligible for Final Acceptance (i.e., if the initial burn-in period is thirty (30) days and there are two (2) system failures during this time, the burn-in period would be increased to ninety (90) days).

Burn-In General Requirements:

- Determination of a system failure shall be at the sole discretion of the Engineer.
- System failure is defined as a condition under which the system is unable to function as a whole or in significant part to provide the services as designed. While a single component failure will not constitute a system failure, chronic failure of that component or component type may be sufficient to be considered a system failure. Chronic failure of a component or component type is defined as three (3) or more failures for the same component during the burn-in period.
- Components are defined as contract items or major material elements in a contract item. For electrical and electronic contract items, components are defined as the complete assembly of materials that makes up the contract item.
- Specifically exempted as system failures are failures caused by accident, acts of God, or other external forces that are beyond the control of the Contractor. However, failure of the contractor to respond to the repair request for that failure within 24 hours may be considered a system failure.
- The Department will advise the Contractor in writing when it considers that a system failure has occurred or chronic failure exists.
- If multiple system and/or chronic failures continue to occur throughout the burn-in period due to a single component type, the Contractor may be required to replace all units of that component type with a different model or manufacturer.
- The Contractor shall document all failures and subsequent diagnosis and repair. The repair documentation shall include as a minimum:
    - Description of the problem
    - Troubleshooting and diagnosis steps
    - Repairs made
    - List of all equipment and materials changed including serial numbers.
    - Update of the equipment inventory where needed.
    - The Contractor shall provide the repair documentation to the Engineer within two (2) days of completing the repair; failure to provide acceptable documentation as required shall be reason to not approve the repair as complete. The Engineer will provide acceptance or rejection of the repair and documentation within seven (7) days of receiving the repair documentation.
    - The Engineer reserves the right to require, at no additional expense to the State, the presence of a qualified technical representative of the equipment and/or software manufacturers as related to the diagnosis and/or repair of any system failure.
- During the burn-in period, the Contractor shall perform incidental work such as touching up, cleaning of exposed surfaces, leveling and repair of sites, sodding/grassing and other maintenance work as may be deemed necessary by the Engineer to ensure the effectiveness and neat appearance of the work sites.
- During the burn-in period, the Engineer shall maintain a "burn-in period punch list" that contains required Contractor actions but that the Engineer does not define as a system failure. Each burn-in period punch list action item shall be completed by the Contractor to the Engineer's satisfaction within seven (7) days of Contractor notification of the action item.
- During the burn-in period, the Contractor is required to meet the following response times

once notified there is a problem. A response is defined as being on-site to begin diagnosing the problem.
    - Monday thru Friday: The Contractor shall respond no later than 9:00 a.m. the following morning after being notified.
    - Weekends: If the Contractor is notified on Friday afternoon or during the weekend, the Contractor shall respond by 9:00 a.m. on Monday morning.
- During the burn-in period, the Contractor shall provide all labor, materials, equipment and replacement parts to completely maintain, troubleshoot and repair all items installed under this contract. No separate payment will be made for any labor, materials, equipment, or replacement parts needed during the burn-in period.
- The overall burn-in period will be considered complete upon the successful completion of the burn-in time periods, the Engineer's acceptance of all repairs and repair documentation, completion of all burn-in period punch list actions, and a final inspection as described below.

Contract time will not cease during the burn-in period(s). Contract time for the burn-in period was considered when determining the original contract time.

Final Inspection. Upon successful completion of the burn-in period, the entire project shall be eligible for Final Inspection. The Final Inspection will be conducted provided the burn-in period has demonstrated the entire system is operating successfully. The Final Inspection shall include but is not limited to:

1. monitoring of all system functions at the State TMC to demonstrate the overall system is operational
2. a field visit to each site to ensure all field components are in their correct final configuration
3. verification that all burn-in punch list items have been completed
4. verification that all final cleanup requirements have been completed
5. approval of final as-built documentation

Prior to conducting the Final Inspection, the burn-in period shall demonstrate that all requirements defined in the specifications have been met, including, but not limited to: functional/system performance requirements, electrical requirements, data transmission/communication requirements, safety/password requirements, environmental requirements, and interface requirements with other components of the system.

The Contractor shall request in writing the Engineer's approval to start the Final Inspection a minimum of 14 days prior to the requested start date. The Engineer reserves the right to reschedule the start date if needed. The start date for the Final Inspection cannot be prior to the successful completion of the overall burn-in period.

An unsuccessful or incomplete Final Inspection shall require a new Final Inspection after the Contractor has made the necessary corrections. Up to 14 days shall be allowed for the Engineer to conduct a Final Inspection. The presence of the MDOT ITS Engineer or his/her designee is required during the final inspection.

The Engineer reserves the right to require, at no additional expense to the State, the attendance of a qualified technical representative of the equipment and/or software manufacturers to attend a portion of a Final Inspection.

The Contractor shall be responsible for the full maintenance of all project equipment and materials during the entire time period from the successful completion of the burn-in period until Final System Acceptance is granted.

Final System Acceptance. Upon successful completion of the Final Inspection and all other items of work on the project, the Engineer will grant Final System Acceptance in accordance with Subsection 105.20 of the Standard Specifications.

Beneficial Use of Dynamic Message Signs During Construction. Each DMS shall be roadside controllable (by sign vendor software) within 30 days of attachment to structures (visible to motorists). The Contractor's construction schedule shall clearly identify when installation of the signs over the roadway shall occur, and when roadside control shall be established for each sign. The Contractor shall not install a DMS over the roadway until all ancillary and infrastructure elements, including cabinets, controllers, conduits, cabling, etc. necessary to operate the sign are in place and functional. Once roadside controllable, the Contractor shall display emergency, special event, construction, safety or traveler information messages approved by MDOT, only when requested by MDOT, at no additional cost to MDOT. Normal diagnostic messaging for the purpose of installation and testing shall be determined by the Contractor but shall not be allowed to the extent that excessive power consumption or distraction to motorists occurs as determined by the Engineer. Any beneficial use of the signs to MDOT and the public prior to Final Acceptance does not constitute MDOT acceptance or waive any Contractor testing requirements. The cost that may be incurred by the Contractor to display messages as described above during this construction contract shall be considered incidental and included in the cost of other items.

Warranties

The following components of the Project shall be warranted against manufacturing defects and workmanship for a period of at least one (1) year:

- Radio interconnect system components as listed under SP 907-662-2
- Layer 2, Type A; Layer 3, Type C, Type C4, Type E1, and Type E2 Network Switches; and Network Terminal Server & Network Cellular Modem as listed under SP 907-663-5
- Communication Node Hut & Hut Modifications under SP 907-664-4
- Video Communication Equipment components under SP 907-665-1
- Bluetooth Detection System components under SP 907-666-3
- Roadway Weather Information System & Warning Signs with Flashing Beacon under SP 907-670-3
- Kiosk Monitoring Camera under SP 907-671-1
- Travel Time Sign under SP 907-674-1
- ITS Radar Vehicle Detector under SP 907-641-2
- On Street Video Equipment under SP 907-650-4;
- Highway Advisory System components under SP 907-655-2;
- Dynamic Message Signs under SP 907-656-1.

The following components of the Project shall be warranted against manufacturing defects and workmanship for a period as listed below for each respective item from the date of Final Maintenance Release.

- *Fiber Optic Cable*: Ten (10) year warranty on materials and workmanship
- *Traveler Information Video Kiosk*: Two (2) year extended warranty on materials/hardware
- *TMC Modification*: Two (2) year warranty on hardware and one (1) year warranty on software
- *Type C1, C2, & C3 Network Switches*: Five (5) year warranty on hardware
- *Type D, E, & F Network Switches*: Five (5) year warranty on hardware

The Contractor shall supply the warranties in writing with the Final Maintenance Release date documented on them. These warranties shall cover complete replacement at no charge for the equipment. The Contractor will be responsible for all labor, shipping, insurance and other charges until Final System Acceptance. Equipment covered by the manufacturers' warranties shall have the registration of that component placed in the Department's name prior to Final Inspection. The Contractor is responsible for ensuring that the vendors or manufacturers supplying the components and providing the equipment warranties recognize MDOT as the original purchaser and owner/end user of the components from new.

During the warranty period, the supplier shall repair or replace with new material of equal or greater kind and quality and meeting all of the applicable specifications herein, at no additional cost to the State, any product containing a warranty defect, provided the product is returned postage-paid by the Department to the supplier's factory or authorized warranty site. Products repaired or replaced under warranty by the supplier shall be returned prepaid by the supplier. During the warranty period, technical support shall be available from the Contractor via telephone within four (4) hours of the time a call is made by the Department. If it is deemed necessary by the Engineer, technical support shall be available from factory certified personnel of the supplier via telephone within eight (8) hours of the time of the initial call made by the Department. During the warranty period, updates, patches, performance improvements, and corrections to all software and firmware used during the project shall be made available to the Department by the supplier at no additional cost.

Training

After the Stand Alone Site Tests have been conducted but prior to Conditional System Acceptance, the Contractor shall provide separate training sessions for each subsystem training pay item included in the project. The training sessions may require multiple classes as noted below) and shall accommodate from six (6) to twelve (12) personnel per class. Additional sessions for additional personnel may be required if the make and model of the subject component is not currently in the MDOT system.

The training must include formal classroom and "hands-on" operations training with a complete demonstration of the configuration, operation, and capabilities of each component in the system. The training should also consist of a hands-on demonstration of all software configuration and functionality where applicable. Each training day shall include a mixture of classroom style

training in equipment operations, hands-on operator training using the same models of equipment furnished for the project, and question and answer sessions.

During the burn-in period, the Contractor shall also provide two (2) identical non-consecutive training sessions on the maintenance of the overall system. The training shall be provided for at least ten (10) personnel with individual copies of all training materials provided to each participant. The training must include both classroom style training and hands-on training in the field of the maintenance and troubleshooting procedures required for each component. Additional sessions for additional personnel may be required if the make and model of certain components are not currently in the MDOT system.

Prior to scheduling the training, the Contractor shall submit resume and references of the training instructor(s) to the Engineer for approval. The qualifications of the trainers must meet, at a minimum, the recommended qualifications of the equipment manufacturer with a minimum of four years of experience in training personnel. If qualified personnel are not on the Contractor's staff, a representative of the manufacturer shall provide the training.

The training shall be provided at an agreed upon location. If training requires travel on the part of training instructors, then the cost of travel shall be included.

The Contractor shall provide individual copies of documentation, training, and maintenance materials for each participant. These materials shall include detailed specifications and information pertaining to each device in the system. The documentation shall include details of the technical and operational aspects of the completed system. This shall include operational and maintenance manuals, system diagrams, cabling diagrams and mounting/positioning details. The Contractor shall supply emergency contact information and necessary procedures for obtaining vital replacement parts within a designated, agreed upon time frame.

The Contractor shall submit a detailed Training Plan including course agendas, detailed description of functions to be demonstrated, and a general schedule to the Engineer for approval within 90 days of Contract Notice-to-Proceed. The exact date of the training shall be submitted to the Engineer for approval at least four (4) weeks ahead of the date.

Grounding

The Contractor shall provide a grounding and lightning protection system to protect from electrical power surges caused by lightning or disruptions in the power supply system. Ground rods, ground conductor, lightning collectors and appurtenances shall be as detailed on the plans and as required by these specifications.

General. All non-current carrying metal parts of the site shall be grounded according to NEC specifications. In addition, all non-current carrying metal parts shall have a voltage potential of zero relative to reference ground. This reference ground shall be achieved via the equipment-grounding conductor.

Support cable, metallic cable sheaths, conduit, metal poles, pedestals, and communication building shall be made mechanically and electrically secure and grounded. Bonding and grounding jumpers

shall be properly sized according to the NEC and in no case shall they be smaller than a #6 AWG copper wire. Ground pole-mounted accessories to the pole. Equipment on wood poles shall be grounded.

Permanently ground the poles by bonding the No. 6 AWG solid copper wire to a separate ground rod.

Metal raceways, metal enclosures of electrical devices, lighting fixtures, panelboards, and other non-current carrying metallic parts of equipment shall be securely grounded.

Ground rods shall be installed according to plan details. A length of copper conductor shall be attached to the ground rod, utilizing the specified grounding methods, and connected to the grounding system. Do not ground to a permanent water system instead of the driven ground rod. Ensure that grounding devices conform to the requirements of the NEC and NEMA.

Cabinet Grounding. A single-point grounding system shall be constructed.

All grounds for the cabinet shall be installed on the side of the building that utilities, communication cables, and fiber enter. All earth grounds shall be connected to this point, including the grounding system for Surge Protection Devices (SPD). All connections to SPDs shall be made according to the manufacturer's recommendations.

A single ground bus bar shall be mounted on the side of the cabinet wall adjacent to the power panel for the connection of AC neutral wires and chassis ground wires.

The Contractor shall ensure that communication cables, AC power, emergency generator, and equipment frames are connected by the shortest practical route to the grounding system. The lead lengths from each device to the SPD shall be protected. Electrical continuity of all connections shall be verified. All non-conducting surface coatings shall be removed before each connection is made. Ground conductors shall be downward coursing, vertical, and as short and straight as possible. Sharp bends and multiple bends shall be avoided in grounding conductors.

Surge Suppressor

Surge protection device (SPD) shall be provided to protect electronics from lightning, transient voltage surges, and induced current. All SPDs shall be installed at the top and bottom of each pole to provide reliable lightning protection. SPDs shall be installed on all power, data, video and any other conductive circuit.

SPD for 120 Volt or 120/240 Volt Power. A SPD shall be installed at the utility disconnect to the cabinet. The SPD at the utility disconnect shall include L-N, L-G, and N-G protection. The SPD shall meet the requirements of UL 1449, Third Edition and be listed by a NRTL.

A SPD shall be provided where the supply circuit enters the cabinet. The SPD shall be located on the load side of the main disconnect and ahead of any and all electronic devices and connected in parallel with the AC supply. The SPD in the cabinet shall include L-N, L-G, and N-G protection. The SPD shall meet the requirements of UL 1449, Third Edition and be listed by a NRTL.

The SPD shall have a visual indication system that monitors the weakest link in each mode and shows normal operation or failure status and also provides one set of normally open (NO)/normally closed (NC) Form C contacts for remote alarm monitoring. The enclosure for a SPD shall have a NEMA 4 rating

SPDs for Low-Voltage Power, Control, Data and Signal Systems. A specialized SPD shall be installed on all conductive circuits including, but not limited to, data communication cables, coaxial video cables, and low-voltage power cables. These devices shall comply with recommendations from the device manufacturer.

SPD at Point of Use. A SPD shall be installed at the point the ITS devices receive 120 volt power and connected in series with the circuits. SPDs shall be selected and installed according to recommendation from the device manufacturer. The units shall be rated at 15 or 20 amps load and configured with receptacles. These units shall have internal fuse protection and provide common mode (L+N-G) protection.

SPDs shall meet the requirements of UL 497B or UL 497C, as applicable, and are listed by a NRTL.

Solar Power Systems

The Contractor shall provide a solar power system meeting the following requirements:

1. The supplier shall provide documentation specifying approximate daily power generation, power consumption, storage capacity, and charge rates representing an optimal power source to the satisfaction and approval of the Project Engineer.
2. Shall include a solar controller with automatic battery temperature compensation and automatic charging circuitry to prevent overcharging.
3. The battery back-up system chargers shall meet all specified requirements while operating between -40 °C to +74 °C (-40 °F to +165 °F), and 95% relative humidity.
4. Shall include metering for voltage and charging current.
5. Solar panels shall be Jet Propulsion Laboratory Block-5 tested and approved.
6. Solar panels shall be compliant with IEC 61215 and IEEE 1262.
7. Solar panels shall be break-resistant and sealed.
8. Battery shall be maintenance-free, sealed, gel-cell.
9. The Contractor shall test the battery for faulty irregularities and provide documentation to the Project Engineer stating the battery's voltage, and resistance. The battery voltage and resistance shall meet the manufacturer's specifications.

The Solar Power Systems for each site type shall include but are not limited to the following:

- *HAR Flashing Beacons*:
  1. A performance design study shall be conducted and submitted for approval for the proposed solar power system. The solar power system shall be designed on the performance design study.
  2. The solar system shall, at a minimum, operate the flashing beacons continuously at

full power for at least three (3) days with no sunlight. This must be accomplished without an auxiliary generator or AC power connection.
3. Solar panels shall have a power rating of 80-watts.
4. The Solar power system shall include a separate aluminum NEMA 3R enclosure to house the battery. This enclosure shall be designed to provide protection from rain, sleet, snow and corrosion.
    a. The enclosure shall be constructed from 0.125" thick aluminum alloy type 5052- H32.
    b. The enclosure shall be lockable.
    c. The enclosure door shall include a EDPM rubber or equivalent closed-cell gasket

- *Type A BDS*:
    1. All solar panels shall be in accordance with UL1703, or equivalent.
    2. The solar cell shall have a minimum power capacity of 30 watts.
    3. The battery shall provide sufficient power for all BDS component operation for a minimum of 168 hours (7 days).
    4. Should solar power be specified with the Type A BDS, the NEMA 4 enclosure shall be sized appropriately for the solar power components.

Performance Design Study. A performance design study shall be conducted where required before the installation of a Solar Power System. The performance design study shall include, but is not limited to:

1. The daily Solar Insulation data averaged on a monthly basis.
2. The correct Tilt Angle for the solar array.
3. The daily Array Output, in Amp-Hours, averaged on a monthly basis.
4. The total Daily Load requirement, in Amp Hours, averaged on a monthly basis.
5. A monthly Loss of Load Probability (LOLP) of the designed power supply.
6. The number of Battery Reserve Days, averaged on a monthly basis.
7. The monthly Average Battery State of Charge.
8. The statistical Interval to Loss of Load, in years.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 - NOTICE TO BIDDERS NO. 4113 **CODE: (SP)**

DATE: **03/23/2022**

SUBJECT: **Unique Entity ID (SAM) Requirement for Federal Funded Projects**

Bidders are advised that the Prime Contractor must register and maintain a current registration in the System for Award Management (http://sam.gov) at all times during this project. Upon registration, the Contractor will be assigned a SAM Unique Entity ID.

Bidders are also advised that prior to the award of this contract, they MUST be registered, active, and have no active exclusions in the System for Award Management.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 - NOTICE TO BIDDERS NO. 4702 **CODE: (SP)**

DATE: 11/22/2022

SUBJECT: App for Traffic Control Reports

Bidders are advised that the Department has created a smart phone App for completing and submitting traffic control reports (Form CSD-762) required on this project. The Contractor who monitors traffic control activities and completes traffic control reports will be required to download and use this App when completing and submitting traffic control reports. The reports will then be readily available to all persons who need access to the forms. The App is free and is available for downloading at the following location.

https://extacctmgmt.mdot.state.ms.us/

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 - NOTICE TO BIDDERS NO. 5086 **CODE: (SP)**

DATE: 05/02/2023


SUBJECT: Detail of Square Tube Sign Posts

Bidders are advised that the following drawings shall be used in the manufacture and installation of square tube sign posts, unless otherwise directed by the Engineer.

FMS CON:


STATE	PROJECT NO.
MISS.	

FLAT PANEL SIGN BRACE




6061-T6 ALUMINUM ALLOY; 2" MOUNTING SURFACE x 7/8" DEPTH x 1/8" NOMINAL WALL THICKNESS. 3/8" HOLES ON 1" CENTERS, CENTERED ALONG ENTIRE LENGTH OF THE BRACE. A MINIMUM OF TWO HORIZONTAL BRACES MUST BE USED.

SIGN DRIVE RIVET w/WASHER




3/8" ALUMINUM SHELL / STEEL CORE RIVET WITH NYLON WASHER. MAXIMUM DISTANCE BETWEEN RIVETS SHOULD BE 12". WASHER MUST BE PRE-INSTALLED AND FIT INTO SIGN BRACE TO SECURE ALUMINUM SIGN PANEL. ALL EXTRUDED PANEL SIGNS SHALL USE 3/16"x3/8" GRIP RANGE ALUMINUM POP RIVITS (#66).

FLAT PANEL SIGN CLAMP




MATERIALS: 1.4" WIDE x 11ga. TYPE 304, #2B FINISHED STAINLESS STEEL BRACKET. INCLUDES STAINLESS STEEL 3/8"-16 x 2" CARRIAGE BOLT AND SERRATED FLANGED NUT. ONE CLAMP REQUIRED FOR EACH BRACE TO POST JUNCTION.

EXTRUDED PANEL SIGN CLAMP




MATERIALS: 1.4" WIDE x 11ga. TYPE 304, #2B FINISHED STAINLESS STEEL BRACKET. INCLUDES STAINLESS STEEL 3/8"-16 x 2" CARRIAGE BOLT AND SERRATED FLANGED NUT. ONE CLAMP REQUIRED FOR EACH BRACE TO POST JUNCTION.


POST CAP



MADE OF 16GA PREGALVANIZED STEEL WITH AN ID CAPABLE OF FITTING INTO THE INSIDE OF A 2-1/2" SQUARE STEEL POST WITHOUT ANY FASTENERS. A CAST ALUMINUM FRICTION FIT CAP MAY ALSO BE USED.

SIGN POSTS






example slip base assembly (detailed below)

NOTES:


A. CONCRETE FOOTING MUST BE 12" DIAMETER x 36" DEEP.
B. BRASS SHIMS MAY BE USED BETWEEN SLIP PLATES TO LEVEL THE UPPER SLIP PLANE.
C. SLIP BASE IS FHWA ACCEPTED, MEETING CURRENT AASHTO & NCHRP 350 REQUIREMENTS.
D. SIGN BRACE CLAMPS ALLOW SIGN BRACE TO BE ADJUSTED UP, DOWN, LEFT OR RIGHT IN ORDER TO ACHIEVE PERFECT POSITION OF SIGN PANEL.
E. USE INSTALLATION INSTRUCTION RT280U-SQ1.
F. PRODUCT MUST MEET FHWA's MADE IN AMERICA CLAUSE.
G. PAID BY LENGTH OF POST, 36" STUB TO BE ABSORBED.

2-1/2" SQUARE POST RECEIVER




RECEIVER TO BE CAST FROM DUCTILE IRON ASTM A536 CLASS 65-45-12, GALVANIZED PER ASTM A153.

POST LOCKING WEDGE



LOCKING WEDGE FORGED FROM SAE 1035 STEEL AND GALVANIZED PER ASTM A153.

UNIBASE ANCHOR STUB




35" UNIBASE ANCHOR A500 GRADE B TUBE WELDED TO A572 SLIP PLATE. GALVANIZED PER ASTM A153.

SIGN CENTROID	2-1/2" x 10ga PSST	2-1/2" x 10ga & 2-3/16" x 10ga Inserted PSST	Sign Bracing**
16'	24.82	43.46	18" maximum distance between braces
15'	26.48	46.36	18" maximum distance between braces
14'	28.38	49.66	18" maximum distance between braces
13'	30.56	53.48	18" maximum distance between braces
12'	33.10	57.94	18" maximum distance between braces
11'	36.12	63.20	18" maximum distance between braces


* based on two legs per sign
** Minimum of two braces per flat panel sign

NOTE: Sign area is in square feet.


SLIP PLATE DIMENSION



SURFACE MOUNT BASE



A572 SLIP PLATE WELDED TO A500 GRADE B TUBE WELDED TO A572 MOUNTING PLATE. GALVANIZED PER ASTM A153.



MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SIGN SUPPORT HARDWARE


2.5" SQUARE POST


PROJ. NO.:
COUNTY:


WORKING NUMBER: TSS-1
SHEET NUMBER

DATE: FILENAME: TSS-1.DGN
DESIGN TEAM: MDOT CHECKED: DATE: MAY 2021

REVISION BY

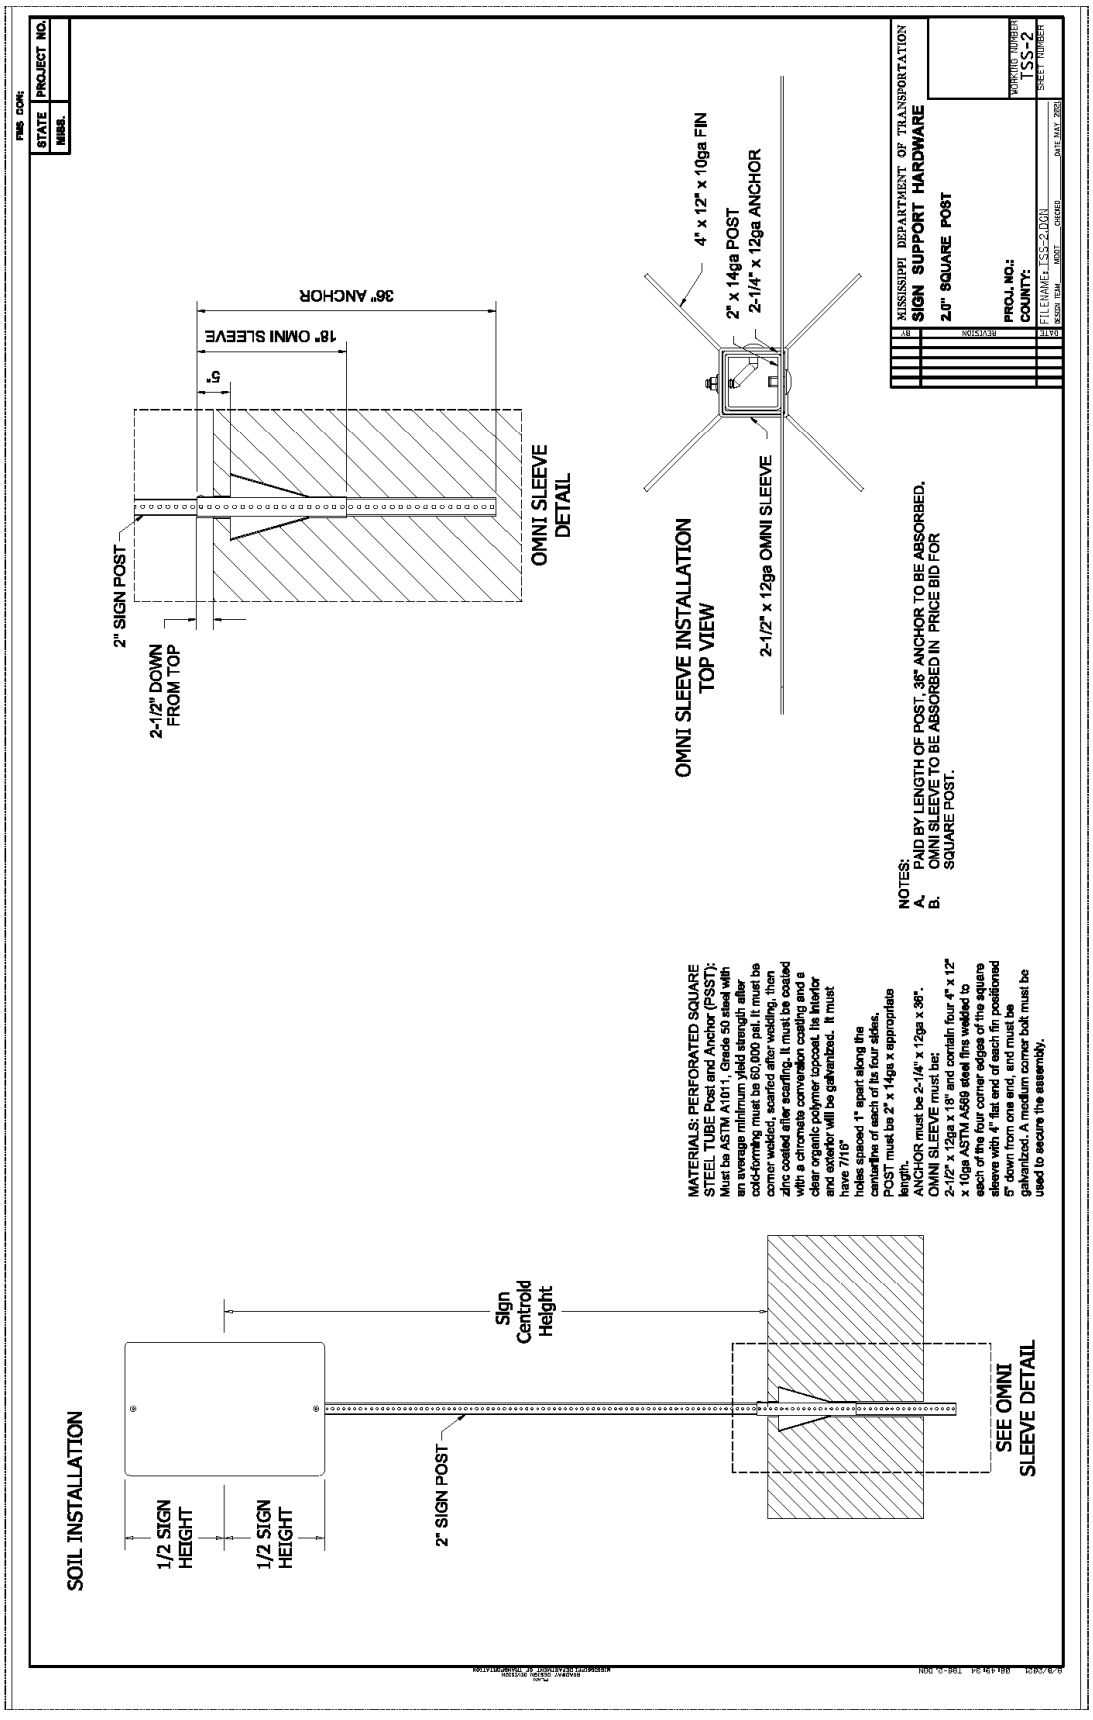
FHWA CON:
STATE
MISS.
PROJECT NO.
SOIL INSTALLATION
1/2 SIGN HEIGHT
1/2 SIGN HEIGHT
2" SIGN POST
Sign Centroid Height
SEE OMNI SLEEVE DETAIL
MATERIALS: PERFORATED SQUARE STEEL TUBE Post and Anchor (PSST): Must be ASTM A1011, Grade 50 steel with an average minimum yield strength after cold-forming must be 60,000 psi. It must be corner welded, scarfed after welding, then zinc coated after scarfing. It must be coated with a chromate conversion coating and a clear organic polymer topcoat. Its interior and exterior will be galvanized. It must have 7/16" holes spaced 1" apart along the centerline of each of its four sides.
POST must be 2" x 14ga x appropriate length.
ANCHOR must be 2-1/4" x 12ga x 36".
OMNI SLEEVE must be:
2-1/2" x 12ga x 18" and contain four 4" x 12" x 10ga ASTM A569 steel fins welded to each of the four corner edges of the square sleeve with 4" flat end of each fin positioned 5" down from one end, and must be galvanized. A medium corner bolt must be used to secure the assembly.
NOTES:
A. PAID BY LENGTH OF POST. 36" ANCHOR TO BE ABSORBED.
B. OMNI SLEEVE TO BE ABSORBED IN PRICE BID FOR SQUARE POST.
OMNI SLEEVE INSTALLATION TOP VIEW
4" x 12" x 10ga FIN
2" x 14ga POST
2-1/4" x 12ga ANCHOR
2-1/2" x 12ga OMNI SLEEVE
OMNI SLEEVE DETAIL
36" ANCHOR
18" OMNI SLEEVE
5"
2" SIGN POST
2-1/2" DOWN FROM TOP
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
SIGN SUPPORT HARDWARE
2.0" SQUARE POST
REVISION
BY
DATE
PROJ. NO.:
COUNTY:
FILENAME: TSS-2.DGN
DESIGN ITEM
MDOT
CHECKED
DATE: MAY 2005
DRAWING NUMBER
TSS-2
SHEET NUMBER

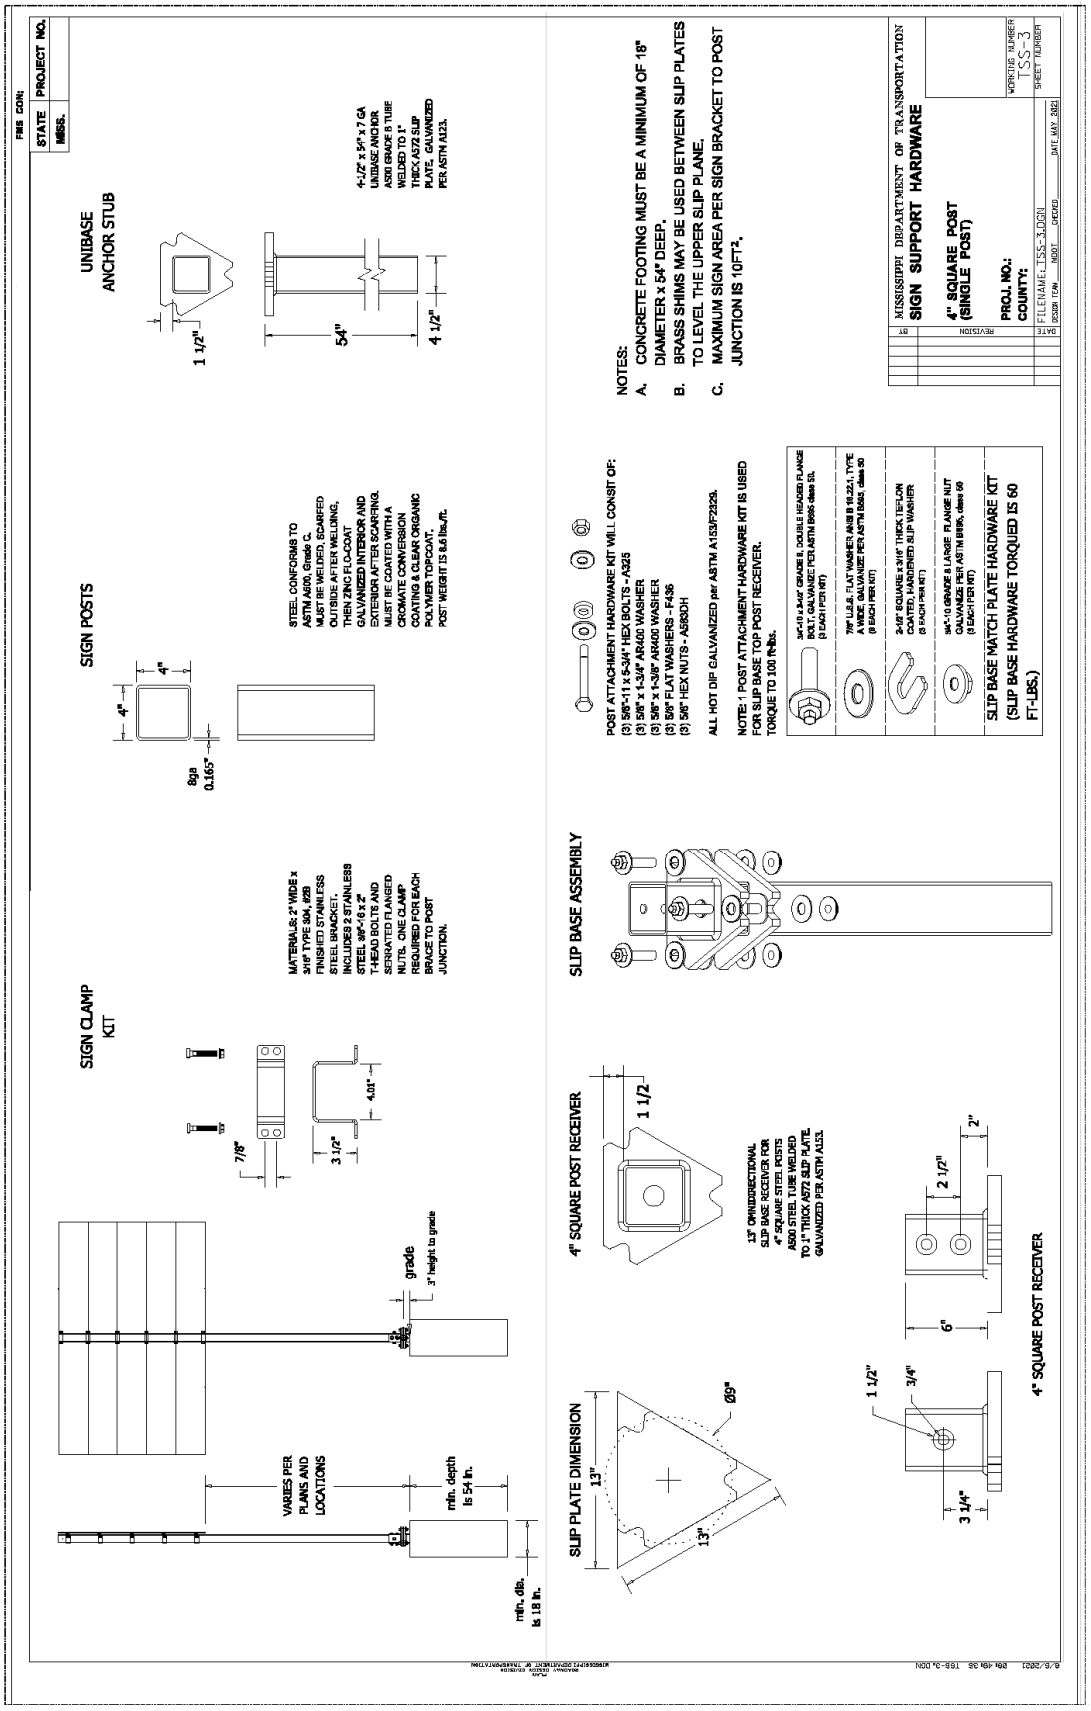
FHWA CON:
STATE
MISS.
PROJECT NO.
UNIBASE
ANCHOR STUB
1 1/2"
54"
4 1/2"
4-1/2" x 5/8" x 7 GA UNIBASE ANCHOR ASTM GRADE B TUBE WELDED TO 1" THICK A572 SLIP PLATE, GALVANIZED PER ASTM A123.
SIGN POSTS
4"
4"
8ga 0.165"
STEEL CONFORMS TO ASTM A500, Grade C. MUST BE WELDED, SCARFED OUTSIDE AFTER WELDING, THEN ZINC FLO-COAT GALVANIZED INTERIOR AND EXTERIOR AFTER SCARFING. MUST BE COATED WITH A CROMATE CONVERSION COATING & CLEAR ORGANIC POLYMER TOPCOAT. POST WEIGHT IS 8.6 lbs./ft.
SIGN CLAMP
KIT
MATERIAL-2" WIDE x 3/16" TYPE 304 #2B FINISHED STAINLESS STEEL BRACKET. INCLUDES 2 STAINLESS STEEL 3/8"-16 x 2" T-HEAD BOLTS AND SERRATED FLANGED NUTS. ONE CLAMP REQUIRED FOR EACH BRACE TO POST JUNCTION.
7/8"
3 1/2"
4.01"
SLIP BASE ASSEMBLY
POST ATTACHMENT HARDWARE KIT WILL CONSIST OF:
(3) 5/8"-11 x 5-3/4" HEX BOLTS - A325
(3) 5/8" x 1-3/4" AR400 WASHER
(3) 5/8" x 1-3/8" AR400 WASHER
(3) 5/8" FLAT WASHERS - F436
(3) 5/8" HEX NUTS - A563DH
ALL HOT DIP GALVANIZED per ASTM A153/F2329.
NOTE: 1 POST ATTACHMENT HARDWARE KIT IS USED FOR SLIP BASE TOP POST RECEIVER. TORQUE TO 100 ft/lbs.
3/4"-10 x 3-1/2" GRADE B, DOUBLE HEXAGED FLANGE BOLT, GALVANIZED PER ASTM B695 class 55. (3 EACH PER KIT)
7/8" U.S.S. FLAT WASHER ANSI B 18.22.1, TYPE A WIDE, GALVANIZED PER ASTM B695 class 55 (3 EACH PER KIT)
3-1/8" SQUARE x 3/16" THICK TEFLON COATED, HARDENED SLIP WASHER (3 EACH PER KIT)
3/4"-10 GRADE A LARGE FLANGE NUT GALVANIZED PER ASTM B695, class 55 (3 EACH PER KIT)
SLIP BASE MATCH PLATE HARDWARE KIT
(SLIP BASE HARDWARE TORQUED IS 60 FT-LBS.)
NOTES:
A. CONCRETE FOOTING MUST BE A MINIMUM OF 18" DIAMETER x 54" DEEP.
B. BRASS SHIMS MAY BE USED BETWEEN SLIP PLATES TO LEVEL THE UPPER SLIP PLANE.
C. MAXIMUM SIGN AREA PER SIGN BRACKET TO POST JUNCTION IS 10FT².
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
SIGN SUPPORT HARDWARE
4" SQUARE POST
(SINGLE POST)
PROJ. NO.:
COUNTY:
FILENAME: TSS-3.DGN
DESIGN TEAM
MOOT
CHECKED
DATE MAY 2021
WORKTAB NUMBER
TSS-3
SHEET NUMBER
DATE
REVISION
BY
SLIP PLATE DIMENSION
13"
13"
69°
4" SQUARE POST RECEIVER
1 1/2
13" OMNIDIRECTIONAL SLIP BASE RECEIVER FOR 4" SQUARE STEEL POSTS A500 STEEL TUBE WELDED TO 1" THICK A572 SLIP PLATE, GALVANIZED PER ASTM A123.
4" SQUARE POST RECEIVER
1 1/2"
3/4"
6"
2 1/2"
2"
3 1/4"
VARIES PER PLANS AND LOCATIONS
grade
3" height to grade
mtn. depth is 54 in.
mtn. dia. is 18 in.

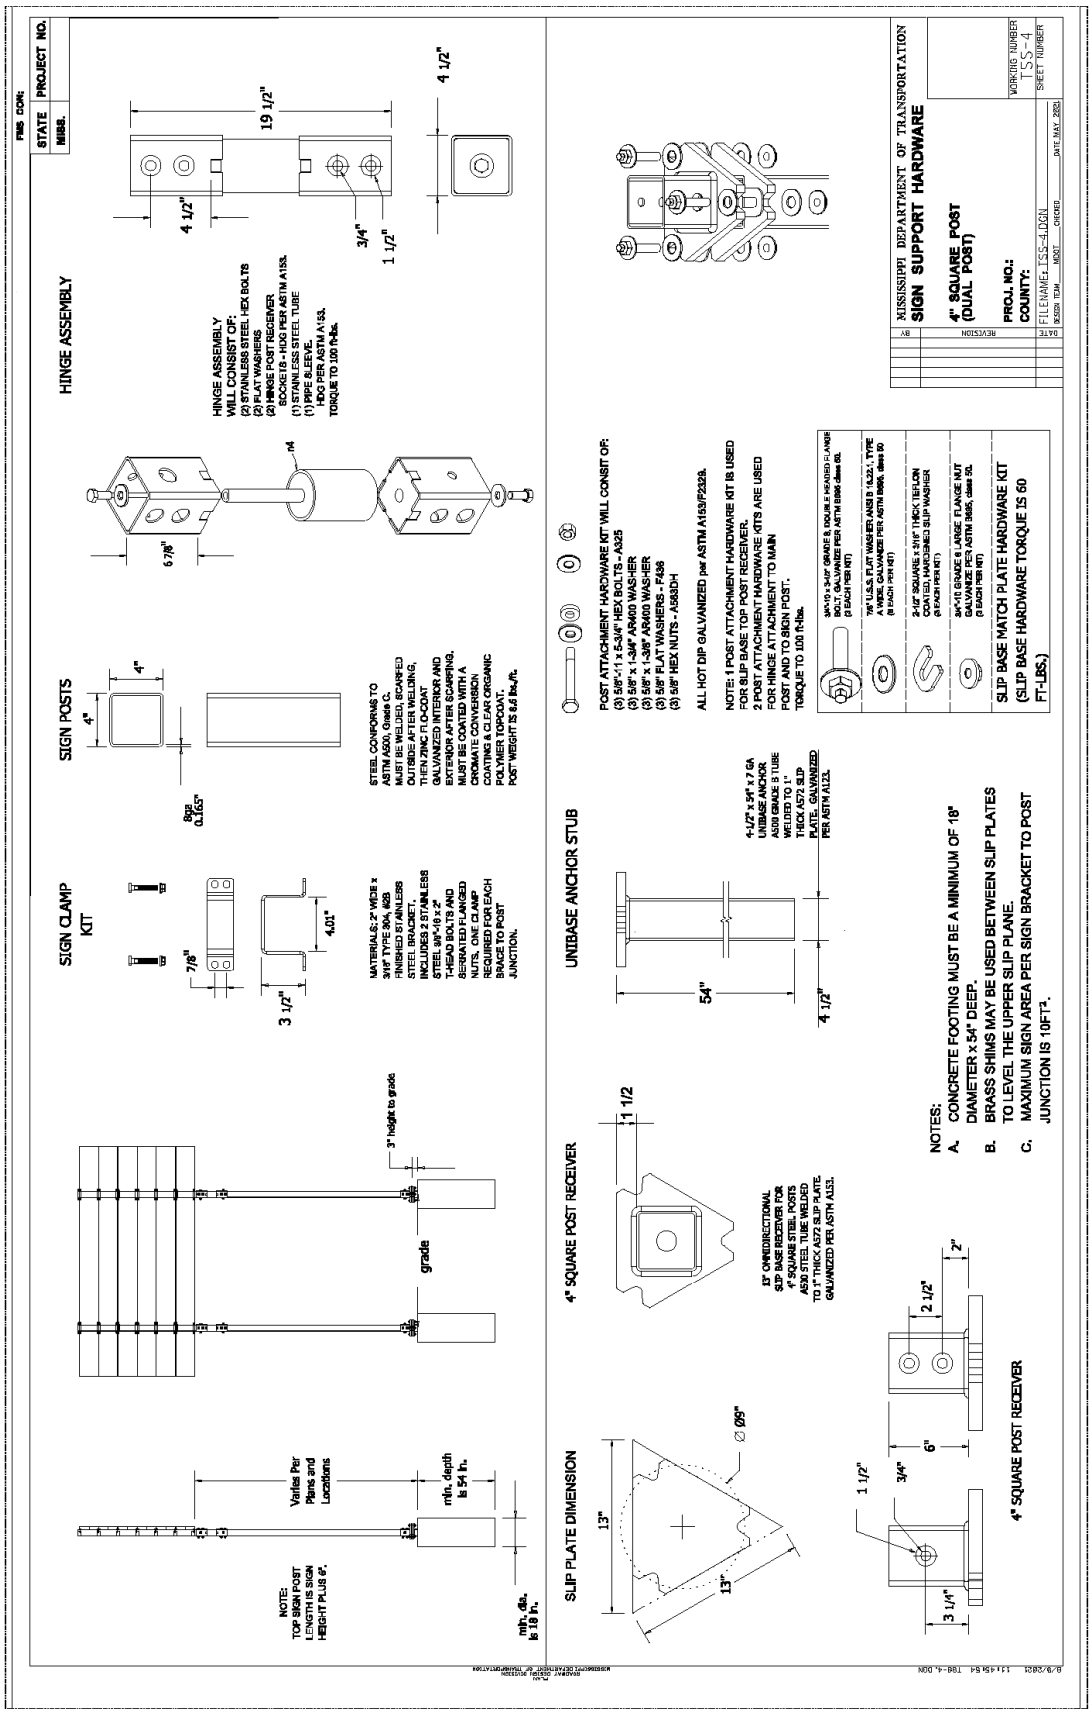
HINGE ASSEMBLY
SIGN POSTS
SIGN CLAMP KIT
UNIBASE ANCHOR STUB
SLIP PLATE DIMENSION
4" SQUARE POST RECEIVER
4" SQUARE POST RECEIVER
NOTES:
A. CONCRETE FOOTING MUST BE A MINIMUM OF 18" DIAMETER x 54" DEEP.
B. BRASS SHIMS MAY BE USED BETWEEN SLIP PLATES TO LEVEL THE UPPER SLIP PLANE.
C. MAXIMUM SIGN AREA PER SIGN BRACKET TO POST JUNCTION IS 10FT².
SLIP BASE MATCH PLATE HARDWARE KIT (SLIP BASE HARDWARE TORQUE IS 60 FT-LBS.)
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
SIGN SUPPORT HARDWARE
4" SQUARE POST (DUAL POST)
PROJ. NO.:
COUNTY:
WORKING NUMBER TSS-4
SHEET NUMBER
FILENAME: TSS-4.DGN
DATE MAY, 2021

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 - NOTICE TO BIDDERS NO. 5551 **CODE: (IS)**

DATE: **12/06/2023**

SUBJECT: **Federal Bridge Formula**

Bidders are hereby advised that the latest revision of Federal Highway Administration Publication No. FHWA-HOP-06-105, **BRIDGE FORMULA WEIGHTS**, dated August 2006, is made a part of this contract when applicable.

Prior to the preconstruction conference, the Contractor shall advise the Engineer, in writing, what materials, if any, will be delivered to the jobsite via Interstate route(s).

Copies of the **BRIDGE FORMULA WEIGHTS** publication may be obtained by contacting:

Federal Highway Administration
400 7th Street, SW
Washington, DC 20590
(202) 366-2212

or

https://ops.fhwa.dot.gov/freight/publications/brdg_frm_wghts/

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 – NOTICE TO BIDDERS NO. 5570 **CODE: (SP)**

DATE: 07/28/2025

SUBJECT: Special Provisions Related to Concrete

Bidders are hereby advised that this contract contains one or more of the following **new** Special Provisions related to concrete:

Special Provision No. 907-501-1, Subject: Concrete Pavement
Special Provision No. 907-502-1, Subject: Concrete Bridge End Pavement
Special Provision No. 907-503-1, Subject: Replacement of Concrete Pavement
Special Provision No. 907-504-4, Subject: Fiber-reinforced Concrete Pavement
Special Provision No. 907-601-1, Subject: Structural Concrete
Special Provision No. 907-605-1, Subject: Underdrains
Special Provision No. 907-701-4, Subject: Hydraulic Cement
Special Provision No. 907-799-1, Subject: Hydraulic Cement Concrete Mixtures
Special Provision No. 907-803-6, Subject: Deep Foundations
Special Provision No. 907-804-13, Subject: Concrete Bridges and Structures
Special Provision No. 907-804-14, Subject: Bridge Deck Overlay

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 – NOTICE TO BIDDERS NO. 7578 **CODE: (IS)**

DATE: 12/16/2025

SUBJECT: Obligation Date


With respect to the obligation date referenced in Special Provision No. 907-700-2 (Materials and Tests), bidders are advised that this project will be obligated on or after October 1, 2025, and before October 1, 2026.


MISSISSIPPI DEPARTMENT OF TRANSPORTATION


SUPPLEMENT TO NOTICE TO BIDDERS NO. 7624


DATE: **01/23/2026**


After the last drawing on page 33, add the following.

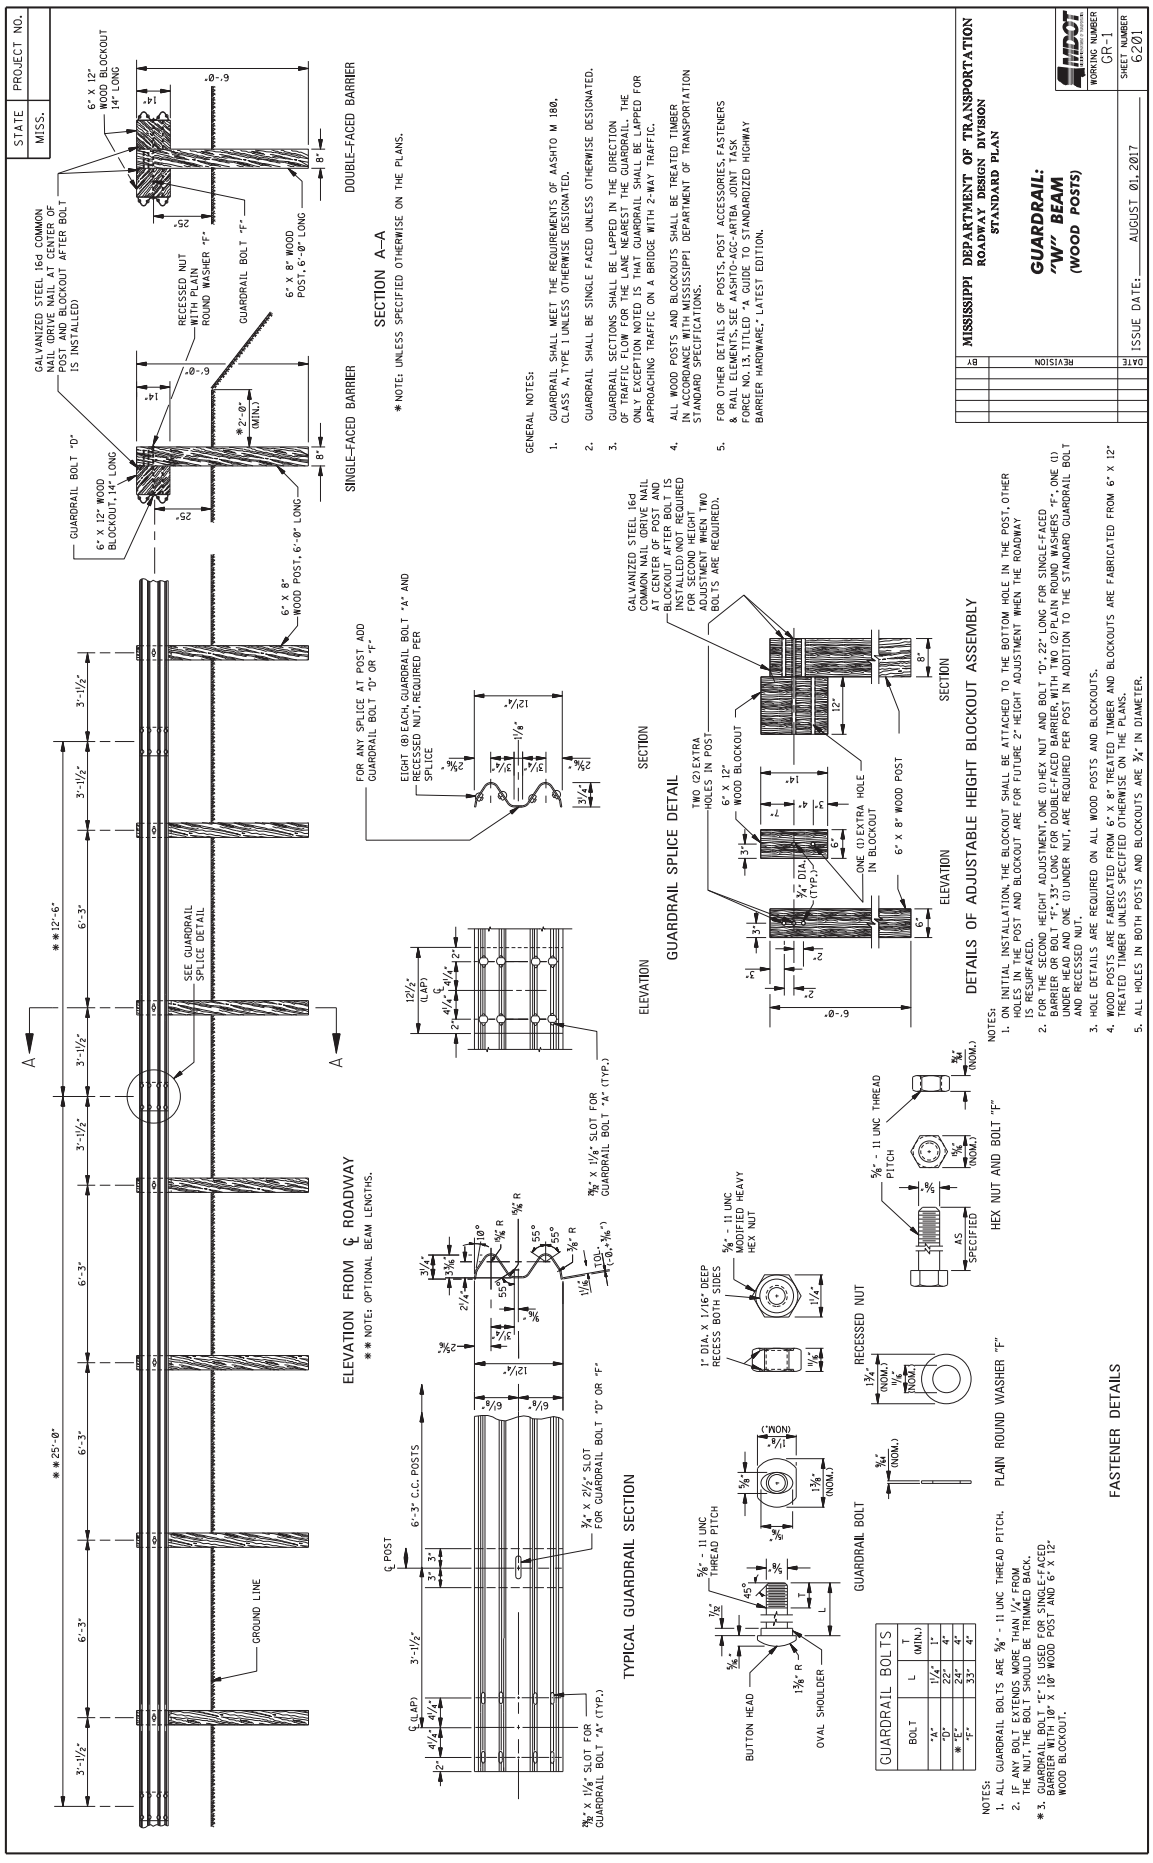

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
GUARDRAIL: "W" BEAM (WOOD POSTS)
WORKING NUMBER GR-1
SHEET NUMBER 6201
ISSUE DATE: AUGUST 01, 2017
BY REVISION DATE
GENERAL NOTES:
1. GUARDRAIL SHALL MEET THE REQUIREMENTS OF AASHTO M 180, CLASS A, TYPE I UNLESS OTHERWISE DESIGNATED.
2. GUARDRAIL SHALL BE SINGLE FACED UNLESS OTHERWISE DESIGNATED.
3. GUARDRAIL SECTIONS SHALL BE LAPPED IN THE DIRECTION OF TRAFFIC FLOW FOR THE LANE NEAREST THE GUARDRAIL. THE ONLY EXCEPTION NOTED IS THAT GUARDRAIL SHALL BE LAPPED FOR APPROACHING TRAFFIC ON A BRIDGE WITH 2-WAY TRAFFIC.
4. ALL WOOD POSTS AND BLOCKOUTS SHALL BE TREATED TIMBER IN ACCORDANCE WITH MISSISSIPPI DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS.
5. FOR OTHER DETAILS OF POSTS, POST ACCESSORIES, FASTENERS & RAIL ELEMENTS, SEE AASHTO-AGC-ARTBA JOINT TASK FORCE NO. 13, TITLED "A GUIDE TO STANDARDIZED HIGHWAY BARRIER HARDWARE," LATEST EDITION.
SINGLE-FACED BARRIER
DOUBLE-FACED BARRIER
SECTION A-A
*NOTE: UNLESS SPECIFIED OTHERWISE ON THE PLANS.
GALVANIZED STEEL 16d COMMON NAIL (DRIVE NAIL AT CENTER OF POST AND BLOCKOUT AFTER BOLT IS INSTALLED)
RECESSED NUT WITH PLAIN ROUND WASHER "F"
GUARDRAIL BOLT "F"
6" X 12" WOOD BLOCKOUT 14" LONG
6" X 8" WOOD POST, 6'-0" LONG
GUARDRAIL BOLT "D"
6" X 12" WOOD BLOCKOUT, 14" LONG
6" X 8" WOOD POST, 6'-0" LONG
ELEVATION FROM ℄ ROADWAY
** NOTE: OPTIONAL BEAM LENGTHS.
SEE GUARDRAIL SPLICE DETAIL
GROUND LINE
TYPICAL GUARDRAIL SECTION
℄ POST
6'-3" C.C. POSTS
℄ (LAP)
3/4" X 2 1/2" SLOT FOR GUARDRAIL BOLT "D" OR "F"
3/4" X 1 1/4" SLOT FOR GUARDRAIL BOLT "A" (TYP.)
FOR ANY SPLICE AT POST ADD GUARDRAIL BOLT "D" OR "F".
EIGHT (8) EACH GUARDRAIL BOLT "A" AND RECESSED NUT, REQUIRED PER SPLICE
3/4" X 1 1/8" SLOT FOR GUARDRAIL BOLT "A" (TYP.)
SECTION
ELEVATION
GUARDRAIL SPLICE DETAIL
GALVANIZED STEEL 16d COMMON NAIL (DRIVE NAIL AT CENTER OF POST AND BLOCKOUT AFTER BOLT IS INSTALLED) NOT REQUIRED FOR SECOND HEIGHT ADJUSTMENT WHEN TWO BOLTS ARE REQUIRED.
TWO (2) EXTRA HOLES IN POST
6" X 12" WOOD BLOCKOUT
ONE (1) EXTRA HOLE IN BLOCKOUT
6" X 8" WOOD POST
SECTION
ELEVATION
DETAILS OF ADJUSTABLE HEIGHT BLOCKOUT ASSEMBLY
NOTES:
1. ON INITIAL INSTALLATION, THE BLOCKOUT SHALL BE ATTACHED TO THE BOTTOM HOLE IN THE POST. OTHER HOLES IN THE POST AND BLOCKOUT ARE FOR FUTURE 2" HEIGHT ADJUSTMENT WHEN THE ROADWAY IS RESURFACED.
2. FOR THE SECOND HEIGHT ADJUSTMENT, ONE (1) HEX NUT AND BOLT "D", 22" LONG FOR SINGLE-FACED BARRIER OR BOLT "F", 33" LONG FOR DOUBLE-FACED BARRIER, WITH TWO (2) PLAIN ROUND WASHERS "F", ONE (1) UNDER HEAD AND ONE (1) UNDER NUT, ARE REQUIRED PER POST IN ADDITION TO THE STANDARD GUARDRAIL BOLT AND RECESSED NUT.
3. HOLE DETAILS ARE REQUIRED ON ALL WOOD POSTS AND BLOCKOUTS.
4. WOOD POSTS ARE FABRICATED FROM 6" X 8" TREATED TIMBER AND BLOCKOUTS ARE FABRICATED FROM 6" X 12" TREATED TIMBER UNLESS SPECIFIED OTHERWISE ON THE PLANS.
5. ALL HOLES IN BOTH POSTS AND BLOCKOUTS ARE 3/4" IN DIAMETER.
FASTENER DETAILS
1" DIA. X 1/16" DEEP RECESS BOTH SIDES
5/8" - 11 UNC MODIFIED HEAVY HEX NUT
5/8" - 11 UNC THREAD PITCH
BUTTON HEAD
OVAL SHOULDER
GUARDRAIL BOLT
RECESSED NUT
PLAIN ROUND WASHER "F"
HEX NUT AND BOLT "F"
GUARDRAIL BOLTS
BOLT | L | T (MIN.)
"A" | 11 1/2" | 1"
"D" | 22" | 4"
* "E" | 24" | 4"
"F" | 33" | 4"
NOTES:
1. ALL GUARDRAIL BOLTS ARE 5/8" - 11 UNC THREAD PITCH.
2. IF ANY BOLT EXTENDS MORE THAN 1/4" FROM THE NUT, THE BOLT SHOULD BE TRIMMED BACK.
* 3. GUARDRAIL BOLT "E" IS USED FOR SINGLE-FACED BARRIER WITH 10" X 10" WOOD POST AND 6" X 12" WOOD BLOCKOUT.

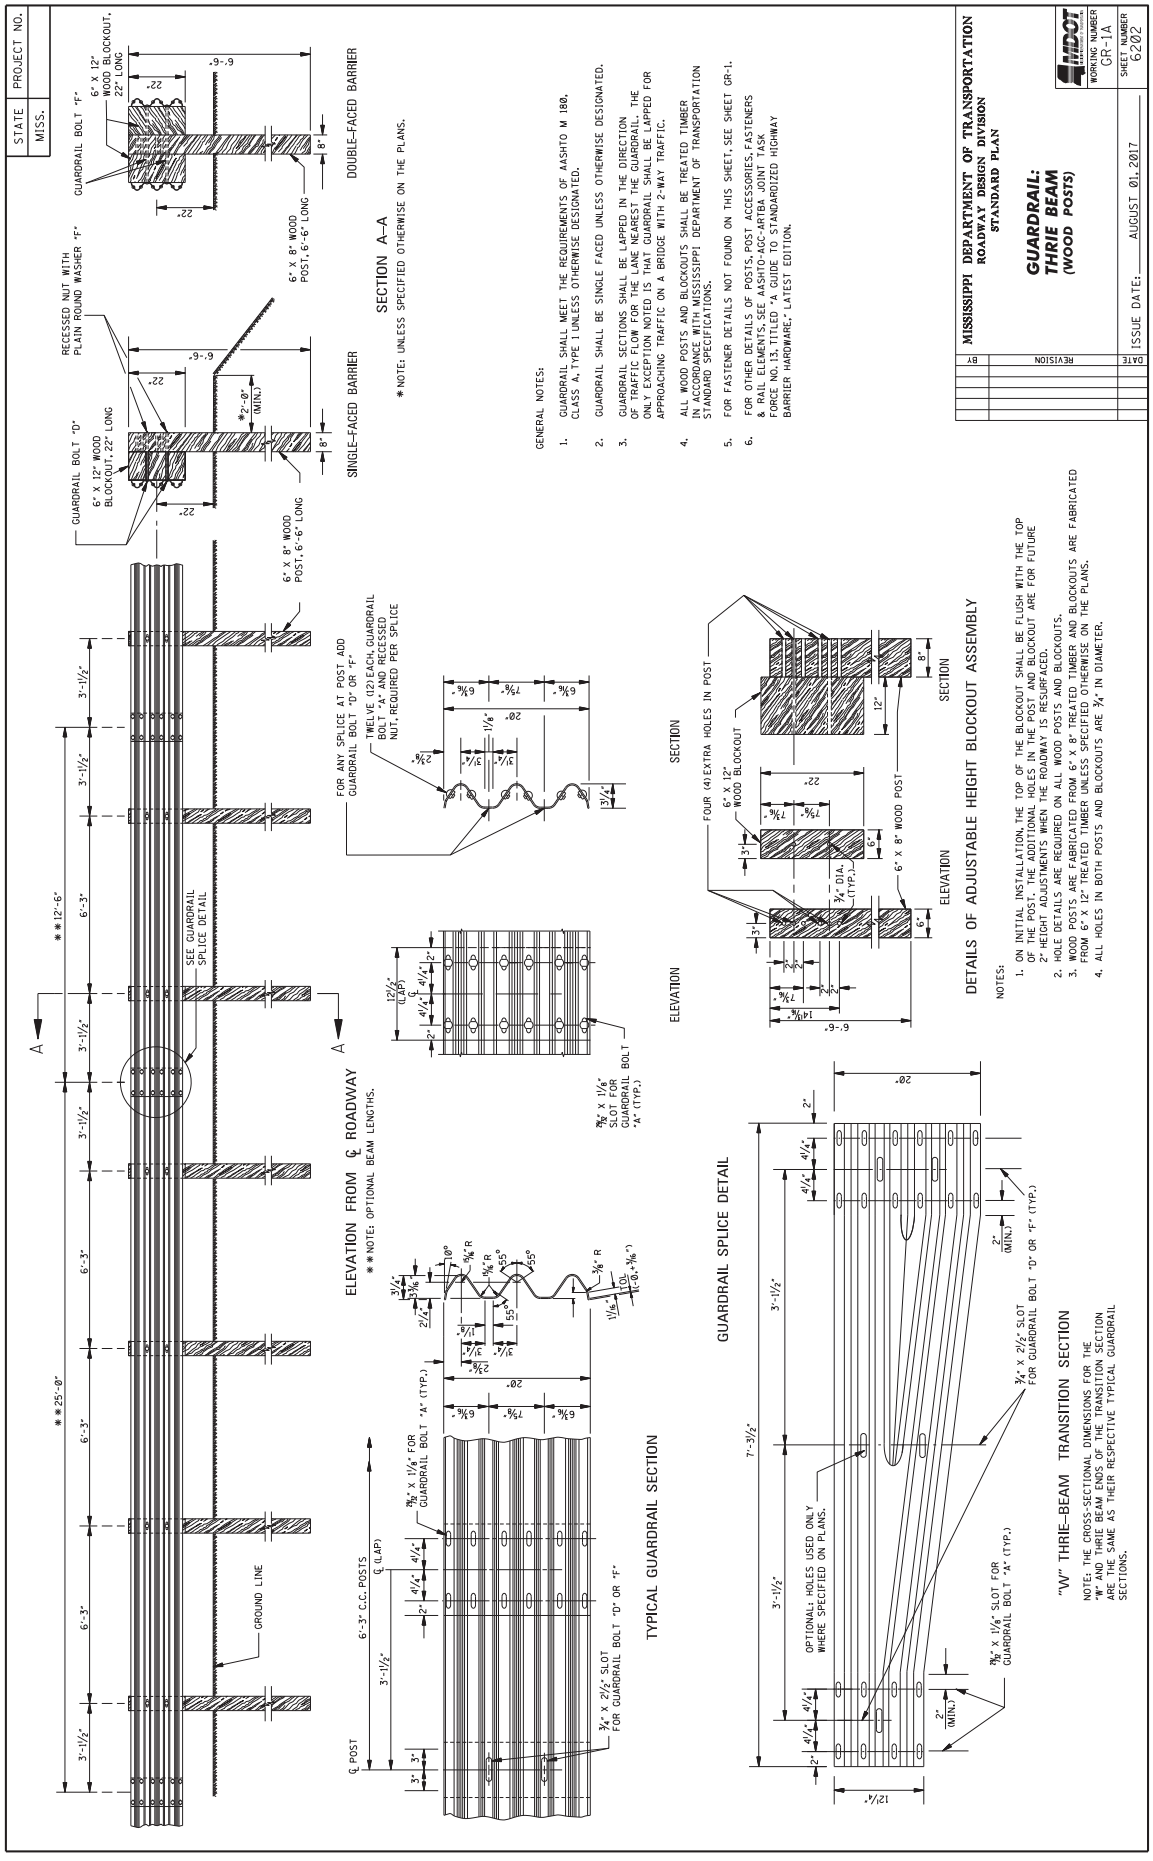

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
GUARDRAIL: THRIE BEAM (WOOD POSTS)
WORKING NUMBER GR-1A
SHEET NUMBER 6202
ISSUE DATE: AUGUST 01, 2017
DATE REVISION BY
GENERAL NOTES:
1. GUARDRAIL SHALL MEET THE REQUIREMENTS OF AASHTO M 180, CLASS A, TYPE I UNLESS OTHERWISE DESIGNATED.
2. GUARDRAIL SHALL BE SINGLE FACED UNLESS OTHERWISE DESIGNATED.
3. GUARDRAIL SECTIONS SHALL BE LAPPED IN THE DIRECTION OF TRAFFIC FLOW FOR THE LANE NEAREST THE GUARDRAIL. THE ONLY EXCEPTION NOTED IS THAT GUARDRAIL SHALL BE LAPPED FOR APPROACHING TRAFFIC ON A BRIDGE WITH 2-WAY TRAFFIC.
4. ALL WOOD POSTS AND BLOCKOUTS SHALL BE TREATED TIMBER IN ACCORDANCE WITH MISSISSIPPI DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS.
5. FOR FASTENER DETAILS NOT FOUND ON THIS SHEET, SEE SHEET GR-1.
6. FOR OTHER DETAILS OF POSTS, POST ACCESSORIES, FASTENERS & RAIL ELEMENTS, SEE AASHTO-AGC-ARTBA JOINT TASK FORCE NO. 13, TITLED "A GUIDE TO STANDARDIZED HIGHWAY BARRIER HARDWARE," LATEST EDITION.
SECTION A–A
*NOTE: UNLESS SPECIFIED OTHERWISE ON THE PLANS.
SINGLE-FACED BARRIER
DOUBLE-FACED BARRIER
GUARDRAIL BOLT "D"
6" X 12" WOOD BLOCKOUT, 22" LONG
GUARDRAIL BOLT "F"
6" X 12" WOOD BLOCKOUT, 22" LONG
RECESSED NUT WITH PLAIN ROUND WASHER "F"
6" X 8" WOOD POST, 6'-6" LONG
*2'-0" (MIN.)
22"
8"
6'-6"
ELEVATION FROM ℄ ROADWAY
**NOTE: OPTIONAL BEAM LENGTHS.
**25'-0"
**12'-6"
6'-3"
3'-1½"
SEE GUARDRAIL SPLICE DETAIL
GROUND LINE
℄ POST
6'-3" C.C. POSTS
℄ (LAP)
TYPICAL GUARDRAIL SECTION
⅞" X 1¼" FOR GUARDRAIL BOLT "A" (TYP.)
¾" X 2½" SLOT FOR GUARDRAIL BOLT "D" OR "F"
⅞" X 1¼" SLOT FOR GUARDRAIL BOLT "A" (TYP.)
FOR ANY SPLICE AT POST ADD GUARDRAIL BOLT "D" OR "F"
TWELVE (12) EACH, GUARDRAIL BOLT "A" AND RECESSED NUT, REQUIRED PER SPLICE
ELEVATION
SECTION
FOUR (4) EXTRA HOLES IN POST
6" X 12" WOOD BLOCKOUT
6" X 8" WOOD POST
¾" DIA. (TYP.)
ELEVATION
SECTION
DETAILS OF ADJUSTABLE HEIGHT BLOCKOUT ASSEMBLY
NOTES:
1. ON INITIAL INSTALLATION, THE TOP OF THE BLOCKOUT SHALL BE FLUSH WITH THE TOP OF THE POST. THE ADDITIONAL HOLES IN THE POST AND BLOCKOUT ARE FOR FUTURE 2" HEIGHT ADJUSTMENTS WHEN THE ROADWAY IS RESURFACED.
2. HOLE DETAILS ARE REQUIRED ON ALL WOOD POSTS AND BLOCKOUTS.
3. WOOD POSTS ARE FABRICATED FROM 6" X 8" TREATED TIMBER AND BLOCKOUTS ARE FABRICATED FROM 6" X 12" TREATED TIMBER UNLESS SPECIFIED OTHERWISE ON THE PLANS.
4. ALL HOLES IN BOTH POSTS AND BLOCKOUTS ARE ¾" IN DIAMETER.
GUARDRAIL SPLICE DETAIL
7'-3½"
3'-1½"
OPTIONAL: HOLES USED ONLY WHERE SPECIFIED ON PLANS.
¾" X 2½" SLOT FOR GUARDRAIL BOLT "D" OR "F" (TYP.)
⅞" X 1⅛" SLOT FOR GUARDRAIL BOLT "A" (TYP.)
"W" THRIE-BEAM TRANSITION SECTION
NOTE: THE CROSS-SECTIONAL DIMENSIONS FOR THE "W" AND THRIE BEAM ENDS OF THE TRANSITION SECTION ARE THE SAME AS THEIR RESPECTIVE TYPICAL GUARDRAIL SECTIONS.

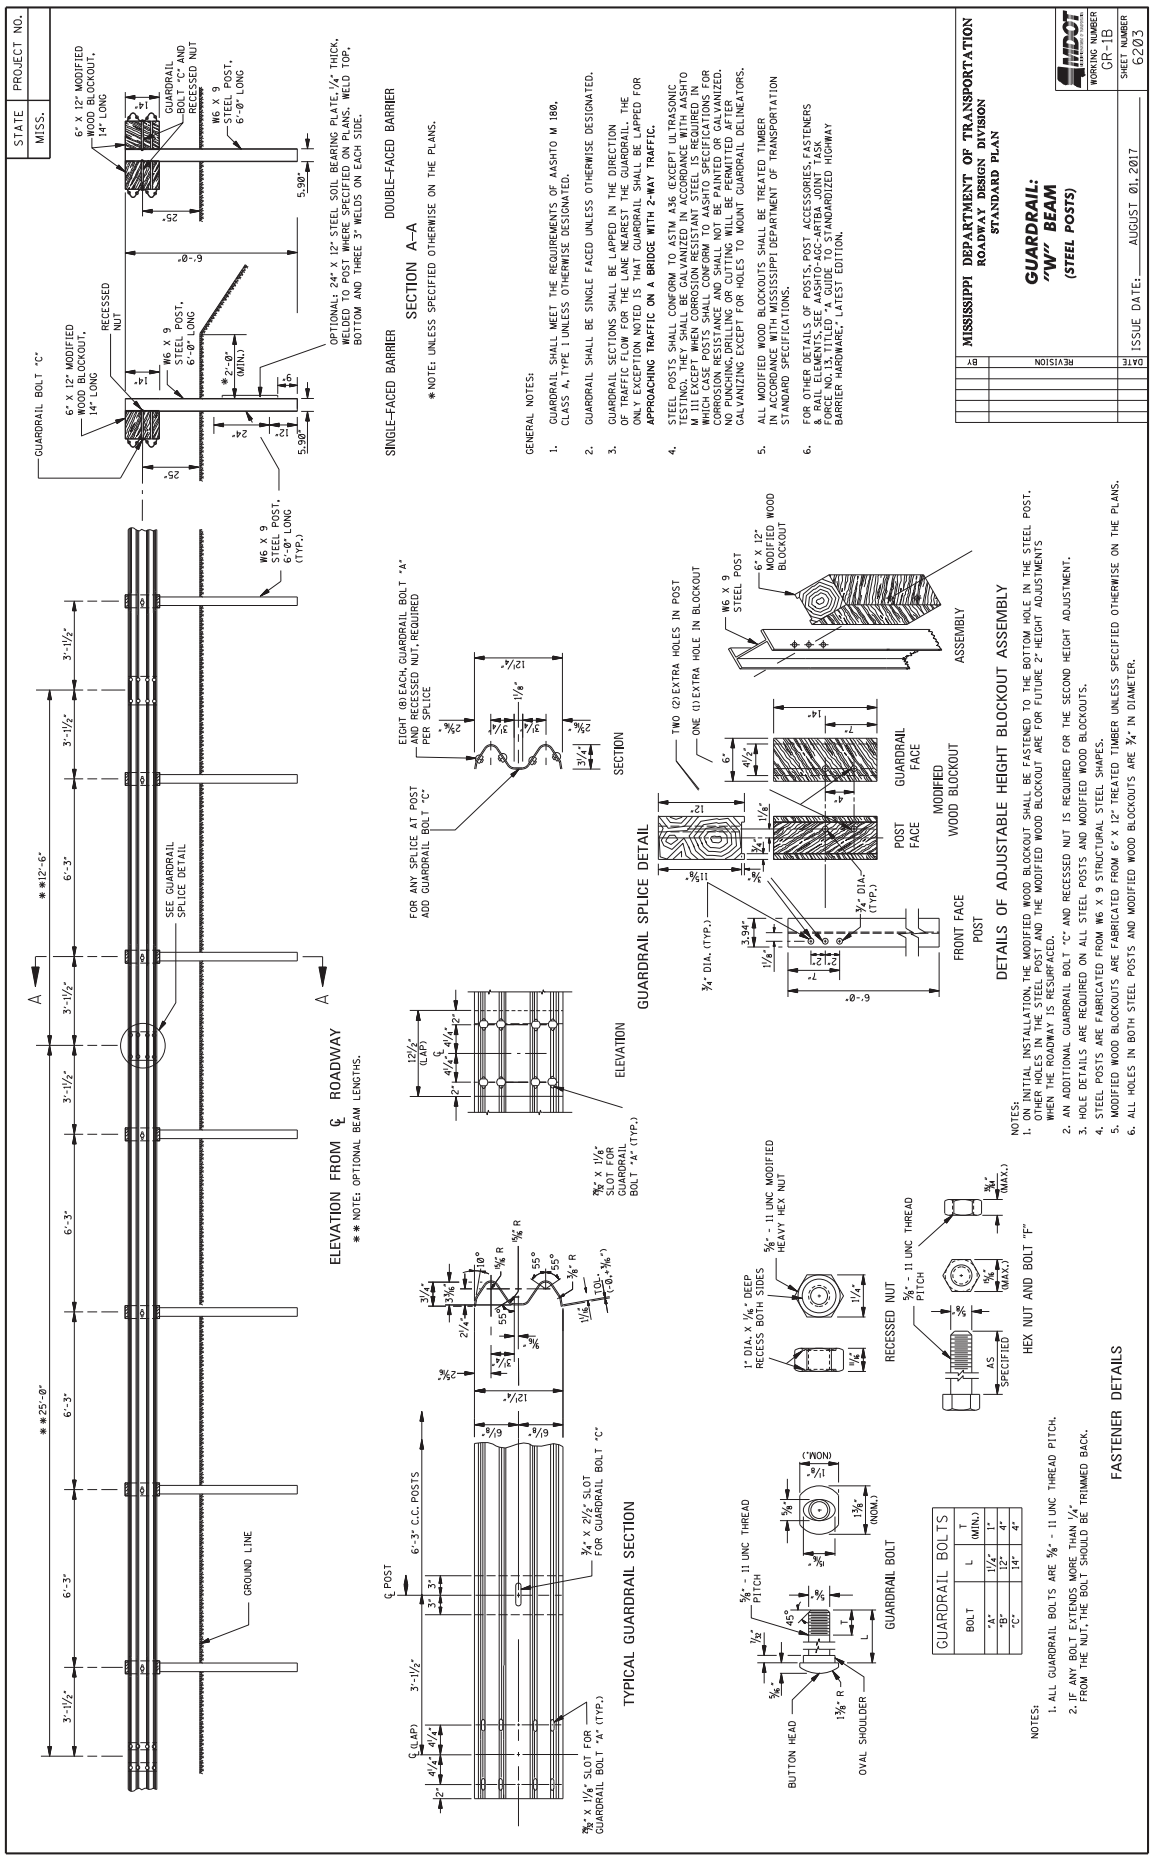

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
GUARDRAIL: "W" BEAM (STEEL POSTS)
WORKING NUMBER GR-1B
SHEET NUMBER 6203
ISSUE DATE: AUGUST 01, 2017
DATE REVISION BY
ELEVATION FROM ℄ ROADWAY
** NOTE: OPTIONAL BEAM LENGTHS.
SINGLE-FACED BARRIER
DOUBLE-FACED BARRIER
SECTION A–A
* NOTE: UNLESS SPECIFIED OTHERWISE ON THE PLANS.
GENERAL NOTES:
1. GUARDRAIL SHALL MEET THE REQUIREMENTS OF AASHTO M 180, CLASS A, TYPE I UNLESS OTHERWISE DESIGNATED.
2. GUARDRAIL SHALL BE SINGLE FACED UNLESS OTHERWISE DESIGNATED.
3. GUARDRAIL SECTIONS SHALL BE LAPPED IN THE DIRECTION OF TRAFFIC FLOW FOR THE LANE NEAREST THE GUARDRAIL. THE ONLY EXCEPTION NOTED IS THAT GUARDRAIL SHALL BE LAPPED FOR APPROACHING TRAFFIC ON A BRIDGE WITH 2-WAY TRAFFIC.
4. STEEL POSTS SHALL CONFORM TO ASTM A36 (EXCEPT ULTRASONIC TESTING) AND SHALL BE GALVANIZED IN ACCORDANCE WITH AASHTO M 111 EXCEPT WHEN CORROSION RESISTANT STEEL IS REQUIRED IN WHICH CASE POSTS SHALL CONFORM TO AASHTO SPECIFICATIONS FOR CORROSION RESISTANCE AND SHALL NOT BE PAINTED OR GALVANIZED. NO PUNCHING, DRILLING OR CUTTING WILL BE PERMITTED AFTER GALVANIZING EXCEPT FOR HOLES TO MOUNT GUARDRAIL DELINEATORS.
5. ALL MODIFIED WOOD BLOCKOUTS SHALL BE TREATED TIMBER IN ACCORDANCE WITH MISSISSIPPI DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS.
6. FOR OTHER DETAILS OF POSTS, POST ACCESSORIES, FASTENERS & RAIL ELEMENTS, SEE AASHTO-AGC-ARTBA JOINT TASK FORCE NO. 13, TITLED "A GUIDE TO STANDARDIZED HIGHWAY BARRIER HARDWARE," LATEST EDITION.
GUARDRAIL BOLTS
BOLT L T (MIN.)
"A" 1½" 1"
"B" 12" 4"
"C" 14" 4"
NOTES:
1. ALL GUARDRAIL BOLTS ARE ⅝" - 11 UNC THREAD PITCH.
2. IF ANY BOLT EXTENDS MORE THAN ¼" FROM THE NUT, THE BOLT SHOULD BE TRIMMED BACK.
FASTENER DETAILS
TYPICAL GUARDRAIL SECTION
GUARDRAIL SPLICE DETAIL
DETAILS OF ADJUSTABLE HEIGHT BLOCKOUT ASSEMBLY
NOTES:
1. ON INITIAL INSTALLATION, THE MODIFIED WOOD BLOCKOUT SHALL BE FASTENED TO THE BOTTOM HOLE IN THE STEEL POST. OTHER HOLES IN THE STEEL POST AND THE MODIFIED WOOD BLOCKOUT ARE FOR FUTURE 2" HEIGHT ADJUSTMENTS WHEN THE ROADWAY IS RESURFACED.
2. AN ADDITIONAL GUARDRAIL BOLT "C" AND RECESSED NUT IS REQUIRED FOR THE SECOND HEIGHT ADJUSTMENT.
3. HOLE DETAILS ARE REQUIRED ON ALL STEEL POSTS AND MODIFIED WOOD BLOCKOUTS.
4. STEEL POSTS ARE FABRICATED FROM W6 X 9 STRUCTURAL STEEL SHAPES.
5. MODIFIED WOOD BLOCKOUTS ARE FABRICATED FROM 6" X 12" TREATED TIMBER UNLESS SPECIFIED OTHERWISE ON THE PLANS.
6. ALL HOLES IN BOTH STEEL POSTS AND MODIFIED WOOD BLOCKOUTS ARE ¾" IN DIAMETER.

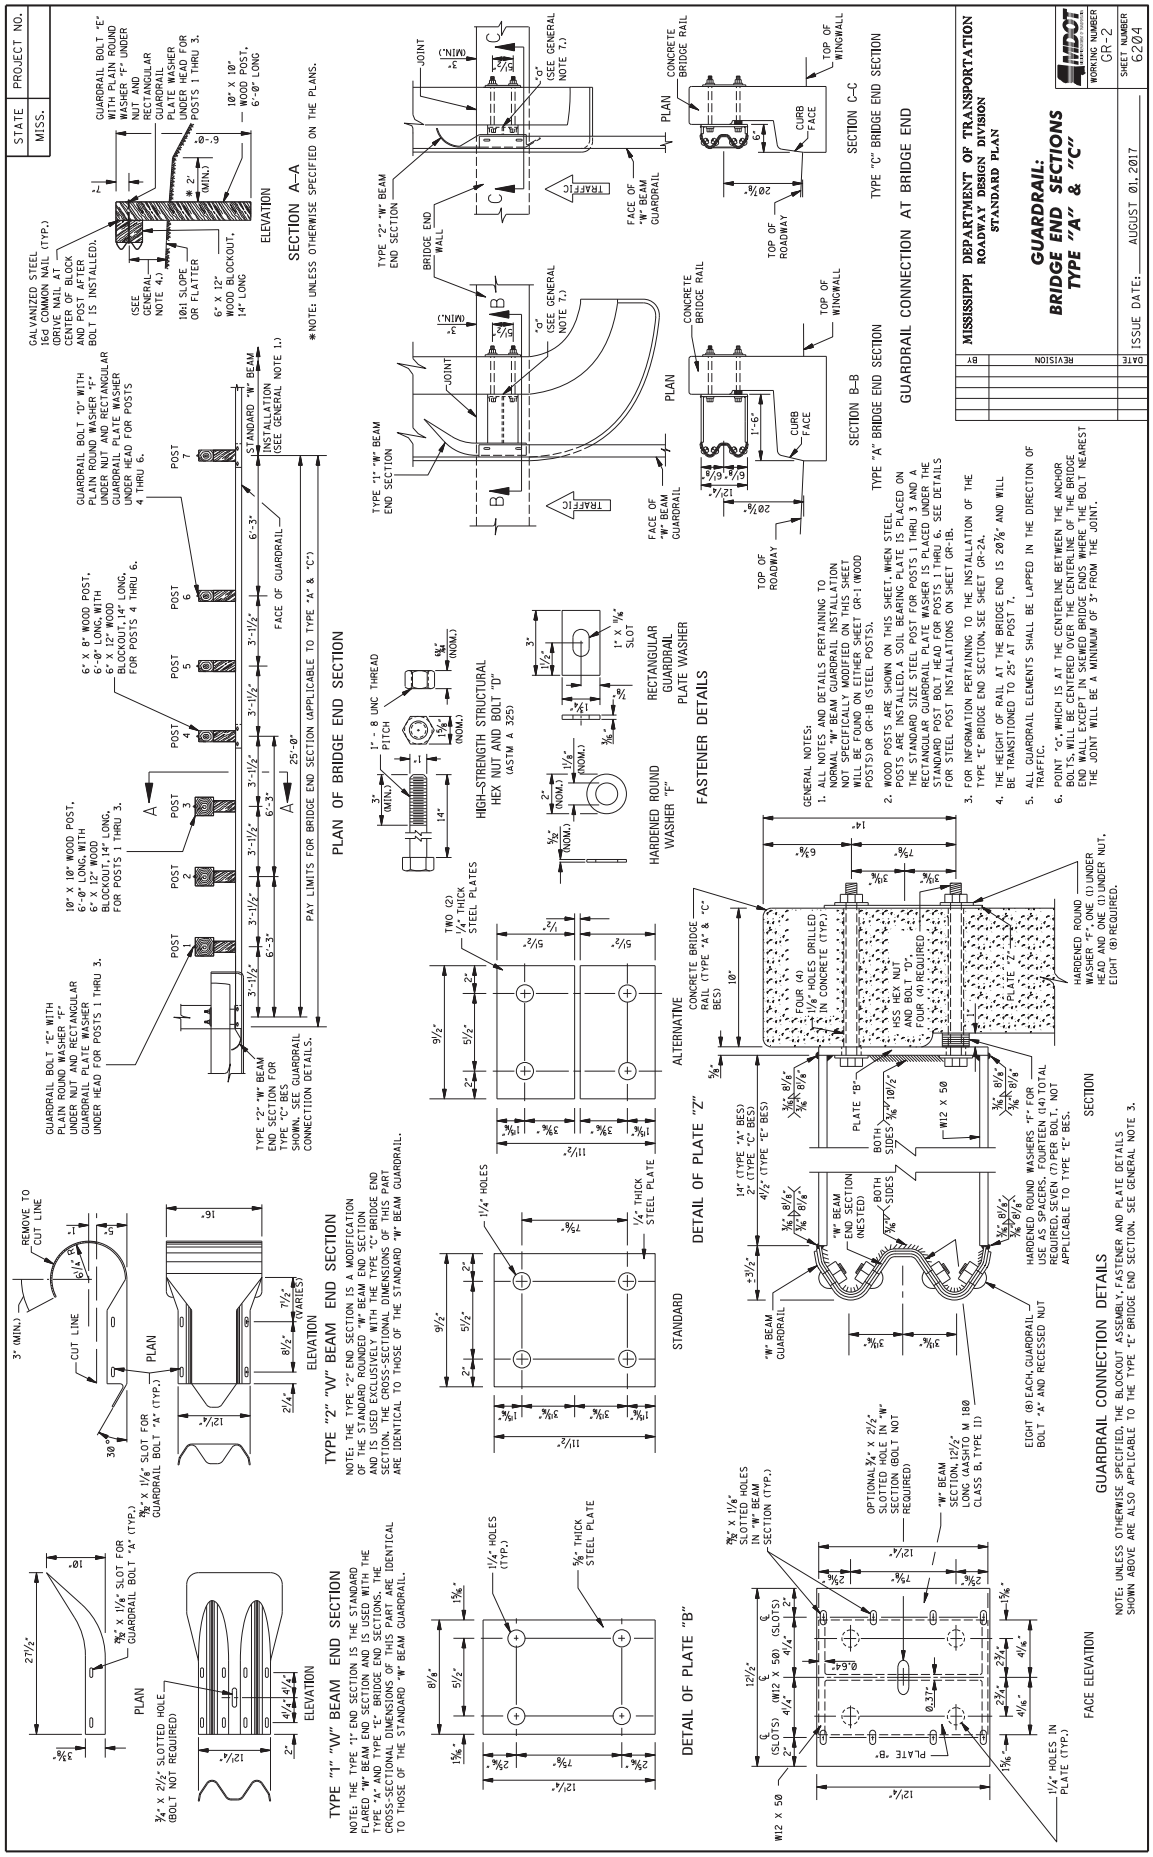

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
GUARDRAIL:
BRIDGE END SECTIONS
TYPE "A" & "C"
WORKING NUMBER GR-2
SHEET NUMBER 6204
ISSUE DATE: AUGUST 01, 2017
DATE REVISION BY
PLAN OF BRIDGE END SECTION
SECTION A–A
ELEVATION
TYPE "2" "W" BEAM END SECTION
TYPE "1" "W" BEAM END SECTION
DETAIL OF PLATE "B"
DETAIL OF PLATE "Z"
FASTENER DETAILS
GUARDRAIL CONNECTION DETAILS
TYPE "A" BRIDGE END SECTION
GUARDRAIL CONNECTION AT BRIDGE END
TYPE "C" BRIDGE END SECTION
SECTION B–B
SECTION C–C
GENERAL NOTES:
1. ALL NOTES AND DETAILS PERTAINING TO NORMAL "W" BEAM GUARDRAIL INSTALLATION NOT SPECIFICALLY MODIFIED ON THIS SHEET WILL BE FOUND ON EITHER SHEET GR-1 (WOOD POSTS) OR GR-1B (STEEL POSTS).
2. WOOD POSTS ARE SHOWN ON THIS SHEET. WHEN STEEL POSTS ARE INSTALLED, A SOIL BEARING PLATE IS PLACED ON THE STANDARD SIZE STEEL POST FOR POSTS 1 THRU 3 AND A RECTANGULAR GUARDRAIL PLATE WASHER IS PLACED UNDER THE STANDARD POST BOLT HEAD FOR POSTS 1 THRU 6. SEE DETAILS FOR STEEL POST INSTALLATIONS ON SHEET GR-1B.
3. FOR INFORMATION PERTAINING TO THE INSTALLATION OF THE TYPE "E" BRIDGE END SECTION, SEE SHEET GR-2A.
4. THE HEIGHT OF RAIL AT THE BRIDGE END IS 20⅞" AND WILL BE TRANSITIONED TO 25" AT POST 7.
5. ALL GUARDRAIL ELEMENTS SHALL BE LAPPED IN THE DIRECTION OF TRAFFIC.
6. POINT "O", WHICH IS AT THE CENTERLINE BETWEEN THE ANCHOR BOLTS, WILL BE CENTERED OVER THE CENTERLINE OF THE BRIDGE END WALL EXCEPT IN SKEWED BRIDGE ENDS WHERE THE BOLT NEAREST THE JOINT WILL BE A MINIMUM OF 3" FROM THE JOINT.

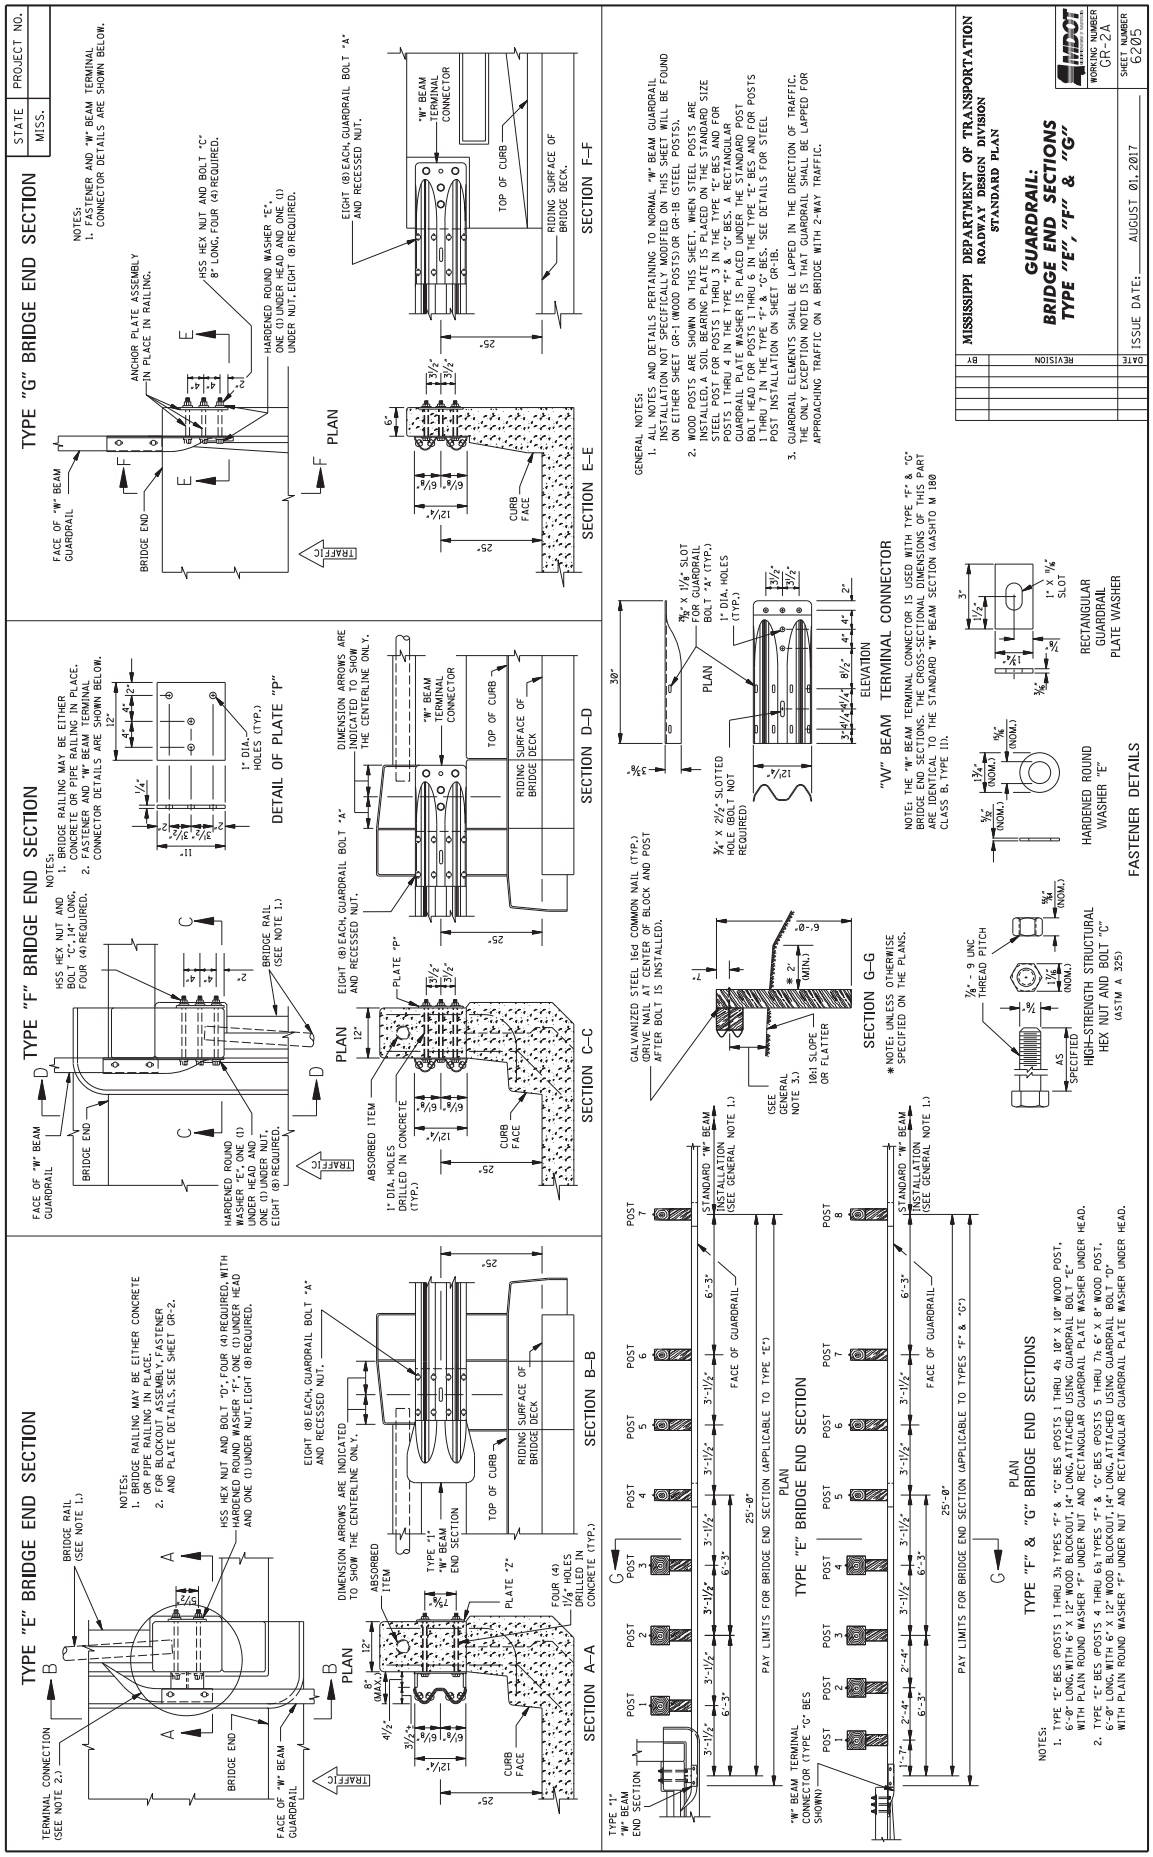

TYPE "E" BRIDGE END SECTION
TYPE "F" BRIDGE END SECTION
TYPE "G" BRIDGE END SECTION
DETAIL OF PLATE "P"
"W" BEAM TERMINAL CONNECTOR
FASTENER DETAILS
TYPE "E" BRIDGE END SECTION
TYPE "F" & "G" BRIDGE END SECTIONS
GUARDRAIL: BRIDGE END SECTIONS TYPE "E", "F" & "G"
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
STATE MISS.
PROJECT NO.
WORKING NUMBER GR-2A
SHEET NUMBER 6205
ISSUE DATE: AUGUST 01, 2017

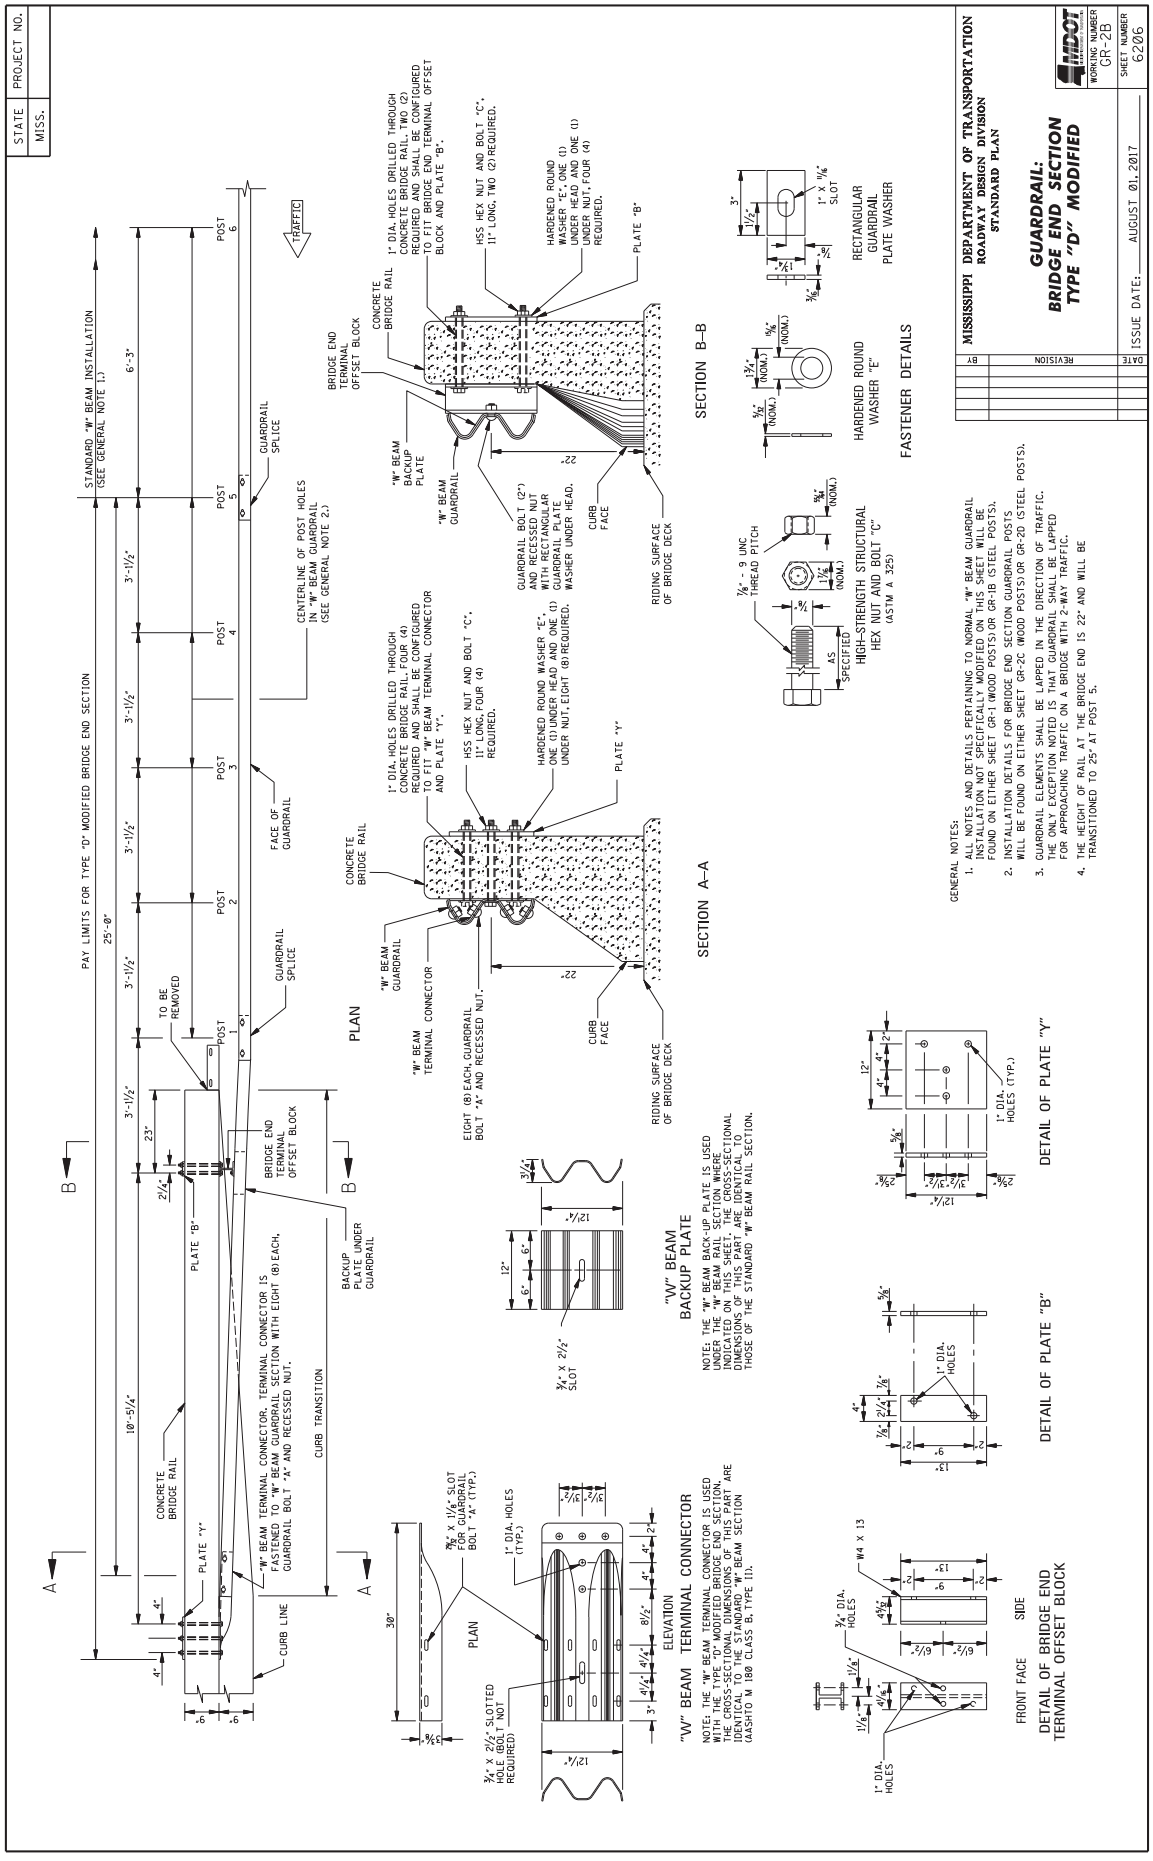

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
GUARDRAIL:
BRIDGE END SECTION
TYPE "D" MODIFIED
WORKING NUMBER GR-2B
SHEET NUMBER 6206
ISSUE DATE: AUGUST 01, 2017
REVISION
DATE
BY
PLAN
SECTION A–A
SECTION B–B
FASTENER DETAILS
HARDENED ROUND WASHER "E"
RECTANGULAR GUARDRAIL PLATE WASHER
HIGH-STRENGTH STRUCTURAL HEX NUT AND BOLT "C" (ASTM A 325)
"W" BEAM BACKUP PLATE
NOTE: THE "W" BEAM BACK-UP PLATE IS USED UNDER THE "W" BEAM RAIL SECTION WHERE INSTALLATION DETAILS SHOW CONSTRUCTIONAL DIMENSIONS OF THIS PART ARE IDENTICAL TO THOSE OF THE STANDARD "W" BEAM RAIL SECTION.
"W" BEAM TERMINAL CONNECTOR
NOTE: THE "W" BEAM TERMINAL CONNECTOR IS USED WITH THE TYPE "D" MODIFIED BRIDGE END SECTION. THE CROSS SECTIONAL DIMENSIONS OF THIS PART ARE IDENTICAL TO THE STANDARD "W" BEAM SECTION (AASHTO M 180 CLASS B, TYPE II).
DETAIL OF PLATE "B"
DETAIL OF PLATE "Y"
DETAIL OF BRIDGE END TERMINAL OFFSET BLOCK
GENERAL NOTES:
1. ALL NOTES AND DETAILS PERTAINING TO NORMAL "W" BEAM GUARDRAIL INSTALLATION SHALL BE MODIFIED ON THIS SHEET WILL BE FOUND ON EITHER SHEET GR-2C (WOOD POSTS) OR GR-2D (STEEL POSTS).
2. INSTALLATION DETAILS FOR BRIDGE END SECTION GUARDRAIL POSTS WILL BE FOUND ON EITHER SHEET GR-2C (WOOD POSTS) OR GR-2D (STEEL POSTS).
3. GUARDRAIL ELEMENTS SHALL BE LAPPED IN THE DIRECTION OF TRAFFIC. THE ONLY EXCEPTION NOTED IS THAT GUARDRAIL SHALL BE LAPPED FOR APPROACHING TRAFFIC ON A BRIDGE WITH 2-WAY TRAFFIC.
4. THE HEIGHT OF RAIL AT THE BRIDGE END IS 22" AND WILL BE TRANSITIONED TO 25" AT POST 5.

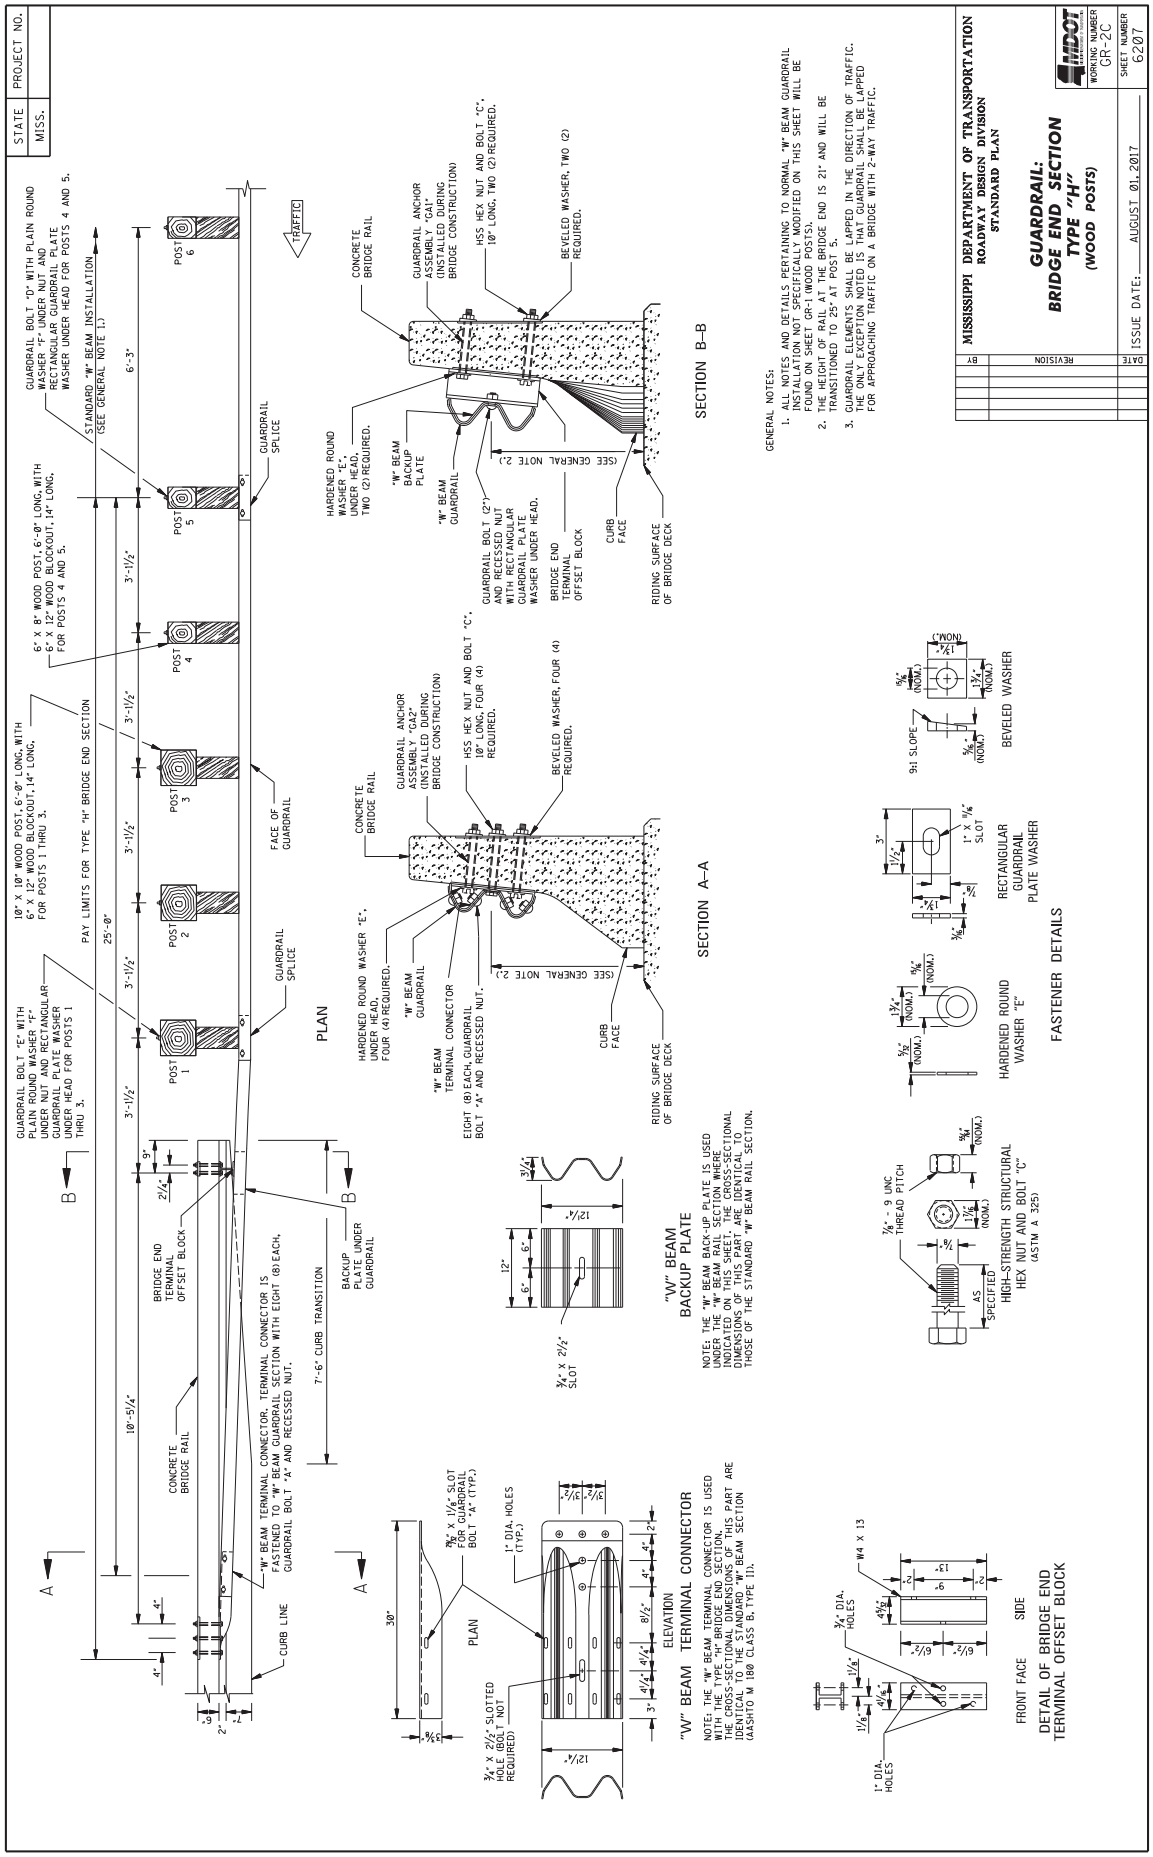

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
GUARDRAIL:
BRIDGE END SECTION
TYPE "H"
(WOOD POSTS)
WORKING NUMBER GR-2C
SHEET NUMBER 6207
ISSUE DATE: AUGUST 01, 2017
REVISION
DATE
BY
GENERAL NOTES:
1. ALL NOTES AND DETAILS PERTAINING TO NORMAL "W" BEAM GUARDRAIL INSTALLATION NOT SPECIFICALLY MODIFIED ON THIS SHEET WILL BE FOUND ON SHEET GR-1 (WOOD POSTS).
2. THE HEIGHT OF RAIL AT THE BRIDGE END IS 21" AND WILL BE TRANSITIONED TO 25" AT POST 5.
3. GUARDRAIL ELEMENTS SHALL BE LAPPED IN THE DIRECTION OF TRAFFIC. THE ONLY EXCEPTION NOTED IS THAT GUARDRAIL SHALL BE LAPPED FOR APPROACHING TRAFFIC ON A BRIDGE WITH 2-WAY TRAFFIC.
PLAN
SECTION A–A
SECTION B–B
"W" BEAM TERMINAL CONNECTOR
"W" BEAM BACKUP PLATE
FASTENER DETAILS
DETAIL OF BRIDGE END TERMINAL OFFSET BLOCK
TRAFFIC
PAY LIMITS FOR TYPE "H" BRIDGE END SECTION
STANDARD "W" BEAM INSTALLATION (SEE GENERAL NOTE 1.)
CONCRETE BRIDGE RAIL
BRIDGE END TERMINAL OFFSET BLOCK
BACKUP PLATE UNDER GUARDRAIL
GUARDRAIL SPLICE
FACE OF GUARDRAIL
CURB LINE
7'-6" CURB TRANSITION
"W" BEAM TERMINAL CONNECTOR, TERMINAL CONNECTOR IS FASTENED TO "W" BEAM GUARDRAIL SECTION WITH EIGHT (8) EACH, GUARDRAIL BOLT "A" AND RECESSED NUT.
GUARDRAIL BOLT "E" WITH PLAIN ROUND WASHER "F" UNDER NUT AND RECTANGULAR GUARDRAIL PLATE WASHER UNDER HEAD FOR POSTS 1 THRU 3.
10" X 10" WOOD POST, 6'-0" LONG, WITH 6" X 12" WOOD BLOCKOUT, 14" LONG, FOR POSTS 1 THRU 5.
6" X 8" WOOD POST, 6'-0" LONG, WITH 6" X 12" WOOD BLOCKOUT, 14" LONG, FOR POSTS 4 AND 5.
GUARDRAIL BOLT "D" WITH PLAIN ROUND WASHER UNDER NUT AND RECTANGULAR GUARDRAIL PLATE WASHER UNDER HEAD FOR POSTS 4 AND 5.
POST 1
POST 2
POST 3
POST 4
POST 5
POST 6
25'-0"
3'-1½"
10'-5¼"
4'
9"
2¼"
HARDENED ROUND WASHER "E", UNDER HEAD, FOUR (4) REQUIRED.
"W" BEAM GUARDRAIL
"W" BEAM TERMINAL CONNECTOR
EIGHT (8) EACH, GUARDRAIL BOLT "A" AND RECESSED NUT.
GUARDRAIL ANCHOR ASSEMBLY "GA2" (INSTALLED DURING BRIDGE CONSTRUCTION)
HSS HEX NUT AND BOLT "C", 10" LONG, FOUR (4) REQUIRED.
BEVELED WASHER, FOUR (4) REQUIRED.
(SEE GENERAL NOTE 2.)
CURB FACE
RIDING SURFACE OF BRIDGE DECK
HARDENED ROUND WASHER "E", UNDER HEAD, TWO (2) REQUIRED.
"W" BEAM BACKUP PLATE
GUARDRAIL BOLT (2") AND RECESSED NUT WITH RECTANGULAR GUARDRAIL PLATE WASHER UNDER HEAD.
BRIDGE END TERMINAL OFFSET BLOCK
HSS HEX NUT AND BOLT "C", 10" LONG, TWO (2) REQUIRED.
BEVELED WASHER, TWO (2) REQUIRED.
9:1 SLOPE
BEVELED WASHER
RECTANGULAR GUARDRAIL PLATE WASHER
HARDENED ROUND WASHER "E"
HIGH-STRENGTH STRUCTURAL HEX NUT AND BOLT "C" (ASTM A 325)
⅞" - 9 UNC THREAD PITCH
AS SPECIFIED
30"
12"
6"
3¼"
12¾"
¾" X 2½" SLOT
¾" X 1¼" SLOT FOR GUARDRAIL BOLT "A" (TYP.)
1" DIA. HOLES (TYP.)
¾" X 2½" SLOTTED HOLE (BOLT NOT REQUIRED)
W4 x 13
¾" DIA. HOLES
1" DIA. HOLES
FRONT FACE
SIDE
NOTE: THE "W" BEAM TERMINAL CONNECTOR IS USED WITH THE TYPE "H" BRIDGE END SECTION. THE CROSS-SECTIONAL DIMENSIONS OF THIS PART ARE IDENTICAL TO THE STANDARD "W" BEAM SECTION (AASHTO M 180 CLASS B, TYPE II).
NOTE: THE "W" BEAM BACK-UP PLATE IS USED UNDER THE "W" BEAM RAIL SECTION WHERE INDICATED ON THIS SHEET. CROSS-SECTIONAL DIMENSIONS OF THIS PART ARE IDENTICAL TO THOSE OF THE STANDARD "W" BEAM RAIL SECTION.

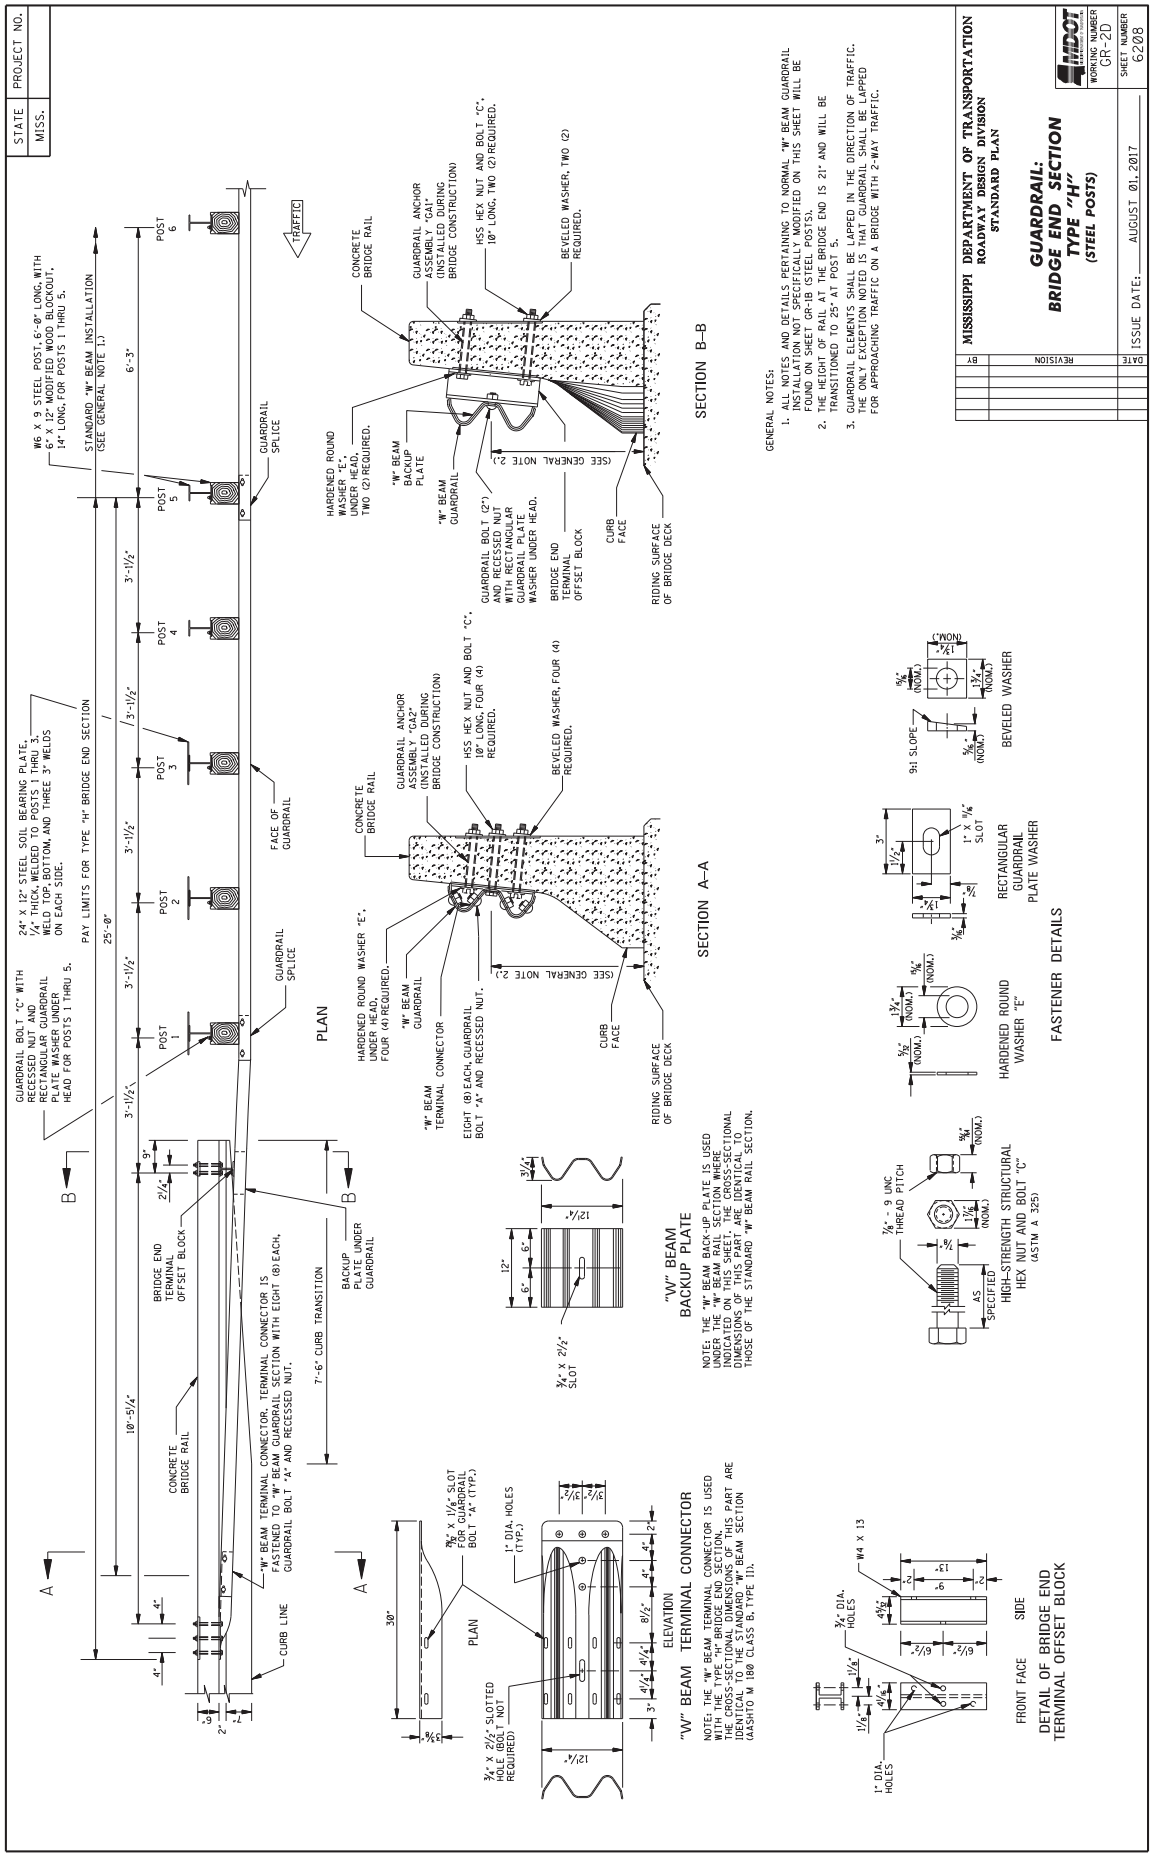

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
GUARDRAIL:
BRIDGE END SECTION
TYPE "H"
(STEEL POSTS)
WORKING NUMBER GR-2D
SHEET NUMBER 6208
ISSUE DATE: AUGUST 01, 2017
REVISION
BY
DATE
GENERAL NOTES:
1. ALL NOTES AND DETAILS PERTAINING TO NORMAL "W" BEAM GUARDRAIL INSTALLATION NOT SPECIFICALLY MODIFIED ON THIS SHEET WILL BE FOUND ON SHEET GR-1B (STEEL POSTS).
2. THE HEIGHT OF RAIL AT THE BRIDGE END IS 21" AND WILL BE TRANSITIONED TO 25" AT POST 5.
3. GUARDRAIL ELEMENTS SHALL BE LAPPED IN THE DIRECTION OF TRAFFIC. THE ONLY EXCEPTION NOTED IS THAT GUARDRAIL SHALL BE LAPPED FOR APPROACHING TRAFFIC ON A BRIDGE WITH 2-WAY TRAFFIC.
PLAN
SECTION A–A
SECTION B–B
"W" BEAM TERMINAL CONNECTOR
"W" BEAM BACKUP PLATE
FASTENER DETAILS
DETAIL OF BRIDGE END TERMINAL OFFSET BLOCK
TRAFFIC
STANDARD "W" BEAM INSTALLATION (SEE GENERAL NOTE 1.)
PAY LIMITS FOR TYPE "H" BRIDGE END SECTION
CONCRETE BRIDGE RAIL
GUARDRAIL SPLICE
FACE OF GUARDRAIL
BRIDGE END TERMINAL OFFSET BLOCK
BACKUP PLATE UNDER GUARDRAIL
CURB LINE
7'-6" CURB TRANSITION
"W" BEAM TERMINAL CONNECTOR, TERMINAL CONNECTOR IS FASTENED TO "W" BEAM GUARDRAIL SECTION WITH EIGHT (8) EACH, GUARDRAIL BOLT "A" AND RECESSED NUT.
GUARDRAIL BOLT "C" WITH RECESSED NUT AND RECTANGULAR GUARDRAIL PLATE WASHER UNDER HEAD FOR POSTS 1 THRU 5.
24" X 12" STEEL SOIL BEARING PLATE, 1/4" THICK, WELDED TO POSTS 1 THRU 3, WELD TOP, BOTTOM, AND THREE 3" WELDS ON EACH SIDE.
W6 X 9 STEEL POST, 6'-0" LONG, WITH 6" X 12" MODIFIED WOOD BLOCKOUT, 14" LONG, FOR POSTS 1 THRU 5.
HARDENED ROUND WASHER "E", UNDER HEAD, TWO (2) REQUIRED.
"W" BEAM BACKUP PLATE
"W" BEAM GUARDRAIL
GUARDRAIL BOLT (2") AND RECESSED NUT WITH RECTANGULAR GUARDRAIL PLATE WASHER UNDER HEAD.
GUARDRAIL ANCHOR ASSEMBLY "GA1" (INSTALLED DURING BRIDGE CONSTRUCTION)
HSS HEX NUT AND BOLT "C", 10" LONG, TWO (2) REQUIRED.
BEVELED WASHER, TWO (2) REQUIRED.
(SEE GENERAL NOTE 2.)
CURB FACE
RIDING SURFACE OF BRIDGE DECK
HARDENED ROUND WASHER "E", UNDER HEAD, FOUR (4) REQUIRED.
"W" BEAM TERMINAL CONNECTOR
EIGHT (8) EACH, GUARDRAIL BOLT "A" AND RECESSED NUT.
GUARDRAIL ANCHOR ASSEMBLY "GA2" (INSTALLED DURING BRIDGE CONSTRUCTION)
HSS HEX NUT AND BOLT "C", 10" LONG, FOUR (4) REQUIRED.
BEVELED WASHER, FOUR (4) REQUIRED.
3/4" X 2 1/2" SLOT
NOTE: THE "W" BEAM BACK-UP PLATE IS USED UNDER THE "W" BEAM RAIL SECTION WHERE INDICATED ON THIS SHEET. CROSS-SECTIONAL DIMENSIONS OF THIS PART ARE IDENTICAL TO THOSE OF THE STANDARD "W" BEAM RAIL SECTION.
NOTE: THE "W" BEAM TERMINAL CONNECTOR IS USED WITH THE TYPE "H" BRIDGE END SECTION. THE CROSS-SECTIONAL DIMENSIONS OF THIS PART ARE IDENTICAL TO THE STANDARD "W" BEAM SECTION (AASHTO M 180 CLASS B, TYPE II).
3/4" X 1 1/4" SLOT FOR GUARDRAIL BOLT "A" (TYP.)
1" DIA. HOLES (TYP.)
3/4" X 2 1/2" SLOTTED HOLE (BOLT NOT REQUIRED)
1" DIA. HOLES
3/4" DIA. HOLES
W4 X 13
FRONT FACE
SIDE
9:1 SLOPE
BEVELED WASHER
RECTANGULAR GUARDRAIL PLATE WASHER
HARDENED ROUND WASHER "E"
7/8" - 9 UNC THREAD PITCH
HIGH-STRENGTH STRUCTURAL HEX NUT AND BOLT "C" (ASTM A 325)

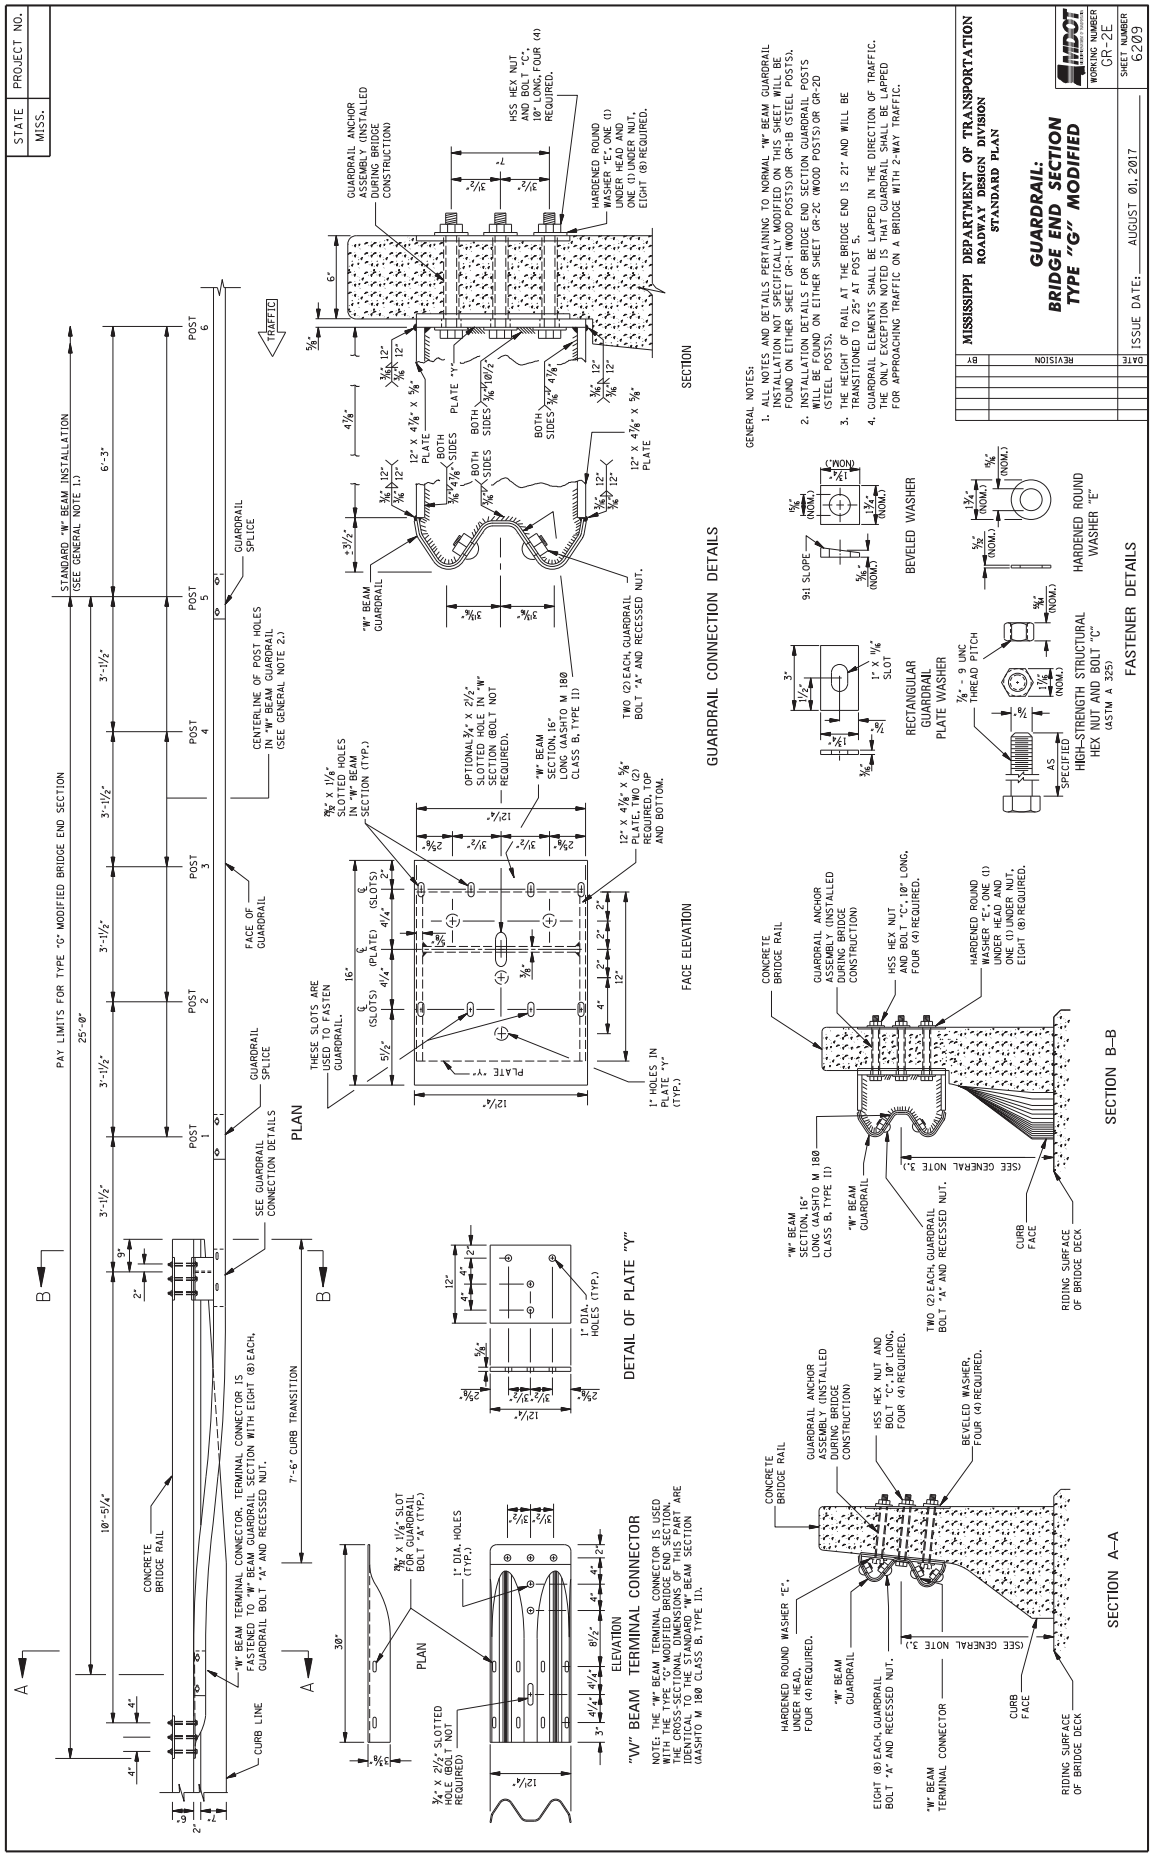

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
GUARDRAIL:
BRIDGE END SECTION
TYPE "G" MODIFIED
WORKING NUMBER GR-2E
SHEET NUMBER 6209
ISSUE DATE: AUGUST 01, 2017
BY REVISION DATE
GENERAL NOTES:
1. ALL NOTES AND DETAILS PERTAINING TO NORMAL "W" BEAM GUARDRAIL INSTALLATION NOT SPECIFICALLY MODIFIED ON THIS SHEET WILL BE FOUND ON EITHER SHEET GR-1 (WOOD POSTS) OR GR-1B (STEEL POSTS).
2. INSTALLATION DETAILS FOR BRIDGE END SECTION GUARDRAIL POSTS WILL BE FOUND ON EITHER SHEET GR-2C (WOOD POSTS) OR GR-2D (STEEL POSTS).
3. THE HEIGHT OF RAIL AT THE BRIDGE END IS 21" AND WILL BE TRANSITIONED TO 25" AT POST 5.
4. GUARDRAIL ELEMENTS SHALL BE LAPPED IN THE DIRECTION OF TRAFFIC. THE ONLY EXCEPTION NOTED IS THAT GUARDRAIL SHALL BE LAPPED FOR APPROACHING TRAFFIC ON A BRIDGE WITH 2-WAY TRAFFIC.
PLAN
PAY LIMITS FOR TYPE "G" MODIFIED BRIDGE END SECTION
STANDARD "W" BEAM INSTALLATION (SEE GENERAL NOTE 1.)
25'-0"
POST 1
POST 2
POST 3
POST 4
POST 5
POST 6
3'-1½"
6'-3"
GUARDRAIL SPLICE
CENTERLINE OF POST HOLES IN "W" BEAM GUARDRAIL (SEE GENERAL NOTE 2.)
FACE OF GUARDRAIL
SEE GUARDRAIL CONNECTION DETAILS
CONCRETE BRIDGE RAIL
CURB LINE
"W" BEAM TERMINAL CONNECTOR, TERMINAL CONNECTOR IS FASTENED TO THE GUARDRAIL SECTION WITH EIGHT (8) EACH, GUARDRAIL BOLT "A" AND RECESSED NUT.
7'-6" CURB TRANSITION
TRAFFIC
GUARDRAIL CONNECTION DETAILS
SECTION
GUARDRAIL ANCHOR ASSEMBLY (INSTALLED DURING BRIDGE CONSTRUCTION)
HSS HEX NUT AND BOLT "C", 10" LONG, FOUR (4) REQUIRED.
HARDENED ROUND WASHER "E", ONE (1) UNDER HEAD AND ONE (1) UNDER NUT, EIGHT (8) REQUIRED.
PLATE "Y"
12" X 4⅛" X ⅝" PLATE
BOTH SIDES
"W" BEAM GUARDRAIL
TWO (2) EACH, GUARDRAIL BOLT "A" AND RECESSED NUT.
FACE ELEVATION
⅝" X 1⅛" SLOTTED HOLES IN "W" BEAM SECTION (TYP.)
OPTIONAL ¾" X 2½" SLOTTED HOLE IN "W" SECTION (BOLT NOT REQUIRED).
"W" BEAM SECTION, 16' LONG (AASHTO M 180 CLASS B, TYPE II)
12" X 4⅛" X ⅝" PLATE, TWO (2) REQUIRED, TOP AND BOTTOM.
THESE SLOTS ARE USED TO FASTEN GUARDRAIL.
1" HOLES IN PLATE "Y" (TYP.)
DETAIL OF PLATE "Y"
"W" BEAM TERMINAL CONNECTOR
NOTE: THE "W" BEAM TERMINAL CONNECTOR IS USED WITH THE TYPE "G" MODIFIED BRIDGE END SECTION. THE CROSS-SECTIONAL DIMENSIONS OF THIS PART ARE IDENTICAL TO THE STANDARD "W" BEAM SECTION (AASHTO M 180 CLASS B, TYPE II).
ELEVATION
PLAN
¾" X 2½" SLOTTED HOLE (BOLT NOT REQUIRED)
⅝" X 1⅛" SLOT FOR GUARDRAIL BOLT "A" (TYP.)
1" DIA. HOLES (TYP.)
SECTION A–A
SECTION B–B
CONCRETE BRIDGE RAIL
GUARDRAIL ANCHOR ASSEMBLY (INSTALLED DURING BRIDGE CONSTRUCTION)
HSS HEX NUT AND BOLT "C", 10" LONG, FOUR (4) REQUIRED.
HARDENED ROUND WASHER "E", ONE (1) UNDER HEAD AND ONE (1) UNDER NUT, EIGHT (8) REQUIRED.
"W" BEAM SECTION, 16' LONG (AASHTO M 180 CLASS B, TYPE II)
"W" BEAM GUARDRAIL
TWO (2) EACH, GUARDRAIL BOLT "A" AND RECESSED NUT.
(SEE GENERAL NOTE 3.)
CURB FACE
RIDING SURFACE OF BRIDGE DECK
HARDENED ROUND WASHER "E", FOUR (4) REQUIRED.
BEVELED WASHER, FOUR (4) REQUIRED.
EIGHT (8) EACH, GUARDRAIL BOLT "A" AND RECESSED NUT.
"W" BEAM TERMINAL CONNECTOR
9:1 SLOPE
BEVELED WASHER
RECTANGULAR GUARDRAIL PLATE WASHER
¾" - 9 UNC. THREAD PITCH
HIGH-STRENGTH STRUCTURAL HEX NUT AND BOLT "C" (ASTM A 325)
HARDENED ROUND WASHER "E"
FASTENER DETAILS

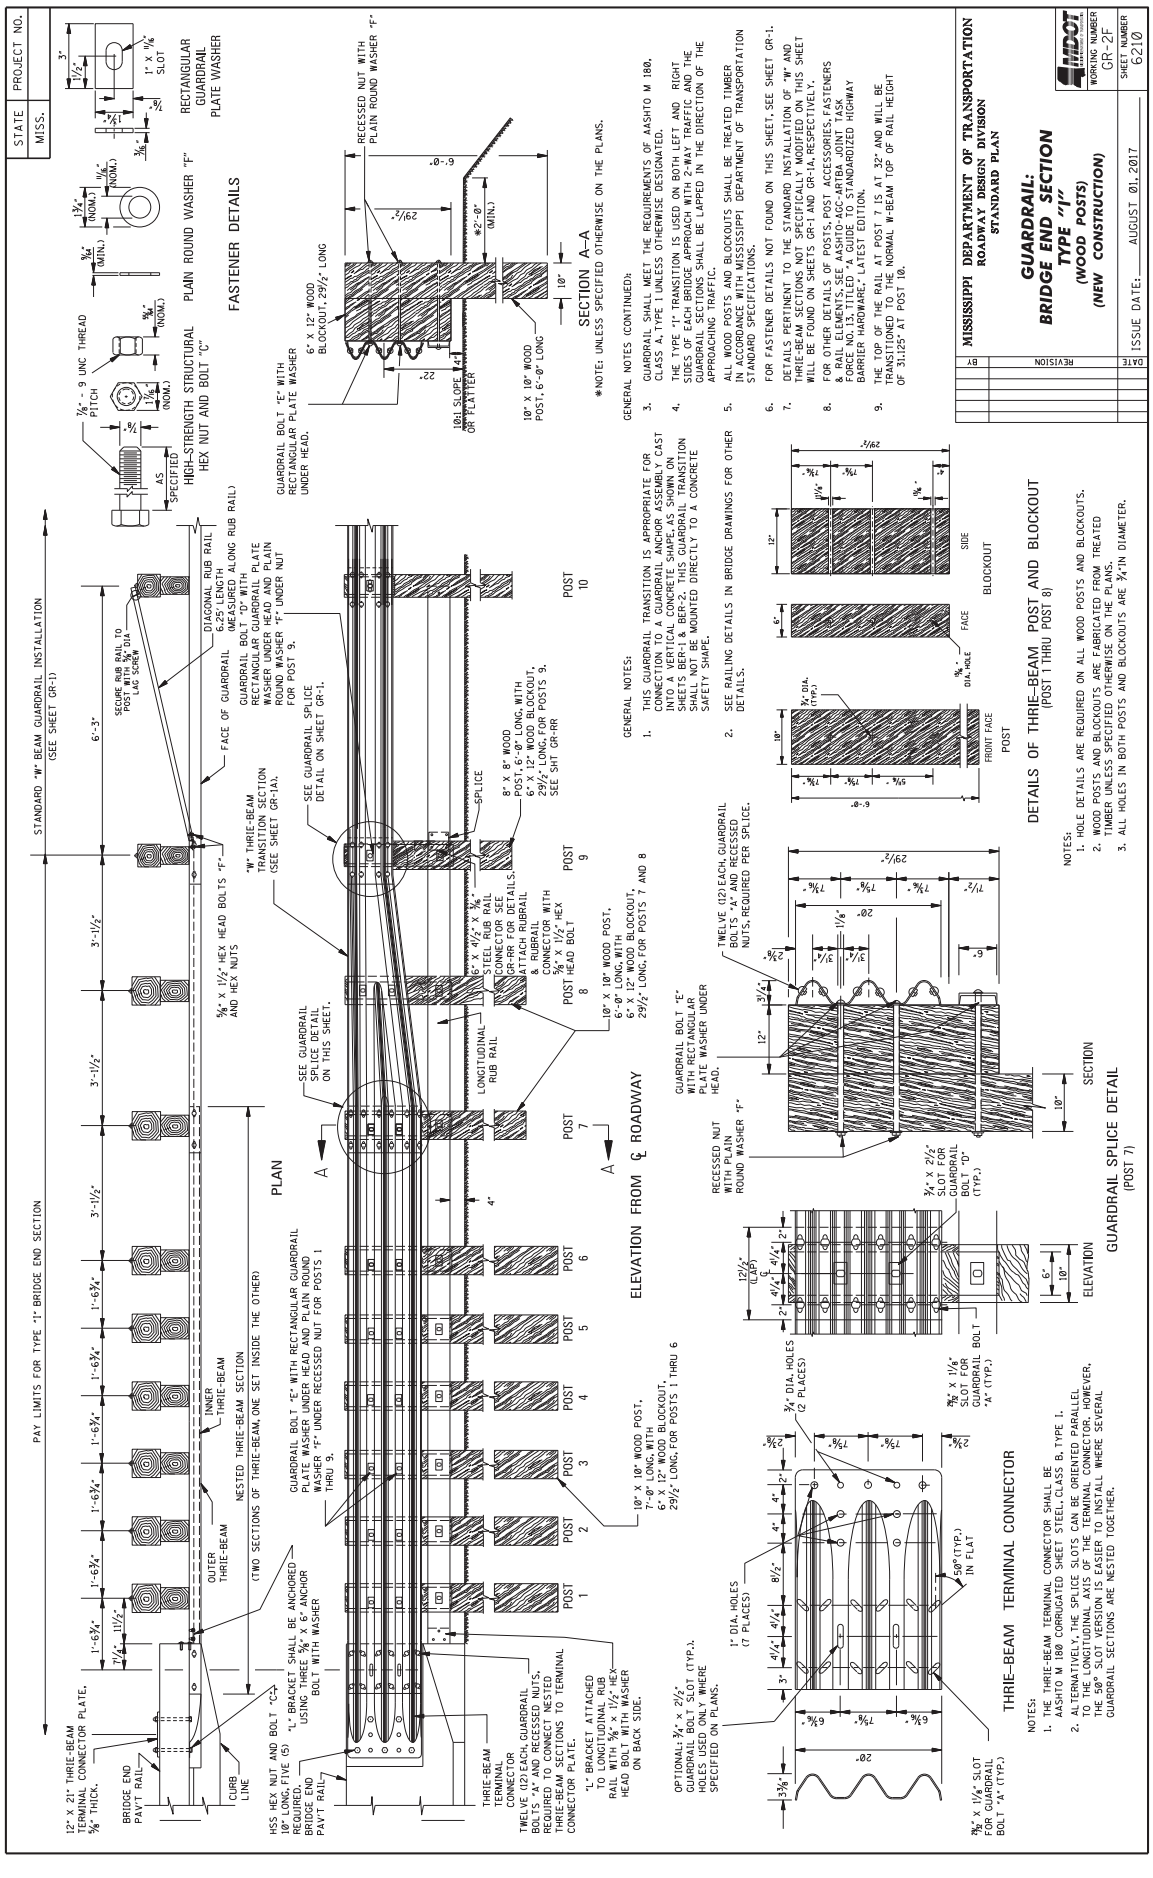

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
GUARDRAIL:
BRIDGE END SECTION
TYPE "I"
(WOOD POSTS)
(NEW CONSTRUCTION)
WORKING NUMBER GR-2F
SHEET NUMBER 6210
ISSUE DATE: AUGUST 01, 2017
DATE REVISION BY
STANDARD "W" BEAM GUARDRAIL INSTALLATION (SEE SHEET GR-1)
PAY LIMITS FOR TYPE "I" BRIDGE END SECTION
PLAN
ELEVATION FROM ℄ ROADWAY
SECTION A–A
*NOTE: UNLESS SPECIFIED OTHERWISE ON THE PLANS.
FASTENER DETAILS
HIGH-STRENGTH STRUCTURAL HEX NUT AND BOLT "C"
PLAIN ROUND WASHER "F"
RECTANGULAR GUARDRAIL PLATE WASHER
GENERAL NOTES (CONTINUED):
3. GUARDRAIL SHALL MEET THE REQUIREMENTS OF AASHTO M 180, CLASS A, TYPE I UNLESS OTHERWISE DESIGNATED.
4. THE TYPE "I" TRANSITION IS USED ON BOTH LEFT AND RIGHT SIDES OF EACH BRIDGE APPROACH WITH 2-WAY TRAFFIC AND THE APPROACH TRAFFIC SHALL BE LAPPED IN THE DIRECTION OF THE APPROACH.
5. ALL WOOD POSTS AND BLOCKOUTS SHALL BE TREATED TIMBER IN ACCORDANCE WITH MISSISSIPPI DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS.
6. FOR FASTENER DETAILS NOT FOUND ON THIS SHEET, SEE SHEET GR-1.
7. DETAILS PERTINENT TO THE STANDARD INSTALLATION OF "W" AND THRIE-BEAM SECTIONS NOT SPECIFICALLY MODIFIED ON THIS SHEET WILL BE FOUND ON SHEETS GR-1 AND GR-1A, RESPECTIVELY.
8. FOR OTHER DETAILS OF POSTS, POST ACCESSORIES, FASTENERS & ALL HARDWARE, SEE SHEETS GR-1 AND GR-1A. REFER TO MASH TEST LEVEL 3 (TL-3) FOR GUARDRAIL TRANSITIONS AND BRIDGE BARRIER HARDWARE, LATEST EDITION.
9. THE TOP OF THE RAIL AT POST 7 IS AT 32" AND WILL BE TRANSITIONED TO THE NORMAL W-BEAM TOP OF RAIL HEIGHT OF 31.125" AT POST 10.
GENERAL NOTES:
1. THIS GUARDRAIL TRANSITION IS APPROPRIATE FOR CONNECTION TO A GUARDRAIL ANCHOR ASSEMBLY CAST INTO A VERTICAL CONCRETE SHAPE AS SHOWN ON SHEETS BER-1 & BER-2. THIS GUARDRAIL TRANSITION SHALL NOT BE MOUNTED DIRECTLY TO A CONCRETE SAFETY SHAPE.
2. SEE RAILING DETAILS IN BRIDGE DRAWINGS FOR OTHER DETAILS.
NOTES:
1. HOLE DETAILS ARE REQUIRED ON ALL WOOD POSTS AND BLOCKOUTS.
2. WOOD POSTS AND BLOCKOUTS ARE FABRICATED FROM TREATED TIMBER UNLESS SPECIFIED OTHERWISE ON THE PLANS.
3. ALL HOLES IN BOTH POSTS AND BLOCKOUTS ARE ¾"IN DIAMETER.
DETAILS OF THRIE-BEAM POST AND BLOCKOUT (POST 1 THRU POST 8)
THRIE-BEAM TERMINAL CONNECTOR
NOTES:
1. THE THRIE-BEAM TERMINAL CONNECTOR SHALL BE AASHTO M 180 CORRUGATED SHEET STEEL, CLASS B, TYPE I.
2. ALTERNATIVELY, THE SPLICE SLOTS CAN BE ORIENTED PARALLEL TO THE LONGITUDINAL AXIS OF THE TERMINAL CONNECTOR, HOWEVER, THE 50° SLOT VERSION IS EASIER TO INSTALL WHERE SEVERAL GUARDRAIL SECTIONS ARE NESTED TOGETHER.
GUARDRAIL SPLICE DETAIL (POST 7)
12" X 21" THRIE-BEAM TERMINAL CONNECTOR PLATE. ⅜" THICK.
BRIDGE END PAVT. RAIL
CURB LINE
HSS HEX NUT AND BOLT "C". 10" LONG, FIVE (5) REQUIRED.
"L" BRACKET SHALL BE ANCHORED TO BRIDGE END PAVT. RAIL WITH ¾" X 6" ANCHOR BOLT WITH WASHER
"L" BRACKET ATTACHED TO LONGITUDINAL RUB RAIL WITH ¾" X 1½" HEX HEAD BOLT WITH WASHER ON BACK SIDE.
THRIE-BEAM TERMINAL CONNECTOR
TWELVE (12) EACH, GUARDRAIL BOLTS "A" AND RECESSED NUTS, REQUIRED TO CONNECT NESTED THRIE-BEAM SECTIONS TO TERMINAL CONNECTOR PLATE
OUTER THRIE-BEAM
INNER THRIE-BEAM
NESTED THRIE-BEAM, ONE SET INSIDE THE OTHER)
(TWO SECTIONS OF THRIE-BEAM,
GUARDRAIL BOLT "C" WITH RECTANGULAR GUARDRAIL PLATE WASHER UNDER HEAD AND PLAIN ROUND WASHER "F" UNDER RECESSED NUT FOR POSTS 1 THRU 9.
OPTIONAL: ¾" X 2½" GUARDRAIL BOLT SLOT (TYP.). HOLES USED ONLY WHERE SPECIFIED ON PLANS.
1" DIA. HOLES (7 PLACES)
¾" DIA. HOLES (2 PLACES)
¾" X 1¼" SLOT FOR GUARDRAIL BOLT "A" (TYP.)
50° (TYP.) IN FLAT
¾" X 1¼" SLOT FOR GUARDRAIL BOLT "A" (TYP.)
¾" X 2½" SLOT FOR GUARDRAIL BOLT "D" (TYP.)
GUARDRAIL BOLT "E" WITH RECTANGULAR PLATE WASHER UNDER HEAD.
RECESSED NUT WITH PLAIN ROUND WASHER "F"
TWELVE (12) EACH, GUARDRAIL BOLTS "A" AND RECESSED NUTS, REQUIRED PER SPLICE.
SECURE RUB RAIL TO POST WITH ⅝" DIA. LAG SCREW
DIAGONAL RUB RAIL 6.25" LENGTH
FACE OF GUARDRAIL
GUARDRAIL BOLT "D" WITH RECTANGULAR GUARDRAIL PLATE WASHER UNDER HEAD AND PLAIN WASHER "F" UNDER NUT FOR POST 9.
"W" THRIE-BEAM TRANSITION SECTION (SEE SHEET GR-1A).
SEE GUARDRAIL SPLICE DETAIL ON SHEET GR-1.
⅝" X 1½" HEX HEAD BOLTS "F" AND HEX NUTS
SEE GUARDRAIL SPLICE DETAIL ON THIS SHEET.
LONGITUDINAL RUB RAIL
6" X 4½" X ¾" STEEL RUB RAIL CONNECTOR SEE GR-RR FOR DETAILS. ATTACH RUBRAIL & RUBRAIL CONNECTOR WITH ⅝" X 1½" HEX HEAD BOLT
SPLICE
8" X 8" WOOD POST, 6'-6" LONG, WITH 6" X 12" WOOD BLOCKOUT, 29½" LONG, FOR POSTS 9. SEE SHT GR-RR
10" X 10" WOOD POST, 6'-0" LONG, WITH 6" X 12" WOOD BLOCKOUT, 29½" LONG, FOR POSTS 7 AND 8
10" X 10" WOOD POST, 7'-0" LONG, WITH 6" X 12" WOOD BLOCKOUT, 29½" LONG, FOR POSTS 1 THRU 6
POST 1
POST 2
POST 3
POST 4
POST 5
POST 6
POST 7
POST 8
POST 9
POST 10
6" X 12" WOOD BLOCKOUT, 29½" LONG
GUARDRAIL BOLT "C" WITH RECTANGULAR PLATE WASHER UNDER HEAD.
RECESSED NUT WITH PLAIN ROUND WASHER "F"
10" X 10" WOOD POST, 6'-0" LONG
10¦ SLOPE ¼¦ OR FLATTER
SIDE
FACE
FRONT FACE
BLOCKOUT
POST
DIA. HOLE
¾" DIA. (TYP.)

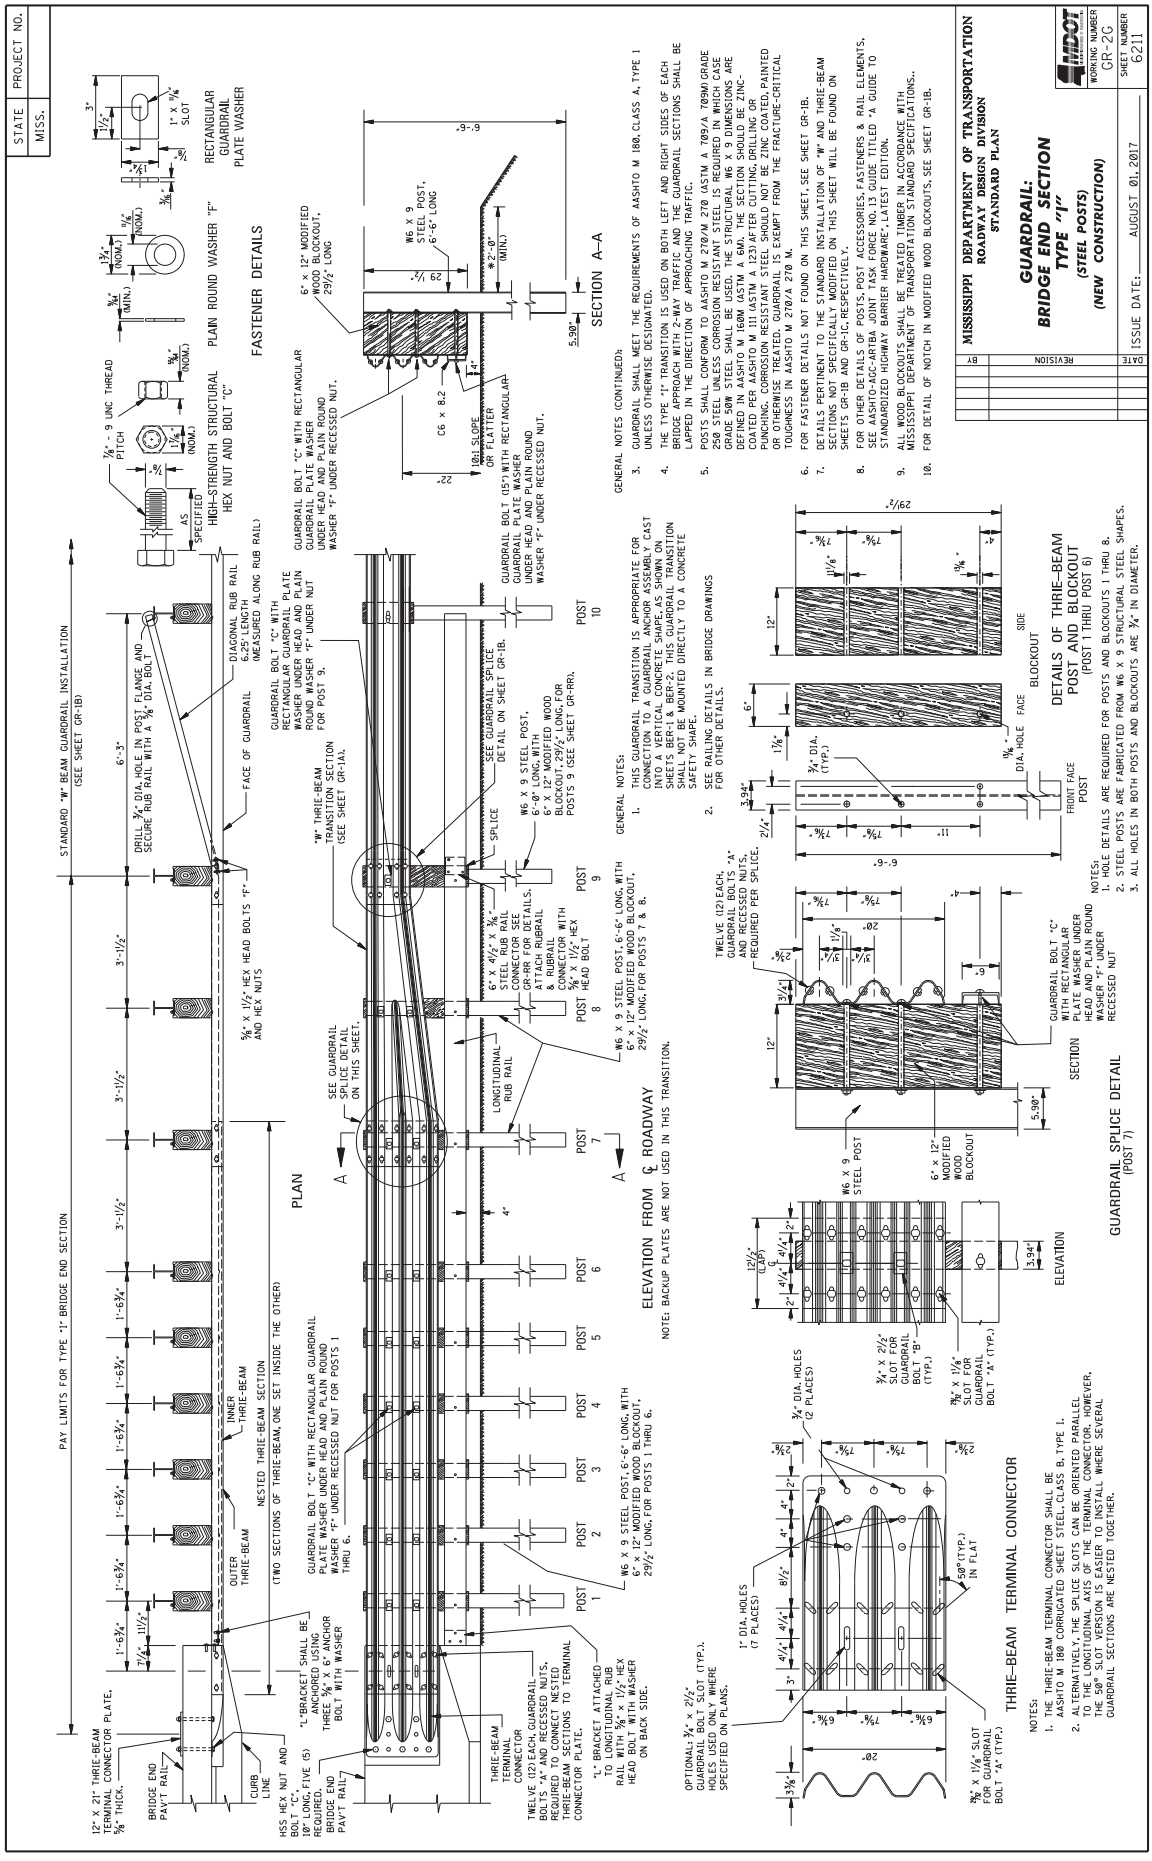

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
GUARDRAIL:
BRIDGE END SECTION
TYPE "1"
(STEEL POSTS)
(NEW CONSTRUCTION)
WORKING NUMBER GR-2G
SHEET NUMBER 6211
ISSUE DATE: AUGUST 01, 2017
DATE REVISION BY
PLAN
ELEVATION FROM ℄ ROADWAY
SECTION A–A
FASTENER DETAILS
THRIE-BEAM TERMINAL CONNECTOR
GUARDRAIL SPLICE DETAIL (POST 7)
DETAILS OF THRIE-BEAM POST AND BLOCKOUT (POST 1 THRU POST 6)
GENERAL NOTES (CONTINUED):
GENERAL NOTES:
NOTES:
STANDARD "W" BEAM GUARDRAIL INSTALLATION (SEE SHEET GR-1B)
PAY LIMITS FOR TYPE "1" BRIDGE END SECTION
12" X 21" THRIE-BEAM TERMINAL CONNECTOR PLATE, 5/8" THICK.
BRIDGE END PAV'T RAIL
CURB LINE
HSS HEX NUT AND BOLT ASSY. FIVE (5) REQUIRED.
BRIDGE END PAV'T RAIL
"L" BRACKET SHALL BE ANCHORED USING THREE 5/8" X 6" ANCHOR BOLT WITH WASHER
OUTER THRIE-BEAM
INNER THRIE-BEAM
NESTED THRIE-BEAM SECTION (TWO SECTIONS OF THRIE-BEAM, ONE SET INSIDE THE OTHER)
TWELVE (12) EACH GUARDRAIL BOLTS "A" AND RECESSED NUTS, REQUIRED TO CONNECT NESTED THRIE-BEAM SECTIONS TO TERMINAL CONNECTOR PLATE.
"L" BRACKET ATTACHED TO LONGITUDINAL RUB RAIL WITH 5/8" X 1½" HEX HEAD BOLT WITH WASHER ON BACK SIDE.
THRIE-BEAM TERMINAL CONNECTOR
GUARDRAIL BOLT "C" WITH RECTANGULAR PLATE WASHER UNDER HEAD AND PLAIN ROUND WASHER "F" UNDER RECESSED NUT.
GUARDRAIL PLATE WASHER
GUARDRAIL BOLT "C" WITH RECTANGULAR PLATE WASHER UNDER HEAD AND PLAIN ROUND WASHER "F" UNDER RECESSED NUT.
6" X 12" MODIFIED WOOD BLOCKOUT, 29½" LONG
W6 X 9 STEEL POST, 6'-6" LONG, WITH 6" X 12" MODIFIED WOOD BLOCKOUT, 29½" LONG, FOR POSTS 1 THRU 6.
DRILL ¾" DIA. HOLE IN POST FLANGE AND SECURE RUB RAIL WITH A ¾" DIA. BOLT
FACE OF GUARDRAIL
DIAGONAL RUB RAIL 6.25' LENGTH (MEASURED ALONG RUB RAIL)
GUARDRAIL BOLT "C" WITH RECTANGULAR GUARDRAIL PLATE WASHER UNDER HEAD AND PLAIN ROUND WASHER "F" UNDER NUT
"W" THRIE-BEAM TRANSITION SECTION (SEE SHEET GR-1A).
⅝" X 1½" HEX HEAD BOLTS "F" AND HEX NUTS
SEE GUARDRAIL SPLICE DETAIL ON THIS SHEET.
SEE GUARDRAIL SPLICE DETAIL ON SHEET GR-1B.
W6 X 9 STEEL POST, 6'-0" LONG, WITH 6" X 12" MODIFIED WOOD BLOCKOUT, 29½" LONG, FOR POSTS 9 (SEE SHEET GR-1RR).
SPLICE
6" X 4½" X ⅜" STEEL RUB RAIL CONNECTOR SEE GR-RR FOR DETAILS. ATTACH RUBRAIL & RUBRAIL CONNECTOR WITH ⅝" X 1½" HEX HEAD BOLT
LONGITUDINAL RUB RAIL
POST 1 POST 2 POST 3 POST 4 POST 5 POST 6 POST 7 POST 8 POST 9 POST 10
1'-6¾" 1'-6¾" 1'-6¾" 1'-6¾" 1'-6¾" 1'-6¾" 3'-1½" 3'-1½" 3'-1½" 6'-3"
NOTE: BACKUP PLATES ARE NOT USED IN THIS TRANSITION.
GENERAL NOTES:
1. THIS GUARDRAIL TRANSITION IS APPROPRIATE FOR CONNECTION TO A GUARDRAIL ANCHOR ASSEMBLY CAST INTO A VERTICAL CONCRETE SHAPE, AS SHOWN ON SHEET GR-1RR & GR-2C. THIS GUARDRAIL TRANSITION SHALL NOT BE MOUNTED DIRECTLY TO A CONCRETE SAFETY SHAPE.
2. SEE RAILING DETAILS IN BRIDGE DRAWINGS FOR OTHER DETAILS.
3. GUARDRAIL SHALL MEET THE REQUIREMENTS OF AASHTO M 180, CLASS A, TYPE 1 UNLESS OTHERWISE DESIGNATED.
4. THE TYPE "1" TRANSITION IS USED ON BOTH LEFT AND RIGHT SIDES OF EACH BRIDGE APPROACH WITH 2-WAY TRAFFIC AND THE GUARDRAIL SECTIONS SHALL BE LAPPED IN THE DIRECTION OF APPROACHING TRAFFIC.
5. POSTS SHALL CONFORM TO AASHTO M 270/M 270 (ASTM A 709/A 709M) GRADE 250 STEEL UNLESS CORROSION RESISTANT STEEL IS REQUIRED IN WHICH CASE GRADE 500W STEEL SHALL BE USED. THE STRUCTURAL W 9 DIMENSIONS ARE DESCRIBED IN ASTM A6/A6M. ALL STEEL SHALL BE GALVANIZED AND ZINC-COATED PER AASHTO M 111/ASTM A 123 AFTER CUTTING, DRILLING OR PUNCHING. CORROSION RESISTANT STEEL SHOULD NOT BE ZINC COATED, PAINTED OR OTHERWISE TREATED. GUARDRAIL IS EXEMPT FROM THE FRACTURE-CRITICAL TOUGHNESS IN AASHTO M 270/A 270 W.
6. FOR FASTENER DETAILS NOT FOUND ON THIS SHEET, SEE SHEET GR-1B.
7. DETAILS PERTINENT TO THE STANDARD INSTALLATION OF "W" AND THRIE-BEAM SECTIONS NOT SPECIFICALLY MODIFIED ON THIS SHEET WILL BE FOUND ON SHEETS GR-1B AND GR-1C, RESPECTIVELY.
8. FOR OTHER DETAILS OF POSTS, POST ACCESSORIES, FASTENERS & RAIL ELEMENTS, SEE AASHTO-AGC-ARTBA JOINT TASK FORCE NO.13 GUIDE TITLED "A GUIDE TO STANDARDIZED HIGHWAY BARRIER HARDWARE", LATEST EDITION.
9. ALL WOOD BLOCKOUTS SHALL BE TREATED TIMBER IN ACCORDANCE WITH MISSISSIPPI DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS..
10. FOR DETAIL OF NOTCH IN MODIFIED WOOD BLOCKOUTS, SEE SHEET GR-1B.
NOTES:
1. THE THRIE-BEAM TERMINAL CONNECTOR SHALL BE AASHTO M 180 CORRUGATED SHEET STEEL, CLASS B, TYPE I.
2. ALTERNATIVELY, THE SPLICE SLOTS CAN BE ORIENTED PARALLEL TO THE LONGITUDINAL AXIS OF THE TERMINAL CONNECTOR. HOWEVER, THE 50° SLOT VERSION IS EASIER TO INSTALL WHERE SEVERAL GUARDRAIL SECTIONS ARE NESTED TOGETHER.
1. HOLE DETAILS ARE REQUIRED FOR POSTS AND BLOCKOUTS 1 THRU 8.
2. STEEL POSTS ARE FABRICATED FROM W6 X 9 STRUCTURAL STEEL SHAPES.
3. ALL HOLES IN BOTH POSTS AND BLOCKOUTS ARE ¾" IN DIAMETER.

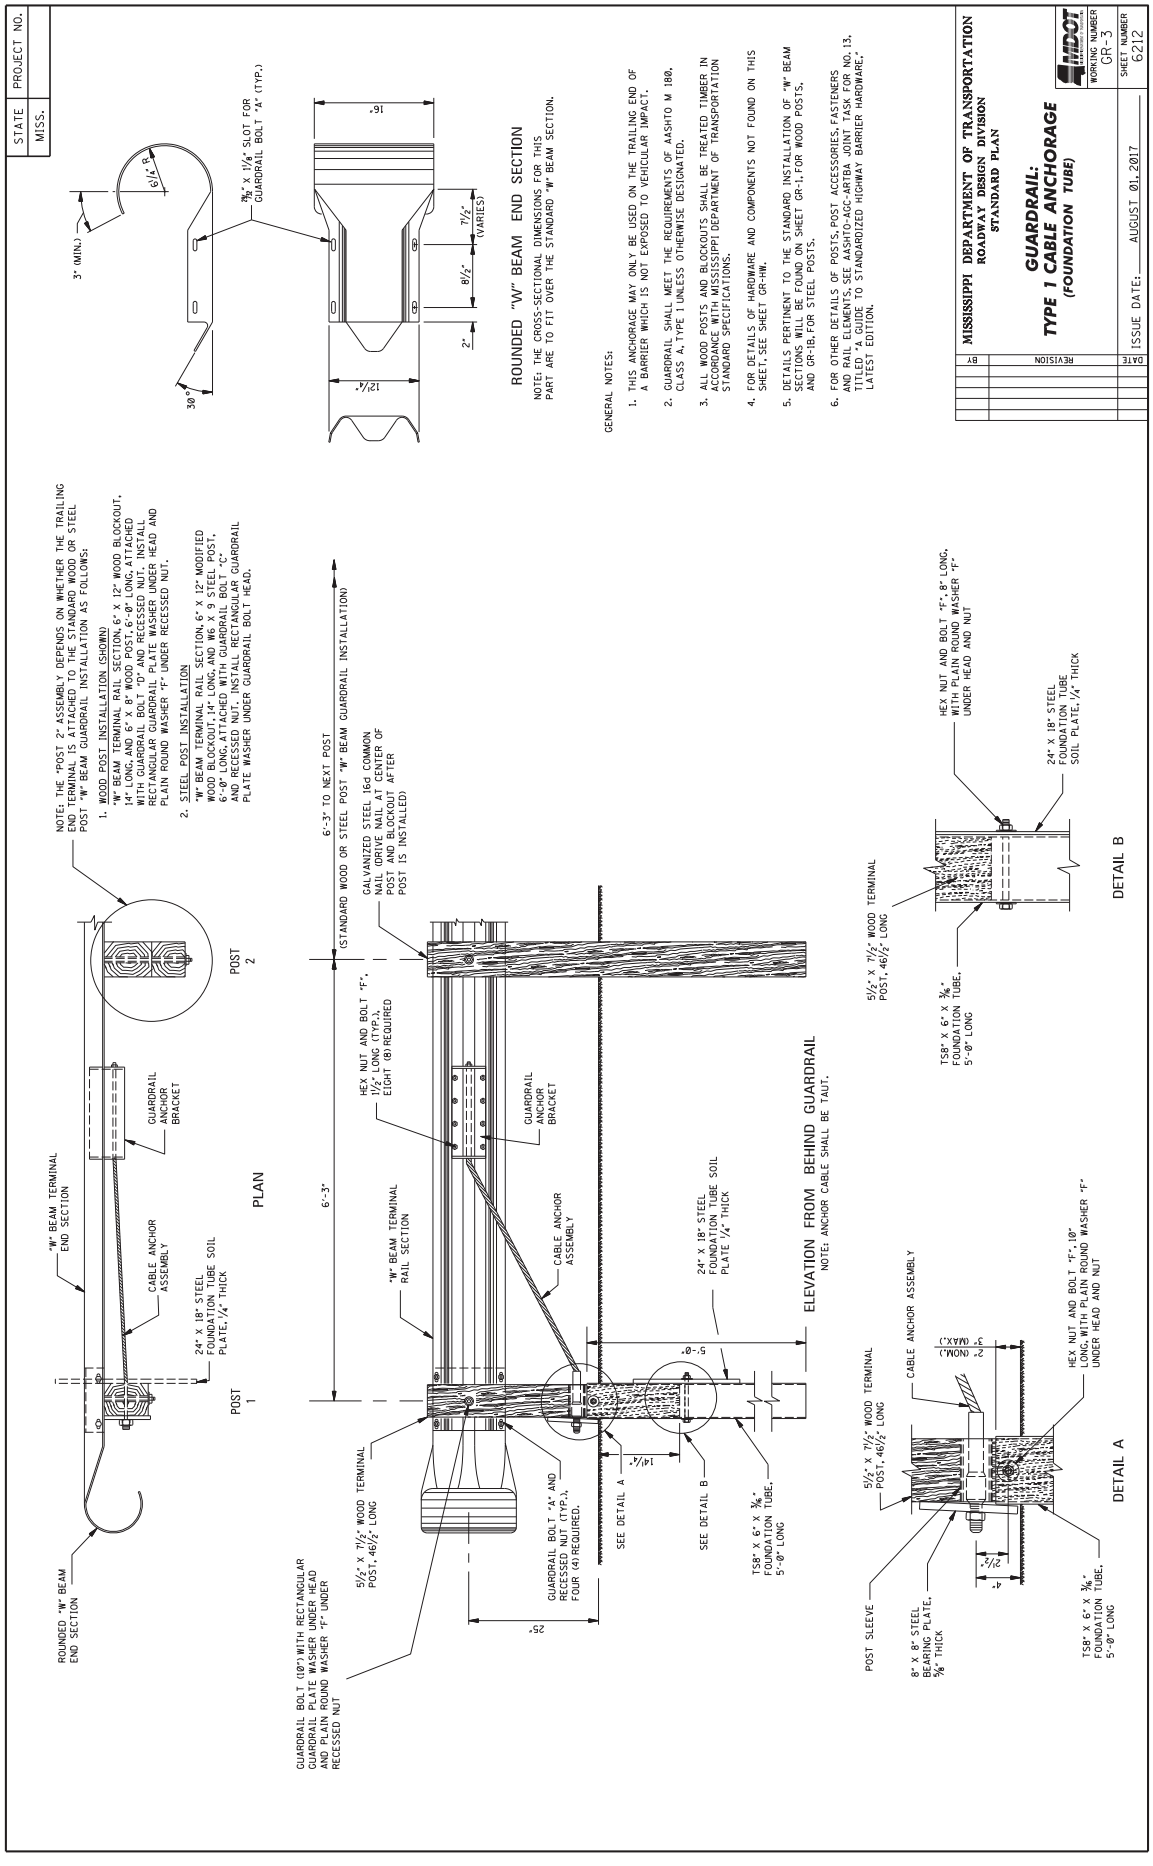

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
GUARDRAIL:
TYPE 1 CABLE ANCHORAGE
(FOUNDATION TUBE)
WORKING NUMBER GR-3
SHEET NUMBER 6212
ISSUE DATE: AUGUST 01, 2017
DATE REVISION BY
GENERAL NOTES:
1. THIS ANCHORAGE MAY ONLY BE USED ON THE TRAILING END OF A BARRIER WHICH IS NOT EXPOSED TO VEHICULAR IMPACT.
2. GUARDRAIL SHALL MEET THE REQUIREMENTS OF AASHTO M 180, CLASS A, TYPE 1 UNLESS OTHERWISE DESIGNATED.
3. ALL WOOD POSTS AND BLOCKOUTS SHALL BE TREATED TIMBER IN ACCORDANCE WITH MISSISSIPPI DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS.
4. FOR DETAILS OF HARDWARE AND COMPONENTS NOT FOUND ON THIS SHEET, SEE SHEET GR-HW.
5. DETAILS PERTINENT TO THE STANDARD INSTALLATION OF "W" BEAM SECTIONS WILL BE FOUND ON SHEET GR-1, FOR WOOD POSTS, AND GR-1B, FOR STEEL POSTS.
6. FOR OTHER DETAILS OF POSTS, POST ACCESSORIES, FASTENERS AND RAIL ELEMENTS, SEE AASHTO-AGC-ARTBA JOINT TASK FOR NO. 13, TITLED "A GUIDE TO STANDARDIZED HIGHWAY BARRIER HARDWARE," LATEST EDITION.
ROUNDED "W" BEAM END SECTION
NOTE: THE CROSS-SECTIONAL DIMENSIONS FOR THIS PART ARE TO FIT OVER THE STANDARD "W" BEAM SECTION.
3" (MIN.)
6 1/4" R
30°
7/8" X 1 1/4" SLOT FOR GUARDRAIL BOLT "A" (TYP.)
12 1/4"
16"
8 1/2"
7 1/2" (VARIES)
2"
NOTE: THE "POST 2" ASSEMBLY DEPENDS ON WHETHER THE TRAILING END TERMINAL IS ATTACHED TO THE STANDARD WOOD OR STEEL POST "W" BEAM GUARDRAIL INSTALLATION AS FOLLOWS:
1. WOOD POST INSTALLATION (SHOWN)
"W" BEAM TERMINAL RAIL SECTION, 6" X 12" WOOD BLOCKOUT, 14" LONG, AND 6" X 8" WOOD POST, 6'-0" LONG, ATTACHED WITH GUARDRAIL BOLT "D" AND RECESSED NUT. INSTALL RECTANGULAR GUARDRAIL PLATE WASHER UNDER HEAD AND PLAIN ROUND WASHER "F" UNDER RECESSED NUT.
2. STEEL POST INSTALLATION
"W" BEAM TERMINAL RAIL SECTION, 6" X 12" MODIFIED WOOD BLOCKOUT, 14" LONG, AND W6 X 9 STEEL POST, 6'-6" LONG, ATTACHED WITH GUARDRAIL BOLT "C" AND RECESSED NUT. INSTALL RECTANGULAR GUARDRAIL PLATE WASHER UNDER GUARDRAIL BOLT HEAD.
"W" BEAM TERMINAL END SECTION
CABLE ANCHOR ASSEMBLY
GUARDRAIL ANCHOR BRACKET
24" X 18" STEEL FOUNDATION TUBE SOIL PLATE, 1/4" THICK
POST 1
POST 2
PLAN
6'-3" TO NEXT POST (STANDARD WOOD OR STEEL POST "W" BEAM GUARDRAIL INSTALLATION)
GALVANIZED STEEL 16d COMMON NAIL (DRIVE NAIL AT CENTER OF POST AND BLOCKOUT AFTER POST IS INSTALLED)
HEX NUT AND BOLT "F", 1" LONG (TYP.) EIGHT (8) REQUIRED
"W" BEAM TERMINAL RAIL SECTION
6'-3"
5 1/2" X 7 1/2" WOOD TERMINAL POST, 46 1/2" LONG
GUARDRAIL BOLT (18") WITH RECTANGULAR GUARDRAIL PLATE WASHER UNDER HEAD AND PLAIN ROUND WASHER "F" UNDER RECESSED NUT
GUARDRAIL BOLT "A" AND RECESSED NUT (TYP.), FOUR (4) REQUIRED.
25"
14 1/4"
SEE DETAIL A
SEE DETAIL B
5'-0"
TS8" X 6" X 3/16" FOUNDATION TUBE, 5'-0" LONG
24" X 18" STEEL FOUNDATION TUBE SOIL PLATE, 1/4" THICK
ELEVATION FROM BEHIND GUARDRAIL
NOTE: ANCHOR CABLE SHALL BE TAUT.
HEX NUT AND BOLT "F", 8" LONG, WITH PLAIN ROUND WASHER "F" UNDER HEAD AND NUT
5 1/2" X 7 1/2" WOOD TERMINAL POST, 46 1/2" LONG
TS8" X 6" X 3/16" FOUNDATION TUBE, 5'-0" LONG
DETAIL B
POST SLEEVE
8" X 8" STEEL BEARING PLATE, 3/8" THICK
CABLE ANCHOR ASSEMBLY
2" (NOM.) 3" (MAX.)
HEX NUT AND BOLT "F", 10" LONG, WITH PLAIN ROUND WASHER "F" UNDER HEAD AND NUT
2 1/2"
4"
DETAIL A

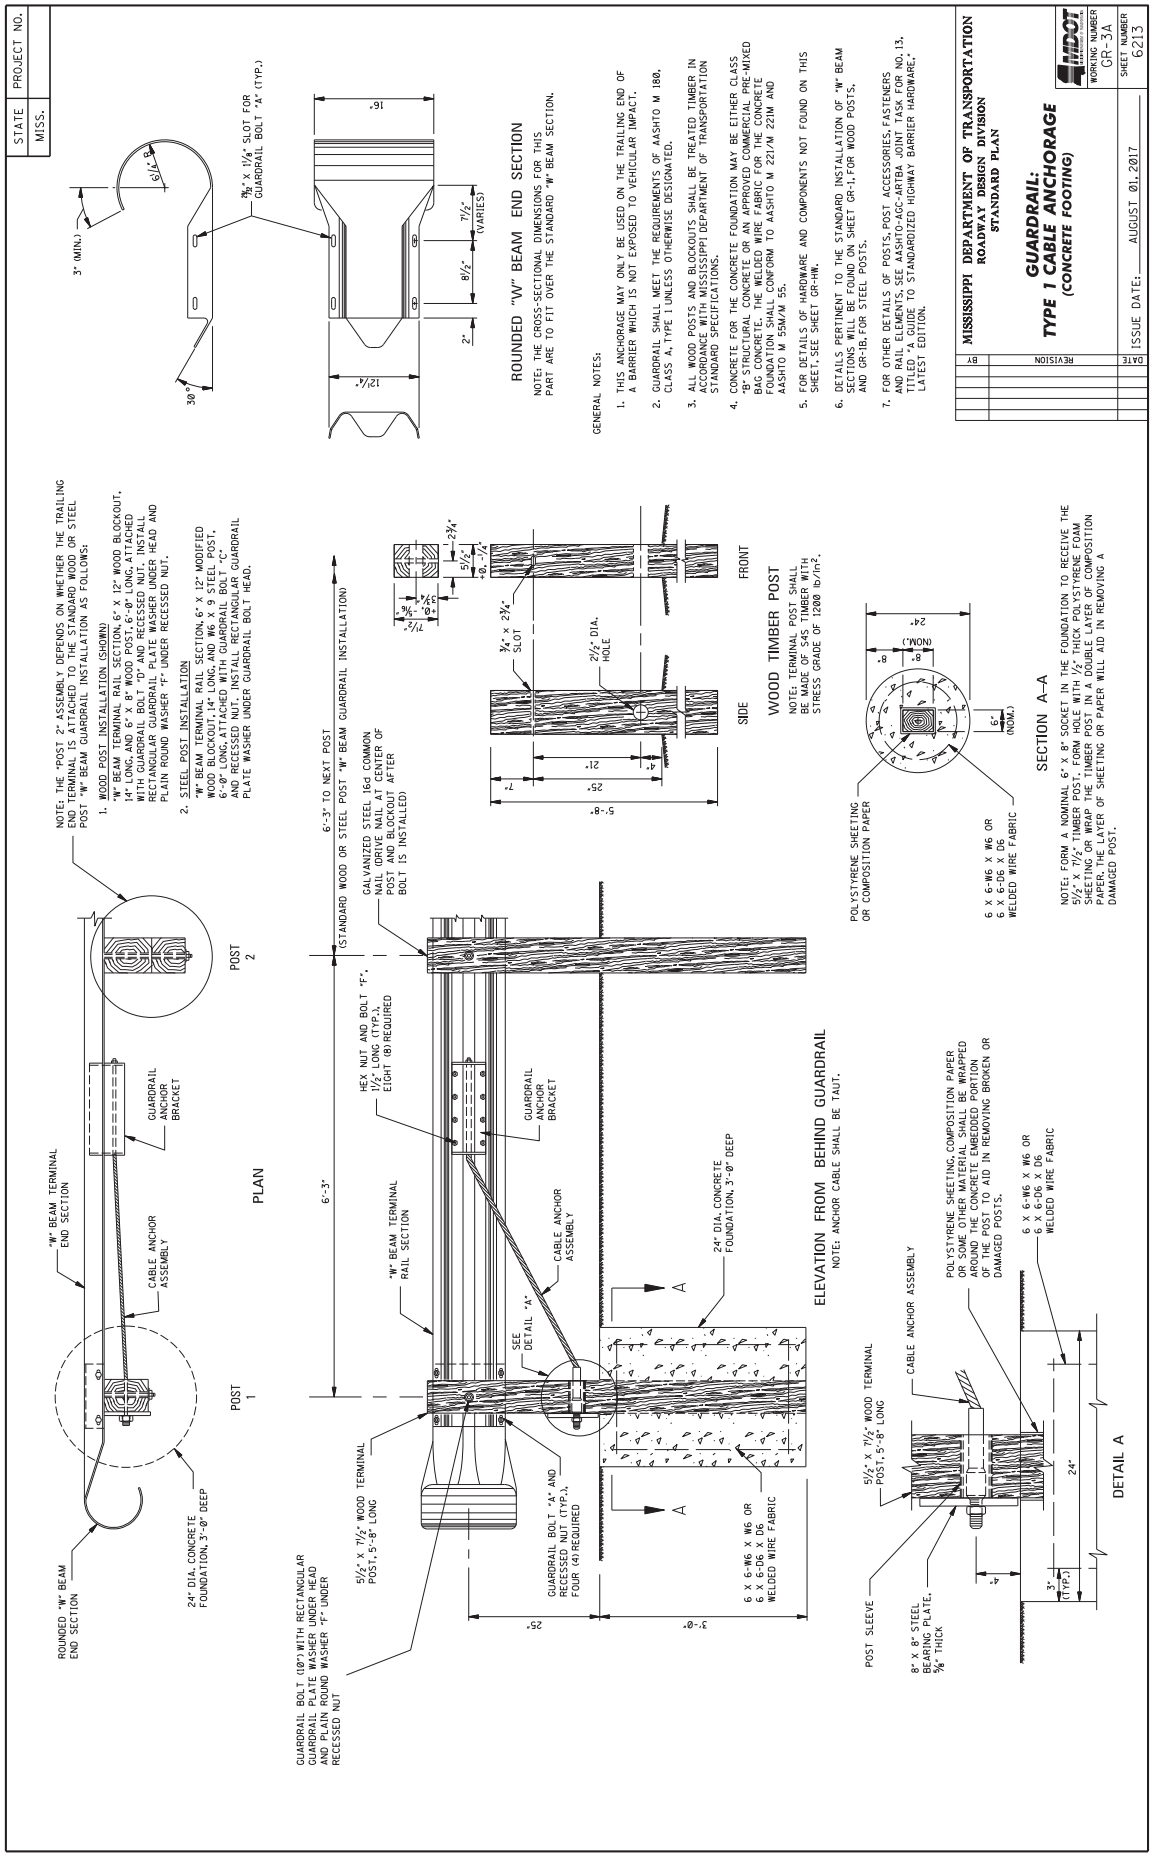

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
GUARDRAIL:
TYPE 1 CABLE ANCHORAGE
(CONCRETE FOOTING)
WORKING NUMBER GR-3A
SHEET NUMBER 6213
ISSUE DATE: AUGUST 01, 2017
DATE REVISION BY
ROUNDED "W" BEAM END SECTION
NOTE: THE CROSS-SECTIONAL DIMENSIONS FOR THIS PART ARE TO FIT OVER THE STANDARD "W" BEAM SECTION.
GENERAL NOTES:
1. THIS ANCHORAGE MAY ONLY BE USED ON THE TRAILING END OF A BARRIER WHICH IS NOT EXPOSED TO VEHICULAR IMPACT.
2. GUARDRAIL SHALL MEET THE REQUIREMENTS OF AASHTO M 180, CLASS A, TYPE I UNLESS OTHERWISE DESIGNATED.
3. ALL WOOD POSTS AND BLOCKOUTS SHALL BE TREATED TIMBER IN ACCORDANCE WITH MISSISSIPPI DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS.
4. CONCRETE FOR THE CONCRETE FOUNDATION MAY BE EITHER CLASS "B" STRUCTURAL CONCRETE OR AN APPROVED COMMERCIAL PRE-MIXED BAG CONCRETE. THE WELDED WIRE FABRIC FOR THE CONCRETE FOUNDATION SHALL CONFORM TO AASHTO M 221/M 221M AND AASHTO M 55M/M 55.
5. FOR DETAILS OF HARDWARE AND COMPONENTS NOT FOUND ON THIS SHEET, SEE SHEET GR-HW.
6. DETAILS PERTINENT TO THE STANDARD INSTALLATION OF "W" BEAM SECTIONS WILL BE FOUND ON SHEET GR-1, FOR WOOD POSTS, AND GR-1B, FOR STEEL POSTS.
7. FOR OTHER DETAILS OF POSTS, POST ACCESSORIES, FASTENERS AND RAIL ELEMENTS, SEE AASHTO-AGC-ARTBA JOINT TASK FOR NO. 13, TITLED "A GUIDE TO STANDARDIZED HIGHWAY BARRIER HARDWARE," LATEST EDITION.
NOTE: THE "POST 2" ASSEMBLY DEPENDS ON WHETHER THE TRAILING END TERMINAL IS ATTACHED TO THE STANDARD WOOD OR STEEL POST "W" BEAM GUARDRAIL INSTALLATION AS FOLLOWS:
1. WOOD POST INSTALLATION (SHOWN)
"W" BEAM TERMINAL RAIL SECTION, 6' X 12" WOOD BLOCKOUT, 14" LONG, AND 6' X 8" WOOD POST, 6'-0" LONG, ATTACHED WITH GUARDRAIL BOLT "D" AND RECESSED NUT. INSTALL RECTANGULAR GUARDRAIL PLATE WASHER UNDER HEAD AND PLAIN ROUND WASHER "F" UNDER RECESSED NUT.
2. STEEL POST INSTALLATION
"W" BEAM TERMINAL RAIL SECTION, 6' X 12" MODIFIED WOOD BLOCKOUT, 14" LONG, AND W6 X 9 STEEL POST, 6'-6" LONG ATTACHED WITH GUARDRAIL BOLT "C" AND RECESSED NUT. INSTALL RECTANGULAR GUARDRAIL PLATE WASHER UNDER GUARDRAIL BOLT HEAD.
"W" BEAM TERMINAL END SECTION
CABLE ANCHOR ASSEMBLY
GUARDRAIL ANCHOR BRACKET
POST 1
POST 2
PLAN
24" DIA. CONCRETE FOUNDATION, 3'-0" DEEP
ROUNDED "W" BEAM END SECTION
GUARDRAIL BOLT (10") WITH RECTANGULAR GUARDRAIL PLATE WASHER UNDER HEAD AND PLAIN ROUND WASHER "F" UNDER RECESSED NUT
6'-3" TO NEXT POST (STANDARD WOOD OR STEEL POST "W" BEAM GUARDRAIL INSTALLATION)
GALVANIZED STEEL 16d COMMON NAIL (DRIVE NAIL AT CENTER OF POST AND BEND AFTER BOLT IS INSTALLED)
HEX NUT AND BOLT "F", 1½" LONG (TYP.), EIGHT (8) REQUIRED
"W" BEAM TERMINAL RAIL SECTION
GUARDRAIL ANCHOR BRACKET
CABLE ANCHOR ASSEMBLY
SEE DETAIL "A"
24" DIA. CONCRETE FOUNDATION, 3'-0" DEEP
5½" X 7½" WOOD TERMINAL POST, 5'-8" LONG
GUARDRAIL BOLT (TYP.), AND RECESSED NUT FOUR (4) REQUIRED
6 X 6-W6 X W6 OR 6 X 6-D6 X D6 WELDED WIRE FABRIC
ELEVATION FROM BEHIND GUARDRAIL
NOTE: ANCHOR CABLE SHALL BE TAUT.
¾" X 2¾" SLOT
2½" DIA. HOLE
SIDE
FRONT
WOOD TIMBER POST
NOTE: TERMINAL POST SHALL BE MADE OF S4S TIMBER WITH STRESS GRADE OF 1200 lb/in².
POLYSTYRENE SHEETING OR COMPOSITION PAPER
6 X 6-W6 X W6 OR 6 X 6-D6 X D6 WELDED WIRE FABRIC
SECTION A–A
NOTE: FORM A NOMINAL 6" X 8" SOCKET IN THE FOUNDATION TO RECEIVE THE 5½" X 7½" TIMBER POST. FORM HOLE WITH 6" X 8" POLYSTYRENE FOAM SHEETING OR WRAP THE TIMBER POST IN A DOUBLE LAYER OF COMPOSITION PAPER. THE LAYER OF SHEETING OR PAPER WILL AID IN REMOVING A DAMAGED POST.
5½" X 7½" WOOD TERMINAL POST, 5'-8" LONG
CABLE ANCHOR ASSEMBLY
POLYSTYRENE SHEETING, COMPOSITION PAPER OR SOME OTHER MATERIAL SHALL BE WRAPPED AROUND THE CONCRETE EMBEDDED PORTION OF THE POST TO AID IN REMOVING BROKEN OR DAMAGED POSTS.
6 X 6-W6 X W6 OR 6 X 6-D6 X D6 WELDED WIRE FABRIC
POST SLEEVE
8" X 8" STEEL BEARING PLATE, ⅝" THICK
DETAIL A

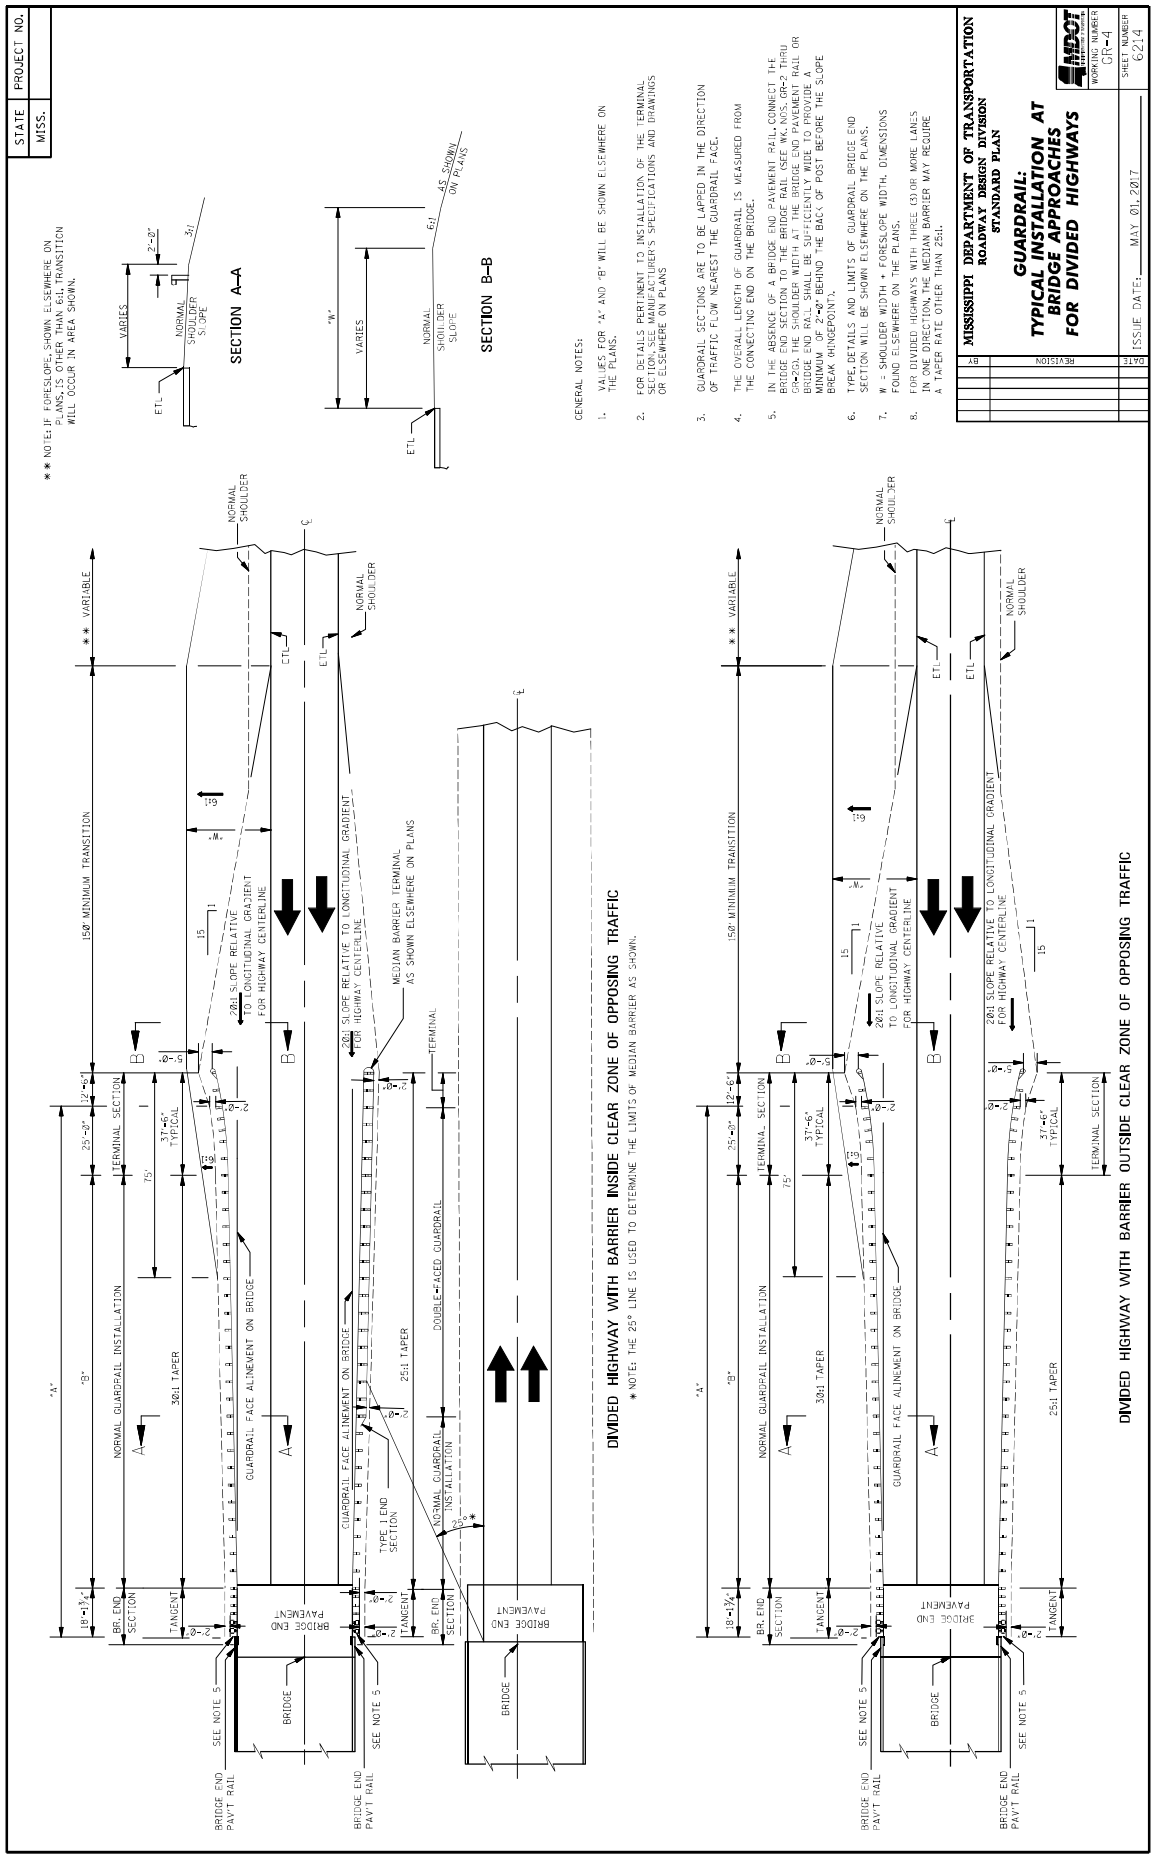

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
GUARDRAIL:
TYPICAL INSTALLATION AT BRIDGE APPROACHES FOR DIVIDED HIGHWAYS
WORKING NUMBER GR-4
SHEET NUMBER 6214
ISSUE DATE: MAY 01, 2017
BY
REVISION
DATE
** NOTE: IF FORESLOPE, SHOWN ELSEWHERE ON PLANS, IS OTHER THAN 6:1, TRANSITION WILL OCCUR IN AREA SHOWN.
SECTION A–A
SECTION B–B
GENERAL NOTES:
1. VALUES FOR "A" AND "B" WILL BE SHOWN ELSEWHERE ON THE PLANS.
2. FOR DETAILS PERTINENT TO INSTALLATION OF THE TERMINAL SECTION, SEE MANUFACTURER'S SPECIFICATIONS AND DRAWINGS OR ELSEWHERE ON PLANS
3. GUARDRAIL SECTIONS ARE TO BE LAPPED IN THE DIRECTION OF TRAFFIC FLOW NEAREST THE GUARDRAIL FACE.
4. THE OVERALL LENGTH OF GUARDRAIL IS MEASURED FROM THE CONNECTING END ON THE BRIDGE.
5. IN THE ABSENCE OF A BRIDGE END PAVEMENT RAIL CONNECT THE BRIDGE END SECTION TO THE BRIDGE RAIL SECTION ACROSS JOINT THRU GR-2(S). THE SHOULDER WIDTH AT THE BRIDGE END PAVEMENT RAIL OR BRIDGE END RAIL SHALL BE SUFFICIENTLY WIDE TO PROVIDE A MINIMUM OF 2'-0" BEHIND THE BACK OF POST BEFORE THE SLOPE BREAK (HINGEPOINT).
6. TYPE DETAILS AND LIMITS OF GUARDRAIL BRIDGE END SECTION WILL BE SHOWN ELSEWHERE ON THE PLANS.
7. "W" = SHOULDER WIDTH + FORESLOPE WIDTH. DIMENSIONS FOUND ELSEWHERE ON THE PLANS.
8. FOR DIVIDED HIGHWAYS WITH THREE (3) OR MORE LANES IN ONE DIRECTION, THE MEDIAN BARRIER MAY REQUIRE A TAPER RATE OTHER THAN 25:1.
DIVIDED HIGHWAY WITH BARRIER INSIDE CLEAR ZONE OF OPPOSING TRAFFIC
* NOTE: THE 25° LINE IS USED TO DETERMINE THE LIMITS OF MEDIAN BARRIER AS SHOWN.
DIVIDED HIGHWAY WITH BARRIER OUTSIDE CLEAR ZONE OF OPPOSING TRAFFIC
NORMAL SHOULDER
ETL
CL
** VARIABLE
150' MINIMUM TRANSITION
20:1 SLOPE RELATIVE TO LONGITUDINAL GRADIENT FOR HIGHWAY CENTERLINE
MEDIAN BARRIER TERMINAL AS SHOWN ELSEWHERE ON PLANS
TERMINAL SECTION
NORMAL GUARDRAIL INSTALLATION
30:1 TAPER
25:1 TAPER
GUARDRAIL FACE ALINEMENT ON BRIDGE
DOUBLE-FACED GUARDRAIL
TYPE 1 END SECTION
BR. END SECTION
TANGENT
BRIDGE END PAVEMENT
BRIDGE
SEE NOTE 5
BRIDGE END PAVT RAIL

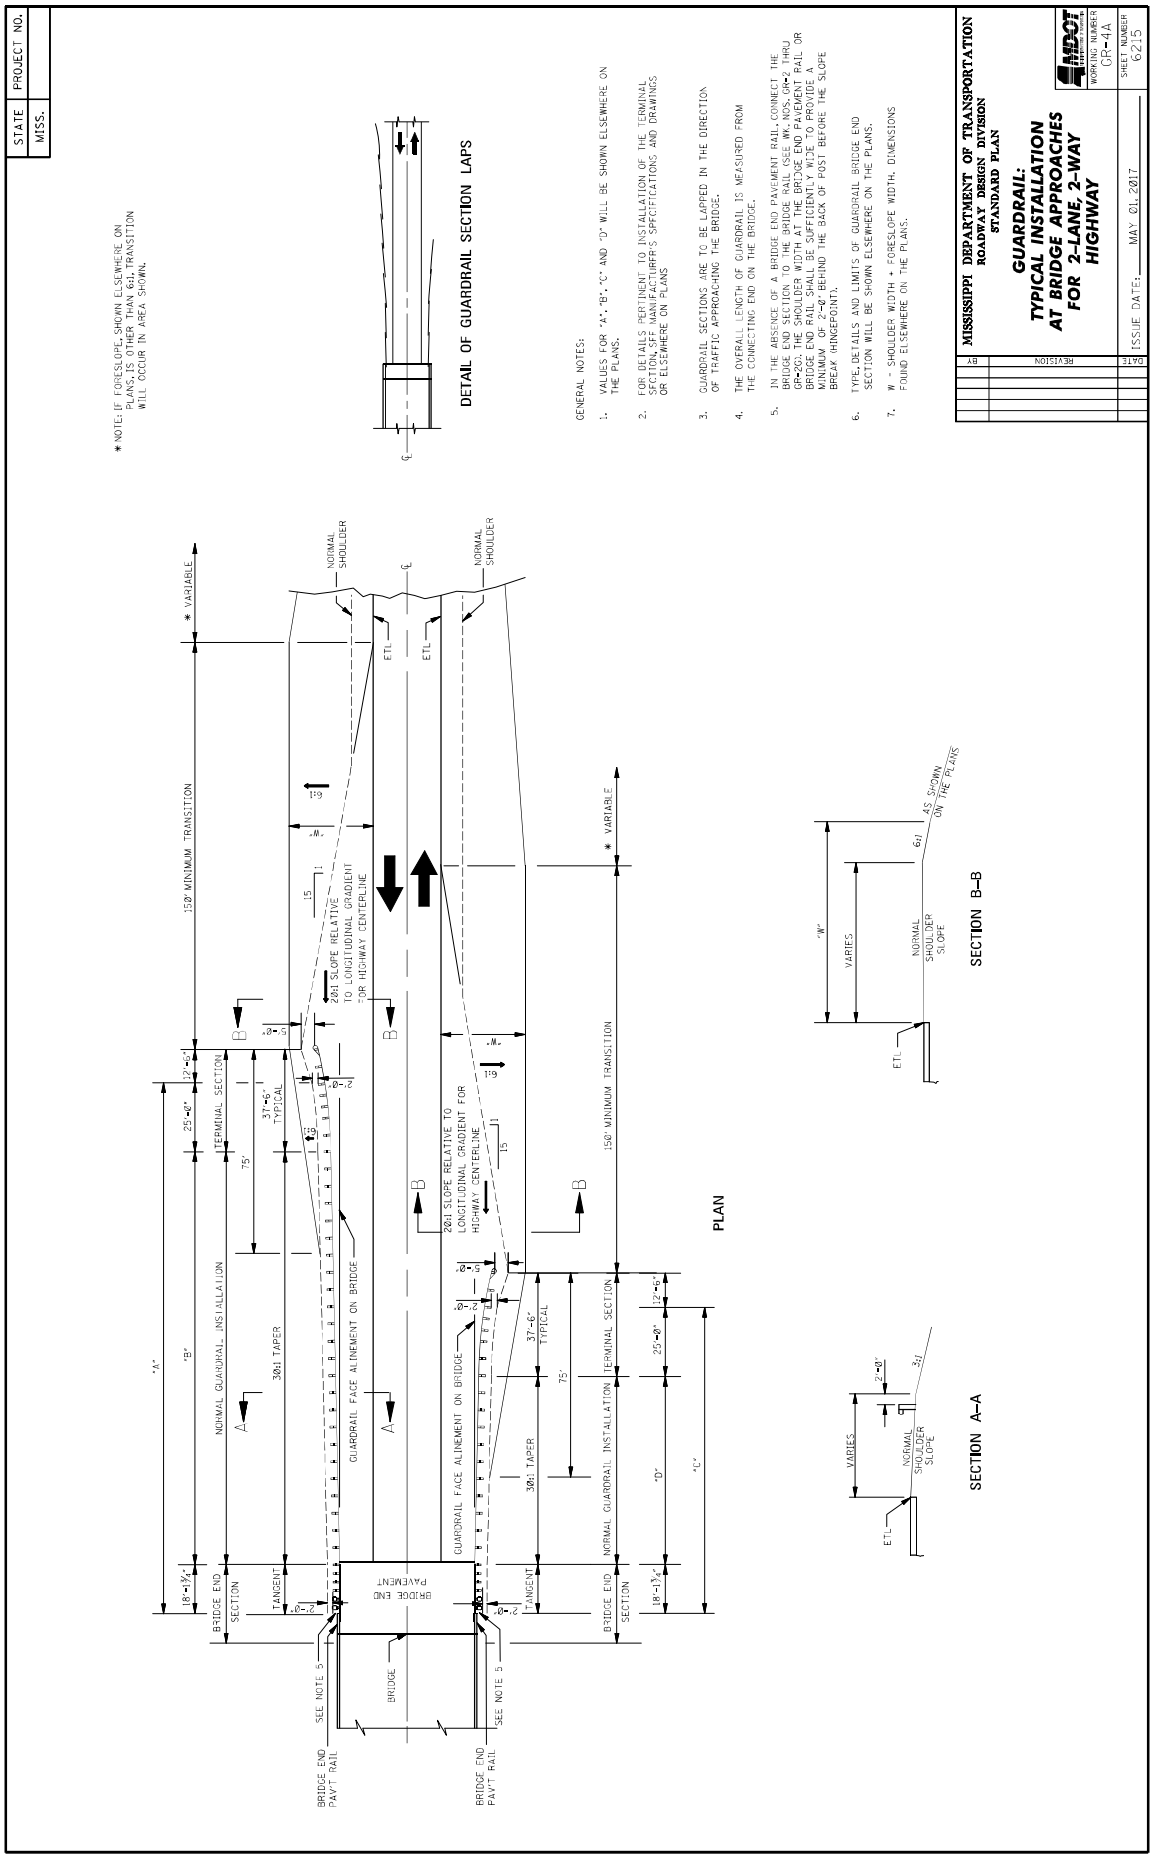

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
GUARDRAIL:
TYPICAL INSTALLATION
AT BRIDGE APPROACHES
FOR 2-LANE 2-WAY
HIGHWAY
WORKING NUMBER GR-4A
SHEET NUMBER 6215
ISSUE DATE: MAY 01, 2017
BY REVISION DATE
* NOTE: IF FORESLOPE SHOWN ELSEWHERE ON PLANS, IS OTHER THAN 6:1, TRANSITION WILL OCCUR IN AREA SHOWN.
DETAIL OF GUARDRAIL SECTION LAPS
GENERAL NOTES:
1. VALUES FOR "A", "B", "C" AND "D" WILL BE SHOWN ELSEWHERE ON THE PLANS.
2. FOR DETAILS PERTINENT TO INSTALLATION OF THE TERMINAL SECTION, SEE MANUFACTURER'S SPECIFICATIONS AND DRAWINGS OR ELSEWHERE ON PLANS
3. GUARDRAIL SECTIONS ARE TO BE LAPPED IN THE DIRECTION OF TRAFFIC APPROACHING THE BRIDGE.
4. THE OVERALL LENGTH OF GUARDRAIL IS MEASURED FROM THE CONNECTING END ON THE BRIDGE.
5. IN THE ABSENCE OF A BRIDGE END PAVEMENT RAIL, CONNECT THE BRIDGE END SECTION TO THE BRIDGE RAIL (SEE MS-GR-2 THRU GR-5). THE SHOULDER WIDTH AT THE BRIDGE END PROVIDED A BRIDGE END RAIL SHALL BE SUFFICIENT WIDTH TO PROVIDE A MINIMUM OF 2'-0" BEHIND THE BACK OF POST BEFORE THE SLOPE BREAK (HINGEPOINT).
6. TYPE DETAILS AND LIMITS OF GUARDRAIL BRIDGE END SECTION WILL BE SHOWN ELSEWHERE ON THE PLANS.
7. "W" = SHOULDER WIDTH + FORESLOPE WIDTH. DIMENSIONS FOUND ELSEWHERE ON THE PLANS.
PLAN
SECTION A–A
SECTION B–B
"A"
"B"
"C"
"D"
"W"
* VARIABLE
150' MINIMUM TRANSITION
NORMAL GUARDRAIL INSTALLATION
TERMINAL SECTION
BRIDGE END SECTION
TANGENT
37'-6" TYPICAL
75'
30:1 TAPER
GUARDRAIL FACE ALINEMENT ON BRIDGE
20:1 SLOPE RELATIVE TO LONGITUDINAL GRADIENT FOR HIGHWAY CENTERLINE
NORMAL SHOULDER
ETL
BRIDGE
BRIDGE END PAVT. RAIL
SEE NOTE 5
BRIDGE END PAVEMENT
12'-0"
25'-0"
18'-1¾"
2'-0"
3:1
6:1
VARIES
NORMAL SHOULDER SLOPE
AS SHOWN ON THE PLANS

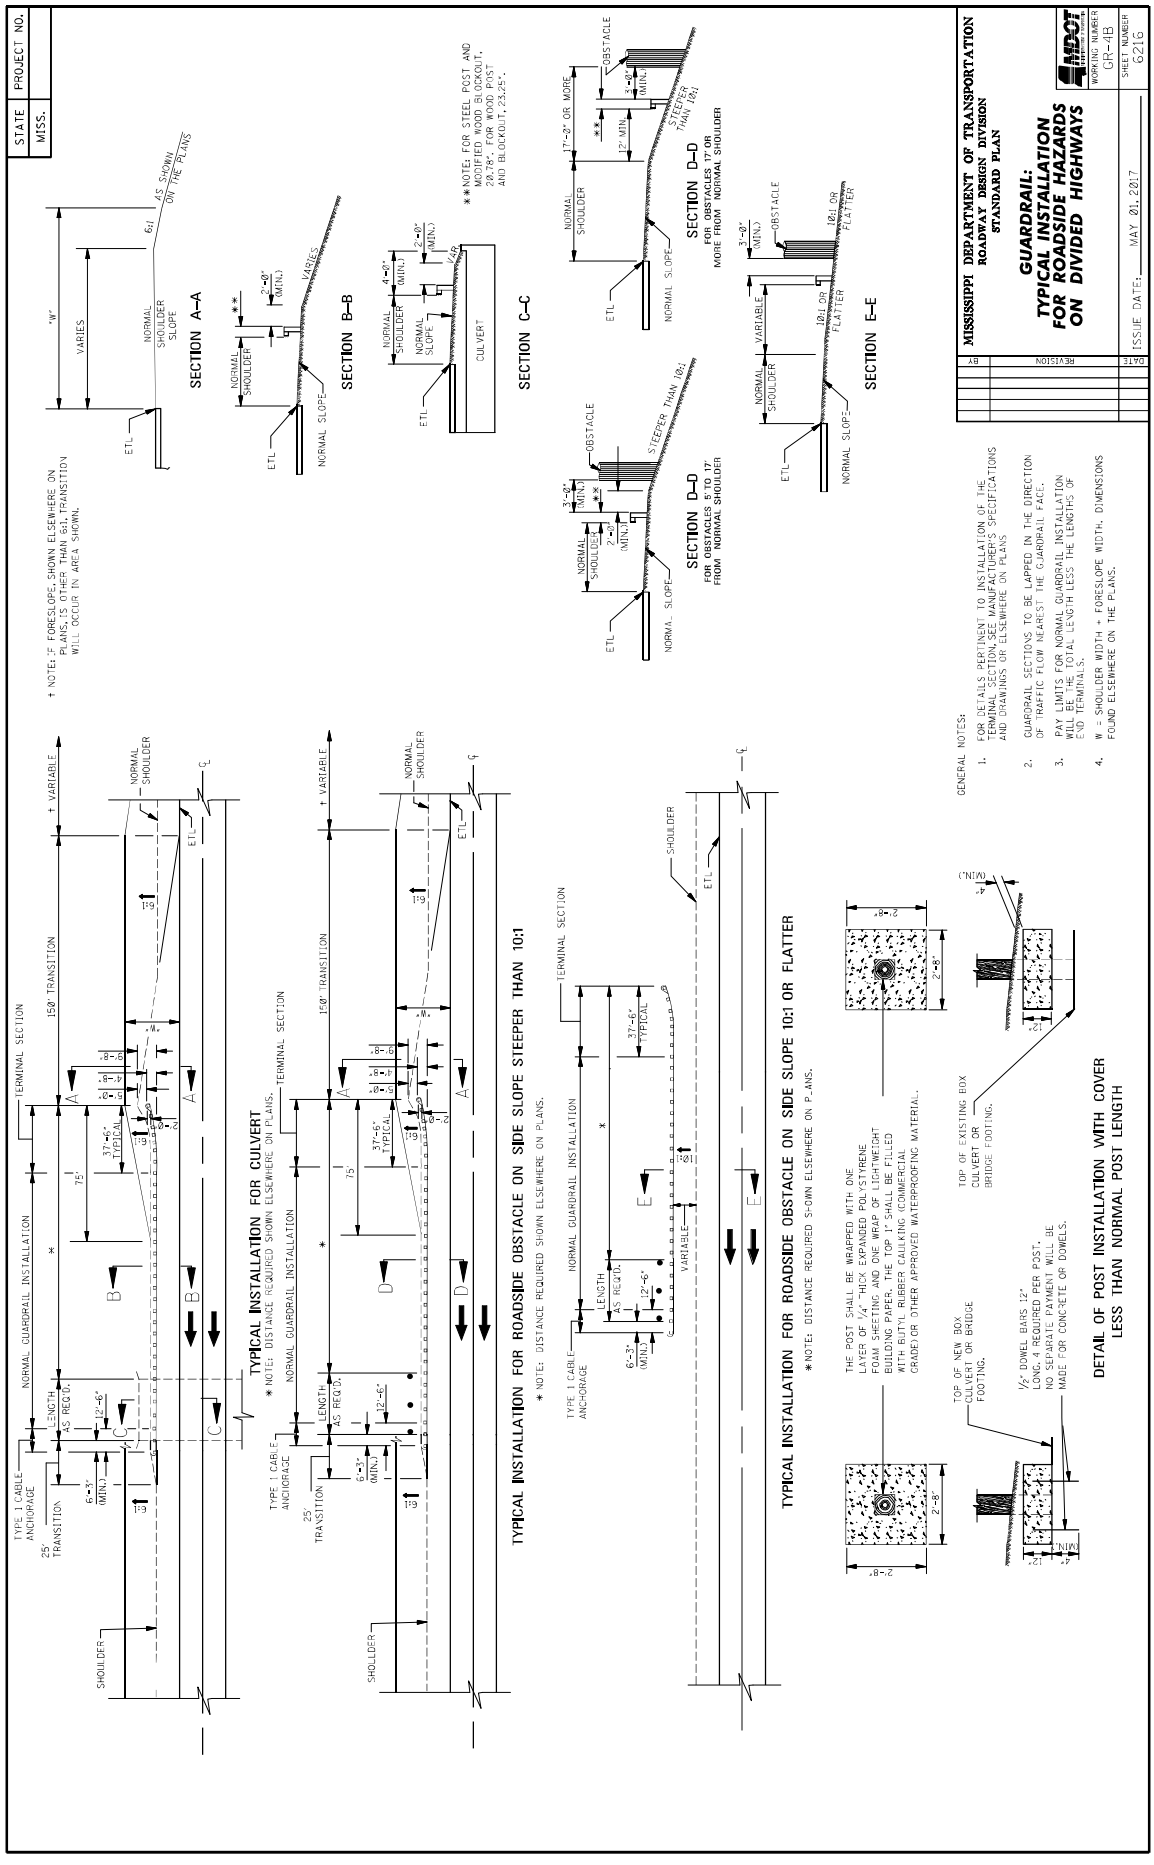

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
GUARDRAIL:
TYPICAL INSTALLATION
FOR ROADSIDE HAZARDS
ON DIVIDED HIGHWAYS
WORKING NUMBER GR-4B
SHEET NUMBER 6216
ISSUE DATE: MAY 01, 2017
DATE
REVISION
BY
† NOTE: IF FORESLOPE, SHOWN ELSEWHERE ON PLANS, IS OTHER THAN 6:1, TRANSITION WILL OCCUR IN AREA SHOWN.
SECTION A–A
SECTION B–B
SECTION C–C
SECTION D–D
FOR OBSTACLES 5' TO 17' FROM NORMAL SHOULDER
SECTION D–D
FOR OBSTACLES 17' OR MORE FROM NORMAL SHOULDER
SECTION E–E
**NOTE: FOR STEEL POST AND WOOD BLOCKOUT, SEE "STEEL POST" AND BLOCKOUT, 23.45".
TYPICAL INSTALLATION FOR CULVERT
TYPICAL INSTALLATION FOR ROADSIDE OBSTACLE ON SIDE SLOPE STEEPER THAN 10:1
TYPICAL INSTALLATION FOR ROADSIDE OBSTACLE ON SIDE SLOPE 10:1 OR FLATTER
DETAIL OF POST INSTALLATION WITH COVER
LESS THAN NORMAL POST LENGTH
GENERAL NOTES:
1. FOR DETAILS PERTINENT TO INSTALLATION OF THE TERMINAL SECTION, SEE MANUFACTURER'S SPECIFICATIONS AND DRAWINGS OR ELSEWHERE ON PLANS.
2. GUARDRAIL SECTIONS TO BE LAPPED IN THE DIRECTION OF TRAFFIC FLOW NEAREST THE GUARDRAIL FACE.
3. PAY LIMITS FOR NORMAL GUARDRAIL INSTALLATION WILL BE THE TOTAL LENGTH LESS THE LENGTHS OF END TERMINALS.
4. W = SHOULDER WIDTH + FORESLOPE WIDTH. DIMENSIONS FOUND ELSEWHERE ON THE PLANS.

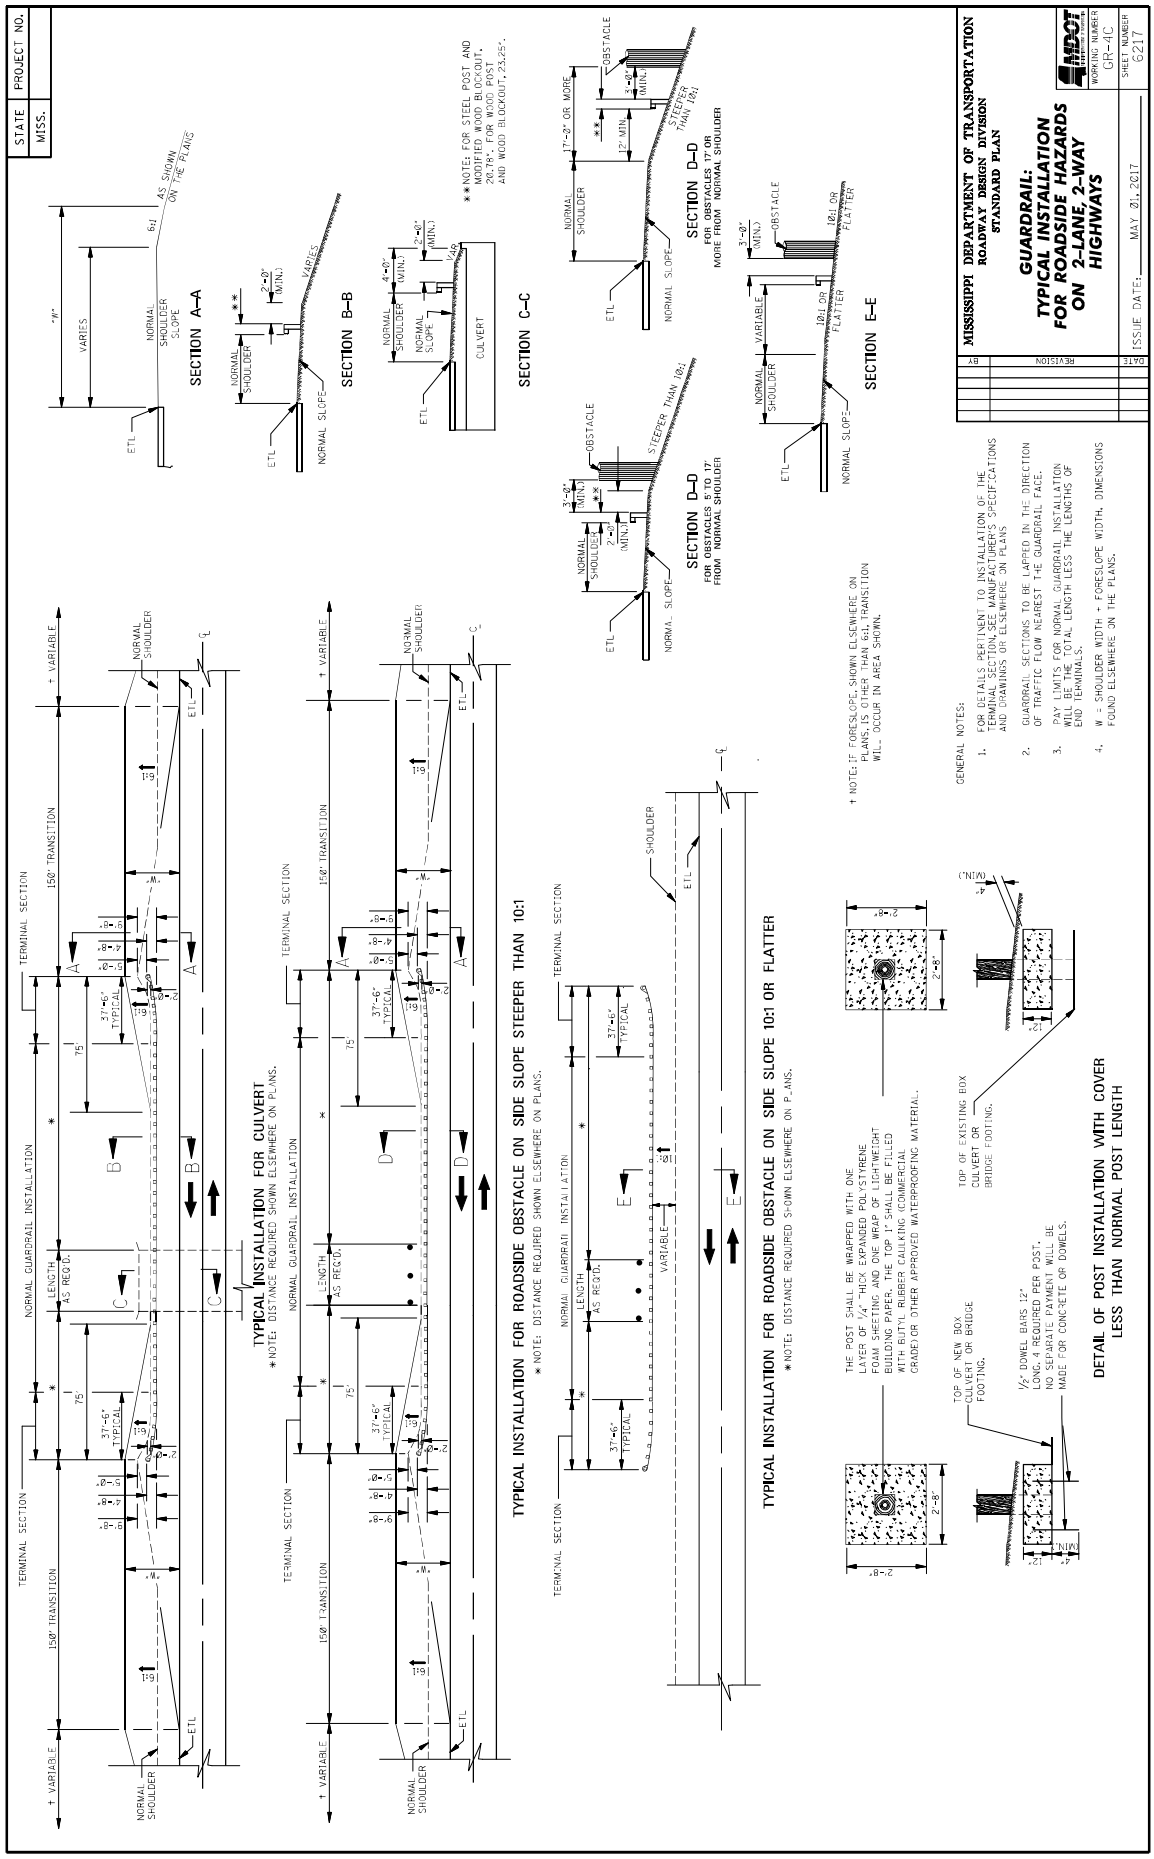

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
GUARDRAIL: TYPICAL INSTALLATION FOR ROADSIDE HAZARDS ON 2-LANE, 2-WAY HIGHWAYS
WORKING NUMBER GR-4C
SHEET NUMBER 6217
ISSUE DATE: MAY 01, 2017
DATE
REVISION
BY
SECTION A-A
SECTION B-B
SECTION C-C
SECTION D-D FOR OBSTACLES 5' TO 17' FROM NORMAL SHOULDER
SECTION D-D FOR OBSTACLES 17' OR MORE FROM NORMAL SHOULDER
SECTION E-E
** NOTE: FOR STEEL POST AND MODIFIED WOOD BLOCKOUT, USE 12" POWDER POST BLOCKOUT AND WOOD BLOCKOUT, 23.25".
TYPICAL INSTALLATION FOR CULVERT
* NOTE: DISTANCE REQUIRED SHOWN ELSEWHERE ON PLANS.
TYPICAL INSTALLATION FOR ROADSIDE OBSTACLE ON SIDE SLOPE STEEPER THAN 10:1
* NOTE: DISTANCE REQUIRED SHOWN ELSEWHERE ON PLANS.
TYPICAL INSTALLATION FOR ROADSIDE OBSTACLE ON SIDE SLOPE 10:1 OR FLATTER
* NOTE: DISTANCE REQUIRED SHOWN ELSEWHERE ON PLANS.
† NOTE: IF FORESLOPE SHOWN ELSEWHERE ON PLANS IS OTHER THAN 6:1, TRANSITION WILL OCCUR IN AREA SHOWN.
GENERAL NOTES:
1. FOR DETAILS PERTINENT TO INSTALLATION OF THE TERMINAL SECTION, SEE MANUFACTURER'S SPECIFICATIONS AND DRAWINGS OR ELSEWHERE ON PLANS
2. GUARDRAIL SECTIONS TO BE LAPPED IN THE DIRECTION OF TRAFFIC FLOW NEAREST THE GUARDRAIL FACE.
3. PAY LIMITS FOR NORMAL GUARDRAIL INSTALLATION WILL BE THE TOTAL LENGTH LESS THE LENGTHS OF END TERMINALS.
4. W = SHOULDER WIDTH + FORESLOPE WIDTH, DIMENSIONS FOUND ELSEWHERE ON THE PLANS.
THE POST SHALL BE WRAPPED WITH ONE LAYER OF 1/4" THICK EXPANDED POLYSTYRENE FOAM SHEETING AND ONE WRAP OF LIGHTWEIGHT BUILDING PAPER. THE TOP 1' SHALL BE FILLED WITH BUTYL RUBBER CAULKING (COMMERCIAL GRADE) OR OTHER APPROVED WATERPROOFING MATERIAL.
TOP OF NEW BOX CULVERT OR BRIDGE FOOTING.
TOP OF EXISTING BOX CULVERT OR BRIDGE FOOTING.
1/2" DOWEL BARS 12" LONG 4 REQUIRED PER POST. NO SPECIAL EQUIPMENT WILL BE MADE FOR CONCRETE OR DOWELS.
DETAIL OF POST INSTALLATION WITH COVER LESS THAN NORMAL POST LENGTH

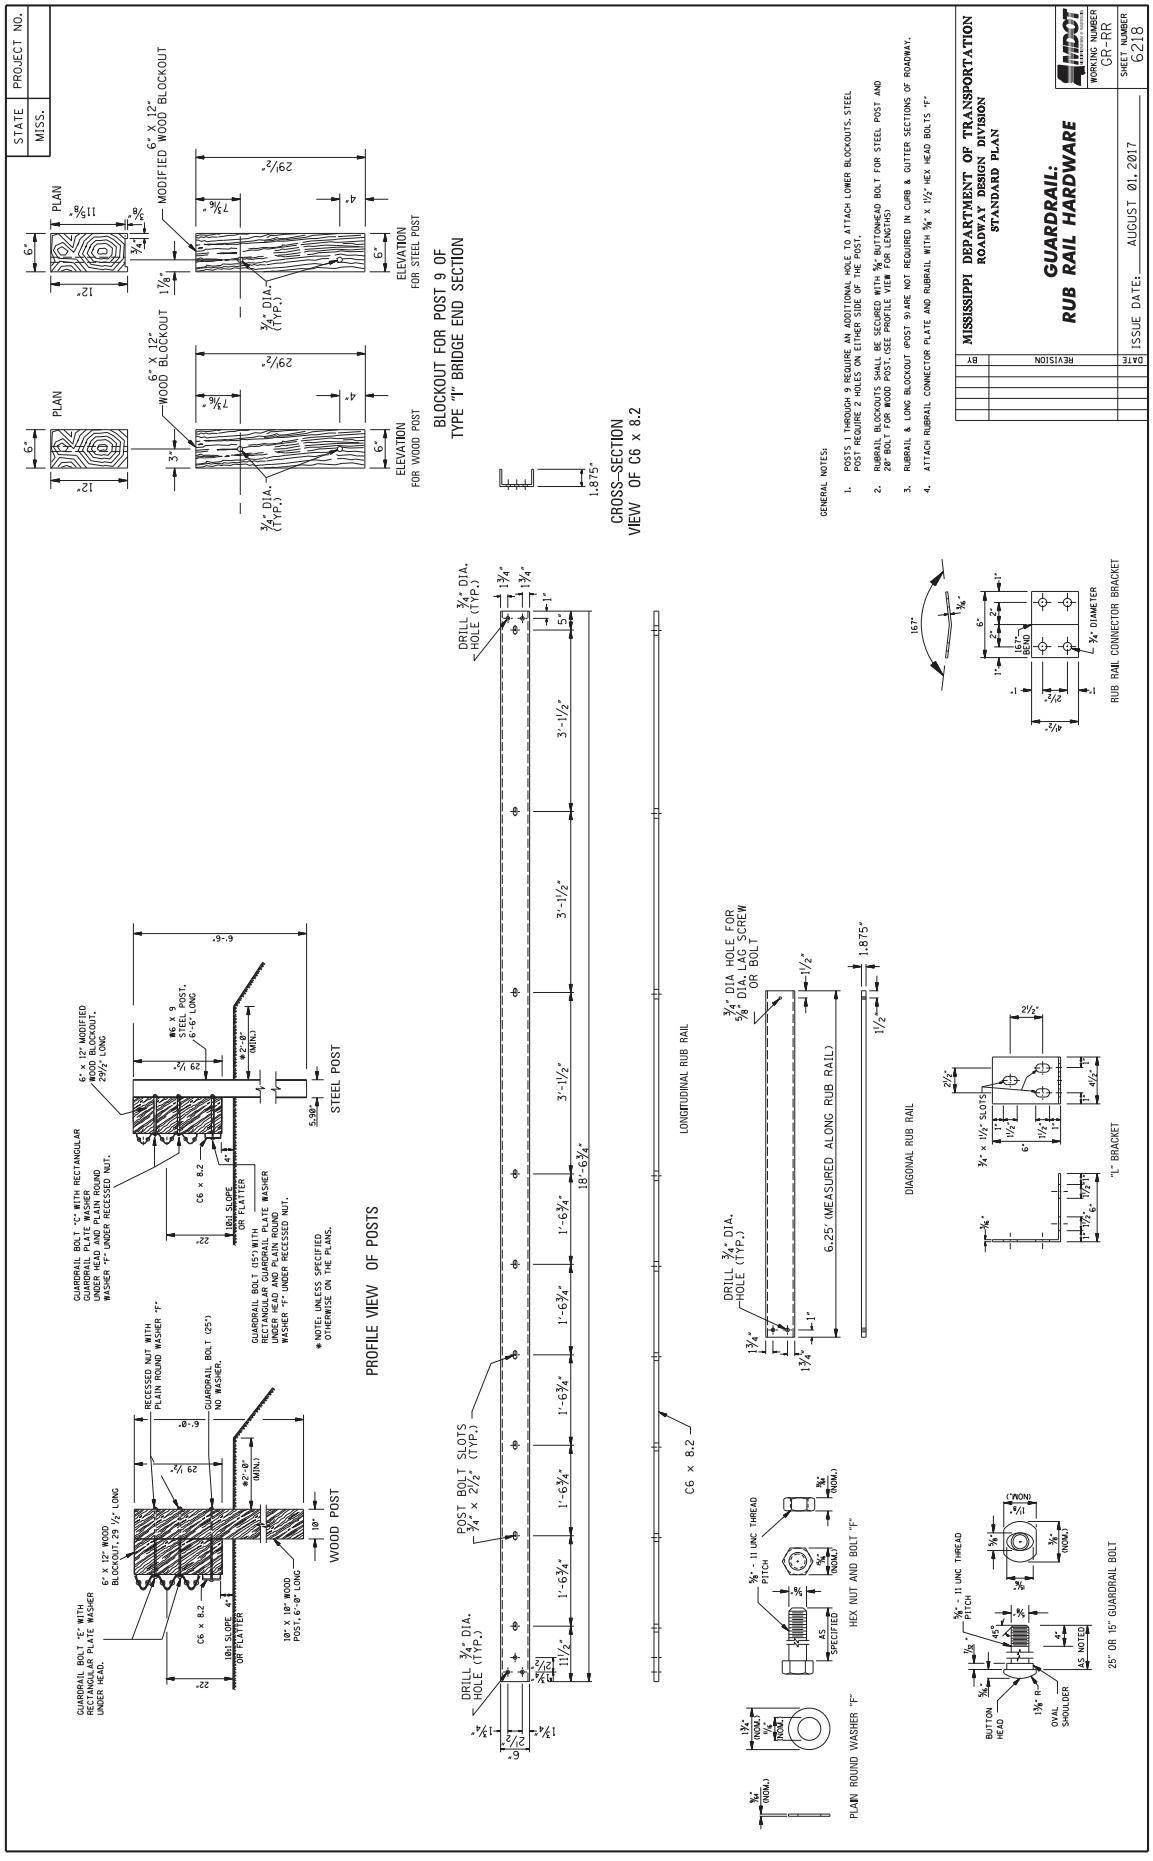
STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
GUARDRAIL:
RUB RAIL HARDWARE
WORKING NUMBER GR-RR
SHEET NUMBER 6218
ISSUE DATE: AUGUST 01, 2017
BY REVISION DATE
GENERAL NOTES:
1. POSTS 1 THROUGH 9 REQUIRE AN ADDITIONAL HOLE TO ATTACH LOWER BLOCKOUTS. STEEL POST REQUIRE 2 HOLES ON EITHER SIDE OF THE POST.
2. RUBRAIL BLOCKOUTS SHALL BE SECURED WITH ⅝" BUTTONHEAD BOLT FOR STEEL POST AND 20" BOLT FOR WOOD POST. (SEE PROFILE VIEW FOR LENGTHS)
3. RUBRAIL & LONG BLOCKOUT (POST 9) ARE NOT REQUIRED IN CURB & GUTTER SECTIONS OF ROADWAY.
4. ATTACH RUBRAIL CONNECTOR PLATE AND RUBRAIL WITH ⅝" X 1½" HEX HEAD BOLTS "F"
BLOCKOUT FOR POST 9 OF TYPE "1" BRIDGE END SECTION
6" X 12" WOOD BLOCKOUT
6" X 12" MODIFIED WOOD BLOCKOUT
PLAN
ELEVATION FOR WOOD POST
ELEVATION FOR STEEL POST
¾" DIA. (TYP.)
CROSS-SECTION VIEW OF C6 x 8.2
1.875"
PROFILE VIEW OF POSTS
6" x 12" MODIFIED WOOD BLOCKOUT, 29½" LONG
#6 x 9 STEEL POST, 6'-6" LONG
GUARDRAIL BOLT "C" WITH RECTANGULAR GUARDRAIL PLATE WASHER UNDER HEAD AND PLAIN ROUND WASHER "F" UNDER RECESSED NUT.
C6 x 8.2
10¼" SLOPE OR FLATTER
GUARDRAIL BOLT (15") WITH RECTANGULAR GUARDRAIL PLATE WASHER UNDER HEAD AND PLAIN ROUND WASHER "F" UNDER RECESSED NUT.
* NOTE: UNLESS SPECIFIED OTHERWISE ON THE PLANS.
STEEL POST
6" x 12" WOOD BLOCKOUT, 29½" LONG
RECESSED NUT WITH PLAIN ROUND WASHER "F"
GUARDRAIL BOLT (25") NO WASHER.
10" x 10" WOOD POST, 6'-0" LONG
WOOD POST
GUARDRAIL BOLT "E" WITH RECTANGULAR PLATE WASHER UNDER HEAD.
DRILL ¾" DIA. HOLE (TYP.)
POST BOLT SLOTS ¾" x 2½" (TYP.)
LONGITUDINAL RUB RAIL
C6 x 8.2
¾" DIA HOLE FOR ⅝" DIA. LAG SCREW OR BOLT
6.25" (MEASURED ALONG RUB RAIL)
DIAGONAL RUB RAIL
¾" - 11 UNC THREAD PITCH
HEX NUT AND BOLT "F"
PLAIN ROUND WASHER "F"
¾" x 1½" SLOTS
"L" BRACKET
RUB RAIL CONNECTOR BRACKET
¾" DIAMETER
16° BEND
BUTTON HEAD
OVAL SHOULDER
25" OR 15" GUARDRAIL BOLT

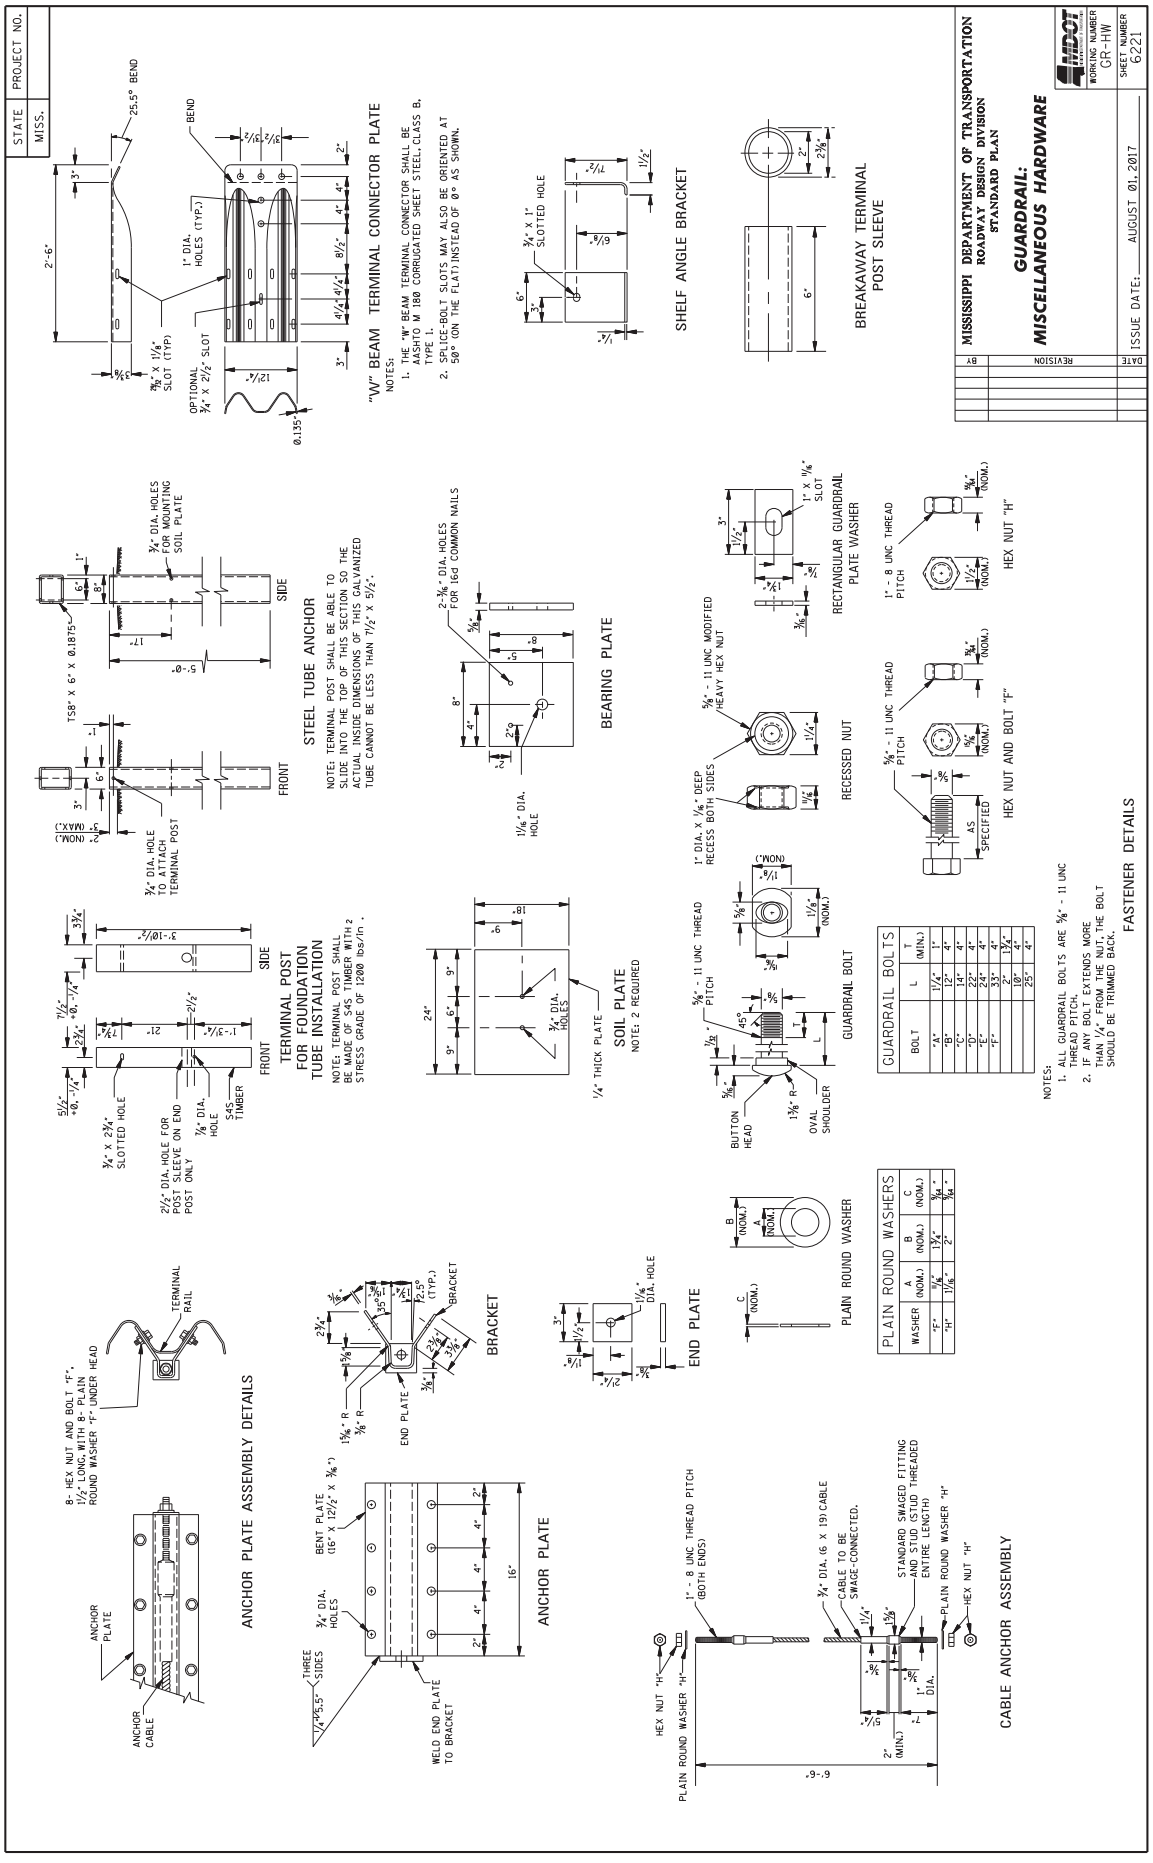
STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
GUARDRAIL:
MISCELLANEOUS HARDWARE
WORKING NUMBER GR-HW
SHEET NUMBER 6221
ISSUE DATE: AUGUST 01, 2017
REVISION
DATE
BY
"W" BEAM TERMINAL CONNECTOR PLATE
NOTES:
1. THE "W" BEAM TERMINAL CONNECTOR SHALL BE AASHTO M 180 CORRUGATED SHEET STEEL, CLASS B, TYPE 1.
2. SPLICE-BOLT SLOTS MAY ALSO BE ORIENTED AT 50° (ON THE FLAT) INSTEAD OF 0° AS SHOWN.
SHELF ANGLE BRACKET
BREAKAWAY TERMINAL POST SLEEVE
STEEL TUBE ANCHOR
NOTE: TERMINAL POST SHALL BE ABLE TO SLIDE INTO THE TOP OF THIS SECTION SO THE ACTUAL INSIDE DIMENSIONS OF THIS GALVANIZED TUBE CANNOT BE LESS THAN 7½" X 5½".
BEARING PLATE
TERMINAL POST FOR FOUNDATION TUBE INSTALLATION
NOTE: TERMINAL POST SHALL BE MADE OF S4S TIMBER WITH a STRESS GRADE OF 1200 lbs/in.²
SOIL PLATE
NOTE: 2 REQUIRED
RECESSED NUT
RECTANGULAR GUARDRAIL PLATE WASHER
HEX NUT "H"
HEX NUT AND BOLT "F"
GUARDRAIL BOLT
GUARDRAIL BOLTS
BOLT | L | T (MIN.)
"A" | 1¼" | 1"
"B" | 12" | 4"
"C" | 14" | 4"
"D" | 22" | 4"
"E" | 24" | 4"
"F" | 33" | 4"
"G" | 2' | 1¾"
"H" | 10' | 4"
"I" | 25' | 4"
NOTES:
1. ALL GUARDRAIL BOLTS ARE ⅝" - 11 UNC THREAD PITCH.
2. IF ANY BOLT EXTENDS MORE THAN ¼" FROM THE NUT, THE BOLT SHOULD BE TRIMMED BACK.
FASTENER DETAILS
PLAIN ROUND WASHERS
WASHER | A (NOM.) | B (NOM.) | C (NOM.)
"F" | ¾" | 1¾" | ⅝"
"H" | 1⅛" | 2" | ⅝"
PLAIN ROUND WASHER
BRACKET
END PLATE
ANCHOR PLATE ASSEMBLY DETAILS
8- HEX NUT AND BOLT "F", 1½" LONG, WITH 8- PLAIN ROUND WASHER "F" UNDER HEAD
ANCHOR PLATE
ANCHOR CABLE
TERMINAL RAIL
ANCHOR PLATE
CABLE ANCHOR ASSEMBLY
HEX NUT "H"
PLAIN ROUND WASHER "H"
1" - 8 UNC THREAD PITCH (BOTH ENDS)
¾" DIA. (6 X 19) CABLE
CABLE TO BE SWAGE-CONNECTED.
STANDARD SWAGED FITTING AND STUD (STUD THREADED ENTIRE LENGTH)
6'-9"

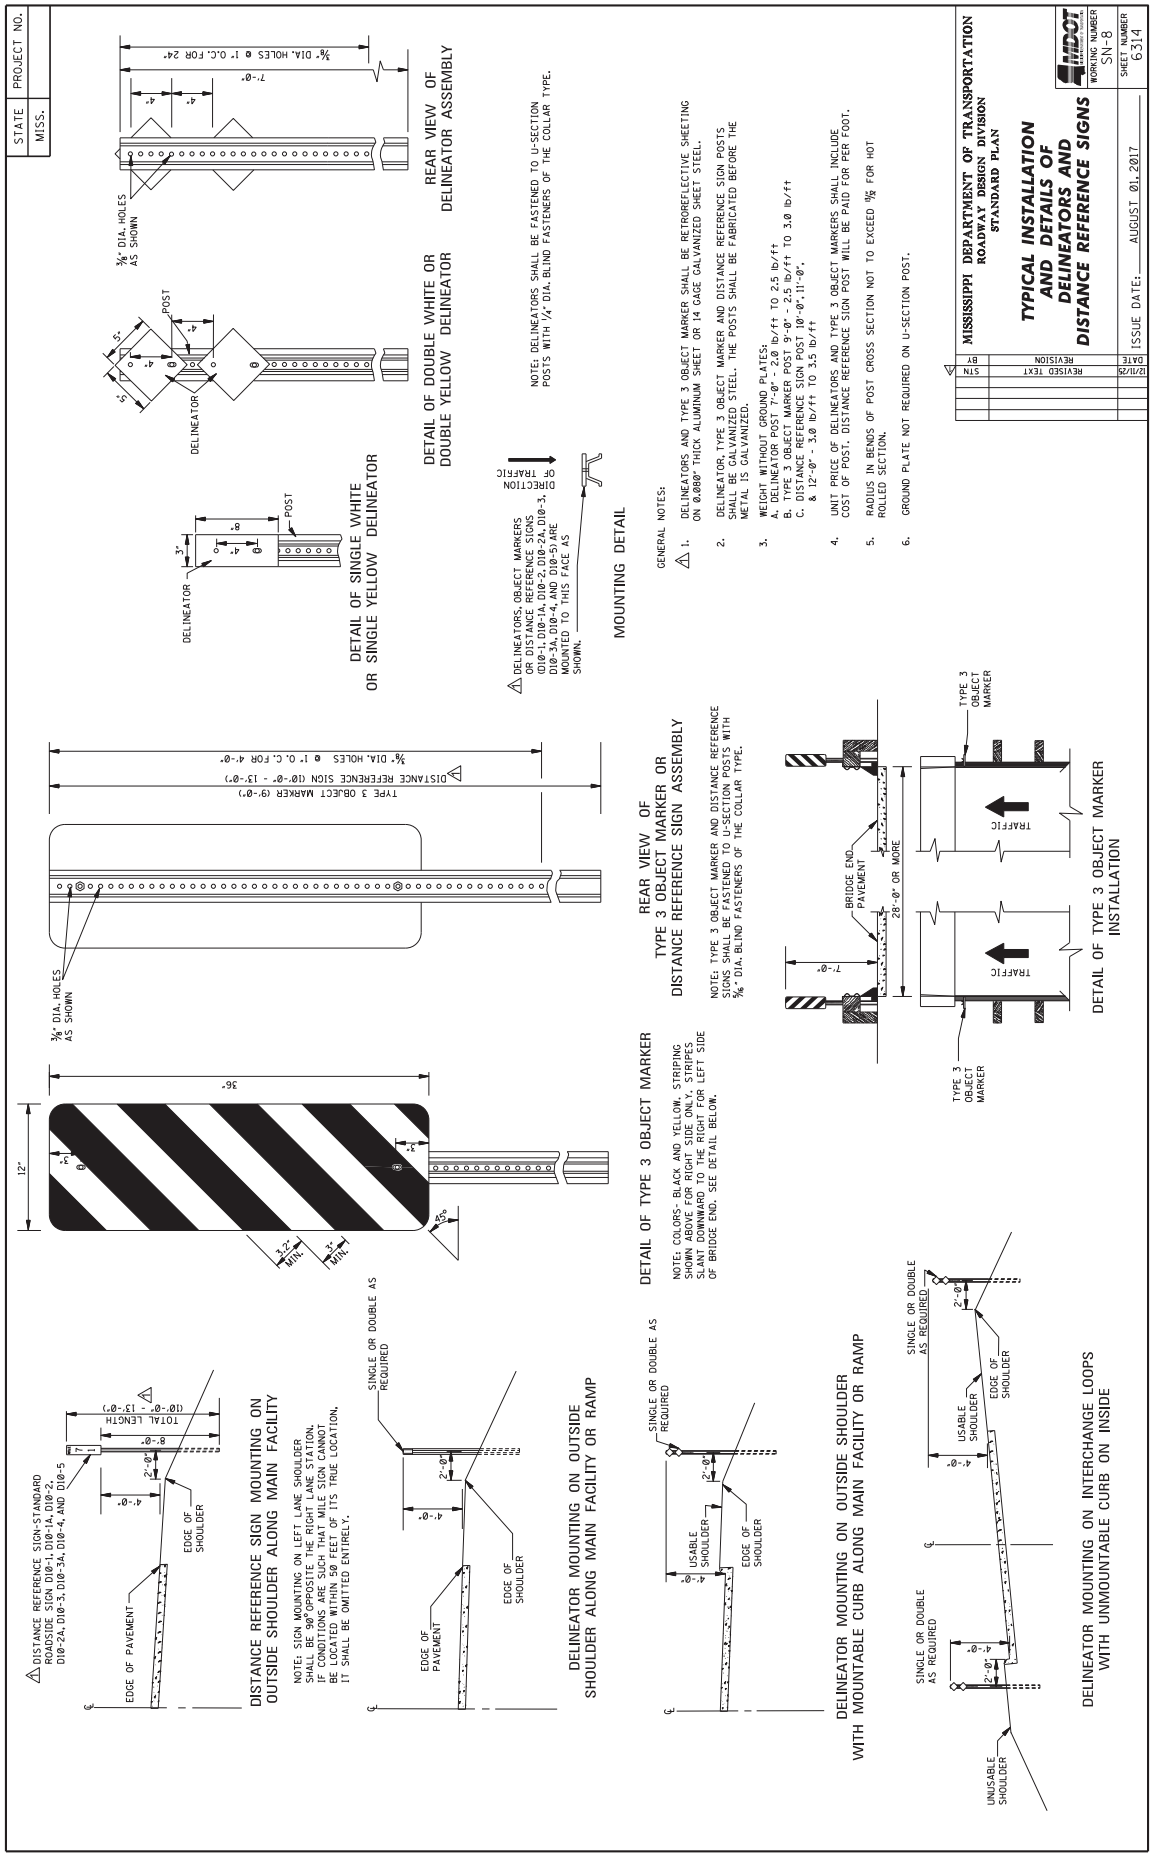
STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
TYPICAL INSTALLATION AND DETAILS OF DELINEATORS AND DISTANCE REFERENCE SIGNS
WORKING NUMBER SN-8
SHEET NUMBER 6314
ISSUE DATE: AUGUST 01, 2017
REVISION DATE BY
REVISED TEXT 12/1/25 STN
GENERAL NOTES:
1. DELINEATORS AND TYPE 3 OBJECT MARKER SHALL BE RETROREFLECTIVE SHEETING ON 0.080" THICK ALUMINUM SHEET OR 14 GAGE GALVANIZED SHEET STEEL.
2. DELINEATOR, TYPE 3 OBJECT MARKER AND DISTANCE REFERENCE SIGN POSTS SHALL BE GALVANIZED STEEL. THE POSTS SHALL BE FABRICATED BEFORE THE METAL IS GALVANIZED.
3. WEIGHT WITHOUT GROUND PLATES:
A. DELINEATOR POST 7'-0" - 2.0 lb/ft TO 2.5 lb/ft
B. TYPE 3 OBJECT MARKER POST 9'-0" - 2.5 lb/ft TO 3.0 lb/ft
C. DISTANCE REFERENCE SIGN POST 10'-0",11'-0", & 12'-0" - 3.0 lb/ft TO 3.5 lb/ft
4. UNIT PRICE OF DELINEATORS AND TYPE 3 OBJECT MARKERS SHALL INCLUDE COST OF POST. DISTANCE REFERENCE SIGN POST WILL BE PAID FOR PER FOOT.
5. RADIUS IN BENDS OF POST CROSS SECTION NOT TO EXCEED 5/8 FOR HOT ROLLED SECTION.
6. GROUND PLATE NOT REQUIRED ON U-SECTION POST.
NOTE: DELINEATORS SHALL BE FASTENED TO U-SECTION POSTS WITH 1/4" DIA. BLIND FASTENERS OF THE COLLAR TYPE.
REAR VIEW OF DELINEATOR ASSEMBLY
3/4" DIA. HOLES AS SHOWN
3/4" DIA. HOLES @ 1'-0" O.C. FOR 24'
7'-0"
DETAIL OF DOUBLE WHITE OR DOUBLE YELLOW DELINEATOR
POST
DELINEATOR
DETAIL OF SINGLE WHITE OR SINGLE YELLOW DELINEATOR
MOUNTING DETAIL
DIRECTION OF TRAFFIC
DELINEATORS, OBJECT MARKERS OR DISTANCE REFERENCE SIGNS (D10-1, D10-1A, D10-2, D10-2A, D10-3, D10-3A, D10-4, AND D10-5) ARE MOUNTED TO THIS FACE AS SHOWN.
REAR VIEW OF TYPE 3 OBJECT MARKER OR DISTANCE REFERENCE SIGN ASSEMBLY
TYPE 3 OBJECT MARKER (9'-0")
DISTANCE REFERENCE SIGN (10'-0" - 13'-0")
3/4" DIA. HOLES @ 1'-0" O.C. FOR 4'-0"
3/4" DIA. HOLES AS SHOWN
NOTE: TYPE 3 OBJECT MARKER AND DISTANCE REFERENCE SIGNS SHALL BE FASTENED TO U-SECTION POSTS WITH 3/4" DIA. BLIND FASTENERS OF THE COLLAR TYPE.
DETAIL OF TYPE 3 OBJECT MARKER
NOTE: COLORS- BLACK AND YELLOW. STRIPING SHOWN ABOVE FOR RIGHT SIDE ONLY. STRIPES SLANT DOWNWARD TO THE RIGHT FOR LEFT SIDE OF BRIDGE END. SEE DETAIL BELOW.
12"
36"
2'-2" MIN.
3" MIN.
45°
BRIDGE END
PAVEMENT
7'-0"
28'-0" OR MORE
TRAFFIC
TYPE 3 OBJECT MARKER
DETAIL OF TYPE 3 OBJECT MARKER INSTALLATION
DISTANCE REFERENCE SIGN-STANDARD ROADSIDE SIGN D10-1, D10-1A, D10-2, D10-2A, D10-3, D10-3A, D10-4, AND D10-5
TOTAL LENGTH (10'-0" - 13'-0")
8'-0"
2'-0"
4'-0"
EDGE OF SHOULDER
EDGE OF PAVEMENT
DISTANCE REFERENCE SIGN MOUNTING ON OUTSIDE SHOULDER ALONG MAIN FACILITY
NOTE: SIGN MOUNTING ON LEFT LANE SHOULDER SHALL BE 180° OPPOSITE THE RIGHT LANE STATION. CONDITIONS ARE SUCH THAT A MILE SIGN CANNOT BE LOCATED WITHIN 500 FEET OF ITS TRUE LOCATION, IT SHALL BE OMITTED ENTIRELY.
SINGLE OR DOUBLE AS REQUIRED
DELINEATOR MOUNTING ON OUTSIDE SHOULDER ALONG MAIN FACILITY OR RAMP
USABLE SHOULDER
DELINEATOR MOUNTING ON OUTSIDE SHOULDER WITH MOUNTABLE CURB ALONG MAIN FACILITY OR RAMP
UNUSABLE SHOULDER
DELINEATOR MOUNTING ON INTERCHANGE LOOPS WITH UNMOUNTABLE CURB ON INSIDE

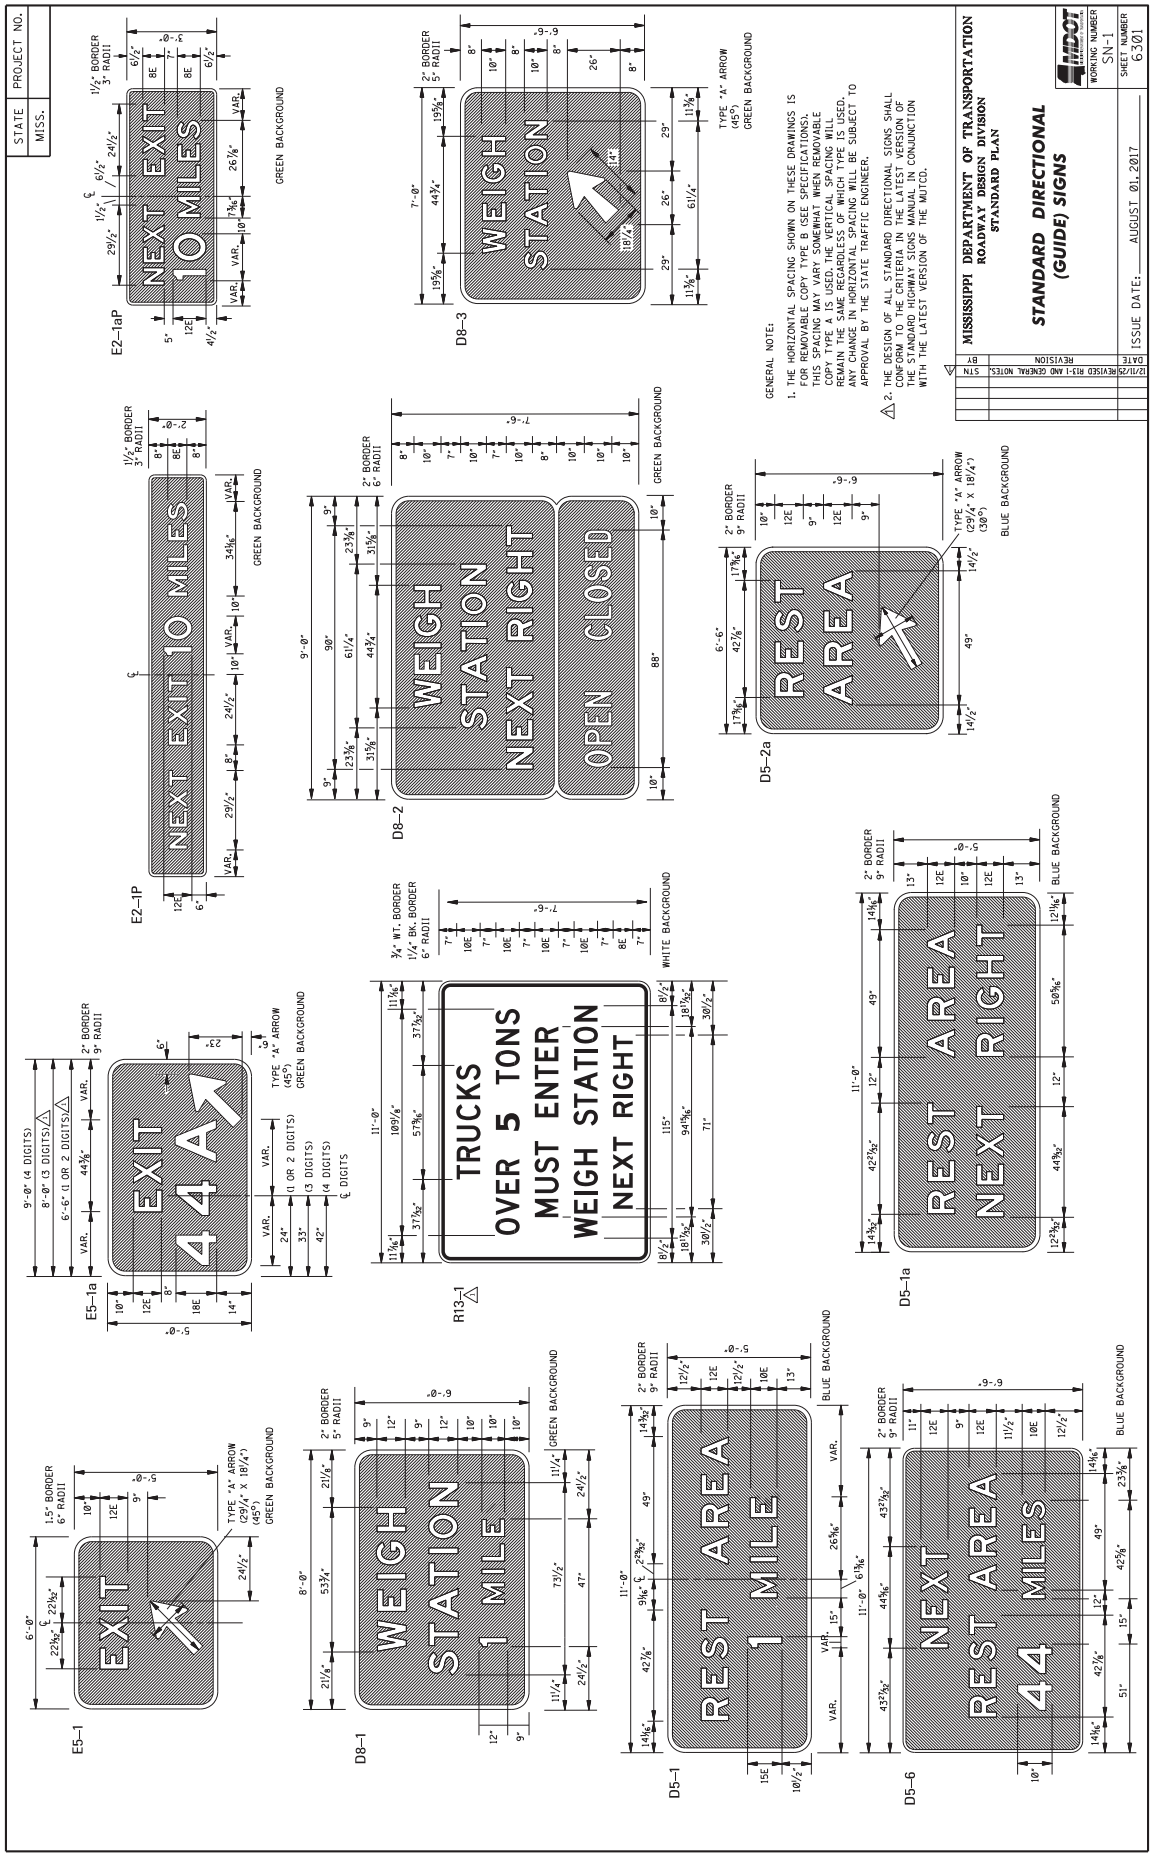
STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
STANDARD DIRECTIONAL (GUIDE) SIGNS
WORKING NUMBER SN-1
SHEET NUMBER 6301
ISSUE DATE: AUGUST 01, 2017
DATE REVISION BY STN
12/11/25 REVISED R13-1 AND GENERAL NOTES. STN
GENERAL NOTE:
1. THE HORIZONTAL SPACING SHOWN ON THESE DRAWINGS IS FOR REMOVABLE COPY TYPE B (SEE SPECIFICATIONS). THIS SPACING MAY VARY SOMEWHAT WHEN REMOVABLE COPY TYPE A IS USED. THE VERTICAL SPACING WILL REMAIN THE SAME REGARDLESS OF WHICH TYPE IS USED. ANY CHANGE IN HORIZONTAL SPACING WILL BE SUBJECT TO APPROVAL BY THE STATE TRAFFIC ENGINEER.
2. THE DESIGN OF ALL STANDARD DIRECTIONAL SIGNS SHALL CONFORM TO THE CRITERIA IN THE LATEST VERSION OF THE STANDARD HIGHWAY SIGNS MANUAL IN CONJUNCTION WITH THE LATEST VERSION OF THE MUTCD.
E2-1aP
E2-1P
D8-3
D8-2
D5-2a
E5-1a
R13-1
E5-1
D8-1
D5-1a
D5-1
D5-6
NEXT EXIT 10 MILES
WEIGH STATION
NEXT RIGHT
OPEN CLOSED
REST AREA
EXIT 44
TRUCKS OVER 5 TONS MUST ENTER WEIGH STATION NEXT RIGHT
WEIGH STATION 1 MILE
REST AREA 1 MILE
NEXT REST AREA 44 MILES
GREEN BACKGROUND
BLUE BACKGROUND
WHITE BACKGROUND

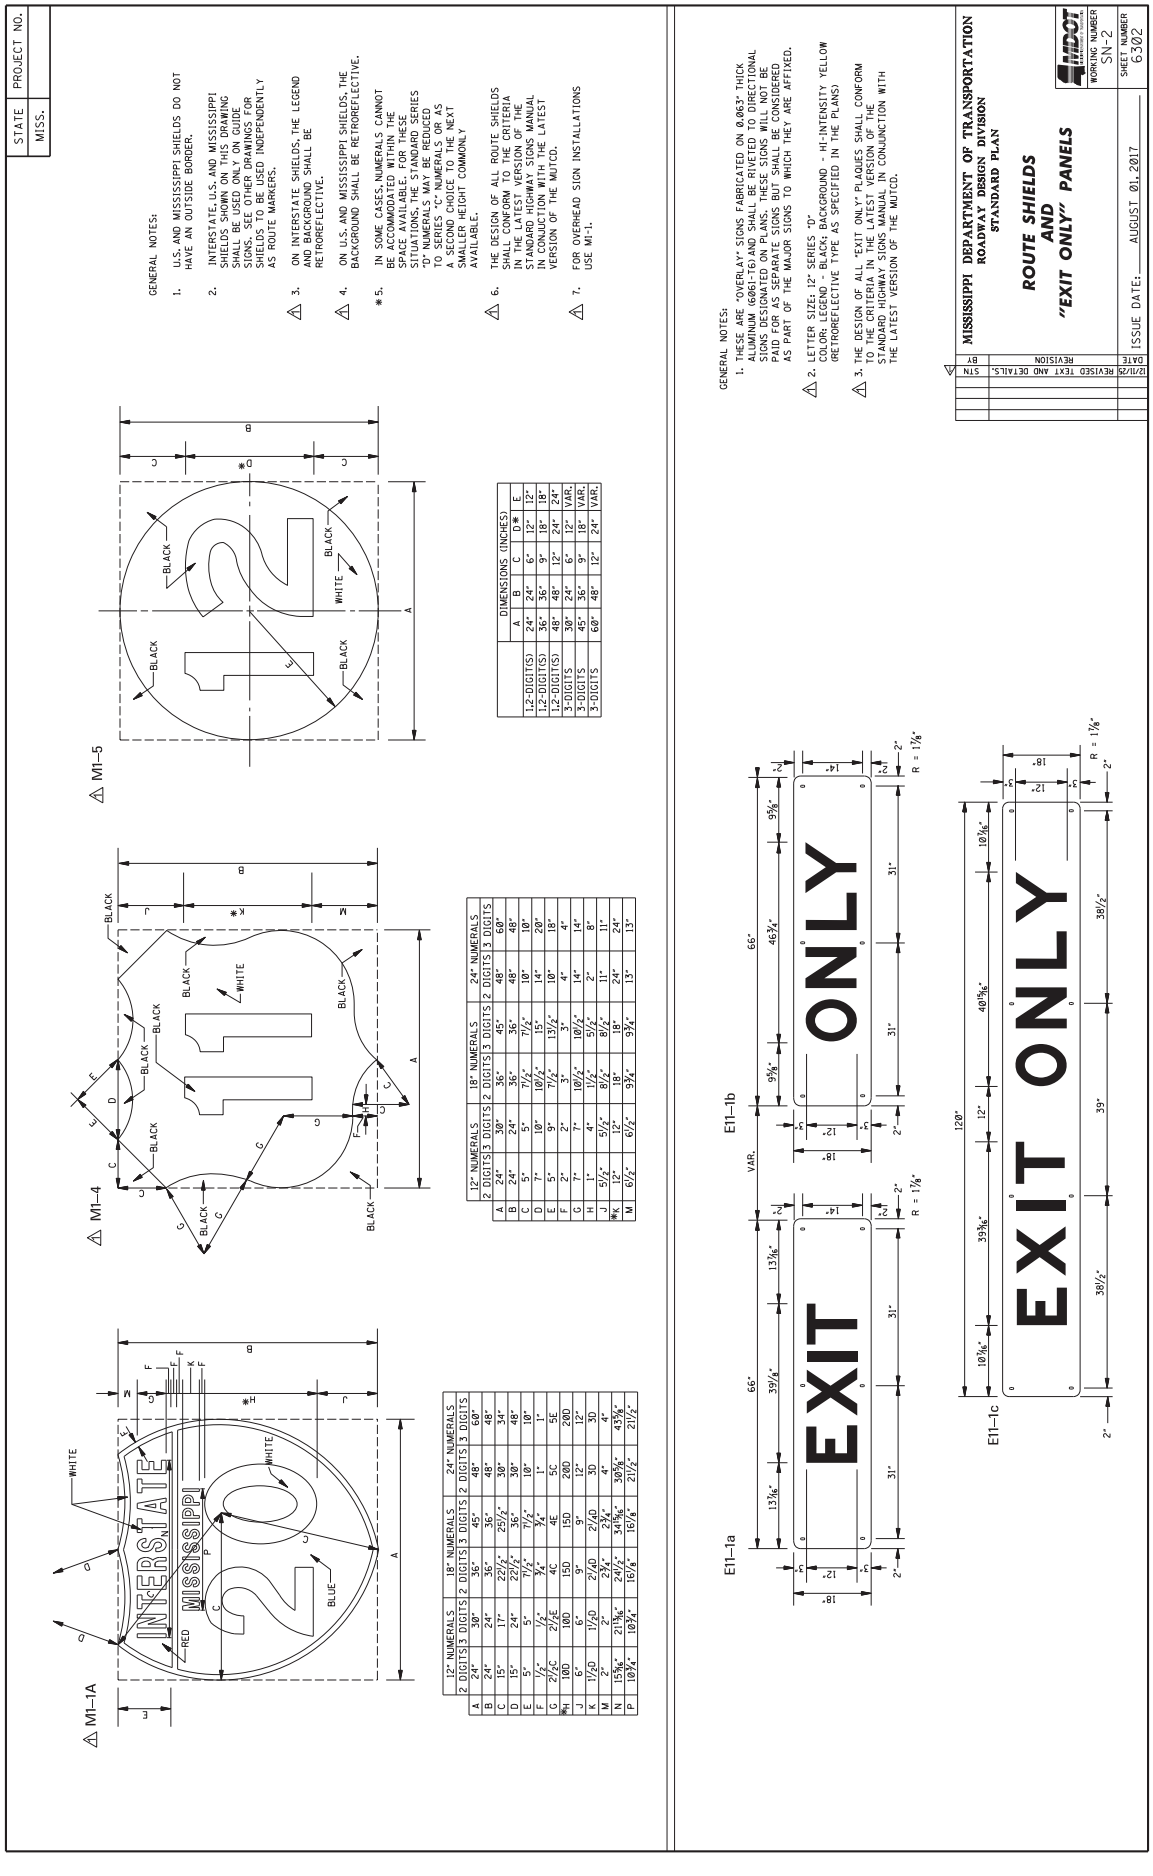
STATE MISS.
PROJECT NO.
GENERAL NOTES:
1. U.S. AND MISSISSIPPI SHIELDS DO NOT HAVE AN OUTSIDE BORDER.
2. INTERSTATE, U.S. AND MISSISSIPPI SHIELDS SHOWN ON THIS DRAWING SHALL BE USED ONLY ON GUIDE SIGNS. SEE OTHER DRAWINGS FOR SHIELDS TO BE USED INDEPENDENTLY AS ROUTE MARKERS.
△ 3. ON INTERSTATE SHIELDS, THE LEGEND AND BACKGROUND SHALL BE RETROREFLECTIVE.
△ 4. ON U.S. AND MISSISSIPPI SHIELDS, THE BACKGROUND SHALL BE RETROREFLECTIVE.
* 5. IN SOME CASES, NUMERALS CANNOT BE ACCOMMODATED WITHIN THE SPACE AVAILABLE. FOR THESE SITUATIONS, THE STANDARD SERIES "D" NUMERALS MAY BE REDUCED TO SERIES "C" NUMERALS OR AS A SECOND CHOICE TO THE NEXT SMALLER HEIGHT COMMONLY AVAILABLE.
△ 6. THE DESIGN OF ALL ROUTE SHIELDS SHALL CONFORM TO THE CRITERIA IN THE LATEST VERSION OF THE STANDARD HIGHWAY SIGNS MANUAL IN CONJUCTION WITH THE LATEST VERSION OF THE MUTCD.
△ 7. FOR OVERHEAD SIGN INSTALLATIONS USE M1-1.
△ M1-1A
INTERSTATE
MISSISSIPPI
20
WHITE
RED
BLUE
△ M1-4
11
BLACK
WHITE
△ M1-5
12
BLACK
WHITE
DIMENSIONS (INCHES)
1,2-DIGITS(S) A 24" B 24" C 6" D* 12" E 12"
1,2-DIGITS(S) A 36" B 36" C 9" D* 18" E 18"
1,2-DIGITS(S) A 48" B 48" C 12" D* 24" E 24"
3-DIGITS A 30" B 24" C 6" D* 12" E VAR.
3-DIGITS A 45" B 36" C 9" D* 18" E VAR.
3-DIGITS A 60" B 48" C 12" D* 24" E VAR.
12" NUMERALS 18" NUMERALS 24" NUMERALS
2 DIGITS 3 DIGITS 2 DIGITS 3 DIGITS 2 DIGITS 3 DIGITS
A 24" 30" 36" 45" 48" 60"
B 24" 24" 36" 36" 48" 48"
C 5" 5" 7½" 7½" 10" 10"
D 7" 10" 10½" 15" 14" 20"
E 5" 5" 7½" 13½" 10" 18"
F 2" 2" 3" 3" 4" 4"
G 7" 7" 10½" 10½" 14" 14"
H 1" 4" 1½" 5½" 2" 8"
J 5½" 5½" 8½" 8½" 11" 11"
*K 12" 12" 18" 18" 24" 24"
M 6½" 6½" 9¾" 9¾" 13" 13"
GENERAL NOTES:
1. THESE ARE "OVERLAY" SIGNS FABRICATED ON 0.063" THICK ALUMINUM (6061-T6) AND SHALL BE RIVETED TO DIRECTIONAL SIGNS DESIGNATED ON PLANS. THESE SIGNS WILL NOT BE PAID FOR AS SEPARATE SIGNS BUT SHALL BE CONSIDERED AS PART OF THE MAJOR SIGNS TO WHICH THEY ARE AFFIXED.
△ 2. LETTER SIZE: 12" SERIES "D" COLOR: LEGEND - BLACK; BACKGROUND - HI-INTENSITY YELLOW (RETROREFLECTIVE TYPE AS SPECIFIED IN THE PLANS)
△ 3. THE DESIGN OF ALL "EXIT ONLY" PLAQUES SHALL CONFORM TO THE CRITERIA IN THE LATEST VERSION OF THE STANDARD HIGHWAY SIGNS MANUAL IN CONJUNCTION WITH THE LATEST VERSION OF THE MUTCD.
E11-1a
E11-1b
E11-1c
EXIT ONLY
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
ROUTE SHIELDS AND "EXIT ONLY" PANELS
WORKING NUMBER SN-2
SHEET NUMBER 6302
ISSUE DATE: AUGUST 01, 2017
STN BY REVISION DATE
12/11/25 REVISED TEXT AND DETAILS.

STATE	PROJECT NO.
MISS.	

SIGN NUMBER	D9-2		D10-1	D10-2	D10-3	D10-1a	D10-2a	D10-3a	D10-4	D10-5	⚠ M1-1A	⚠ M1-1A	M1-4	⚠ M1-5
ALUMINUM (6061-T6) SIGN BLANK THICKNESS	0.080"		0.080"	0.080"	0.100"	0.080"	0.100"	0.100"	0.100"	0.100"	0.080"	0.100"	0.080"	0.080"
LEGEND	 R = 1½"	R = 1⅞"	 R = 1½"	 R = 1½"	 R = 1½"	 R = 1½"	 R = 1½"	 R = 1½"	 R = 1½"	 R = 1½"			 R = 1½"	 R = 1½" e = 11" (24" X 24") e = VAR. (30" X 24")
LETTER & NUMERAL SERIES	20" SERIES "E MOD."	30" SERIES "E MOD."	4" SERIES "B" 10" SERIES "D"	4" SERIES "B" 10" SERIES "D"	4" SERIES "B" 10" SERIES "D"	4" SERIES "B" 10" SERIES "D"	4" SERIES "B" 10" SERIES "D"	4" SERIES "B" 10" SERIES "D"	6.6", 6" SERIES "B" 6" SERIES "B" 8"	6.6", 6" SERIES "B" 6" SERIES "B" 8" 8" SERIES "B"	(SEE NOTES 1 & 2 BELOW)		(SEE NOTES 1 & 2 BELOW)	12" SERIES "D" (SEE NOTE BELOW)
WIDTH OF BORDER INSIDE OUTSIDE	½" WHITE	¾" WHITE	½" WHITE	½" WHITE	½" WHITE	½" WHITE	½" WHITE	½" WHITE	½" WHITE	½" WHITE	½" WHITE	¾" WHITE	BLACK OUTSIDE BORDER	BLACK OUTSIDE BORDER
SIZE (WIDTH X HEIGHT)	24" X 24"	⚠ 30" X 30"	12" X 24"	12" X 36"	12" X 48"	12" X 36"	12" X 48"	12" X 60"	18" X 54"	18" X 60"	24" X 24" (1 OR 2 DIGITS) 30" X 24" (3 DIGITS)	36" X 36" (1 OR 2 DIGITS) 45" X 36" (3 DIGITS)	24" X 24" (1 OR 2 DIGITS) 30" X 24" (3 DIGITS)	24" X 24" (1 OR 2 DIGITS) 30" X 24" (3 DIGITS)
COLORS COPY / BACKGROUND	WHITE / BLUE	WHITE / BLUE	WHITE / GREEN	WHITE / GREEN	WHITE / GREEN	WHITE / GREEN	WHITE / GREEN	WHITE / GREEN	WHITE, RED, BLUE / GREEN	WHITE, RED, BLUE / GREEN	WHITE / TOP-RED; BOTTOM-BLUE		BLACK / WHITE	BLACK / WHITE
REFLECTORIZATION	ALL	ALL	ALL	ALL	ALL	ALL	ALL	ALL	ALL	ALL	ALL		BACKGROUND	BACKGROUND
NUMBER OF POSTS FOR MOUNTING	1	1	1	1	1	1	1	1	1	1	1		1	1
NUMBER OF HOLES TO BE PUNCHED (⅜" DIA.)	2	2	2	2	2	2	2	2	2	2	2	4	2 (VERT. PUNCHING) / 2 (HORIZ. PUNCHING)	2 (VERT. PUNCHING) / 2 (HORIZ. PUNCHING)
PUNCHING DISTANCE FROM EACH VERTICAL EDGE	12" (VERT. CENTER)	18" (VERT. CENTER)	6" (VERT. CENTER)	6" (VERT. CENTER)	6" (VERT. CENTER)	6" (VERT. CENTER)	6" (VERT. CENTER)	6" (VERT. CENTER)	9" (VERT. CENTER)	9" (VERT. CENTER)	VERT. CENTER	5" FROM VERT. CENTER	VERT. CENTER / 12" FROM VERT. CENTER	VERT. CENTER / 12" FROM VERT. CENTER
PUNCHING DISTANCE FROM TOP EDGE	3"; 21"	6"; 30"	3"; 21"	3"; 33"	6"; 42"	3"; 33"	6"; 42"	6"; 54"	6"; 48"	6"; 54"	3"; 21"	6";30"	3"; 21"	3"; 21" / 3"; 21"

SIGN NUMBER	⚠M2-1P	⚠M2-1PA ⚠(INTER)	⚠ *	⚠ *	⚠ M3-103PA*	⚠M4-5P	⚠M4-5PA ⚠(INTER)	⚠M5-1P(L)	⚠M5-1PLA	⚠M5-1PR	⚠M5-1PRA	⚠M5-2PL	⚠M5-2PLA	⚠M5-2PR	⚠M5-2PRA	⚠M6-1PL	⚠M6-1PLA	⚠M6-1PR	⚠M6-1PRA	⚠M6-2PL	⚠M6-2PLA	⚠ M6-2PR	⚠M6-2PRA	⚠M6-3P	⚠M6-3PA
ALUMINUM (6061-T6) SIGN BLANK THICKNESS	0.080"		0.080"		0.080"	0.080"		0.080"		0.080"		0.080"		0.080"		0.080"		0.080"		0.080"		0.080"		0.080"	
LEGEND	 R = 1½"		 R = 1½"		 R = 1½"	 R = 1½"		 R = 1½"		 R = 1½"		 R = 1½"		 R = 1½"		 R = 1½"		 R = 1½"		 R = 1½"		 R = 1½"		 R = 1½"	
LETTER & NUMERAL SERIES	9" SERIES "C"		7" SERIES "C" 6" SERIES "C"		10" SERIES "C" 8" SERIES "C"	6" SERIES "E"																			
WIDTH OF BORDER INSIDE OUTSIDE	⅝" BLACK ⅜" WHITE	½" WHITE	⅝" BLACK ⅜" WHITE	½" WHITE	½" WHITE	⅝" BLACK ⅜" WHITE	½" WHITE	⅝" BLACK ⅜" WHITE	½" WHITE	⅝" BLACK ⅜" WHITE	½" WHITE	⅝" BLACK ⅜" WHITE	½" WHITE	⅝" BLACK ⅜" WHITE	½" WHITE	⅝" BLACK ⅜" WHITE	½" WHITE	⅝" BLACK ⅜" WHITE	½" WHITE	⅝" BLACK ⅜" WHITE	½" WHITE	⅝" BLACK ⅜" WHITE	½" WHITE	⅝" BLACK ⅜" WHITE	½" WHITE
SIZE (WIDTH X HEIGHT)	21" X 15"		24" X 12"		⚠ 36" X 18"	24" X 12"		21" X 15"		21" X 15"		21" X 15"		21" X 15"		21" X 15"		21" X 15"		21" X 15"		21" X 15"		21" X 15"	
COLORS COPY / BACKGROUND	BLACK / WHITE	WHITE / BLUE	BLACK / WHITE	WHITE / BLUE	WHITE / BLUE	BLACK / WHITE	WHITE / BLUE	BLACK / WHITE	WHITE / BLUE	BLACK / WHITE	WHITE / BLUE	BLACK / WHITE	WHITE / BLUE	BLACK / WHITE	WHITE / BLUE	BLACK / WHITE	WHITE / BLUE	BLACK / WHITE	WHITE / BLUE	BLACK / WHITE	WHITE / BLUE	BLACK / WHITE	WHITE / BLUE	BLACK / WHITE	WHITE / BLUE
REFLECTORIZATION	B'GROUND	ALL	B'GROUND	ALL	ALL	B'GROUND	ALL	B'GROUND	ALL	B'GROUND	ALL	B'GROUND	ALL	B'GROUND	ALL	B'GROUND	ALL	B'GROUND	ALL	B'GROUND	ALL	B'GROUND	ALL	B'GROUND	ALL
NUMBER OF POSTS FOR MOUNTING	1		1		1	1		1		1		1		1		1		1		1		1		1	
NUMBER OF HOLES TO BE PUNCHED (⅜" DIA.)	2		2		2	2		2		2		2		2		2		2		2		2		2	
PUNCHING DISTANCE FROM EACH VERTICAL EDGE	VERT. CENTER		12" (V. PUNCH) 7" (H.PUNCH)	12"	VERT. CENTER	12" (VERT. CENTER)		VERT. CENTER		VERT. CENTER		VERT. CENTER		VERT. CENTER		VERT. CENTER		VERT. CENTER		VERT. CENTER		VERT. CENTER		VERT. CENTER	
PUNCHING DISTANCE FROM TOP EDGE	1½"; 13½"		1½"; 10½" (V.) 6" (H.)	1½"; 10½"	1½"; 13½"	1½"; 10½"		1½"; 13½"		1½"; 13½"		1½"; 13½"		1½"; 13½"		1½"; 13½"		1½"; 13½"		1½"; 13½"		1½"; 13½"		1½"; 13½"	

GENERAL NOTES:

⚠ 1. THE DIMENSIONS FOR ALL STANDARD ROADSIDE SIGNS SHALL CONFORM WITH THOSE SHOWN IN THE STANDARD HIGHWAY SIGNS IN CONJUNCTION WITH THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES, LASTEST EDITIONS.

2. ROUTE MARKERS AND SHIELDS SHOWN ON THIS SHEET ARE FOR USE INDEPENDENTLY OF INTERSTATE DIRECTIONAL (GUIDE) SIGNS. SEE OTHER DRAWINGS FOR SHIELDS TO BE USED ON INTERSTATE DIRECTIONAL (GUIDE) SIGNS.

3. THE QUANTITIES LISTED ON THE SUMMARY OF QUANTITIES SHEET FOR THE SIGNS SHOWN ON THIS SHEET WILL BE USED AS THE BASIS FOR FINAL PAYMENT, EXCEPT WHERE SIGNS ARE MODIFIED FROM THAT SHOWN.

⚠ 4. M1-5: IN SOME CASES NUMERALS CANNOT BE ACCOMMODATED WITHIN THE SPACE AVAILABLE. FOR THESE SITUATIONS, THE STANDARD SERIES "D" NUMERAL SHALL BE REDUCED TO SERIES "C".

*

NORTH	EAST	SOUTH	WEST
M3-1	M3-2	M3-3	M3-4
M3-1A	M3-2A	M3-3A	M3-4A
M3-101A	M3-102A	M3-103A	M3-104A

SYM	BY	REVISED TEXT. REVISION	DATE
⚠			12/1/25

MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN

STANDARD ROADSIDE SIGNS

MDOT

WORKING NUMBER SN-3

ISSUE DATE: AUGUST 01, 2017

SHEET NUMBER 6303

STATE	PROJECT NO.
MISS.	

SIGN NUMBER	R1-1		R1-2			R2-1			R2-4a	R3-1		R3-2		R3-4		R3-5	R4-3	
ALUMINUM (6061-T6) SIGN BLANK THICKNESS	0.100"	0.125"	0.080"	0.100"	0.125"	0.080"	0.100"	0.125"	0.125"	0.080"	0.100"	0.080"	0.100"	0.080"	0.100"	0.080"	0.100"	0.125"
LEGEND	STOP		YIELD R=2" R=3" R=4"			SPEED LIMIT 70 R=1½" R=2¼" R=3"			SPEED LIMIT 70 MINIMUM 40 R=3"	R=1½" R=2¼"		R=1½" R=2¼"		R=1½" R=2¼"		ONLY R=1⅞"	SLOWER TRAFFIC KEEP RIGHT R=2¼" R=3"	
LETTER & NUMERAL SERIES	12" SERIES "C"	16" SERIES "C"	3" SERIES "C"		5" SERIES "C"	4" SERIES "E" 4" SERIES "E" 10" SERIES "E"	6" SERIES "E" 6" SERIES "E" 14" SERIES "E"	8" SERIES "E" 8" SERIES "E" 16" SERIES "E"	8" SERIES "E" 16" SERIES "E" 8" SERIES "C" 14" SERIES "D"							6" SERIES "D"	6" SERIES "D"	8" SERIES "D"
WIDTH OF BORDER INSIDE / OUTSIDE	⅞" WHITE	1¼" WHITE	5" RED ¾" WHITE	6" RED 1" WHITE	8" RED 1½" WHITE	⅝" BLACK ⅜" WHITE	⅞" BLACK ⅝" WHITE	1¼" BLACK ¾" WHITE	⅞" BLACK ¾" WHITE	⅝" BLACK ⅞" WHITE	⅞" BLACK ⅝" WHITE	⅝" BLACK ⅞" WHITE	⅞" BLACK ⅝" WHITE	⅝" BLACK ⅞" WHITE	⅞" BLACK ⅝" WHITE	¾" BLACK ½" WHITE	⅞" BLACK ⅝" WHITE	1¼" BLACK ¾" WHITE
SIZE (WIDTH X HEIGHT)	36" OCTAGON	48" OCTAGON	36" EQUIL. TRIANGLE	48" EQUIL. TRIANGLE	60" EQUIL. TRIANGLE	24" X 30"	36" X 48"	48" X 60"	48" X 96"	24" X 24"	36" X 36"	24" X 24"	36" X 36"	24" X 24"	36" X 36"	30" X 36"	36" X 48"	48" X 60"
COLORS COPY / BACKGROUND	WHITE / RED	WHITE / RED	RED / WHITE	RED / WHITE	RED / WHITE	BLACK / WHITE	BLACK / WHITE	BLACK / WHITE	BLACK / WHITE	BLACK & RED / WHITE	BLACK & RED / WHITE	BLACK & RED / WHITE	BLACK & RED / WHITE	BLACK & RED / WHITE	BLACK & RED / WHITE	BLACK / WHITE	BLACK / WHITE	BLACK / WHITE
REFLECTORIZATION	ALL	ALL	ALL	ALL	ALL	B'GROUND	B'GROUND	B'GROUND	BACKGROUND	BACKGROUND, CIRCLE, & DIAG.	BACKGROUND, CIRCLE, & DIAG.	BACKGROUND, CIRCLE, & DIAG.	BACKGROUND, CIRCLE, & DIAG.	BACKGROUND, CIRCLE, & DIAG.	BACKGROUND, CIRCLE, & DIAG.	BACKGROUND	BACKGROUND	BACKGROUND
NUMBER OF POSTS FOR MOUNTING	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
NUMBER OF HOLES TO BE PUNCHED (⅜" DIA.)	2	4	2	4	4	2	4	6	10	2	2	2	2	2	2	2	4	6
PUNCHING DISTANCE FROM EACH VERTICAL EDGE	18" (VERT. CENTER)	9"	18" (VERT. CENTER)	12" (FROM CENTER)	15" (FROM CENTER)	12" (VERT. CENTER)	3"	9"	9"	12" (VERT. CENTER)	18" (VERT. CENTER)	12" (VERT. CENTER)	18" (VERT. CENTER)	12" (VERT. CENTER)	18" (VERT. CENTER)	15" (VERT. CENTER)	3"	9"
PUNCHING DISTANCE FROM TOP EDGE	3"; 33"	9"; 39"	3"; 27"	3"; 15"	3"; 21"	3"; 27"	9"; 39"	4"; 30"; 56"	4"; 28"; 52"; 60"; 92"	3"; 21"	6"; 30"	3"; 21"	6"; 30"	3"; 21"	6"; 30"	6"; 30"	9"; 39"	4"; 30"; 56"

SIGN NUMBER	R4-7			R6-3	R5-1		R5-1a	R6-1L, R6-1R	R6-2L, R6-2R	R8-4		R11-1	
ALUMINUM (6061-T6) SIGN BLANK THICKNESS	0.080"	0.125"		0.080"	0.100"	0.125"	0.100"	0.080"	0.080"	0.080"	0.100"	0.125"	0.125"
LEGEND	R=1½" R=2¼" R=3"			DIVIDED HIGHWAY	DO NOT ENTER R=1⅛" R=3"		WRONG WAY R=2¼"	ONE WAY R=1½"	ONE WAY R=1½"	EMERGENCY PARKING ONLY R=2¼"		KEEP OFF MEDIAN R=3"	
LETTER & NUMERAL SERIES					4" SERIES "D"	6" SERIES "D"	8" SERIES "D"	4" SERIES "D"	6" SERIES "D"	4" SERIES "D"	6" SERIES "D"	8" SERIES "C"	10" SERIES "C"
WIDTH OF BORDER INSIDE / OUTSIDE	⅝" BLACK ⅜" WHITE	⅞" BLACK ⅝" WHITE	1¼" BLACK ¾" WHITE	⅝" BLACK ¾" WHITE	WHITE OUT-SIDE BORDER	WHITE OUT-SIDE BORDER	1" WHITE	½" WHITE	⅝" BLACK ⅜" WHITE	⅝" BLACK ⅜" WHITE	⅞" BLACK ⅝" WHITE	⅞" BLACK ⅝" WHITE	1¼" BLACK ¾" WHITE
SIZE (WIDTH X HEIGHT)	24" X 30"	36" X 48"	48" X 60"	30" X 24"	36" X 36"	48" X 48"	42" X 30"	36" X 12"	24" X 30"	30" X 24"	48" X 36"	36" X 48"	48" X 60"
COLORS COPY / BACKGROUND	BLACK / WHITE	BLACK / WHITE	BLACK / WHITE	BLACK / WHITE	WHITE / RED	WHITE / RED	WHITE / RED	BLACK (WHITE ARROW) / BLACK	BLACK / WHITE	BLACK / WHITE	BLACK / WHITE	BLACK / WHITE	BLACK / WHITE
REFLECTORIZATION	BACKGROUND	BACKGROUND	BACKGROUND	BACKGROUND	ALL	ALL	ALL	ARROW & BORDER	BACKGROUND	BACKGROUND	BACKGROUND	BACKGROUND	BACKGROUND
NUMBER OF POSTS FOR MOUNTING	1	1	1	1	1	1	1	1	1	1	2	1	1
NUMBER OF HOLES TO BE PUNCHED (⅜" DIA.)	2	4	6	2	2	4	4	2	2	2	4	4	6
PUNCHING DISTANCE FROM EACH VERTICAL EDGE	12" (VERT. CENTER)	3"	9"	15" (VERT. CENTER)	18" (VERT. CENTER)	9"	9"	18" (VERT. CENTER)	12" (VERT. CENTER)	15" (VERT. CENTER)	9"	3"	9"
PUNCHING DISTANCE FROM TOP EDGE	3"; 27"	9"; 39"	4"; 30"; 56"	3"; 21"	6"; 30"	4"; 44"	3"; 27"	1½"; 10½"	3"; 27"	3"; 21"	3"; 33"	9"; 39"	4"; 30"; 56"

GENERAL NOTES:

1. THE QUANTITIES LISTED ON THE SUMMARY OF QUANTITIES SHEET FOR THE SIGNS SHOWN ON THIS SHEET WILL BE USED AS THE BASIS FOR FINAL PAYMENT, EXCEPT WHERE SIGNS ARE MODIFIED FROM THAT SHOWN.

2. THE SPEED LIMITS REQUIRED ON SIGNS R2-1 AND R2-4a WILL BE SHOWN ON INDIVIDUAL PLAN SHEETS.

⚠ 3. THE DESIGN OF ALL STANDARD ROADSIDE SIGNS SHALL CONFORM TO THE CRITERIA IN THE LATEST VERSION OF THE STANDARD HIGHWAY SIGNS MANUAL IN CONJUNCTION WITH THE LATEST VERSION OF THE MUTCD.

SYM	BY	REVISED TEXT REVISION	DATE
⚠			12/17/26

MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN






STANDARD ROADSIDE SIGNS

MDOT

WORKING NUMBER SN-3A

ISSUE DATE: AUGUST 01, 2017

SHEET NUMBER 6304

																			STATE MISS.	PROJECT NO.
SIGN NUMBER	W1-1L W1-1R		W1-2L W1-2R		W1-3L W1-3R		W1-4L W1-4R		W1-6L W1-6R	W1-7	W3-1 ⚠		W3-2 ⚠		W3-3		W4-1L W4-1R	W4-101L W4-101R
ALUMINUM (6061-T6) SIGN BLANK THICKNESS	0.125"		0.125"		0.125"		0.125"		0.100"	0.100"	0.125"		0.125"		0.125"		0.125"	0.125"
LEGEND																		
LETTER & NUMERAL SERIES																		
WIDTH OF BORDER INSIDE / OUTSIDE	⅞" BLACK ⅝" YELLOW	1¼" BLACK ¾" YELLOW	⅞" BLACK ⅝" YELLOW	1¼" BLACK ¾" YELLOW	⅞" BLACK ⅝" YELLOW	1¼" BLACK ¾" YELLOW	⅞" BLACK ⅝" YELLOW	1¼" BLACK ¾" YELLOW	¾" BLACK ½" YELLOW	¾" BLACK ½" YELLOW	⅞" BLACK ⅝" YELLOW	1¼" BLACK ¾" YELLOW	⅞" BLACK ⅝" YELLOW	1¼" BLACK ¾" YELLOW	⅞" BLACK ⅝" YELLOW	1¼" BLACK ¾" YELLOW	⅞" BLACK ⅝" YELLOW	1¼" BLACK ¾" YELLOW
SIZE (WIDTH X HEIGHT)	36" X 36"	48" X 48"	36" X 36"	48" X 48"	36" X 36"	48" X 48"	36" X 36"	48" X 48"	48" X 24"	48" X 24"	36" X 36"	48" X 48"	36" X 36"	48" X 48"	36" X 36"	48" X 48"	36" X 36"	48" X 48"
COLORS COPY / BACKGROUND	BLACK YELLOW	BLACK YELLOW	BLACK YELLOW	BLACK YELLOW	BLACK YELLOW	BLACK YELLOW	BLACK YELLOW	BLACK YELLOW	BLACK YELLOW	BLACK YELLOW	BLACK YELLOW	BLACK YELLOW	BLACK YELLOW	BLACK YELLOW	BLACK YELLOW	BLACK YELLOW	BLACK YELLOW	BLACK YELLOW
REFLECTORIZATION	BACKGROUND	BACKGROUND	BACKGROUND	BACKGROUND	BACKGROUND	BACKGROUND	BACKGROUND	BACKGROUND	BACKGROUND	BACKGROUND	BACKGROUND & SYMBOL	BACKGROUND & SYMBOL	BACKGROUND & SYMBOL	BACKGROUND & SYMBOL	BACKGROUND & "LIGHTS"	BACKGROUND & "LIGHTS"	BACKGROUND	BACKGROUND
NUMBER OF POSTS FOR MOUNTING	1	1	1	1	1	1	1	1	2	2	1	1	1	1	1	1	1	1
NUMBER OF HOLES TO BE PUNCHED (⅝" DIA.)	2	4	2	4	2	4	2	4	4	4	2	4	2	4	2	4	2	4
PUNCHING DISTANCE FROM EACH VERT. EDGE	VERT. CENTER	15" FROM VERT. CENTER	VERT. CENTER	15" FROM VERT. CENTER	VERT. CENTER	15" FROM VERT. CENTER	VERT. CENTER	15" FROM VERT. CENTER	9"	9"	VERT. CENTER	15" FROM VERT. CENTER	VERT. CENTER	15" FROM VERT. CENTER	VERT. CENTER	15" FROM VERT. CENTER	VERT. CENTER	15" FROM VERT. CENTER
PUNCHING DISTANCE FROM TOP EDGE	18" FROM HORIZ. CENTER	15" FROM HORIZ. CENTER	18" FROM HORIZ. CENTER	15" FROM HORIZ. CENTER	18" FROM HORIZ. CENTER	15" FROM HORIZ. CENTER	18" FROM HORIZ. CENTER	15" FROM HORIZ. CENTER	3"; 21"	3"; 21"	18" FROM HORIZ. CENTER	15" FROM HORIZ. CENTER	18" FROM HORIZ. CENTER	15" FROM HORIZ. CENTER	18" FROM HORIZ. CENTER	15" FROM HORIZ. CENTER	18" FROM HORIZ. CENTER	15" FROM HORIZ. CENTER
SIGN NUMBER	W4-2		W6-1		W6-2		W6-3		W13-1	W13-2	W13-3		W10-1					
ALUMINUM (6061-T6) SIGN BLANK THICKNESS	0.125"		0.125"		0.125"		0.125"		0.080"	0.125"	0.125"		0.100"					
LEGEND	NOTE: SEE PLAN SHEETS FOR IDEOGRAM REQUIRED ON INDIVIDUAL SIGNS. 																	
LETTER & NUMERAL SERIES									10" SERIES "E" 4" SERIES "E"	8" SERIES "E" 16" SERIES "E" 6" SERIES "E" (SEE NOTE)	8" SERIES "E" 16" SERIES "E" 6" SERIES "E" (SEE NOTE)		8" SERIES "E"					
WIDTH OF BORDER INSIDE / OUTSIDE	⅞" BLACK ⅝" YELLOW	1¼" BLACK ¾" YELLOW	⅞" BLACK ⅝" YELLOW	1¼" BLACK ¾" YELLOW	⅞" BLACK ⅝" YELLOW	1¼" BLACK ¾" YELLOW	⅞" BLACK ⅝" YELLOW	1¼" BLACK ¾" YELLOW	⅝" BLACK ⅜" YELLOW	1¼" BLACK ¾" YELLOW	1¼" BLACK ¾" YELLOW		¾" BLACK ½" YELLOW					
SIZE (WIDTH X HEIGHT)	36" X 36"	48" X 48"	36" X 36"	48" X 48"	36" X 36"	48" X 48"	36" X 36"	48" X 48"	24" X 24"	48" X 60"	48" X 60"		36" DIAMETER					
COLORS COPY / BACKGROUND	BLACK YELLOW	BLACK YELLOW	BLACK YELLOW	BLACK YELLOW	BLACK YELLOW	BLACK YELLOW	BLACK YELLOW	BLACK YELLOW	BLACK YELLOW	BLACK YELLOW	BLACK YELLOW		BLACK YELLOW					
REFLECTORIZATION	BACKGROUND	BACKGROUND	BACKGROUND	BACKGROUND	BACKGROUND	BACKGROUND	BACKGROUND	BACKGROUND	BACKGROUND	BACKGROUND	BACKGROUND		BACKGROUND					
NUMBER OF POSTS FOR MOUNTING	1	1	1	1	1	1	1	1	1	1	1		1					
NUMBER OF HOLES TO BE PUNCHED (⅝" DIA.)	2	4	2	4	2	4	2	4	2	6	6		2					
PUNCHING DISTANCE FROM EACH VERT. EDGE	VERT. CENTER	15" FROM VERT. CENTER	VERT. CENTER	15" FROM VERT. CENTER	VERT. CENTER	15" FROM VERT. CENTER	VERT. CENTER	15" FROM VERT. CENTER	12" (VERT. CENTER)	9"	9"		15"					
PUNCHING DISTANCE FROM TOP EDGE	18" FROM HORIZ. CENTER	15" FROM HORIZ. CENTER	18" FROM HORIZ. CENTER	15" FROM HORIZ. CENTER	18" FROM HORIZ. CENTER	15" FROM HORIZ. CENTER	18" FROM HORIZ. CENTER	15" FROM HORIZ. CENTER	3"; 21"	4"; 30"; 56"	4"; 30"; 56"		15" FROM HORIZ. CENTER					

GENERAL NOTES:

1. THE QUANTITIES LISTED ON THE SUMMARY OF QUANTITIES SHEET FOR THE SIGNS SHOWN ON THIS SHEET WILL BE USED AS THE BASIS FOR FINAL PAYMENT, EXCEPT WHERE SIGNS ARE MODIFIED FROM THAT SHOWN.

2. SIGNS W13-2 AND W13-3- THE STROKE WIDTH OF THE LETTER AND NUMERALS SHALL BE WIDENED TO 20% OF THE LETTER OR NUMERAL HEIGHT.

3. THE SPEEDS REQUIRED ON SIGNS W13-1, W13-2 AND W13-3 WILL BE SHOWN ON INDIVIDUAL PLAN SHEETS.

⚠ 4. THE DESIGN OF ALL STANDARD ROADWAY SIGNS SHALL CONFORM TO THE CRITERIA IN THE LATEST VERSION OF THE STANDARD HIGHWAY SIGNS MANUAL IN CONJUNCTION WITH THE LATEST VERSION OF THE MUTCD.

DATE	REVISED TEXT REVISION	BY
12/17/25		STN


MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN


STANDARD ROADSIDE SIGNS


WORKING NUMBER: SN-3B


ISSUE DATE: AUGUST 01, 2017

SHEET NUMBER: 6305

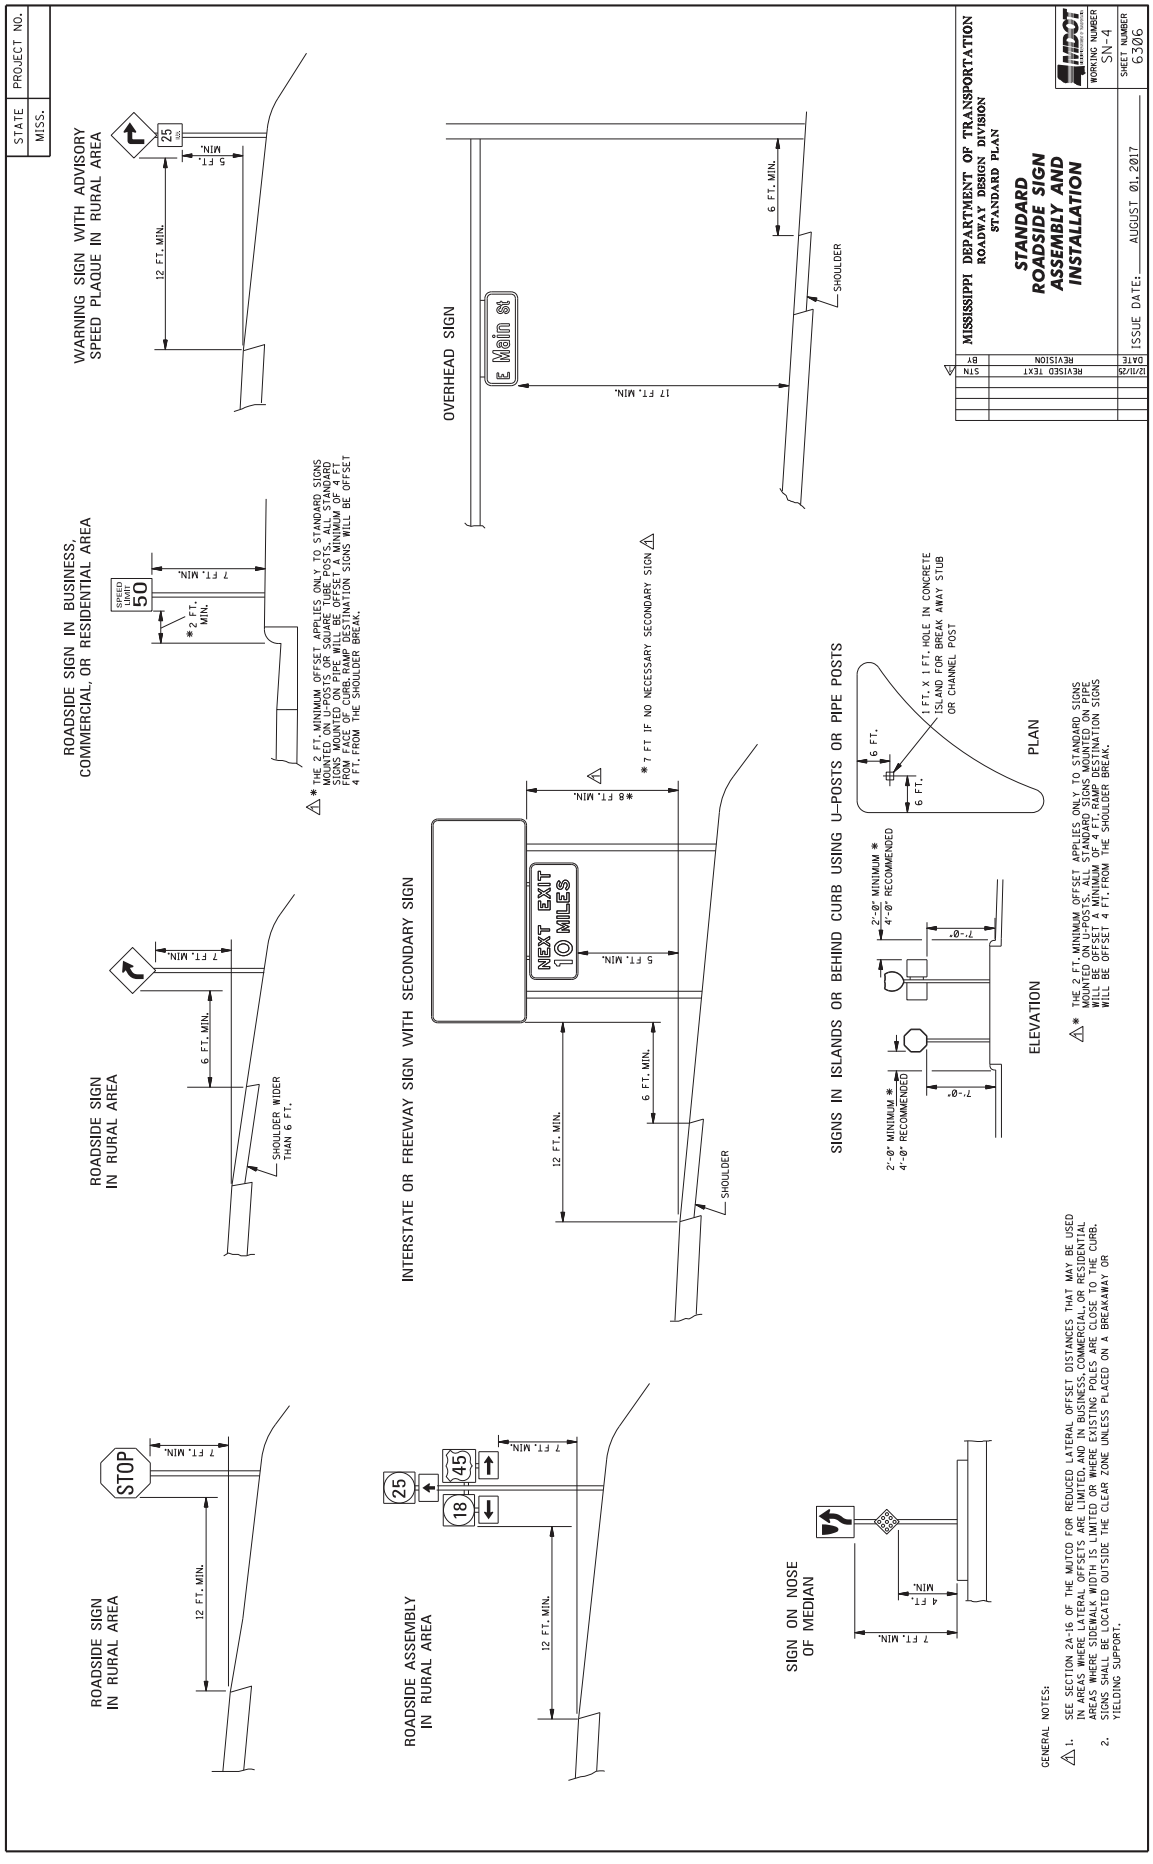

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
STANDARD ROADSIDE SIGN ASSEMBLY AND INSTALLATION
WORKING NUMBER SN-4
SHEET NUMBER 6306
ISSUE DATE: AUGUST 01, 2017
REVISED TEXT STN 12/11/25
WARNING SIGN WITH ADVISORY SPEED PLAQUE IN RURAL AREA
OVERHEAD SIGN
E Main St
ROADSIDE SIGN IN BUSINESS, COMMERCIAL, OR RESIDENTIAL AREA
SPEED LIMIT 50
INTERSTATE OR FREEWAY SIGN WITH SECONDARY SIGN
NEXT EXIT 10 MILES
ROADSIDE SIGN IN RURAL AREA
SHOULDER WIDER THAN 6 FT.
SHOULDER
SIGNS IN ISLANDS OR BEHIND CURB USING U-POSTS OR PIPE POSTS
PLAN
ELEVATION
ROADSIDE SIGN IN RURAL AREA
STOP
ROADSIDE ASSEMBLY IN RURAL AREA
SIGN ON NOSE OF MEDIAN
GENERAL NOTES:
1. SEE SECTION 2A-16 OF THE MUTCD FOR REDUCED LATERAL OFFSET DISTANCES THAT MAY BE USED IN AREAS WHERE LATERAL OFFSETS ARE LIMITED, AND IN BUSINESS, COMMERCIAL, OR RESIDENTIAL AREAS WHERE SIDEWALK WIDTH IS LIMITED OR WHERE EXISTING POLES ARE CLOSE TO THE CURB.
2. SIGNS SHALL BE LOCATED OUTSIDE THE CLEAR ZONE UNLESS PLACED ON A BREAKAWAY OR YIELDING SUPPORT.

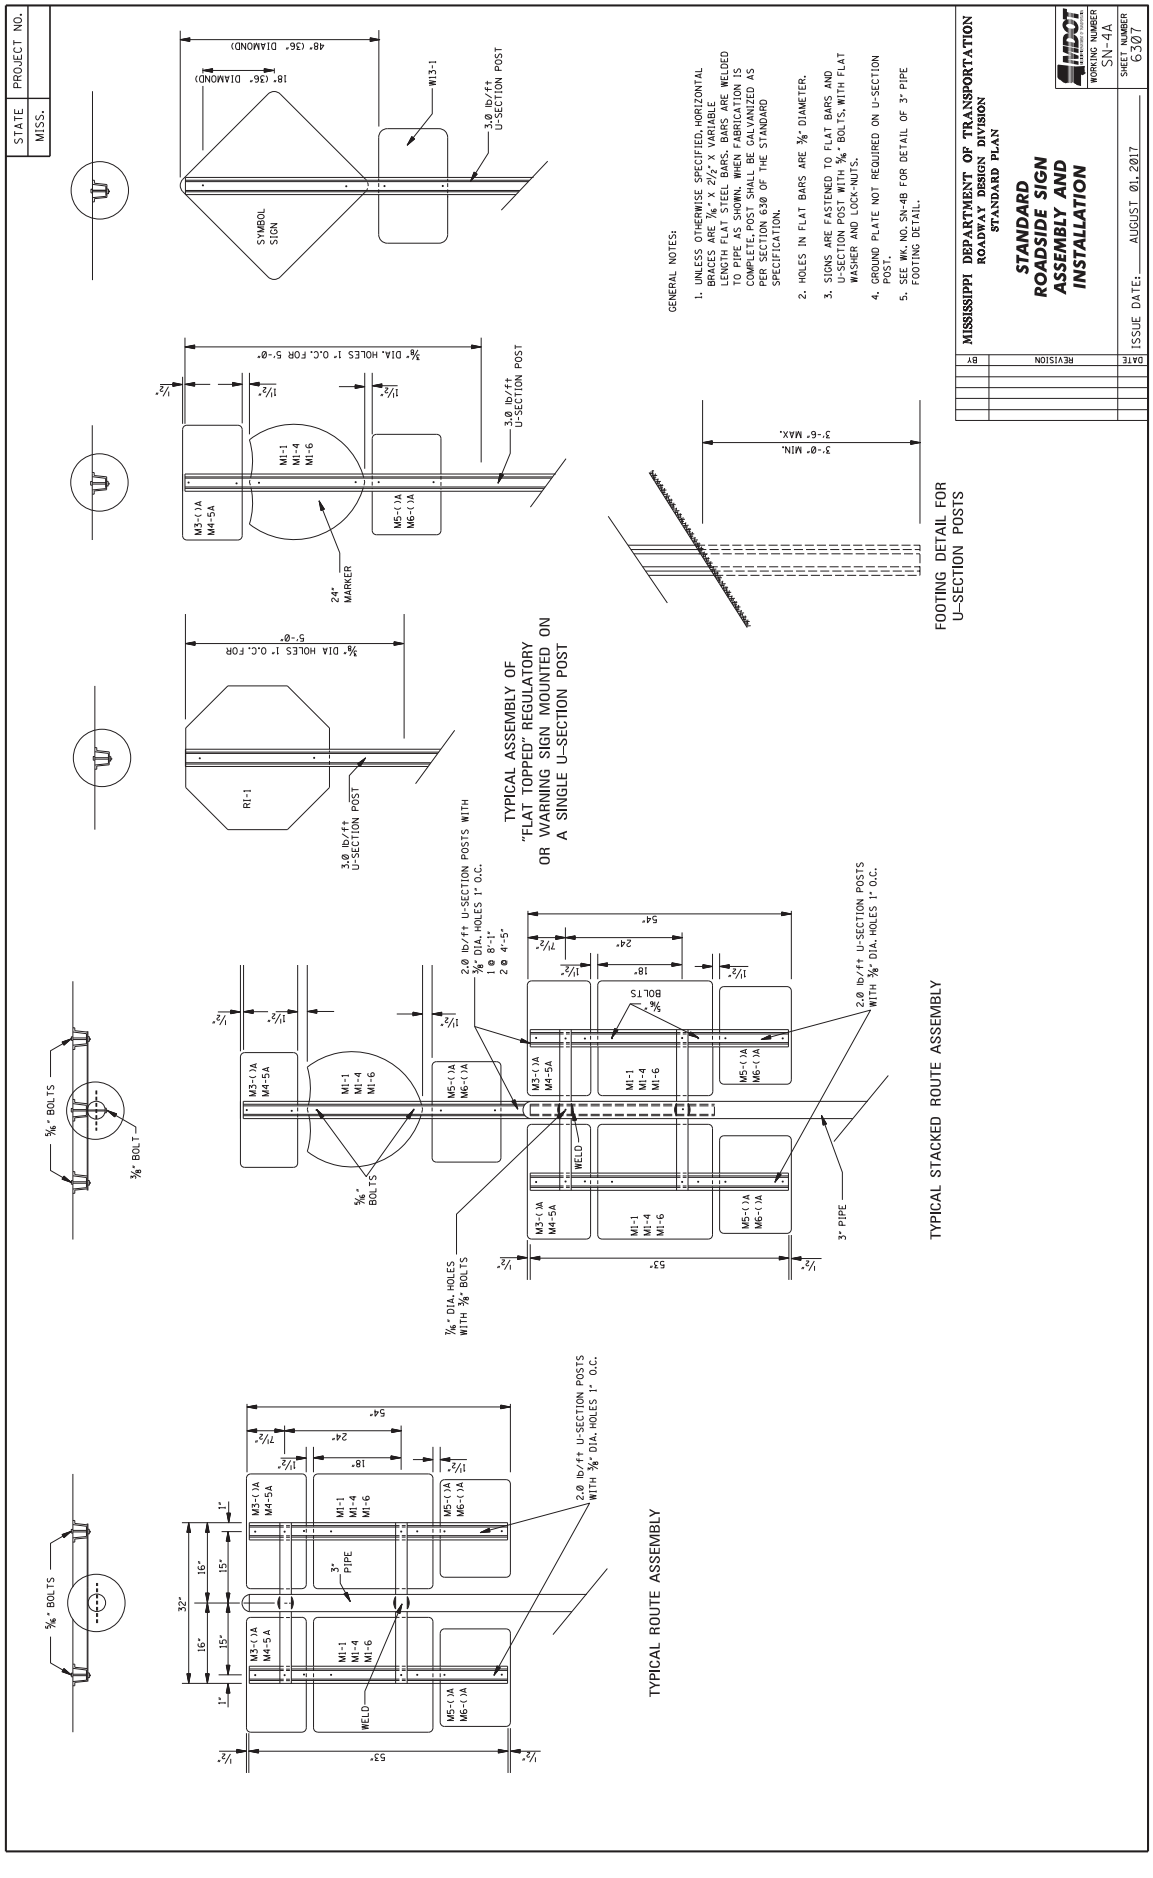
STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
STANDARD ROADSIDE SIGN ASSEMBLY AND INSTALLATION
WORKING NUMBER SN-4A
SHEET NUMBER 6307
ISSUE DATE: AUGUST 01, 2017
BY REVISION DATE
GENERAL NOTES:
1. UNLESS OTHERWISE SPECIFIED, HORIZONTAL BRACES ARE 3/16" X 2 1/2" X VARIABLE LENGTH FLAT STEEL BARS. BARS ARE WELDED TO PIPE AS SHOWN. WHEN FABRICATION IS COMPLETE, POST SHALL BE GALVANIZED AS PER SECTION 630 OF THE STANDARD SPECIFICATION.
2. HOLES IN FLAT BARS ARE 3/8" DIAMETER.
3. SIGNS ARE FASTENED TO FLAT BARS AND U-SECTION POST WITH 3/8" BOLTS, WITH FLAT WASHER AND LOCK-NUTS.
4. GROUND PLATE NOT REQUIRED ON U-SECTION POST.
5. SEE WK. NO. SN-4B FOR DETAIL OF 3" PIPE FOOTING DETAIL.
FOOTING DETAIL FOR U-SECTION POSTS
TYPICAL ASSEMBLY OF "FLAT TOPPED" REGULATORY OR WARNING SIGN MOUNTED ON A SINGLE U-SECTION POST
TYPICAL STACKED ROUTE ASSEMBLY
TYPICAL ROUTE ASSEMBLY
SYMBOL SIGN
48" (36" DIAMOND)
18" (36" DIAMOND)
W13-1
3.0 lb/ft U-SECTION POST
3/8" DIA. HOLES 1" O.C. FOR 5'-0"
M3-( )A M4-5A
M1-1 M1-4 M1-6
M5-( )A M6-( )A
24" MARKER
R1-1
2.0 lb/ft U-SECTION POSTS WITH 3/8" DIA. HOLES 1" O.C.
1 @ 8"-1"
2 @ 4"-5"
3" PIPE
WELD
3/8" BOLTS
3/8" BOLT
1/8" DIA. HOLES WITH 3/8" BOLTS
3'-0" MIN.
3'-6" MAX.

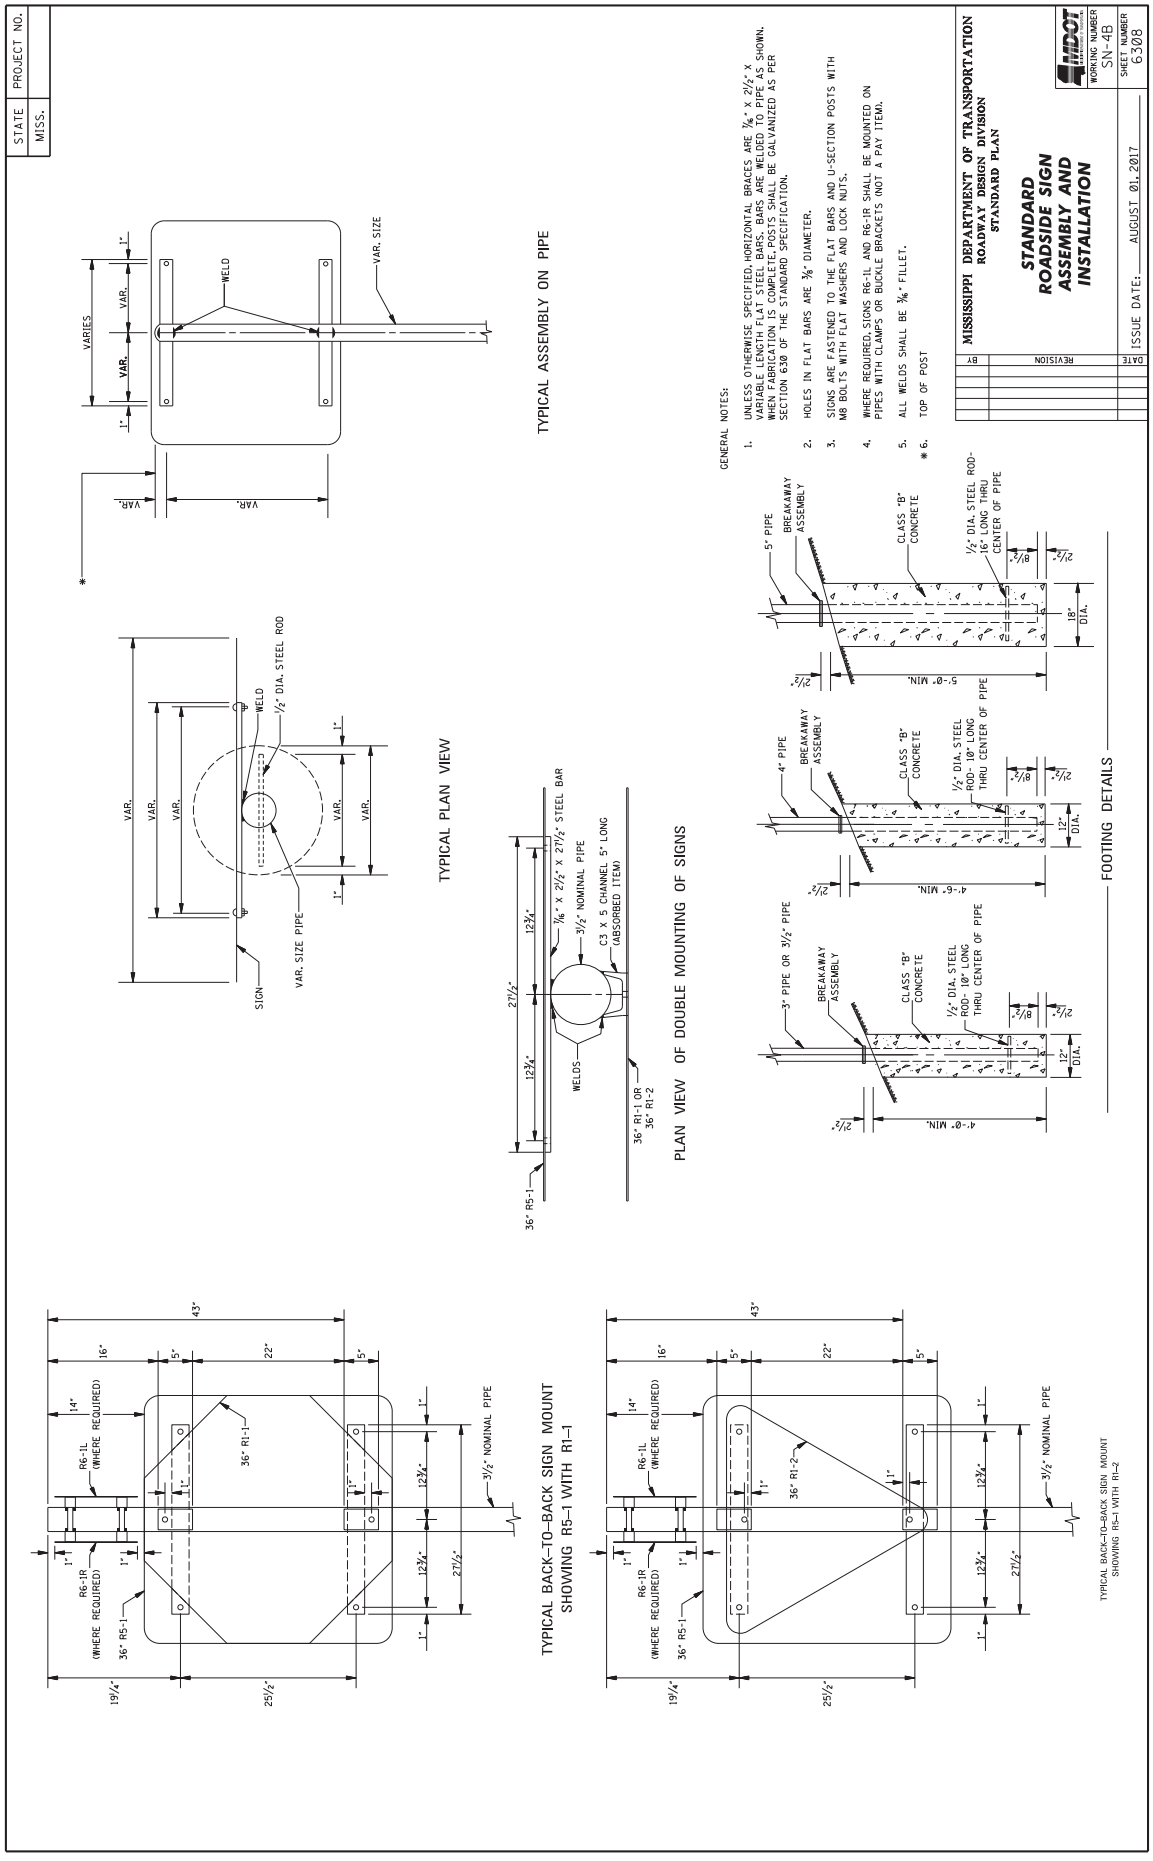

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
STANDARD ROADSIDE SIGN ASSEMBLY AND INSTALLATION
WORKING NUMBER SN-48
SHEET NUMBER 6308
ISSUE DATE: AUGUST 01, 2017
DATE REVISION BY
GENERAL NOTES:
1. UNLESS OTHERWISE SPECIFIED, HORIZONTAL BRACES ARE 7/8" X 2 1/2" X VARIABLE LENGTH FLAT STEEL BARS. BARS ARE WELDED TO PIPE AS SHOWN. WHEN FABRICATION IS COMPLETE, POSTS SHALL BE GALVANIZED AS PER SECTION 630 OF THE STANDARD SPECIFICATION.
2. HOLES IN FLAT BARS ARE 3/8" DIAMETER.
3. SIGNS ARE FASTENED TO THE FLAT BARS AND U-SECTION POSTS WITH M8 BOLTS WITH FLAT WASHERS AND LOCK NUTS.
4. WHERE REQUIRED, SIGNS R6-1L AND R6-1R SHALL BE MOUNTED ON PIPES WITH CLAMPS OR BUCKLE BRACKETS (NOT A PAY ITEM).
5. ALL WELDS SHALL BE 3/16" FILLET.
* 6. TOP OF POST
TYPICAL ASSEMBLY ON PIPE
TYPICAL PLAN VIEW
PLAN VIEW OF DOUBLE MOUNTING OF SIGNS
FOOTING DETAILS
TYPICAL BACK-TO-BACK SIGN MOUNT SHOWING R5-1 WITH R1-1
TYPICAL BACK-TO-BACK SIGN MOUNT SHOWING R5-1 WITH R1-2

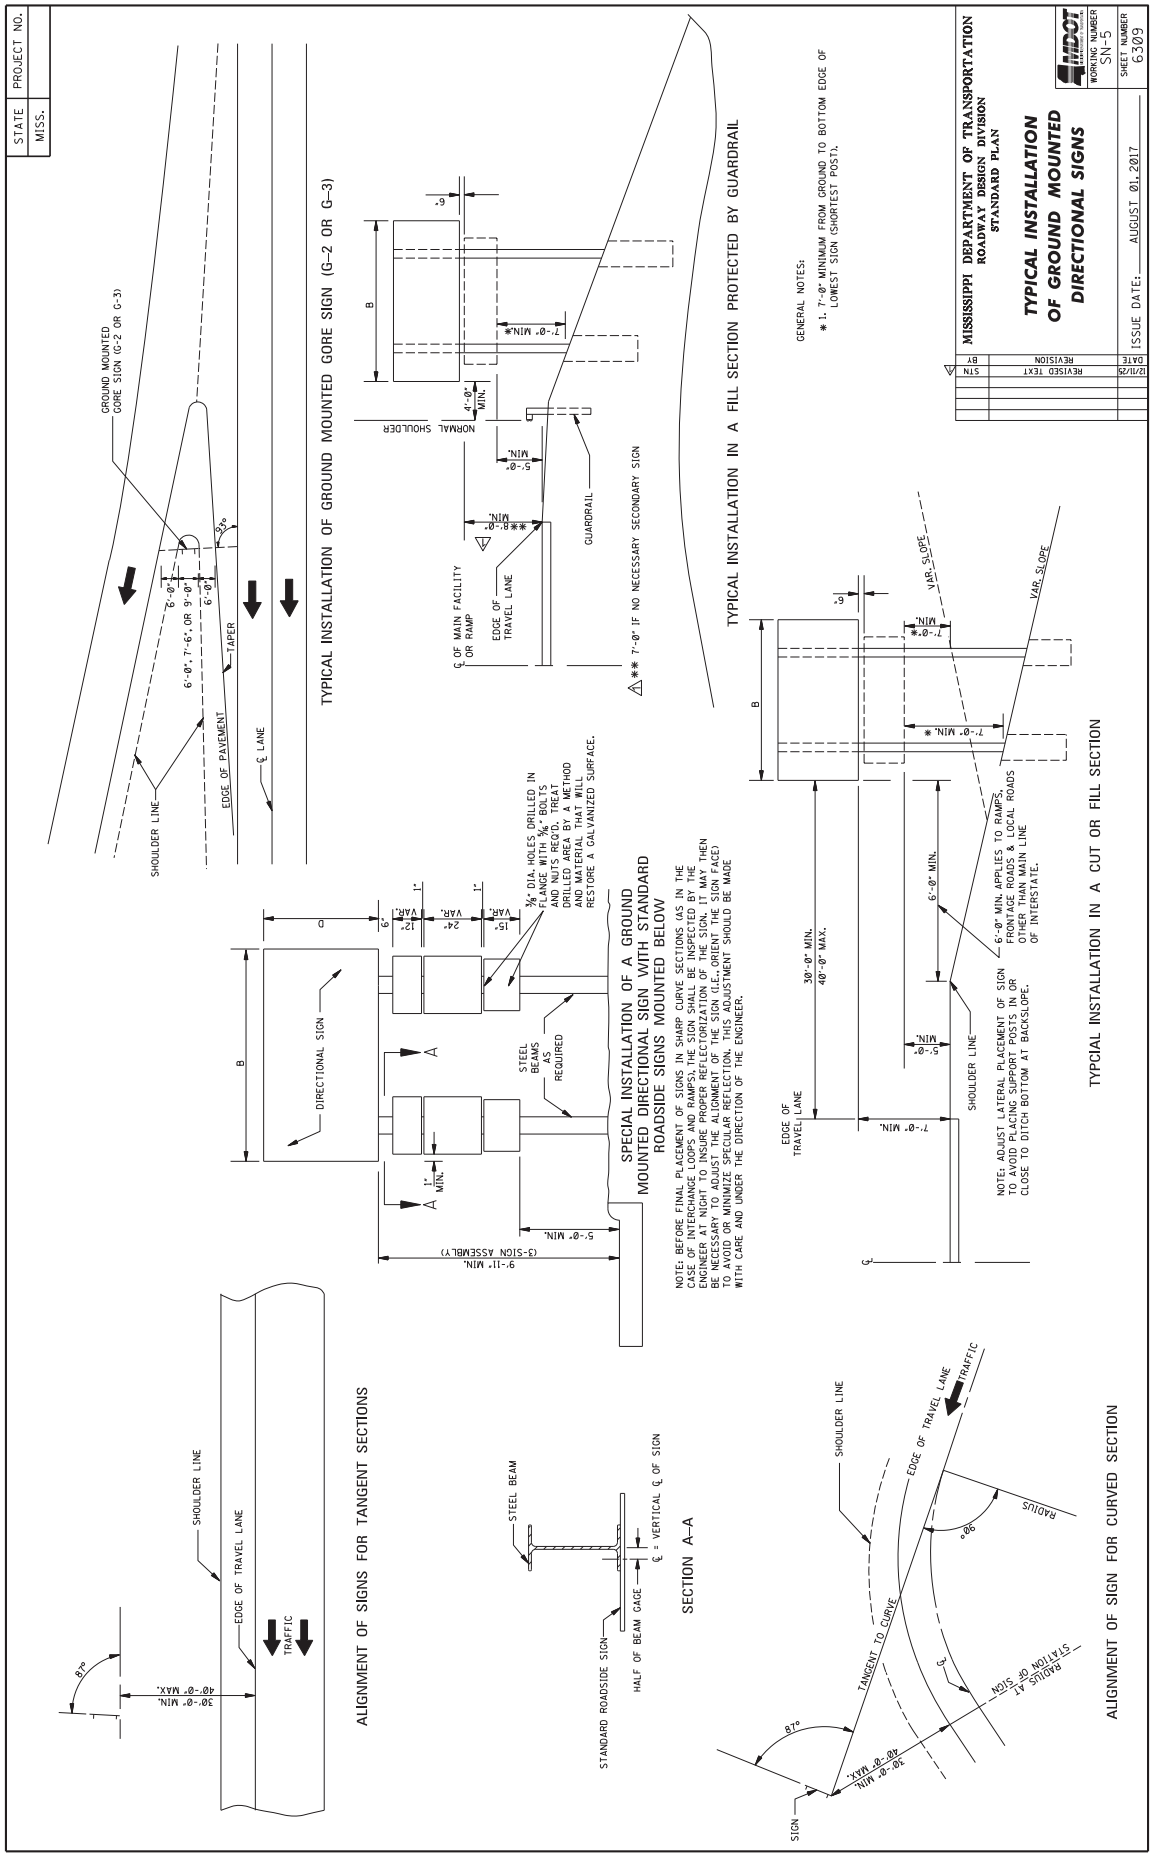
STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
TYPICAL INSTALLATION OF GROUND MOUNTED DIRECTIONAL SIGNS
WORKING NUMBER SN-5
SHEET NUMBER 6309
ISSUE DATE: AUGUST 01, 2017
REVISED TEXT STN 12/11/25
TYPICAL INSTALLATION OF GROUND MOUNTED GORE SIGN (G-2 OR G-3)
GROUND MOUNTED GORE SIGN (G-2 OR G-3)
SHOULDER LINE
EDGE OF PAVEMENT
℄ LANE
TAPER
6'-0", 7'-6", OR 9'-0"
6'-0"
8°
TYPICAL INSTALLATION IN A FILL SECTION PROTECTED BY GUARDRAIL
GENERAL NOTES:
* 1. 7'-0" MINIMUM FROM GROUND TO BOTTOM EDGE OF LOWEST SIGN (SHORTEST POST).
℄ OF MAIN FACILITY OR RAMP
EDGE OF TRAVEL LANE
GUARDRAIL
NORMAL SHOULDER
7'-0" MIN.*
5'-0" MIN.
4'-0" MIN.
8'-0" MIN.**
** 7'-0" IF NO NECESSARY SECONDARY SIGN
SPECIAL INSTALLATION OF A GROUND MOUNTED DIRECTIONAL SIGN WITH STANDARD ROADSIDE SIGNS MOUNTED BELOW
DIRECTIONAL SIGN
B
A
STEEL BEAMS AS REQUIRED
¾" DIA HOLES DRILLED IN FLANGE WITH ⅝" BOLTS AND NUTS REQ'D. TREAT DRILLED AREA BY A METHOD AND MATERIAL THAT WILL RESTORE A GALVANIZED SURFACE.
VAR.
15°
24°
12°
9°
1"
1" MIN.
5'-0" MIN.
9'-11" MIN. (3-SIGN ASSEMBLY)
NOTE: BEFORE FINAL PLACEMENT OF SIGNS IN SHARP CURVE SECTIONS (AS IN THE CASE OF INTERCHANGE LOOPS AND RAMPS), THE SIGN SHALL BE INSPECTED BY THE ENGINEER AT NIGHT TO INSURE PROPER REFLECTORIZATION OF THE SIGN. IT MAY THEN BE NECESSARY TO ADJUST THE ALIGNMENT OF THE SIGN (I.E., ORIENT THE SIGN FACE) TO AVOID MINOR SPECULAR REFLECTIONS. THIS ADJUSTMENT SHOULD BE MADE WITH CARE AND UNDER THE DIRECTION OF THE ENGINEER.
TYPICAL INSTALLATION IN A CUT OR FILL SECTION
VAR. SLOPE
6'-0" MIN.
5'-0" MIN.
7'-0" MIN.
30'-0" MIN.
40'-0" MAX.
EDGE OF TRAVEL LANE
SHOULDER LINE
6'-0" MIN. APPLIES TO RAMPS, FRONTAGE ROADS & LOCAL ROADS OTHER THAN MAIN LINE OF INTERSTATE.
NOTE: ADJUST LATERAL PLACEMENT OF SIGN TO AVOID PLACING SUPPORT POSTS IN OR CLOSE TO DITCH BOTTOM AT BACKSLOPE.
ALIGNMENT OF SIGNS FOR TANGENT SECTIONS
SHOULDER LINE
EDGE OF TRAVEL LANE
TRAFFIC
8°
30'-0" MIN.
40'-0" MAX.
SECTION A-A
STEEL BEAM
STANDARD ROADSIDE SIGN
HALF OF BEAM GAGE
℄ = VERTICAL ℄ OF SIGN
ALIGNMENT OF SIGN FOR CURVED SECTION
SHOULDER LINE
EDGE OF TRAVEL LANE
TRAFFIC
RADIUS
90°
TANGENT TO CURVE
RADIUS AT STATION OF SIGN
SIGN
8°
30'-0" MIN.
40'-0" MAX.

STATE	PROJECT NO.
MISS.	

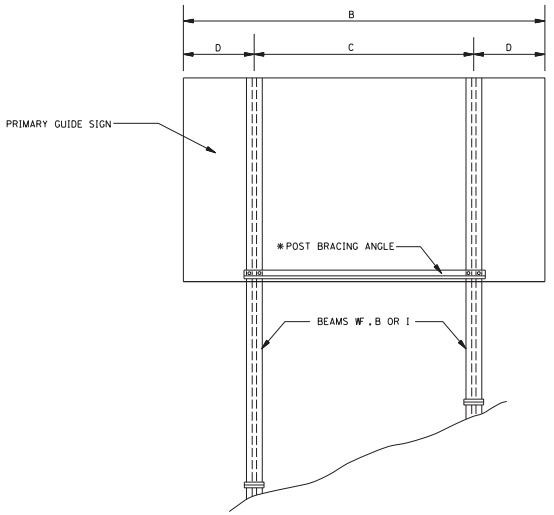

TYPICAL 2–POST INSTALLATION
WITHOUT EXIT SIGN

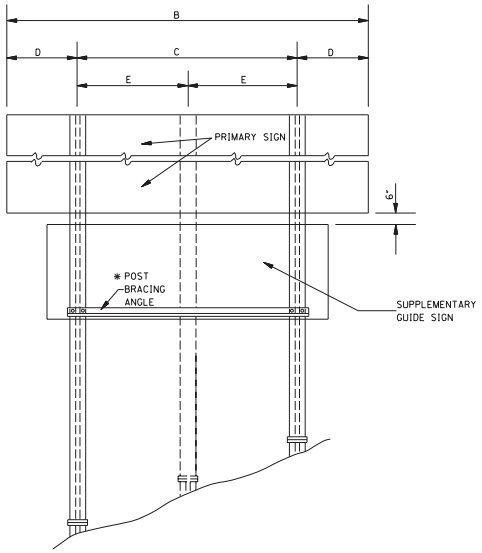

TYPICAL 2 OR 3 POST INSTALLATION
WITH SUPPLEMENTARY GUIDE SIGN
AND POST BRACING ANGLE LOCATION

GENERAL NOTES FOR WORKING SHEETS SN-6, SN-6A AND SN-6B:

1. FOOTING
ALL FOOTINGS SHALL BE CLASS "B" CONCRETE. POST STUBS SHALL BE SET IN CONCRETE FOOTING AT REQUIRED GRADE AND ALIGNMENT WITH CARE SO THAT MINIMUM SHIMMING WILL BE REQUIRED.

2. BASE CONNECTION PROCEDURE
ASSEMBLE POST TO STUB WITH BOLTS AND WITH A FLAT WASHER ON EACH BOLT BETWEEN PLATES. SHIM AS REQUIRED TO PLUMB POST. TIGHTEN ALL BOLTS THE MAXIMUM POSSIBLE WITH A 12" TO 15" WRENCH TO BED WASHERS AND SHIMS AND TO CLEAN BOLT THREADS. THEN LOOSEN EACH BOLT IN TURN AND RETIGHTEN IN A SYSTEMATIC ORDER TO THE PRESCRIBED TORQUE AS SHOWN BY TABLE. BURR THREADS AT JUNCTION WITH NUT USING A CENTER PUNCH. HIGH STRENGTH BOLTS IN BASE CONNECTIONS SHALL BE TIGHTENED TO TORQUE AS SHOWN BY TABLE ON SN-6A. DO NOT OVER TIGHTEN!

3. POST LENGTH
ALL POST LENGTHS SHALL BE VERIFIED AND APPROVED BY THE ENGINEER PRIOR TO FABRICATION. WHERE FIELD CONDITIONS REQUIRE THE POST LENGTH TO VARY MORE THAN 12", IT MAY BE NECESSARY TO CHANGE THE SIZE OR NUMBER OF POSTS. SUCH DETERMINATION WILL BE MADE BY THE STATE TRAFFIC ENGINEER. ANY CHANGE OF SIZE OR NUMBER OF POSTS SHALL NOT BE JUSTIFICATION FOR ANY CONTRACT PRICE ADJUSTMENTS.

4. FABRICATOR NOTE
IMPORTANT- ALL FRICTION FUSE BOLTS SHALL BE TIGHTENED IN SHOP BY A METHOD APPROVED BY THE BRIDGE DESIGN ENGINEER. TIGHTENING SHALL BE TO SUCH A DEGREE AS TO PROVIDE THE MINIMUM TENSION IN EACH BOLT WHEN ALL BOLTS ARE TIGHT, AS SHOWN BY TABLE SN-6A.

5. ALL HOLES IN FUSE PLATES AND HINGE PLATES SHALL BE DRILLED.

6. ALL PLATE CUTS SHOULD BE SAW CUTS. FLAME CUTTING WILL BE PERMITTED PROVIDED ALL EDGES ARE GROUND. METAL PROJECTING BEYOND THE PLANE OF THE PLATE FACE WILL NOT BE ACCEPTABLE.

7. WELDING FOR STEEL SIGN SUPPORTS
WELDING SHALL BE PERFORMED IN SHOP BY ELECTRIC ARC PROCESS.

8. MATERIAL SPECIFICATIONS
THE MATERIALS USED IN THE CONSTRUCTION OF THE GROUND MOUNTED SIGN SUPPORT STRUCTURES, AS LISTED BELOW, SHALL CONFORM WITH THE REQUIREMENTS OF THE DESIGNATED ASTM SPECIFICATION. ALL OTHER MATERIALS, FABRICATION AND ERECTION SHALL BE IN ACCORDANCE WITH THE REQUIREMENTS OF THE SPECIFICATIONS, EXCEPT AS OTHERWISE NOTED ON THE PLANS.

DESCRIPTION	MATERIALS PER ASTM DESIGNATION	GALVANIZE (1) PER ASTM DESIGNATION
POSTS OF STEEL PIPE	A 53 (GRADE "B")(2)	A 53
BASE CONNECTION PLATES FOR PIPES	A 36	A 123
POSTS OF STEEL WF, B, AND I BEAMS INCLUDING BASE CONNECTION, FUSE AND HINGE PLATES	A 588 OR A 572 GRADE 50	A 123
POST BRACING ANGLES AND FLAT BARS USED IN FABRICATION AND ERECTION OF SIGN SUPPORTS	A 36	A 123
HIGH STRENGTH BOLTS, NUTS AND WASHERS	A 325	A 153
BOLTS OTHER THAN HIGH STRENGTH (3)	A 307 (GRADE "A")	A 153

(1) ALL STEEL SHALL BE GALVANIZED AFTER FABRICATION EXCEPT AS NOTED ON THE PLANS.
(2) PIPES MAY BE WELDED OR SEAMLESS.
(3) BOLTS, WASHERS, AND NUTS USED FOR FASTENING ALUMINUM SIGN SHEETS AND PANELS SHALL BE ALUMINUM AS PER FOLLOWING TABLE.

DESCRIPTION	ASTM DESIGNATION	ALLOY
BOLTS AND WASHERS	B 209	2024-T4
PANEL BOLT NUTS	B 211	6061-T6
STOP NUTS	B 211	2017-T4

* NOTE: PLACE POST BRACING ANGLE AT BOTTOM OF PRIMARY OR SUPPLEMENTARY SIGN WHICHEVER IS LOWER. (SEE "END ELEVATION OF POST AND FOOTING" ON SN-6A.)

SIGN POST SPACING TABLE

2 POST			2 POST (CONT'D)			3 POST			
"B"	"C"	"D"	"B"	"C"	"D"	"B"	"C"	"D"	"E"
4'-0"	2'-0"	1'-0"	14'-6"	8'-9"	2'-10½"	20'-0"	14'-0"	3'-0"	7'-0"
4'-6"	2'-6"	1'-0"	15'-0"	9'-0"	3'-0"	20'-6"	14'-3"	3'-1½"	7'-1½"
5'-0"	3'-0"	1'-0"	15'-6"	9'-3"	3'-1½"	21'-0"	14'-9"	3'-1½"	7'-4½"
5'-6"	3'-6"	1'-0"	16'-0"	9'-6"	3'-3"	21'-6"	15'-0"	3'-3"	7'-6"
6'-0"	4'-0"	1'-0"	16'-6"	10'-0"	3'-3"	22'-0"	15'-6"	3'-3"	7'-9"
6'-6"	4'-6"	1'-0"	17'-0"	10'-3"	3'-4½"	22'-6"	15'-9"	3'-4½"	7'-10½"
7'-0"	5'-0"	1'-0"	17'-6"	10'-6"	3'-6"	23'-0"	16'-0"	3'-6"	8'-0"
7'-6"	5'-6"	1'-0"	18'-0"	10'-9"	3'-7½"	23'-6"	16'-6"	3'-6"	8'-3"
8'-0"	6'-0"	1'-0"	18'-6"	11'-0"	3'-9"	24'-0"	16'-9"	3'-7½"	8'-4½"
8'-6"	6'-6"	1'-0"	19'-0"	11'-6"	3'-9"	24'-6"	17'-3"	3'-7½"	8'- 7½"
9'-0"	7'-0"	1'-0"	19'-6"	11'-9"	3'-10½"	25'-0"	17'-6"	3'-9"	8'-9"
9'-6"	7'-0"	1'-3"	20'-0"	12'-0"	4'-0"	25'-6"	17'-9"	3'-10½"	8'-10½"
10'-0"	7'-0"	1'-6"	20'-6"	12'-3"	4'-1½"	26'-0"	18'-3"	3'-10½"	9'-1½"
10'-6"	7'-0"	1'-9"	21'-0"	12'-6"	4'-3"	26'-6"	18'-6"	4'-0"	9'-3"
11'-0"	7'-0"	2'-0"	21'-6"	13'-0"	4'-3"	27'-0"	19'-0"	4'-0"	9'-6"
11'-6"	7'-0"	2'-3"	22'-0"	13'-3"	4'-4½"	27'-6"	19'-3"	4'-1½"	9'-7½"
12'-0"	7'-3"	2'-4½"	22'-6"	13'-6"	4'-6"	28'-0"	19'-6"	4'-3"	9'-9"
12'-6"	7'-6"	2'-6"	23'-0"	13'-9"	4'-7½"	28'-6"	20'-0"	4'-3"	10'-0"
13'-0"	7'-9"	2'-7½"	23'-6"	14'-0"	4'-9"	29'-0"	20'-3"	4'-4½"	10'-1½"
13'-6"	8'-0"	2'-9"	24'-0"	14'-6"	4'-9"	29'-6"	20'-6"	4'-6"	10'-3"
14'-0"	8'-6"	2'-9"				30'-0"	21'-0"	4'-6"	10'-6"

BY	REVISION	DATE

MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN


BREAKAWAY SIGN SUPPORTS


MDOT


WORKING NUMBER
SN-6


ISSUE DATE: AUGUST 01, 2017


SHEET NUMBER
6310

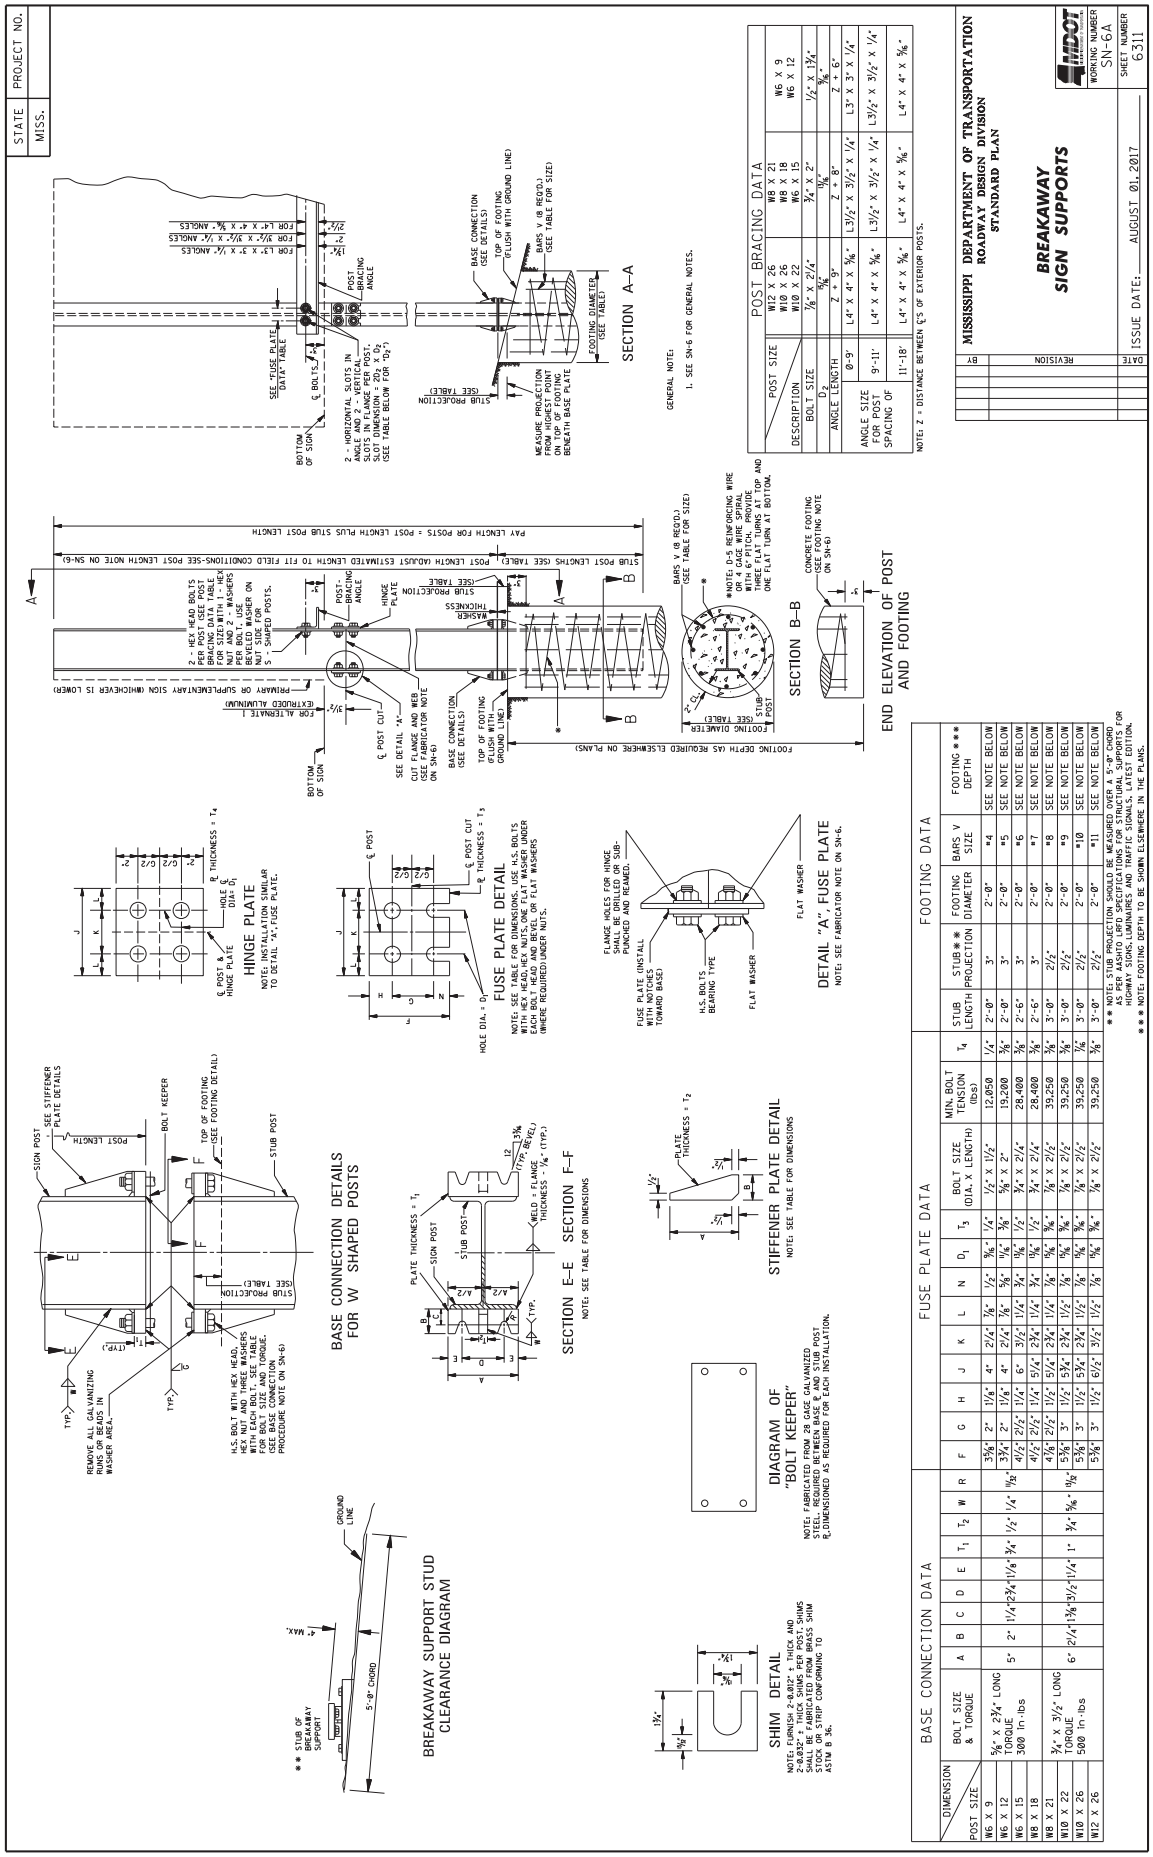
STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
BREAKAWAY SIGN SUPPORTS
WORKING NUMBER SN-6A
SHEET NUMBER 6311
ISSUE DATE: AUGUST 01, 2017
REVISION
DATE
BY
POST BRACING DATA
POST SIZE
DESCRIPTION
BOLT SIZE
D2
ANGLE LENGTH
ANGLE SIZE FOR POST SPACING OF
0'-9'
9'-11'
11'-18'
W12 X 26
W10 X 22
W8 X 21
W8 X 18
W6 X 15
W6 X 12
7/8" X 2 1/4"
3/4" X 2"
1/2" X 1 3/4"
2 @ 9"
2 @ 8"
2 @ 6"
L4" X 4" X 5/8"
L3 1/2" X 3 1/2" X 1/4"
L3" X 3" X 1/4"
L4" X 4" X 3/4"
L3 1/2" X 3 1/2" X 1/4"
L3 1/2" X 3 1/2" X 1/4"
L4" X 4" X 3/4"
L4" X 4" X 5/8"
L4" X 4" X 5/8"
NOTE: Z = DISTANCE BETWEEN C'S OF EXTERIOR POSTS.
GENERAL NOTE:
1. SEE SN-6 FOR GENERAL NOTES.
SECTION A–A
SECTION B–B
END ELEVATION OF POST AND FOOTING
BASE CONNECTION DETAILS FOR W SHAPED POSTS
HINGE PLATE
FUSE PLATE DETAIL
DETAIL "A" FUSE PLATE
SECTION E–E SECTION F–F
STIFFENER PLATE DETAIL
DIAGRAM OF "BOLT KEEPER"
SHIM DETAIL
BREAKAWAY SUPPORT STUD CLEARANCE DIAGRAM
BASE CONNECTION DATA
FUSE PLATE DATA
FOOTING DATA
DIMENSION
POST SIZE
BOLT SIZE & TORQUE
W6 X 9
W6 X 12
W6 X 15
W8 X 18
W8 X 21
W10 X 22
W10 X 26
W12 X 26
5/8" X 2 3/4" LONG
TORQUE 300 ft-lbs
3/4" X 3 1/2" LONG
TORQUE 500 ft-lbs
5" 2" 1 1/4" 2 3/4" 1 1/8" 3/4" 1/2" 1/4"
6" 2 1/4" 1 3/8" 3 1/2" 1 1/4" 1" 3/4" 5/8" 1/2"
NOTE: FURNISH 2-0.012" ± THICK AND 2-0.032" ± THICK SHIMS PER POST. SHIMS SHALL BE FABRICATED FROM ALUMINUM STOCK OR STRIP CONFORMING TO ASTM B 36.
NOTE: FABRICATED FROM 28 GAGE GALVANIZED STEEL. REQUIRED BETWEEN BASE ℄ AND STUB POST ℄ DIMENSIONED AS REQUIRED FOR EACH INSTALLATION.
NOTE: SEE TABLE FOR DIMENSIONS
NOTE: SEE TABLE FOR DIMENSIONS, USE H.S. BOLTS WITH HEX HEAD, HEX NUTS, ONE FLAT WASHER UNDER EACH BOLT HEAD AND BEVEL OR FLAT WASHERS WHERE REQUIRED UNDER NUTS.
NOTE: SEE FABRICATOR NOTE ON SN-6.
NOTE: SEE STIFFENER PLATE DETAILS
NOTE: SEE FOOTING DETAIL
NOTE: SEE FABRICATOR NOTE ON SN-6
NOTE: INSTALLATION SIMILAR TO DETAIL "A" FUSE PLATE.
NOTE: SEE FOOTING NOTE ON SN-6
NOTE: SEE DETAIL "A"
NOTE: SEE SIGN POST BRACING DATA TABLE
NOTE: SEE BASE CONNECTION PROCEDURE NOTE ON SN-6
NOTE: SEE SIGN POST BRACING DATA TABLE
NOTE: SEE SIGN POST BRACING DATA TABLE
NOTE: SEE SIGN POST BRACING DATA TABLE

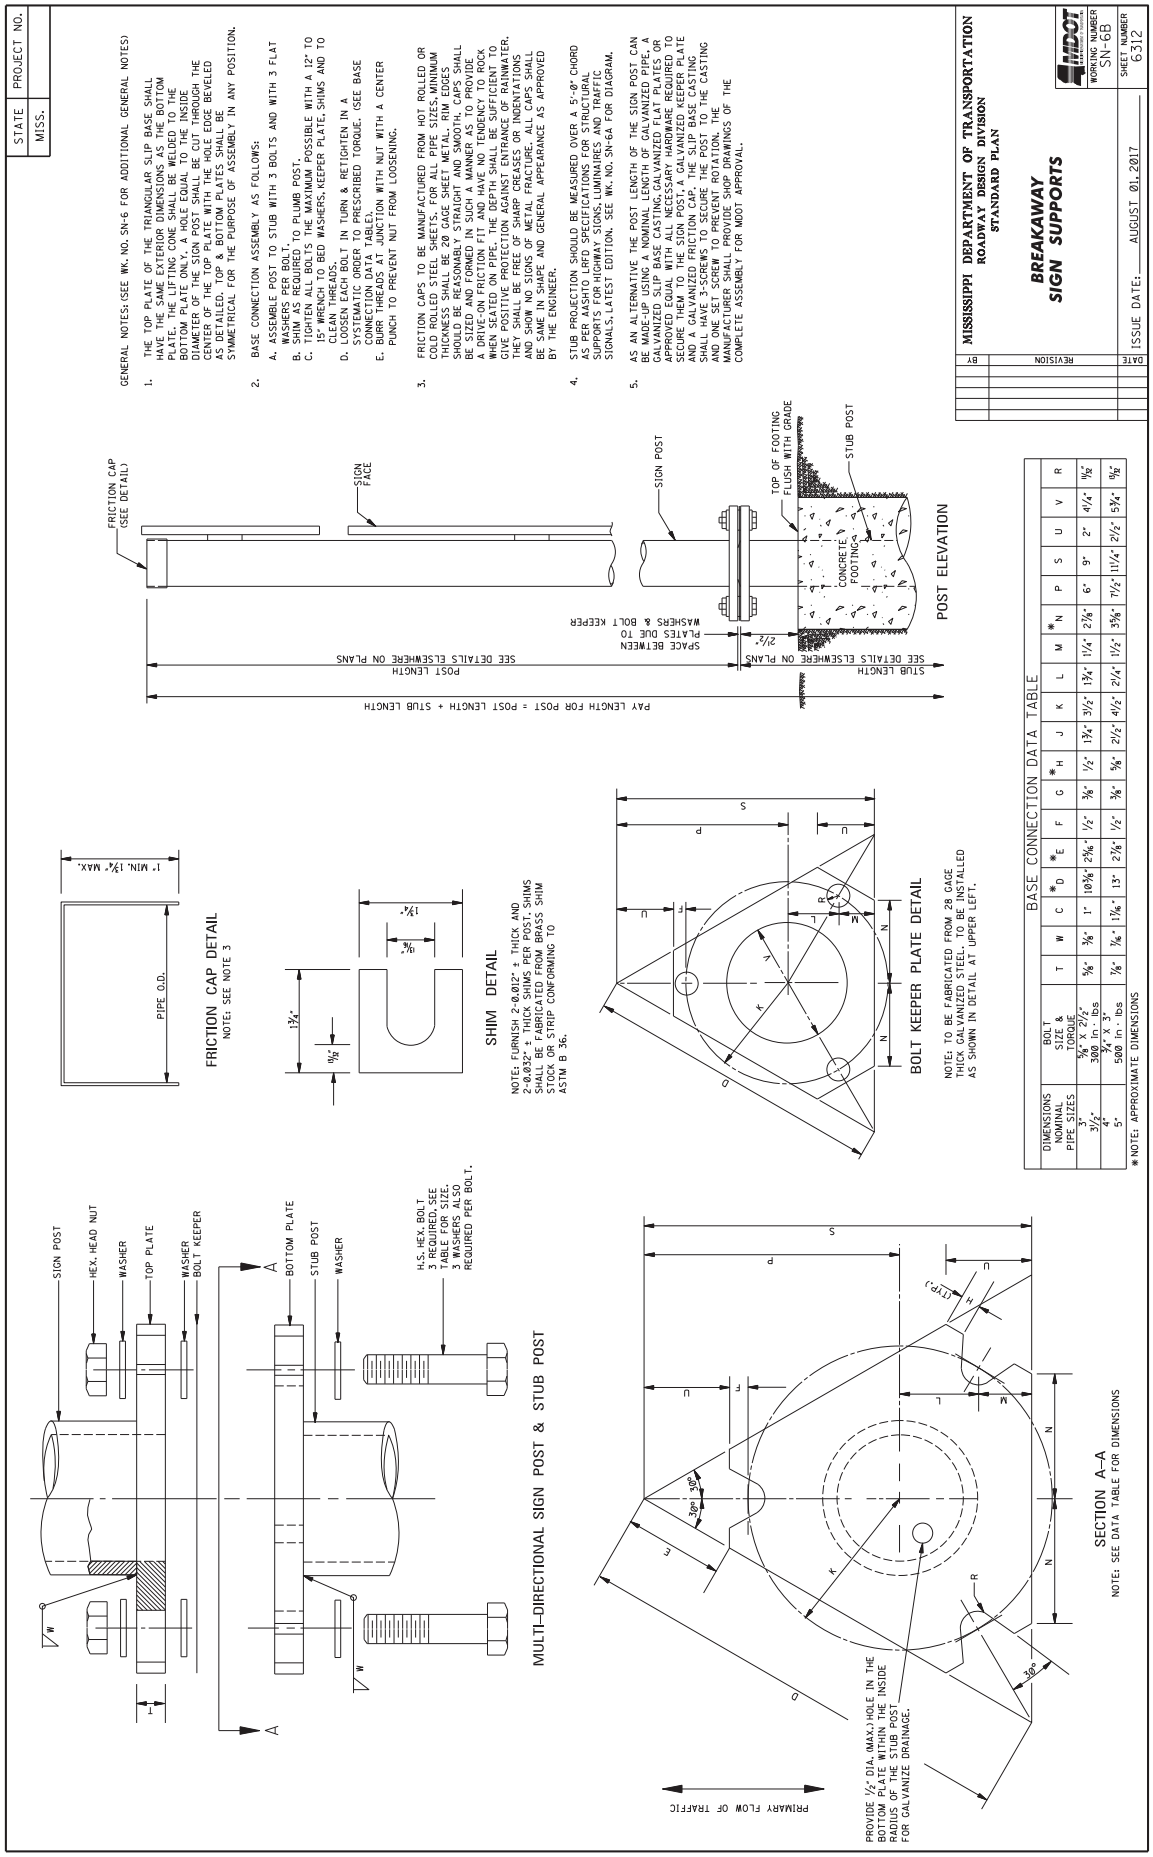
STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
BREAKAWAY SIGN SUPPORTS
WORKING NUMBER SN-6B
SHEET NUMBER 6312
ISSUE DATE: AUGUST 01, 2017
BY REVISION DATE
GENERAL NOTES: (SEE WK. NO. SN-6 FOR ADDITIONAL GENERAL NOTES)
1. THE TOP PLATE OF THE TRIANGULAR SLIP BASE SHALL HAVE THE SAME EXTERIOR DIMENSIONS AS THE BOTTOM PLATE. THE LIFTING CONE SHALL BE WELDED TO THE BOTTOM PLATE ONLY. A HOLE EQUAL TO THE INSIDE DIAMETER OF THE STUB POST SHALL BE CUT THROUGH THE CENTER OF THE TOP PLATE WITH THE HOLE EDGE BEVELED AS DETAILED. TOP & BOTTOM PLATES SHALL BE SYMMETRICAL FOR THE PURPOSE OF ASSEMBLY IN ANY POSITION.
2. BASE CONNECTION ASSEMBLY AS FOLLOWS:
A. ASSEMBLE POST TO STUB WITH 3 BOLTS AND WITH 3 FLAT WASHERS PER BOLT.
B. SHIM AS REQUIRED TO PLUMB POST.
C. TIGHTEN ALL BOLTS THE MAXIMUM POSSIBLE WITH A 12" TO 15" WRENCH TO SEED WASHERS, KEEPER PLATE, SHIMS AND TO CLEAN THREADS.
D. LOOSEN EACH BOLT IN TURN & RETIGHTEN IN A SYSTEMATIC ORDER TO PRESCRIBED TORQUE. (SEE BASE CONNECTION DATA TABLE).
E. BURR THREADS AT JUNCTION WITH NUT WITH A CENTER PUNCH TO PREVENT NUT FROM LOOSENING.
3. FRICTION CAPS TO BE MANUFACTURED FROM HOT ROLLED OR COLD ROLLED STEEL SHEETS FOR A MINIMUM THICKNESS SHALL BE 12GA. SHEET METAL. RIM EDGES SHOULD BE REASONABLY STRAIGHT AND SMOOTH. CAPS SHALL BE SIZED AND FORMED IN SUCH A MANNER AS TO PROVIDE A DRIVE-ON FRICTION FIT AND HAVE NO TENDENCY TO ROCK WHEN SEATED ON PIPE. THE DEPTH SHALL BE SUFFICIENT TO GIVE POSITIVE PROTECTION AGAINST ENTRANCE OF RAINWATER. THEY SHALL BE FREE OF SHARP EDGES OR BURRS. INSTALLATION AND SHOW NO SIGNS OF METAL FRACTURE. ALL CAPS SHALL BE SAME IN SHAPE AND GENERAL APPEARANCE AS APPROVED BY THE ENGINEER.
4. STUB PROJECTION SHOULD BE MEASURED OVER A 5'-0" CHORD AS PER AASHTO LRFD SPECIFICATIONS FOR STRUCTURAL SUPPORTS FOR HIGHWAY SIGNS, LUMINAIRES AND TRAFFIC SIGNALS, LATEST EDITION. SEE WK. NO. SN-6A FOR DIAGRAM.
5. AS AN ALTERNATIVE THE POST LENGTH OF THE SIGN POST CAN BE MADE-UP USING A NOMINAL LENGTH OF GALVANIZED PIPE, A CAST ALUMINUM CAP AND GALVANIZED FLAT PLATES OR APPROVED EQUAL WITH ALL NECESSARY HARDWARE REQUIRED TO SECURE THEM TO THE SIGN POST. A GALVANIZED KEEPER PLATE AND A GALVANIZED FRICTION CAP. THE SLIP BASE CASTING SHALL HAVE 3-SCREWS TO SECURE THE POST TO THE CASTING AND ONE SET SCREW TO PREVENT ROTATION. THE MANUFACTURER SHALL PROVIDE SHOP DRAWINGS OF THE COMPLETE ASSEMBLY FOR MDOT APPROVAL.
FRICTION CAP (SEE DETAIL)
SIGN FACE
SIGN POST
TOP OF FOOTING FLUSH WITH GRADE
STUB POST
CONCRETE FOOTING
SPACE BETWEEN PLATES DUE TO WASHERS & BOLT KEEPER
SEE DETAILS ELSEWHERE ON PLANS
POST LENGTH
STUB LENGTH
PAY LENGTH FOR POST = POST LENGTH + STUB LENGTH
POST ELEVATION
BASE CONNECTION DATA TABLE
DIMENSIONS NOMINAL PIPE SIZES | BOLT SIZE & TORQUE | T | W | C | *D | *E | F | G | *H | J | K | L | M | *N | P | S | U | V | R
3" | 5/8" X 2 1/2" 300 ln lbs | 5/8" | 3/8" | 1" | 10 3/8" | 2 5/8" | 1/2" | 3/8" | 1/2" | 1 3/4" | 3 1/2" | 1 3/4" | 1 1/4" | 2 1/8" | 6" | 9" | 2" | 4 1/4" | 1/2"
3 1/2" | 3/4" X 3" 500 ln lbs | 7/8" | 1/2" | 1 1/8" | 13" | 2 7/8" | 1/2" | 3/8" | 5/8" | 2 1/2" | 4 1/2" | 2 1/4" | 1 1/2" | 3 5/8" | 7 1/2" | 11 1/4" | 2 1/2" | 5 3/4" | 5/8"
4" | | | | | | | | | | | | | | | | | | | | |
5" | | | | | | | | | | | | | | | | | | | | |
*NOTE: APPROXIMATE DIMENSIONS
FRICTION CAP DETAIL
NOTE: SEE NOTE 3
1" MIN. 1 3/4" MAX.
PIPE O.D.
SHIM DETAIL
NOTE: FURNISH 2-0.012" ± THICK AND 2-0.032" ± THICK SHIMS PER POST. SHIMS SHALL BE FABRICATED FROM BRASS SHIM STOCK OR STRIP CONFORMING TO ASTM B 36.
1 3/4"
3/8"
7/8"
BOLT KEEPER PLATE DETAIL
NOTE: TO BE FABRICATED FROM 28 GAGE THICK GALVANIZED STEEL. TO BE INSTALLED AS SHOWN IN DETAIL AT UPPER LEFT.
MULTI-DIRECTIONAL SIGN POST & STUB POST
SIGN POST
HEX. HEAD NUT
WASHER
TOP PLATE
WASHER
BOLT KEEPER
BOTTOM PLATE
STUB POST
WASHER
H.S. HEX. BOLT 3 REQUIRED SEE TABLE FOR SIZE. 3 WASHERS ALSO REQUIRED PER BOLT.
SECTION A-A
NOTE: SEE DATA TABLE FOR DIMENSIONS
PROVIDE 1/2" DIA. (MAX.) HOLE IN THE BOTTOM PLATE WITHIN THE RADIUS OF THE STUB POST FOR GALVANIZE DRAINAGE.
PRIMARY FLOW OF TRAFFIC

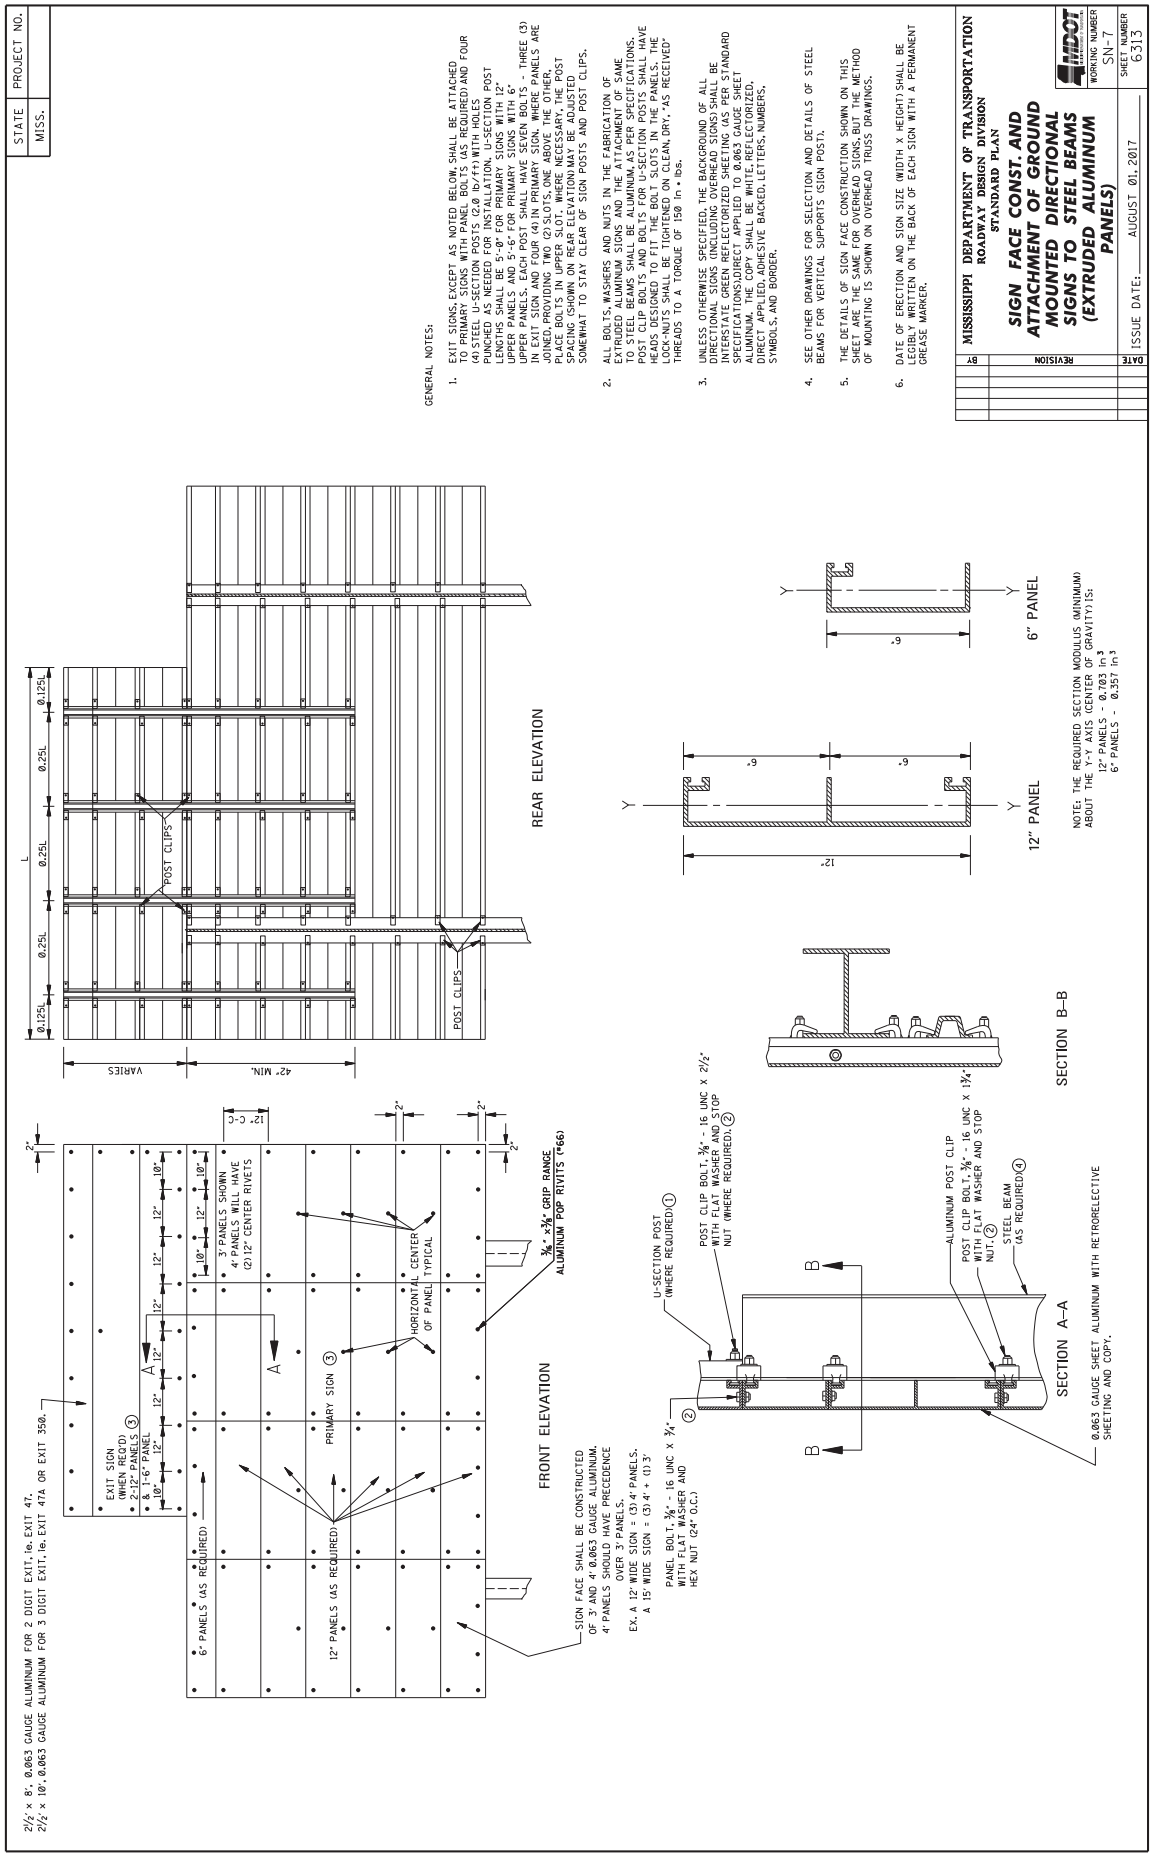

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
SIGN FACE CONST. AND ATTACHMENT OF GROUND MOUNTED DIRECTIONAL SIGNS TO STEEL BEAMS (EXTRUDED ALUMINUM PANELS)
WORKING NUMBER SN-7
SHEET NUMBER 6313
ISSUE DATE: AUGUST 01, 2017
REVISION
BY
DATE
GENERAL NOTES:
1. EXIT SIGNS, EXCEPT AS NOTED BELOW, SHALL BE ATTACHED TO PRIMARY SIGNS WITH PANEL BOLTS (AS REQUIRED) AND FOUR (4) CLIPS AS SHOWN ON SHEET 2 OF 4. SLOTS SHALL BE PUNCHED AS NEEDED FOR INSTALLATION U-SECTION POST LENGTHS SHALL BE 5'-0" FOR PRIMARY SIGNS WITH 12" UPPER PANELS AND 5'-6" FOR PRIMARY SIGNS WITH 6" UPPER PANELS. EACH POST SHALL HAVE SEVEN BOLTS - THREE (3) IN EXIT SIGN AND FOUR (4) IN PRIMARY SIGN, WHERE PANELS ARE JOINED, PROVIDING TWO (2) SLOTS, ONE ABOVE THE OTHER. PLACE POST CLIPS AS SHOWN ON REAR ELEVATION, WHERE NECESSARY. POST SPACING SHOWN ON REAR ELEVATION MAY BE ADJUSTED SOMEWHAT TO STAY CLEAR OF SIGN POSTS AND POST CLIPS.
2. ALL BOLTS, WASHERS AND NUTS IN THE FABRICATION OF EXTRUDED ALUMINUM SIGNS AND THE ATTACHMENT OF SAME TO STEEL BEAMS SHALL BE ALUMINUM, AS PER SPECIFICATIONS. POST CLIP BOLTS AND NUTS FOR U-SECTION POSTS SHALL HAVE HEADS DESIGNED TO FIT THE BOLT SLOTS IN THE PANELS. THE LOCK-NUTS SHALL BE TIGHTENED ON CLEAN, DRY, "AS RECEIVED" THREADS TO A TORQUE OF 150 in.* lbs.
3. UNLESS OTHERWISE SPECIFIED, THE BACKGROUND OF ALL INTERSTATE GREEN REFLECTORIZED SHEETING SHALL BE AS PER STANDARD SPECIFICATIONS; DIRECT APPLIED TO 0.063 GAUGE SHEET ALUMINUM. THE COPY SHALL BE WHITE, REFLECTORIZED, DIRECT APPLIED, ADHESIVE BACKED, LETTERS, NUMBERS, SYMBOLS, AND BORDER.
4. SEE OTHER DRAWINGS FOR SELECTION AND DETAILS OF STEEL BEAMS FOR VERTICAL SUPPORTS (SIGN POST).
5. THE DETAILS OF SIGN FACE CONSTRUCTION SHOWN ON THIS SHEET ARE THE SAME FOR OVERHEAD SIGNS, BUT THE METHOD OF MOUNTING IS SHOWN ON OVERHEAD TRUSS DRAWINGS.
6. DATE OF ERECTION AND SIGN SIZE (WIDTH X HEIGHT) SHALL BE LEGIBLY WRITTEN ON THE BACK OF EACH SIGN WITH A PERMANENT GREASE MARKER.
2½ x 8', 0.063 GAUGE ALUMINUM FOR 2 DIGIT EXIT, ie. EXIT 47.
2½ x 10', 0.063 GAUGE ALUMINUM FOR 3 DIGIT EXIT, ie. EXIT 47A OR EXIT 350.
EXIT SIGN (WHEN REQ'D)
2-12" PANELS (3)
& 1-6" PANEL
6" PANELS (AS REQUIRED)
12" PANELS (AS REQUIRED)
3" PANELS SHOWN
4" PANELS WILL HAVE
(2) 12" CENTER RIVETS
PRIMARY SIGN (3)
HORIZONTAL CENTER OF PANEL TYPICAL
3/16" - 3/8" GRIP RANGE ALUMINUM POP RIVITS (*66)
SIGN FACE SHALL BE CONSTRUCTED OF 3' AND 4' 0.063 GAUGE ALUMINUM. 4' PANELS SHOULD HAVE PRECEDENCE OVER 3' PANELS.
EX. A 12' WIDE SIGN = (3) 4' PANELS.
A 15' WIDE SIGN = (3) 4' + (1) 3'
PANEL BOLT, 3/8" - 16 UNC X 3/4" WITH FLAT WASHER AND HEX NUT (24" O.C.)
FRONT ELEVATION
VARIES
42" MIN.
POST CLIPS
REAR ELEVATION
U-SECTION POST (WHERE REQUIRED) (1)
POST CLIP BOLT, 3/8" - 16 UNC X 2½" WITH FLAT WASHER AND STOP NUT (WHERE REQUIRED) (2)
ALUMINUM POST CLIP
POST CLIP BOLT, 3/8" - 16 UNC X 1¾" WITH FLAT WASHER AND STOP NUT (2)
STEEL BEAM (AS REQUIRED) (4)
0.063 GAUGE SHEET ALUMINUM WITH RETROREFLECTIVE SHEETING AND COPY.
SECTION A–A
SECTION B–B
12" PANEL
6" PANEL
NOTE: THE REQUIRED SECTION MODULUS (MINIMUM) ABOUT THE Y-Y AXIS (CENTER OF GRAVITY) IS:
12" PANELS - 0.703 in³
6" PANELS - 0.357 in³

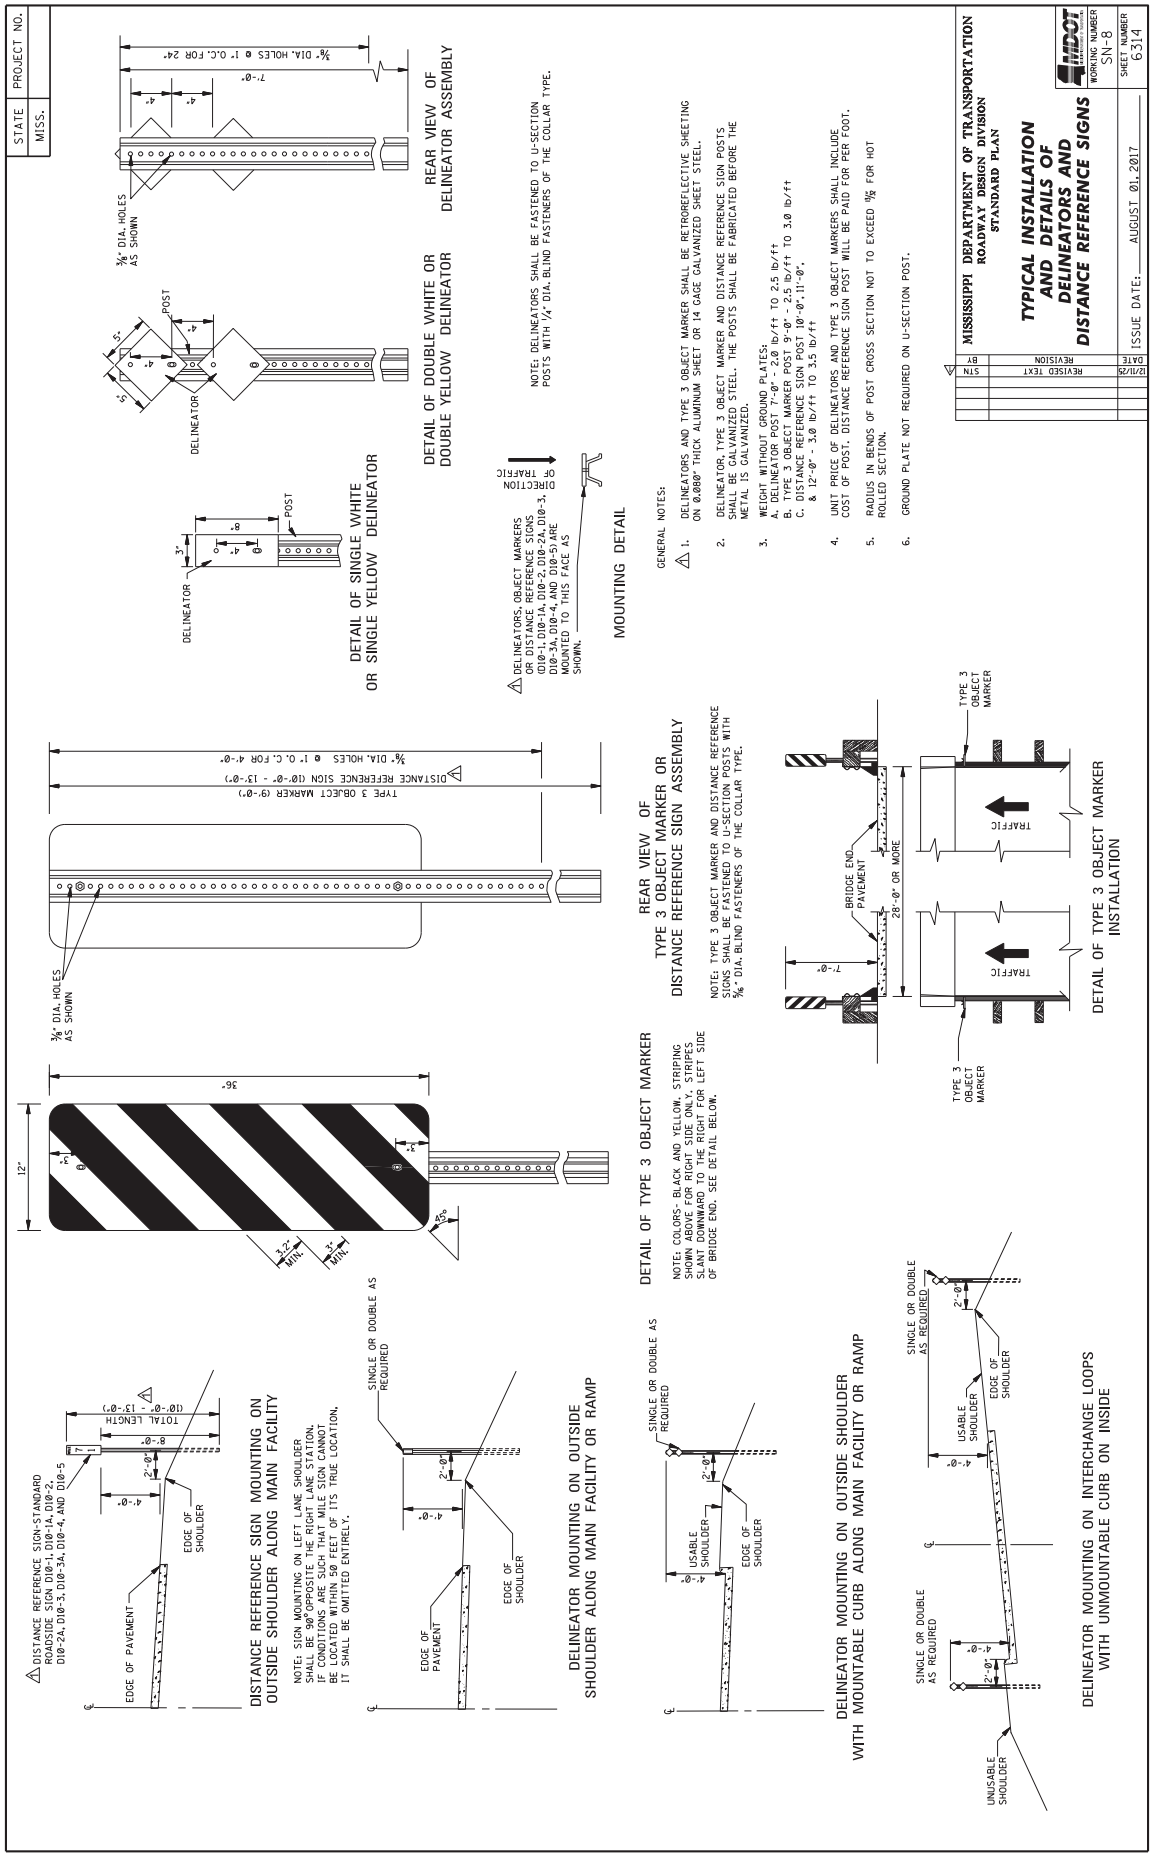

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
TYPICAL INSTALLATION AND DETAILS OF DELINEATORS AND DISTANCE REFERENCE SIGNS
WORKING NUMBER SN-8
SHEET NUMBER 6314
ISSUE DATE: AUGUST 01, 2017
REVISION DATE BY STN
REVISED TEXT 12/1/25
GENERAL NOTES:
1. DELINEATORS AND TYPE 3 OBJECT MARKER SHALL BE RETROREFLECTIVE SHEETING ON 0.080" THICK ALUMINUM SHEET OR 14 GAGE GALVANIZED SHEET STEEL.
2. DELINEATOR, TYPE 3 OBJECT MARKER AND DISTANCE REFERENCE SIGN POSTS SHALL BE GALVANIZED STEEL. THE POSTS SHALL BE FABRICATED BEFORE THE METAL IS GALVANIZED.
3. WEIGHT WITHOUT GROUND PLATES:
A. DELINEATOR POST 7'-0" - 2.0 lb/ft TO 2.5 lb/ft
B. TYPE 3 OBJECT MARKER POST 9'-0" - 2.5 lb/ft TO 3.0 lb/ft
C. DISTANCE REFERENCE SIGN POST 10'-0",11'-0", & 12'-0" - 3.0 lb/ft TO 3.5 lb/ft
4. UNIT PRICE OF DELINEATORS AND TYPE 3 OBJECT MARKERS SHALL INCLUDE COST OF POST. DISTANCE REFERENCE SIGN POST WILL BE PAID FOR PER FOOT.
5. RADIUS IN BENDS OF POST CROSS SECTION NOT TO EXCEED 5/8 FOR HOT ROLLED SECTION.
6. GROUND PLATE NOT REQUIRED ON U-SECTION POST.
NOTE: DELINEATORS SHALL BE FASTENED TO U-SECTION POSTS WITH 1/4" DIA. BLIND FASTENERS OF THE COLLAR TYPE.
REAR VIEW OF DELINEATOR ASSEMBLY
DETAIL OF DOUBLE WHITE OR DOUBLE YELLOW DELINEATOR
DETAIL OF SINGLE WHITE OR SINGLE YELLOW DELINEATOR
MOUNTING DETAIL
DELINEATORS, OBJECT MARKERS OR DISTANCE REFERENCE SIGNS (D10-1, D10-1A, D10-2, D10-2A, D10-3, D10-3A, D10-4, AND D10-5) ARE MOUNTED TO THIS FACE AS SHOWN.
DIRECTION OF TRAFFIC
DELINEATOR
POST
3/4" DIA. HOLES AS SHOWN
3/4" DIA. HOLES @ 1'-0" O.C. FOR 24'
7'-0"
TYPE 3 OBJECT MARKER (9'-0")
DISTANCE REFERENCE SIGN (10'-0" - 13'-0")
3/4" DIA. HOLES @ 1'-0" O.C. FOR 4'-0"
REAR VIEW OF TYPE 3 OBJECT MARKER OR DISTANCE REFERENCE SIGN ASSEMBLY
NOTE: TYPE 3 OBJECT MARKER AND DISTANCE REFERENCE SIGNS SHALL BE FASTENED TO U-SECTION POSTS WITH 3/4" DIA. BLIND FASTENERS OF THE COLLAR TYPE.
BRIDGE END
PAVEMENT
28'-0" OR MORE
TRAFFIC
TYPE 3 OBJECT MARKER
DETAIL OF TYPE 3 OBJECT MARKER INSTALLATION
DETAIL OF TYPE 3 OBJECT MARKER
NOTE: COLORS- BLACK AND YELLOW. STRIPING SHOWN ABOVE FOR RIGHT SIDE ONLY. STRIPES SLANT DOWNWARD TO THE RIGHT FOR LEFT SIDE OF BRIDGE END. SEE DETAIL BELOW.
12"
36"
3/8" DIA. HOLES AS SHOWN
3'-2" MIN.
3" MIN.
45°
DISTANCE REFERENCE SIGN-STANDARD ROADSIDE SIGN D10-1, D10-1A, D10-2, D10-2A, D10-3, D10-3A, D10-4, AND D10-5
TOTAL LENGTH (10'-0" - 13'-0")
8'-0"
2'-0"
4'-0"
EDGE OF PAVEMENT
EDGE OF SHOULDER
DISTANCE REFERENCE SIGN MOUNTING ON OUTSIDE SHOULDER ALONG MAIN FACILITY
NOTE: SIGN MOUNTING ON LEFT LANE SHOULDER SHALL BE 500' OPPOSITE THE RIGHT LANE STATION. CONDITIONS ARE SUCH THAT MILE SIGN CANNOT BE LOCATED WITHIN 500 FEET OF ITS TRUE LOCATION, IT SHALL BE OMITTED ENTIRELY.
SINGLE OR DOUBLE AS REQUIRED
DELINEATOR MOUNTING ON OUTSIDE SHOULDER ALONG MAIN FACILITY OR RAMP
USABLE SHOULDER
DELINEATOR MOUNTING ON OUTSIDE SHOULDER WITH MOUNTABLE CURB ALONG MAIN FACILITY OR RAMP
UNUSABLE SHOULDER
DELINEATOR MOUNTING ON INTERCHANGE LOOPS WITH UNMOUNTABLE CURB ON INSIDE

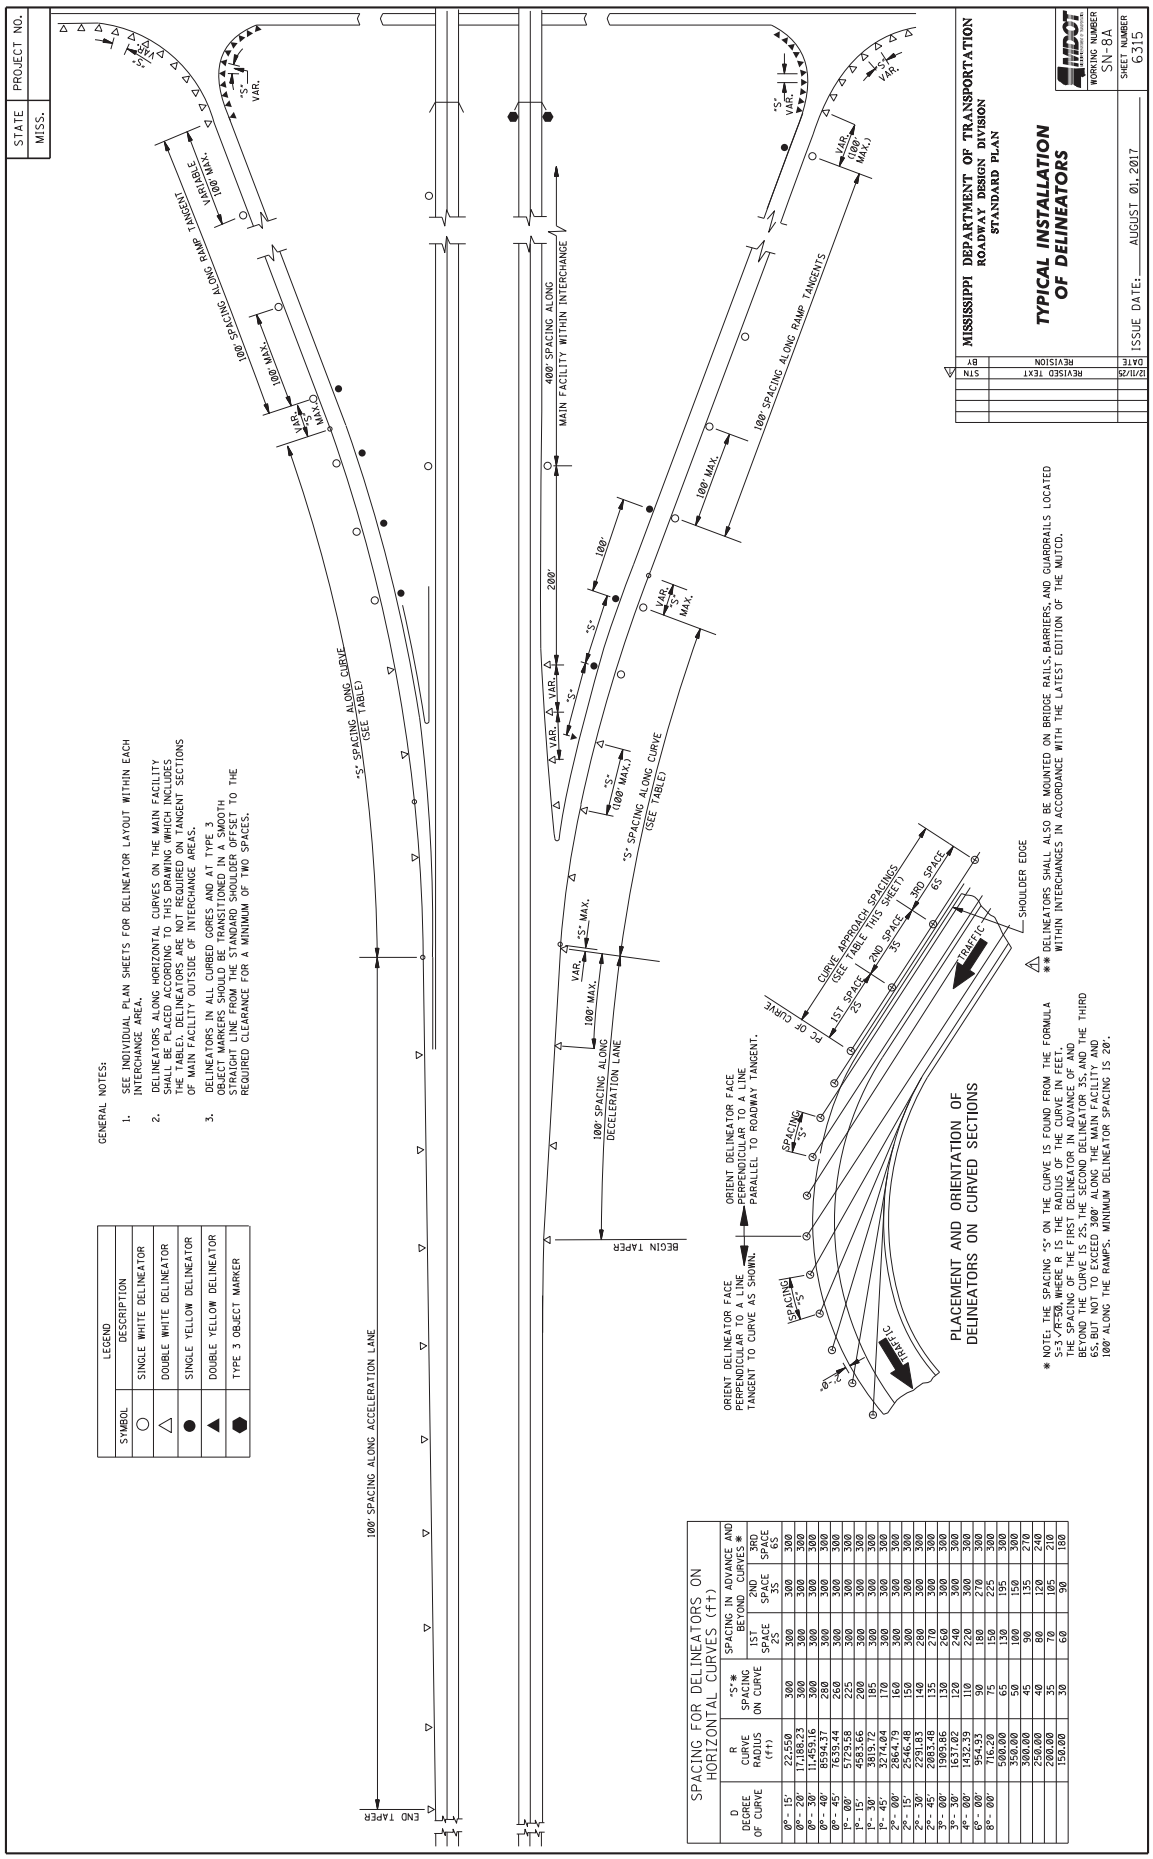


SPACING FOR DELINEATORS ON HORIZONTAL CURVES (ft)

D DEGREE OF CURVE	R CURVE RADIUS (ft)	"S"* SPACING ON CURVE	SPACING IN ADVANCE AND BEYOND CURVES * 1ST SPACE 2S	2ND SPACE 3S	3RD SPACE 6S
0° - 15'	22,550	300	300	300	300
0° - 20'	17,188.23	300	300	300	300
0° - 30'	11,459.16	300	300	300	300
0° - 40'	8,594.37	290	300	300	300
0° - 45'	7639.44	260	300	300	300
1° - 00'	5729.58	225	300	300	300
1° - 15'	4583.66	200	300	300	300
1° - 30'	3819.72	185	300	300	300
1° - 45'	3274.04	170	300	300	300
2° - 00'	2864.79	160	300	300	300
2° - 15'	2546.48	150	300	300	300
2° - 30'	2291.83	140	280	300	300
2° - 45'	2083.48	135	270	300	300
3° - 00'	1909.86	130	260	300	300
3° - 30'	1637.02	120	240	300	300
4° - 00'	1432.39	110	220	300	300
4° - 00'	1432.39	150	150	270	300
8° - 00'	716.20	75	150	225	300
	500.00	65	130	195	300
	350.00	50	100	150	300
	300.00	45	90	135	270
	250.00	40	80	120	240
	200.00	35	70	105	210
	150.00	30	60	90	180

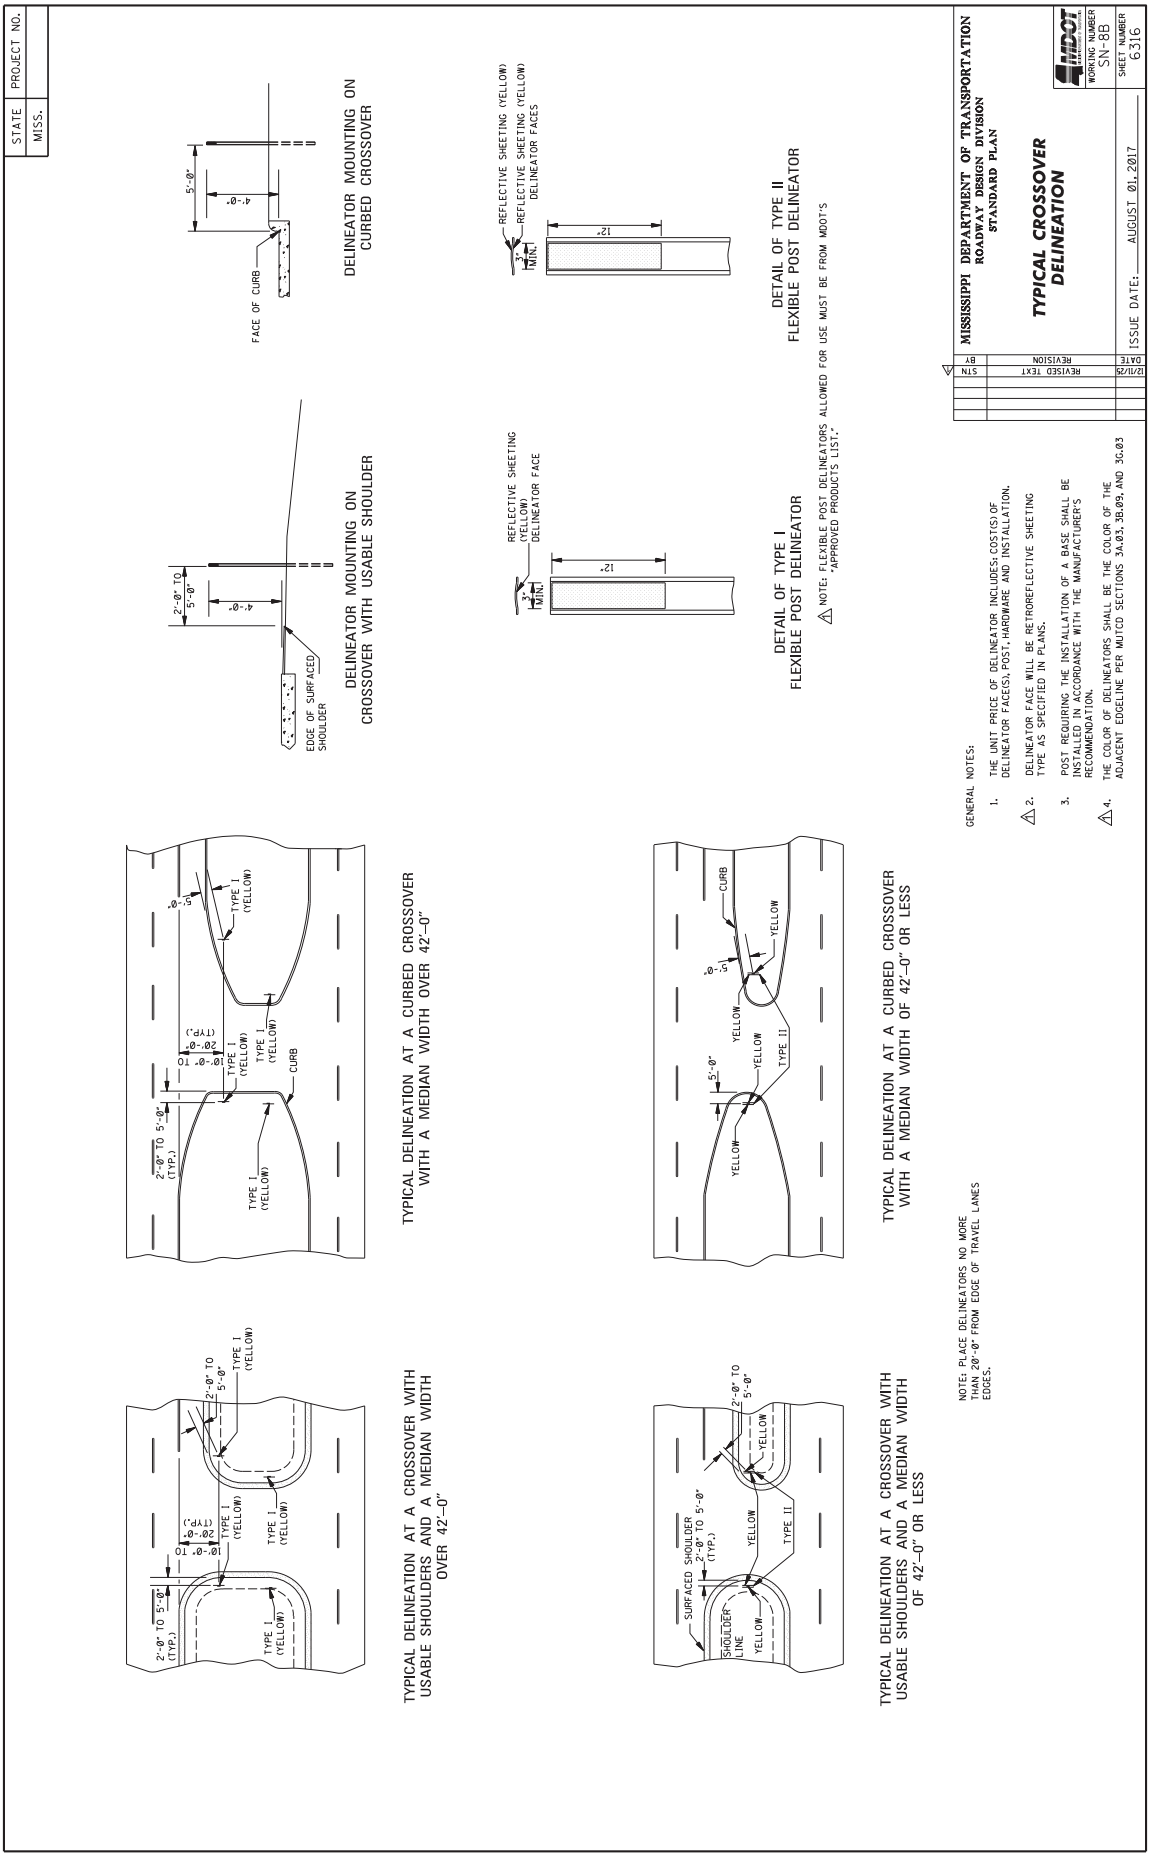
STATE MISS.
PROJECT NO.
DELINEATOR MOUNTING ON CURBED CROSSOVER
FACE OF CURB
5'-0"
4'-0"
DELINEATOR MOUNTING ON CROSSOVER WITH USABLE SHOULDER
EDGE OF SURFACED SHOULDER
2'-0" TO 5'-0"
4'-0"
DETAIL OF TYPE II FLEXIBLE POST DELINEATOR
REFLECTIVE SHEETING (YELLOW)
REFLECTIVE SHEETING (YELLOW) DELINEATOR FACES
3" MIN.
12"
DETAIL OF TYPE I FLEXIBLE POST DELINEATOR
REFLECTIVE SHEETING (YELLOW) DELINEATOR FACE
3" MIN.
12"
NOTE: FLEXIBLE POST DELINEATORS ALLOWED FOR USE MUST BE FROM MDOT'S "APPROVED PRODUCTS LIST."
TYPICAL DELINEATION AT A CURBED CROSSOVER WITH A MEDIAN WIDTH OVER 42'-0"
2'-0" TO 5'-0" (TYP.)
TYPE I (YELLOW)
TYPE I (YELLOW)
TYPE I (YELLOW)
TYPE I (YELLOW)
CURB
TYPICAL DELINEATION AT A CURBED CROSSOVER WITH A MEDIAN WIDTH OF 42'-0" OR LESS
CURB
YELLOW
YELLOW
YELLOW
YELLOW
TYPE II
5'-0"
TYPICAL DELINEATION AT A CROSSOVER WITH USABLE SHOULDERS AND A MEDIAN WIDTH OVER 42'-0"
2'-0" TO 5'-0" (TYP.)
TYPE I (YELLOW)
TYPE I (YELLOW)
TYPE I (YELLOW)
TYPE I (YELLOW)
TYPICAL DELINEATION AT A CROSSOVER WITH USABLE SHOULDERS AND A MEDIAN WIDTH OF 42'-0" OR LESS
SURFACED SHOULDER 2'-0" TO 5'-0" (TYP.)
SHOULDER LINE
YELLOW
YELLOW
TYPE II
2'-0" TO 5'-0"
NOTE: PLACE DELINEATORS NO MORE THAN 20'-0" FROM EDGE OF TRAVEL LANES EDGES.
GENERAL NOTES:
1. THE UNIT PRICE OF DELINEATOR INCLUDES: COST(S) OF DELINEATOR FACES(S), POST, HARDWARE AND INSTALLATION.
2. DELINEATOR FACE WILL BE RETROREFLECTIVE SHEETING TYPE AS SPECIFIED IN PLANS.
3. POST REQUIRING THE INSTALLATION OF A BASE SHALL BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATION.
4. THE COLOR OF DELINEATORS SHALL BE THE COLOR OF THE ADJACENT EDGELINE PER MUTCD SECTIONS 3A.03, 3B.09, AND 3G.03
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
TYPICAL CROSSOVER DELINEATION
WORKING NUMBER SN-88
SHEET NUMBER 6316
ISSUE DATE: AUGUST 01, 2017
DATE BY REVISION
12/11/23 STN REVISED TEXT

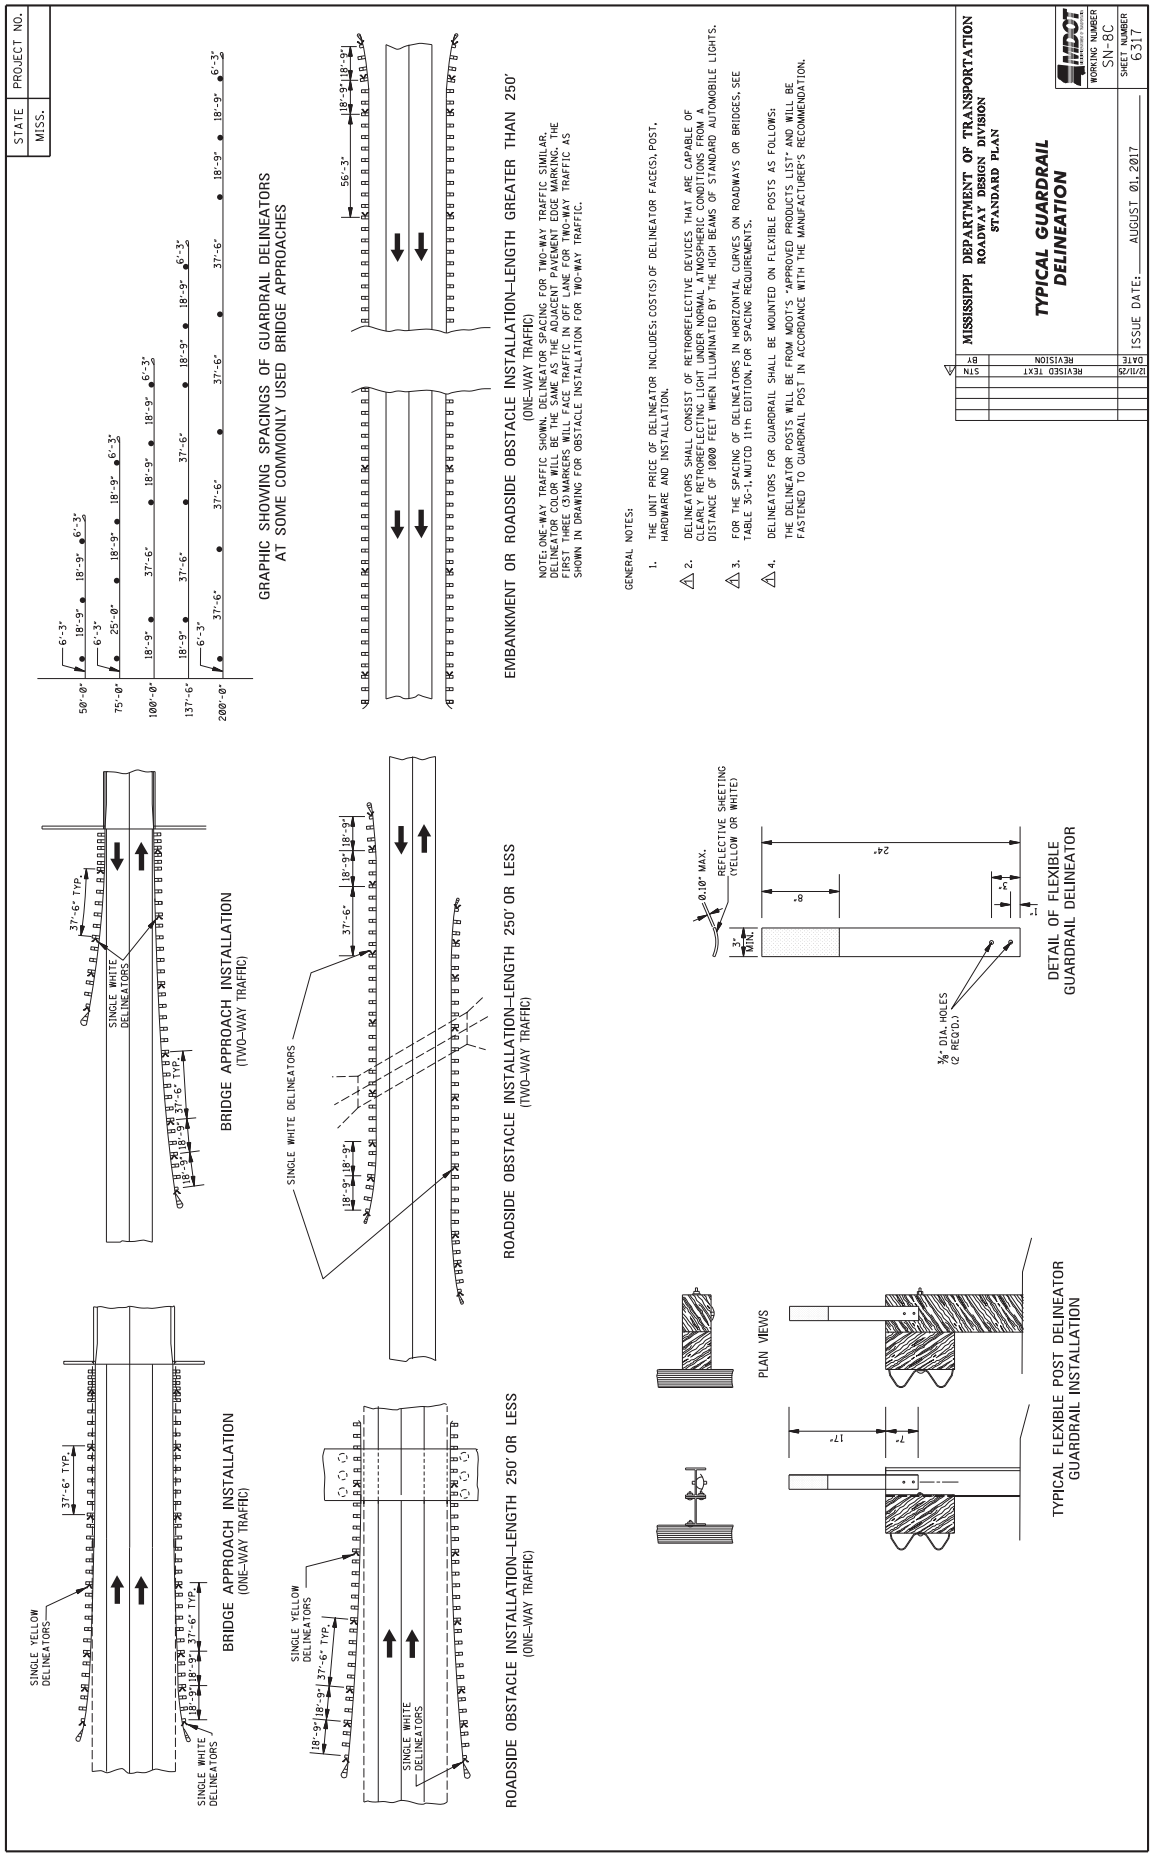
STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
TYPICAL GUARDRAIL DELINEATION
WORKING NUMBER SN-8C
SHEET NUMBER 6517
ISSUE DATE: AUGUST 01, 2017
DATE REVISION BY STN
12/11/25 REVISED TEXT STN
GENERAL NOTES:
1. THE UNIT PRICE OF DELINEATOR INCLUDES: COST(S) OF DELINEATOR FACE(S), POST, HARDWARE AND INSTALLATION.
2. DELINEATORS SHALL CONSIST OF RETROREFLECTIVE DEVICES THAT ARE CAPABLE OF CLEARLY RETROREFLECTING LIGHT UNDER NORMAL ATMOSPHERIC CONDITIONS FROM A DISTANCE OF 1000 FEET WHEN ILLUMINATED BY THE HIGH BEAMS OF STANDARD AUTOMOBILE LIGHTS.
3. FOR THE SPACING OF DELINEATORS IN HORIZONTAL CURVES ON ROADWAYS OR BRIDGES, SEE TABLE 3G-1, MUTCD 11th EDITION, FOR SPACING REQUIREMENTS.
4. DELINEATORS FOR GUARDRAIL SHALL BE MOUNTED ON FLEXIBLE POSTS AS FOLLOWS: THE DELINEATOR POSTS WILL BE FROM MDOT'S "APPROVED PRODUCTS LIST" AND WILL BE FASTENED TO GUARDRAIL POST IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATION.
GRAPHIC SHOWING SPACINGS OF GUARDRAIL DELINEATORS AT SOME COMMONLY USED BRIDGE APPROACHES
50'-0" 6'-3" 18'-9" 18'-9" 6'-3"
75'-0" 6'-3" 25'-0" 18'-9" 18'-9" 6'-3"
100'-0" 18'-9" 37'-6" 18'-9" 18'-9" 6'-3"
137'-6" 18'-9" 37'-6" 37'-6" 18'-9" 18'-9" 6'-3"
200'-0" 6'-3" 37'-6" 37'-6" 37'-6" 37'-6" 18'-9" 18'-9" 6'-3"
EMBANKMENT OR ROADSIDE OBSTACLE INSTALLATION–LENGTH GREATER THAN 250'
(ONE–WAY TRAFFIC)
NOTE: ONE-WAY TRAFFIC SHOWN. DELINEATOR SPACING FOR TWO-WAY TRAFFIC SIMILAR. DELINEATOR COLOR WILL BE THE SAME AS THE ADJACENT PAVEMENT EDGE MARKING. THE FIRST THREE (3) MARKERS WILL FACE TRAFFIC IN OFF LANE FOR TWO-WAY TRAFFIC AS SHOWN IN DRAWING FOR OBSTACLE INSTALLATION FOR TWO-WAY TRAFFIC.
56'-3" 18'-9" 18'-9"
BRIDGE APPROACH INSTALLATION
(TWO–WAY TRAFFIC)
SINGLE WHITE DELINEATORS
37'-6" TYP.
BRIDGE APPROACH INSTALLATION
(ONE–WAY TRAFFIC)
SINGLE YELLOW DELINEATORS
SINGLE WHITE DELINEATORS
37'-6" TYP.
18'-9"
ROADSIDE OBSTACLE INSTALLATION–LENGTH 250' OR LESS
(TWO–WAY TRAFFIC)
SINGLE WHITE DELINEATORS
ROADSIDE OBSTACLE INSTALLATION–LENGTH 250' OR LESS
(ONE–WAY TRAFFIC)
SINGLE YELLOW DELINEATORS
SINGLE WHITE DELINEATORS
18'-9" 37'-6" TYP.
0.10" MAX.
REFLECTIVE SHEETING (YELLOW OR WHITE)
3" MIN.
8"
24"
3/8" DIA. HOLES (2 REQ'D.)
DETAIL OF FLEXIBLE GUARDRAIL DELINEATOR
PLAN VIEWS
17"
7"
TYPICAL FLEXIBLE POST DELINEATOR GUARDRAIL INSTALLATION

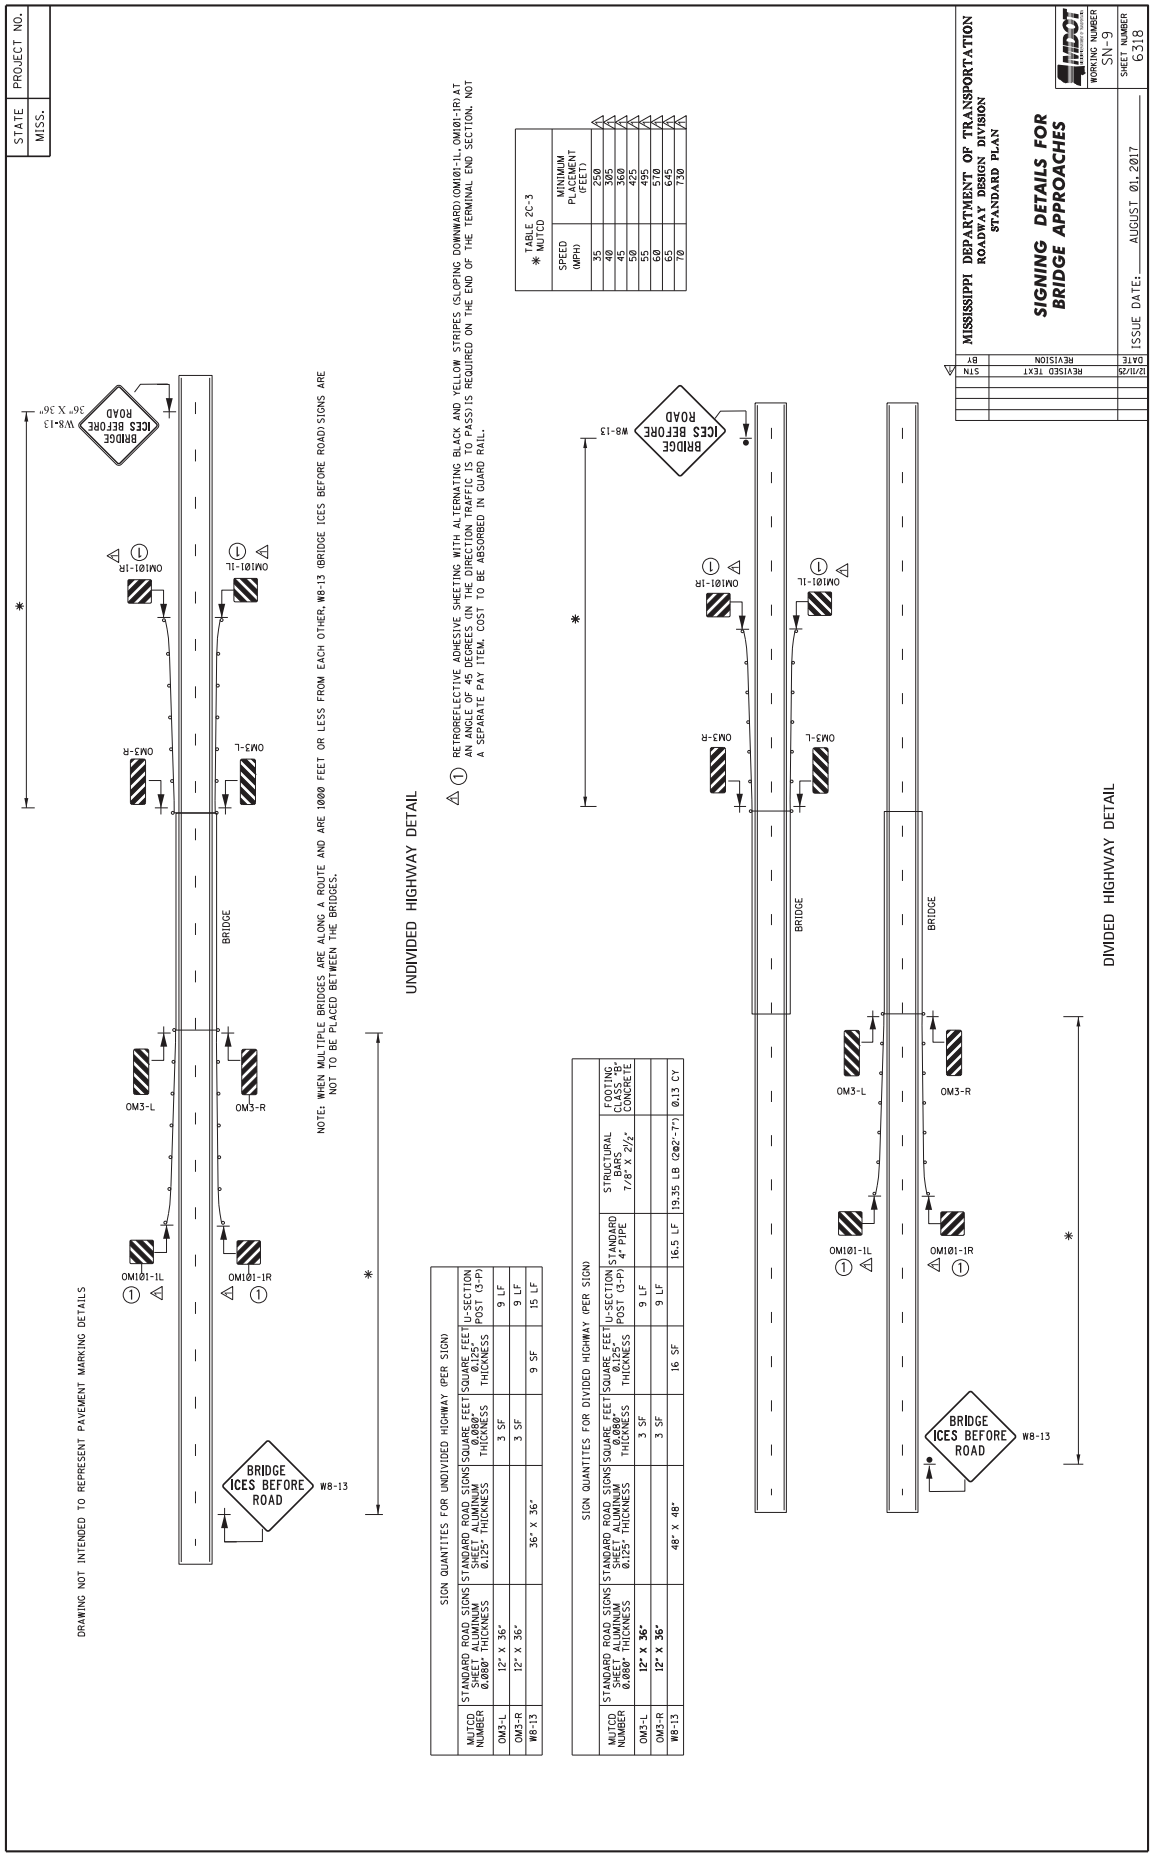
STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
SIGNING DETAILS FOR BRIDGE APPROACHES
WORKING NUMBER SN-9
SHEET NUMBER 6318
ISSUE DATE: AUGUST 01, 2017
DATE REVISION BY
12/11/25 REVISED TEXT STN
DRAWING NOT INTENDED TO REPRESENT PAVEMENT MARKING DETAILS
NOTE: WHEN MULTIPLE BRIDGES ARE ALONG A ROUTE AND ARE 1000 FEET OR LESS FROM EACH OTHER, W8-13 (BRIDGE ICES BEFORE ROAD) SIGNS ARE NOT TO BE PLACED BETWEEN THE BRIDGES.
UNDIVIDED HIGHWAY DETAIL
DIVIDED HIGHWAY DETAIL
BRIDGE
OM3-L
OM3-R
OM1Ø1-1L
OM1Ø1-1R
W8-13
36" X 36"
BRIDGE ICES BEFORE ROAD
* MUTCD TABLE 2C-3
SPEED (MPH) MINIMUM PLACEMENT (FEET)
35 250
40 305
45 360
50 425
55 495
60 570
65 645
70 730
SIGN QUANTITIES FOR UNDIVIDED HIGHWAY (PER SIGN)
MUTCD NUMBER
STANDARD ROAD SIGNS SHEET ALUMINUM 0.080" THICKNESS
STANDARD ROAD SIGNS SHEET ALUMINUM 0.125" THICKNESS
SQUARE FEET POST 0.080" THICKNESS
SQUARE FEET POST 0.125" THICKNESS
U-SECTION POST (3-P)
OM3-L 12" X 36" 3 SF 9 LF
OM3-R 12" X 36" 3 SF 9 LF
W8-13 36" X 36" 9 SF 15 LF
SIGN QUANTITIES FOR DIVIDED HIGHWAY (PER SIGN)
MUTCD NUMBER
STANDARD ROAD SIGNS SHEET ALUMINUM 0.080" THICKNESS
STANDARD ROAD SIGNS SHEET ALUMINUM 0.125" THICKNESS
SQUARE FEET POST 0.080" THICKNESS
SQUARE FEET POST 0.125" THICKNESS
U-SECTION POST (3-P)
STANDARD 4" PIPE
STRUCTURAL BARS 7/8" X 2½"
FOOTING CLASS "B" CONCRETE
OM3-L 12" X 36" 3 SF 9 LF
OM3-R 12" X 36" 3 SF 9 LF
W8-13 48" X 48" 16 SF 16.5 LF 19.35 LB (2@2'-7") 0.13 CY
1 RETROREFLECTIVE ADHESIVE SHEETING WITH ALTERNATING BLACK AND YELLOW STRIPES (SLOPING DOWNWARD) (OM101-1L, OM101-1R) AT AN ANGLE OF 45 DEGREES (IN THE DIRECTION TRAFFIC IS TO PASS) IS REQUIRED ON THE END OF THE TERMINAL END SECTION. NOT A SEPARATE PAY ITEM. COST TO BE ABSORBED IN GUARD RAIL.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 – NOTICE TO BIDDERS NO. 7624 **CODE: (SP)**


DATE: 01/20/2026


SUBJECT: Standard Drawings


Standard Drawings attached hereto shall govern appropriate items of required work.


Larger copies of Standard Drawings may be purchased from:


MDOT Plans Print Shop
MDOT Shop Complex, Building C, Room 114
2567 North West Street
P.O. Box 1850
Jackson, MS 39215-1850
Telephone: (601) 359-7460
or FAX: (601) 359-7461
or e-mail: plans@mdot.state.ms.us

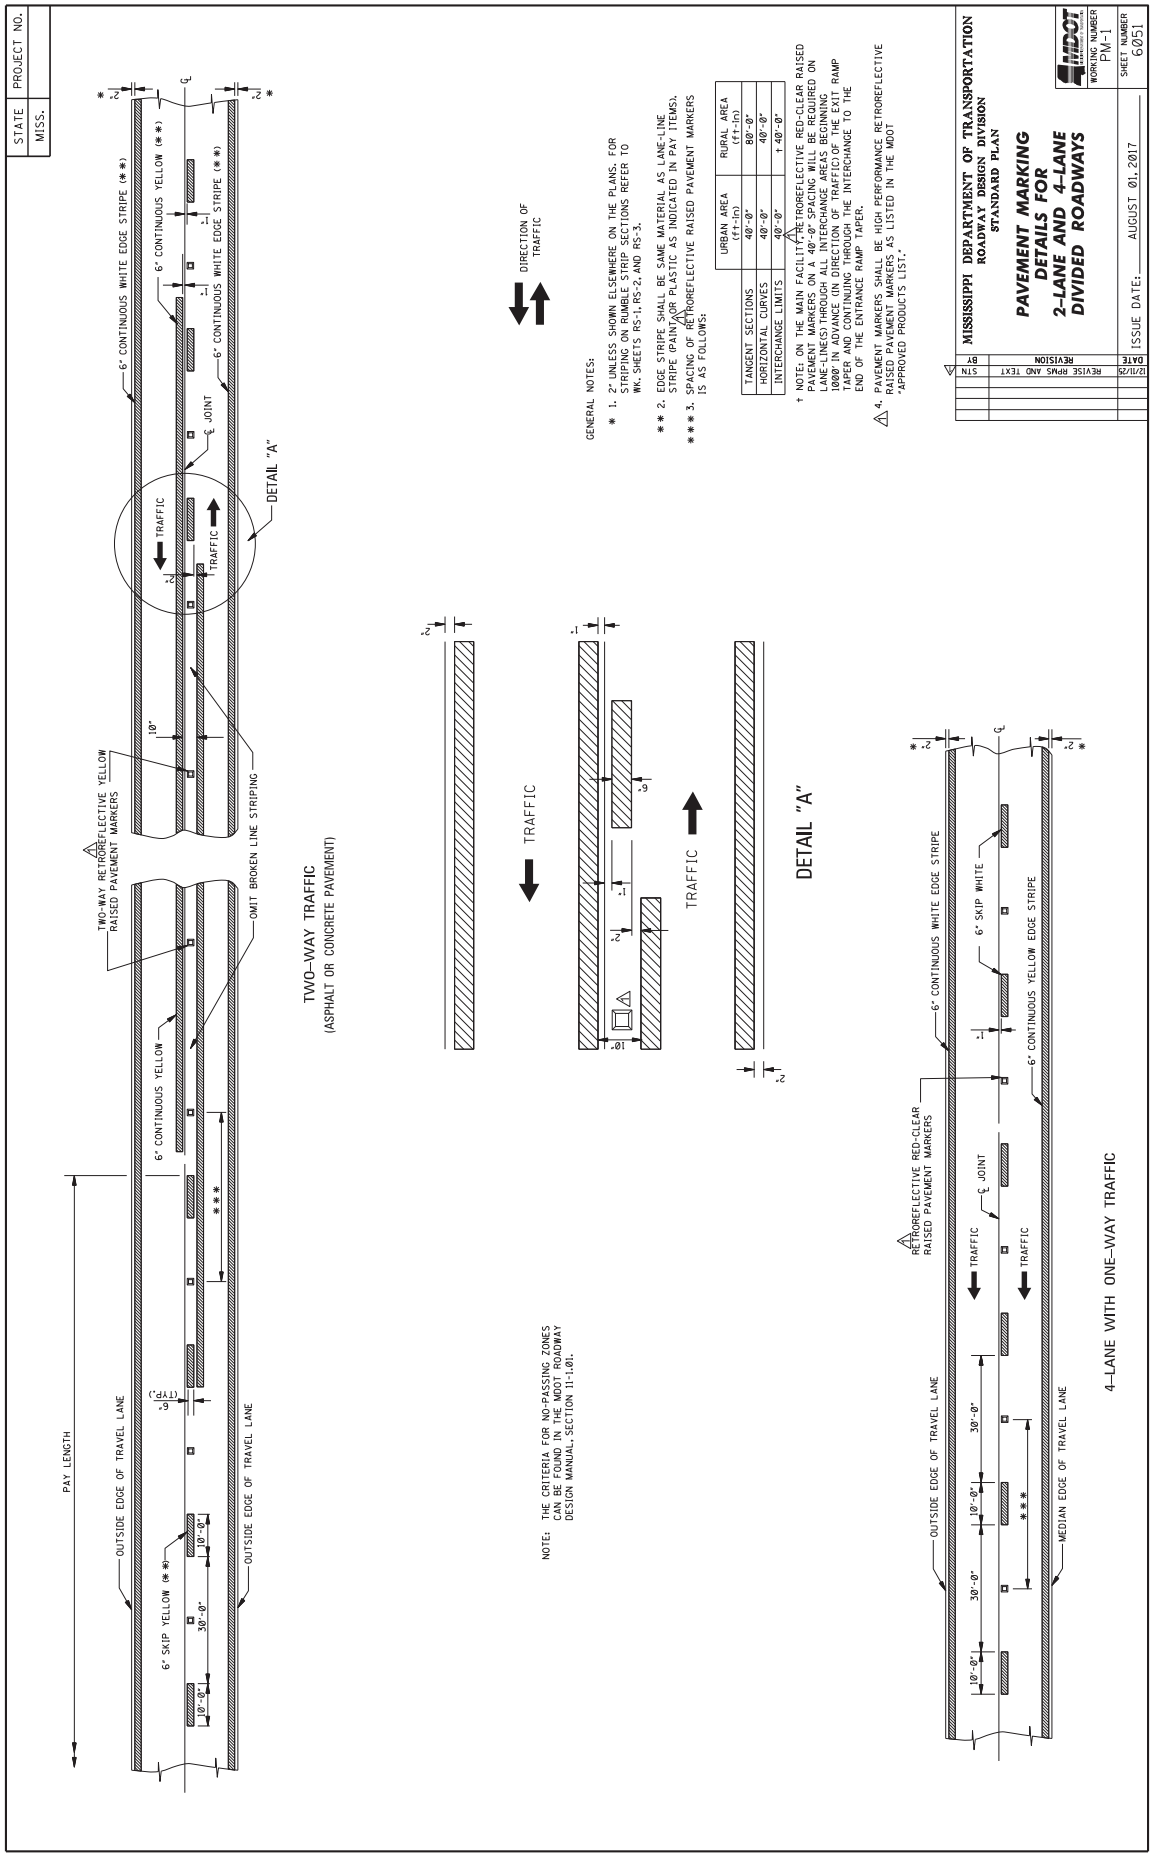

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
PAVEMENT MARKING DETAILS FOR 2-LANE AND 4-LANE DIVIDED ROADWAYS
WORKING NUMBER PM-1
SHEET NUMBER 6051
ISSUE DATE: AUGUST 01, 2017
REVISE RPMS AND TEXT
12/11/20
STN BY
GENERAL NOTES:
* 1. 2" UNLESS SHOWN ELSEWHERE ON THE PLANS. FOR STRIPING ON RUMBLE STRIP SECTIONS REFER TO MK. SHEETS RS-1, RS-2, AND RS-3.
** 2. EDGE STRIPE SHALL BE SAME MATERIAL AS LANE-LINE STRIPE (PAINT OR PLASTIC AS INDICATED IN PAY ITEMS).
*** 3. SPACING OF RETROREFLECTIVE RAISED PAVEMENT MARKERS IS AS FOLLOWS:
URBAN AREA (ft-in) RURAL AREA (ft-in)
TANGENT SECTIONS 40'-0" 80'-0"
HORIZONTAL CURVES 40'-0" 40'-0"
INTERCHANGE LIMITS 40'-0" † 40'-0"
† NOTE: ON THE MAIN FACILITY, RETROREFLECTIVE RED-CLEAR RAISED PAVEMENT MARKERS SPACED AT 40'-0" CENTERS WILL BE REQUIRED ON LANE LINE(S) THROUGH ALL INTERCHANGE AREAS BEGINNING 1000' IN ADVANCE (IN DIRECTION OF TRAFFIC) OF THE EXIT RAMP TAPER AND CONTINUING THROUGH THE INTERCHANGE TO THE END OF THE ENTRANCE RAMP TAPER.
△4. PAVEMENT MARKERS SHALL BE HIGH PERFORMANCE RETROREFLECTIVE RAISED PAVEMENT MARKERS AS LISTED IN THE MDOT "APPROVED PRODUCTS LIST."
PAY LENGTH
OUTSIDE EDGE OF TRAVEL LANE
6" SKIP YELLOW (**)
6" CONTINUOUS YELLOW
6" CONTINUOUS WHITE EDGE STRIPE (**)
6" CONTINUOUS YELLOW (**)
6" CONTINUOUS WHITE EDGE STRIPE (**)
℄ JOINT
TRAFFIC
TRAFFIC
DETAIL "A"
OMIT BROKEN LINE STRIPING
△TWO-WAY RETROREFLECTIVE YELLOW RAISED PAVEMENT MARKERS
TWO-WAY TRAFFIC
(ASPHALT OR CONCRETE PAVEMENT)
DIRECTION OF TRAFFIC
TRAFFIC
TRAFFIC
DETAIL "A"
NOTE: THE CRITERIA FOR NO-PASSING ZONES CAN BE FOUND IN THE MDOT ROADWAY DESIGN MANUAL, SECTION 11-1.01.
△RETROREFLECTIVE RED-CLEAR RAISED PAVEMENT MARKERS
6" CONTINUOUS WHITE EDGE STRIPE
6" SKIP WHITE
6" CONTINUOUS YELLOW EDGE STRIPE
℄ JOINT
TRAFFIC
TRAFFIC
OUTSIDE EDGE OF TRAVEL LANE
MEDIAN EDGE OF TRAVEL LANE
4-LANE WITH ONE-WAY TRAFFIC

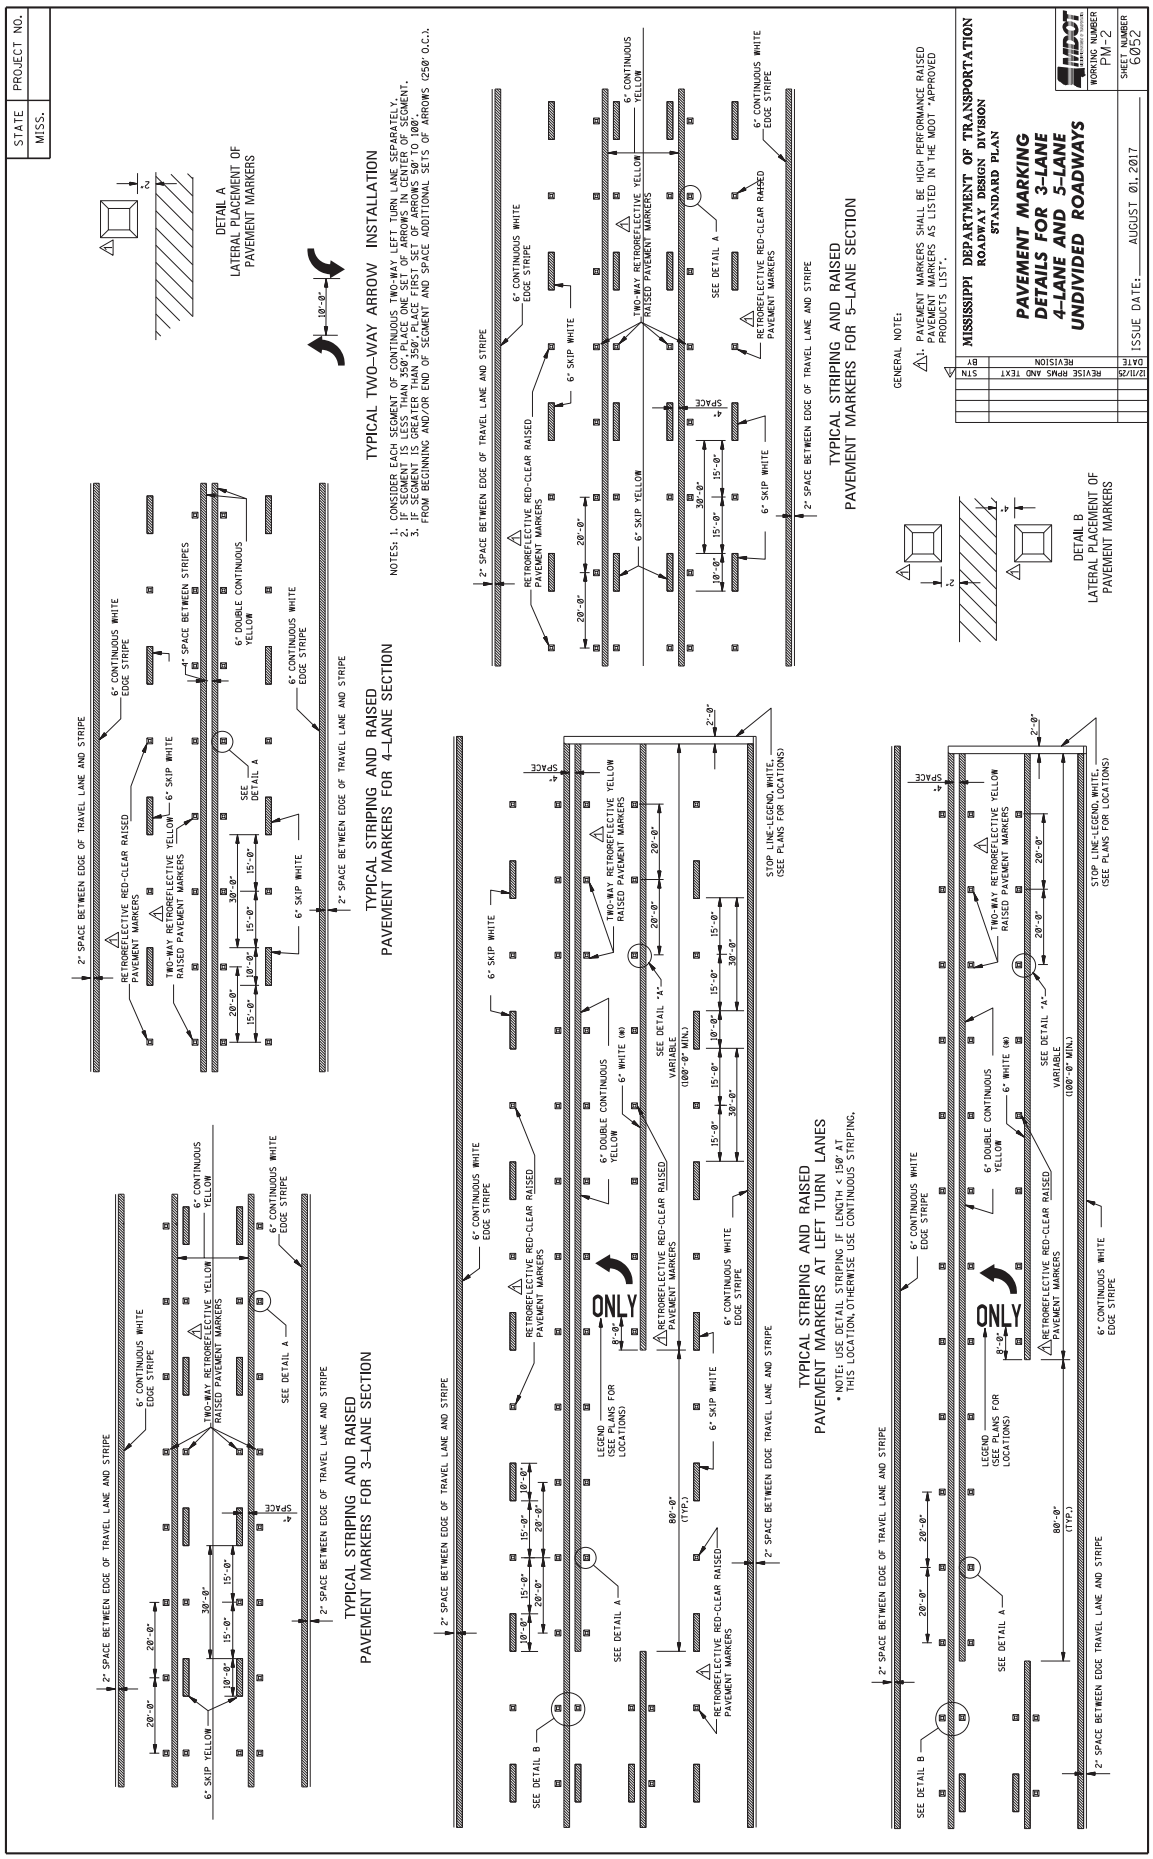

STATE MISS.
PROJECT NO.
TYPICAL TWO-WAY ARROW INSTALLATION
NOTES: 1. CONSIDER EACH SEGMENT OF CONTINUOUS TWO-WAY LEFT TURN LANE SEPARATELY.
2. IF SEGMENT IS LESS THAN 350', PLACE ONE SET OF ARROWS IN EACH SEGMENT.
3. IF SEGMENT IS GREATER THAN 350', PLACE FIRST SET OF ARROWS 50' TO 100' FROM BEGINNING AND/OR END OF SEGMENT AND SPACE ADDITIONAL SETS OF ARROWS (250' O.C.).
DETAIL A
LATERAL PLACEMENT OF PAVEMENT MARKERS
TYPICAL STRIPING AND RAISED PAVEMENT MARKERS FOR 3-LANE SECTION
TYPICAL STRIPING AND RAISED PAVEMENT MARKERS FOR 4-LANE SECTION
TYPICAL STRIPING AND RAISED PAVEMENT MARKERS AT LEFT TURN LANES
* NOTE: USE DETAIL STRIPING IF LENGTH < 150' AT THIS LOCATION, OTHERWISE USE CONTINUOUS STRIPING.
TYPICAL STRIPING AND RAISED PAVEMENT MARKERS FOR 5-LANE SECTION
DETAIL B
LATERAL PLACEMENT OF PAVEMENT MARKERS
GENERAL NOTE:
1. PAVEMENT MARKERS SHALL BE HIGH PERFORMANCE RAISED PAVEMENT MARKERS AS LISTED IN THE MDOT "APPROVED PRODUCTS LIST".
DATE REVISION BY
12/11/23 REVISE RPMS AND TEXT STN
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
PAVEMENT MARKING DETAILS FOR 3-LANE 4-LANE AND 5-LANE UNDIVIDED ROADWAYS
ISSUE DATE: AUGUST 01, 2017
WORKING NUMBER PM-2
SHEET NUMBER 6052

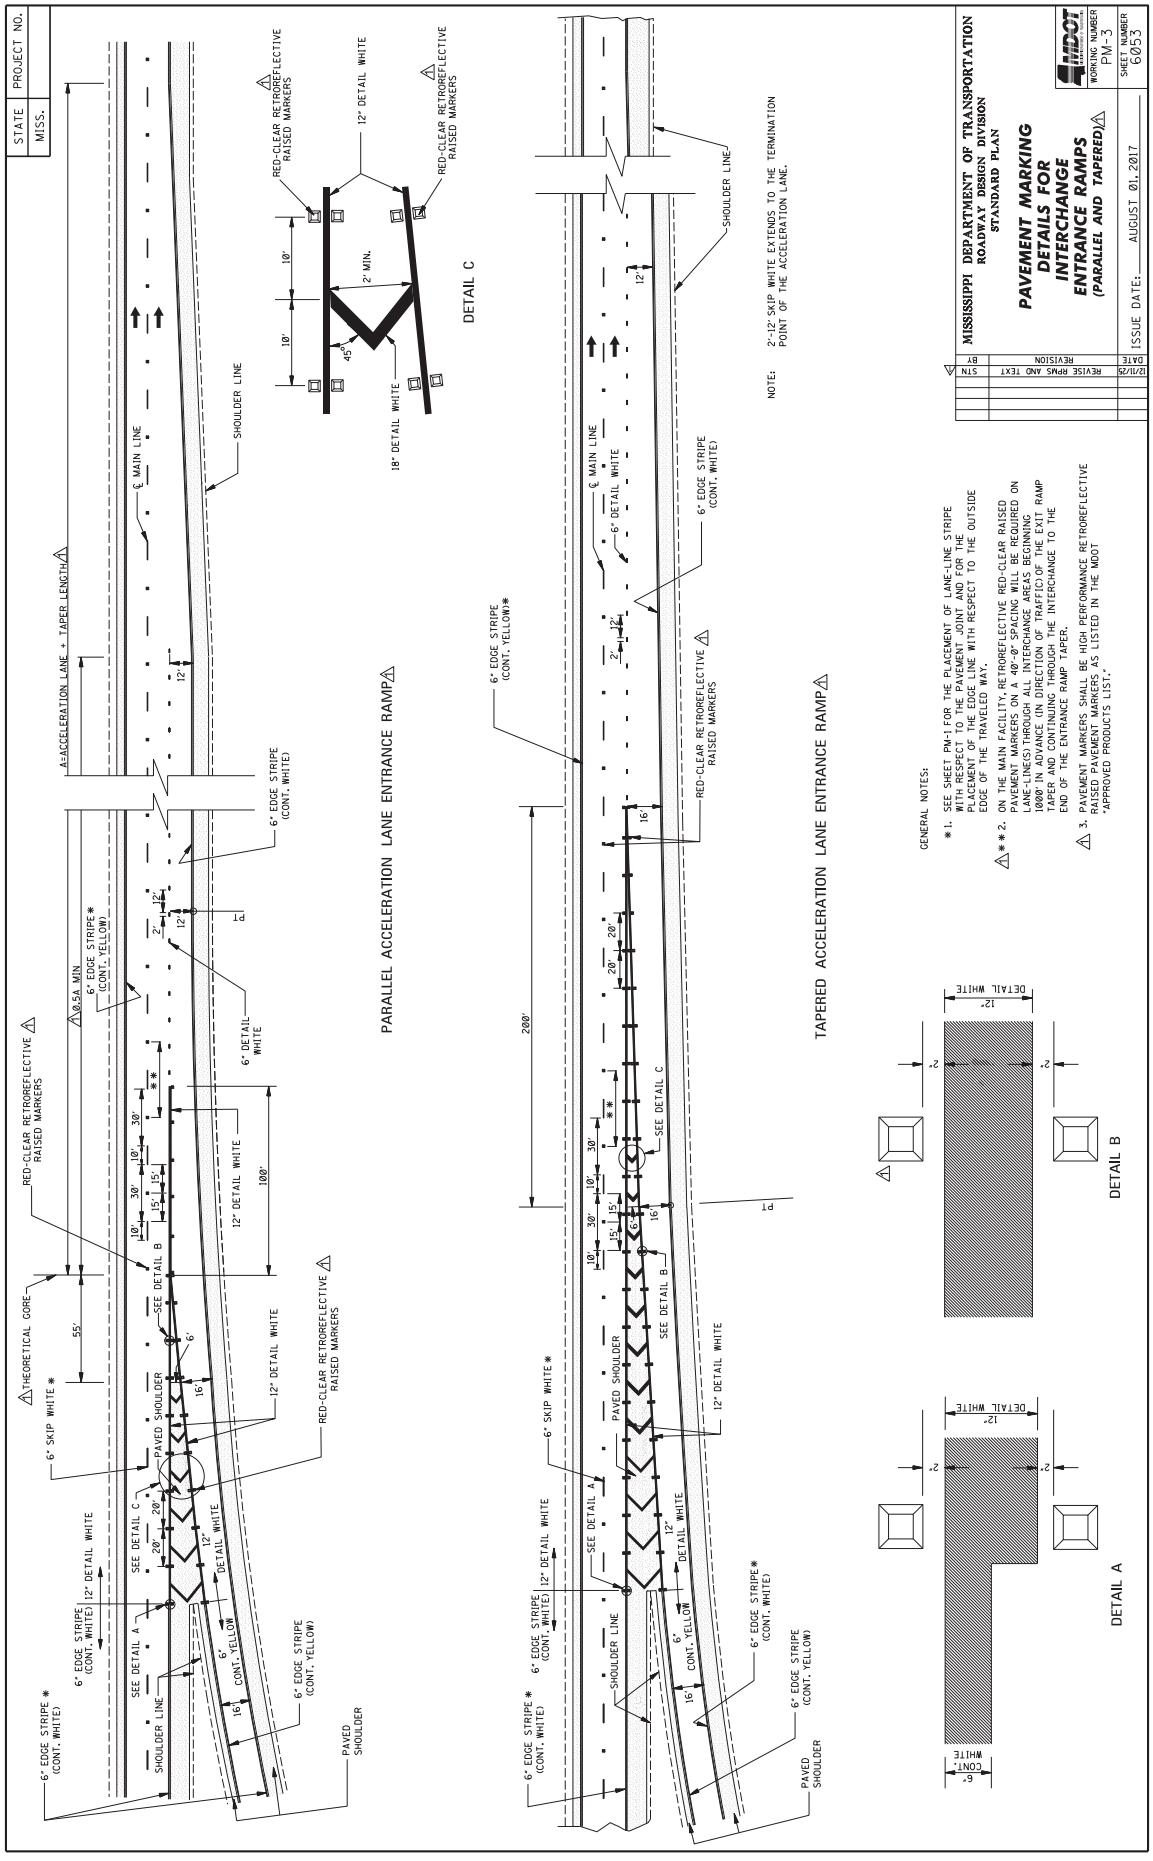

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
PAVEMENT MARKING DETAILS FOR INTERCHANGE ENTRANCE RAMPS (PARALLEL AND TAPERED)
WORKING NUMBER PM-3
SHEET NUMBER 6053
ISSUE DATE: AUGUST 01, 2017
REVISION
DATE
BY
12/11/23 REVISE RPMS AND TEXT STN
PARALLEL ACCELERATION LANE ENTRANCE RAMP
TAPERED ACCELERATION LANE ENTRANCE RAMP
DETAIL A
DETAIL B
DETAIL C
GENERAL NOTES:
*1. SEE SHEET PM-1 FOR THE PLACEMENT OF LANE-LINE STRIPE WITH RESPECT TO THE PAVEMENT JOINT AND FOR THE PLACEMENT OF THE EDGE LINE WITH RESPECT TO THE OUTSIDE EDGE OF THE TRAVELED WAY.
**2. ON THE MAIN FACILITY, RETROREFLECTIVE RED-CLEAR RAISED PAVEMENT MARKERS ON A 40'-0" SPACING WILL BE REQUIRED ON LANE-LINE(S) THROUGH ALL INTERCHANGE AREAS BEGINNING 1000' IN ADVANCE (IN DIRECTION OF TRAFFIC) OF THE EXIT RAMP TAPER AND CONTINUING THROUGH THE INTERCHANGE TO THE END OF THE ENTRANCE RAMP TAPER.
3. PAVEMENT MARKERS SHALL BE HIGH PERFORMANCE RETROREFLECTIVE RAISED PAVEMENT MARKERS AS LISTED IN THE MDOT "APPROVED PRODUCTS LIST."
NOTE: 2'-12' SKIP WHITE EXTENDS TO THE TERMINATION POINT OF THE ACCELERATION LANE.

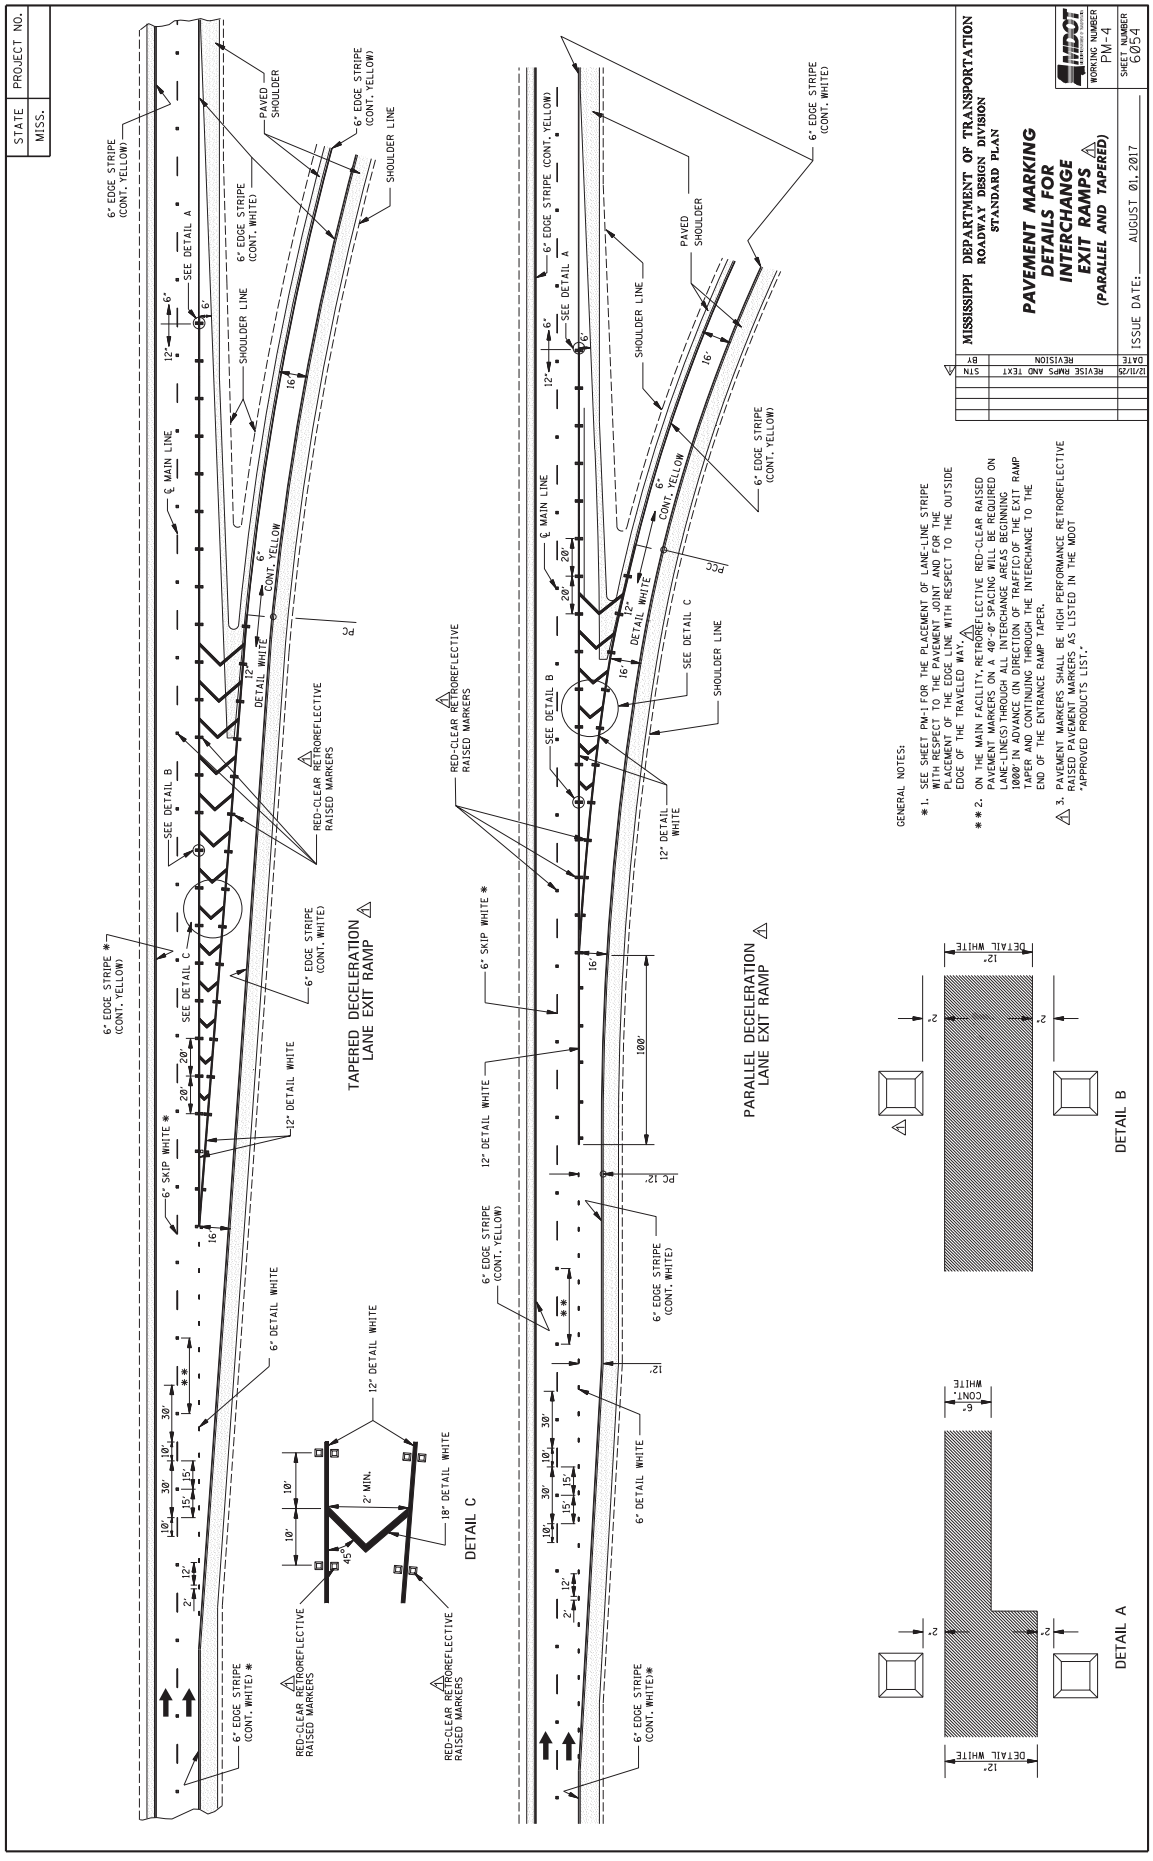

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
PAVEMENT MARKING DETAILS FOR INTERCHANGE EXIT RAMPS
(PARALLEL AND TAPERED)
WORKING NUMBER PM-4
SHEET NUMBER 6054
ISSUE DATE: AUGUST 01, 2017
DATE 12/11/23 BY STN REVISION REVISE RAMPS AND TEXT
TAPERED DECELERATION LANE EXIT RAMP
PARALLEL DECELERATION LANE EXIT RAMP
DETAIL A
DETAIL B
DETAIL C
GENERAL NOTES:
* 1. SEE SHEET PM-1 FOR THE PLACEMENT OF LANE-LINE STRIPE WITH RESPECT TO THE PAVEMENT JOINTS AND FOR THE PLACEMENT OF THE EDGE LINE WITH RESPECT TO THE OUTSIDE EDGE OF THE TRAVELED WAY.
* * 2. ON THE MAIN FACILITY, RETROREFLECTIVE RED-CLEAR RAISED PAVEMENT MARKERS ON A 40'-0" SPACING WILL BE REQUIRED ON LANE-LINE(S) THROUGH ALL INTERCHANGE AREAS BEGINNING 1000' IN ADVANCE (IN DIRECTION OF TRAFFIC) OF THE EXIT RAMP TAPER AND CONTINUING THROUGH THE INTERCHANGE TO THE END OF THE ENTRANCE RAMP TAPER.
3. PAVEMENT MARKERS SHALL BE HIGH PERFORMANCE RETROREFLECTIVE RAISED PAVEMENT MARKERS AS LISTED IN THE MDOT "APPROVED PRODUCTS LIST."

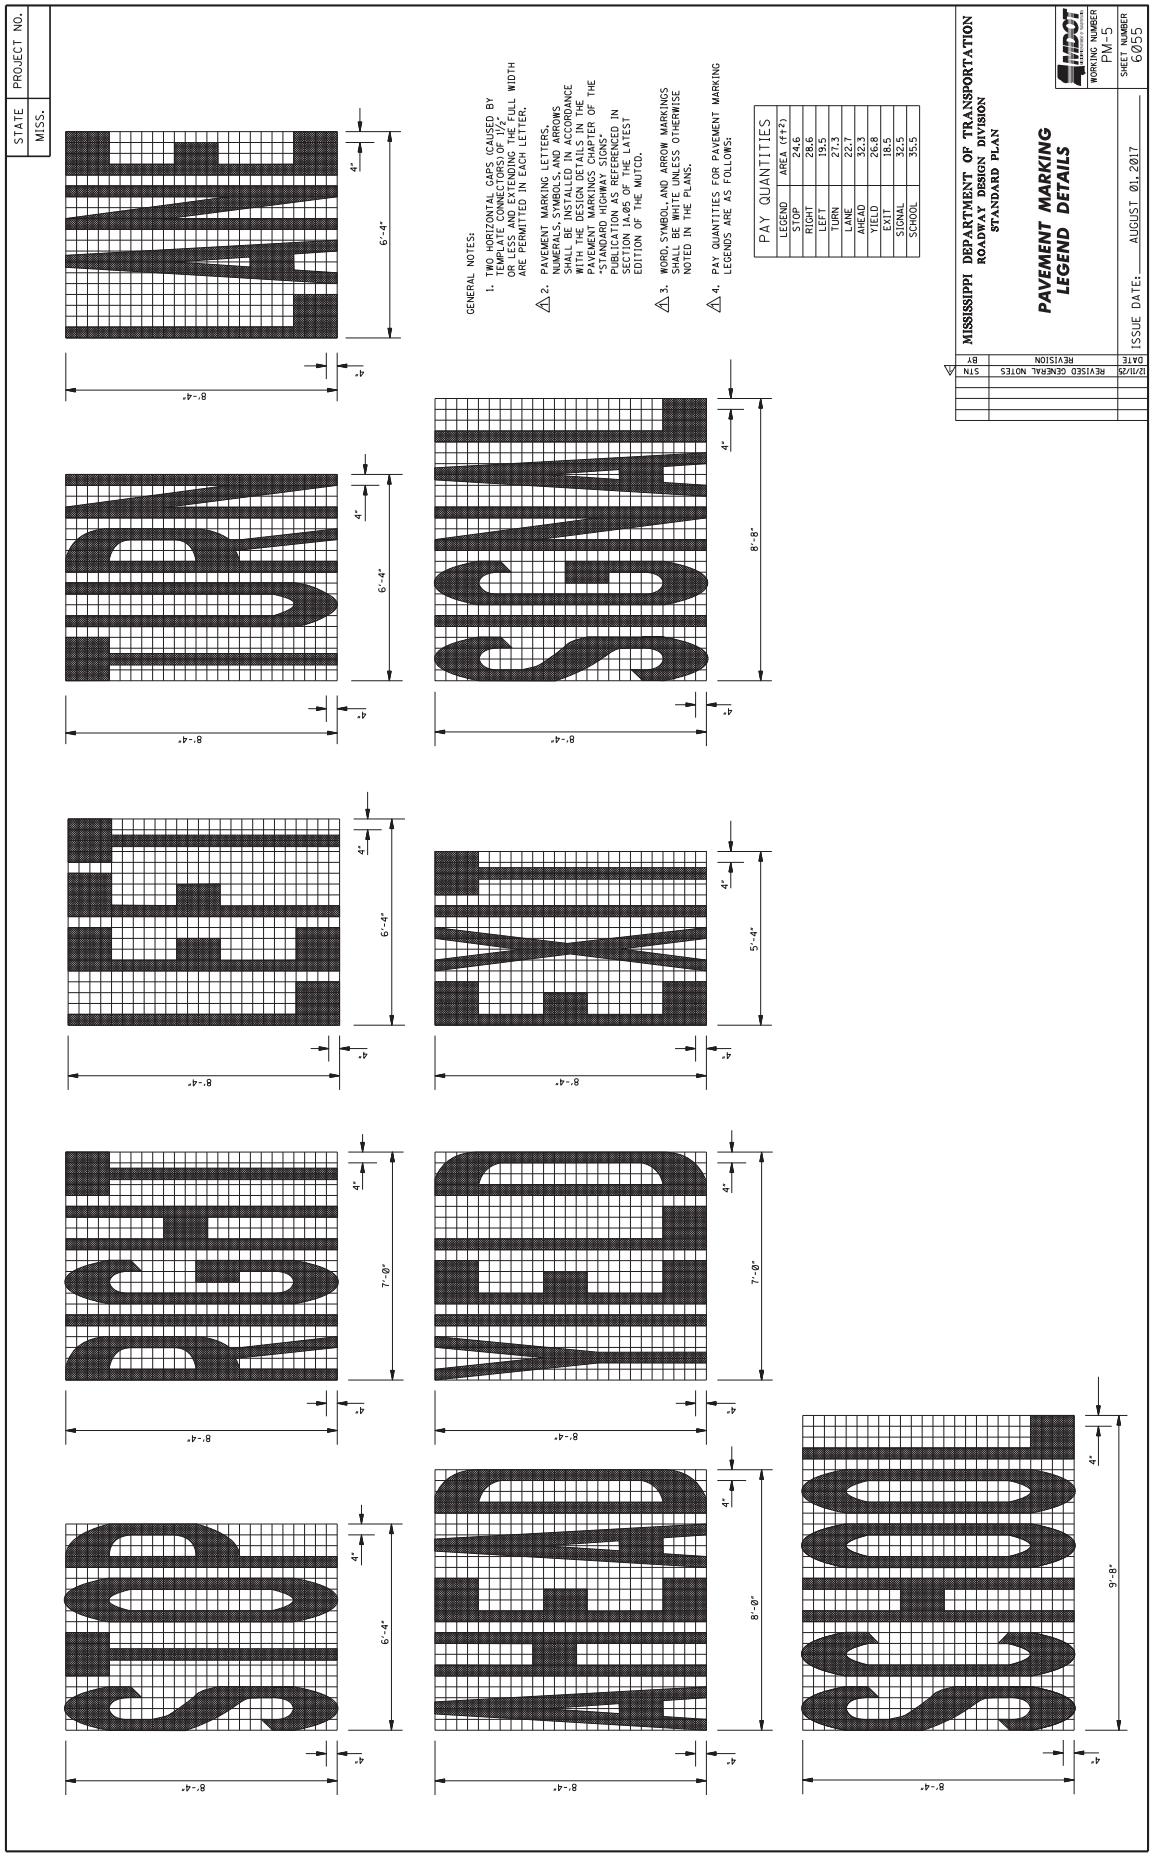

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
PAVEMENT MARKING LEGEND DETAILS
WORKING NUMBER PM-5
SHEET NUMBER 6055
ISSUE DATE: AUGUST 01, 2017
GENERAL NOTES:
1. TWO HORIZONTAL GAPS (CAUSED BY TEMPLATE CONNECTORS) OF 1/2" OR LESS AND EXTENDING THE FULL WIDTH ARE PERMITTED IN EACH LETTER.
2. PAVEMENT MARKING LETTERS, NUMERALS, SYMBOLS, AND ARROWS SHALL BE INSTALLED IN ACCORDANCE WITH THE DESIGN DETAILS IN THE PAVEMENT MARKINGS CHAPTER OF THE STANDARD HIGHWAY SIGNS PUBLICATION AS REFERENCED IN SECTION 1A.05 OF THE LATEST EDITION OF THE MUTCD.
3. WORD, SYMBOL, AND ARROW MARKINGS SHALL BE WHITE UNLESS OTHERWISE NOTED IN THE PLANS.
4. PAY QUANTITIES FOR PAVEMENT MARKING LEGENDS ARE AS FOLLOWS:
PAY QUANTITIES
LEGEND AREA (FT²)
STOP 24.6
RIGHT 28.6
LEFT 19.5
TURN 27.3
LANE 22.7
AHEAD 32.3
YIELD 26.8
EXIT 18.5
SIGNAL 32.5
SCHOOL 35.5
BY REVISION DATE
STN REVISED GENERAL NOTES 12/11/25

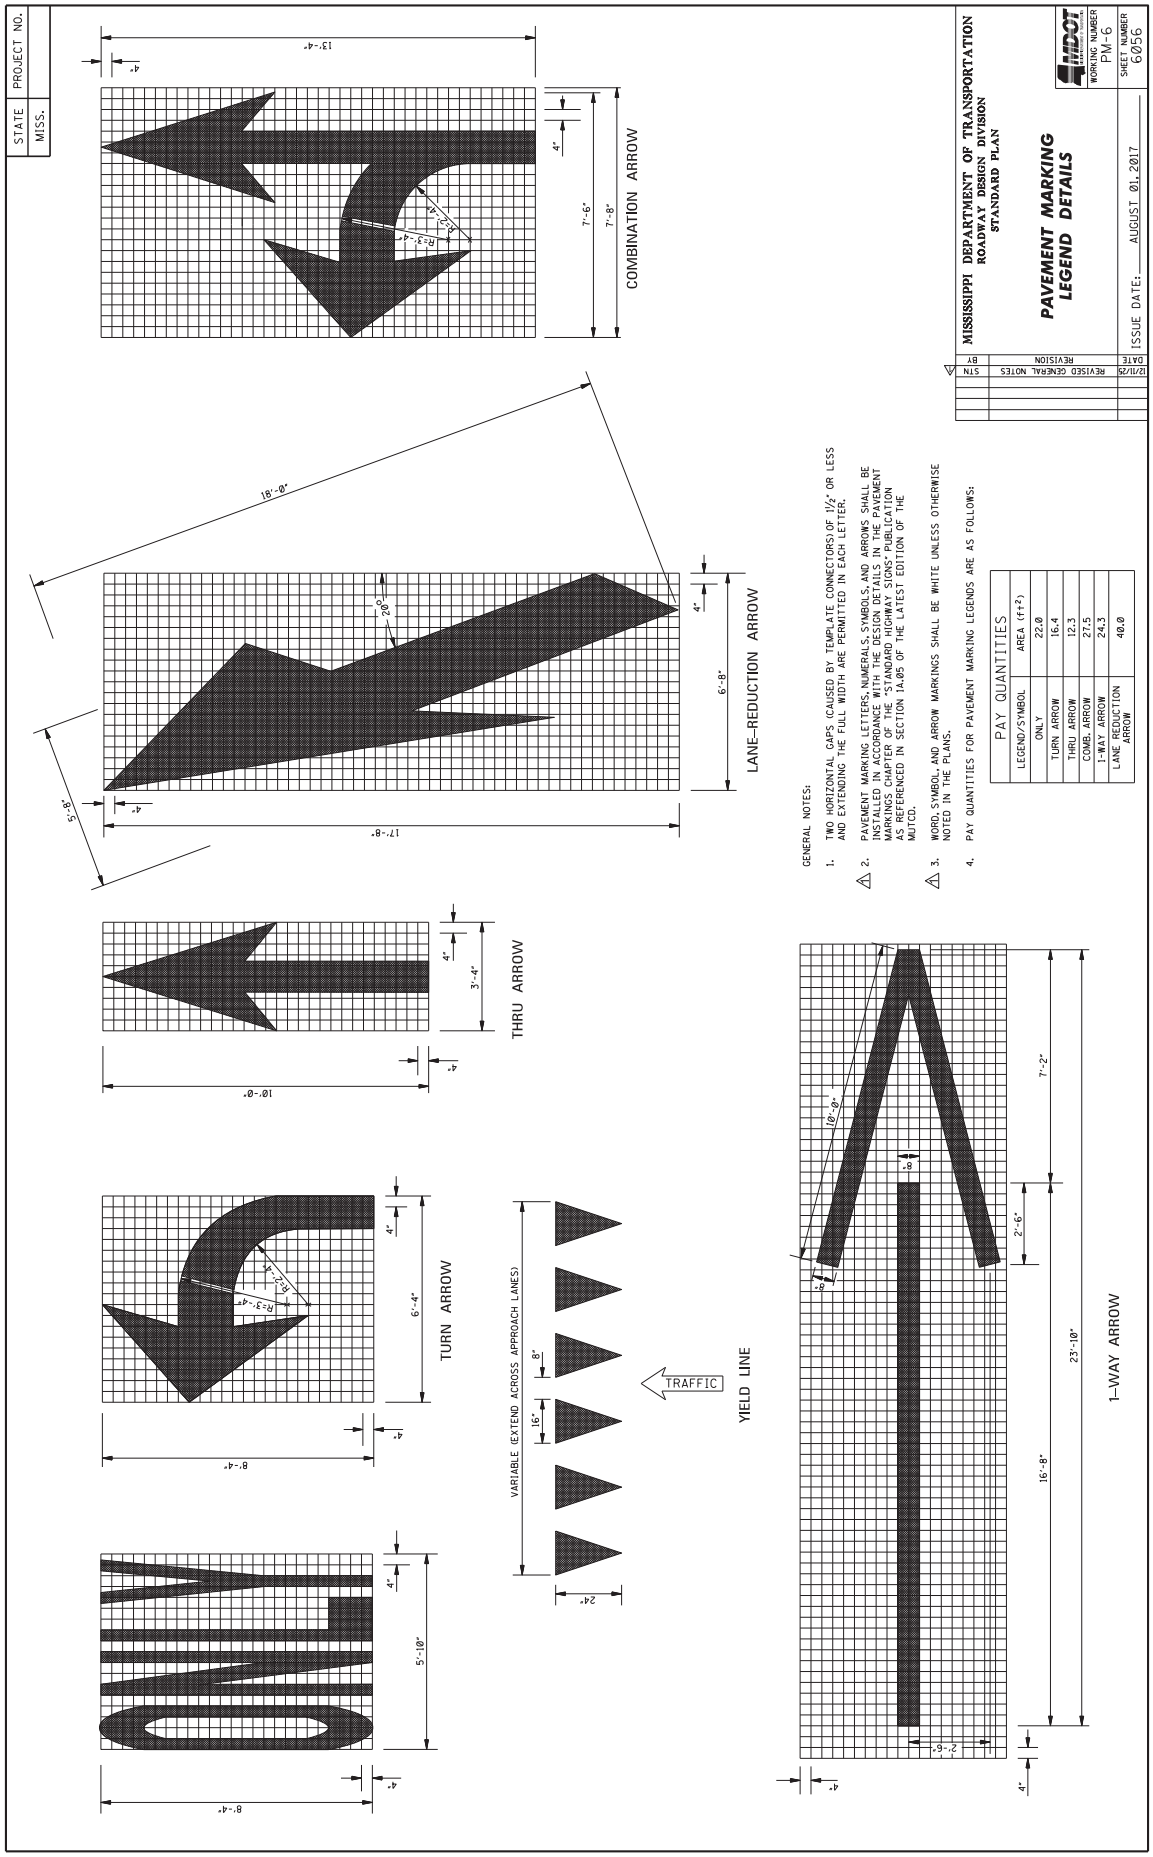

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
PAVEMENT MARKING LEGEND DETAILS
WORKING NUMBER PM-6
SHEET NUMBER 6056
ISSUE DATE: AUGUST 01, 2017
DATE 12/11/25 REVISED GENERAL NOTES STN
REVISION BY
COMBINATION ARROW
LANE-REDUCTION ARROW
THRU ARROW
TURN ARROW
YIELD LINE
TRAFFIC
1-WAY ARROW
GENERAL NOTES:
1. TWO HORIZONTAL GAPS (CAUSED BY TEMPLATE CONNECTORS) OF 1½" OR LESS AND EXTENDING THE FULL WIDTH ARE PERMITTED IN EACH LETTER.
2. PAVEMENT MARKING LETTERS, NUMERALS, SYMBOLS, AND ARROWS SHALL BE INSTALLED IN ACCORDANCE WITH THE DESIGN DETAILS IN THE PAVEMENT MARKINGS CHAPTER OF THE "STANDARD HIGHWAY SIGNS" PUBLICATION AS REFERENCED IN SECTION 1A.05 OF THE LATEST EDITION OF THE MUTCD.
3. WORD, SYMBOL AND ARROW MARKINGS SHALL BE WHITE UNLESS OTHERWISE NOTED IN THE PLANS.
4. PAY QUANTITIES FOR PAVEMENT MARKING LEGENDS ARE AS FOLLOWS:
PAY QUANTITIES
LEGEND/SYMBOL AREA (ft²)
ONLY 22.0
TURN ARROW 16.4
THRU ARROW 12.3
COMB. ARROW 27.5
1-WAY ARROW 24.3
LANE REDUCTION ARROW 40.0

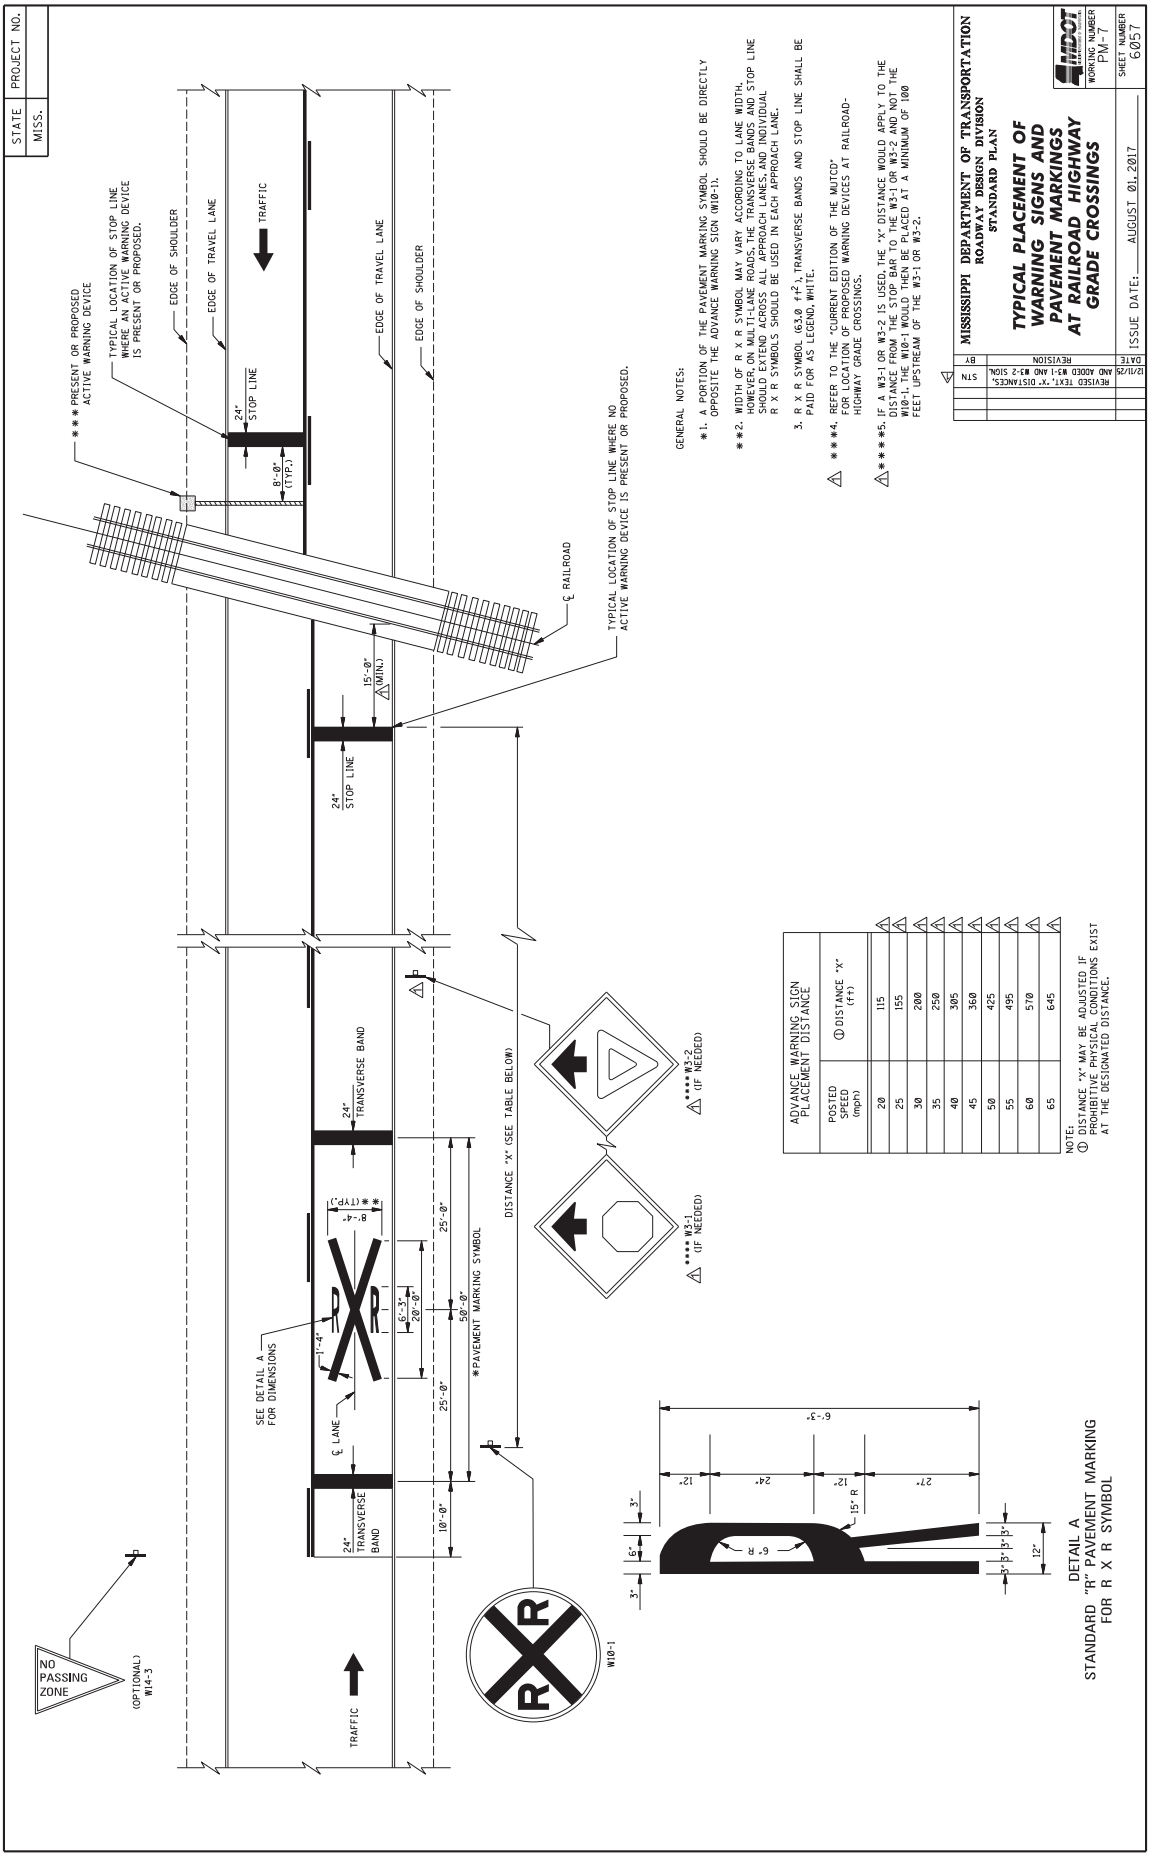

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
TYPICAL PLACEMENT OF WARNING SIGNS AND PAVEMENT MARKINGS AT RAILROAD HIGHWAY GRADE CROSSINGS
WORKING NUMBER FM-7
SHEET NUMBER 6057
ISSUE DATE: AUGUST 01, 2017
REVISED TEXT, 'X' DISTANCES, AND ADDED W3-1 AND W3-2 SIGN.
12/11/20
STN
DATE
BY
REVISION
GENERAL NOTES:
*1. A PORTION OF THE PAVEMENT MARKING SYMBOL SHOULD BE DIRECTLY OPPOSITE THE ADVANCE WARNING SIGN (W10-1).
**2. WIDTH OF R X R SYMBOL MAY VARY ACCORDING TO LANE WIDTH. HOWEVER, ON MULTI-LANE ROADS, THE TRANSVERSE BANDS AND STOP LINE SHOULD EXTEND ACROSS ALL APPROACH LANES, AND INDIVIDUAL R X R SYMBOLS SHOULD BE USED IN EACH APPROACH LANE.
3. R X R SYMBOL (63.0 ft²), TRANSVERSE BANDS AND STOP LINE SHALL BE PAID FOR AS LEGEND, WHITE.
***4. REFER TO THE "CURRENT EDITION OF THE MUTCD" FOR LOCATION OF PROPOSED WARNING DEVICES AT RAILROAD-HIGHWAY GRADE CROSSINGS.
****5. IF A W3-1 OR W3-2 IS USED, THE 'X' DISTANCE WOULD APPLY TO THE DISTANCE FROM THE STOP BAR TO THE W10-1 AND NOT TO THE W10-1. THE W10-1 WOULD THEN BE PLACED AT A MINIMUM OF 100 FEET UPSTREAM OF THE W3-1 OR W3-2.
*** PRESENT OR PROPOSED ACTIVE WARNING DEVICE
TYPICAL LOCATION OF STOP LINE WHERE AN ACTIVE WARNING DEVICE IS PRESENT OR PROPOSED.
EDGE OF SHOULDER
EDGE OF TRAVEL LANE
TRAFFIC
24" STOP LINE
8'-0" (TYP.)
℄ RAILROAD
TYPICAL LOCATION OF STOP LINE WHERE NO ACTIVE WARNING DEVICE IS PRESENT OR PROPOSED.
15'-0" (MIN.)
24" TRANSVERSE BAND
SEE DETAIL A FOR DIMENSIONS
*PAVEMENT MARKING SYMBOL
DISTANCE "X" (SEE TABLE BELOW)
**** W3-2 (IF NEEDED)
**** W3-1 (IF NEEDED)
W10-1
NO PASSING ZONE
(OPTIONAL) W14-3
ADVANCE WARNING SIGN PLACEMENT DISTANCE
POSTED SPEED (mph)
① DISTANCE "X" (ft)
20 115
25 155
30 200
35 250
40 305
45 360
50 425
55 495
60 570
65 645
NOTE:
① DISTANCE "X" MAY BE ADJUSTED IF PROHIBITIVE PHYSICAL CONDITIONS EXIST AT THE DESIGNATED DISTANCE.
DETAIL A
STANDARD "R" PAVEMENT MARKING FOR R X R SYMBOL

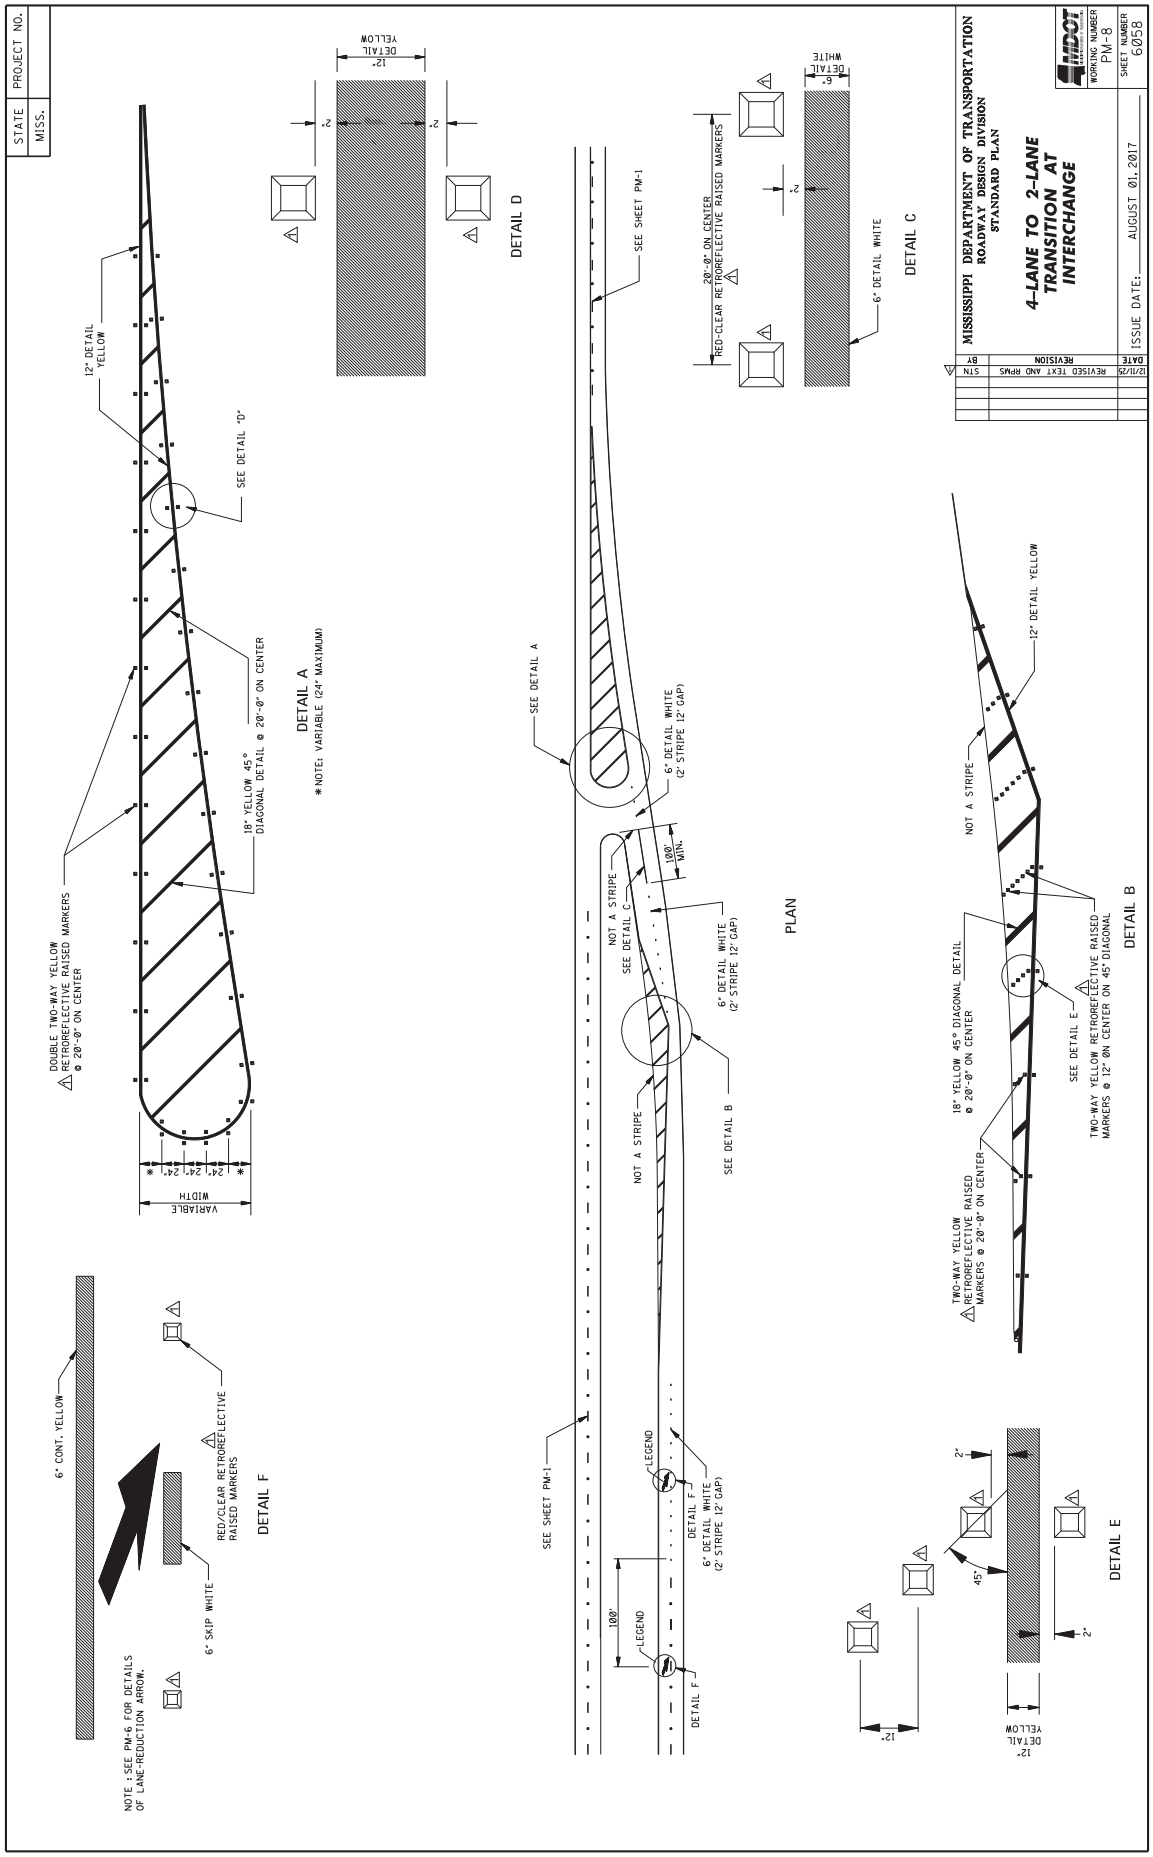

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
4-LANE TO 2-LANE TRANSITION AT INTERCHANGE
WORKING NUMBER PM-8
SHEET NUMBER 6058
ISSUE DATE: AUGUST 01, 2017
DATE REVISION BY STN
12/11/25 REVISED TEXT AND RPMS
DOUBLE TWO-WAY YELLOW RETROREFLECTIVE RAISED MARKERS @ 20'-0" ON CENTER
12" DETAIL YELLOW
SEE DETAIL "D"
18" YELLOW 45° DIAGONAL DETAIL @ 20'-0" ON CENTER
VARIABLE WIDTH
24" 24" 24" 24" *
DETAIL A
*NOTE: VARIABLE (24" MAXIMUM)
DETAIL D
12" DETAIL YELLOW
2"
20'-0" ON CENTER
RED-CLEAR RETROREFLECTIVE RAISED MARKERS
6" DETAIL WHITE
DETAIL C
6" CONT. YELLOW
RED/CLEAR RETROREFLECTIVE RAISED MARKERS
6" SKIP WHITE
NOTE : SEE PM-6 FOR DETAILS OF LANE-REDUCTION ARROW.
DETAIL F
SEE SHEET PM-1
SEE DETAIL A
6" DETAIL WHITE (2" STRIPE 12' GAP)
100' MIN.
NOT A STRIPE
SEE DETAIL C
SEE DETAIL B
LEGEND
DETAIL F
PLAN
12" DETAIL YELLOW
NOT A STRIPE
18" YELLOW 45° DIAGONAL DETAIL @ 20'-0" ON CENTER
TWO-WAY YELLOW RETROREFLECTIVE RAISED MARKERS @ 20'-0" ON CENTER
SEE DETAIL E
TWO-WAY YELLOW RETROREFLECTIVE RAISED MARKERS @ 12' ON CENTER ON 45° DIAGONAL
DETAIL B
45°
12" DETAIL YELLOW
DETAIL E

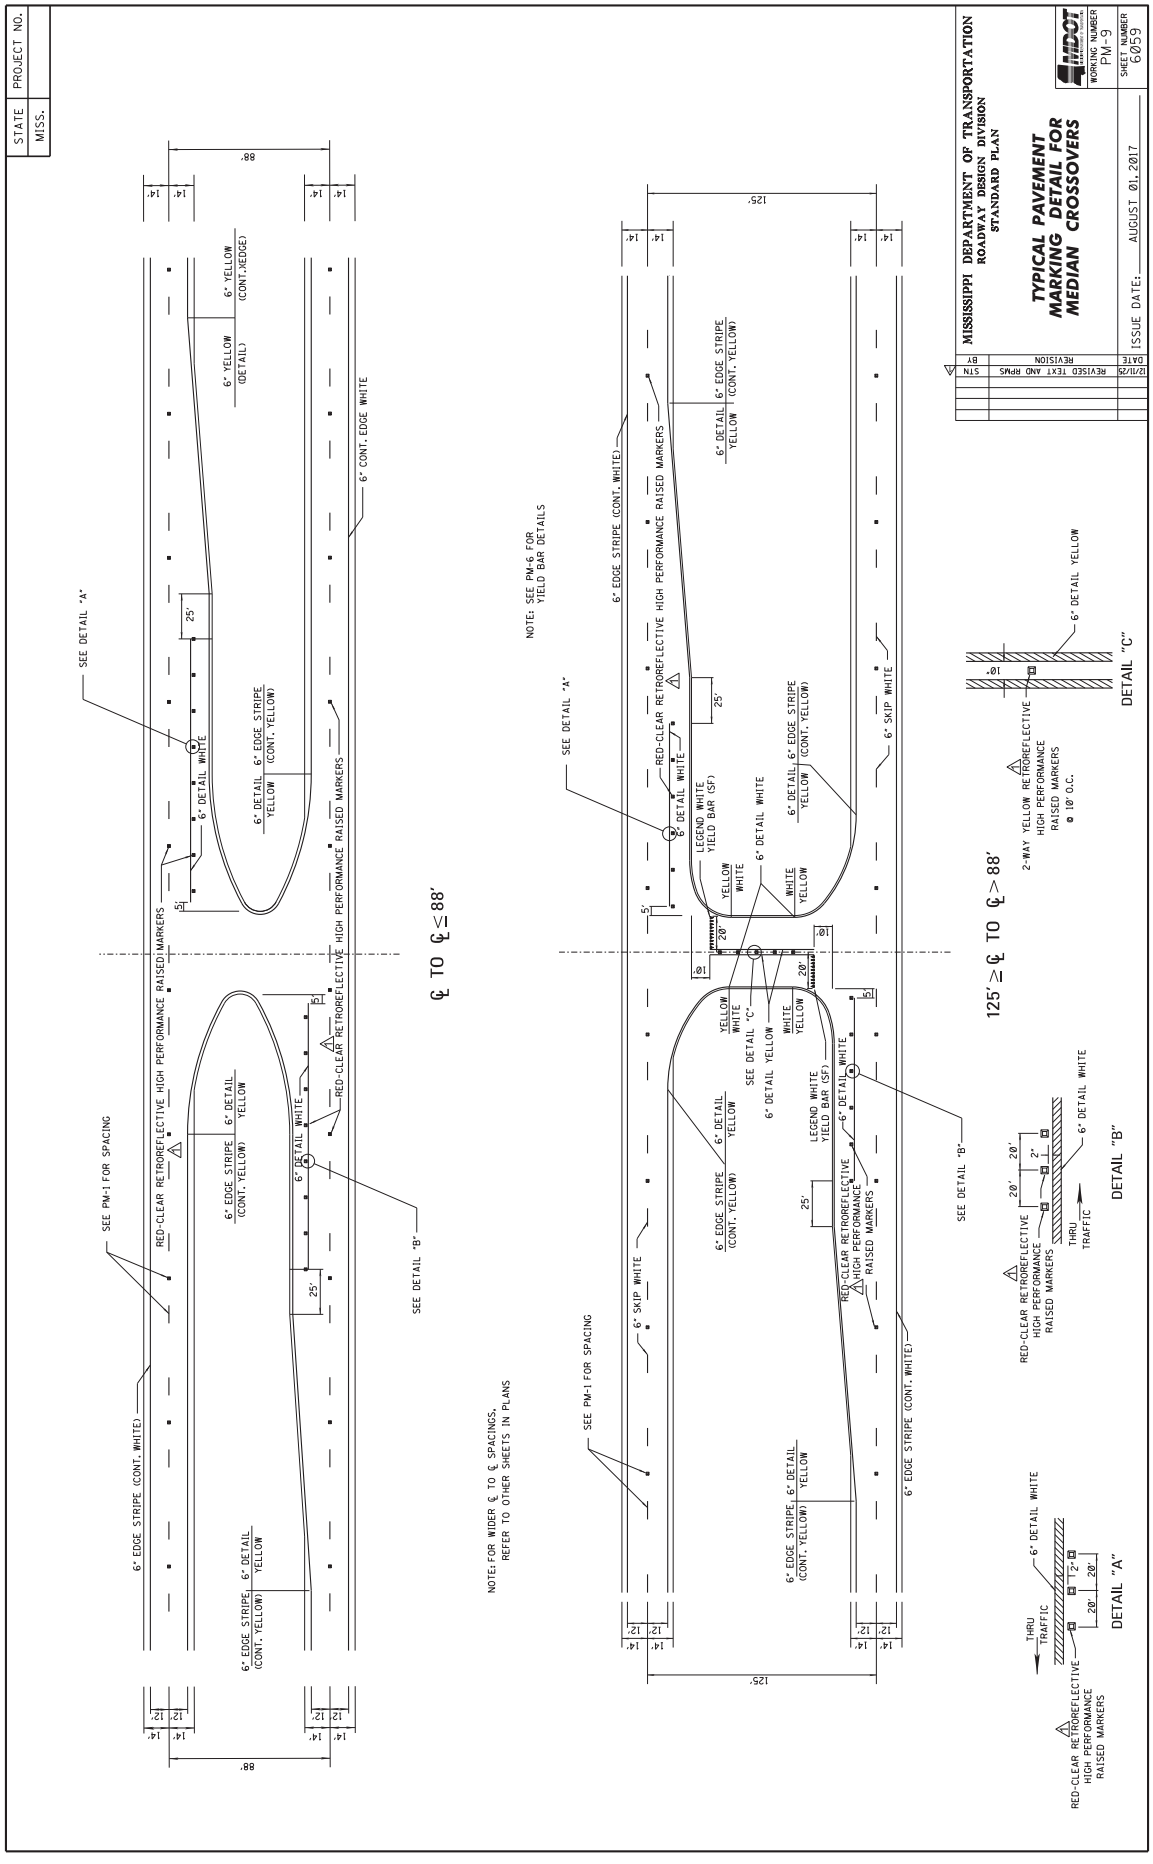

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
TYPICAL PAVEMENT MARKING DETAIL FOR MEDIAN CROSSOVERS
WORKING NUMBER PM-9
SHEET NUMBER 6059
ISSUE DATE: AUGUST 01, 2017
DATE REVISION BY
12/11/25 REVISED TEXT AND RPMS STN
6" EDGE STRIPE (CONT. WHITE)
6" DETAIL YELLOW
6" EDGE STRIPE (CONT. YELLOW)
6" DETAIL WHITE
6" YELLOW (DETAIL)
6" YELLOW (CONT.XEDGE)
6" CONT. EDGE WHITE
6" EDGE STRIPE (CONT. YELLOW)
6" DETAIL YELLOW
RED-CLEAR RETROREFLECTIVE HIGH PERFORMANCE RAISED MARKERS
SEE PM-1 FOR SPACING
SEE DETAIL "A"
SEE DETAIL "B"
℄ TO ℄ ≤ 88'
NOTE: FOR WIDER ℄ TO ℄ SPACINGS, REFER TO OTHER SHEETS IN PLANS
NOTE: SEE PM-6 FOR YIELD BAR DETAILS
6" SKIP WHITE
6" EDGE STRIPE (CONT. WHITE)
RED-CLEAR RETROREFLECTIVE HIGH PERFORMANCE RAISED MARKERS
LEGEND WHITE YIELD BAR (SF)
SEE DETAIL "C"
125' ≥ ℄ TO ℄ > 88'
2-WAY YELLOW RETROREFLECTIVE HIGH PERFORMANCE RAISED MARKERS @ 10' O.C.
DETAIL "C"
DETAIL "B"
DETAIL "A"
THRU TRAFFIC
88'
125'

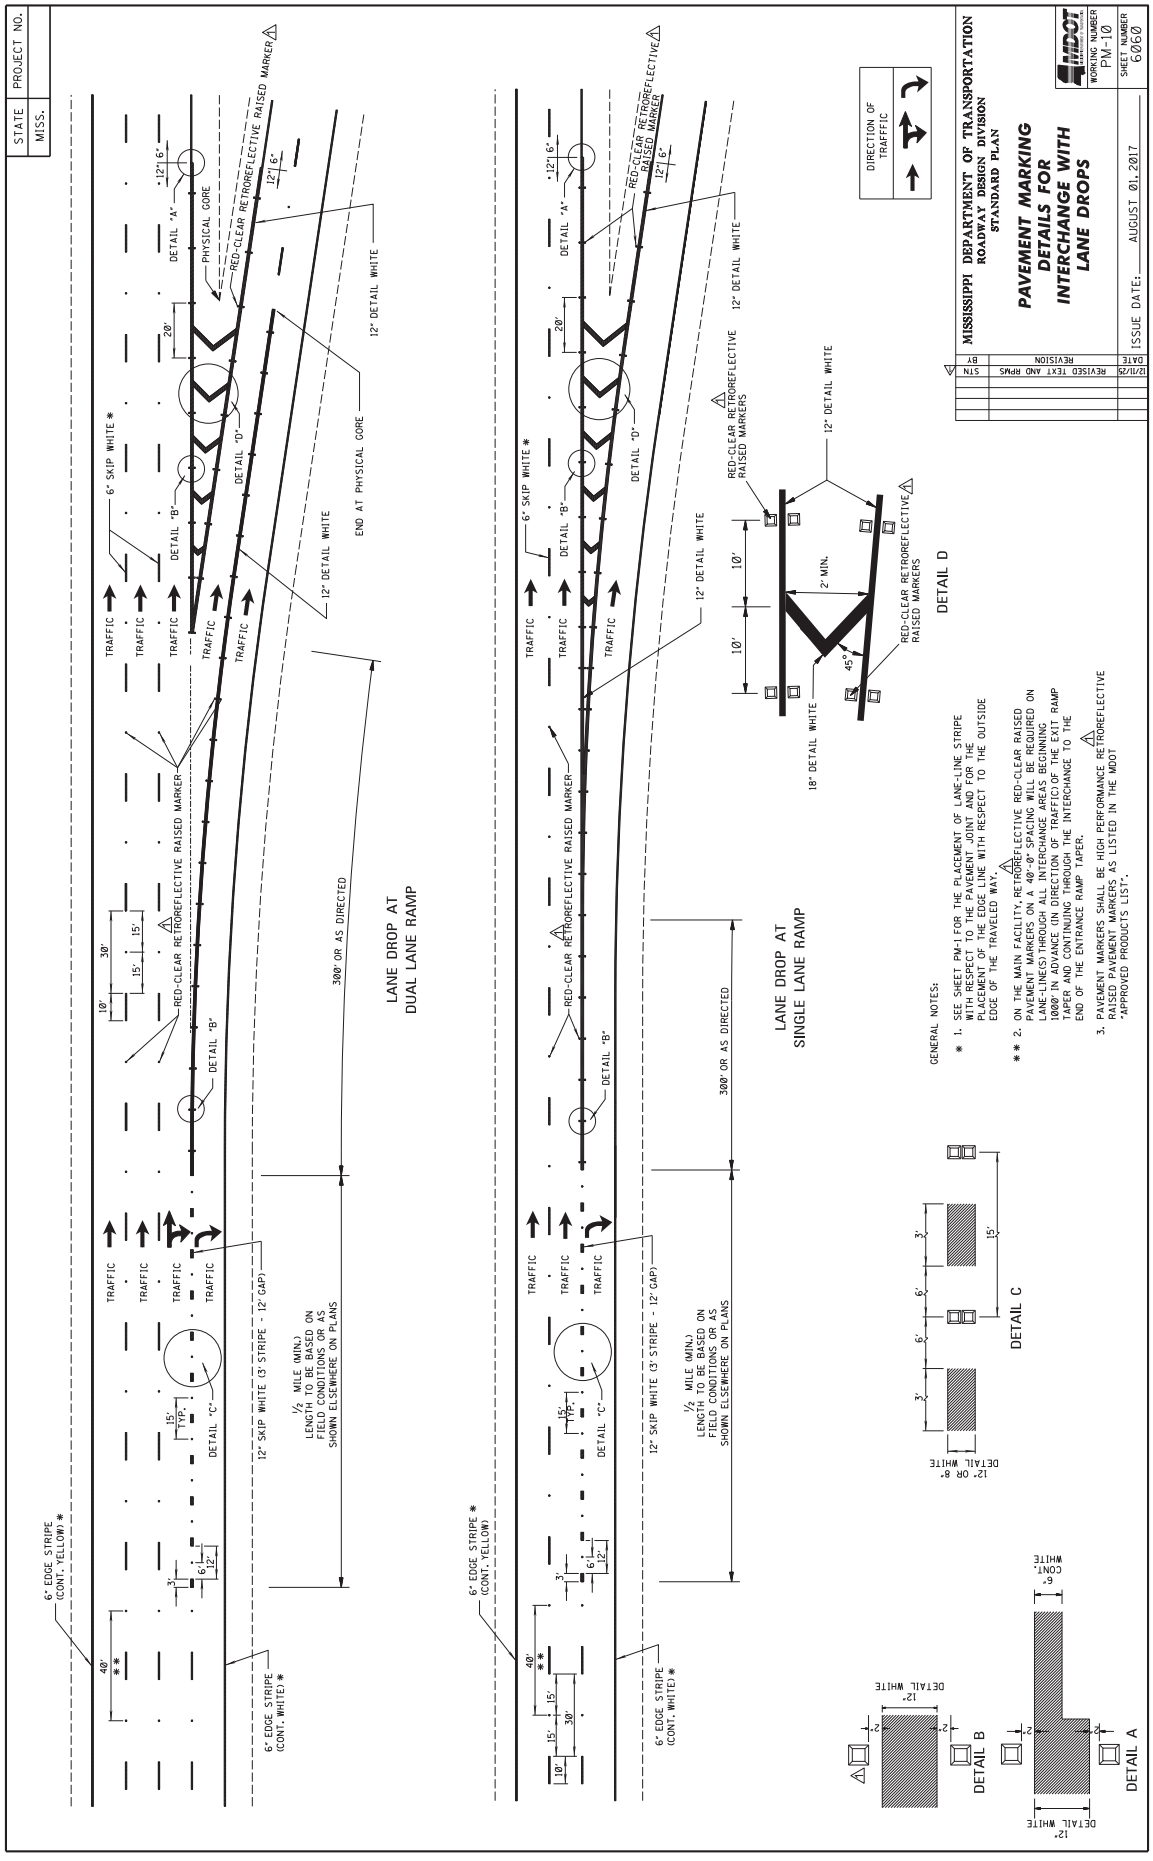

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
PAVEMENT MARKING DETAILS FOR INTERCHANGE WITH LANE DROPS
WORKING NUMBER PM-10
SHEET NUMBER 6060
ISSUE DATE: AUGUST 01, 2017
LANE DROP AT DUAL LANE RAMP
LANE DROP AT SINGLE LANE RAMP
DETAIL A
DETAIL B
DETAIL C
DETAIL D
GENERAL NOTES:
* 1. SEE SHEET PM-1 FOR THE PLACEMENT OF LANE-LINE STRIPE WITH RESPECT TO THE PAVEMENT JOINT AND FOR THE PLACEMENT OF THE EDGE LINE WITH RESPECT TO THE OUTSIDE EDGE OF THE TRAVELED WAY.
** 2. ON THE MAIN FACILITY, RETROREFLECTIVE RED-CLEAR RAISED PAVEMENT MARKERS ON A 40'-0" SPACING WILL BE REQUIRED ON LANE-LINE(S) THROUGH ALL INTERCHANGE AREAS BEGINNING 1000' IN ADVANCE (IN DIRECTION OF TRAFFIC) OF THE EXIT RAMP TAPER AND CONTINUING THROUGH THE INTERCHANGE TO THE END OF THE ENTRANCE RAMP TAPER.
3. PAVEMENT MARKERS SHALL BE HIGH PERFORMANCE RETROREFLECTIVE RAISED PAVEMENT MARKERS AS LISTED IN THE MDOT "APPROVED PRODUCTS LIST".
DIRECTION OF TRAFFIC
REVISED TEXT AND RPMS
DATE
BY
REVISION

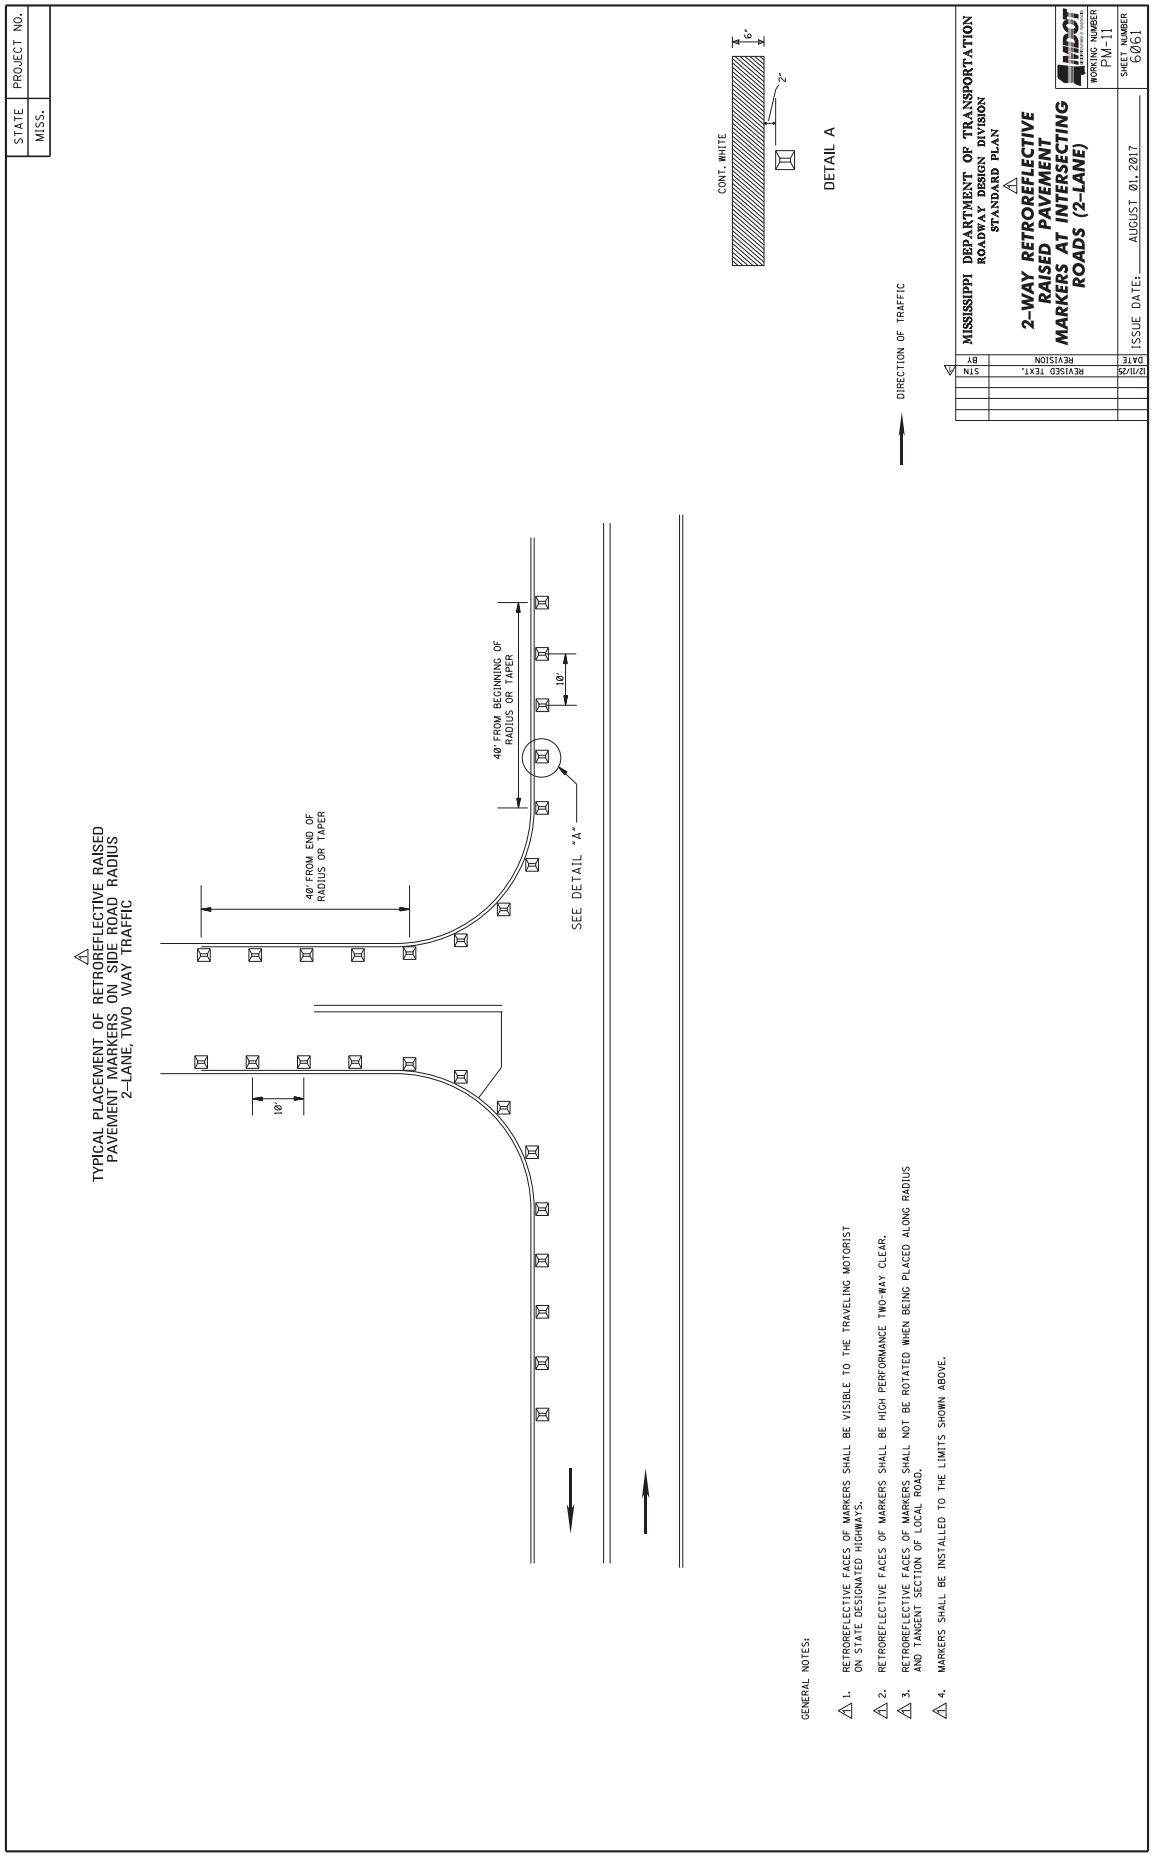

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
2-WAY RETROREFLECTIVE RAISED PAVEMENT MARKERS AT INTERSECTING ROADS (2-LANE)
WORKING NUMBER PM-11
SHEET NUMBER 6061
ISSUE DATE: AUGUST 01, 2017
REVISED TEXT.
DIRECTION OF TRAFFIC
DETAIL A
CONT. WHITE
6"
2"
TYPICAL PLACEMENT OF RETROREFLECTIVE RAISED PAVEMENT MARKERS ON SIDE ROAD RADIUS 2-LANE, TWO WAY TRAFFIC
40' FROM END OF RADIUS OR TAPER
40' FROM BEGINNING OF RADIUS OR TAPER
10'
SEE DETAIL "A"
GENERAL NOTES:
1. RETROREFLECTIVE FACES OF MARKERS SHALL BE VISIBLE TO THE TRAVELING MOTORIST ON STATE DESIGNATED HIGHWAYS.
2. RETROREFLECTIVE FACES OF MARKERS SHALL BE HIGH PERFORMANCE TWO-WAY CLEAR.
3. RETROREFLECTIVE FACES OF MARKERS SHALL NOT BE ROTATED WHEN BEING PLACED ALONG RADIUS AND TANGENT SECTION OF LOCAL ROAD.
4. MARKERS SHALL BE INSTALLED TO THE LIMITS SHOWN ABOVE.

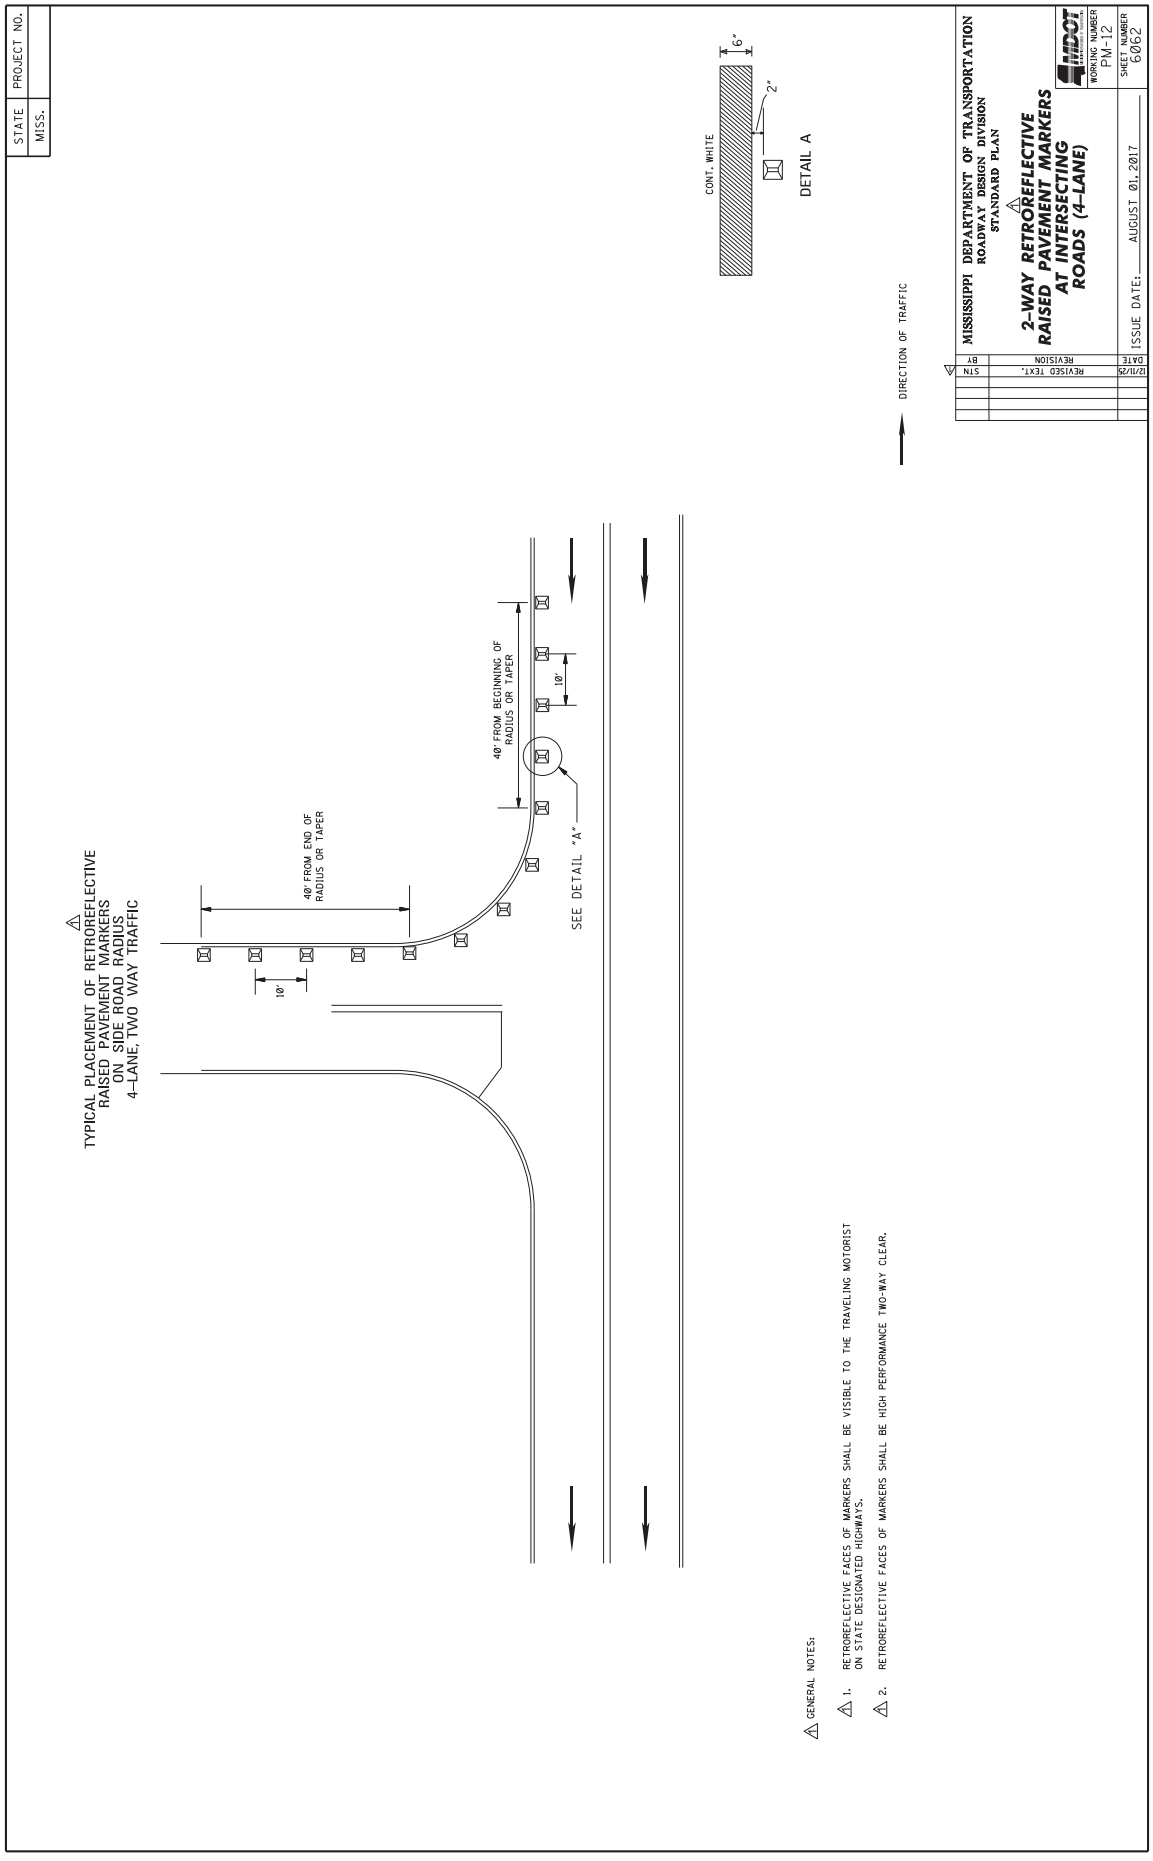

STATE
MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
2-WAY RETROREFLECTIVE RAISED PAVEMENT MARKERS AT INTERSECTING ROADS (4-LANE)
WORKING NUMBER PM-12
SHEET NUMBER 6062
ISSUE DATE: AUGUST 01, 2017
DATE
REVISION
BY
12/11/20
REVISED TEXT.
STM
TYPICAL PLACEMENT OF RETROREFLECTIVE RAISED PAVEMENT MARKERS ON SIDE ROAD RADIUS 4-LANE, TWO WAY TRAFFIC
40' FROM END OF RADIUS OR TAPER
40' FROM BEGINNING OF RADIUS OR TAPER
10'
10'
SEE DETAIL "A"
DIRECTION OF TRAFFIC
CONT. WHITE
6"
2"
DETAIL A
GENERAL NOTES:
1. RETROREFLECTIVE FACES OF MARKERS SHALL BE VISIBLE TO THE TRAVELING MOTORIST ON STATE DESIGNATED HIGHWAYS.
2. RETROREFLECTIVE FACES OF MARKERS SHALL BE HIGH PERFORMANCE TWO-WAY CLEAR.

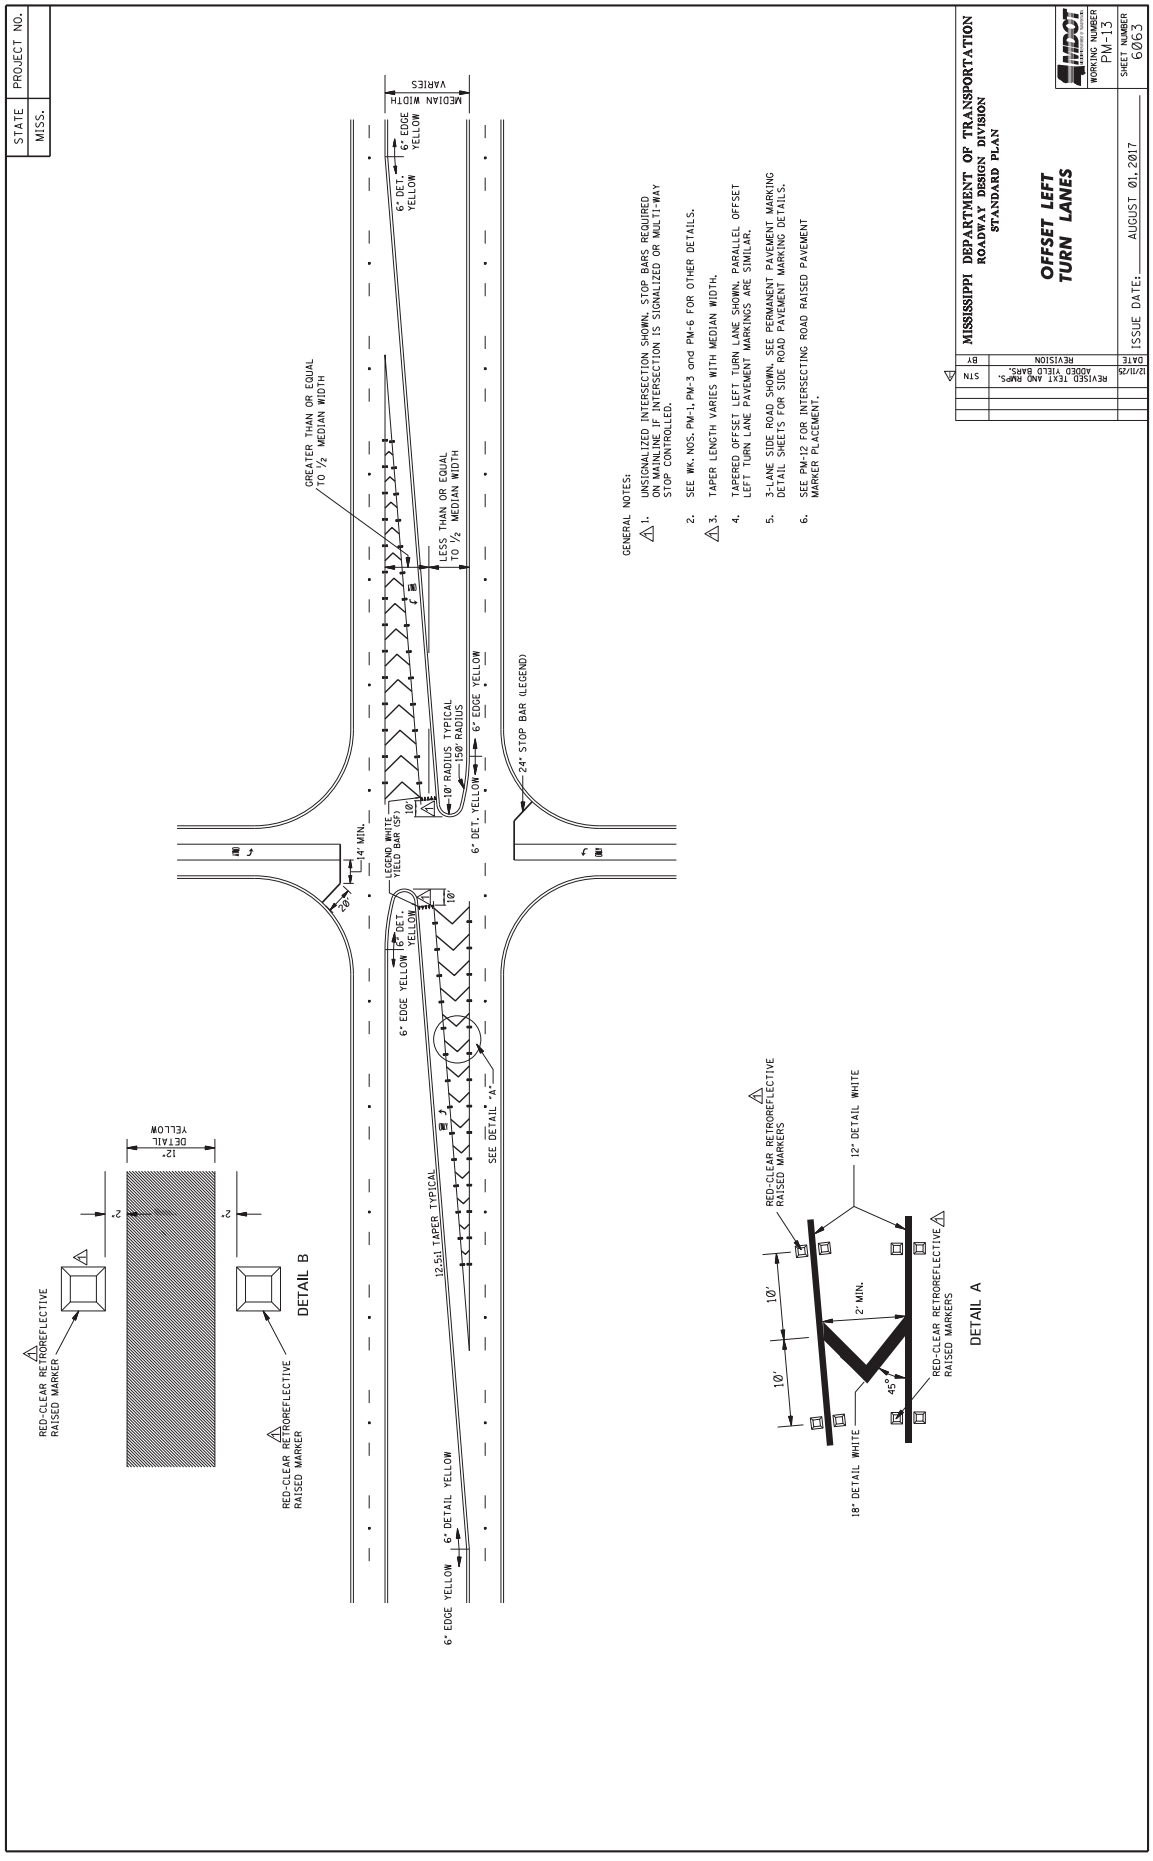
STATE MISS.
PROJECT NO.
MEDIAN WIDTH VARIES
6" EDGE YELLOW
6" DET. YELLOW
GREATER THAN OR EQUAL TO ½ MEDIAN WIDTH
LESS THAN OR EQUAL TO ½ MEDIAN WIDTH
10' RADIUS TYPICAL
150' RADIUS
6" EDGE YELLOW
6" DET. YELLOW
24" STOP BAR (LEGEND)
LEGEND WHITE YIELD BAR (SF)
10'
14' MIN.
20'
6" EDGE YELLOW
6" DET. YELLOW
12.5% TAPER TYPICAL
SEE DETAIL "A"
6" EDGE YELLOW
6" DETAIL YELLOW
GENERAL NOTES:
1. UNSIGNALIZED INTERSECTION SHOWN. STOP BARS REQUIRED ONLY WHERE INTERSECTION IS SIGNALIZED OR MULTI-WAY STOP CONTROLLED.
2. SEE MK. NOS. PM-1, PM-3 and PM-6 FOR OTHER DETAILS.
3. TAPER LENGTH VARIES WITH MEDIAN WIDTH.
4. TAPERED OFFSET LEFT TURN LANE SHOWN. PARALLEL OFFSET LEFT TURN LANE PAVEMENT MARKINGS ARE SIMILAR.
5. 3-LANE SIDE ROAD SHOWN. SEE PERMANENT PAVEMENT MARKING DETAIL SHEETS FOR SIDE ROAD PAVEMENT MARKING DETAILS.
6. SEE PM-12 FOR INTERSECTING ROAD RAISED PAVEMENT MARKER PLACEMENT.
RED-CLEAR RETROREFLECTIVE RAISED MARKER
12" DETAIL YELLOW
2"
2"
DETAIL B
RED-CLEAR RETROREFLECTIVE RAISED MARKER
RED-CLEAR RETROREFLECTIVE RAISED MARKERS
12" DETAIL WHITE
10'
10'
2' MIN.
45°
RED-CLEAR RETROREFLECTIVE RAISED MARKERS
18" DETAIL WHITE
DETAIL A
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
OFFSET LEFT TURN LANES
WORKING NUMBER PM-13
SHEET NUMBER 6063
ISSUE DATE: AUGUST 01, 2017
BY DATE REVISION
STN 12/11/29 REVISED TEXT AND DWGS, ADDED YIELD BARS.

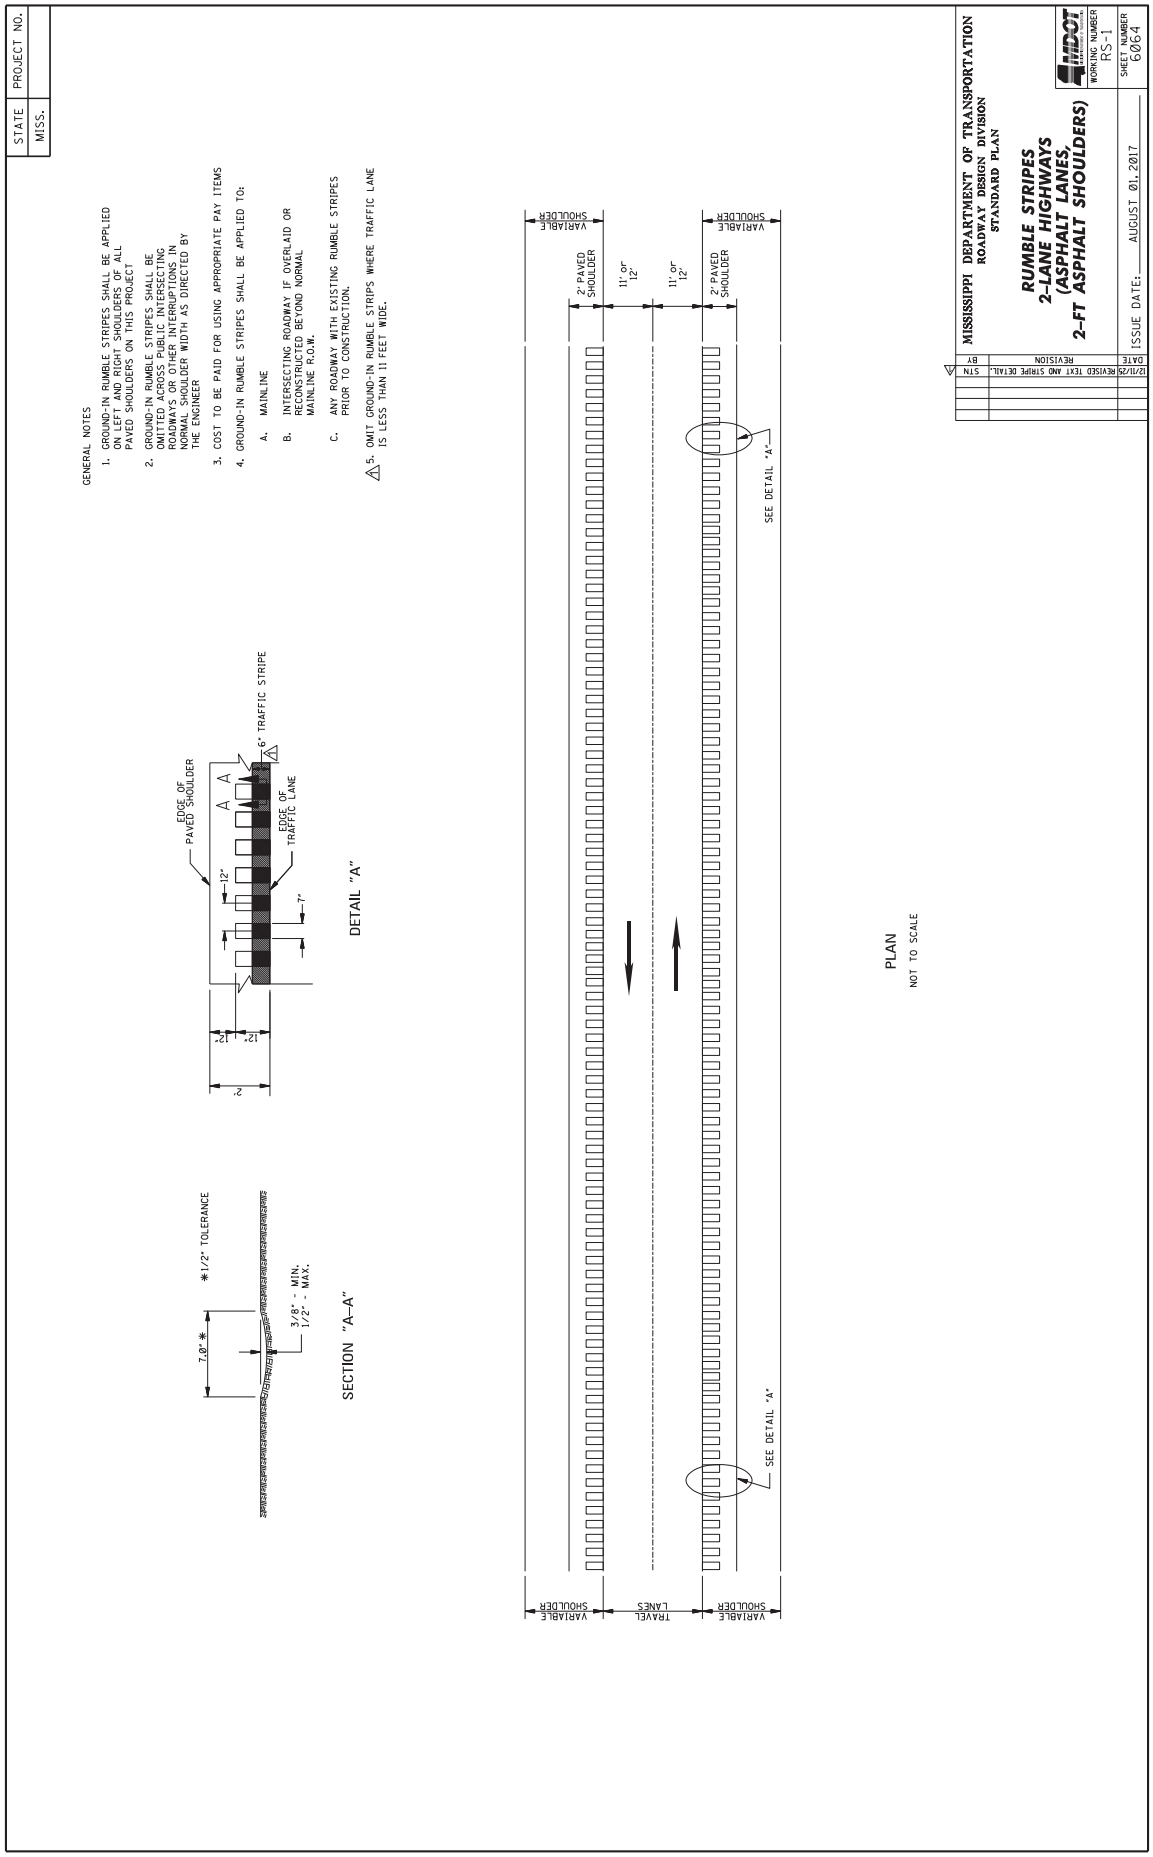
STATE
MISS.
PROJECT NO.
GENERAL NOTES
1. GROUND-IN RUMBLE STRIPES SHALL BE APPLIED ON LEFT AND RIGHT SHOULDERS OF ALL PAVED SHOULDERS ON THIS PROJECT
2. GROUND-IN RUMBLE STRIPES SHALL BE OMITTED ACROSS PUBLIC INTERSECTING ROADWAYS OR OTHER INTERRUPTIONS IN NORMAL SHOULDER WIDTH AS DIRECTED BY THE ENGINEER
3. COST TO BE PAID FOR USING APPROPRIATE PAY ITEMS
4. GROUND-IN RUMBLE STRIPES SHALL BE APPLIED TO:
A. MAINLINE
B. INTERSECTING ROADWAY IF OVERLAID OR RECONSTRUCTED BEYOND NORMAL MAINLINE R.O.W.
C. ANY ROADWAY WITH EXISTING RUMBLE STRIPES PRIOR TO CONSTRUCTION.
5. OMIT GROUND-IN RUMBLE STRIPS WHERE TRAFFIC LANE IS LESS THAN 11 FEET WIDE.
EDGE OF PAVED SHOULDER
6" TRAFFIC STRIPE
EDGE OF TRAFFIC LANE
12"
7"
DETAIL "A"
7.0"*
*1/2" TOLERANCE
3/8" - MIN.
1/2" - MAX.
SECTION "A–A"
VARIABLE SHOULDER
2' PAVED SHOULDER
11' or 12'
TRAVEL LANES
SEE DETAIL 'A'
PLAN
NOT TO SCALE
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
RUMBLE STRIPES
2-LANE HIGHWAYS
(ASPHALT LANES,
2-FT ASPHALT SHOULDERS)
WORKING NUMBER
RS-1
SHEET NUMBER
6064
ISSUE DATE: AUGUST 01, 2017
STN
BY
REVISION
DATE
12/11/25 REVISED TEXT AND STRIPE DETAIL.

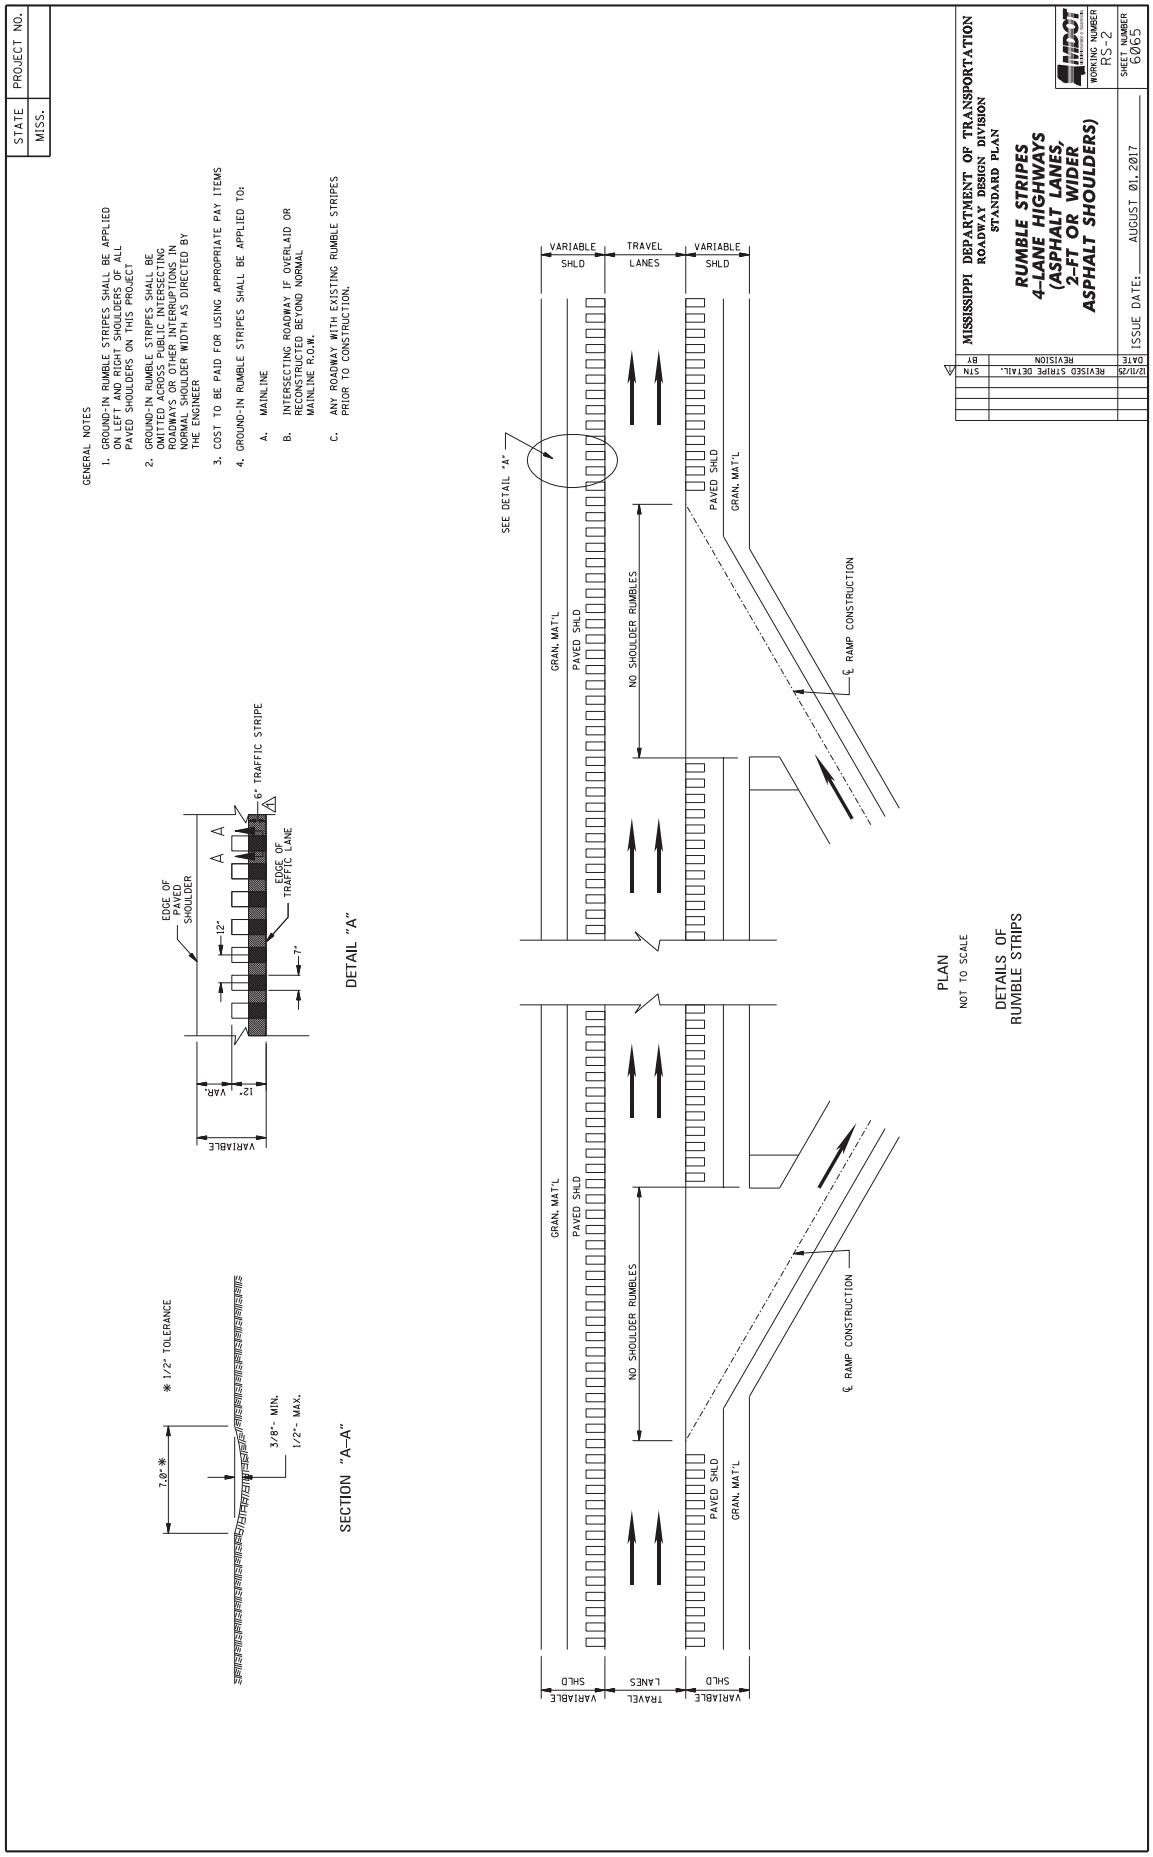
STATE MISS.
PROJECT NO.
GENERAL NOTES
1. GROUND-IN RUMBLE STRIPES SHALL BE APPLIED ON LEFT AND RIGHT SHOULDERS OF ALL PAVED SHOULDERS ON THIS PROJECT
2. GROUND-IN RUMBLE STRIPES SHALL BE OMITTED ACROSS PUBLIC INTERSECTING ROADWAYS OR OTHER INTERRUPTIONS IN NORMAL SHOULDER WIDTH AS DIRECTED BY THE ENGINEER
3. COST TO BE PAID FOR USING APPROPRIATE PAY ITEMS
4. GROUND-IN RUMBLE STRIPES SHALL BE APPLIED TO:
A. MAINLINE
B. INTERSECTING ROADWAY IF OVERLAID OR RECONSTRUCTED BEYOND NORMAL MAINLINE R.O.W.
C. ANY ROADWAY WITH EXISTING RUMBLE STRIPES PRIOR TO CONSTRUCTION.
6" TRAFFIC STRIPE
EDGE OF PAVED SHOULDER
EDGE OF TRAFFIC LANE
12"
7"
12" VAR.
VARIABLE
DETAIL "A"
7.0"*
* 1/2" TOLERANCE
3/8"- MIN.
1/2"- MAX.
SECTION "A-A"
VARIABLE SHLD
TRAVEL LANES
VARIABLE SHLD
SEE DETAIL "A"
GRAN. MAT'L
PAVED SHLD
NO SHOULDER RUMBLES
℄ RAMP CONSTRUCTION
PLAN
NOT TO SCALE
DETAILS OF RUMBLE STRIPS
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
RUMBLE STRIPES
4-LANE HIGHWAYS
(ASPHALT LANES,
2-FT OR WIDER
ASPHALT SHOULDERS)
WORKING NUMBER RS-2
SHEET NUMBER 6065
ISSUE DATE: AUGUST 01, 2017
STN BY DATE REVISION
12/11/20 REVISED STRIPE DETAIL.

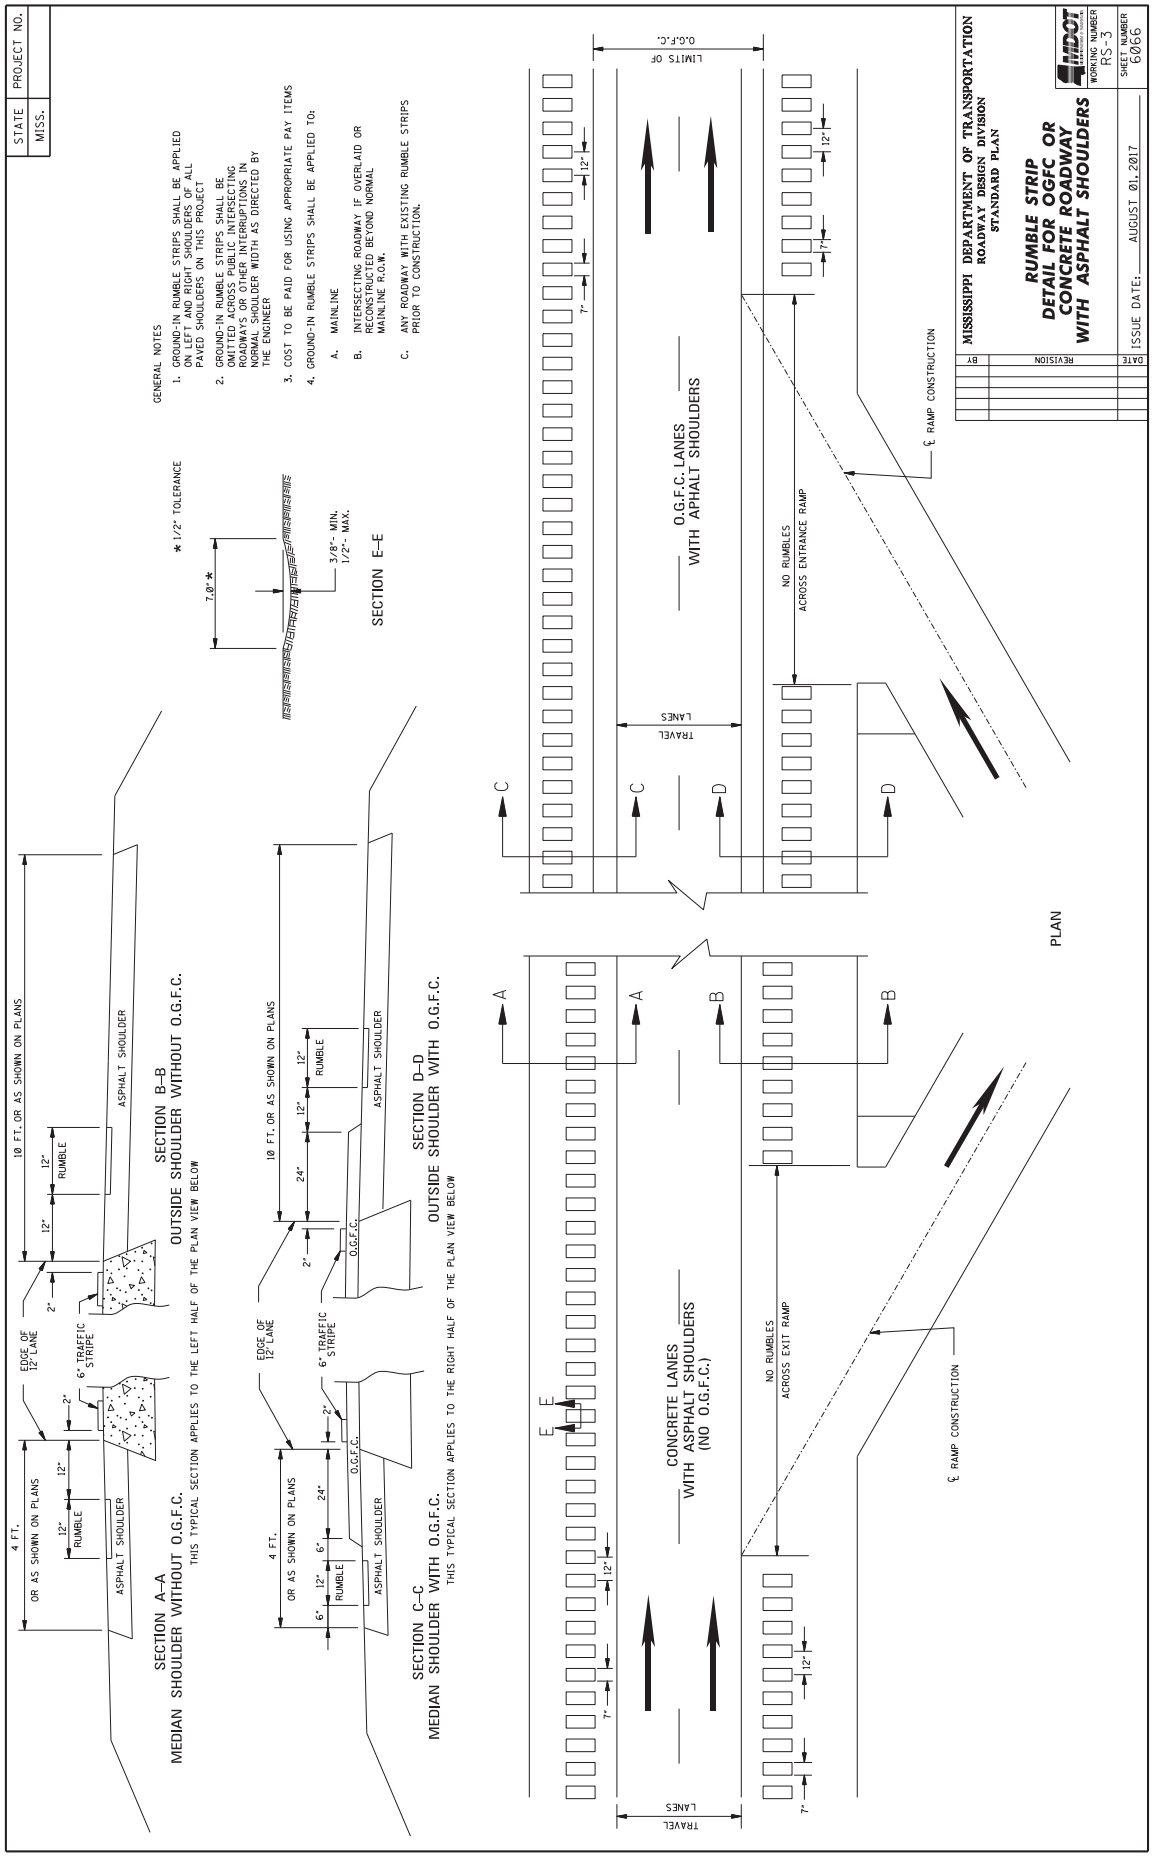
STATE MISS.
PROJECT NO.
GENERAL NOTES
1. GROUND-IN RUMBLE STRIPS SHALL BE APPLIED ON LEFT AND RIGHT SHOULDERS OF ALL PAVED SHOULDERS ON THIS PROJECT
2. GROUND-IN RUMBLE STRIPS SHALL BE OMITTED ACROSS PUBLIC INTERSECTING ROADWAYS OR OTHER INTERRUPTIONS IN NORMAL SHOULDER WIDTH AS DIRECTED BY THE ENGINEER
3. COST TO BE PAID FOR USING APPROPRIATE PAY ITEMS
4. GROUND-IN RUMBLE STRIPS SHALL BE APPLIED TO:
A. MAINLINE
B. INTERSECTING ROADWAY IF OVERLAID OR RECONSTRUCTED BEYOND NORMAL MAINLINE R.O.W.
C. ANY ROADWAY WITH EXISTING RUMBLE STRIPS PRIOR TO CONSTRUCTION.
* 1/2" TOLERANCE
7.0"*
3/8"- MIN.
1/2"- MAX.
SECTION E–E
SECTION A–A
MEDIAN SHOULDER WITHOUT O.G.F.C.
THIS TYPICAL SECTION APPLIES TO THE LEFT HALF OF THE PLAN VIEW BELOW
4 FT.
OR AS SHOWN ON PLANS
EDGE OF 12' LANE
6" TRAFFIC STRIPE
2"
12" RUMBLE
ASPHALT SHOULDER
SECTION B–B
OUTSIDE SHOULDER WITHOUT O.G.F.C.
10 FT. OR AS SHOWN ON PLANS
12" RUMBLE
ASPHALT SHOULDER
SECTION C–C
MEDIAN SHOULDER WITH O.G.F.C.
THIS TYPICAL SECTION APPLIES TO THE RIGHT HALF OF THE PLAN VIEW BELOW
6" 12" 6" 24"
O.G.F.C.
SECTION D–D
OUTSIDE SHOULDER WITH O.G.F.C.
24"
PLAN
CONCRETE LANES
WITH ASPHALT SHOULDERS
(NO O.G.F.C.)
O.G.F.C. LANES
WITH APHALT SHOULDERS
NO RUMBLES
ACROSS EXIT RAMP
NO RUMBLES
ACROSS ENTRANCE RAMP
℄ RAMP CONSTRUCTION
TRAVEL LANES
LIMITS OF O.G.F.C.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
RUMBLE STRIP
DETAIL FOR OGFC OR
CONCRETE ROADWAY
WITH ASPHALT SHOULDERS
MDOT
WORKING NUMBER RS-3
SHEET NUMBER 6066
ISSUE DATE: AUGUST 01, 2017
DATE
REVISION
BY

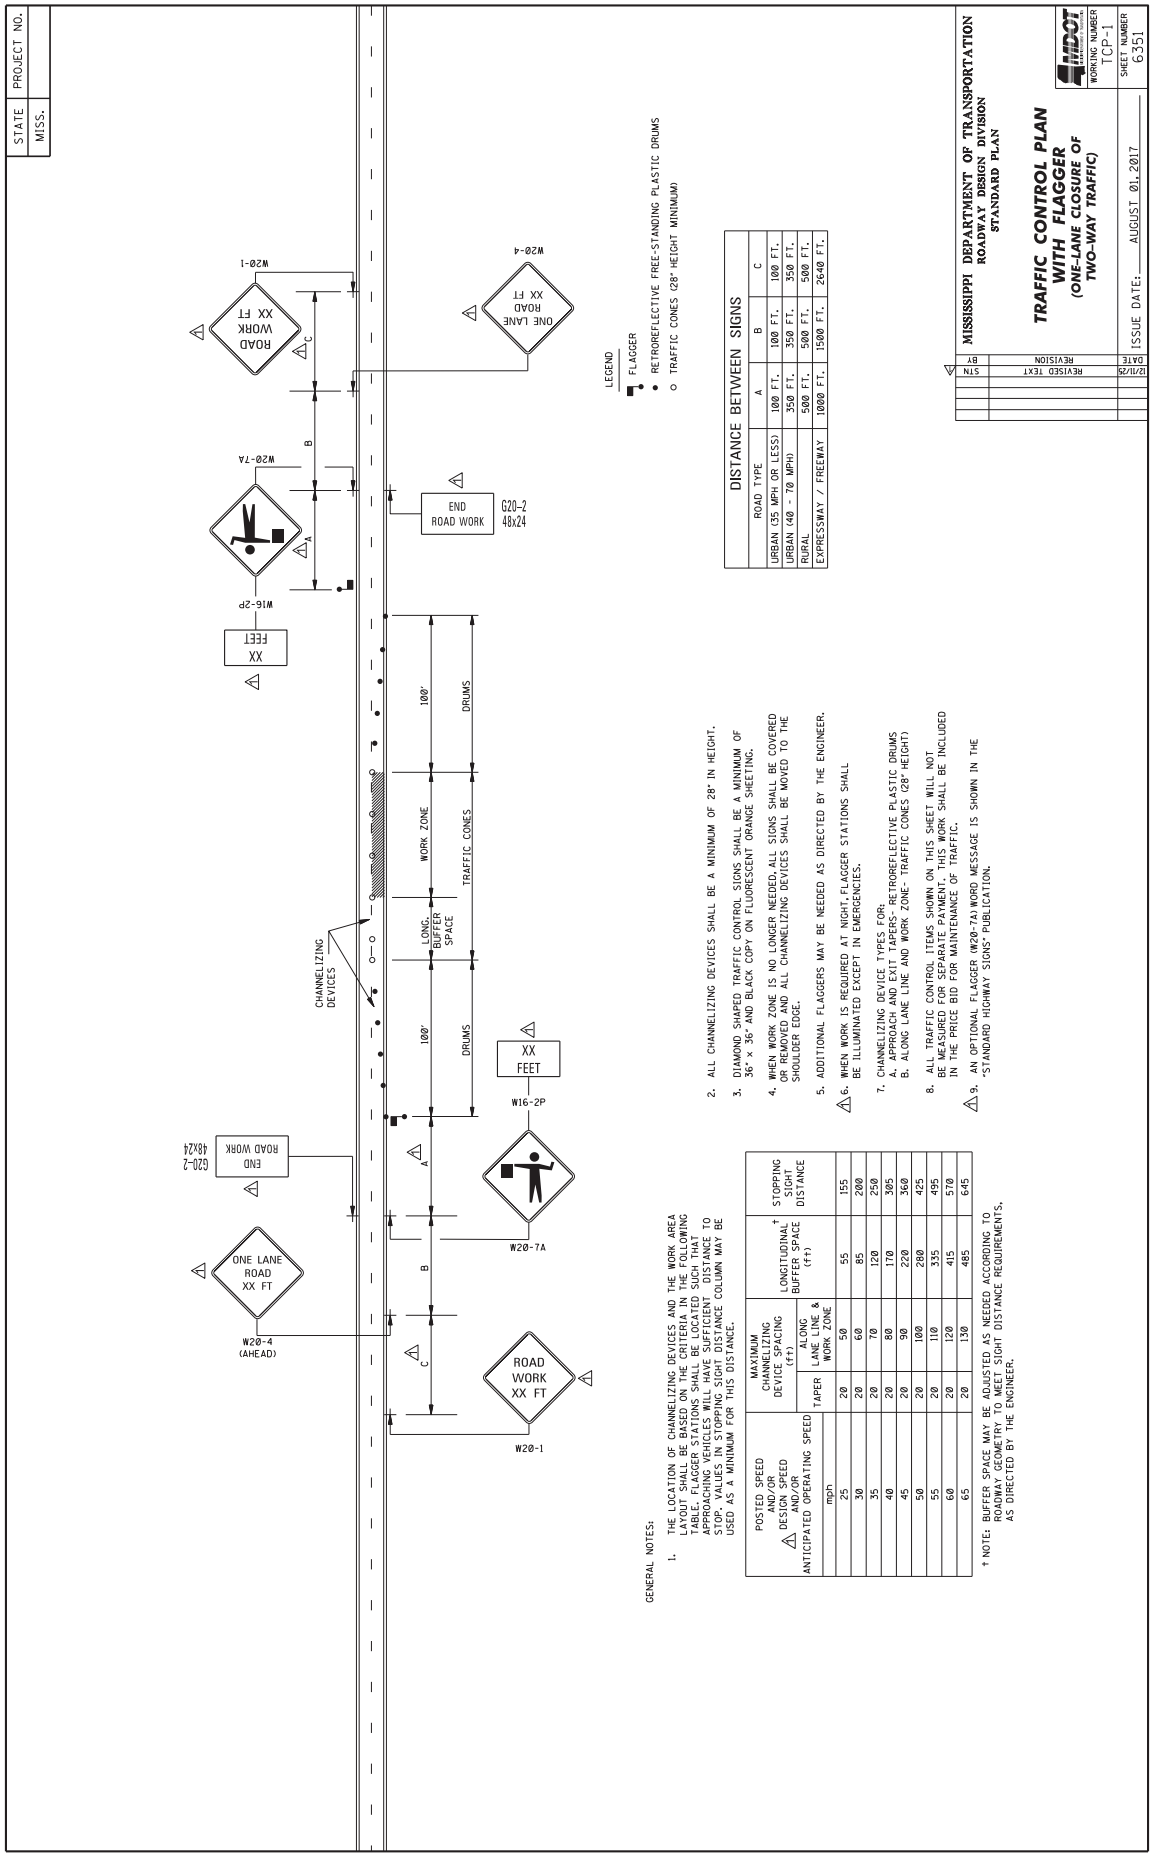


GENERAL NOTES:

1. THE LOCATION OF CHANNELIZING DEVICES AND THE WORK AREA LAYOUT SHALL BE BASED ON THE CRITERIA IN THE FOLLOWING TABLE. FLAGGER STATIONS SHALL BE LOCATED SUCH THAT APPROACHING VEHICLES WILL HAVE SUFFICIENT DISTANCE TO STOP. VALUES IN STOPPING SIGHT DISTANCE COLUMN MAY BE USED AS A MINIMUM FOR THIS DISTANCE.

POSTED SPEED AND/OR ⚠ DESIGN SPEED AND/OR ANTICIPATED OPERATING SPEED	MAXIMUM CHANNELIZING DEVICE SPACING (ft)		LONGITUDINAL † BUFFER SPACE (ft)	STOPPING SIGHT DISTANCE
	TAPER	ALONG LANE LINE & WORK ZONE		
mph				
25	20	50	55	155
30	20	60	85	200
35	20	70	120	250
40	20	80	170	305
45	20	90	220	360
50	20	100	280	425
55	20	110	335	495
60	20	120	415	570
65	20	130	485	645

† NOTE: BUFFER SPACE MAY BE ADJUSTED AS NEEDED ACCORDING TO ROADWAY GEOMETRY TO MEET SIGHT DISTANCE REQUIREMENTS, AS DIRECTED BY THE ENGINEER.

2. ALL CHANNELIZING DEVICES SHALL BE A MINIMUM OF 28" IN HEIGHT.
3. DIAMOND SHAPED TRAFFIC CONTROL SIGNS SHALL BE A MINIMUM OF 36" × 36" AND BLACK COPY ON FLUORESCENT ORANGE SHEETING.
4. WHEN WORK ZONE IS NO LONGER NEEDED, ALL SIGNS SHALL BE COVERED OR REMOVED AND ALL CHANNELIZING DEVICES SHALL BE MOVED TO THE SHOULDER EDGE.
5. ADDITIONAL FLAGGERS MAY BE NEEDED AS DIRECTED BY THE ENGINEER.
⚠ 6. WHEN WORK IS REQUIRED AT NIGHT, FLAGGER STATIONS SHALL BE ILLUMINATED EXCEPT IN EMERGENCIES.
7. CHANNELIZING DEVICE TYPES FOR:
   A. APPROACH AND EXIT TAPERS- RETROREFLECTIVE PLASTIC DRUMS
   B. ALONG LANE LINE AND WORK ZONE- TRAFFIC CONES (28" HEIGHT)
8. ALL TRAFFIC CONTROL ITEMS SHOWN ON THIS SHEET WILL NOT BE MEASURED FOR SEPARATE PAYMENT. THIS WORK SHALL BE INCLUDED IN THE PRICE BID FOR MAINTENANCE OF TRAFFIC.
⚠ 9. AN OPTIONAL FLAGGER (W20-7A) WORD MESSAGE IS SHOWN IN THE "STANDARD HIGHWAY SIGNS" PUBLICATION.

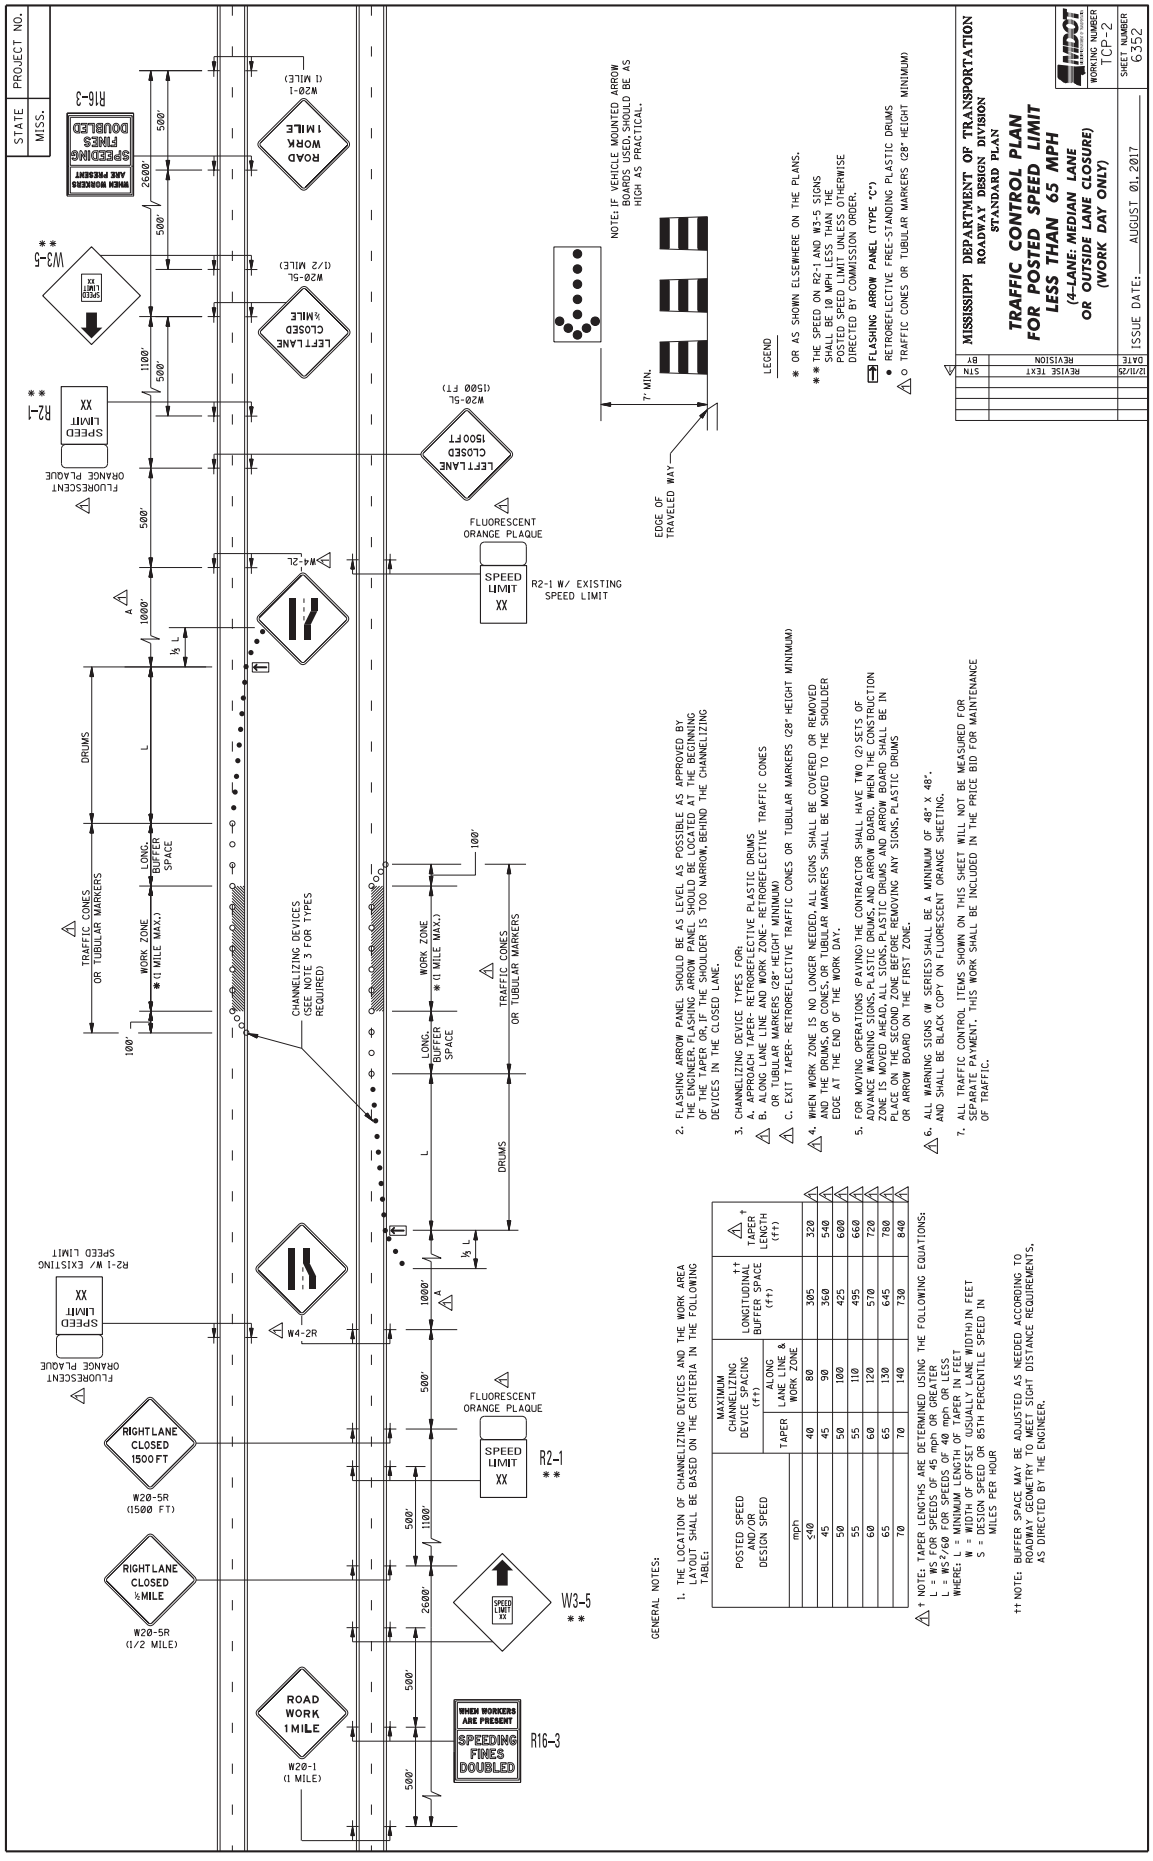

GENERAL NOTES:


1. THE LOCATION OF CHANNELIZING DEVICES AND THE WORK AREA LAYOUT SHALL BE BASED ON THE CRITERIA IN THE FOLLOWING TABLE:


POSTED SPEED AND/OR DESIGN SPEED		MAXIMUM CHANNELIZING DEVICE SPACING (ft)		LONGITUDINAL BUFFER SPACE (ft)	† TAPER LENGTH (ft)
	TAPER	ALONG LANE LINE & WORK ZONE			
mph					
≤40	40	80		305	320
45	45	90		360	540
50	50	100		425	600
55	55	110		495	660
60	60	120		570	720
65	65	130		645	780
70	70	140		730	840


† NOTE: TAPER LENGTHS ARE DETERMINED USING THE FOLLOWING EQUATIONS:
L = WS FOR SPEEDS OF 45 mph OR GREATER
L = WS²/60 FOR SPEEDS OF 40 mph OR LESS
WHERE: L = MINIMUM LENGTH OF TAPER IN FEET
W = WIDTH OF OFFSET (USUALLY LANE WIDTH) IN FEET
S = DESIGN SPEED OR 85TH PERCENTILE SPEED IN MILES PER HOUR


†† NOTE: BUFFER SPACE MAY BE ADJUSTED AS NEEDED ACCORDING TO ROADWAY GEOMETRY TO MEET SIGHT DISTANCE REQUIREMENTS, AS DIRECTED BY THE ENGINEER.


2. FLASHING ARROW PANEL SHOULD BE AS LEVEL AS POSSIBLE AS APPROVED BY THE ENGINEER. FLASHING ARROW PANEL SHOULD BE LOCATED AT THE BEGINNING OF THE TAPER OR, IF THE SHOULDER IS TOO NARROW, BEHIND THE CHANNELIZING DEVICES IN THE CLOSED LANE.
3. CHANNELIZING DEVICE TYPES FOR:
   A. APPROACH TAPER- RETROREFLECTIVE PLASTIC DRUMS
   B. ALONG LANE LINE AND WORK ZONE- RETROREFLECTIVE TRAFFIC CONES OR TUBULAR MARKERS (28" HEIGHT MINIMUM)
   C. EXIT TAPER- RETROREFLECTIVE TRAFFIC CONES OR TUBULAR MARKERS (28" HEIGHT MINIMUM)
4. WHEN WORK ZONE IS NO LONGER NEEDED, ALL SIGNS SHALL BE COVERED OR REMOVED AND THE DRUMS OR CONES OR TUBULAR MARKERS SHALL BE MOVED TO THE SHOULDER EDGE AT THE END OF THE WORK DAY.
5. FOR MOVING OPERATIONS (PAVING) THE CONTRACTOR SHALL HAVE TWO (2) SETS OF ADVANCE WARNING SIGNS, PLASTIC DRUMS, AND ARROW BOARD. WHEN THE CONSTRUCTION ZONE IS MOVED AHEAD, ALL SIGNS, PLASTIC DRUMS AND ARROW BOARD SHALL BE IN PLACE FOR THE SECOND SET BEFORE REMOVING ANY SIGNS, PLASTIC DRUMS OR ARROW BOARD ON THE FIRST ZONE.
6. ALL WARNING SIGNS (W SERIES) SHALL BE A MINIMUM OF 48" X 48", AND SHALL BE BLACK COPY ON FLUORESCENT ORANGE SHEETING.
7. ALL TRAFFIC CONTROL ITEMS SHOWN ON THIS SHEET WILL NOT BE MEASURED FOR SEPARATE PAYMENT. THIS WORK SHALL BE INCLUDED IN THE PRICE BID FOR MAINTENANCE OF TRAFFIC.

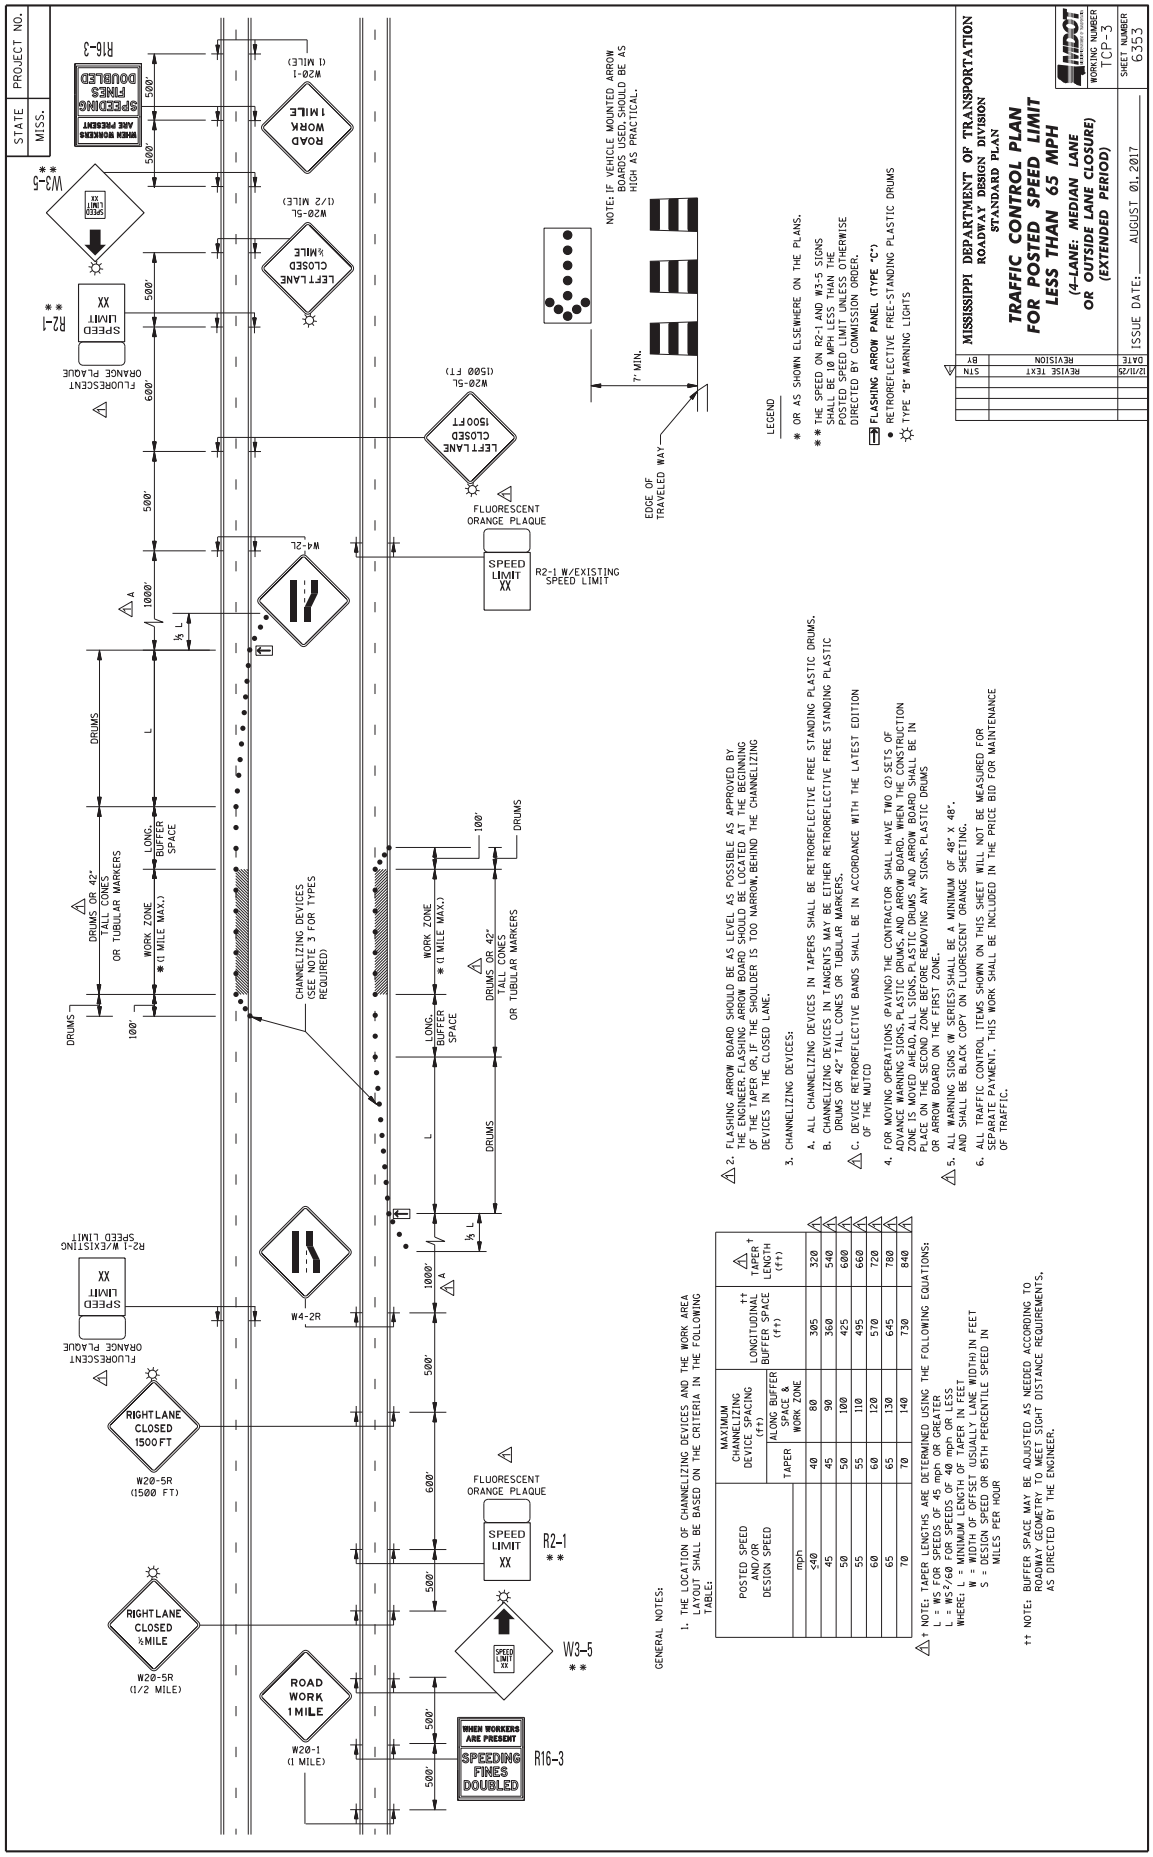
STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
TRAFFIC CONTROL PLAN
FOR POSTED SPEED LIMIT
LESS THAN 65 MPH
(4-LANE: MEDIAN LANE OR OUTSIDE LANE CLOSURE)
(EXTENDED PERIOD)
WORKING NUMBER TCP-3
SHEET NUMBER 6353
ISSUE DATE: AUGUST 01, 2017
DATE BY REVISION STN
12/11/20 REVISE TEXT
LEGEND
* OR AS SHOWN ELSEWHERE ON THE PLANS.
** THE SPEED ON R2-1 AND W3-5 SIGNS SHALL BE 10 MPH LESS THAN THE POSTED SPEED LIMIT UNLESS OTHERWISE DIRECTED BY COMMISSION ORDER.
FLASHING ARROW PANEL (TYPE "C")
RETROREFLECTIVE FREE-STANDING PLASTIC DRUMS
TYPE "B" WARNING LIGHTS
NOTE: IF VEHICLE MOUNTED ARROW BOARDS USED, SHOULD BE AS HIGH AS PRACTICAL.
7' MIN.
EDGE OF TRAVELED WAY
ROAD WORK 1 MILE
W20-1 (1 MILE)
LEFT LANE CLOSED ½ MILE
W20-5L (1/2 MILE)
LEFT LANE CLOSED 1500 FT
W20-5L (1500 FT)
RIGHT LANE CLOSED ½ MILE
W20-5R (1/2 MILE)
RIGHT LANE CLOSED 1500 FT
W20-5R (1500 FT)
WHEN WORKERS ARE PRESENT
SPEEDING FINES DOUBLED
R16-3
SPEED LIMIT XX
R2-1 **
FLUORESCENT ORANGE PLAQUE
R2-1 W/EXISTING SPEED LIMIT
W3-5 **
W4-2R
W4-2L
DRUMS
DRUMS OR 42" TALL CONES OR TUBULAR MARKERS
LONG. BUFFER SPACE
WORK ZONE * (1 MILE MAX.)
CHANNELIZING DEVICES (SEE NOTE 3 FOR TYPES REQUIRED)
100'
500'
600'
1000'
A
½ L
L
GENERAL NOTES:
1. THE LOCATION OF CHANNELIZING DEVICES AND THE WORK AREA LAYOUT SHALL BE BASED ON THE CRITERIA IN THE FOLLOWING TABLE:
POSTED SPEED / DESIGN SPEED | MAXIMUM CHANNELIZING DEVICE SPACING (ft) TAPER | ALONG BUFFER SPACE & WORK ZONE | LONGITUDINAL †† BUFFER SPACE (ft) | †† TAPER LENGTH (ft)
mph
≤40 40 80 305 320
45 45 90 360 540
50 50 100 425 600
55 55 110 495 660
60 60 120 570 720
65 65 130 645 780
70 70 140 730 840
† NOTE: TAPER LENGTHS ARE DETERMINED USING THE FOLLOWING EQUATIONS:
L = WS²/60 FOR SPEEDS OF 45 mph OR LESS
L = WS/60 FOR SPEEDS OF 40 mph OR LESS
WHERE: L = MINIMUM LENGTH OF TAPER IN FEET
W = WIDTH OF OFFSET (USUALLY LANE WIDTH) IN FEET
S = DESIGN SPEED OR 85TH PERCENTILE SPEED IN MILES PER HOUR
†† NOTE: BUFFER SPACE MAY BE ADJUSTED AS NEEDED ACCORDING TO ROADWAY GEOMETRY TO MEET SIGHT DISTANCE REQUIREMENTS, AS DIRECTED BY THE ENGINEER.
2. FLASHING ARROW BOARD SHOULD BE AS LEVEL AS POSSIBLE AS APPROVED BY THE ENGINEER. FLASHING ARROW BOARD SHOULD BE LOCATED AT THE BEGINNING OF THE TAPER ON THE SHOULDER IS TOO NARROW, BEHIND THE CHANNELIZING DEVICES IN THE CLOSED LANE.
3. CHANNELIZING DEVICES:
A. ALL CHANNELIZING DEVICES IN TAPERS SHALL BE RETROREFLECTIVE FREE STANDING PLASTIC DRUMS.
B. CHANNELIZING DEVICES IN TANGENTS MAY BE EITHER RETROREFLECTIVE FREE STANDING PLASTIC DRUMS OR 42" TALL CONES OR TUBULAR MARKERS.
C. DEVICE RETROREFLECTIVE BANDS SHALL BE IN ACCORDANCE WITH THE LATEST EDITION OF THE MUTCD
4. FOR MOVING OPERATIONS (PAVING) THE CONTRACTOR SHALL HAVE TWO (2) SETS OF ADVANCE WARNING SIGNS, PLASTIC DRUMS, AND ARROW BOARD. WHEN THE CONSTRUCTION ZONE IS MOVED AHEAD, ALL SIGNS, PLASTIC DRUMS AND ARROW BOARD SHALL BE IN PLACE ON THE SECOND ZONE BEFORE REMOVING ANY SIGNS, PLASTIC DRUMS OR ARROW BOARD ON THE FIRST ZONE.
5. ALL WARNING SIGNS (W SERIES) SHALL BE A MINIMUM OF 48" X 48", AND SHALL BE BLACK COPY ON FLUORESCENT ORANGE SHEETING.
6. ALL TRAFFIC CONTROL ITEMS SHOWN ON THIS SHEET WILL NOT BE MEASURED FOR SEPARATE PAYMENT. THIS WORK SHALL BE INCLUDED IN THE PRICE BID FOR MAINTENANCE OF TRAFFIC.

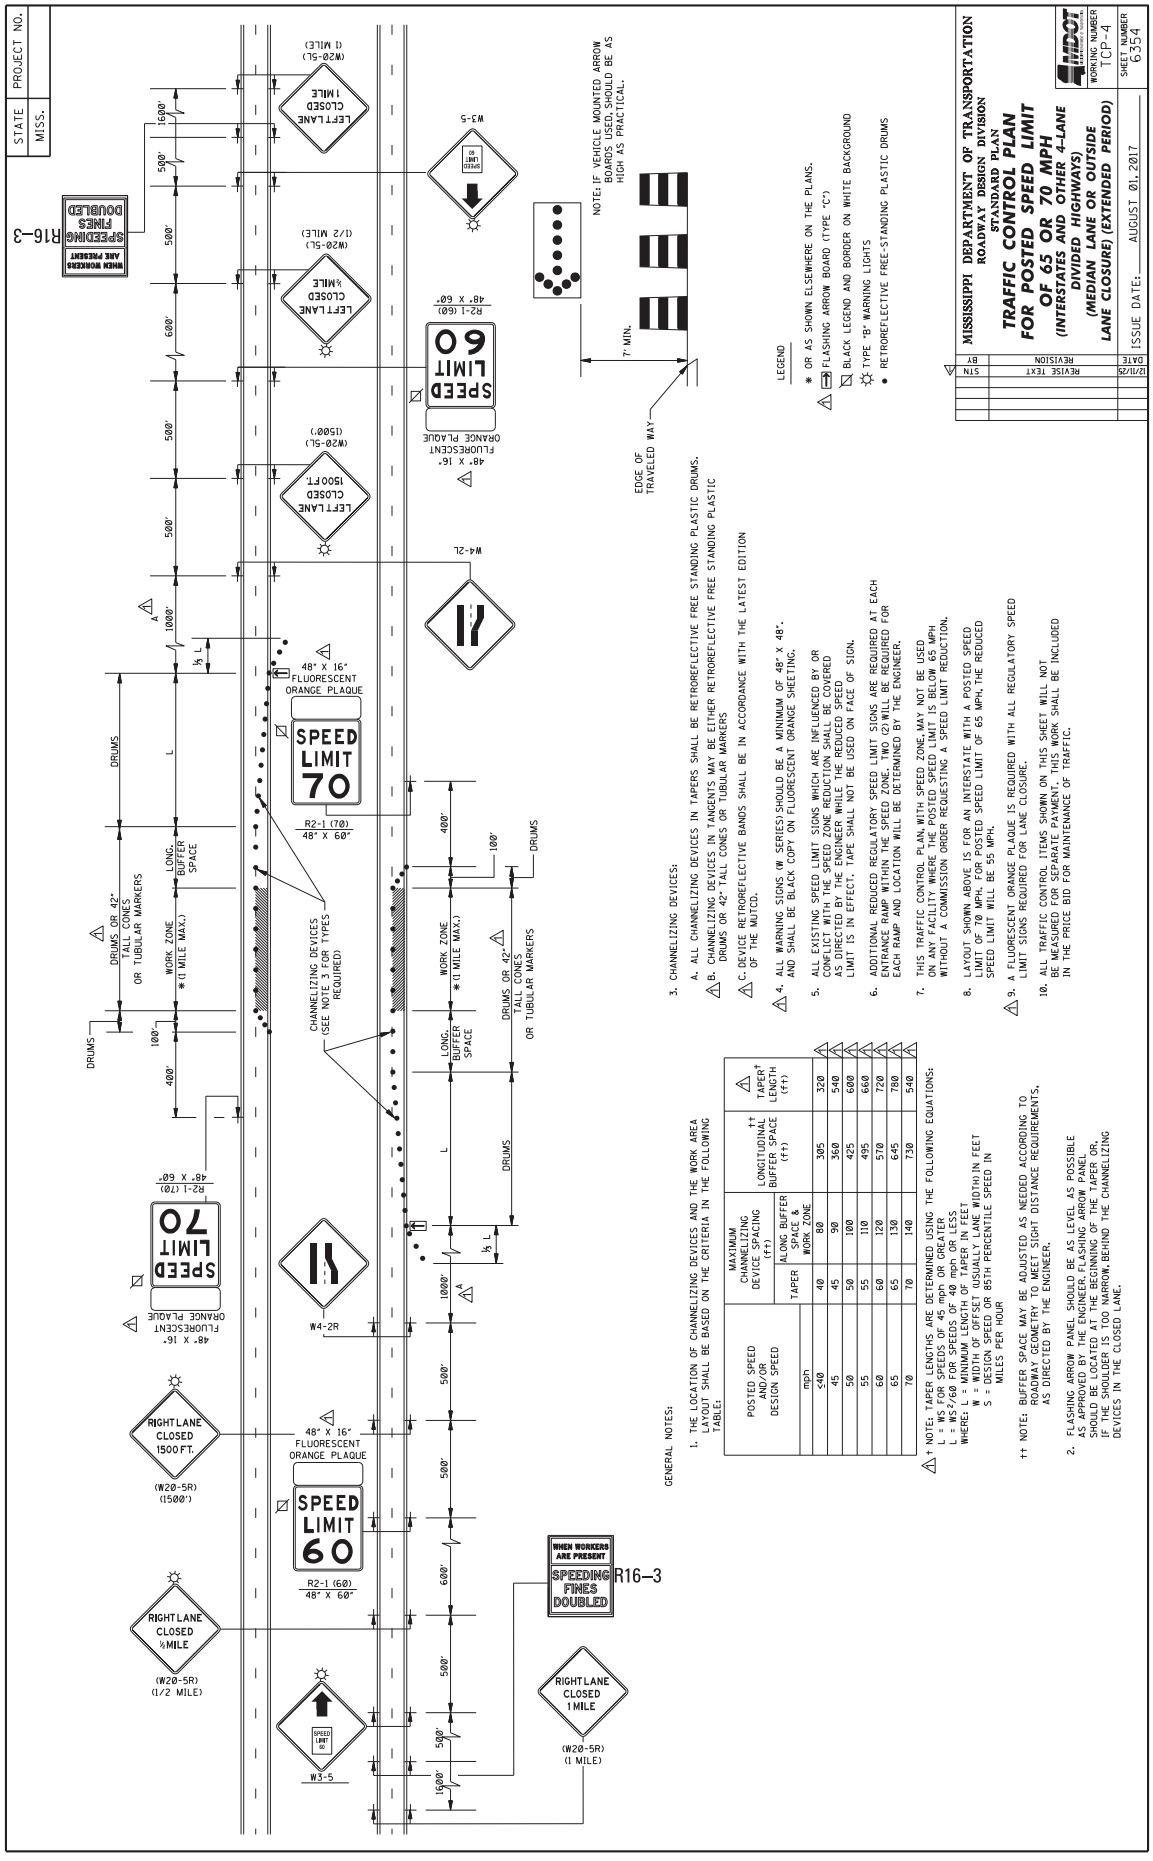

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
TRAFFIC CONTROL PLAN
FOR POSTED SPEED LIMIT
OF 65 OR 70 MPH
(INTERSTATES AND OTHER 4-LANE DIVIDED HIGHWAYS)
(MEDIAN LANE OR OUTSIDE LANE CLOSURE) (EXTENDED PERIOD)
WORKING NUMBER TCP-4
SHEET NUMBER 6354
ISSUE DATE: AUGUST 01, 2017
REVISE TEXT STN 12/11/25
LEGEND
* OR AS SHOWN ELSEWHERE ON THE PLANS.
FLASHING ARROW BOARD (TYPE "C")
BLACK LEGEND AND BORDER ON WHITE BACKGROUND
TYPE "B" WARNING LIGHTS
RETROREFLECTIVE FREE-STANDING PLASTIC DRUMS
GENERAL NOTES:
1. THE LOCATION OF CHANNELIZING DEVICES AND THE WORK AREA LAYOUT SHALL BE BASED ON THE CRITERIA IN THE FOLLOWING TABLE:
POSTED SPEED AND/OR DESIGN SPEED
MAXIMUM CHANNELIZING DEVICE SPACING (FEET)
TAPER
ALONG BUFFER SPACE & WORK ZONE
LONGITUDINAL BUFFER SPACE (ft)
TAPER† LENGTH (ft)
mph
<40 40 80 305 320
45 45 90 360 540
50 50 100 425 600
55 55 110 495 660
60 60 120 570 720
65 65 130 645 780
70 70 140 730 540
† NOTE: TAPER LENGTHS ARE DETERMINED USING THE FOLLOWING EQUATIONS:
L = WS FOR SPEEDS OF 45 mph OR GREATER
L = WS²/60 FOR SPEEDS OF 40 mph OR LESS
WHERE: L = MINIMUM LENGTH OF TAPER IN FEET
W = WIDTH OF OFFSET (USUALLY LANE WIDTH) IN FEET
S = DESIGN SPEED OR 85TH PERCENTILE SPEED IN MILES PER HOUR
†† NOTE: BUFFER SPACE MAY BE ADJUSTED AS NEEDED ACCORDING TO ROADWAY CONDITIONS TO ENSURE SIGHT DISTANCE REQUIREMENTS AS DIRECTED BY THE ENGINEER.
2. FLASHING ARROW PANEL SHOULD BE AS LEVEL AS POSSIBLE AS APPROVED BY THE ENGINEER. FLASHING ARROW PANEL SHOULD BE LOCATED AT THE BEGINNING OF THE TAPER OR, IF THE SHOULDER IS TOO NARROW, BEHIND THE CHANNELIZING DEVICES IN THE CLOSED LANE.
3. CHANNELIZING DEVICES:
A. ALL CHANNELIZING DEVICES IN TAPERS SHALL BE RETROREFLECTIVE FREE STANDING PLASTIC DRUMS.
B. CHANNELIZING DEVICES IN TANGENTS MAY BE EITHER RETROREFLECTIVE FREE STANDING PLASTIC DRUMS OR 42" TALL CONES OR TUBULAR MARKERS
C. DEVICE RETROREFLECTIVE BANDS SHALL BE IN ACCORDANCE WITH THE LATEST EDITION OF THE MUTCD.
4. ALL WARNING SIGNS (W SERIES) SHOULD BE A MINIMUM OF 48" X 48". AND SHALL BE BLACK COPY ON FLUORESCENT ORANGE SHEETING.
5. ALL EXISTING SPEED LIMIT SIGNS WHICH ARE INFLUENCED BY OR CONFLICT WITH THE SPEED ZONE REDUCTION SHALL BE COVERED AS DIRECTED BY THE ENGINEER. THE REDUCED SPEED LIMIT IS IN EFFECT. TAPE SHALL NOT BE USED ON FACE OF SIGN.
6. ADDITIONAL REDUCED REGULATORY SPEED LIMIT SIGNS ARE REQUIRED AT EACH ENTRANCE RAMP WITHIN THE SPEED ZONE. TWO (2) WILL BE REQUIRED FOR EACH RAMP AND LOCATION WILL BE DETERMINED BY THE ENGINEER.
7. THIS TRAFFIC CONTROL PLAN, WITH SPEED ZONE, MAY NOT BE USED ON ANY FACILITY WHERE THE POSTED SPEED LIMIT IS BELOW 65 MPH WITHOUT A COMMISSION ORDER REQUESTING A SPEED LIMIT REDUCTION.
8. LAYOUT SHOWN ABOVE IS FOR AN INTERSTATE WITH A POSTED SPEED LIMIT OF 70 MPH. FOR A POSTED SPEED LIMIT OF 65 MPH, THE REDUCED SPEED LIMIT WILL BE 55 MPH.
9. A FLUORESCENT ORANGE PLAQUE IS REQUIRED WITH ALL REGULATORY SPEED LIMIT SIGNS REQUIRED FOR LANE CLOSURE.
10. ALL TRAFFIC CONTROL ITEMS SHOWN ON THIS SHEET WILL NOT BE MEASURED FOR SEPARATE PAYMENT. THIS WORK SHALL BE INCLUDED IN THE PRICE BID FOR MAINTENANCE OF TRAFFIC.
NOTE: IF VEHICLE MOUNTED ARROW BOARDS USED, SHOULD BE AS HIGH AS PRACTICAL.
7' MIN.
EDGE OF TRAVELED WAY
R16-3
WHEN WORKERS ARE PRESENT
SPEEDING FINES DOUBLED
W3-5
SPEED LIMIT 60
R2-1 (60)
48" X 60"
48" X 16" FLUORESCENT ORANGE PLAQUE
W4-2R
W4-2L
SPEED LIMIT 70
R2-1 (70)
RIGHT LANE CLOSED 1500 FT.
(W20-5R) (1500')
RIGHT LANE CLOSED ½ MILE
(W20-5R) (1/2 MILE)
RIGHT LANE CLOSED 1 MILE
(W20-5R) (1 MILE)
LEFT LANE CLOSED 1 MILE
(W20-5L) (1 MILE)
LEFT LANE CLOSED ½ MILE
(W20-5L) (1/2 MILE)
LEFT LANE CLOSED 1500FT
(W20-5L) (1500')
DRUMS OR 42" TALL CONES OR TUBULAR MARKERS
WORK ZONE * (1 MILE MAX.)
LONG. BUFFER SPACE
CHANNELIZING DEVICES (SEE NOTE 3 FOR TYPES REQUIRED)
DRUMS
L
½ L
A
100'
400'
500'
600'
1000'
1500'

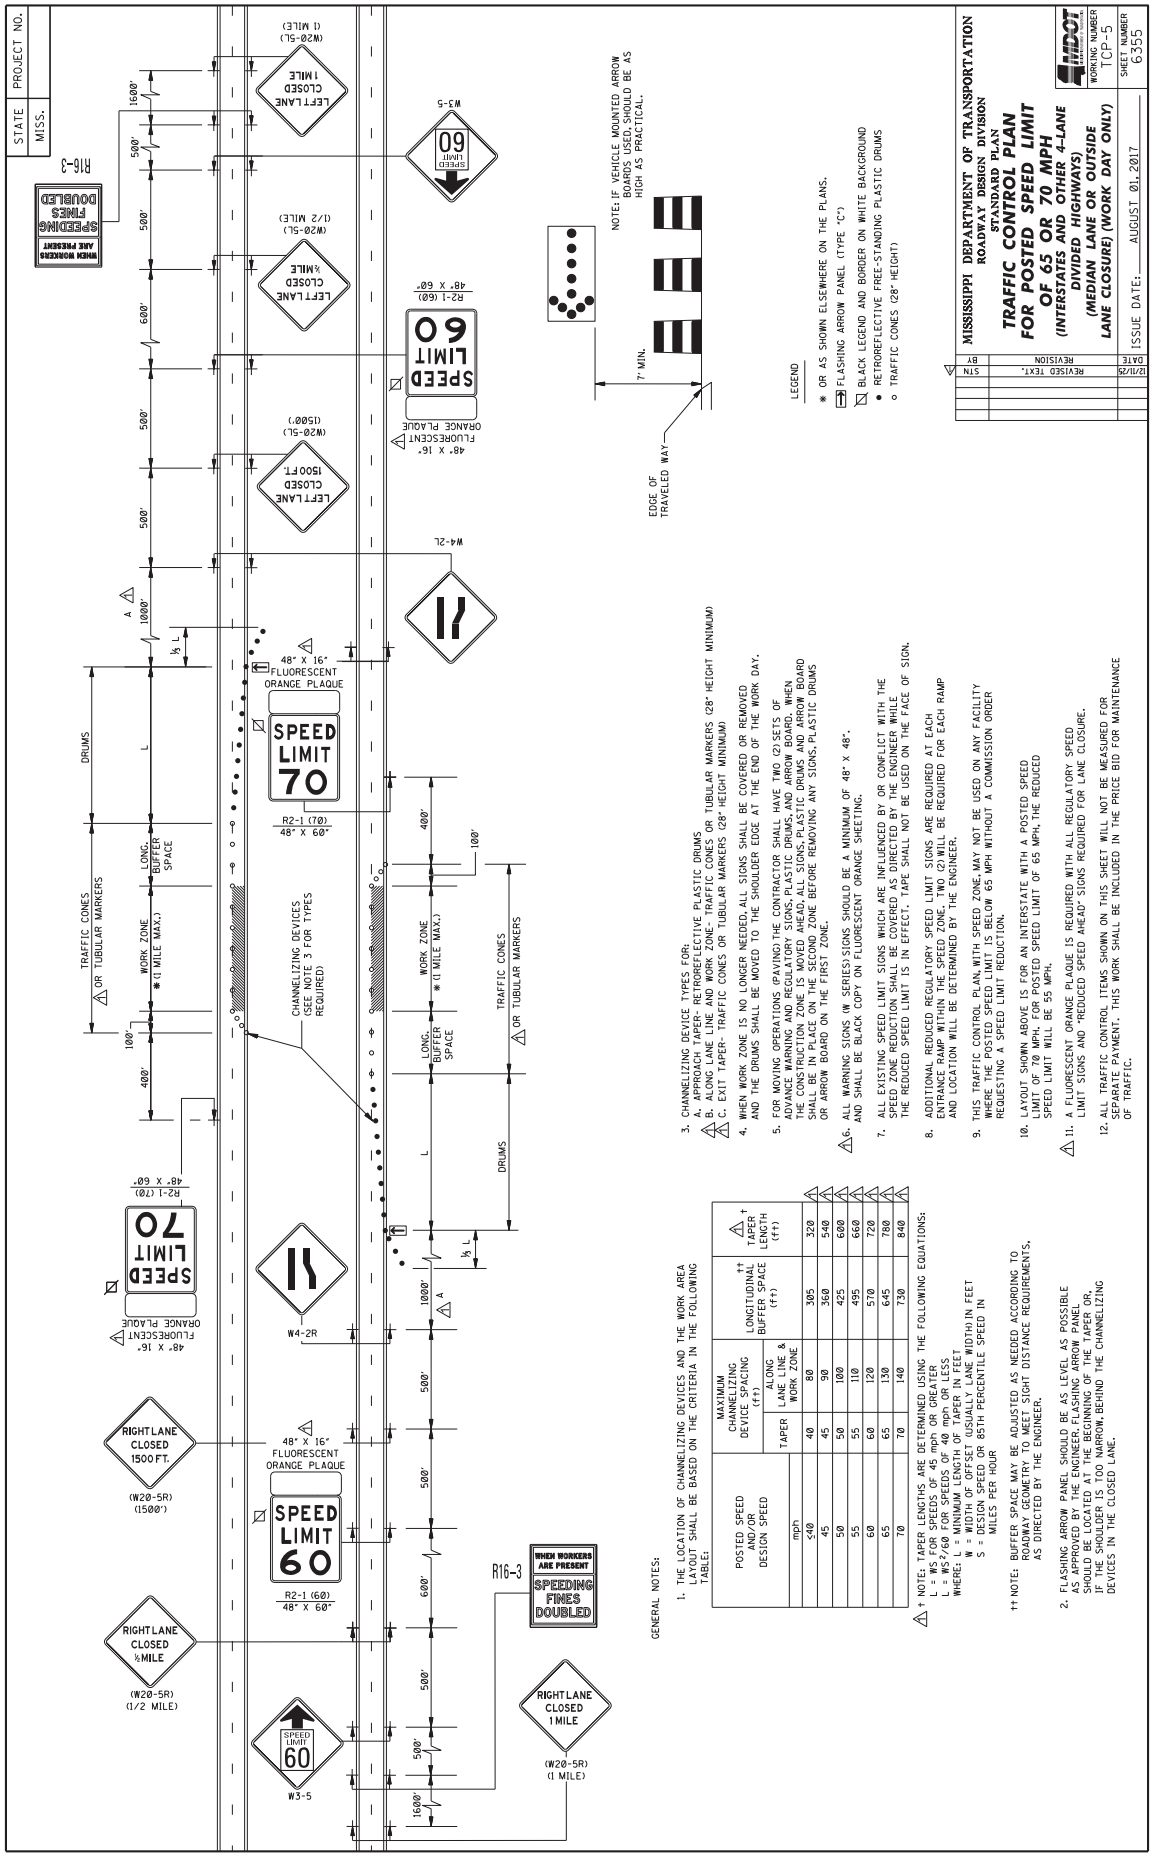
STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
TRAFFIC CONTROL PLAN
FOR POSTED SPEED LIMIT
OF 65 OR 70 MPH
(INTERSTATES AND OTHER 4-LANE DIVIDED HIGHWAYS)
(MEDIAN LANE OR OUTSIDE LANE CLOSURE) (WORK DAY ONLY)
ISSUE DATE: AUGUST 01, 2017
WORKING NUMBER TCP-5
SHEET NUMBER 6355
REVISED TEXT.
DATE 12/11/25
BY STN
LEGEND
* OR AS SHOWN ELSEWHERE ON THE PLANS.
FLASHING ARROW PANEL (TYPE "C")
BLACK LEGEND AND BORDER ON WHITE BACKGROUND
RETROREFLECTIVE FREE-STANDING PLASTIC DRUMS
TRAFFIC CONES (28" HEIGHT)
NOTE: IF VEHICLE MOUNTED ARROW BOARDS USED, SHOULD BE AS HIGH AS PRACTICAL.
7' MIN.
EDGE OF TRAVELED WAY
TRAFFIC CONES OR TUBULAR MARKERS
DRUMS
LONG. BUFFER SPACE
WORK ZONE * (1 MILE MAX.)
CHANNELIZING DEVICES (SEE NOTE 3 FOR TYPES REQUIRED)
SPEED LIMIT 70
SPEED LIMIT 60
R2-1 (70) 48" X 60"
R2-1 (60) 48" X 60"
48" X 16" FLUORESCENT ORANGE PLAQUE
48" X 16" FLUORESCENT ORANGE PLAQUE
W4-2R
W4-2L
W3-5
R16-3
WHEN WORKERS ARE PRESENT
SPEEDING FINES DOUBLED
RIGHT LANE CLOSED 1500 FT.
(W20-5R) (1500')
RIGHT LANE CLOSED ½MILE
(W20-5R) (1/2 MILE)
RIGHT LANE CLOSED 1 MILE
(W20-5R) (1 MILE)
LEFT LANE CLOSED 1 MILE
(W20-5L) (1 MILE)
LEFT LANE CLOSED ½MILE
(W20-5L) (1/2 MILE)
LEFT LANE CLOSED 1500 FT.
(W20-5L) (1500')
SPEED LIMIT 60
W3-5
48" X 60"
48" X 16" FLUORESCENT ORANGE PLAQUE
GENERAL NOTES:
1. THE LOCATION OF CHANNELIZING DEVICES AND THE WORK AREA LAYOUT SHALL BE BASED ON THE CRITERIA IN THE FOLLOWING TABLE:
POSTED SPEED AND/OR DESIGN SPEED
MAXIMUM CHANNELIZING DEVICE SPACING (††)
TAPER
ALONG LANE LINE & WORK ZONE
LONGITUDINAL BUFFER SPACE (††)
TAPER † LENGTH (††)
mph
≤40 40 80 305 320
45 45 90 360 540
50 50 100 425 600
55 55 110 495 660
60 60 120 570 720
65 65 130 645 780
70 70 140 730 840
† NOTE: TAPER LENGTHS ARE DETERMINED USING THE FOLLOWING EQUATIONS:
L = WS FOR SPEEDS OF 45 mph OR GREATER
L = WS²/60 FOR SPEEDS OF 40 mph OR LESS
WHERE: L = MINIMUM LENGTH OF TAPER IN FEET
W = WIDTH OF OFFSET (USUALLY LANE WIDTH) IN FEET
S = DESIGN SPEED OR 85TH PERCENTILE SPEED IN MILES PER HOUR
†† NOTE: BUFFER SPACE MAY BE ADJUSTED AS NEEDED ACCORDING TO ROADWAY GEOMETRY TO MEET SIGHT DISTANCE REQUIREMENTS, AS DIRECTED BY THE ENGINEER.
2. FLASHING ARROW PANEL SHOULD BE AS LEVEL AS POSSIBLE AS APPROVED BY THE ENGINEER. FLASHING ARROW PANEL SHOULD BE LOCATED AT THE BEGINNING OF THE TAPER OR, IF THE SHOULDER IS TOO NARROW, BEHIND THE CHANNELIZING DEVICES IN THE CLOSED LANE.
3. CHANNELIZING DEVICE TYPES FOR:
A. APPROACH TAPER- RETROREFLECTIVE PLASTIC DRUMS
B. ALONG LANE LINE AND WORK ZONE- TRAFFIC CONES OR TUBULAR MARKERS (28" HEIGHT MINIMUM)
C. EXIT TAPER- TRAFFIC CONES OR TUBULAR MARKERS (28" HEIGHT MINIMUM)
4. WHEN WORK ZONE IS NO LONGER NEEDED, ALL SIGNS SHALL BE COVERED OR REMOVED AND THE DRUMS SHALL BE MOVED TO THE SHOULDER EDGE AT THE END OF THE WORK DAY.
5. FOR MOVING OPERATIONS (PAVING) THE CONTRACTOR SHALL HAVE TWO (2) SETS OF ADVANCE WARNING AND REGULATORY SIGNS, PLASTIC DRUMS, AND ARROW BOARD. WHEN THE CONSTRUCTION ZONE IS MOVED AHEAD, ALL SIGNS, PLASTIC DRUMS AND ARROW BOARD SHALL BE IN PLACE ON THE SECOND ZONE BEFORE REMOVING ANY SIGNS, PLASTIC DRUMS OR ARROW BOARD ON THE FIRST ZONE.
6. ALL WARNING SIGNS (W SERIES) SIGNS SHOULD BE A MINIMUM OF 48" X 48", AND SHALL BE BLACK COPY ON FLUORESCENT ORANGE SHEETING.
7. ALL EXISTING SPEED LIMIT SIGNS WHICH ARE INFLUENCED BY OR CONFLICT WITH THE SPEED ZONE REDUCTION SHALL BE COVERED AS DIRECTED BY THE ENGINEER WHILE THE REDUCED SPEED LIMIT IS IN EFFECT. TAPE SHALL NOT BE USED ON THE FACE OF SIGN.
8. ADDITIONAL REDUCED REGULATORY SPEED LIMIT SIGNS ARE REQUIRED AT EACH ENTRANCE RAMP WITHIN THE SPEED ZONE. TWO (2) WILL BE REQUIRED FOR EACH RAMP AND LOCATION WILL BE DETERMINED BY THE ENGINEER.
9. THIS TRAFFIC CONTROL PLAN, WITH SPEED ZONE, MAY NOT BE USED ON ANY FACILITY WHERE THE POSTED SPEED LIMIT IS BELOW 65 MPH WITHOUT A COMMISSION ORDER REQUESTING A SPEED LIMIT REDUCTION.
10. LAYOUT SHOWN ABOVE IS FOR AN INTERSTATE WITH A POSTED SPEED LIMIT OF 70 MPH. FOR POSTED SPEED LIMIT OF 65 MPH, THE REDUCED SPEED LIMIT WILL BE 55 MPH.
11. A FLUORESCENT ORANGE PLAQUE IS REQUIRED WITH ALL REGULATORY SPEED LIMIT SIGNS AND "REDUCED SPEED AHEAD" SIGNS REQUIRED FOR LANE CLOSURE.
12. ALL TRAFFIC CONTROL ITEMS SHOWN ON THIS SHEET WILL NOT BE MEASURED FOR SEPARATE PAYMENT. THIS WORK SHALL BE INCLUDED IN THE PRICE BID FOR MAINTENANCE OF TRAFFIC.

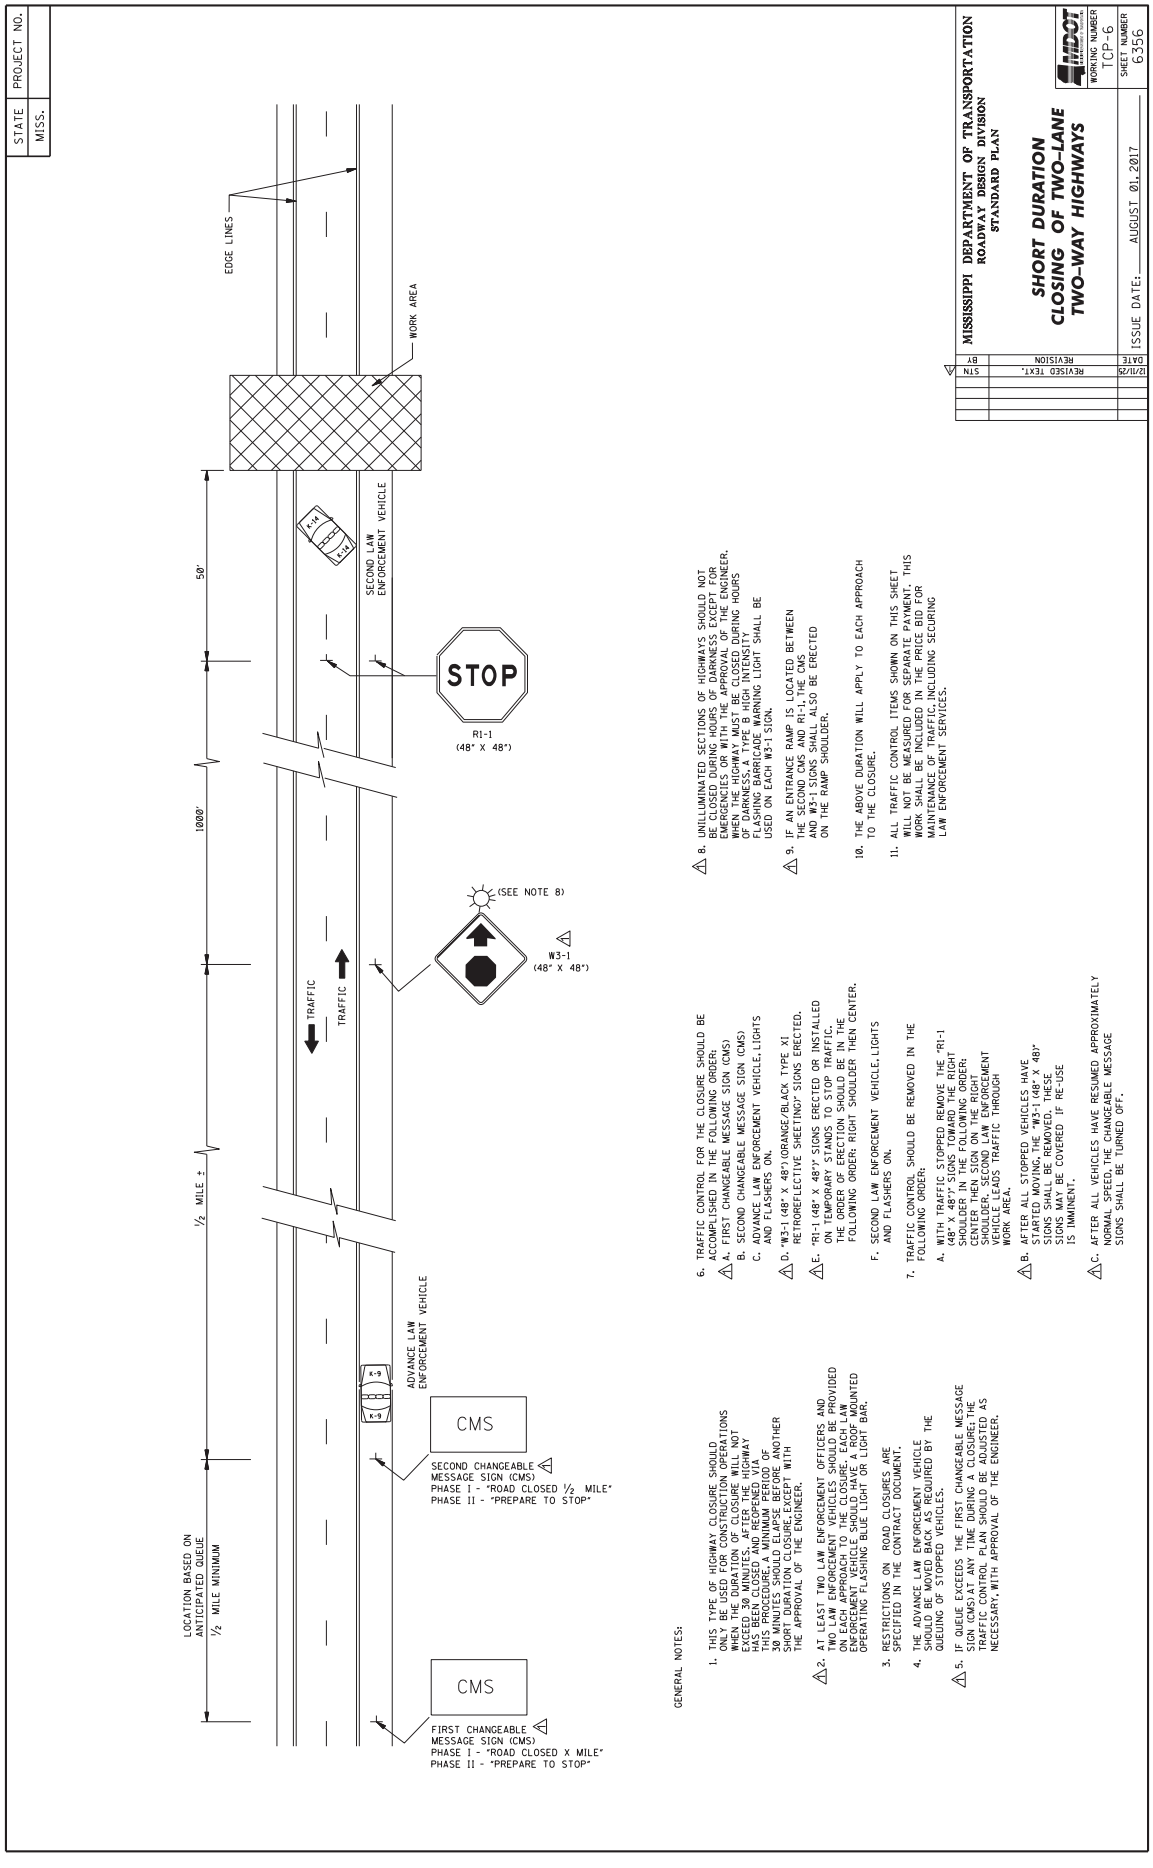
STATE
MISS.
PROJECT NO.
EDGE LINES
WORK AREA
SECOND LAW ENFORCEMENT VEHICLE
STOP
R1-1
(48" X 48")
50'
1000'
½ MILE ±
LOCATION BASED ON ANTICIPATED QUEUE
½ MILE MINIMUM
TRAFFIC
TRAFFIC
(SEE NOTE 8)
W3-1
(48" X 48")
ADVANCE LAW ENFORCEMENT VEHICLE
CMS
SECOND CHANGEABLE MESSAGE SIGN (CMS)
PHASE I - "ROAD CLOSED ½ MILE"
PHASE II - "PREPARE TO STOP"
CMS
FIRST CHANGEABLE MESSAGE SIGN (CMS)
PHASE I - "ROAD CLOSED X MILE"
PHASE II - "PREPARE TO STOP"
GENERAL NOTES:
1. THIS TYPE OF HIGHWAY CLOSURE SHOULD ONLY BE USED FOR CONSTRUCTION OPERATIONS WHEN THE DURATION OF CLOSURE WILL NOT EXCEED 30 MINUTES. AFTER THE HIGHWAY HAS BEEN CLOSED AND ESCORTED VIA THIS PROCEDURE, A MINIMUM PERIOD OF 30 MINUTES SHOULD ELAPSE BEFORE ANOTHER SHORT DURATION CLOSURE, EXCEPT WITH THE APPROVAL OF THE ENGINEER.
2. AT LEAST TWO LAW ENFORCEMENT OFFICERS AND TWO LAW ENFORCEMENT VEHICLES SHOULD BE PROVIDED ON EACH APPROACH TO THE CLOSURE. EACH LAW ENFORCEMENT VEHICLE SHOULD HAVE A ROOF-MOUNTED OPERATING FLASHING BLUE LIGHT OR LIGHT BAR.
3. RESTRICTIONS ON ROAD CLOSURES ARE SPECIFIED IN THE CONTRACT DOCUMENT.
4. THE ADVANCE LAW ENFORCEMENT VEHICLE SHOULD BE MOVED BACK AS REQUIRED BY THE QUEUING OF STOPPED VEHICLES.
5. IF QUEUE EXCEEDS THE FIRST CHANGEABLE MESSAGE SIGN (CMS) AT ANY TIME DURING A CLOSURE, THE TRAFFIC CONTROL PLAN SHOULD BE ADJUSTED AS NECESSARY, WITH APPROVAL OF THE ENGINEER.
6. TRAFFIC CONTROL FOR THE CLOSURE SHOULD BE ACCOMPLISHED IN THE FOLLOWING ORDER:
A. FIRST CHANGEABLE MESSAGE SIGN (CMS)
B. SECOND CHANGEABLE MESSAGE SIGN (CMS)
C. ADVANCE LAW ENFORCEMENT VEHICLE, LIGHTS AND FLASHERS ON.
D. W3-1 (48" X 48") ORANGE/BLACK TYPE XI RETROREFLECTIVE SHEETING" SIGNS ERECTED.
E. "R1-1 (48" X 48")" SIGNS ERECTED OR INSTALLED ON TEMPORARY STANDS TO STOP TRAFFIC. THE ORDER OF ERECTION SHOULD BE IN THE FOLLOWING ORDER: RIGHT SHOULDER THEN CENTER.
F. SECOND LAW ENFORCEMENT VEHICLE, LIGHTS AND FLASHERS ON.
7. TRAFFIC CONTROL SHOULD BE REMOVED IN THE FOLLOWING ORDER:
A. WITH TRAFFIC STOPPED REMOVE THE "R1-1 (48" X 48")" SIGNS FOLLOWING THE ROUTE: SHOULDER IN THE FOLLOWING ORDER; CENTER THEN SIGN ON THE RIGHT SHOULDER. SECOND LAW ENFORCEMENT VEHICLE LEADS TRAFFIC THROUGH WORK AREA.
B. AFTER ALL STOPPED VEHICLES HAVE STARTED MOVING REMOVE W3-1 (48" X 48") SIGNS. THESE SIGNS MAY BE COVERED IF RE-USE IS IMMINENT.
C. AFTER ALL VEHICLES HAVE RESUMED APPROXIMATELY NORMAL SPEED, THE CHANGEABLE MESSAGE SIGNS SHALL BE TURNED OFF.
8. UNILLUMINATED SECTIONS OF HIGHWAYS SHOULD NOT BE CLOSED DURING HOURS OF DARKNESS EXCEPT FOR EMERGENCIES OR WITH THE APPROVAL OF THE ENGINEER. WHEN THE HIGHWAY MUST BE CLOSED DURING HOURS OF DARKNESS, A TYPE B HIGH INTENSITY FLASHING BARRICADE WARNING LIGHT SHALL BE USED ON EACH W3-1 SIGN.
9. IF AN ENTRANCE RAMP IS LOCATED BETWEEN THE SECOND CMS AND R1-1, THE CMS AND W3-1 SIGNS SHALL ALSO BE ERECTED ON THE RAMP SHOULDER.
10. THE ABOVE DURATION WILL APPLY TO EACH APPROACH TO THE CLOSURE.
11. ALL TRAFFIC CONTROL ITEMS SHOWN ON THIS SHEET WILL NOT BE MEASURED FOR SEPARATE PAYMENT; THIS WORK SHALL BE INCLUDED IN THE PRICE BID FOR MAINTENANCE OF TRAFFIC, INCLUDING SECURING LAW ENFORCEMENT SERVICES.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
SHORT DURATION CLOSING OF TWO-LANE TWO-WAY HIGHWAYS
WORKING NUMBER TCP-6
SHEET NUMBER 6356
ISSUE DATE: AUGUST 01, 2017
DATE REVISION BY
12/11/23 REVISED TEXT. STM

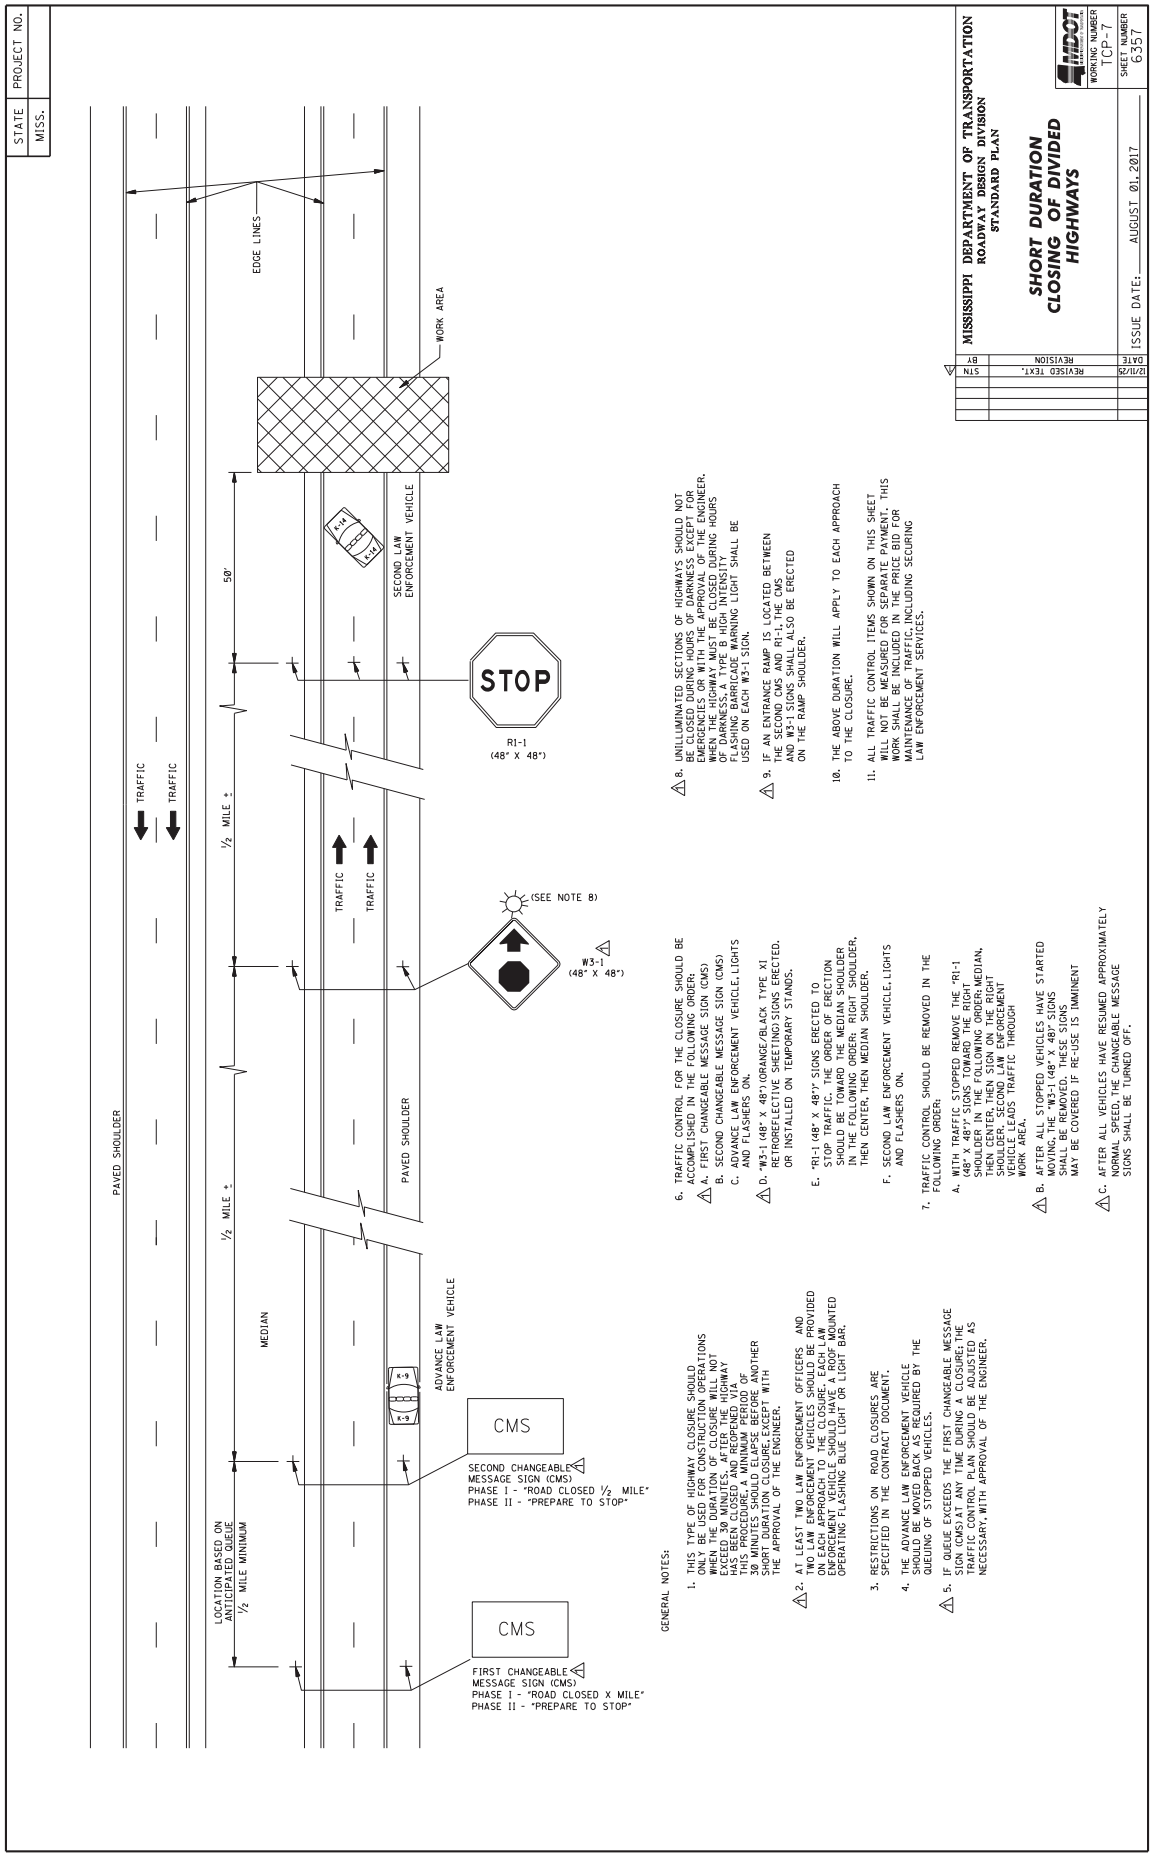

STATE
MISS.
PROJECT NO.
PAVED SHOULDER
TRAFFIC
TRAFFIC
½ MILE ±
EDGE LINES
WORK AREA
50'
SECOND LAW ENFORCEMENT VEHICLE
STOP
R1-1
(48" X 48")
TRAFFIC
TRAFFIC
½ MILE ±
PAVED SHOULDER
(SEE NOTE 8)
W3-1
(48" X 48")
LOCATION BASED ON ANTICIPATED QUEUE
½ MILE MINIMUM
MEDIAN
ADVANCE LAW ENFORCEMENT VEHICLE
CMS
SECOND CHANGEABLE MESSAGE SIGN (CMS)
PHASE I - "ROAD CLOSED ½ MILE"
PHASE II - "PREPARE TO STOP"
CMS
FIRST CHANGEABLE MESSAGE SIGN (CMS)
PHASE I - "ROAD CLOSED X MILE"
PHASE II - "PREPARE TO STOP"
GENERAL NOTES:
1. THIS TYPE OF HIGHWAY CLOSURE SHOULD ONLY BE USED FOR CONSTRUCTION OPERATIONS WHERE THE CLOSURE TIME WILL NOT EXCEED 30 MINUTES, AFTER THE HIGHWAY HAS BEEN CLOSED AND REOPENED VIA THIS PROCEDURE, A MINIMUM PERIOD OF 30 MINUTES SHOULD ELAPSE BEFORE ANOTHER SHORT DURATION CLOSURE, EXCEPT WITH THE APPROVAL OF THE ENGINEER.
2. AT LEAST TWO LAW ENFORCEMENT OFFICERS AND TWO LAW ENFORCEMENT VEHICLES SHOULD BE PROVIDED ON EACH APPROACH TO THE CLOSURE. EACH LAW ENFORCEMENT VEHICLE SHOULD HAVE A ROOF MOUNTED OPERATING FLASHING BLUE LIGHT OR LIGHT BAR.
3. RESTRICTIONS ON ROAD CLOSURES ARE SPECIFIED IN THE CONTRACT DOCUMENT.
4. THE ADVANCE LAW ENFORCEMENT VEHICLE SHOULD BE MOVED BACK AS REQUIRED BY THE QUEUING OF STOPPED VEHICLES.
5. IF QUEUE EXCEEDS THE FIRST CHANGEABLE MESSAGE SIGN (CMS) AT ANY TIME DURING A CLOSURE, THE TRAFFIC CONTROL PLAN SHOULD BE ADJUSTED AS NECESSARY, WITH APPROVAL OF THE ENGINEER.
6. TRAFFIC CONTROL FOR THE CLOSURE SHOULD BE ACCOMPLISHED IN THE FOLLOWING ORDER:
A. FIRST CHANGEABLE MESSAGE SIGN (CMS)
B. SECOND CHANGEABLE MESSAGE SIGN (CMS)
C. ADVANCE LAW ENFORCEMENT VEHICLE, LIGHTS AND FLASHERS ON.
D. "W3-1 (48" X 48") ORANGE/BLACK TYPE XI RETROREFLECTIVE SHEETING) SIGNS ERECTED. OR INSTALLED ON TEMPORARY STANDS.
E. "R1-1 (48" X 48") SIGNS ERECTED TO STOP TRAFFIC, THE ORDER OF ERECTION SHOULD BE TOWARD THE MEDIAN SHOULDER ON THE FOLLOWING ORDER: RIGHT SHOULDER, THEN CENTER, THEN MEDIAN SHOULDER.
F. SECOND LAW ENFORCEMENT VEHICLE, LIGHTS AND FLASHERS ON.
7. TRAFFIC CONTROL SHOULD BE REMOVED IN THE FOLLOWING ORDER:
A. WITH TRAFFIC STOPPED REMOVE THE "R1-1 (48" X 48") SIGNS TOWARD THE RIGHT SHOULDER IN THE FOLLOWING ORDER: MEDIAN, THEN CENTER, THEN SIGN ON THE RIGHT SHOULDER, SECOND LAW ENFORCEMENT VEHICLE LEADS TRAFFIC THROUGH WORK AREA.
B. AFTER ALL STOPPED VEHICLES HAVE STARTED MOVING, THE "W3-1 (48" X 48" SIGNS SHALL BE REMOVED. THESE SIGNS MAY BE COVERED IF RE-USE IS IMMINENT
C. AFTER ALL VEHICLES HAVE RESUMED APPROXIMATELY NORMAL SPEED, THE CHANGEABLE MESSAGE SIGNS SHALL BE TURNED OFF.
8. UNILLUMINATED SECTIONS OF HIGHWAYS SHOULD NOT BE CLOSED DURING HOURS OF DARKNESS EXCEPT FOR EMERGENCIES OR WITH THE APPROVAL OF THE ENGINEER. WHEN SUCH HIGHWAYS ARE CLOSED DURING HOURS OF DARKNESS, A TYPE B HIGH INTENSITY FLASHING BARRICADE WARNING LIGHT SHALL BE USED ON EACH W3-1 SIGN.
9. IF AN ENTRANCE RAMP IS LOCATED BETWEEN THE SECOND CMS AND R1-1, THE CMS AND W3-1 SIGNS SHALL ALSO BE ERECTED ON THE RAMP SHOULDER.
10. THE ABOVE DURATION WILL APPLY TO EACH APPROACH TO THE CLOSURE.
11. ALL TRAFFIC CONTROL ITEMS SHOWN ON THIS SHEET WILL NOT BE MEASURED FOR SEPARATE PAYMENT. THIS WORK SHALL BE INCLUDED IN THE PRICE BID FOR MAINTENANCE OF TRAFFIC INCLUDING SECURING LAW ENFORCEMENT SERVICES.
REVISED TEXT. STN 12/11/25
REVISION BY DATE
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
SHORT DURATION CLOSING OF DIVIDED HIGHWAYS
MDOT
WORKING NUMBER TCP-7
ISSUE DATE: AUGUST 01, 2017
SHEET NUMBER 6357

STATE	PROJECT NO.
MISS.	




STANDARD BARRICADES

1. THE RETROREFLECTIVE MARKING FOR BARRICADE RAILS SHALL BE ORANGE AND WHITE (SLOPING DOWNWARD AT AN ANGLE OF 45° IN THE DIRECTION THAT TRAFFIC IS TO PASS).
2. RAIL STRIPE SHOULD BE 6 INCHES, EXCEPT THAT 4-INCH WIDE STRIPES MAY BE USED IF RAIL LENGTHS ARE LESS THAN 36 INCHES.
3. DO NOT PLACE SANDBAGS OR OTHER DEVICES ON BARRICADE RAILS TO PROVIDE MASS SANDBAGS, HOWEVER, MAY BE PLACES AS BALLAST TO THE LOWER PARTS OF THE FRAME OR THE STAYS TO BARRICADES.
4. FOR ADDITIONAL INFORMATION OR DETAILS, SEE MUTCD, LATEST EDITION.
5. BARRICADES ARE CLASSIFIED BY FHWA AS CATEGORY II WORK ZONE DEVICES. A LIST OF CRASHWORTHY BARRICADES AND OTHER CATEGORY II DEVICES CAN BE FOUND ON FHWA'S WEBSITE: http://highways.dot.gov/safety/RwD/reduce-crash-severity
6. WHERE ROAD USERS INCLUDE PEDESTRIANS, THE PROVISION OF SUPPLEMENTAL AUDIBLE INFORMATION OR DETECTABLE BARRIERS OR BARRICADES SHOULD BE PROVIDED FOR PEOPLE WITH VISION DISABILITIES.
7. BARRICADE RAIL SUPPORTS SHOULD NOT PROJECT INTO PEDESTRIAN CIRCULATION ROUTES MORE THAN 4 INCHES FOR THE SUPPORTS LOCATED BETWEEN 27 INCHES TO 80 INCHES ABOVE THE EXISTING SURFACE.




RETROREFLECTIVE CHEVRON ALIGNMENT SIGN DETAIL (W1–8)

1. A CHEVRON SIGN CONSISTS OF A BLACK CHEVRON TYPE MARKING ON AN ORANGE BACKGROUND AND SHALL POINT IN THE DIRECTION OF TRAFFIC FLOW.
2. THE CHEVRON SIGN SHALL BE MOUNTED ON CRASHWORTHY SUPPORT.
3. CHEVRON SIGNS MAY BE USED TO SUPPLEMENT OTHER STANDARD DEVICES WHERE ONE OR MORE LANES ARE CLOSED FOR CONSTRUCTION OR MAINTENANCE. THEY SHOULD BE PLACED APPROXIMATELY 2'-0" BEHIND THE LANE TRANSITION STRIPE.
4. CHEVRON SIGNS SHALL BE INSTALLED AT A MINIMUM HEIGHT OF 4 FEET MEASURED VERTICALLY FROM THE BOTTOM OF THE SIGN TO THE ELEVATION OF THE NEAR EDGE OF THE TRAVELWAY.



BARRICADE CLOSING A ROAD



WING BARRICADES


1. WING BARRICADES ARE TYPE III BARRICADES ERECTED ON THE SHOULDER ON ONE OR BOTH SIDES OF THE PAVEMENT TO GIVE THE SENSATION OF A NARROWING OR RESTRICTED ROADWAY. WING BARRICADES MAY BE USED AS A MOUNTING FOR THE ADVANCE WARNING SIGNS OR FLASHERS.
2. WING BARRICADES SHOULD BE USED:
   A. IN ADVANCE OF A CONSTRUCTION PROJECT EVEN WHEN NO PART OF THE ROADWAY IS ACTUALLY CLOSED.
   B. IN ADVANCE OF ALL BRIDGE OR CULVERT WIDENING OPERATIONS.

BARRICADE CHARACTERISTICS

	I	II	III
WIDTH OF RAIL * *	8" MIN. - 12" MAX.	8" MIN. - 12" MAX.	8" MIN. - 12" MAX.
LENGTH OF RAIL * *	24" MIN. / 96" MAX.	24" MIN. /96" MAX.	48" MIN. / 96" MAX.
WIDTH OF STRIPE *	6"	6"	6"
HEIGHT	36" MIN.	36" MIN.	60" MIN.
NUMBER OF RETROREFLECTORIZED RAIL FACES	2 (ONE EACH DIRECTION)	4 (TWO EACH DIRECTION)	3 IF FACING TRAFFIC IN ONE DIRECTION 6 IF FACING TRAFFIC IN TWO DIRECTIONS


* 1. FOR RAILS LESS THAN 36" LONG, 4" WIDE STRIPES MAY BE USED.

** 2. BARRICADES INTENDED FOR USE ON EXPRESSWAYS, FREEWAYS AND OTHER HIGH SPEED ROADWAYS, SHALL HAVE A MINIMUM OF 270 in^2 OF REFLECTIVE AREA FACING TRAFFIC.




TYPE 3 OBJECT MARKER (OM3–R)


1. TYPE 3 OBJECT MARKERS SHALL BE USED AT ALL EXPOSED BRIDGE ABUTMENTS AND AT OTHER LOCATIONS AS DEEMED NECESSARY BY THE ENGINEER.
2. THE OM3-R IS SHOWN. THE OM3-L IS SIMILAR EXCEPT THE STRIPES SLOPE DOWNWARD FROM THE UPPER LEFT SIDE TO THE LOWER RIGHT SIDE AND SHALL BE PLACED ON THE LEFT SIDE OF THE OBJECT.
3. THE INSIDE EDGE OF THE MARKER SHALL BE IN LINE WITH THE INNER EDGE OF THE OBSTRUCTION.
4. THE STRIPING SHALL CONSIST OF ALTERNATING BLACK AND RETOREFLECTIVE YELLOW SLOPING DOWNWARD TOWARD THE SIDE ON WHICH TRAFFIC IS THE PASS.




PLASTIC DRUM DETAIL



TUBULAR MARKER DETAIL



PLASTIC CONE DETAIL (28" – 36")



PLASTIC CONE DETAIL (36" OR GREATER)

1. PLASTIC DRUMS, TUBULAR MARKERS, OR PLASTIC CONES SHALL BE ON END AND USED AS AN EXPEDIENT METHOD FOR TRAFFIC CHANNELIZATION. THE COLOR AND MARKING OF THE DEVICE USED SHALL BE CONSISTENT WITH MARKING STANDARDS FOR BARRICADE. THE PREDOMINANT COLOR ON THE DEVICE USED SHALL BE ORANGE WITH RETROREFLECTIVE, HORIZONTAL, CIRCUMFERENTIAL WHITE STRIPES AS SHOWN ON THE DETAILS.
2. DRUMS, TUBULAR MARKERS, OR PLASTIC CONES SHOULD NEVER BE PLACED IN THE ROADWAY WITHOUT WARNING SIGNS.
3. WHERE PRACTICAL PLASTIC DRUMS, TUBULAR MARKERS, OR PLASTIC CONES SHOULD BE PLACED NO CLOSER THAN 3'-0" FROM THE EDGE OF TRAVELED LANE.
4. BALLAST SHALL NOT BE PLACED ON THE TOP OF THE DRUM.

DATE	REVISION	BY
12/17/25	REVISED TEXT AND DETAILS.	SYN

MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN

HIGHWAY SIGN AND BARRICADE DETAILS FOR CONSTRUCTION PROJECTS


WORKING NUMBER TCP-8

ISSUE DATE: AUGUST 01, 2017

SHEET NUMBER 6358

STATE	PROJECT NO.
MISS.	

MOBILE OPERATIONS ON MULTILANE ROAD

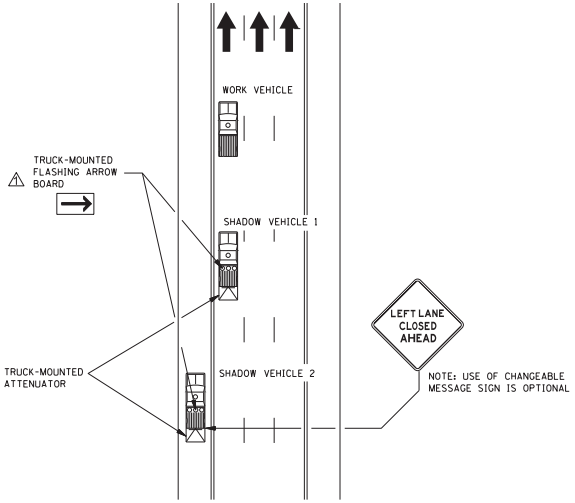

MOBILE OPERATIONS ON MULTILANE ROAD

NOTES FOR MULTILANE LANE OPERATION:

⚠ 1. SHADOW AND WORK VEHICLES SHALL DISPLAY HIGH-INTENSITY ROTATING, FLASHING, OSCILLATING, OR STROBE LIGHTS. AN ARROW BOARD SHALL BE USED WHEN A FREEWAY LANE IS CLOSED. WHEN MORE THAN ONE FREEWAY LANE IS CLOSED, A SEPARATE ARROW BOARD SHALL BE USED FOR EACH CLOSED LANE.

⚠ 2. SHADOW VEHICLE 2 SHOULD BE EQUIPPED WITH AN ARROW BOARD AND TRUCK MOUNTED ATTENUATOR (TMA), AN APPROPRIATE LANE CLOSURE SIGN SHOULD BE PLACED ON SHADOW VEHICLE 2 SO AS NOT TO OBSCURE THE ARROW BOARD.

⚠ 3. SHADOW VEHICLE 1 SHOULD BE EQUIPPED WITH AN ARROW BOARD AND TRUCK-MOUNTED ATTENUATOR (TMA).

4. SHADOW VEHICLE 2 SHOULD TRAVEL AT A VARYING DISTANCE FROM THE WORK OPERATION SO AS TO PROVIDE ADEQUATE SIGHT DISTANCE FOR TRAFFIC APPROACHING FROM THE REAR.

⚠ 5. THE SPACING BETWEEN THE WORK VEHICLES AND THE SHADOW VEHICLES, AND BETWEEN EACH SHADOW VEHICLE, SHOULD BE MINIMIZED TO DETER ROAD USERS FROM DRIVING IN BETWEEN.

⚠ 6. ON HIGH-SPEED ROADWAYS, A THIRD SHADOW VEHICLE (NOT SHOWN) MAY BE USED WITH SHADOW VEHICLE 1 IN THE CLOSED LANE, SHADOW VEHICLE 2 STRADDLING THE EDGE LINE, AND SHADOW VEHICLE 3 ON THE SHOULDER.

⚠ 7. ARROW BOARD SHALL BE AS A MINIMUM TYPE B, 60" X 30" IN ACCORDANCE WITH THE CRITERIA PRESENTED IN THE MUTCD.

8. WORK SHOULD NORMALLY BE DONE DURING OFF-PEAK HOURS.

9. VEHICLE-MOUNTED SIGNS SHOULD BE MOUNTED WITH THE BOTTOM OF THE SIGN LOCATED AT A MINIMUM HEIGHT OF 48" ABOVE THE PAVEMENT AND SHALL NOT BE OBSCURED BY EQUIPMENT OR SUPPLIES. SIGN LEGENDS SHALL BE COVERED OR TURNED FROM VIEW WHEN WORK IS NOT IN PROGRESS.


⚠ 10. WHEN THE WORK VEHICLE OCCUPIES AN INTERIOR LANE (A LANE OTHER THAN THE FAR RIGHT OR FAR LEFT) OF A DIRECTIONAL ROADWAY HAVING A RIGHT-HAND SHOULDER 10 FEET OR MORE IN WIDTH, SHADOW VEHICLE 2 SHOULD DRIVE ON THE RIGHT-HAND SHOULDER WITH A SIGN INDICATING THAT WORK IS TAKING PLACE IN THE INTERIOR LANE.

⚠ 11. ON HIGH-SPEED ROADWAYS, A THIRD SHADOW VEHICLE (NOT SHOWN) MAY BE USED WITH SHADOW VEHICLE 1 IN THE CLOSED LANE, SHADOW VEHICLE 2 STRADDLING THE EDGE LINE, AND SHADOW VEHICLE 3 ON THE SHOULDER.

⚠ 12. WHERE ADEQUATE SHOULDER WIDTH IS NOT AVAILABLE, SHADOW VEHICLE 3 MAY ALSO STRADDLE THE EDGE LINE.

⚠ 13. ALL TRAFFIC CONTROL ITEMS SHOWN ON THIS SHEET WILL NOT BE MEASURED FOR SEPARATE PAYMENT. THIS WORK SHALL BE INCLUDED IN THE PRICE BID FOR MAINTENANCE OF TRAFFIC.

MOBILE OPERATIONS ON TWO–LANE ROAD

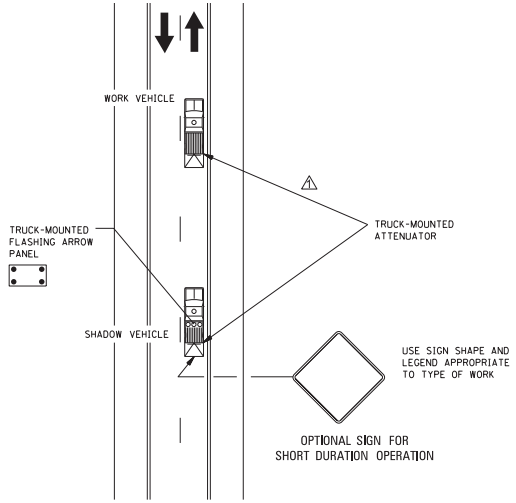

MOBILE OPERATIONS ON TWO–LANE ROAD

NOTES FOR TWO-LANE OPERATION:

1. WHERE PRACTICAL AND WHEN NEEDED, THE WORK AND SHADOW VEHICLES SHOULD PULL OVER PERIODICALLY TO ALLOW TRAFFIC TO PASS. IF THIS CAN NOT BE DONE FREQUENTLY, AS AN ALTERNATIVE, A "DO NOT PASS" SIGN MAY BE PLACED ON THE REAR OF THE VEHICLE BLOCKING THE LANE.

2. THE DISTANCE BETWEEN THE WORK AND SHADOW VEHICLES MAY VARY ACCORDING TO TERRAIN, PAINT DRYING TIME, AND OTHER FACTORS. SHADOW VEHICLES ARE USED TO WARN TRAFFIC OF THE OPERATION AHEAD. WHENEVER ADEQUATE STOPPING SIGHT DISTANCE EXISTS TO THE REAR, THE SHADOW VEHICLE SHOULD MAINTAIN THE MINIMUM DISTANCE AND PROCEED AT THE SAME SPEED AS THE WORK VEHICLE. THE SHADOW VEHICLE SHOULD SLOW DOWN IN ADVANCE OF VERTICAL OR HORIZONTAL CURVES THAT RESTRICT SIGHT DISTANCE.

3. ADDITIONAL SHADOW VEHICLES TO WARN AND REDUCE THE SPEED OF ONCOMING OR OPPOSING TRAFFIC MAY BE USED. POLICE PATROL CARS MAY BE USED FOR THIS PURPOSE.

4. A TRUCK-MOUNTED ATTENUATOR (TMA) SHOULD BE USED ON THE SHADOW VEHICLE AND MAY BE USED ON THE WORK VEHICLE.

5. THE WORK VEHICLE SHALL BE EQUIPPED WITH BEACONS, AND THE SHADOW VEHICLES SHALL BE EQUIPPED WITH TWO HIGH-INTENSITY FLASHING LIGHTS MOUNTED ON THE REAR, ADJACENT TO THE SIGN. SHADOW AND WORK VEHICLES SHALL DISPLAY FLASHING OR ROTATING BEACONS BOTH FORWARD AND TO THE REAR.

6. VEHICLE-MOUNTED SIGNS SHOULD BE MOUNTED WITH THE BOTTOM OF THE SIGN LOCATED AT A MINIMUM HEIGHT OF 48" ABOVE THE PAVEMENT AND SHALL NOT BE OBSCURED BY EQUIPMENT OR SUPPLIES. SIGN LEGENDS SHALL BE COVERED OR TURNED FROM VIEW WHEN WORK IS NOT IN PROGRESS.

7. ARROW BOARD TO BE USED IN CAUTION MODE.

8. ALL TRAFFIC CONTROL ITEMS SHOWN ON THIS SHEET WILL NOT BE MEASURED FOR SEPARATE PAYMENT. THIS WORK SHALL BE INCLUDED IN THE PRICE BID FOR MAINTENANCE OF TRAFFIC.

DATE	REVISION	BY
12/17/25	REVISED TEXT AND DETAILS	SYN


MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN


TRAFFIC CONTROL PLAN MOBILE OPERATIONS MULTILANE ROADS AND TWO–LANE ROADS


WORKING NUMBER TCP-9


ISSUE DATE: AUGUST 01, 2017


SHEET NUMBER 6359

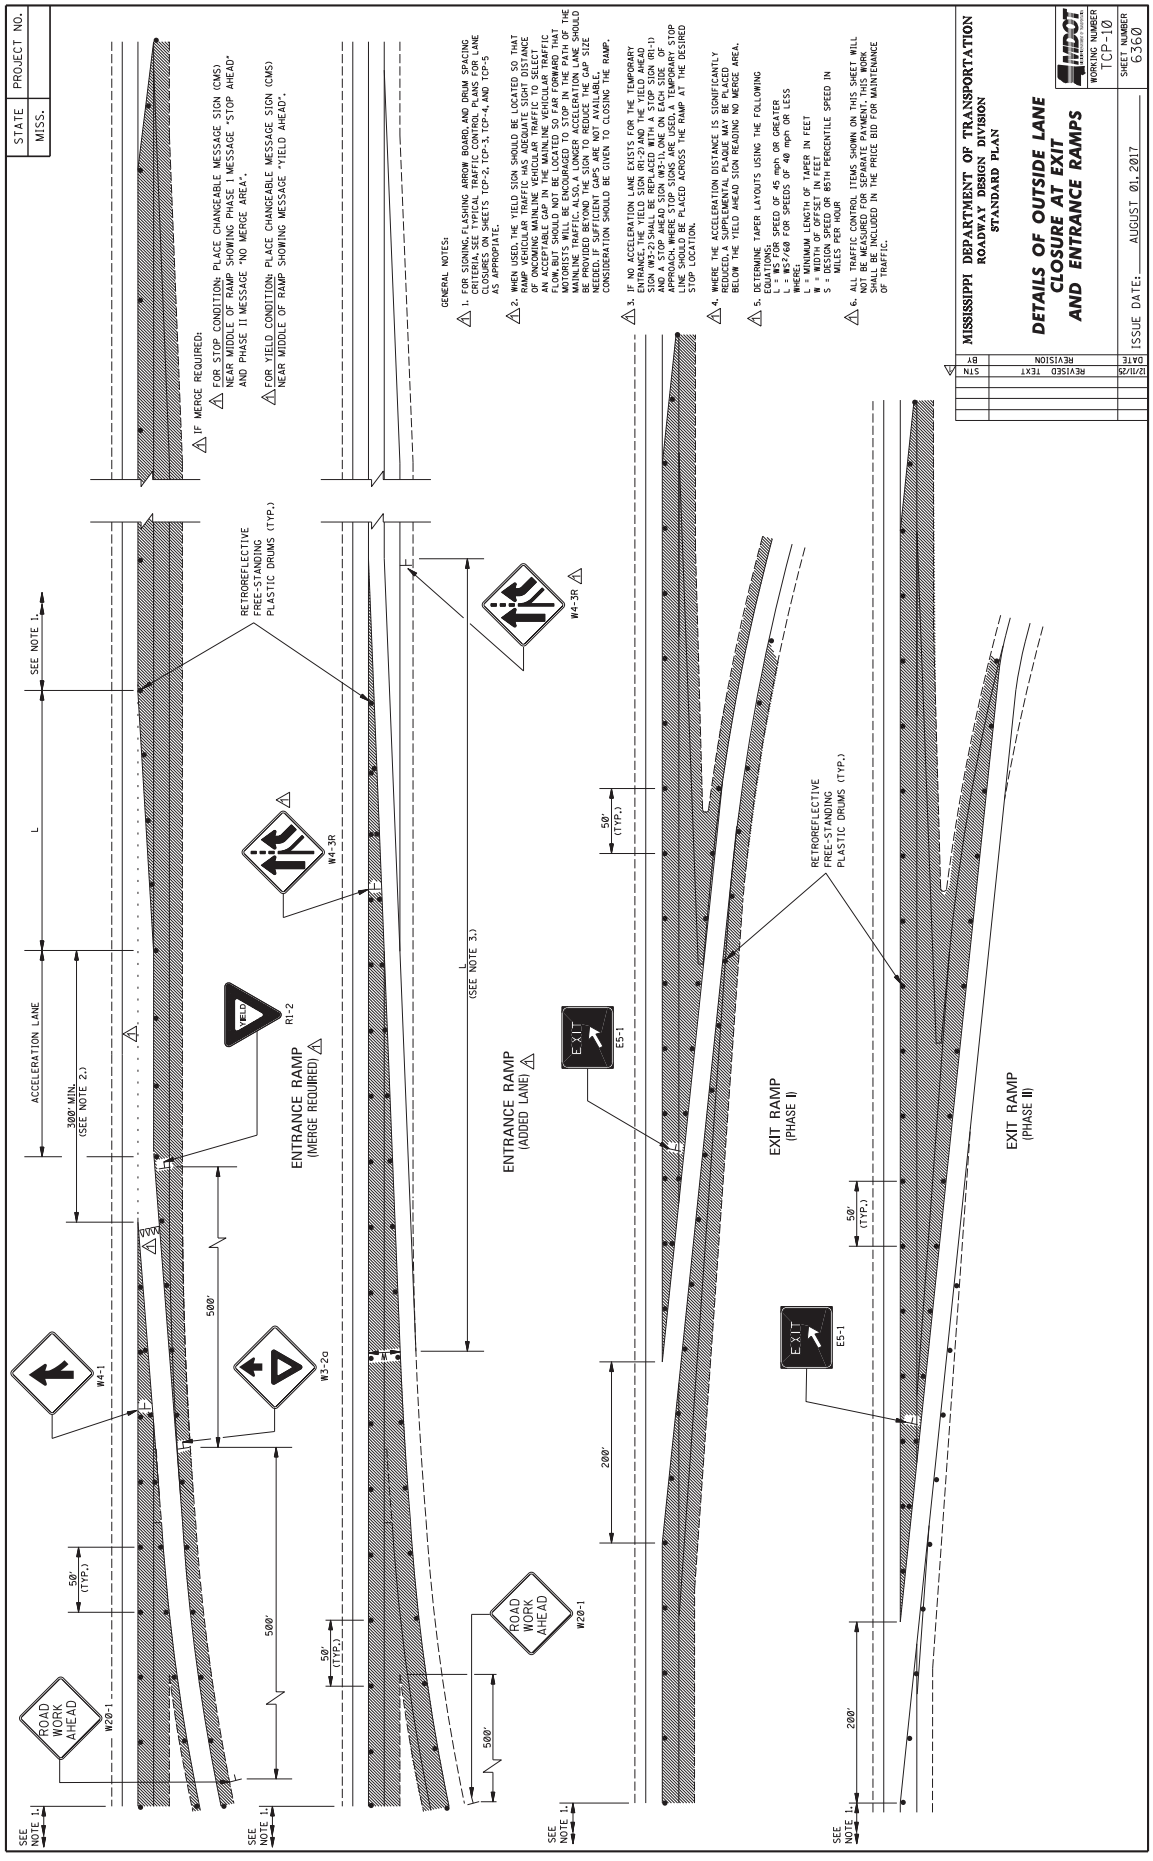

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
DETAILS OF OUTSIDE LANE CLOSURE AT EXIT AND ENTRANCE RAMPS
WORKING NUMBER TCP-10
SHEET NUMBER 6360
ISSUE DATE: AUGUST 01, 2017
REVISED TEXT
GENERAL NOTES:
1. FOR SIGNING, FLASHING ARROW BOARD, AND DRUM SPACING CRITERIA SEE STANDARD TRAFFIC CONTROL PLANS FOR LANE CLOSURES ON SHEETS TCP-2, TCP-3, TCP-4, AND TCP-5 AS APPROPRIATE.
2. WHEN USED, THE YIELD SIGN SHOULD BE LOCATED SO THAT RAMP VEHICULAR TRAFFIC HAS ADEQUATE SIGHT DISTANCE OF ONCOMING MAINLINE VEHICULAR TRAFFIC TO SELECT AN ACCEPTABLE GAP IN THE MAINLINE VEHICULAR TRAFFIC FLOW, BUT SHOULD NOT BE LOCATED SO FAR FORWARD THAT MOTORISTS WILL BE ENCOURAGED TO STOP IN THE PATH OF THE MAINLINE TRAFFIC. ALSO, A LONGER ACCELERATION LANE SHOULD BE PROVIDED BEYOND THIS POINT TO PROVIDE THE GAP SIZE NEEDED. IF SUFFICIENT GAPS ARE NOT AVAILABLE, CONSIDERATION SHOULD BE GIVEN TO CLOSING THE RAMP.
3. IF NO ACCELERATION LANE EXISTS FOR THE TEMPORARY ENTRANCE RAMP, THE YIELD AHEAD SIGN (R1-2) AND STOP SIGN (W3-2) SHALL BE REPLACED WITH A STOP SIGN (R1-1) AND A STOP AHEAD SIGN (W3-1), ONE ON EACH SIDE OF APPROACHING TRAFFIC. ALSO, A SUPPLEMENTAL STOP LINE SHOULD BE PLACED ACROSS THE RAMP AT THE DESIRED STOP LOCATION.
4. WHERE THE ACCELERATION DISTANCE IS SIGNIFICANTLY REDUCED, A SUPPLEMENTAL PLAQUE MAY BE PLACED BELOW THE YIELD AHEAD SIGN READING NO MERGE AREA.
5. DETERMINE TAPER LAYOUTS USING THE FOLLOWING CRITERIA:
L = WS FOR SPEED OF 45 mph OR GREATER
L = WS²/60 FOR SPEEDS OF 40 mph OR LESS
WHERE:
L = MINIMUM LENGTH OF TAPER IN FEET
W = WIDTH OF OFFSET IN FEET
S = DESIGN SPEED OR 85TH PERCENTILE SPEED IN MPH, IF KNOWN
6. ALL TRAFFIC CONTROL ITEMS SHOWN ON THIS SHEET WILL NOT BE MEASURED FOR SEPARATE PAYMENT; THIS WORK SHALL BE INCLUDED IN THE PRICE BID FOR MAINTENANCE OF TRAFFIC.
IF MERGE REQUIRED:
FOR STOP CONDITION: PLACE CHANGEABLE MESSAGE SIGN (CMS) NEAR MIDDLE OF RAMP SHOWING PHASE I MESSAGE "STOP AHEAD" AND PHASE II MESSAGE "NO MERGE AREA".
FOR YIELD CONDITION: PLACE CHANGEABLE MESSAGE SIGN (CMS) NEAR MIDDLE OF RAMP SHOWING MESSAGE "YIELD AHEAD".
ACCELERATION LANE
L
300' MIN. (SEE NOTE 2.)
SEE NOTE 1.
RETROREFLECTIVE FREE-STANDING PLASTIC DRUMS (TYP.)
ENTRANCE RAMP (MERGE REQUIRED)
ENTRANCE RAMP (ADDED LANE)
EXIT RAMP (PHASE I)
EXIT RAMP (PHASE II)
W4-3R
R1-2
E5-1
W4-1
W3-2o
W20-1
ROAD WORK AHEAD
500'
200'
50' (TYP.)
(SEE NOTE 3.)

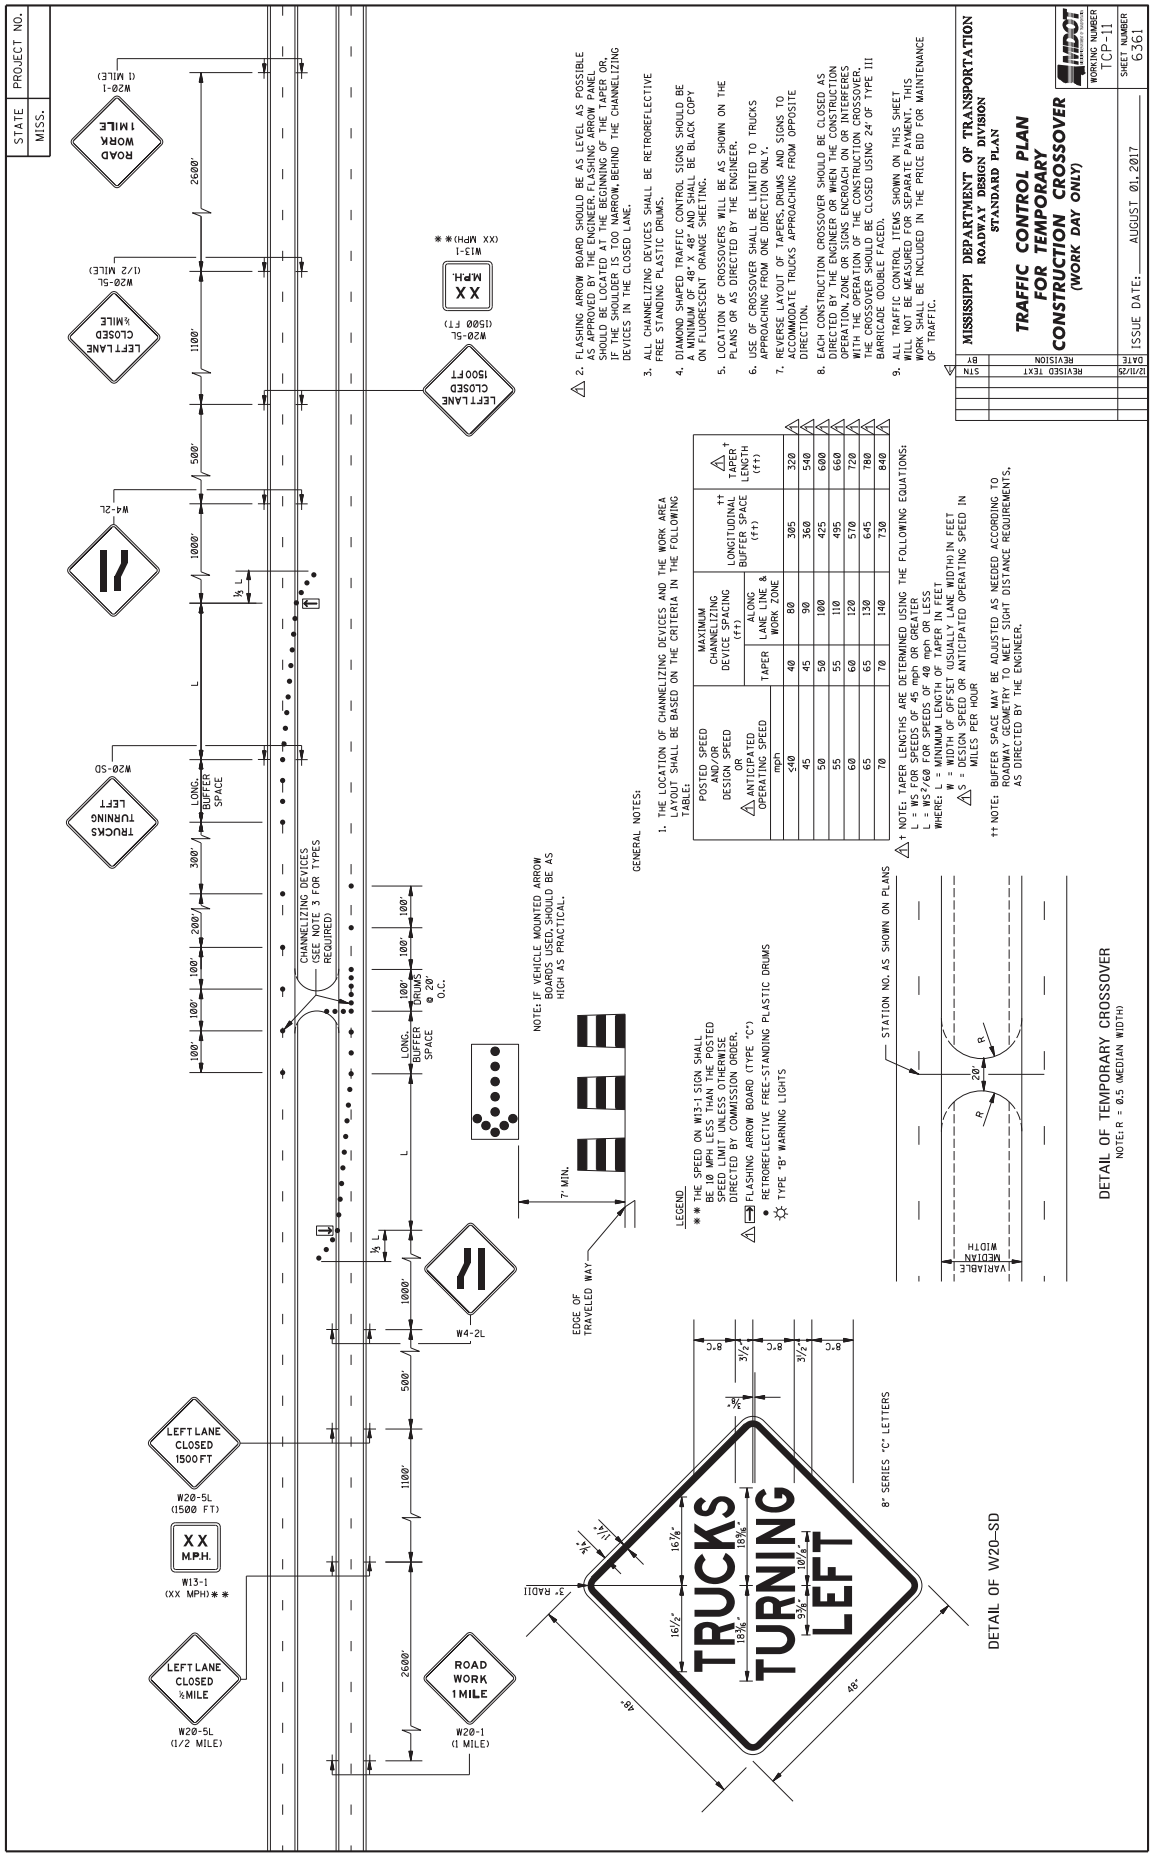
STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
TRAFFIC CONTROL PLAN FOR TEMPORARY CONSTRUCTION CROSSOVER
(WORK DAY ONLY)
WORKING NUMBER TCP-11
SHEET NUMBER 6361
ISSUE DATE: AUGUST 01, 2017
REVISION
DATE
BY
12/11/20 REVISED TEXT STN
GENERAL NOTES:
1. THE LOCATION OF CHANNELIZING DEVICES AND THE WORK AREA LAYOUT SHALL BE BASED ON THE CRITERIA IN THE FOLLOWING TABLE:
2. FLASHING ARROW BOARD SHOULD BE AS LEVEL AS POSSIBLE AS APPROVED BY THE ENGINEER. FLASHING ARROW PANEL SHOULD BE LOCATED AT THE BEGINNING OF THE TAPER OR IF THERE IS NO TAPER, AT THE ARROW, BEHIND THE CHANNELIZING DEVICES IN THE CLOSED LANE.
3. ALL CHANNELIZING DEVICES SHALL BE RETROREFLECTIVE FREE STANDING PLASTIC DRUMS.
4. DIAMOND SHAPED TRAFFIC CONTROL SIGNS SHOULD BE A MINIMUM OF 48" X 48" AND SHALL BE BLACK COPY ON FLUORESCENT ORANGE SHEETING.
5. LOCATION OF CROSSOVERS WILL BE AS SHOWN ON THE PLANS OR AS DIRECTED BY THE ENGINEER.
6. USE OF CROSSOVER SHALL BE LIMITED TO TRUCKS APPROACHING FROM ONE DIRECTION ONLY.
7. REVERSE LAYOUT OF TAPERS, DRUMS AND SIGNS TO ACCOMMODATE TRUCKS APPROACHING FROM OPPOSITE DIRECTION.
8. EACH CONSTRUCTION CROSSOVER SHOULD BE CLOSED AS DIRECTED BY THE ENGINEER OR WHEN THE CONSTRUCTION OPERATION, ZONE OR SIGNS ENCROACH ON OR INTERFERES WITH THE OPERATION OF THE CONSTRUCTION CROSSOVER. THE CROSSOVER SHOULD BE CLOSED USING 24" OF TYPE III BARRICADE, DOUBLE FACED.
9. ALL TRAFFIC CONTROL ITEMS SHOWN ON THIS SHEET WILL NOT BE MEASURED FOR SEPARATE PAYMENT. THIS WORK SHALL BE INCLUDED IN THE PRICE BID FOR MAINTENANCE OF TRAFFIC.
POSTED SPEED AND/OR DESIGN SPEED OR ANTICIPATED OPERATING SPEED mph
MAXIMUM CHANNELIZING DEVICES SPACING (ft)
TAPER
ALONG LANE LINE & WORK ZONE
LONGITUDINAL BUFFER SPACE (ft) ††
TAPER LENGTH (ft) †
≤40 40 80 305 320
45 45 90 360 540
50 50 100 425 600
55 55 110 495 660
60 60 120 570 720
65 65 130 645 780
70 70 140 730 840
† NOTE: TAPER LENGTHS ARE DETERMINED USING THE FOLLOWING EQUATIONS:
L = WS FOR SPEEDS OF 45 mph OR GREATER
L = WS²/60 FOR SPEEDS OF 40 mph OR LESS
WHERE: L = MINIMUM LENGTH OF TAPER IN FEET
W = WIDTH OF OFFSET (EQUAL TO LANE WIDTH) IN FEET
S = DESIGN SPEED OR ANTICIPATED OPERATING SPEED IN MILES PER HOUR
†† NOTE: BUFFER SPACE MAY BE ADJUSTED AS NEEDED ACCORDING TO ROADWAY GEOMETRY TO MEET SIGHT DISTANCE REQUIREMENTS, AS DIRECTED BY THE ENGINEER.
LEGEND
** THE SPEED ON W13-1 SIGN SHALL BE 10 MPH LESS THAN THE POSTED SPEED LIMIT UNLESS OTHERWISE DIRECTED BY COMMISSION ORDER.
FLASHING ARROW BOARD (TYPE "C")
RETROREFLECTIVE FREE-STANDING PLASTIC DRUMS
TYPE "B" WARNING LIGHTS
NOTE: IF VEHICLE MOUNTED ARROW BOARDS USED, SHOULD BE AS HIGH AS PRACTICAL.
7' MIN.
EDGE OF TRAVELED WAY
STATION NO. AS SHOWN ON PLANS
VARIABLE MEDIAN WIDTH
20'
R
DETAIL OF TEMPORARY CROSSOVER
NOTE: R = 0.5 MEDIAN WIDTH)
DETAIL OF W20-5D
TRUCKS TURNING LEFT
8" SERIES "C" LETTERS
3" RADII
48"
W20-5D
W4-2L
W20-5L (1500 FT)
W13-1 (XX MPH)**
W20-5L (1/2 MILE)
W20-1 (1 MILE)
LEFT LANE CLOSED 1500FT
XX M.P.H.
LEFT LANE CLOSED ½MILE
ROAD WORK 1 MILE
W20-5L (1500 FT)
W13-1 (XX MPH)**
W20-5L (1/2 MILE)
W20-1 (1 MILE)
CHANNELIZING DEVICES (SEE NOTE 3 FOR TYPES REQUIRED)
LONG. BUFFER SPACE
DRUMS @ 20' O.C.
100' 100' 100' 200' 300' L ½ L 1000' 500' 1100' 2600'

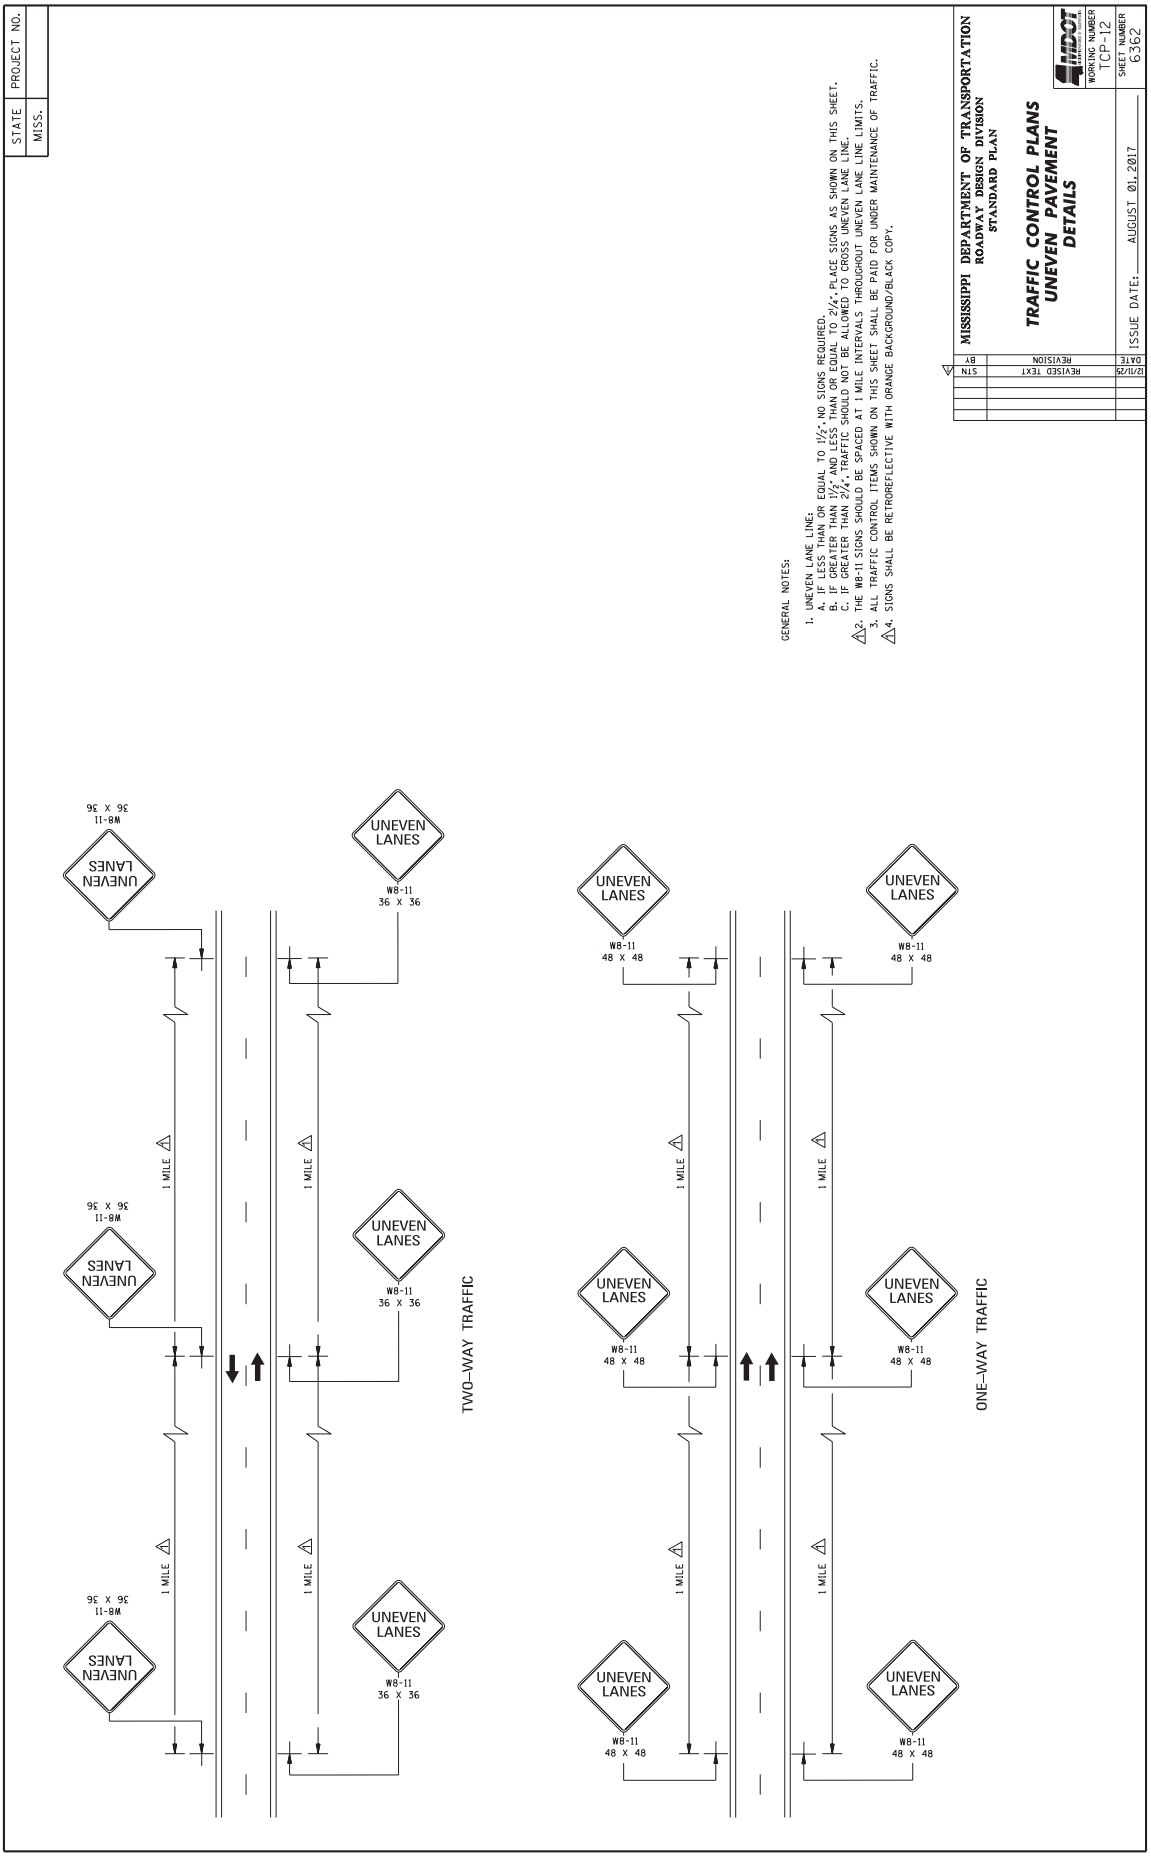
STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
TRAFFIC CONTROL PLANS
UNEVEN PAVEMENT
DETAILS
WORKING NUMBER TCP-12
SHEET NUMBER 6362
ISSUE DATE: AUGUST 01, 2017
DATE REVISION BY
12/1/25 REVISED TEXT STN
GENERAL NOTES:
1. UNEVEN LANE LINE:
A. IF LESS THAN OR EQUAL TO 1½", NO SIGNS REQUIRED.
B. IF GREATER THAN 1½" AND LESS THAN OR EQUAL TO 2¼", PLACE SIGNS AS SHOWN ON THIS SHEET.
C. IF GREATER THAN 2¼", TRAFFIC SHOULD NOT BE ALLOWED TO CROSS UNEVEN LANE LINE.
2. THE W8-11 SIGNS SHOULD BE SPACED AT 1 MILE INTERVALS THROUGHOUT UNEVEN LANE LINE LIMITS.
3. ALL TRAFFIC CONTROL ITEMS SHOWN ON THIS SHEET SHALL BE PAID FOR UNDER MAINTENANCE OF TRAFFIC.
4. SIGNS SHALL BE RETROREFLECTIVE WITH ORANGE BACKGROUND/BLACK COPY.
TWO-WAY TRAFFIC
ONE-WAY TRAFFIC
UNEVEN LANES
W8-11
36 X 36
48 X 48
1 MILE

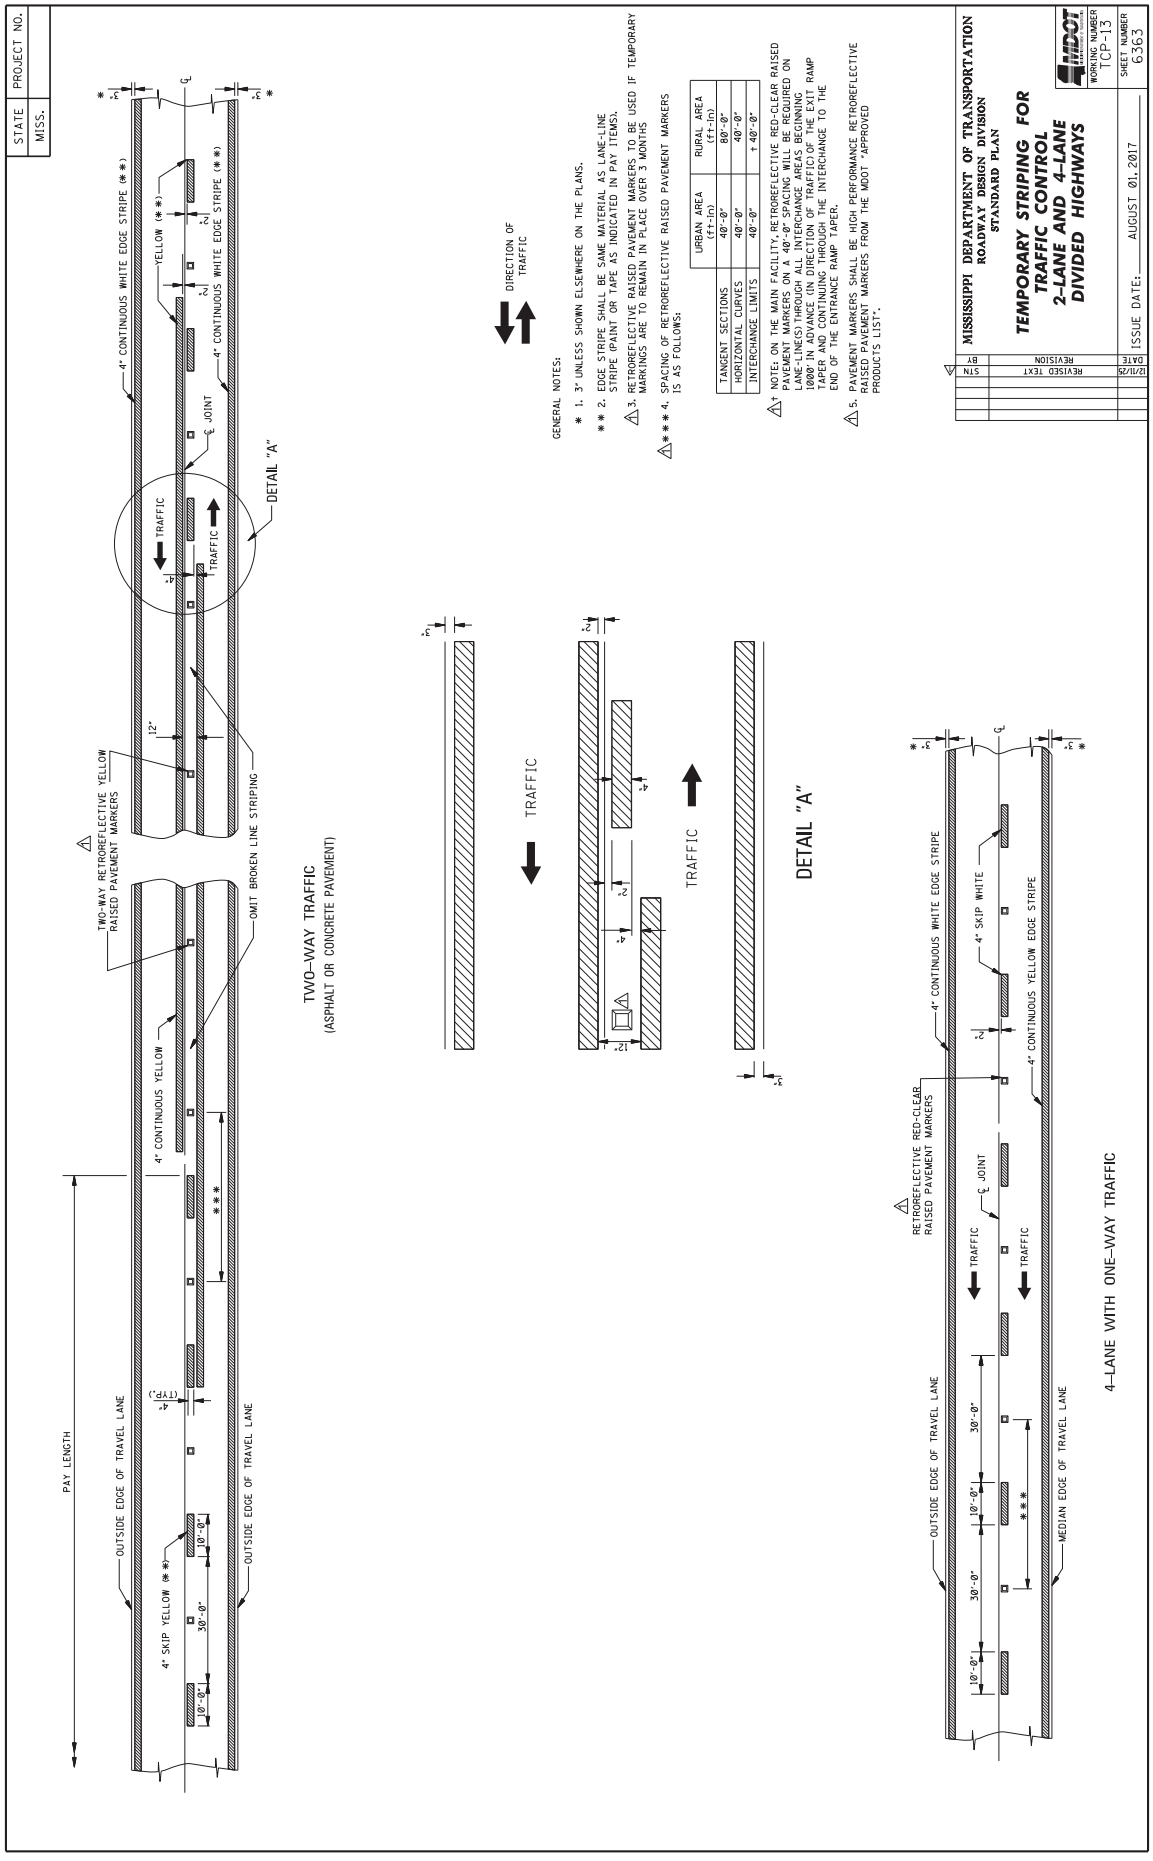

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
TEMPORARY STRIPING FOR TRAFFIC CONTROL 2-LANE AND 4-LANE DIVIDED HIGHWAYS
WORKING NUMBER TCP-13
SHEET NUMBER 6363
ISSUE DATE: AUGUST 01, 2017
REVISED TEXT
DATE
BY
STN
4" CONTINUOUS WHITE EDGE STRIPE (**)
4" CONTINUOUS YELLOW
4" SKIP YELLOW (**)
TWO-WAY RETROREFLECTIVE YELLOW RAISED PAVEMENT MARKERS
OMIT BROKEN LINE STRIPING
OUTSIDE EDGE OF TRAVEL LANE
PAY LENGTH
TRAFFIC
DETAIL "A"
TWO-WAY TRAFFIC
(ASPHALT OR CONCRETE PAVEMENT)
DIRECTION OF TRAFFIC
GENERAL NOTES:
* 1. 3" UNLESS SHOWN ELSEWHERE ON THE PLANS.
** 2. EDGE STRIPE SHALL BE SAME MATERIAL AS LANE-LINE STRIPE (PAINT OR TAPE AS INDICATED IN PAY ITEMS).
3. RETROREFLECTIVE RAISED PAVEMENT MARKERS TO BE USED IF TEMPORARY MARKINGS ARE TO REMAIN IN PLACE OVER 3 MONTHS
*** 4. SPACING OF RETROREFLECTIVE RAISED PAVEMENT MARKERS IS AS FOLLOWS:
URBAN AREA (ft-in)
RURAL AREA (ft-in)
TANGENT SECTIONS 40'-0" 80'-0"
HORIZONTAL CURVES 40'-0" 40'-0"
INTERCHANGE LIMITS 40'-0" † 40'-0"
† NOTE: ON THE MAIN FACILITY, RETROREFLECTIVE RED-CLEAR RAISED PAVEMENT MARKERS ON A 40'-0" SPACING WILL BE REQUIRED ON LANE-LINES) THROUGH ALL INTERCHANGE AREAS BEGINNING (ADJACENT TO THE GORE) IN THE DIRECTION OF TRAFFIC AT THE EXIT RAMP TAPER AND CONTINUING THROUGH THE INTERCHANGE TO THE END OF THE ENTRANCE RAMP TAPER.
5. PAVEMENT MARKERS SHALL BE HIGH PERFORMANCE RETROREFLECTIVE RAISED PAVEMENT MARKERS FROM THE MDOT "APPROVED PRODUCTS LIST".
4" CONTINUOUS YELLOW EDGE STRIPE
4" SKIP WHITE
RETROREFLECTIVE RED-CLEAR RAISED PAVEMENT MARKERS
MEDIAN EDGE OF TRAVEL LANE
4-LANE WITH ONE-WAY TRAFFIC

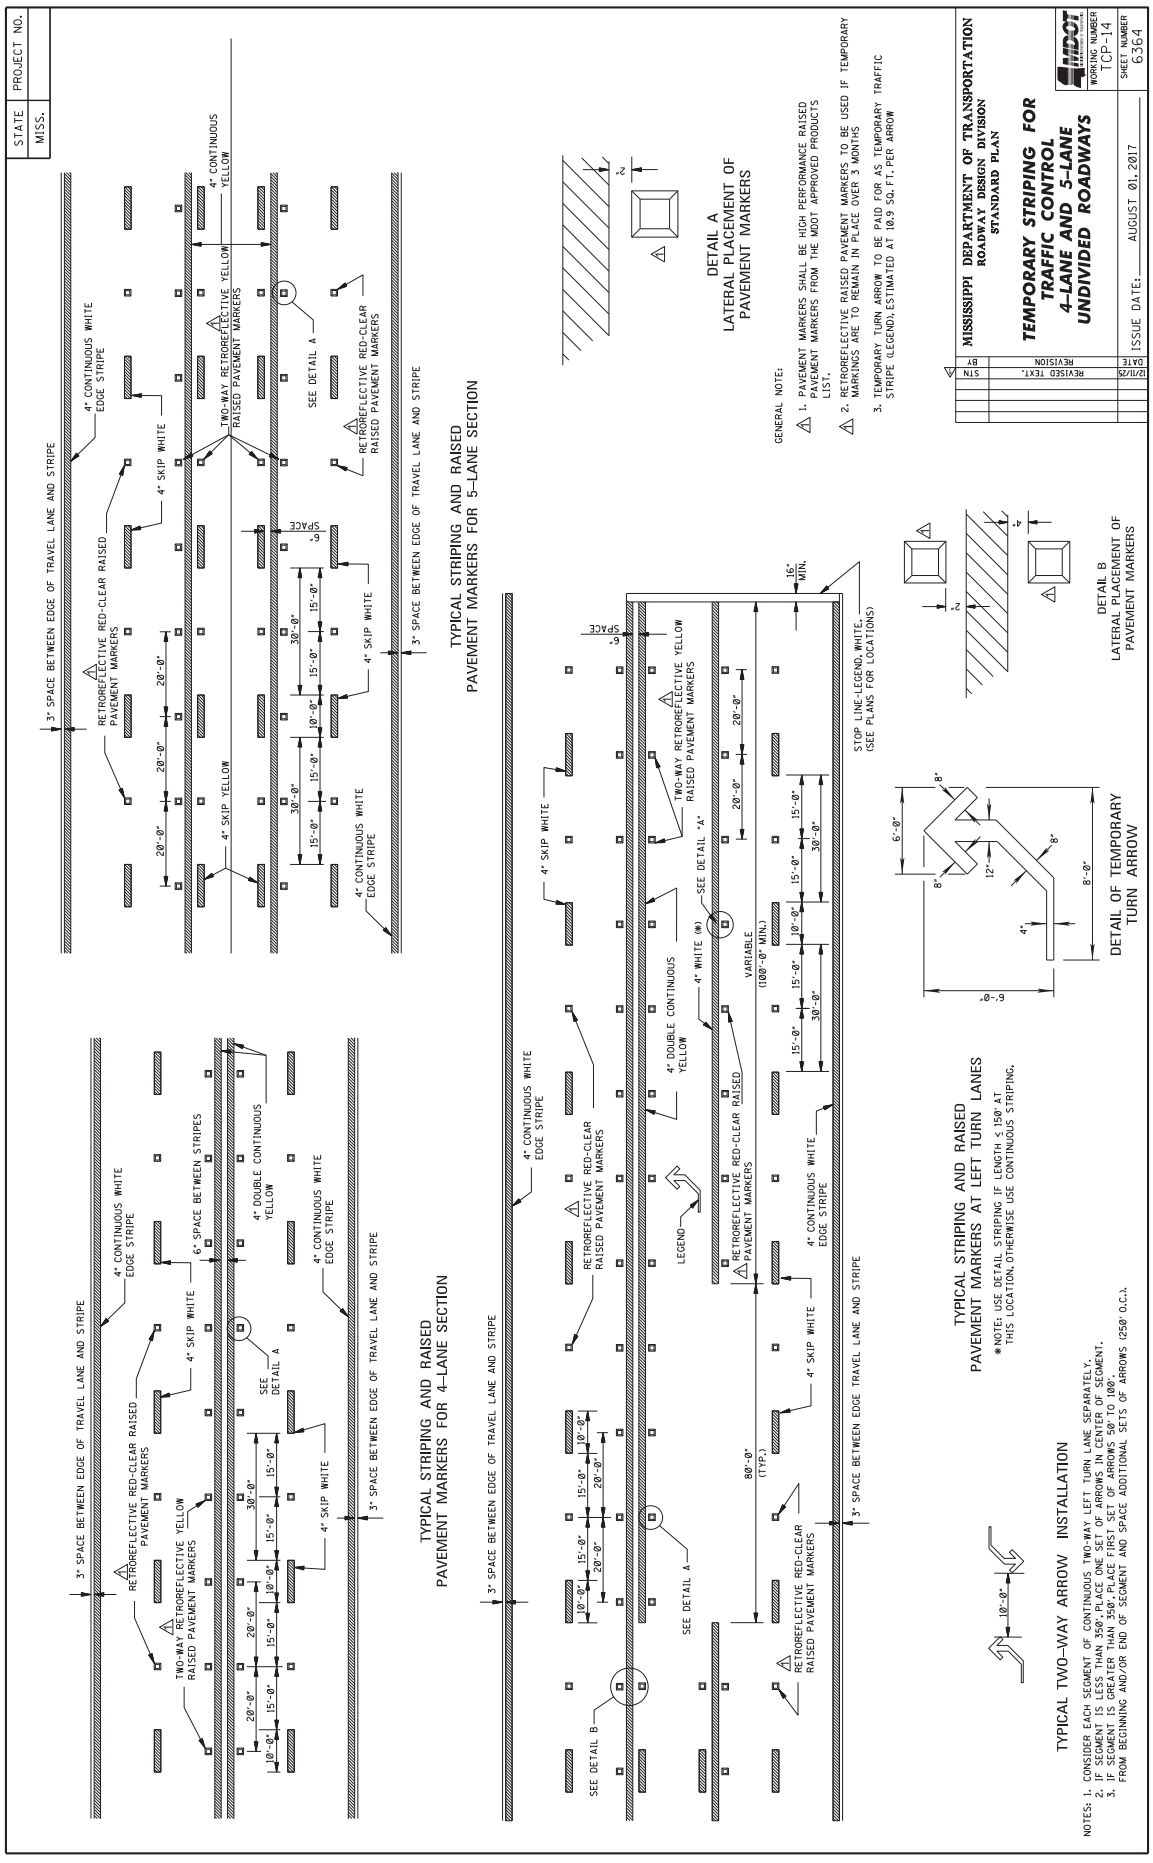
STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
TEMPORARY STRIPING FOR TRAFFIC CONTROL 4-LANE AND 5-LANE UNDIVIDED ROADWAYS
WORKING NUMBER TCP-14
SHEET NUMBER 6364
ISSUE DATE: AUGUST 01, 2017
STN BY REVISION DATE
12/11/25 REVISED TEXT.
TYPICAL STRIPING AND RAISED PAVEMENT MARKERS FOR 4-LANE SECTION
TYPICAL STRIPING AND RAISED PAVEMENT MARKERS FOR 5-LANE SECTION
TYPICAL STRIPING AND RAISED PAVEMENT MARKERS AT LEFT TURN LANES
* NOTE: USE DETAIL STRIPING IF LENGTH ≤ 150' AT THIS LOCATION, OTHERWISE USE CONTINUOUS STRIPING.
TYPICAL TWO-WAY ARROW INSTALLATION
DETAIL A LATERAL PLACEMENT OF PAVEMENT MARKERS
DETAIL B LATERAL PLACEMENT OF PAVEMENT MARKERS
DETAIL OF TEMPORARY TURN ARROW
GENERAL NOTE:
1. PAVEMENT MARKERS SHALL BE HIGH PERFORMANCE RAISED PAVEMENT MARKERS FROM THE MDOT APPROVED PRODUCTS LIST.
2. RETROREFLECTIVE RAISED PAVEMENT MARKERS TO BE USED IF TEMPORARY MARKINGS ARE TO REMAIN IN PLACE OVER 3 MONTHS
3. TEMPORARY TURN ARROW TO BE PAID FOR AS TEMPORARY TRAFFIC STRIPE (LEGEND), ESTIMATED AT 10.9 SQ. FT. PER ARROW
NOTES: 1. CONSIDER EACH SEGMENT OF CONTINUOUS TWO-WAY LEFT TURN LANE SEPARATELY.
2. IF SEGMENT IS LESS THAN 350', PLACE ONE SET OF ARROWS IN CENTER OF SEGMENT.
3. IF SEGMENT IS GREATER THAN 350', PLACE FIRST SET OF ARROWS 50' TO 100' FROM BEGINNING AND/OR END OF SEGMENT AND SPACE ADDITIONAL SETS OF ARROWS @250' O.C.).

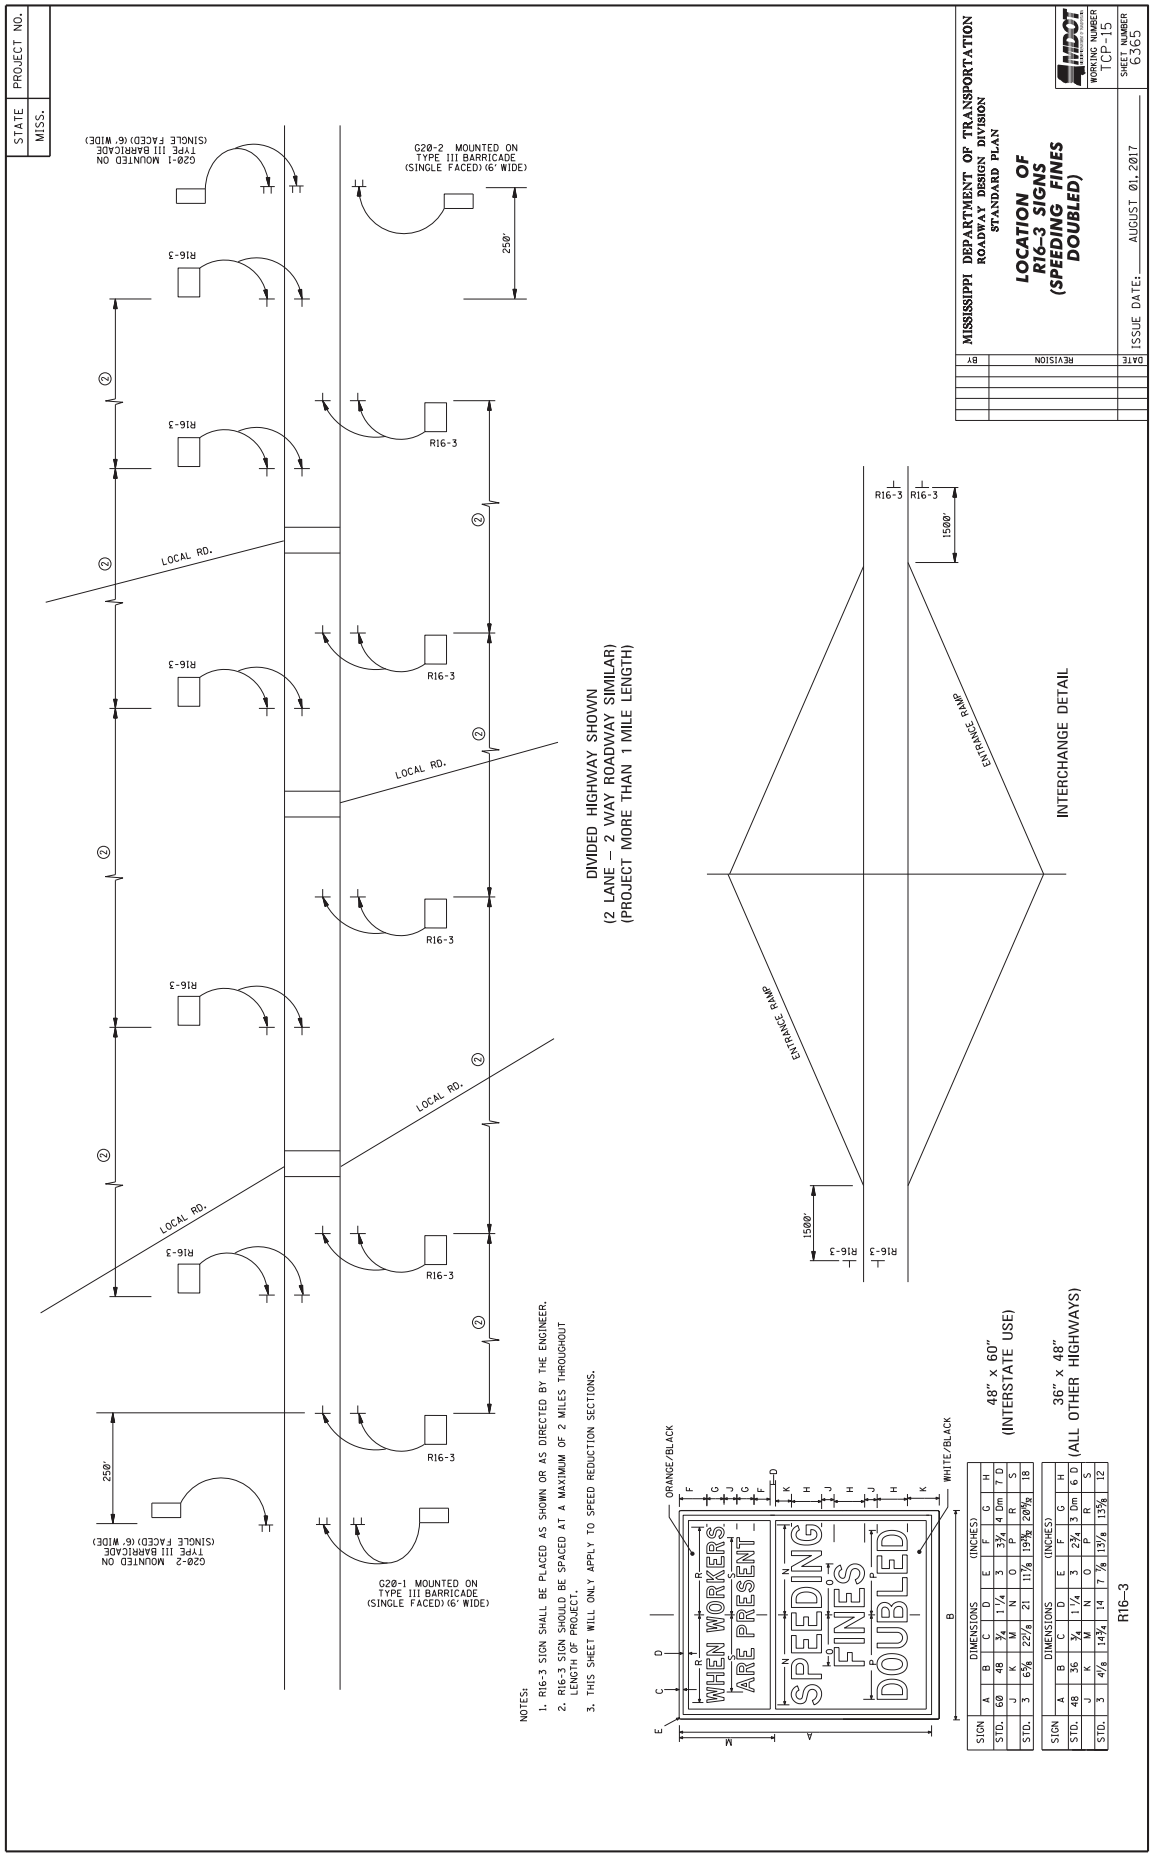

SIGN	DIMENSIONS (INCHES)								
	A	B	C	D	E	F	G	H
STD.	60	48	¾	1 ¼	3	3¾	4 Dm	7 D
	J	K	M	N	O	P	R	S
STD.	3	6⅝	22⅛	21	11⅞	19⅜	20⅜	18

SIGN	DIMENSIONS (INCHES)								
	A	B	C	D	E	F	G	H
STD.	48	36	¾	1 ¼	3	2¾	3 Dm	6 D
	J	K	M	N	O	P	R	S
STD.	3	4⅛	14¾	14	7 ⅞	13⅛	13⅝	12

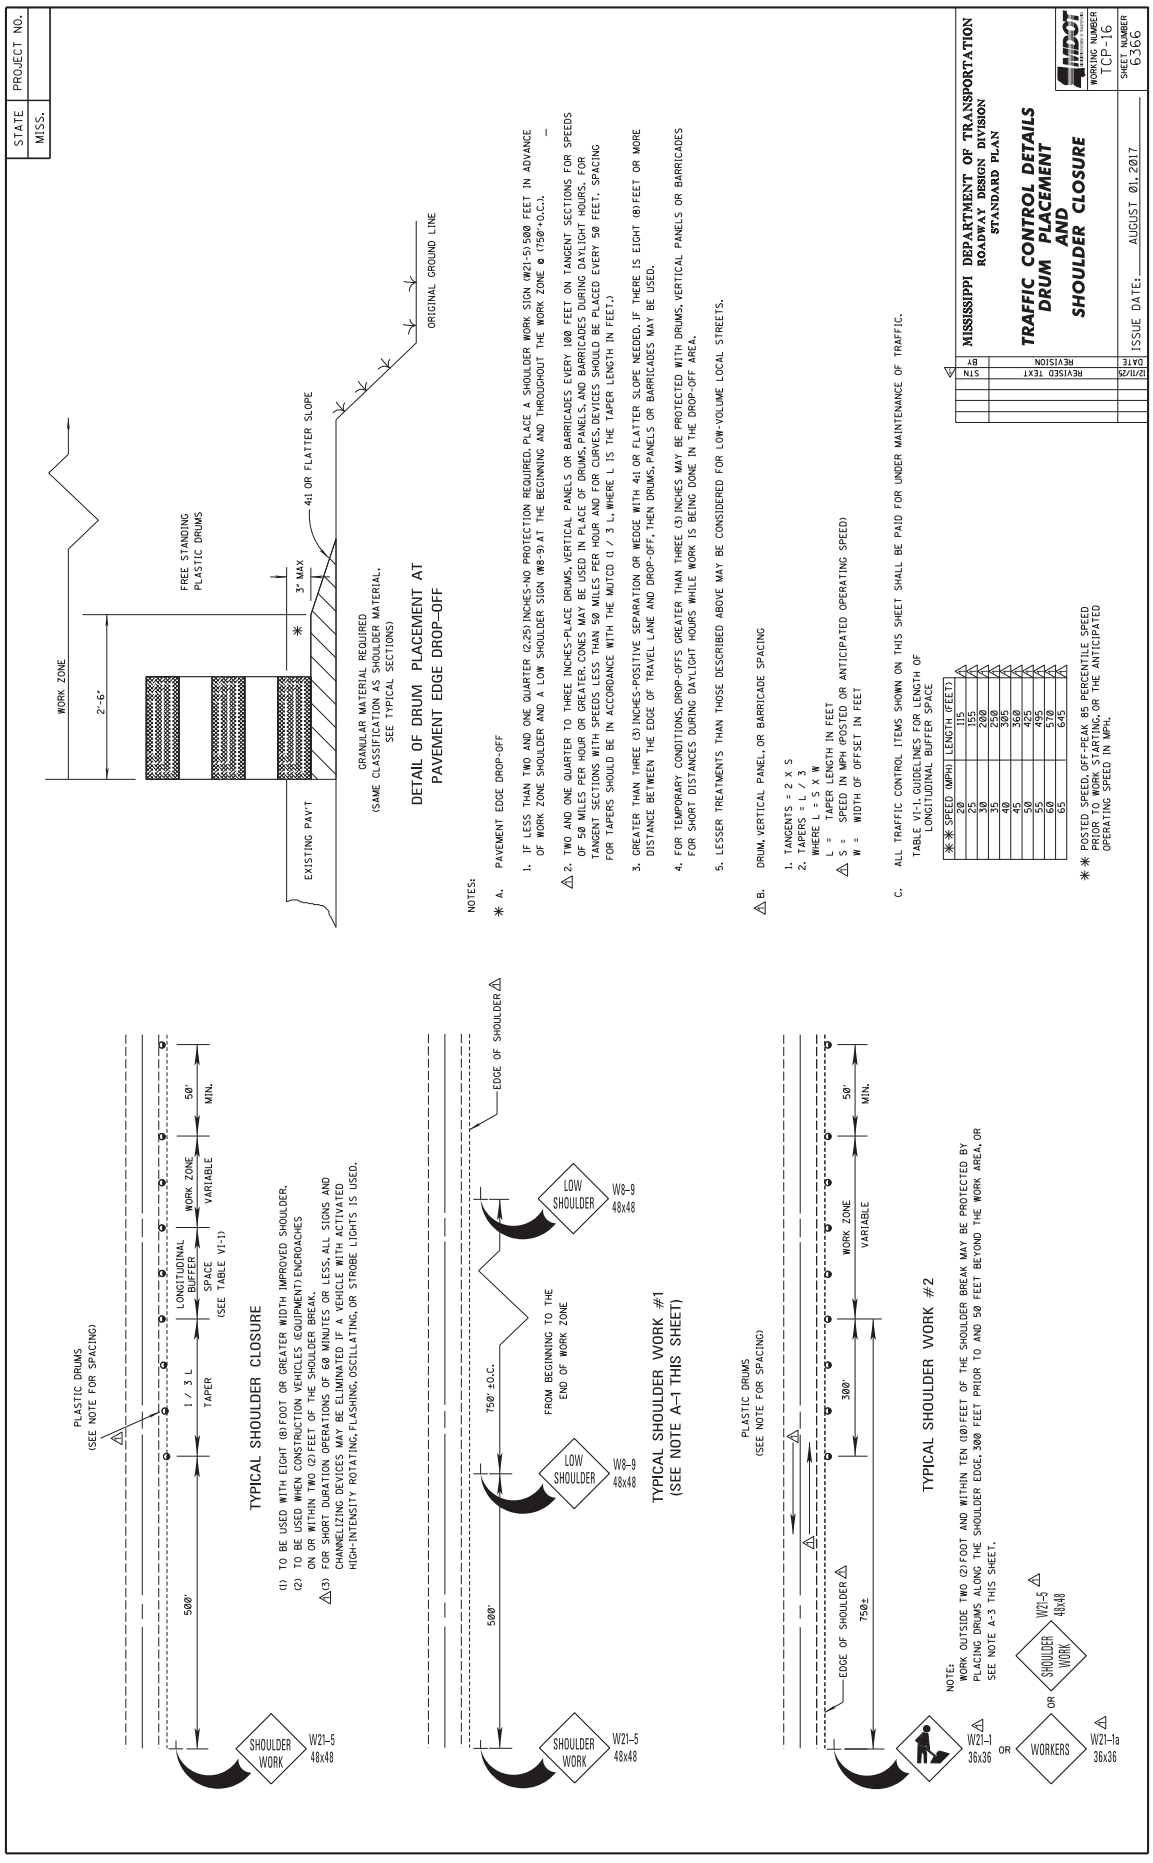
STATE MISS.
PROJECT NO.
WORK ZONE
2'-6"
FREE STANDING PLASTIC DRUMS
3" MAX
4:1 OR FLATTER SLOPE
EXISTING PAVT
GRANULAR MATERIAL REQUIRED (SAME CLASSIFICATION AS SHOULDER MATERIAL, SEE TYPICAL SECTIONS)
ORIGINAL GROUND LINE
DETAIL OF DRUM PLACEMENT AT PAVEMENT EDGE DROP-OFF
NOTES:
* A. PAVEMENT EDGE DROP-OFF
1. IF LESS THAN TWO AND ONE QUARTER (2.25) INCHES-NO PROTECTION REQUIRED. PLACE A SHOULDER WORK SIGN (W21-5) 500 FEET IN ADVANCE OF WORK ZONE SHOULDER AND A LOW SHOULDER SIGN (W8-9) AT THE BEGINNING AND THROUGHOUT THE WORK ZONE @ (750'+O.C.).
2. TWO AND ONE QUARTER TO THREE INCHES-PLACE DRUMS, VERTICAL PANELS OR BARRICADES EVERY 100 FEET ON TANGENT SECTIONS FOR SPEEDS OF 50 MILES PER HOUR OR GREATER. CONES MAY BE USED IN PLACE OF DRUMS, PANELS, AND BARRICADES DURING DAYLIGHT HOURS. FOR TANGENT SECTIONS WITH SPEEDS LESS THAN 50 MILES PER HOUR AND FOR CURVES, DEVICES SHOULD BE PLACED EVERY 50 FEET. SPACING FOR TAPERS SHOULD BE IN ACCORDANCE WITH THE MUTCD (1 / 3 L, WHERE L IS THE TAPER LENGTH IN FEET.)
3. GREATER THAN THREE (3) INCHES-POSITIVE SEPARATION OR WEDGE WITH 4:1 OR FLATTER SLOPE NEEDED. IF THERE IS EIGHT (8) FEET OR MORE DISTANCE BETWEEN THE EDGE OF TRAVEL LANE AND DROP-OFF, THEN DRUMS, PANELS OR BARRICADES MAY BE USED.
4. FOR TEMPORARY CONDITIONS, DROP-OFFS GREATER THAN THREE (3) INCHES MAY BE PROTECTED WITH DRUMS, VERTICAL PANELS OR BARRICADES FOR SHORT DISTANCES DURING DAYLIGHT HOURS WHILE WORK IS BEING DONE IN THE DROP-OFF AREA.
5. LESSER TREATMENTS THAN THOSE DESCRIBED ABOVE MAY BE CONSIDERED FOR LOW-VOLUME LOCAL STREETS.
△B. DRUM, VERTICAL PANEL, OR BARRICADE SPACING
1. TANGENTS = 2 X S
2. TAPERS = L / 3
WHERE L = S X W
L = TAPER LENGTH IN FEET
△S = SPEED IN MPH (POSTED OR ANTICIPATED OPERATING SPEED)
W = WIDTH OF OFFSET IN FEET
C. ALL TRAFFIC CONTROL ITEMS SHOWN ON THIS SHEET SHALL BE PAID FOR UNDER MAINTENANCE OF TRAFFIC.
TABLE VI-1, GUIDELINES FOR LENGTH OF LONGITUDINAL BUFFER SPACE
** SPEED (MPH) | LENGTH (FEET)
20 | 115
25 | 155
30 | 200
35 | 245
40 | 320
45 | 360
50 | 425
55 | 495
60 | 570
65 | 645
** POSTED SPEED, OFF-PEAK 85 PERCENTILE SPEED PRIOR TO WORK STARTING, OR THE ANTICIPATED OPERATING SPEED IN MPH.
PLASTIC DRUMS (SEE NOTE FOR SPACING)
1 / 3 L
TAPER
LONGITUDINAL BUFFER SPACE (SEE TABLE VI-1)
WORK ZONE VARIABLE
50' MIN.
500'
SHOULDER WORK
W21-5 48x48
TYPICAL SHOULDER CLOSURE
(1) TO BE USED WITH EIGHT (8) FOOT OR GREATER WIDTH IMPROVED SHOULDER.
(2) TO BE USED WHEN CONSTRUCTION VEHICLES (EQUIPMENT) ENCROACHES ON OR WITHIN TWO (2) FEET OF THE SHOULDER BREAK.
△(3) FOR SHORT DURATION OPERATIONS OF 60 MINUTES OR LESS, ALL SIGNS AND CHANNELIZING DEVICES MAY BE ELIMINATED IF A VEHICLE WITH ACTIVATED HIGH-INTENSITY ROTATING, FLASHING, OSCILLATING, OR STROBE LIGHTS IS USED.
EDGE OF SHOULDER △
750' ±O.C.
500'
FROM BEGINNING TO THE END OF WORK ZONE
LOW SHOULDER
W8-9 48x48
SHOULDER WORK
W21-5 48x48
TYPICAL SHOULDER WORK #1
(SEE NOTE A-1 THIS SHEET)
PLASTIC DRUMS (SEE NOTE FOR SPACING)
EDGE OF SHOULDER △
750±
300'
WORK ZONE VARIABLE
50' MIN.
TYPICAL SHOULDER WORK #2
NOTE: WORK OUTSIDE TWO (2) FOOT AND WITHIN TEN (10) FEET OF THE SHOULDER BREAK MAY BE PROTECTED BY PLACING DRUMS ALONG THE SHOULDER EDGE. 300 FEET PRIOR TO AND 50 FEET BEYOND THE WORK AREA, OR SEE NOTE A-3 THIS SHEET.
△W21-1 36x36
OR
WORKERS
△W21-1a 36x36
OR
SHOULDER WORK
△W21-5 48x48
STN | REVISED TEXT | 12/11/25
BY | REVISION | DATE
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
TRAFFIC CONTROL DETAILS
DRUM PLACEMENT AND
SHOULDER CLOSURE
ISSUE DATE: AUGUST 01, 2017
WORKING NUMBER TCP-16
SHEET NUMBER 6366

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 - NOTICE TO BIDDERS NO. 7682 **CODE: (SP)**

DATE: **04/22/2026**

SUBJECT: **Contract Time**

PROJECT: **NH-0008-03(050) / 105530301 - Madison County**
CRP-0008-03(050) / 105530302 - Madison County
CRP-0008-03(050) / 105530303 - Hinds County
CRP-0008-03(050) / 105530304 - Yazoo County

The calendar date for completion of work to be performed by the Contractor for this project shall be **July 09, 2027** which date or extended date as provided in Subsection 108.06 shall be the end of contract time. It is anticipated that the Notice of Award will be issued no later than **June 09, 2026** and the effective date of the Notice to Proceed / Beginning of Contract Time will be **July 09, 2026**.

Should the Contractor request a Notice to Proceed earlier than **July 09, 2026** and it is agreeable with the Department for an early Notice to Proceed, the requested date will become the new Notice to Proceed date.

All requests for an early Notice to Proceed shall be sent to the Project Engineer who will forward it to the Contract Administration Division.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 - NOTICE TO BIDDERS NO. 7683

DATE: 04/22/2026

SUBJECT: Specialty Items

PROJECT: NH-0008-03(050)/105530301 & CRP-0008-03(050)/105530302 & CRP-0008-03(050)/105530303 & CRP-0008-03(050)/105530304 - HINDS & MADISON & YAZOO

Pursuant to the provisions of Section 108, the following work items are hereby designated as "Specialty Items" for this contract. Bidders are reminded that these items must be subcontracted in order to be considered as specialty items.

CATEGORY: GUARDRAIL, GUIDERAIL

Line No	Pay Item	Description
0180	606-B003	Guard Rail, Class A, Type 1, 'W' Beam, Metal Post
0190	606-D012	Guard Rail, Bridge End Section, Type D Modified
0200	606-D023	Guard Rail, Bridge End Section, Type I, Metal Post
0210	606-E005	Guard Rail, Terminal End Section, Flared

CATEGORY: INTELLIGENT TRANSPORTATION SYSTEMS

Line No	Pay Item	Description
0730	907-659-A001	Traffic Management Center Modifications

CATEGORY: MISCELLANEOUS/ SPECIALTY WORK ITEMS

Line No	Pay Item	Description
0140	423-A001	Rumble Strips, Ground In

CATEGORY: PAVEMENT STRIPING AND MARKING

Line No	Pay Item	Description
0500	907-626-A010	6" Thermoplastic Traffic Stripe, Skip White
0510	907-626-B006	6" Thermoplastic Traffic Stripe, Continuous White
0520	907-626-E005	6" Thermoplastic Traffic Stripe, Continuous Yellow
0530	907-626-G004	Thermoplastic Detail Stripe, White
0540	907-626-G005	Thermoplastic Detail Stripe, Yellow
0550	907-626-H009	Thermoplastic Legend, White
0560	907-626-H010	Thermoplastic Legend, White
0570	907-627-J001	Two-Way Clear Reflective High Performance Raised Markers
0580	907-627-K001	Red-Clear Reflective High Performance Raised Markers
0590	907-627-L001	Two-Way Yellow Reflective High Performance Raised Markers

CATEGORY: TRAFFIC CONTROL - PERMANENT

Line No	Pay Item	Description
0340	630-C001	Square Tube Posts, 4.0 lb/ft
0350	630-F002	Delineators, Flexible Post Mounted, Crossover, Type I, Yellow
0360	630-F006	Delineators, Guard Rail, White
0370	630-F007	Delineators, Guard Rail, Yellow
0380	630-G004	Type 3 Object Markers, OM-3R or OM-3L
0600	907-630-PP002	Roadside Directional Signs, Sheet Aluminum, 0.125" Thickness, Ground Mounted Roadside Directional Sigı
0610	907-632-C001	Modify Existing Traffic Signal Cabinet Assembly

0620	907-634-E001	Camera Pole with Foundation, 50' Pole
0630	907-636-B053	Electric Cable, Underground in Conduit, THHN, AWG #6, 3 Conductor
0640	907-637-A002	Pullbox Enclosure, Type 2
0650	907-637-A004	Pullbox Enclosure, Type 4
0660	907-637-A005	Pullbox Enclosure, Type 5
0670	907-637-E001	Traffic Signal Conduit, Structural Conduit, Type 1, 1 1/2"
0680	907-637-H001	Traffic Signal Conduit Bank, Underground, Rolled Pipe, 2 @ 2"
0690	907-637-H002	Traffic Signal Conduit Bank, Underground, Rolled Pipe, 2"
0700	907-637-K001	Traffic Signal Conduit Bank, Aerial Supported, Type 1, 2 @ 2"
0710	907-650-A002	On Street Video Equipment, Fixed Type
0720	907-650-A003	On Street Video Equipment, PTZ Type
0740	907-660-A002	Equipment Cabinet, Type B
0750	907-661-A004	Fiber Optic Cable, 72 SM
0760	907-661-A006	Fiber Optic Cable, Aerial, 72 SM
0770	907-661-B002	Fiber Optic Drop Cable, 12 SM
0780	907-663-A001	Network Switch, Type A
0790	907-663-D001	Category 6 Cable, Installed in Conduit

CATEGORY: TRAFFIC CONTROL - TEMPORARY

Line No	Pay Item	Description
0230	619-A1001	Temporary Traffic Stripe, Continuous White
0240	619-A2001	Temporary Traffic Stripe, Continuous Yellow
0250	619-A3001	Temporary Traffic Stripe, Skip White
0260	619-A5001	Temporary Traffic Stripe, Detail
0270	619-A6001	Temporary Traffic Stripe, Legend
0280	619-A6002	Temporary Traffic Stripe, Legend
0290	619-D1001	Standard Roadside Construction Signs, Less than 10 Square Feet
0300	619-D2001	Standard Roadside Construction Signs, 10 Square Feet or More
0310	619-D3001	Remove and Reset Signs, All Sizes
0320	619-G4005	Barricades, Type III, Single Faced

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 - NOTICE TO BIDDERS NO. 7684 **CODE: (SP)**

DATE: **04/22/2026**

SUBJECT: **Scope of Work**

PROJECT: **NH-0008-03(050) / 105530301 - Madison County**
CRP-0008-03(050) / 105530302 - Madison County
CRP-0008-03(050) / 105530303 - Hinds County
CRP-0008-03(050) / 105530304 - Yazoo County

The contract documents do not include an official set of construction plans but may, by reference, include some Standard Drawings when so specified in a Notice to Bidders entitled, "Standard Drawings".

A general description of the work required on the project is as follows:

Mill and overlay approximately 9.3 miles of existing asphalt pavement, repair any failed areas, place rumble strip, and replace guard rail on US 49 in Madison County beginning at the Hinds County line (BOP Station 100+00) and ending at the Yazoo County Line (EOP Station 586+73) in Madison County.

Details of specific work are mentioned in the following sections:

Project Wide Work Station 100+00 (BOP) to 586+73 (EOP) (North & South Bound)

Prior to beginning the overlaying operations, any failed areas in the existing pavement shall be removed to subgrade depth and repaired with 12.5-mm, HT, Asphalt Pavement (Leveling). Payment for removal and disposal of failed areas will be made using the appropriate pay items. Other repairs may be necessary as field conditions require and as directed by the Engineer.

After failures have been repaired, mill and overlay all travel lanes and inside shoulders (approximately 9.3 miles) with 1½" of fine milling and 1 lift @ 1½" of 9.5mm HT asphalt pavement, as per the attached typical sections, and mill and overlay outside shoulders with 1 lift @ 1½" of ST 9.5mm.

General Notes: These general notes are applicable to all sites.

Milling

Milling/paving will not begin until an **approved** asphalt mix design has been received, nor until such time that, in the opinion of the Engineer, weather conditions have been consistently suitable enough to allow placement of the asphalt pavement after the milling operations.

The Reclaimed Asphalt Pavement (RAP) material removed by the milling operation shall become the property of the Contractor.

Where milling is required, the Contractor shall provide outlets in the existing shoulders at sufficient intervals to prevent pooling or standing water on the milled surface, the cost of which shall be absorbed in other items bid.

Milling and paving operations shall be performed such that a -2% slope from centerline is provided in normal crown roadway sections. Super elevation through curves shall be maintained as it currently exists or improved as directed. Where slope correction is required correction will be made by milling, paving, or combination thereof as directed by the engineer. Milling correction: Mill outside edge of pavement to a depth of 1½" on a 2% slope towards the centerline. Paving Correction: Mill to depth of 1½" on existing slope and 2¼" and variable on centerline and 1½" on outside edge. Combination Method: Combination of both methods as directed by the Engineer to achieve the desired slope. In super elevated areas where correct SE exist milling will transition to thickness through curves. Where correct SE does not exist milling will transition at curves to correct SE as directed by the engineer.

Milling operations shall be performed in accordance with the Contract documents and the MDOT Standard Specifications for Road and Bridge Construction. Variable width and length transitions may be required for ties at ramps, local roads, and project limits.
Milling of driveway pads shall be conducted in a manner to prevent gouging or otherwise affecting the roadway pavement structure and slope. Milling of driveway pads shall not be done in simultaneous path with main line milling.

Traffic will be allowed to travel on the mainline milled surface for 3 days, and the Contractor will be assessed a penalty of **$5,000** per calendar day afterwards until the mainline milled surface is covered with the next lift of asphalt. This allowance for traffic on mainline milled surface is not a requirement. It shall be determined by the Contractor how many days up to 3 days traffic are allowed on the milled surface. If the milled surface begins to deteriorate under traffic, the Contractor shall make the necessary adjustments to prevent the roadway deterioration. The Contractor shall be responsible for any claims due to the deteriorating roadway.

Traffic will be allowed to run on all milled surfaces other than the mainline for 30 days unless otherwise stated, and the Contractor will be assessed a penalty of **$1,000** per calendar day afterwards until the non-mainline milled surface is covered with the next lift of asphalt. The additional allowance for the non-mainline milled surface is for the Contractor's convenience, and thus, the Contractor is responsible for any pavement failures or damage sustained during this period. Milling and paving of paved shoulders shall conform to Section 406.03.2 of the Standard Specifications.

Paving

Per Section 401.02.3.2, the asphalt mix design shall be submitted to the Engineer at least 10 working days prior to its proposed use.

Prior to mainline milling and paving operations, failed areas in the existing pavement shall be removed and backfilled with 12.5mm HT Leveling asphalt pavement as per the attached typical sections and details. Asphalt shall be placed in multiple lifts with a maximum lift thickness of 3". Any granular/chemically treated/stone/etc. base or subgrade material deemed unsuitable by the Engineer shall be removed as directed and backfilled with 12.5mm HT Leveling asphalt pavement. Payment for the excavation of the granular base and subgrade will be made using the 203-G Excess Excavation pay item. A list of the failed areas is shown in the attached tables. Pavement repairs shall be completed as a continuous operation in order to minimize traffic impacts. Lane closures shall remain in place until the failed area has been completely repaired. Lane closures may not be left unattended except as allowed by the Engineer on multilane projects.

The surface lift for failed area repair or concrete punchout repair shall have a maximum deviation of 3/8" as determined by a 10-foot straight edge. Any location that deviates more than this tolerance, as determined by the Engineer, shall be corrected at no additional cost to the State.

Publicly maintained roads and streets should be paved to the existing right-of-way and in accordance with the attached drawings.

Privately owned entrances shall be paved to the shoulder line per the included typical drawing unless otherwise directed. Pad dimensions shall match the existing lengths and widths unless otherwise directed. Pads shall be shaped horizontally and vertically to prevent excessive drop-offs. Any new driveway pads deemed necessary by the Engineer shall be placed according to specifications.

If traditional excavation methods are used, the removal area shall first be saw cut full depth including concrete, where applicable, to create a neat line and prevent damage to the adjacent pavement structure. Payment for saw cuts will be made using the appropriate items. If milling techniques are used, the area will not require saw cuts but care should be exercised to create a neat removal line and to prevent damaged to the adjacent pavement structure. If saw cuts are used in conjunction with milling, payment will be made using the appropriate pay items. Payment will not be made for saw cuts that are not performed.

Granular Shoulder Material

Where applicable, the existing shoulders are to be raised to match the new pavement elevation by placing variable depth Granular Material. The shoulders shall be graded and pulled up on a daily basis to eliminate drop-offs in excess of 2¼". Placement of the granular material on the finished asphalt course shall not be permitted. The existing shoulder shall be scarified to allow incorporation of the new shoulder material. The material shall be bladed, rolled, and compacted to a finished slope of four percent (4%) in normal crown sections. Placement of this material shall be performed to provide a uniform and compacted shoulder with a minimum depth and width of material placed. Shoulders with adequate shoulder material in place shall be bladed to a slope of four percent (4%) in normal crown sections. The cost of blading will be an absorbed item and is to be included in the price of other items bid.

Granular material (Class 5, Group C) shall be provided around driveway pads as directed to prevent shoulder drop-offs and shall be placed in a timely manner. Drop-offs exceeding 2¼" shall be corrected within 2 calendar days of the placement of the pad. Stabilizer aggregate shall be used as directed by the Engineer.

Any material excavated from the existing shoulder during pavement widening operations or as a result of shoulder blading shall be used on the existing shoulder to match the new pavement elevation and any surplus material shall be spread along the edge of the shoulders, fore slopes, or other adjacent areas as directed by the Engineer and will be an absorbed item. Material which cannot be suitably placed in adjacent areas and deemed to be excess excavation by the Engineer shall be removed from the project site. Payment for removal of excess material will be made using Pay Item No. 203-G Excess Excavation.

Temporary and Permanent Pavement Markings

Temporary traffic stripe will be required immediately after the milling and/or required overlay and prior to opening area to traffic. Temporary stripe is to be placed in the same location and configuration as the permanent stripe except that it may be offset as required for milling and paving operations. If temporary stripe is offset, the Contractor shall conduct operations in a manner to ensure the final temporary stripe is placed at the required location of the permanent stripe. If removal of temporary offset stripe is required in order to achieve the correct location and alignment of permanent stripe, the cost of removal will be absorbed in other items bid. Placing double temporary centerline will not be allowed.

Temporary striping shall conform to finished stripe specifications for alignment, neatness, and straightness.

The use of short strips of traffic tape will not be allowed unless approved by the Engineer.

All permanent striping will be thermoplastic, 90-mil thickness unless otherwise specified in Section 626.03.1.2. Edge lines will be placed to accommodate the lane widths shown on the attached applicable typical sections unless prevented by field conditions.

Per Section 626.03.1.2, a binder-sealer shall be applied to the concrete pavement or bridge surface prior to the placement of the thermoplastic material and shall be absorbed under the thermoplastic pay items. The type and amount of binder-sealer used shall adhere to the thermoplastic manufacturer's recommendations.

Rumble strip will be placed throughout the project limits in accordance with the attached details and MDOT Standard Drawings.

Permanent raised pavement markers shall be installed on mainline and local public roads after completion of all paving operations. Edgeline RPM's shall be installed as per Special Design Drawing RPM-1. If the usable space outside of the traffic stripe is insufficient to install the RPM's as per Special Design Drawing RPM-1, then the Contractor shall be allowed to install the outside edge of the RPM flush with the inside edge of the traffic stripe.

Payment for edge stripe on local roads shall be made under Pay Item No. 907-626-G004, Thermoplastic Detail Stripe, White when the length of said stripe is less than 150 feet when measured from the end of the radius. If the measured length is greater than 150 feet, then payment shall be made under Pay Item No. 907-626-B006 6" Thermoplastic Traffic Stripe, Continuous White.

Payment for centerline stripe on local roads shall be made under Pay Item No. 907-626-G005, Thermoplastic Detail Stripe, Yellow when the length of said stripe is less than 150 feet when measured from the stop bar. If the measured length is greater than 150 feet, then payment shall be made under Pay Item No. 907-626-E005 6" Thermoplastic Traffic Stripe, Continuous Yellow. Centerline Stripe shall be omitted on local roads whose width is less than 20 feet.

The face of all existing undisturbed curbs shall be painted with at least two coats of white traffic paint with glass beads being required in the top coat. The cost associated with the painting of new or existing curb is to be included in other items bid.

The face of all existing, painted, concrete islands shall be painted with at least two coats of white traffic paint with glass beads being required in the top coat. The cost associated with the painting of new or existing curb is to be included in other items bid.

Pavement section marking tape on this project shall be located prior to overlaying and placed back in the same location after paving operations have ceased. The section marking shall be 8-inch high performance cold plastic detail stripe and shall be four (4) feet in length. The marking shall be centered across the centerline stripe. The cost of this item shall be absorbed in other items bid.

Guardrail

Guardrails are to be replaced at the locations shown on the attached table. Removal of guardrail shall consist of removal of bridge end section, w-beam/thrie beam, terminal end

section, posts, and all other appurtenances. All guardrail removed is to be replaced the same day and prior to reopening the adjacent lane of traffic. Voids created by the removal of posts, concrete anchors, footings, etc. shall be backfilled and compacted in accordance with Section 203 of the Standard Specifications.

The asphalt guardrail pad shall be milled and paved up to the face of the guardrail. The remainder of the guardrail pad shall be modified or constructed to conform to Special Design Drawing SDGR-PI. Pay item No. 202-B006 Removal of Asphalt Paved Shoulders, All Depths, Pay Item No. 304-D002 Crushed Stone, and Pay Item No. 503-C010 Saw Cut, Full Depth shall be used to modify any existing asphalt guardrail pads. If blading is required in order to meet the minimum depth, then said blading shall be an absorbed item and the excavated material shall be retained and used to raise the existing shoulder to match the new pavement elevation. Material which cannot be placed and blended in adjacent areas and deemed to be excess excavation by the Engineer shall be removed under Pay Item No. 203-G001 Excess Excavation. The installed guardrail shall meet all requirements in order to be MASH compliant.

Guardrail lengths are based on terminal end length of 37.5’. If terminal of length other than this is used, an adjustment in w-beam length is required.

All dimensions and spacings for bridge rail connectors shall be verified in the field by the Contractor prior to fabrication.

Permanent Signs

Permanent signs as listed on the attached tables are to be replaced. Unless otherwise listed in the attached tables, existing posts, anchors, angles/bars, and other components are to be reused. The Contractor shall use new bolts, screws, washers, nuts, etc. of the required sizes in the installation of signs. If required as part of the sign replacement activities, all post and I-beam lengths in these plans are estimated. Post lengths for all signs shall be verified in the field by the Contractor prior to fabrication. Installation dates shall be clearly written in bold black markings on the back bottom half off all signs with a permanent marking stick that is waterproof, fade resistant, and marks on wet or dry surfaces. If existing sign posts or footings are to be replaced, the existing posts and footings are to be removed and the area backfilled and compacted in accordance with Section 203 of the Standard Specifications. Removal of sign, post, and footing and backfilling will be paid using the removal of sign pay item.

Object markers at bridge approaches and other locations are to be replaced as shown in the attached table. Removal of object markers shall be absorbed in the cost of other items bid.

Traffic Control

The Contractor shall erect and maintain construction signing and provide all signs and traffic control devices necessary to safely maintain traffic around and through the work areas in accordance with the Traffic Control Plan and the MUTCD. The cost is to be included in the price bid for Pay Item No. 907-618-A, Maintenance of Traffic. Fluorescent orange sheeting shall be used on all construction and traffic control signs except those designated in the plans to be black legend and border on white background.

Standard roadside construction signs, barricades, etc. shall be placed in accordance with the attached tables, drawings, and as directed by the Engineer. W20-1 signs shall be placed on all public road approaches as shown or as directed. Payment for standard roadside construction signs, barricades, etc. will be made using the appropriate pay items.

The Contractor shall on a daily basis, remove all debris from within the roadway and a 30-foot clear zone which, in the opinion of the Engineer, is a hazard to the traveling public. This activity shall begin with the beginning of work or the beginning of the contract time, whichever comes first. No direct payment will be made for the debris removal; the cost is to be included in the prices of items bid. Failure of the Contractor to remove the debris as prescribed herein shall be just cause for withholding the monthly progress estimate payment or suspending active operations until the debris is satisfactorily removed by the Contractor.

Temporary asphalt joints (aka paper joints) shall be employed at all locations requiring traffic to traverse an uneven, transverse, pavement joint. Paper joints shall be a minimum of 9 feet in length and for the full width of the milled/paved surface. Paper joints shall be adequately maintained.

Potholes that may exist or occur in the existing pavement are to be patched in a timely manner as required. Patching of potholes shall be considered an absorbed item.

Temporary Portable Rumble Strips, as described in Special Provision No. 907-619, shall be used in advance of each lane closure. Direct payment will not be made for this item and shall be considered absorbed under Pay Item No. 907-618-A001 Maintenance of Traffic.

Random Clearing

Interstates and Four Lane Sections

Random clearing shall be required at a distance of seventy feet (70’) from the pavement edge or to the right-of-way line, whichever distance is less. In situations where the clearing limits will leave a strip of trees in the median 20 feet (20’) wide or less, then said strip shall also be cleared. Tree limbing shall be required at a distance of up to thirty feet (30’) vertically within the clearing limits.

The random clearing shall encompass trees four inches (4”) or greater in diameter, scrubs, and overhang within the clearing limits. Trees shall either be cut flush with the ground line or if the Contractor elects to cut the tree above the groundline then the tree stump shall be

ground flush with the ground line. The cut material shall either be hauled away from the project site or mulched in place to a depth of four inches (4") maximum in any one location. If the Contractor elects to utilize other means of disposal for the cut material, then said method shall be approved by the Engineer prior to commencement.

All costs associated with the cutting, mulching, removal, stump grinding, or any other work associated with the dead tree removal shall be included in Pay Item No. 201-D001 Random Clearing (Per Station).

All areas disturbed by the Contractor shall be stabilized to the satisfaction of the Engineer at no additional cost to the state. The Contractor shall be responsible for any damage caused to above ground utilities, private property, and State owned property within the limits of the random clearing.

ITS

105530-302000 MADISON COUNTY
ITS Scope of Work
See design sheets in Proposal for details

- Install 72 Single Mode Fiber along US Highway 49 from the Big Black River bridge to Madison-Hinds County Line.
- Add existing Traffic Monitoring Video Cameras to Fiber Network
    - Camera Tree at the intersection of US 49 & Cox Ferry Road intersection
    - Camera Tree at the intersection of US 49 & MS 22 intersection
- Interconnection of existing traffic signal via fiber
    - US 49 at MS 22
    - US 49 at Cox Ferry Road

105530-303000 HINDS COUNTY
ITS Scope of Work
See design sheets in Proposal for details

- Install 72 Single Mode Fiber along US Highway 49 from Madison-Hinds County Line to Northside Dr
- Add Traffic Monitoring Video Cameras
    - Camera Tree at the Hinds County Rest Area
    - Camera Tree at the intersection of US 49 & County Line Road intersection
    - Camera Tree at the Natchez Trace Parkway junction
    - Camera Tree at the US 49 and I-220 Interchange
- Interconnection of existing traffic signal via fiber
    - US 49 at County Line Road
    - US 49 at Presidential Hills

- US 49 at JFK BLVD
- US 49 at Country Club Dr
- US 49 at I-220 Ramps
- US 49 at Northside Dr

105530-304000 YAZOO COUNTY
ITS Scope of Work
See design sheets in Proposal for details

- Install 72 Single Mode Aerial Fiber along US Highway 49 from edge of Big Black River to the Yazoo-Madison County Line (middle of the bridge) 500'

Miscellaneous Notes

It shall be the responsibility of the Contractor to protect existing structures such as pipes, inlets, aprons, bridges, etc. from damage which might occur during construction. The Contractor shall replace or repair, as directed by the Engineer, any structures damaged during the life of the contract. No payment will be made for replacement or repair of damaged items.

Any signs that are in conflict with construction of this project shall be removed and relocated by the Contractor as directed by the Engineer, the cost of which is to be absorbed in other items bid.

Removal of existing raised pavement markers is to be included in the prices for other items bid.


Incidental work such as removing vegetation, shaping and compacting shoulders, removing and resetting signs and/or mailboxes, removing excess asphalt material, project clean-up, and other items of incidental work necessary to complete the project will not be measured for separate payment and will be considered included in the prices of items bid.

Prior to the final inspection, bridges, islands, and areas with curb shall be swept/cleaned. Care should be taken to prevent milled asphalt, asphalt debris, vegetative/granular debris, etc. from entering drainage structures or clogging other drainage ways. Disposal of material will not be measured for separate payments.

Following the overlaying operation the transverse joints in the pavement shall be sawed and sealed within 7 days. The details for sawing and sealing transverse joints for this section are in the Standard Specifications. The width of the sawing and sealing operation will be 14' on each side of centerline, unless otherwise directed by the engineer, to prevent "sympathy cracking." It is the responsibility of the Contractor to locate and mark all existing joints that are to be sawed and sealed prior to the milling operation. The Contractor is to notify the

Department when this is to take place so that they can oversee the work and determine the width that each joint will be sawed and sealed.

US 49 OVERLAY
FROM HINDS COUNTY LINE TO YAZOO COUNTY LINE
MADISON COUNTY
105530/301000

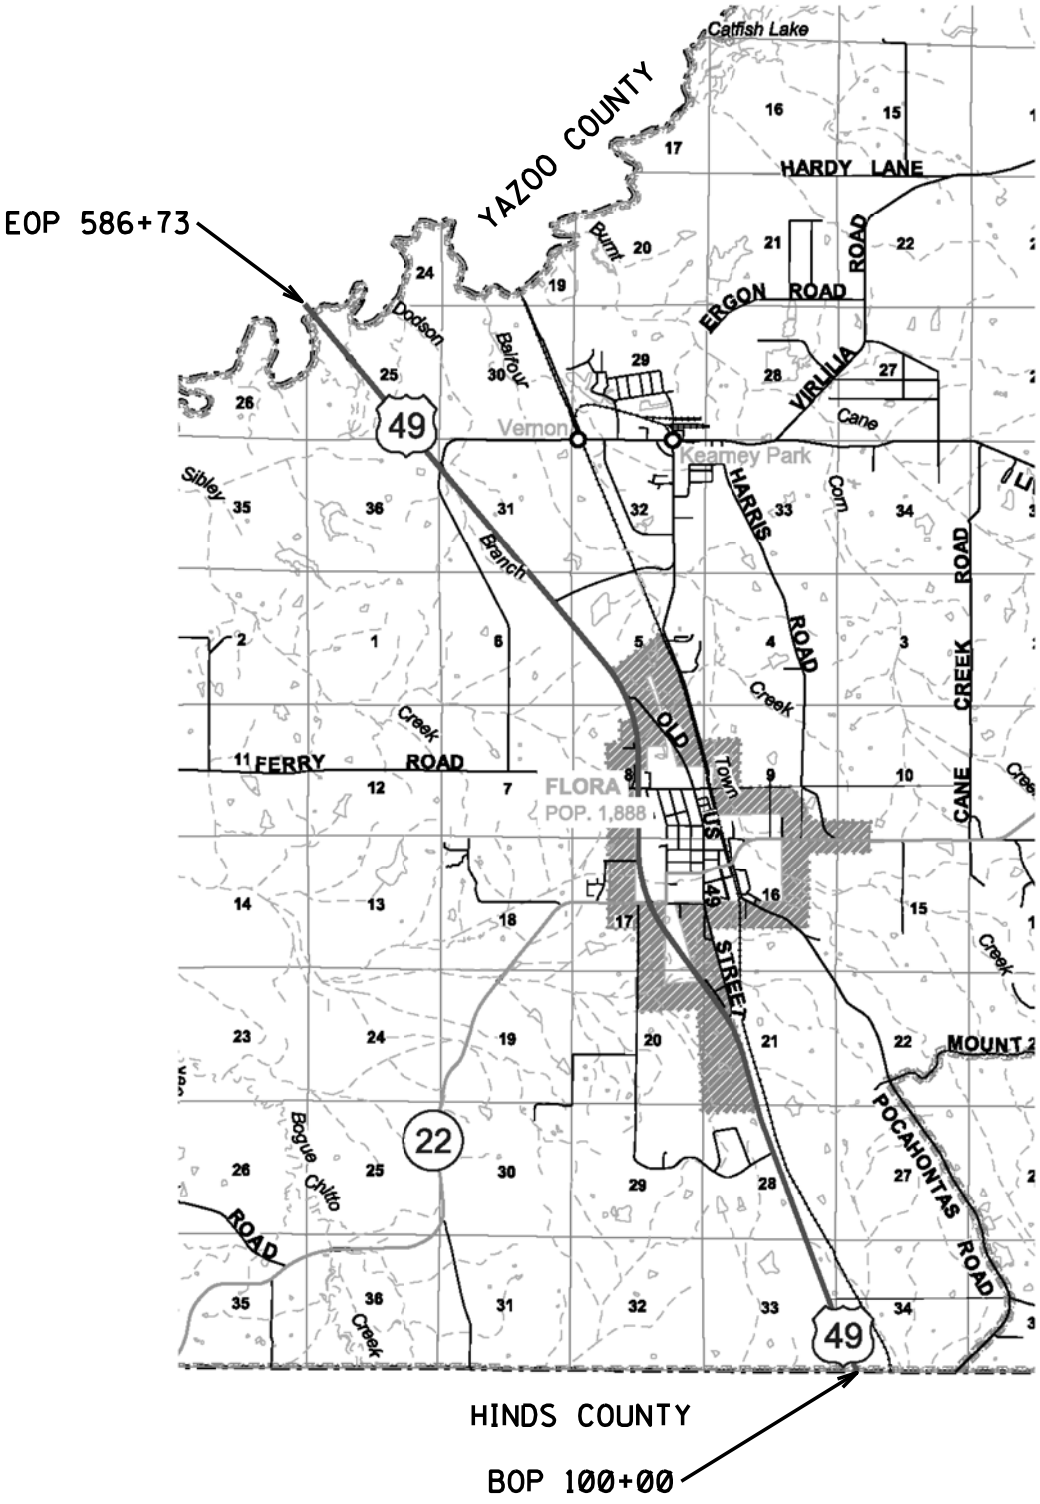

STATE	PROJECT NO.
MISS	NH-0008-03(050)

SUMMARY OF QUANTITIES (SHEET 1)

PAY ITEM NO.	PAY ITEM	UNIT	MADISON : 105530-301000	
			Prelim	Final
907-201-C001	Random Clearing and Grubbing	STA	369	
202-B006	Removal of Asphalt Paved Shoulders, All Depths	SY	792	
202-B009	Removal of Asphalt Pavement, Failed Areas	SY	204	
202-B069	Removal of Concrete Pavement w/ Variable Depth Overlay	SY	1,225	
202-B158	Removal of Guard Rail, Including Rails, Posts and Terminal Ends	LF	2,160	
202-B168	Removal of Island Pavement, All Types	SY	17	
202-B169	Removal of Joint Material	LF	752	
203-G001	Excess Excavation, FM, AH	CY	33,024	
209-A005	Geotextile Stabilization, Type V, Non-Woven	SY	78,113	
304-B003	Granular Material, Class 5, Group C	TON	6,709	
304-B004	Granular Material, Class 5, Group D	TON	11,918	
304-D002	Granular Material, Crushed Stone	TON	29,404	
305-B001	Size I Stabilizer Aggregate, Coarse	TON	20	
907-403-A003	12.5-mm, ST, Asphalt Pavement	TON	6,796	
907-403-A006	19-mm, ST, Asphalt Pavement	TON	11,893	
907-403-A013	9.5-mm, HT, Asphalt Pavement	TON	31,844	
907-403-A015	9.5-mm, ST, Asphalt Pavement	TON	10,561	
907-403-B001	12.5-mm, HT, Asphalt Pavement, Leveling	TON	1,695	
406-D001	Fine Milling of Bituminous Pavement, All Depths	SY	357,405	
907-407-A001	Asphalt for Tack Coat	GAL	51,600	
907-413-E001	Sawing and Sealing Transverse Joints in Asphalt Pavement	LF	21,811	
907-420-A001	Undersealing	LBS	500	
423-A001	Rumble Strips, Ground In	MI	36	
503-C010	Saw Cut, Full Depth	LF	3,348	
907-601-B001	Class "B" Structural Concrete, Minor Structures	CY	1	
603-RA002	18" Pipe Removed and Relaid	LF	32	
603-RB002	18" End Section Removed and Relaid	EA	2	
606-B003	Guard Rail, Class A, Type 1, 'W' Beam, Metal Post	LF	1,660	
606-D012	Guard Rail, Bridge End Section, Type D Modified	EA	4	
606-D023	Guard Rail, Bridge End Section, Type I, Metal Post	EA	6	
606-E005	Guard Rail, Terminal End Section, Flared	EA	10	
616-A001	Concrete Median and/or Island Pavement, 10-inch	SY	17	
907-618-A001	Maintenance of Traffic	LS	1	
619-A1001	Temporary Traffic Stripe, Continuous White	MI	40	
619-A2001	Temporary Traffic Stripe, Continuous Yellow	MI	40	
619-A3001	Temporary Traffic Stripe, Skip White	MI	40	
619-A5001	Temporary Traffic Stripe, Detail	LF	11,803	
619-A6001	Temporary Traffic Stripe, Legend	SF	72	
619-A6002	Temporary Traffic Stripe, Legend	LF	1,234	
619-D1001	Standard Roadside Construction Signs, Less than 10 Square Feet	SF	32	
619-D2001	Standard Roadside Construction Signs, 10 Square Feet or More	SF	600	
619-D3001	Remove and Reset Signs, All Sizes	EA	15	
619-G4005	Barricades, Type III, Single Faced	LF	24	
620-A001	Mobilization	LS	1	

T47

MISSISSIPPI DEPARTMENT OF TRANSPORTATION
SUMMARY OF QUANTITIES

By | Revision | Date

PROJ NO: NH-0008-03(050)
COUNTY: MADISON
FILENAME: SQS
Design Team Checked Date

Working Number: SQ-1
Sheet Number: 1

Notice to Bidders No. 7684 -- Cont'd.

STATE	PROJECT NO.
MISS	NH-0008-03(050)

SUMMARY OF QUANTITIES (SHEET 2)

PAY ITEM NO.	PAY ITEM	UNIT	MADISON : 105530-301000	
			Prelim	Final
907-626-A010	6" Thermoplastic Traffic Stripe, Skip White	MI	20	
907-626-B006	6" Thermoplastic Traffic Stripe, Continuous White	MI	20	
907-626-E005	6" Thermoplastic Traffic Stripe, Continuous Yellow	MI	20	
907-626-G004	Thermoplastic Detail Stripe, White	LF	14,087	
907-626-G005	Thermoplastic Detail Stripe, Yellow	LF	10,281	
907-626-H009	Thermoplastic Legend, White	SF	338	
907-626-H010	Thermoplastic Legend, White	LF	1,234	
907-627-J001	Two-Way Clear Reflective High Performance Raised Markers	EA	243	
907-627-K001	Red-Clear Reflective High Performance Raised Markers	EA	3,201	
907-627-L001	Two-Way Yellow Reflective High Performance Raised Markers	EA	51	
630-C001	Square Tube Posts, 4.0 lb/ft	LF	30	
630-F002	Delineators, Flexible Post Mounted, Crossover, Type I, Yellow	EA	136	
630-F006	Delineators, Guard Rail, White	EA	35	
630-F007	Delineators, Guard Rail, Yellow	EA	35	
630-G004	Type 3 Object Markers, OM-3R or OM-3L	EA	10	
907-630-PP002	Roadside Directional Signs, Sheet Aluminum, 0.125" Thickness, Ground Mounted	SF	26	
907-808-A002	Joint Repair	LF	1,504	
907-823-A001	Preformed Joint Seal, Type I	LF	596	
907-823-A002	Preformed Joint Seal, Type II	LF	39	
907-823-A003	Preformed Joint Seal, Type III	LF	117	
907-823-B001	Saw Cut, Type I	LF	1,192	
907-823-B002	Saw Cut, Type II	LF	78	
907-823-B003	Saw Cut, Type III	LF	234	
907-824-A003	General Epoxy Repair	SF	16	


T48

By	MISSISSIPPI DEPARTMENT OF TRANSPORTATION SUMMARY OF QUANTITIES	
Revision	PROJ NO: NH-0008-03(050) COUNTY: MADISON	Working Number SQ-2
Date	FILENAME: SQS Design Team Checked Date	Sheet Number 2

US 49 OVERLAY
MADISON COUNTY
105530/301000
NH-0008-03(50)

TYPICAL SECTION
160+80 TO EOP 586+73

TYPICAL REPRESENTS DIRECTION OF TRAFFIC FLOW
NORTH BOUND SHOWN SOUTH BOUND SHALL BE SIMILAR

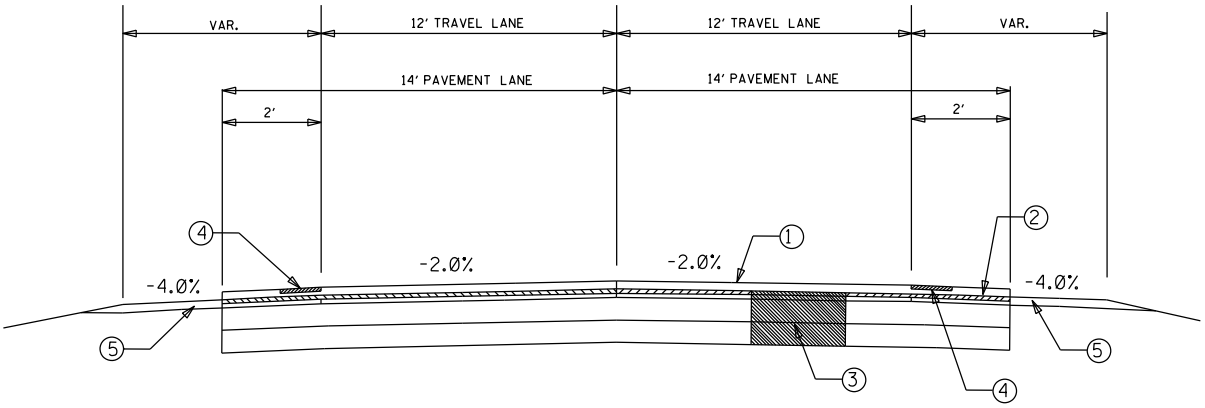


① 1 1/2" FINE MILLING AND REPLACE WITH 1 1/2" ASPHALT PAVEMENT, (9.5mm HT MIXTURE)
② 1 1/2" FINE MILLING AND REPLACE WITH 1 1/2" ASPHALT PAVEMENT, (9.5mm ST MIXTURE)
③ REPAIR ANY FAILED AREAS WITH FULL DEPTH ASPHALT PAVEMENT 12.5mm MIX HT LEVELING
④ RUMBLE STRIPS WILL BE REQUIRED
⑤ VARIABLE DEPTH GRANULAR MATERIAL (CLASS 5 GROUP C)

US 49 OVERLAY
MADISON COUNTY
105530/301000
NH-0008-03(50)


TYPICAL SECTION
260+80 TO EOP 586+73

TYPICAL REPRESENTS DIRECTION OF TRAFFIC FLOW
NORTH BOUND SHOWN SOUTH BOUND SHALL BE SIMILAR

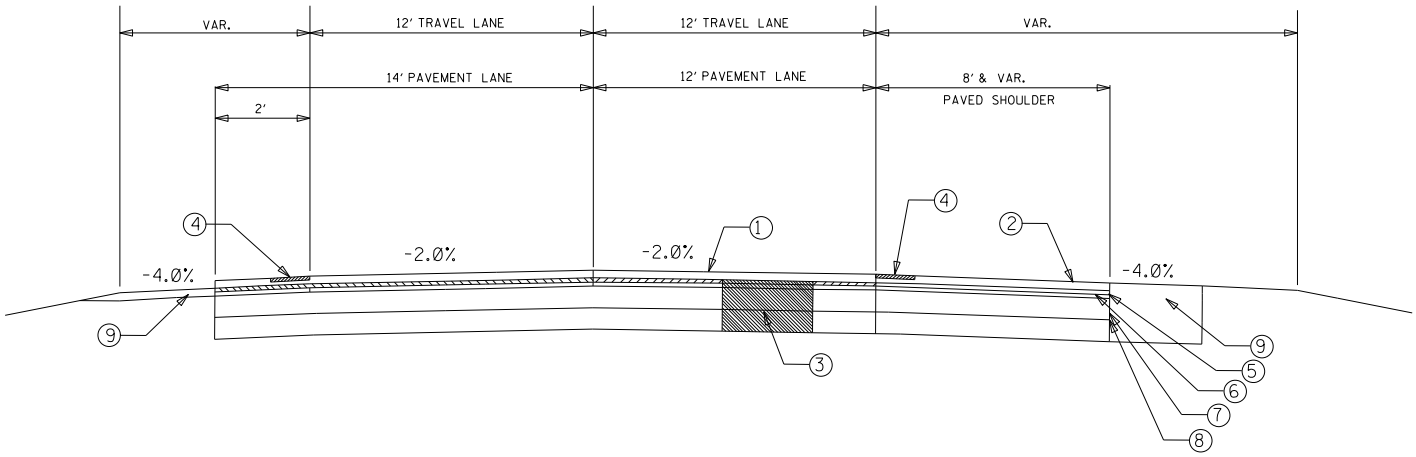

① 1 1/2" FINE MILLING AND REPLACE WITH 1 1/2" ASPHALT PAVEMENT, (9.5mm HT MIXTURE)
② 1 1/2" ASPHALT PAVEMENT, (9.5mm ST MIXTURE)
③ REPAIR ANY FAILED AREAS WITH FULL DEPTH ASPHALT PAVEMENT 12.5mm MIX HT LEVELING
④ RUMBLE STRIPS WILL BE REQUIRED
⑤ 2" ASPHLAT PAVEMENT, (12.5mm ST MIXTURE)
⑥ 3.5" ASPHALT PAVEMENT, (19mm ST MIXTURE)
⑦ 8" CRUSHED STONE BASE
⑧ GEOTEXTILE TYPE V
⑨ 7" & VARIABLE DEPTH GRANULAR MATERIAL (CLASS 5 GROUP D)
⑩ EXCESS REMOVAL OF SHOULDER 15" & VARIABLE DEPTH REQUIRED TO ACCOMODETE NEW SHOULDER

CONSTRUCTION SIGNING DETAIL
US 49 OVERLAY
MADISON COUNTY
NH-0008-03(50)
105530/301000

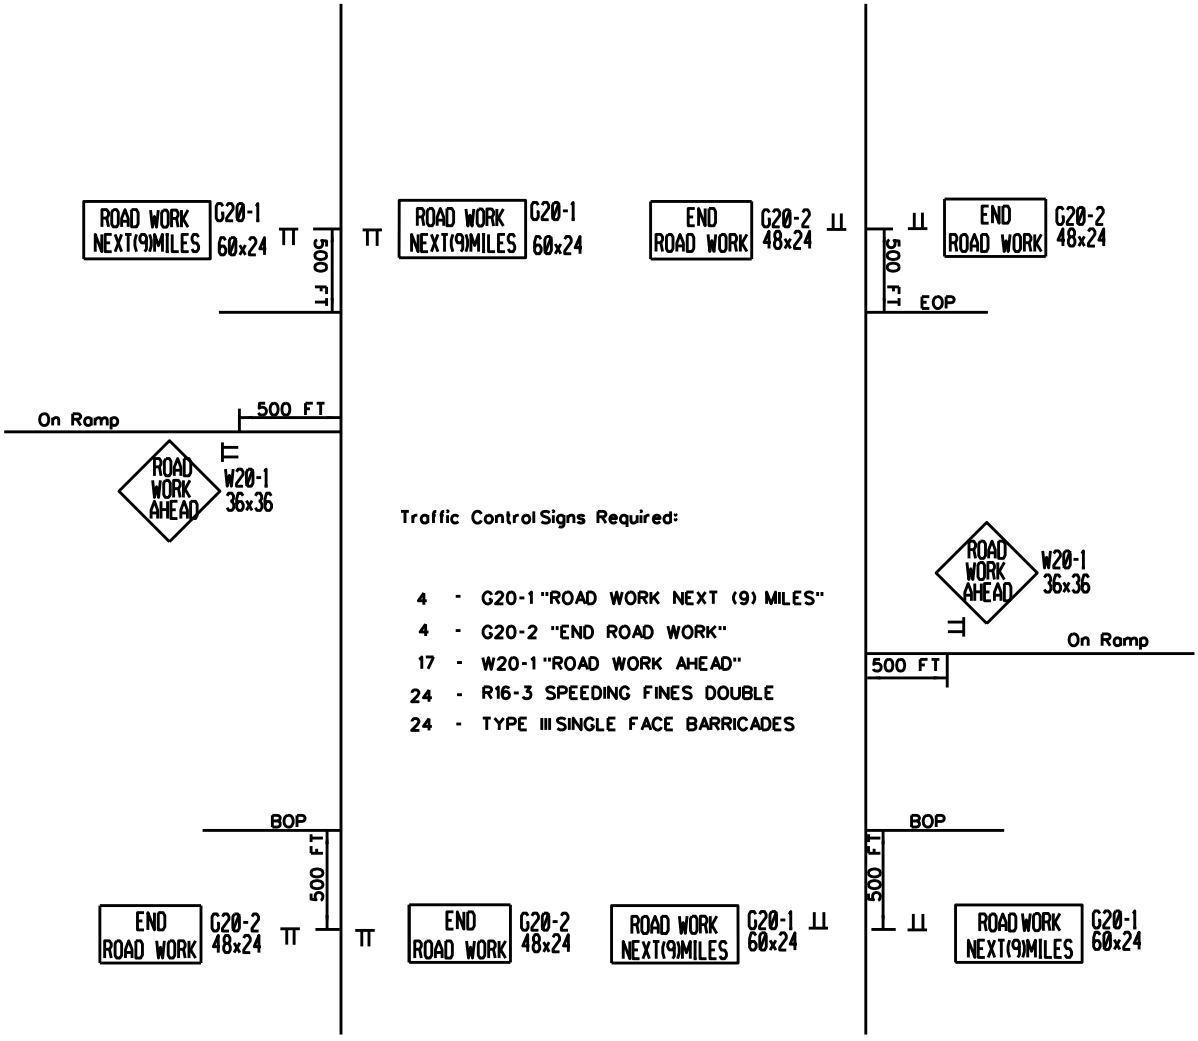

NOTES: One (1) W20-1 "ROAD WORK AHEAD" Sign is Required at each on ramp, Entering the Project.

G20-1 and G20-2 signs mounted on Type III Single Faced Barricade.

SPEEDING FINES DOUBLE SIGNS TO BE PLACED EVERY 2 MILES THROUGHOUT PROJECT.

Failed Areas

202-B009 Removal of Asphalt Pavement, Failed Areas

Station	Direction	Lane	Length	Width	Square Yards	Excess CY
406+25	NB	LL	6	2	1.333	0.444
427+50	NB	LL	6	2	1.333	0.444
432+75	NB	LL	6	2	1.333	0.444
517+00	NB	LL	6	2	1.333	0.444
569+90	NB	LL	6	2	1.333	0.444
205+60	NB	RL	200	2	44.444	14.815
337+60	NB	RL	6	1	0.667	0.222
406+25	NB	RL	6	2	1.333	0.444
416+80	NB	RL	6	2	1.333	0.444
427+40	NB	RL	6	2	1.333	0.444
432+60	NB	RL	6	2	1.333	0.444
437+90	NB	RL	6	2	1.333	0.444
443+20	NB	RL	6	2	1.333	0.444
480+15	NB	RL	6	2	1.333	0.444
490+75	NB	RL	15	2	3.333	1.111
501+25	NB	RL	6	2	1.333	0.444
506+50	NB	RL	6	2	1.333	0.444
511+80	NB	RL	6	2	1.333	0.444
517+10	NB	RL	6	2	1.333	0.444
521+30	NB	RL	6	2	1.333	0.444
522+40	NB	RL	6	2	1.333	0.444
569+90	NB	RL	6	2	1.333	0.444
497+00	SB	LL	6	2	1.333	0.444
449+50	SB	LL	6	2	1.333	0.444
380+80	SB	LL	6	2	1.333	0.444
238+25	SB	LL	6	2	1.333	0.444
227+70	SB	LL	6	2	1.333	0.444
217+10	SB	LL	6	2	1.333	0.444
201+30	SB	LL	15	2	3.333	1.111
190+70	SB	LL	15	2	3.333	1.111
190+25	SB	LL	15	2	3.333	1.111
180+10	SB	LL	6	2	1.333	0.444
169+60	SB	LL	25	2	5.556	1.852
148+50	SB	LL	20	2	4.444	1.481
127+40	SB	LL	20	2	4.444	1.481
111+50	SB	LL	20	2	4.444	1.481
512+80	SB	RL	200	1	22.222	7.407
497+00	SB	RL	50	2	11.111	3.704

494+30	SB	RL	6	2	1.333	0.444
481+10	SB	RL	20	2	4.444	1.481
475+85	SB	RL	15	2	3.333	1.111
465+30	SB	RL	25	2	5.556	1.852
438+90	SB	RL	6	2	1.333	0.444
396+60	SB	RL	6	2	1.333	0.444
328+00	SB	RL	50	1	5.556	1.852
312+10	SB	RL	6	2	1.333	0.444
301+60	SB	RL	6	2	1.333	0.444
238+25	SB	RL	6	2	1.333	0.444
206+60	SB	RL	6	2	1.333	0.444
201+30	SB	RL	6	2	1.333	0.444
190+70	SB	RL	6	2	1.333	0.444
180+10	SB	RL	6	2	1.333	0.444
169+60	SB	RL	6	2	1.333	0.444
153+75	SB	RL	6	2	1.333	0.444
137+90	SB	RL	6	2	1.333	0.444
127+40	SB	RL	6	2	1.333	0.444
122+10	SB	RL	6	2	1.333	0.444
111+50	SB	RL	6	2	1.333	0.444
				TOTAL	185.556	61.852
				Total Plus 10%	204	68

Failed Areas

202-B069 Removal of Concrete Pavement w/Variable Depth Overlay							
Station	Direction	Lane	Length	Width	Square Yards	Excess CY	503-C010 Saw Cut LF
406+25	NB	LL	6	12	8.000	2.667	34.000
427+50	NB	LL	6	12	8.000	2.667	34.000
432+75	NB	LL	6	12	8.000	2.667	34.000
517+00	NB	LL	6	12	8.000	2.667	34.000
569+90	NB	LL	6	12	8.000	2.667	34.000
205+60	NB	RL	200	12	266.667	88.889	428.000
337+60	NB	RL	6	6	4.000	1.333	40.000
406+25	NB	RL	6	12	8.000	2.667	40.000
416+80	NB	RL	6	12	8.000	2.667	40.000
427+40	NB	RL	6	12	8.000	2.667	40.000
432+60	NB	RL	6	12	8.000	2.667	40.000
437+90	NB	RL	6	12	8.000	2.667	40.000
443+20	NB	RL	6	12	8.000	2.667	40.000
480+15	NB	RL	6	12	8.000	2.667	40.000
490+75	NB	RL	15	12	20.000	6.667	58.000
501+25	NB	RL	6	12	8.000	2.667	40.000
506+50	NB	RL	6	12	8.000	2.667	40.000
511+80	NB	RL	6	12	8.000	2.667	40.000
517+10	NB	RL	6	12	8.000	2.667	40.000
521+30	NB	RL	6	12	8.000	2.667	40.000
522+40	NB	RL	6	12	8.000	2.667	40.000
569+90	NB	RL	6	12	8.000	2.667	40.000
497+00	SB	LL	6	12	8.000	2.667	34.000
449+50	SB	LL	6	12	8.000	2.667	34.000
380+80	SB	LL	6	12	8.000	2.667	34.000
238+25	SB	LL	6	12	8.000	2.667	34.000
227+70	SB	LL	6	12	8.000	2.667	34.000
217+10	SB	LL	6	12	8.000	2.667	34.000
201+30	SB	LL	15	12	20.000	6.667	43.000
190+70	SB	LL	15	12	20.000	6.667	43.000
190+25	SB	LL	15	12	20.000	6.667	43.000
180+10	SB	LL	6	12	8.000	2.667	34.000
169+60	SB	LL	25	12	33.333	11.111	53.000
148+50	SB	LL	20	12	26.667	8.889	48.000
127+40	SB	LL	20	12	26.667	8.889	48.000
111+50	SB	LL	20	12	26.667	8.889	48.000
512+80	SB	RL	200	6	133.333	44.444	428.000
497+00	SB	RL	50	12	66.667	22.222	128.000

494+30	SB	RL	6	12	8.000	2.667	40.000
481+10	SB	RL	20	12	26.667	8.889	68.000
475+85	SB	RL	15	12	20.000	6.667	58.000
465+30	SB	RL	25	12	33.333	11.111	78.000
438+90	SB	RL	6	12	8.000	2.667	40.000
396+60	SB	RL	6	12	8.000	2.667	40.000
328+00	SB	RL	50	6	33.333	11.111	128.000
312+10	SB	RL	6	12	8.000	2.667	40.000
301+60	SB	RL	6	12	8.000	2.667	40.000
238+25	SB	RL	6	12	8.000	2.667	40.000
206+60	SB	RL	6	12	8.000	2.667	40.000
201+30	SB	RL	6	12	8.000	2.667	40.000
190+70	SB	RL	6	12	8.000	2.667	40.000
180+10	SB	RL	6	12	8.000	2.667	40.000
169+60	SB	RL	6	12	8.000	2.667	40.000
153+75	SB	RL	6	12	8.000	2.667	40.000
137+90	SB	RL	6	12	8.000	2.667	40.000
127+40	SB	RL	6	12	8.000	2.667	40.000
122+10	SB	RL	6	12	8.000	2.667	40.000
111+50	SB	RL	6	12	8.000	2.667	40.000
				TOTAL	1113.333	371.111	3348.000
				Total Plus 10%	1225	408	

Guardrail Quantities

STATION	LOCATION	GUARDRAIL (W-BEAM)	THRIE BEAM TRANS. SECT.	THRIE BEAM THRIE BEAM	FLARED TERMINAL END SECT.	TANGENT TERMINAL END SECT.	Cable Anchor TYPE I	BRIDGE END SECTION TYPE "H"	TYPE "D" Mod.	TYPE "I"	SPEC. DESIGN BR END CONN.	DELINEATORS WHITE	YELLOW	Type 3 Object Markers	GUARDRAIL REMOVAL	REMARKS
	(LT/RT)	(LF)	(LF)	(LF)	(EA)	(EA)	(EA)	(EA)	(EA)	(EA)	(EA)	(EA)	(EA)	(EA)	(LF)	
BR183.4B	LT	155			1		1			1			7	1	205	
BR183.4B	RT	155			1		1			1		7		1	205	
BR183.3A	LT	170			1		1		1				7	1	220	
BR183.3A	RT	170			1		1		1			7		1	220	
BR183.8B	LT	175			1		1		1				7	1	225	
BR183.8B	RT	175			1		1		1			7		1	225	
BR 182.9 A	LT	165			1		1			1			7	1	215	
BR 182.9 A	RT	165			1		1			1		7		1	215	
BR 183.0 B	LT	165			1		1			1			7	1	215	
BR 183.0 B	RT	165			1		1			1		7		1	215	
							-		-		-					
							-	-	-	-	-					
							-	-	-	-	-					
							-	-	-	-	-					
TOTAL =		1660	0	0	10	0	10	0	4	6	0	35	35	10	2160	0
		L.F.	EA.	LF.	EA.	EA.	EA.	EA.	EA.	EA.	EA.	EA.	EA.	EA.	LF.	

* REMOVAL OF ALL GUARDRAIL (BRIDGE END SECTIONS, W-BEAM, TYPE-I CABLE ANCHORAGE, TERMINAL END SECTIONS, ETC.) WILL BE PAID UNDER PAY ITEM 202-B REMOVAL OF GUARD RAIL.
* REMOVAL OF GUARDRAIL DELINEATORS ARE CONSIDERED INCIDENTAL TO THE REMOVAL OF GUARDRAIL AND WILL NOT BE MEASURED AS A SEPARATE PAY ITEM.
* TOTAL GUARDRAIL LENGTH IS BASED ON A TERMINAL END SECTION 37.5' LONG. IF A TERMINAL END SECTION OF A DIFFERENT LENGTH IS USED, THE LENGTH OF THE W-BEAM MAY HAVE TO BE ADJUSTED.

603-RA002		
18" Pipe Removed and Relaid		
Location	**Quantity (LF)**	**Note**
130+00 NB	32	Pipe Seperated on either shoulder

603-RB002		
18" End Section Removed and Relaid		
Location	**Quantity (EA)**	**Note**
130+00 NB	2	Pipe Seperated on either shoulder

Bridge ID	Bridge Number	Joint Repair (LF) 907-808-A002	Preformed Joint Seal, Type I (LF) 907-823-A001	Preformed Joint Seal, Type II (LF) 907-823-A002	Preformed Joint Seal, Type III (LF) 907-823-A003	Saw Cut, Type I (LF) 907-823-B001	Saw Cut, Type II (LF) 907-823-B002	Saw Cut, Type III (LF) 907-823-B003	General Epoxy Repairs (SF) 907-824-A003	Undersealing (LBS) 907-420-A001	General Notes
13002	182.9A	312	78	39	39	156	78	78	6	0	Small Deck Spalls at Spans 3, 4 and 6; Type II Joint at Bent 1; Type III Joint at Bent 8
16349	183.0B	440	220	0	0	440	0	0	3	0	Deck Spall at Span 3; Header Spalls at Bents 1 and 8
13000	183.3A	312	78	0	78	156	0	156	4	0	Small Deck Spalls at Bent 4; Type III Joints at End Bents
16350	183.4B	440	220	0	0	440	0	0	0	0	
	183.8B	0	0	0	0	0	0	0	0	500	Undermining of Bridge End
	Totals	1504	596	39	117	1192	78	234	16	500	

202-B168			
Removal of Island Pavement, All Types			
Location	**Dimension**	**Quantity (SY)**	**Note**
353+90 SB	17x17x23	17	South West Corner of Intersection

105530/301000
Madison County
US 49 From Hinds County Line to Yazoo County Line

SHEET NUMBER	SIGN NUMBER	STATION	SIGN SIZE				GROUND MOUNTED DIRECTIONAL SIGNS				
			EXIT	PRIMARY	UPPLEMENT/	TOTAL	SIGN NO.	SIZE	UNIT AREA SQ. FT.	QUANTITY REQ'D.	TOTAL SIGN AREA SQ. FT.
	7106	322+50			78X24	16.25					
	7055	221+70			30X48	10					


TOTAL QUANTITIES	SQ. FT.
	26.25

SHEET NUMBER	SIGN NUMBER	STATION	QUARE POS	POST SIZE (STEEL BEAMS)								
			4 lb/ft	S4x7.7	W6x9	W6x12	W6x15	W8x18	W8x21	W10x22	W10x26	W12x26
	7106	322+50	20									
	7055	221+70	10									
TOTAL QUANTITIES			LIN. FT.	LIN. FT.	LIN. FT.	LIN. FT.	LIN. FT.	LIN. FT.	LIN. FT.	LIN. FT.	LIN. FT.	LIN. FT.
			30	0	0	0	0	0	0	0	0	0


SHEET NUMBER	SIGN NUMBER	STATION	STRUCTURAL STEEL ANGLES (HORIZONTAL BRACING)			STRUCTURAL STEEL BARS	SQUARE TUBE POSTS 2LB/FT	REINFORCED STEEL (POUNDS)	FOOTING CLASS "B" CONCRETE	STANDARD ROADSIDE SIGNS TO BE MOUNTED ON POST
			3"x3" x 1/4"	3 1/2"X 3 1/2" x 1/4"	4" x 4" x 5/16"	7/16" x 2 1/2"	EXIT PANELS			
	7106	322+50							0.295	Bentonia 8 Yazoo City 22
	7055	221+70							0.295	Flora Corp. Limit

TOTAL QUANTITIES	LIN. FT.	LIN. FT.	LIN. FT.	LIN. FT.	LIN. FT.	POUNDS	CU. YDS.
	0	0	0	0			
	POUNDS			POUNDS	0	0	0.59
				0			

105530/301000		
Madison County		
HWY 49 Hinds CL to Yazoo CL		
201-D001		
Random Clearing		
Station	NB/SB	Quantity (Station)
100+00	NB	1.000
110+50-121+00	NB	10.500
126+50-147+50	NB	21.000
158+00	NB	3.000
169+00-174+00	NB	5.000
184+50-218+80	NB	34.300
237+25	NB	1.000
311+25	NB	2.000
366+50-377+25	NB	10.750
401+00	NB	1.000
438+00-448+50	NB	10.500
453+75	NB	1.000
467+00-475+00	NB	8.000
480+00-501+25	NB	21.250
511+75-586+73	NB	7.500
507+50-481+00	SB	26.500
475+80-454+75	SB	21.050
417+75	SB	1.000
394+00-391+25	SB	2.750
388+75	SB	1.000
359+75	SB	1.000
349+00-343+75	SB	5.250
330+75	SB	2.000
328+00	SB	1.000
322+75-317+50	SB	5.250
280+50-217+00	SB	63.500
206+50-201+25	SB	5.250
185+50-132+75	SB	49.750
127+25	SB	2.000
122+00-116+75	SB	5.250
111+50-106+25	SB	5.250
	Total	335.600

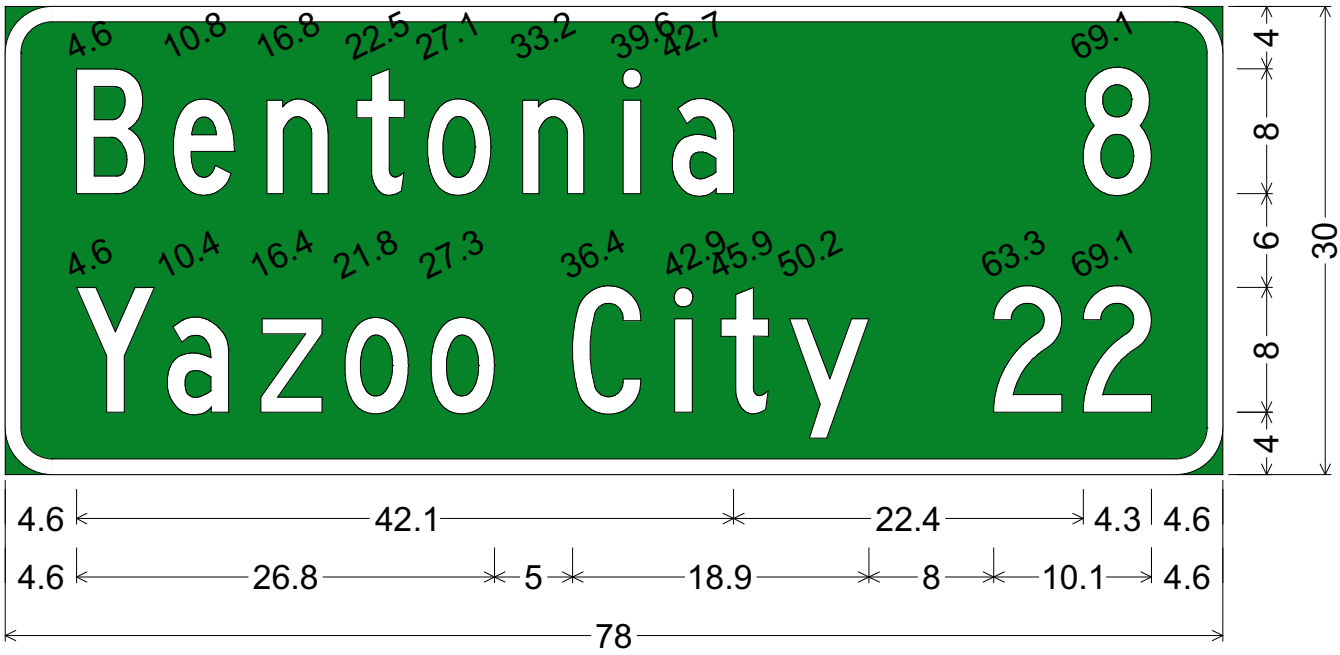

3.0" Radius, 1.0" Border, White on Green;
"Bentonia", C; "8", C; "Yazoo City", C; "22", C;

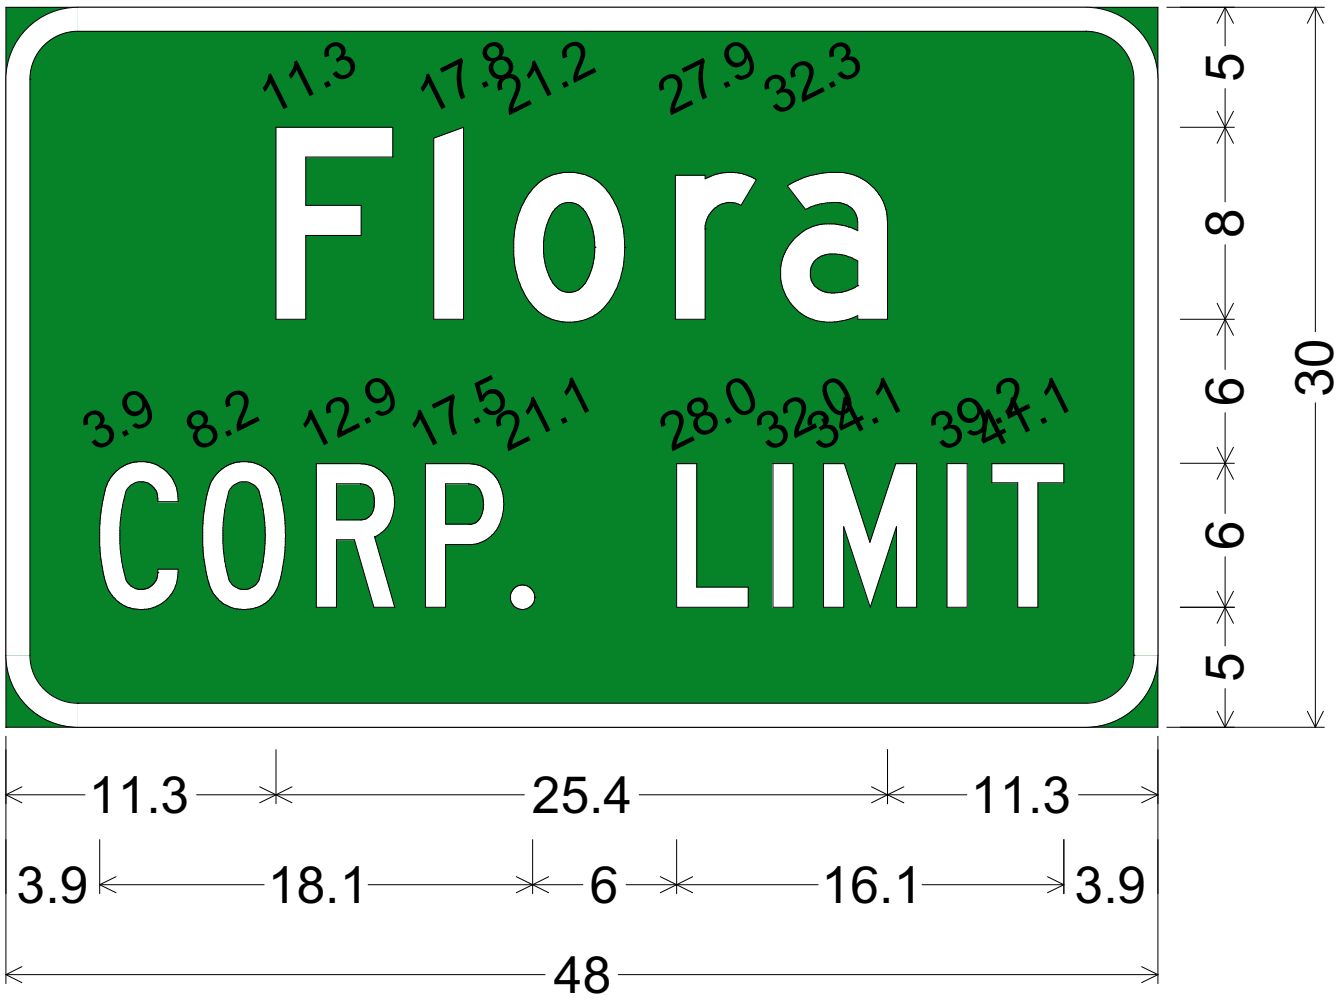


3.0" Radius, 1.0" Border, White on Green;
"Flora", D; "CORP. LIMIT", C;


NH-0008-03(050)
US 49 OVERLAY
FROM HINDS COUNTY LINE TO YAZOO COUNTY LINE
MADISON COUNTY
105530/301000

FMS CON: /

STATE	PROJECT NO.
MISS.	




PLAN

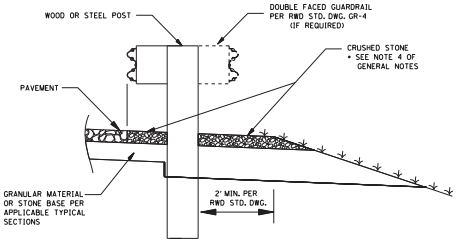


SECTION A–A


PAVEMENT LEAVE–OUT AREA FOR GUARDRAIL POSTS
SINGLE–FACED GUARDRAIL (CRUSHED STONE OPTION)
- SHOWN WITH DOUBLE-FACED RAIL CONFIGURATION PER RWD STD. DWG. GR-4 (AS APPLICABLE)

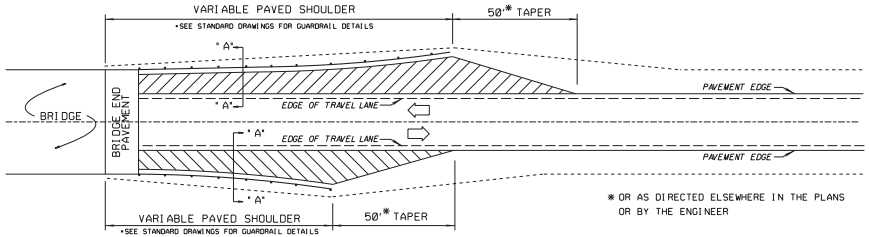

TYPICAL DETAIL OF PAVED SHOULDERS AT BRIDGE ENDS
(2-WAY TRAFFIC)
SEE SECTION 'A' - 'A'




PLAN

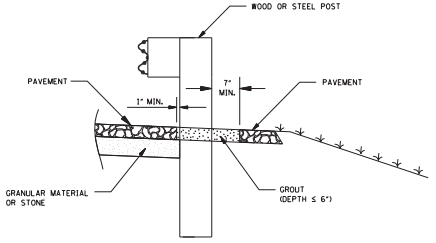


SECTION A–A


PAVEMENT LEAVE–OUT AREA FOR GUARDRAIL POSTS
SINGLE–FACED GUARDRAIL (GROUT OPTION)

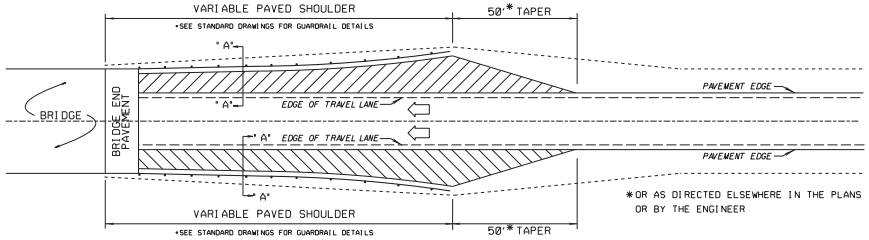

TYPICAL DETAIL OF PAVED SHOULDERS AT BRIDGE ENDS
(1-WAY TRAFFIC)
SEE SECTION 'A' - 'A'



PLAN



SECTION B–B

PAVEMENT LEAVE–OUT AREA FOR GUARDRAIL POSTS
DOUBLE–FACED GUARDRAIL

GENERAL NOTES:

1. THE CRUSHED STONE OPTION WILL BE USED FOR SINGLE-FACED GUARD RAIL PAD APPLICATIONS AND DOUBLE-FACED APPLICATIONS AS SHOWN ON GR-4 UNLESS SPECIFICALLY DIRECTED IN THE PLANS.
2. THE ALTERNATIVES SHOWN HEREON APPLY TO ALL GUARDRAIL CONSTRUCTION WHERE MOW STRIPS ARE ADDED.
3. DIMENSIONS OF GUARDRAIL PLACEMENT AND SHOULDER WIDTHS/SLOPES BEHIND GUARDRAIL POSTS SHALL CONFORM TO APPLICABLE GUARDRAIL DETAILS AND TYPICAL SECTIONS.
4. FOR OVERLAY PROJECTS, THE EXISTING SHOULDER WILL BE EXCAVATED AND A MINIMUM DEPTH OF 3" OF CRUSHED STONE WILL BE PLACED ON THE SHOULDER IN THE AREA BELOW THE GUARDRAIL AND ADJACENT TO THE ASPHALT PAD. FOR NEW CONSTRUCTION PROJECTS, THE SHOULDER MATERIAL TYPE WILL CONFORM TO THE APPLICABLE TYPICAL SECTIONS AND A MINIMUM DEPTH OF 3" OF CRUSHED STONE WILL BE PLACED ON THE SHOULDER IN THE AREA BELOW THE GUARDRAIL AND ADJACENT TO THE ASPHALT PAD. CRUSHED STONE APPLICATION WILL RUN FROM THE BEGINNING OF THE ASPHALT PAD TO THE DOWNSTREAM TERMINUS OF THE PAD. CRUSHED STONE IN THIS AREA WILL EXTEND FROM THE ASPHALT TO THE SHOULDER BREAK AS SHOWN.

GENERAL NOTES FOR CRUSHED STONE OPTION

1. GUARDRAIL POSTS SHALL NOT BE COMPLETELY SURROUNDED BY PAVEMENT. PAVEMENT EDGE SHOULD BE LOCATED NEAR THE FACE OF THE GUARDRAIL BUT MAY NOT BE CLOSER THAN 1" TO THE GUARDRAIL POST.
2. PAVEMENT LEAVE-OUT AREAS ARE REQUIRED FOR STEEL AND WOOD POSTS.
3. STANDARD EMBEDMENT DEPTHS STILL APPLY, MEASURED FROM THE TOP OF THE PROJECTED PAVEMENT SURFACE.
4. IMMEDIATELY PRIOR TO PLACING CRUSHED STONE ON THE GUARDRAIL PAD, THE ENTIRE AREA SHALL BE TREATED UNIFORMLY WITH A SOIL STERILANT. THE SOIL STERILANT SHALL BE APPLIED AT THE MAXIMUM RATE RECOMMENDED ON THE MANUFACTURER'S LABEL FOR PERENNIAL WEED CONTROL. ANY GRANULAR OR PELLETIZED SOIL STERILANT THAT IS APPROVED BY THE ENGINEER MAY BE USED. SEPARATE PAYMENT WILL NOT BE MADE FOR TREATING THE GUARDRAIL PAD AREA WITH SOIL STERILANT.
5. PAYMENT FOR CONSTRUCTION OF MOW STRIPS FOR THIS OPTION WILL BE MADE WITH APPROPRIATE PAY ITEMS (CRUSHED STONE, GRANULAR MATERIAL, ASPHALT, ETC.).
6. THIS OPTION MAY BE USED FOR APPLICATIONS OF DOUBLE-FACED GUARDRAIL WITH OPEN SHOULDERS (PER RWD STD. DWG. GR-4).

GENERAL NOTES FOR GROUT OPTION

1. GUARDRAIL POSTS SHALL NOT BE COMPLETELY SURROUNDED BY PAVEMENT. THE AREA BEHIND AND LATERAL OF THE POST SHALL HAVE A MINIMUM 7" CLEARANCE FROM THE PAVEMENT. THIS AREA SHALL BE FILLED WITH A LOW STRENGTH GROUT WITH A MAXIMUM 28 DAY COMPRESSIVE STRENGTH OF 120 PSI.
2. GROUT SHALL BE INSTALLED AT A DEPTH EQUAL TO THE SURROUNDING PAVEMENT, UP TO A MAXIMUM OF 6". IF SURROUNDING PAVEMENT IS GREATER THAN 6", THE DIFFERENCE SHALL BE FILLED IN WITH SHOULDER GRANULAR MATERIAL.
3. PAVEMENT LEAVE-OUT AREAS ARE REQUIRED FOR STEEL AND WOOD POSTS.
4. STANDARD EMBEDMENT DEPTHS STILL APPLY, MEASURED FROM THE TOP OF THE PROJECTED PAVEMENT SURFACE.
5. COST FOR GROUT, FORMING OR REMOVAL OF ASPHALT, AND OTHER NECESSARY ITEMS TO COMPLETE THE WORK FOR LEAVE-OUT SECTIONS WILL BE ABSORBED IN OTHER ITEMS BID.

MIN. PAV'T LEAVE-OUT AREA

POST	SINGLE-FACED LENGTH (IN.)	SINGLE-FACED WIDTH (IN.)	DOUBLE-FACED LENGTH (IN.)	DOUBLE-FACED WIDTH (IN.)
6"x8" WOOD	20	15	20	22
8"x8" WOOD	22	15	22	22
10"x10" WOOD	24	17	24	24
W6x9 STEEL	18	13	18	20

BY	REVISION	DATE
CN	SECTION DETAIL REVISIONS	11-4-25

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

GUARDRAIL:
POST INSTALLATION IN PAVED AREAS
PROJ. NO.:
COUNTY:

FILE NAME: SDGR-PI-PowerGeopak.dgn
DESIGN TEAM_____CHECKED_____DATE_____

PRELIMINARY
NOT FOR CONSTRUCTION

WORKING NUMBER
SDGR-PI

SHEET NUMBER
PG


Notice to Bidders No. 7684 -- Cont'd.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION

11/7/2025 1:50:12 PM SDGR-PI-POWERGEOPAK.DGN


NH-0008-03(050)
US 49 OVERLAY
FROM HINDS COUNTY LINE TO YAZOO COUNTY LINE
MADISON COUNTY
105530/301000

Typical Section - County Roads

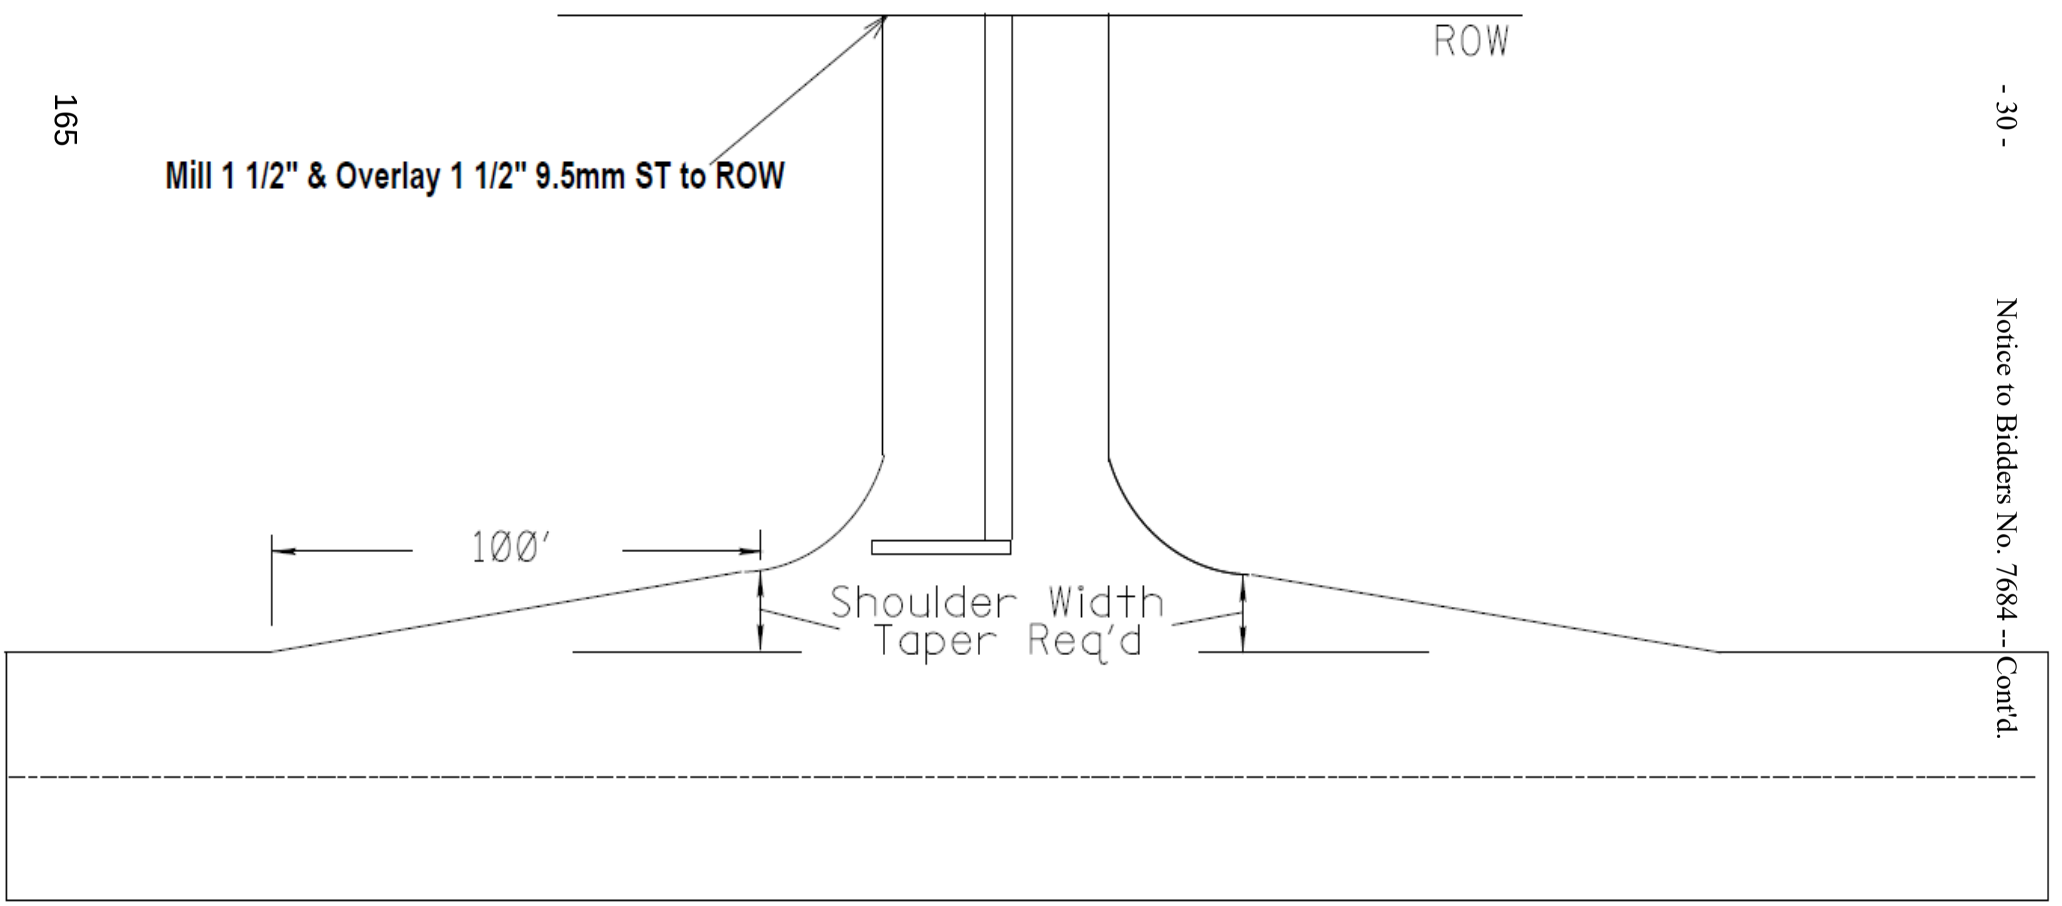


NH-0008-03(050)
US 49 OVERLAY
FROM HINDS COUNTY LINE TO YAZOO COUNTY LINE
MADISON COUNTY
105530/301000

TYPICAL RAMP/PAD DETAIL

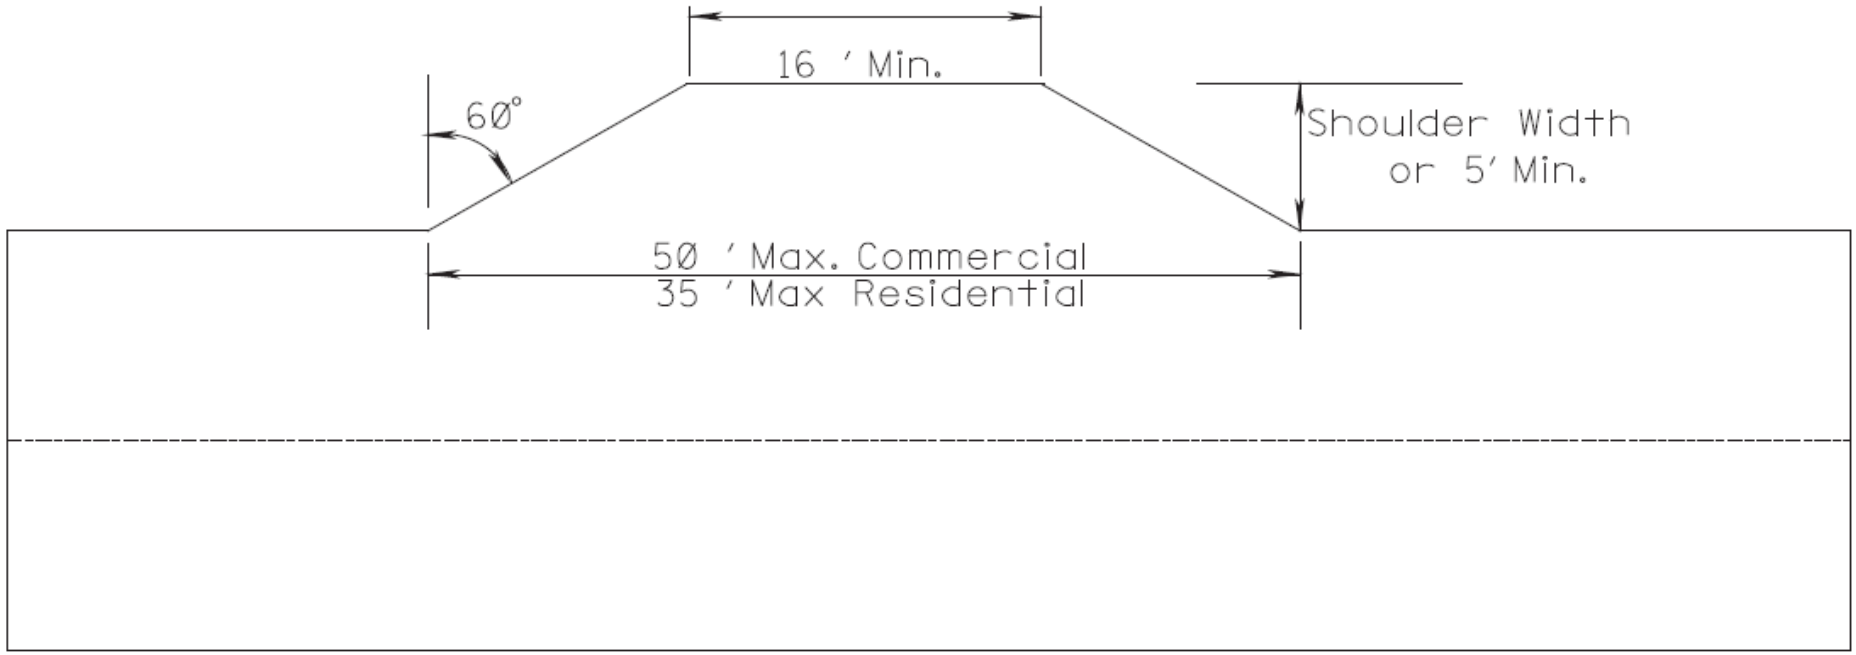

NH-0008-03(050)
US 49 OVERLAY
FROM HINDS COUNTY LINE TO YAZOO COUNTY LINE
MADISON COUNTY
105530/301000


STRIPE DETAIL - LOCAL ROADS

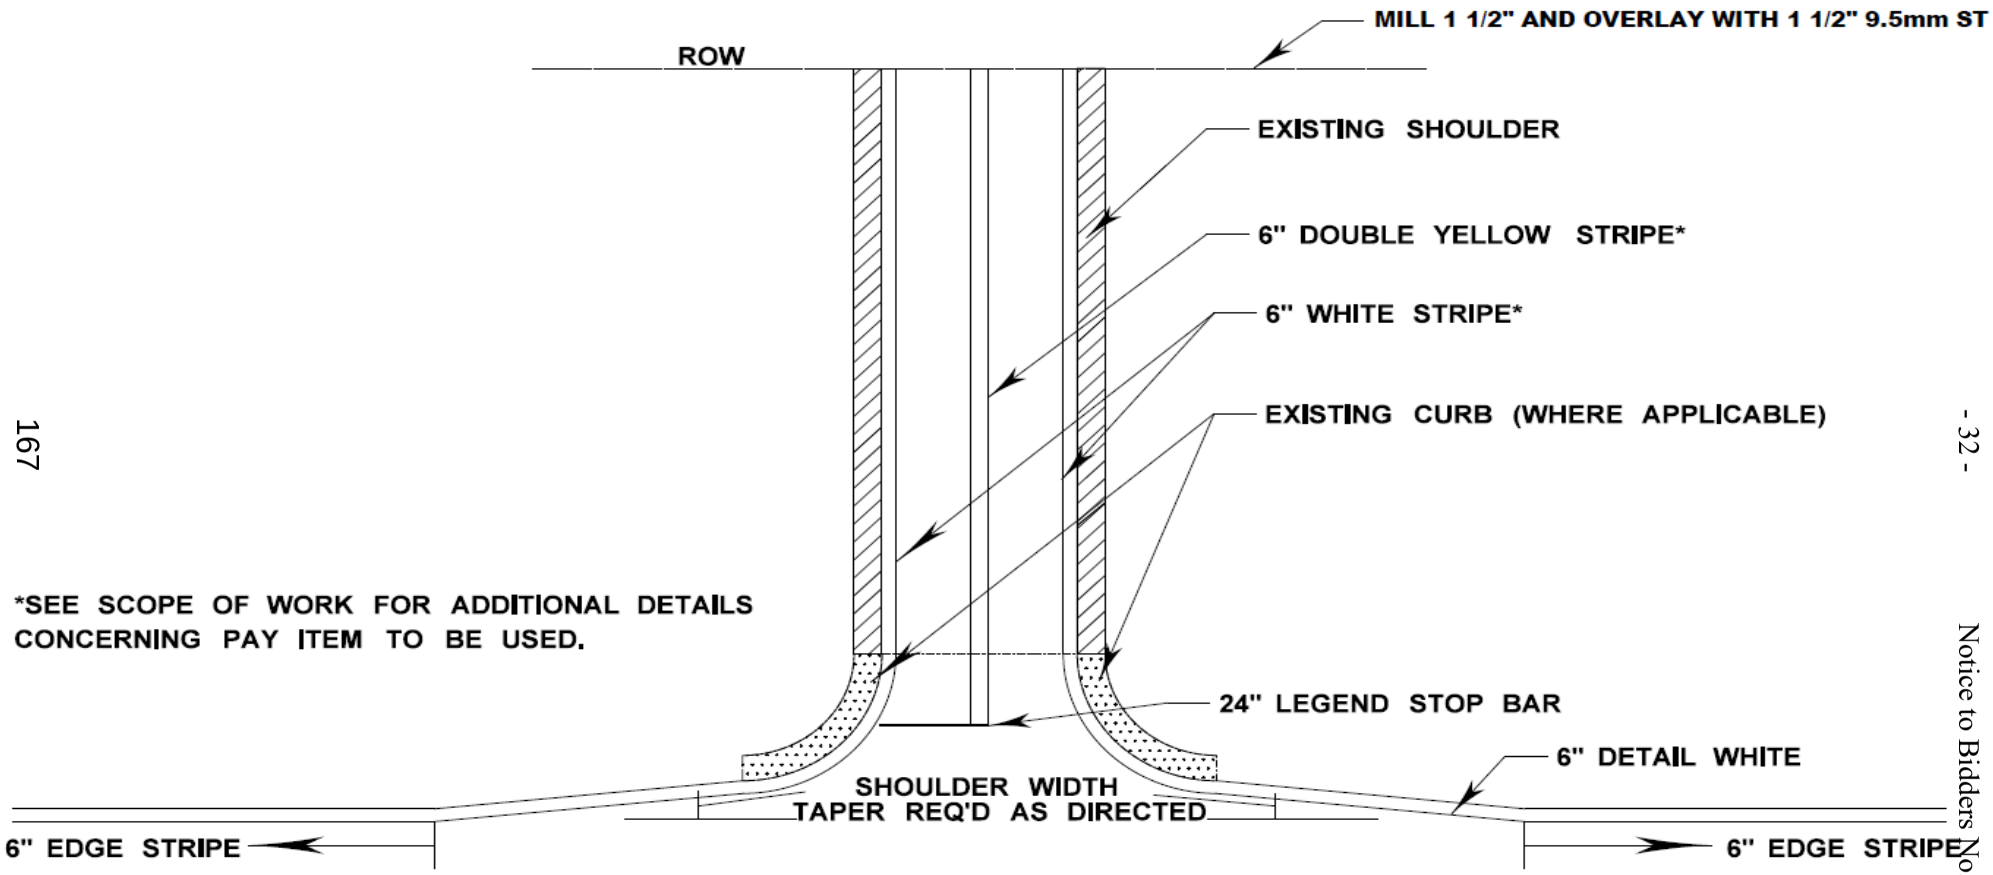

NOTE: CENTERLINE STRIPE SHALL BE OMITTED ON LOCAL ROADS WHOSE WIDTH IS LESS THAN 20 FEET.

FMS CON: UPDATE/UPDATE


STATE	PROJECT NO.
MISS.	UPDATE

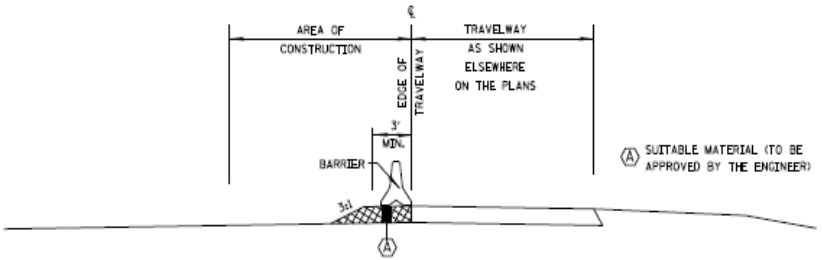

ELEVATION VIEW FOR POSITIVE BARRIER

NOTES:


1. POSITIVE BARRIER IS REQ'D IN THE AREA OF OPEN PUNCH OUTS THAT ARE WITHIN SIX (6) FEET OF THE TRAVELWAY WHENEVER ACTUAL REPAIR WORK IS NOT BEING PERFORMED WITHIN THE LANE CLOSURE.
2. MATERIAL USED TO SUPPORT POSITIVE BARRIER MUST BE AT SAME ELEVATION AS PAVEMENT IN ADJACENT TRAVELWAY.
3. DELINEATORS REQUIRED ON ALL NON-REFLECTIVE BARRIER, AS SHOWN ON WORKING NO. CMB-3.

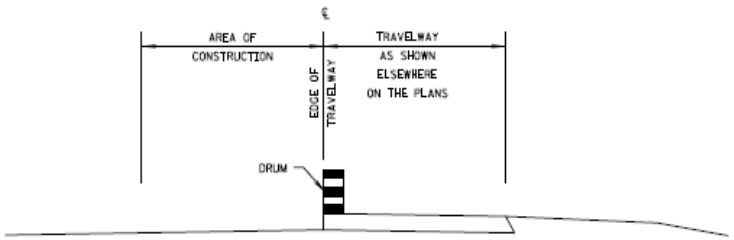


ELEVATION VIEW FOR DRUM

NOTES:

1. WHILE WORK IS BEING PERFORMED WITHIN THE LANE CLOSURE, DROP-OFFS MUST BE PROTECTED WITH DRUMS, ETC. IN EMERGENCIES EXCAVATED SECTION MAY BE BACKFILLED WITH GRANULAR MATERIAL, STONE OR OTHER APPROVED MATERIAL TO AVOID OVERNIGHT DROP-OFFS.
2. LANE CLOSURES WITH OPEN PUNCH OUT AREAS MAY NOT BE LEFT UNATTENDED WHEN DRUMS ARE BEING USED FOR LANE CLOSURE

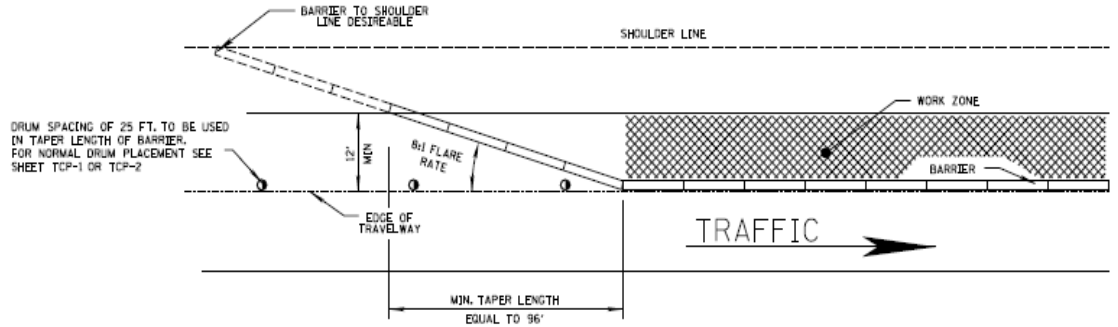

DETAIL OF POSITIVE BARRIER WITH TAPER

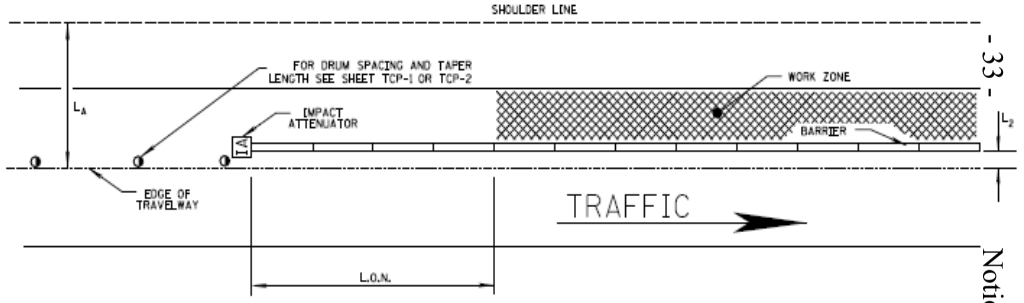

DETAIL OF POSITIVE BARRIER WITH IMPACT ATTENUATOR

NOTES:

1. LENGTH OF NEED, L.O.N. = $\frac{L_R(L_A - L_2)}{L_A}$

WHERE: L_A = LATERAL EXTENT OF THE AREA OF CONCERN
L_R = RUNOUT LENGTH
L_2 = LATERAL OFFSET FROM EDGE OF TRAVELED WAY TO BARRIER.

2. RUNOUT LENGTH (L_R) IS TO BE DETERMINED USING THE FOLLOWING TABLE:

RUNOUT LENGTH (L_R) GIVEN TRAFFIC VOLUME (ADT) (ft)				
DESIGN SPEED (mph)	OVER 10,000 veh/day	5,000-10,000 veh/day	1,000-5,000 veh/day	UNDER 1,000 veh/day
70	360	330	290	250
60	300	250	210	200
50	230	190	160	150
40	160	130	110	100
30	110	90	80	70

GENERAL NOTES:

1. ALL TRAFFIC CONTROL ITEMS SHOWN ON THIS SHEET SHALL BE PAID FOR UNDER OTHER BID ITEMS.
2. FOR DETAILS OF DRUM PLACEMENT SEE OTHER TRAFFIC CONTROL PLANS.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

LANE CLOSURE DETAILS FOR GREATER THAN 3 INCH DROPOFF

PROJ. NO.: UPDATE
COUNTY: UPDATE
FILENAME: SDTCP-C.DGN
DESIGN TEAM: UPDATE CHECKED: UPDATE DATE: UPDATE

BY | REVISION | DATE


PRELIMINARY NOT FOR CONSTRUCTION

WORKING NUMBER SDTCP-C

SHEET NUMBER PGS


Notice to Bidders No. 7684 -- Cont'd.

NH-0008-03(050)
US 49 OVERLAY
FROM HINDS COUNTY LINE TO YAZOO COUNTY LINE
MADISON COUNTY
105530/301000

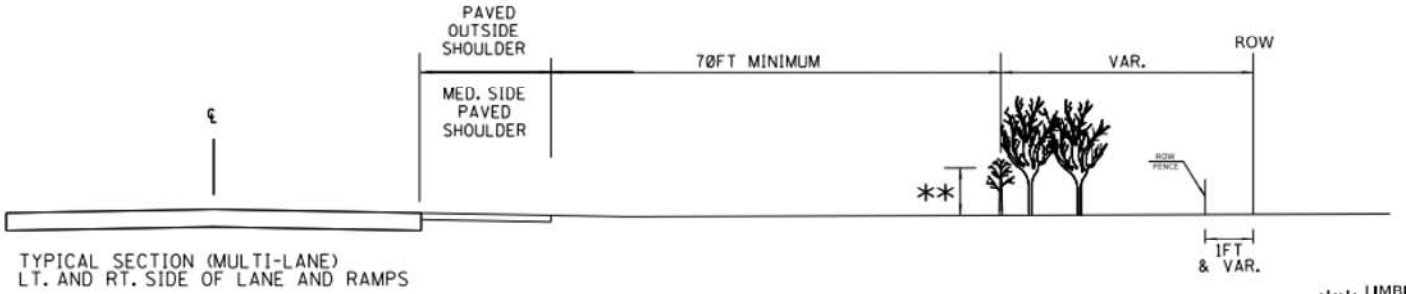

TYPICAL SECTION (MULTI-LANE)
LT. AND RT. SIDE OF LANE AND RAMPS

** LIMBING WILL BE DONE UP TO 30' VERTICALLY WITHIN THE 70' HORIZONTAL LIMITS

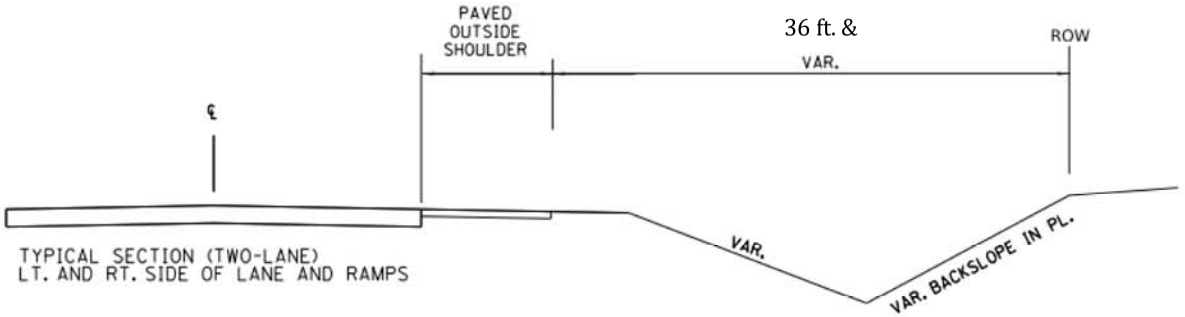


TYPICAL SECTION (TWO-LANE)
LT. AND RT. SIDE OF LANE AND RAMPS

TYPICAL SECTIONS - ROADSIDE CLEAR ZONE REQ'D

NOTE: THE PROJECT ENGINEER MAY REQUEST CLEARING IN OTHER LOCATIONS AS NEEDED.

DESIGNED BY:
DETAILED BY:
CHECKED BY:
DATE:
FMS CON: /
PROJECT NO.:
COUNTY:
TYPICAL SECTION
ROADSIDE CLEAR ZONES REQUIRED
SHEET ID
SHEET NO.

PLAN SHEET
3/13/2024 2:51:42 PM New Clearing limits Interstate.dgn

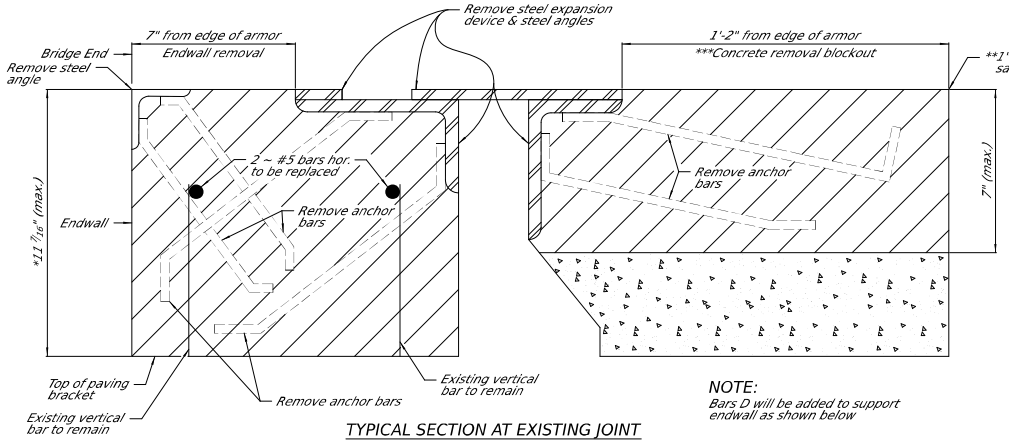

TYPICAL SECTION AT EXISTING JOINT


Showing existing steel expansion device to be removed and replaced with preformed joint seal

Denotes top of endwall and box girder deck to be removed

*NOTE:
Remove 11 7/16" (max.) of endwall without damaging reinforcing steel. Clean and prepare according to Specifications.


**1" SAW CUT NOTES:
All 1" saw cuts shall be considered an absorbed item of work. The Contractor shall verify the depth of reinforcing steel before making any saw cuts. The depth of the saw cut shall be no more than the depth of the reinforcing steel. Any damage to the reinforcing steel shall be repaired by the Contractor to the satisfaction of the Project Engineer at no cost to the State.

***CONCRETE REMOVAL BLOCKOUT NOTES:
Removal of the concrete blockout area shall be considered an absorbed item of work under Pay Item No. 202-B169, Removal of Joint Material. The Contractor shall use a hammer no larger than 15 lbs. to complete this work.



ELEVATION AT END OF SPAN


NOTE:
Bars D will be added to support endwall as shown below

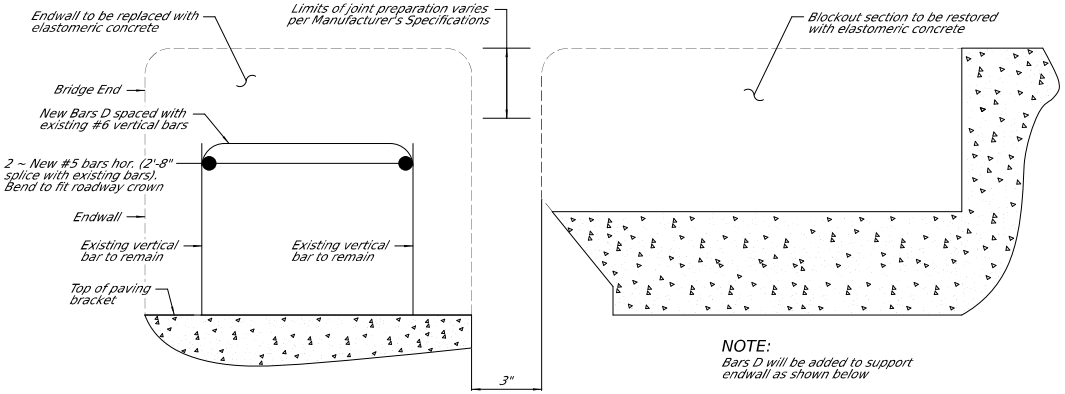


TYPICAL SECTION AT JOINT AFTER REMOVAL OF STEEL EXPANSION DEVICE

Showing limits of joint preparation for application of new joint seal materials and reinforcing steel

NOTE:
Bars D will be added to support endwall as shown below



Bars D ~ #5

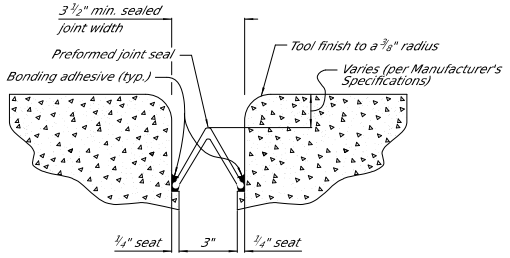


TYPICAL SECTION AT SEALED JOINT

Showing sealed joint after repair with elastomeric concrete

****NOTE
Saw cut existing concrete 1" deep so as to obtain a rectangular area. Prior to making any saw cuts, the Contractor shall locate and verify the depth of existing reinforcing steel. All existing reinforcing steel shall be carefully preserved and blast cleaned. Any damage to existing reinforcing steel shall be repaired by the Contractor to the satisfaction of the Engineer at no cost to the State.


It should be noted that hammers used for concrete removal should be limited to 15 lbs. for box girder repairs and 30 lbs. for all other epoxy repairs.

FORMING NOTE:
Form vertical face of endwall and box girder deck with elastomeric concrete to include 1/4" seat such that the preformed joint seal may be applied per Manufacturer's Specifications.

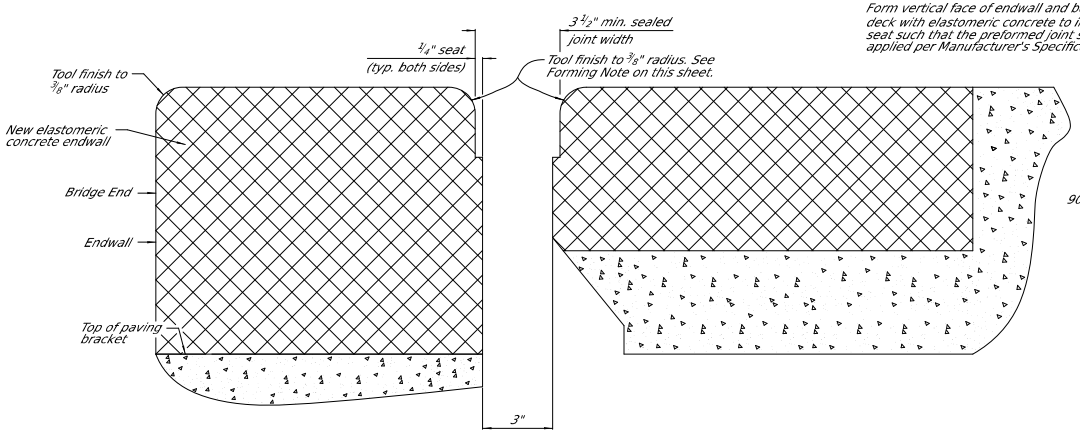


TYPICAL SECTION AT JOINT REPAIR

Showing area where repairs are made with elastomeric concrete



EPOXY REPAIR DETAILS

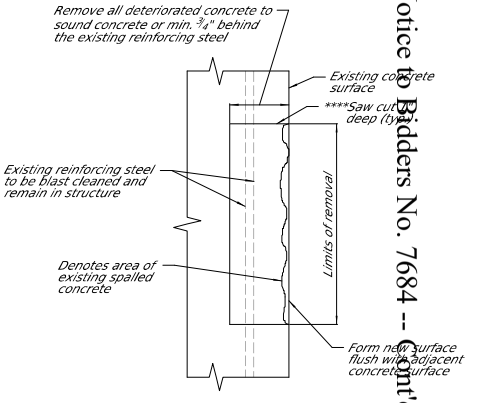

The following attachments pertain to Project Numbers CRP-0008-03(050) / 105530302 in Madison County, CRP-0008-03(050) / 105530303 in Hinds County, and NHPP-0008-04(085) / 108150304 in Yazoo County. Any references to Project Number NH-0008-03(050) / 105530301 in the following attachments shall be understood to mean Project Numbers CRP-0008-03(050) / 105530302, CRP-0008-03(050) / 105530303, and NHPP-0008-04(085) / 108150304.

FMS CON: 105530/301000

STATE	PROJECT NO.
MISS.	

ITS GENERAL NOTES

1. ALL EXISTING UNDERGROUND UTILITIES ARE NOT SHOWN ON THE DRAWINGS. THE CONTRACTOR SHALL BE RESPONSIBLE FOR MAKING HIS OWN INDEPENDENT INVESTIGATIONS, INCLUDING SUB-SURFACE INVESTIGATIONS AS MAY BE NECESSARY TO LOCATE UTILITIES WITHIN THE PROJECT LIMITS. THE CONTRACTOR SHALL CONTACT MS811 FOR UTILITIES TO BE LOCATED.

2. ITS EQUIPMENT SHOWN ON THESE PLANS ARE IN APPROXIMATE LOCATIONS. ALL EQUIPMENT SHALL BE FIELD LOCATED BY THE CONTRACTOR WITH PROPOSED LOCATIONS APPROVED BY MDOT TO VERIFY PROPER PLACEMENT AND BEST SIGHT DISTANCE FOR EQUIPMENT, ADEQUATE ROADSIDE PROTECTION, ETC. THE CONTRACTOR SHALL STAKE EACH PROPOSED LOCATION A MINIMUM OF FIVE (5) WORKING DAYS PRIOR TO REVIEW BY MDOT. THE COST OF FIELD STAKING ITS EQUIPMENT WILL NOT BE MEASURED FOR SEPARATE PAYMENT AND SHALL BE ABSORBED UNDER OTHER ITEMS OF WORK. THE CONTRACTOR SHALL INSTALL ALL EQUIPMENT, PULLBOXES, AND CONDUIT WITHIN PUBLIC RIGHT-OF-WAY.

3. FIELD LOCATION ADJUSTMENTS MAY BE REQUIRED AT TIME OF EQUIPMENT INSTALLATION DUE TO POTENTIAL CONFLICTS OR OTHER FACTORS THAT WERE UNIDENTIFIABLE DURING THE PROJECT DESIGN PHASE. ANY REQUIRED ADJUSTMENTS SHALL BE APPROVED BY THE PROJECT ENGINEER.

4. ROADWAY EDGE OF ABOVE GROUND ITS EQUIPMENT TO BE LOCATED OUTSIDE OF CLEAR ZONE AREA UNLESS PROTECTED BY CURB, GUARD RAIL OR BRIDGE RAIL, USING AN APPROVED BREAK-AWAY APPARATUS, OR APPROVED BY THE PROJECT ENGINEER.

5. THE COST OF DISPOSING OF ALL UNUSED OR REMOVED MATERIALS (POLES, FIXTURES, SOIL, ETC.) SHALL BE ABSORBED FOR PAYMENT IN OTHER ITEMS.

6. ANY AREAS DISTURBED DURING ITS CONSTRUCTION SHALL BE RESTORED BY THE CONTRACTOR (TO INCLUDE GRASSING AND SITE GRADING) AS DIRECTED BY THE ENGINEER AND SHALL BE COST ABSORBED. ALL REMOVAL AND REPLACEMENT OF SIDEWALKS, ASPHALT, CONCRETE, SOD, GRASSING, SOIL, AND BACKFILL ARE COST ABSORBED AND CONSIDERED PART OF THE COST OF THE WORK UNLESS COVERED UNDER OTHER PAY ITEMS IN PLANS.

7. THE CONTRACTOR SHALL MAKE THE APPLICATION FOR POWER SERVICE, COORDINATING WITH MDOT AND LOCAL OFFICIALS IN ADVANCE OF REQUIRING THE ELECTRICAL SERVICES. IF ELECTRICAL SERVICE REQUIRES A SERVICE METER TO BE INSTALLED, CONTRACTOR TO CONTACT THE ELECTRIC UTILITY OWNER. ANY INSTALLATIONS OF AERIAL POWER CIRCUITS, POWER PANELS OR WOOD POLES TO PROVIDE POWER SERVICE SHALL MEET LOCAL EPA REQUIREMENTS AND BE COST ABSORBED. CONTRACTOR SHALL ESTABLISH POWER SERVICE IN HIS OR HER BILLING ADDRESS, AND SHALL PAY ALL UTILITY CONNECTION CHARGES AND CHARGES FOR SERVICE UNTIL FINAL PROJECT ACCEPTANCE. ALL TRANSFORMERS AND/OR TERMINAL BLOCKS NEEDED AT THE POWER SERVICE POINT OR AT THE DEVICE LOCATIONS SHALL BE COST ABSORBED IN THE APPROPRIATE 907-660 PAY ITEM.

8. CONTRACTOR SHALL BE RESPONSIBLE FOR ALL UTILITY MAKE-READY COST INCURRED TO PROVIDE POWER AND COMMUNICATION SERVICES TO THE EQUIPMENT, NOT A SEPARATE PAY ITEM (COST ABSORBED). THE CONTRACTOR SHALL BE RESPONSIBLE FOR MAKING AN INDEPENDENT INVESTIGATION INTO UTILITY MAKE-READY COST FOR BIDDING PURPOSES.

9. ALL COMMUNICATION PULLBOXES SHALL BE EITHER TYPE 4 OR TYPE 5 UNLESS OTHERWISE NOTED ON THE PLANS. EACH BELOW GROUND PULLBOX SHALL INCLUDE ADDITIONAL CABLE SLACK (SEE SPEC. PROVISION 907-661 FOR DETAILS.) THE ADDITIONAL CABLE SHALL BE COST ABSORBED UNDER THE APPROPRIATE 907-661, 907-636, OR 907-663 PAY ITEMS.

10. ALL FIBER SPLICES REQUIRED TO CONNECT TRUNK AND DROP CABLE TO NEW AND EXISTING EQUIPMENT SHALL NOT BE A SEPARATE PAY ITEM, BUT SHALL BE ABSORBED UNDER ITEM 907-661.

11. IT IS THE CONTRACTOR'S RESPONSIBILITY TO PROVIDE ENOUGH ANTENNAS, RADIOS, CABLES AND ACCESSORIES, BASED ON SELECTION OF EQUIPMENT, TO PRODUCE A FULLY FUNCTIONING SYSTEM AS INDICATED IN THESE PLANS.

12. MDOT INFORMATION SYSTEMS DIVISION (601.359.7470) WILL CONFIGURE ALL TYPE C AND ABOVE SWITCHES. MDOT IS WILL INSPECT SWITCHES FOR PROPER INSTALLATION DURING THE BURN IN PERIOD. CONTRACTOR SHALL COORDINATE THIS EFFORT THROUGH THE PROJECT ENGINEER ONCE THE SWITCH SUBMITTAL HAS BEEN ACCEPTED.

13. CONDUIT FOR POWER SUPPLY MAY BE RUN IN THE SAME TRENCH LINE AS COMMUNICATION LINES (SEE WKG. NO. FO-1), HOWEVER, SEPARATE ELECTRICAL PULLBOXES ARE TO BE INSTALLED. CONTRACTOR TO REVIEW PLANS BEFORE INSTALLING PULLBOXES AND FOUNDATIONS TO ASSURE ALL REQUIRED PULLBOXES AND CONDUITS ARE INSTALLED.

14. PAYMENT FOR FIBER OPTIC CABLE AND POWER CABLE SHALL BE MEASURED BASED ON HORIZONTAL MEASUREMENTS AS CALLED OUT IN THE PLANS AND INCLUDES SLACK IN PULLBOXES AS NOTED ON SHEET FO-3. PAYMENT FOR ETHERNET CABLE SHALL BE MEASURED BASED ON HORIZONTAL MEASUREMENTS AS CALLED OUT IN THE PLANS, INCLUDES VERTICAL RUNS IN POLES, AND INCLUDES SLACK IN PULLBOXES AS NOTED ON SHEET FO-3. CONDUIT SHALL BE MEASURED BASED ON HORIZONTAL MEASUREMENTS ONLY. HORIZONTAL MEASUREMENTS ARE IN THE HORIZONTAL PLANE ONLY AND DO NOT INCLUDE CHANGES IN ELEVATION OR SNAKING.

15. ALL GROUNDING CABLES AND EQUIPMENT SHALL BE COST ABSORBED. REFER TO SECTION 722.09 FOR MORE INFORMATION.

16. A TRACER WIRE SHALL BE INSTALLED IN CONDUIT THAT CARRIES FIBER OPTIC AND/OR COMMUNICATION CABLE, COST TO BE ABSORBED. CONDUIT THAT CARRIES FIBER OPTIC CABLE SHALL CONTAIN AN AWG #10 ORANGE TRACER WIRE, COST SHALL BE ABSORBED UNDER PAY ITEM 907-661. CONTRACTOR MAY OPT TO USE FIBER OPTIC CABLE WITH BUILT-IN TRACER WIRE, IF SO EXTERNAL TRACER WIRE WILL NOT BE REQUIRED.

17. CONDUIT FOR FIBER OPTIC CABLE REQUIRED TO UTILIZE MINIMUM 6" RADIUS BENDS. NO ELBOW JOINTS ALLOWED. UNDERGROUND DRILLED OR JACKED CONDUIT SHALL BE INSTALLED AT A MINIMUM DEPTH OF FIVE (5) FEET AND UNDERGROUND TRENCHED CONDUIT SHALL BE INSTALLED AT A MINIMUM DEPTH OF THREE (3) FEET UNLESS OTHERWISE DIRECTED BY THE ENGINEER.

18. ALL ABOVE GROUND CONDUIT SHALL BE TYPE 1 RIGID METAL. PVC SHALL NOT BE ALLOWED ABOVE GROUND UNLESS SPECIFICALLY OTHERWISE NOTED ON PLANS.

19. ALL CONDUITS TO BE SEALED WITH DUCT PLUG TO PREVENT WATER INTRUSION ONCE CABLE IS INSTALLED. COST TO BE ABSORBED IN CONDUIT PAY ITEMS.

20. FOR CONDUIT BANKS, ONE OR MORE (AS INDICATED ON THE PLANS) OF THE CONDUITS WILL BE FOR FUTURE USE AND SHALL INCLUDE A PULL STRING.

21. REEL-END SPLICE LOCATIONS SHALL BE SUBMITTED AND SHALL NOT OCCUR MORE OFTEN THAN EVERY 10,000 FEET. REEL-END SPLICE SHALL BE MADE IN A TYPE 5 PULLBOX AND SHALL UTILIZE A TYPE 5 PULLBOX ALREADY SHOWN ON THE PLANS, UNLESS OTHER LOCATIONS ARE APPROVED BY THE ENGINEER.

22. IF CONTRACTOR OPTS TO USE A SINGLE SLEEVE FOR INSTALLATION OF MULTIPLE CONDUITS, THE CONTRACTOR SHALL SUBMIT SIZE OF SLEEVE AND MATERIALS DATA TO THE ENGINEER FOR APPROVAL PRIOR TO INSTALLATION.

23. WHERE THE CONTRACTOR ENCOUNTERS PAVED DITCHES IN ROUTING OF CONDUIT, HE MAY TRENCH AND REPLACE DITCH OR JACK UNDER DITCH. THIS IS NOT A SEPARATE PAY ITEM. DAMAGE TO PAVED DITCHES AND/OR OTHER STRUCTURES CAUSED BY CONTRACTOR DURING THIS PROJECT SHALL BE REPAIRED (AS DIRECTED BY THE ENGINEER) AT NO COST TO THE STATE.

24. UNLESS CALLED OUT AND QUANTIFIED IN PLANS, ROADWAY SIGNS THAT ARE IN CONFLICT WITH CONSTRUCTION OF THIS PROJECT SHALL BE REMOVED AND RELOCATED BY THE CONTRACTOR AS DIRECTED BY THE ENGINEER, THE COST OF WHICH SHALL BE ABSORBED IN OTHER ITEMS BID.

25. ALL ITS COMPONENTS ARE SHOWN FOR ILLUSTRATIVE PURPOSES ONLY. SUPPORTS, ATTACHMENTS AND FOUNDATIONS SHALL BE DESIGNED BY THE CONTRACTOR ACCORDING TO STANDARD SPECIFICATIONS/SPECIAL PROVISIONS/PLAN DRAWINGS AND STAMPED BY A PROFESSIONAL ENGINEER REGISTERED IN THE STATE OF MISSISSIPPI. THE CONTRACTOR SHALL SUBMIT FOUR (4) SETS OF LAYOUT/SHOP DRAWINGS FOR ALL ITS COMPONENTS (INCLUDING THE PLAN OF ATTACHMENT) TO THE PROJECT ENGINEER FOR REVIEW AND APPROVAL. ELECTRONIC SUBMITTALS ARE ACCEPTABLE.

26. POLE FOUNDATIONS SHALL NOT EXCEED FOUR (4) INCHES ABOVE FINISHED GRADE.

27. SOME CENTERLINES SHOWN ON THESE PLANS MAY BE FOR GRAPHICAL REFERENCE PURPOSES ONLY AND ARE NOT STAKED IN THE FIELD.

28. PLAN SCALE INDICATIONS ARE FOR FULL SIZE (22" x 34") DRAWINGS. IF REDUCED SCALE PRINTS ARE USED, SCALE SHOULD BE VERIFIED.

29. IT IS THE CONTRACTOR'S RESPONSIBILITY TO COORDINATE WITH THE LOCAL POWER COMPANY TO DETERMINE IF ADEQUATE POWER IS AVAILABLE AT THE EXISTING POWER SERVICE DEMARCATION POINT. IF ADDITIONAL SERVICE IS REQUIRED, THE CONTRACTOR SHALL COORDINATE WITH THE LOCAL POWER COMPANY TO SUPPLY THE POWER REQUIRED. COST OF COORDINATING WITH POWER COMPANY AND MAKING ANY NECESSARY POWER UPGRADES SHALL BE INCLUDED IN BID PRICE FOR THE POWER CABLE PAY ITEM.

37 - Notice to Bidders No. 7684 -- Contract ID: 105530

MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ITS GENERAL NOTES

PROJ. NO.: NH-0008-03(050)
COUNTY: MADISON

FILE NAME: ITS-GN.dgn
DESIGN TEAM _____ CHECKED _____ DATE _____

WORKING NUMBER: ITS-GN-1
SHEET NUMBER: 3001

REVISION | BY | DATE

PLAN REVIEW DIVISION
MISSISSIPPI DEPARTMENT OF TRANSPORTATION

T72

8/28/2024 5:21 PM ITS-GN.DGN

STATE	PROJECT NO.
MISS.	

ITS LEGEND

	EXISTING	PROPOSED
CABLE - COMM.	C C C C	C C C C
CABLE - ELEC. (U/G IN COND.)		
LABEL FOR CONDUIT AND CONDUIT TYPES	[CONDUIT DESCRIPTION(S)] / [CABLE DESCRIPTION(S)]	[CONDUIT DESCRIPTION(S)] / [CABLE DESCRIPTION(S)]
LABEL FOR DEVICE DESCRIPTIONS AND LOCATIONS	[DEVICE #(S) & DESCRIPTION(S)] / [LOCATION DESCRIPTION(S)]	[DEVICE #(S) & DESCRIPTION(S)] / [LOCATION DESCRIPTION(S)]
PULLBOX - COMM.		
PULLBOX - ELEC.	PB	PB
PULLBOX - SURFACE MOUNTED	SP	SP
LABEL FOR PULL BOX TYPE	X	X
DEMARC. PT. (POWER)		
TRANSFORMER	TR	TR
TRAFFIC SIGNAL CABINET	TSC	TSC or
CABINET (TYPE AS NOTED)	B	B
CLOSED-CIRCUIT TELEVISION (CCTV) (ALL TYPES)	CCTV	CCTV
DYNAMIC MESSAGE SIGN (DMS) (OVERHEAD) (TYPE 1)	DMS	DMS
DYNAMIC MESSAGE SIGN (DMS) (ROADSIDE) (TYPE 2 OR 3 AS INDICATED)	DMS TYPE 2 / TYPE 3	DMS TYPE 2 / TYPE 3
DMS (PORTABLE)	DMS	DMS
RADAR DETECTION SYSTEM (RDS)	RDS	RDS
BLUETOOTH DETECTION SYSTEM (BDS)	BDS	BDS
COMMUNICATIONS HUT	CH	CH
COMMUNICATIONS VAULT	V	V
WIRELESS RADIO		

	EXISTING	PROPOSED
GUARD RAIL		
SIGN STRUCTURE (OVERHEAD)		
RWIS STATION	RWIS	RWIS
HIGHWAY ADVISORY RADIO (HAR) TRANSMITTER	HAR	HAR
HAR SIGN W/FLASHERS	HAR	HAR
WIRELESS TRANSMISSION TOWER / ANTENNA		
TRAVEL TIME SIGN (ROADSIDE)	TTS	TTS
ADVANCED WARNING SIGN WITH FLASHING BEACON		

ABBREVIATIONS

E.O.T.L. - EDGE OF TRAVEL LANE
F.O. - FIBER OPTIC
COMM. - COMMUNICATION
ELEC. - ELECTRICAL
DEMARC. PT. - DEMARCATION POINT
CCTV - CLOSED CIRCUIT TELEVISION
DMS - DYNAMIC MESSAGE SIGN
RDS - RADAR DETECTION SYSTEM
BDS - BLUETOOTH DETECTION SYSTEM
RWIS - ROADWAY WEATHER INFO SYSTEM
HAR - HIGHWAY ADVISORY RADIO
TTS - TRAVEL TIME SIGN

Notice to Bidders No. 7684 -- Contract ID: 173

MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ITS LEGEND

PROJ. NO.: NH-0008-03(050)
COUNTY: MADISON

FILE NAME: ITS-LGN.dgn
DESIGN TEAM _____ CHECKED _____ DATE _____

WORKING NUMBER: ITS-LGN
SHEET NUMBER: 3002

REVISION | BY | DATE

PLAN PREPARED BY DIVISION MISSISSIPPI DEPARTMENT OF TRANSPORTATION

8/28/2024 5:21:27 PM ITS-LGN.DGN

Madison County ITS Quantities (105530-302)

Pay Item	Name	UNIT	QTY	*Notes*
907-618-A001	Maintenance of Traffic	LS	1	
620-A001	Mobilization	LS	1	
907-632-C001	Modify Existing Traffic Signal Cabinet Assembly	EA	2	***2***
907-634-E001	Camera Pole with Foundation, 50' Pole	EA	2	
907-636-B053	Electric Cable, Underground in Conduit, THHN, AWG #6, 3 Conductor	LF	200	***1***
907-637-E001	Electric Cable, Underground in Conduit, Tracer Cable	LF	200	***1***
907-637-A002	Pullbox Enclosure, Type 2	EA	2	***7***
907-637-A004	Pullbox Enclosure, Type 4	EA	44	***1,3, 6***
907-637-A005	Pullbox Enclosure, Type 5	EA	11	***1,3, 6***
907-637-H001	Traffic Signal Conduit Bank, Underground, Rolled Pipe, 2 @ 2"	LF	49600	***1, 4***
907-637-H002	Traffic Signal Conduit Bank, Underground, Rolled Pipe, 2"	LF	270	***1, 4***
907-637-K001	Traffic Signal Conduit Bank, Aerial Supported, Type 1, 2 @ 2"	LF	1370	
907-650-A002	On Street Video Equipment, Fixed Type	EA	4	
907-650-A003	On Street Video Equipment, PTZ Type	EA	2	
907-659-A001	Traffic Management Center Modifications	LS	1	
907-660-A002	Equipment Cabinet, Type B	EA	2	***6***
907-661-A004	Fiber Optic Cable, 72 SM	LF	51,500	***1, 5, 6***
907-661-A006	Fiber Optic Cable, Aerial, 72 SM	LF	1,370	***5, 6***
907-661-B002	Fiber Optic Drop Cable, 12 SM	LF	150	***1, 5, 6***
907-663-A001	Network Switch, Type A	EA	2	
907-663-D001	Category 6 Cable, Installed in Conduit	LF	300	***1***

Notes

1 Quantities may be adjusted based on field conditions

2 Add a Fiber Drop inside the traffic signal cabinet at US 49/MS 22 and US 49/CoxFerryRoad intersection. Add all existing devices to the network via Fiber. MDOT to provide the IP addressed

3 Type 4 or 5 Pullbox shall be installed at least every 1000 feet for the fiber trunk line. Pullboxes shown on these plans are in approximate locations. Locations and quantities may be adjusted for adequate distance and roadside conditions. Splice closures shall be installed inside Type 5 Pullboxes (cost absorbed).

4 Installation may be trenching, plowing, or boring at Contractor's discretion. Bid prices shall be the same regardless of which installation method is used. Trenched or plowed rolled pipe shall be Schedule 40 Pipe or Larger. Bored, Drilled, or Jacked rolled pipe shall be Schedule 80 Pipe or larger.

5 Contractor shall coordinate with MDOT IS Division for all Fiber termination and splicing details.

6 Contractor shall be responsible for submitting as-builts for the newly installed fiber optic cables (including Fiber Trunk and Fiber Drops), ITS Pullboxes with Type, and ITS/Signal Cabinets with an accuracy within 3 feet. All survey data must be provided to MDOT IS Division in both KMZ file and a Shapefile formats. This work shall be cost absorbed under Pay-Item 907-661-A004 & A006 and 907-661-B002.

7 To be used in conjunction with Power Cable



MISSISSIPPI DEPARTMENT OF TRANSPORTATION

PROJECT NO: NH-0008-03(050)
FMS CON: 105530/301000

ITS PLANS

ROUTE: US 49
COUNTY: MADISON

WORKING NUMBER: ITS-1
SHEET NUMBER: 3003



MISSISSIPPI DEPARTMENT OF TRANSPORTATION

PROJECT NO: NH-0008-03(050)
FMS CON: 105530/301000

ITS PLANS


ROUTE: US 49
COUNTY: MADISON

WORKING NUMBER: ITS-2
SHEET NUMBER: 3004

179



MISSISSIPPI DEPARTMENT OF TRANSPORTATION
PROJECT NO: NH-0008-03(050)
FMS CON: 105530/301000
ITS PLANS
ROUTE: US 49
COUNTY: MADISON
WORKING NUMBER: ITS-3
SHEET NUMBER: 3005
Cond. Bank (2-2" Roll Pipe)
1- F.O. Cable
Type 4 PB
Type 5 PB
2-2" RGS COND (AERIAL SUPPORTED) 350'
1- F.O. Cable (AERIAL SUPPORTED) 350'
(See Sheets ASC-1C & 2C for Bridge Deck
Mount Details) (32.5929, -90.3537)
177
N
600 ft
Cond. Bank (2-2" Roll Pipe)
1- F.O. Cable
Type 5 PB
Google Earth
Image © 2026 Airbus


MISSISSIPPI DEPARTMENT OF TRANSPORTATION
PROJECT NO: NH-0008-03(050)
FMS CON: 105530/301000
ITS PLANS
ROUTE: US 49
COUNTY: MADISON
WORKING NUMBER: ITS-4
SHEET NUMBER: 3006
Type 5 PB
Type 4 PB
Type 4 PB
Type 4 PB
Type 4 PB
Cond. Bank (2-2" Roll Pipe)
1- F.O. Cable
Cond. Bank (2-2" Roll Pipe)
1- F.O. Cable
178
N
1000 ft
Google Earth
Image © 2026 Airbus

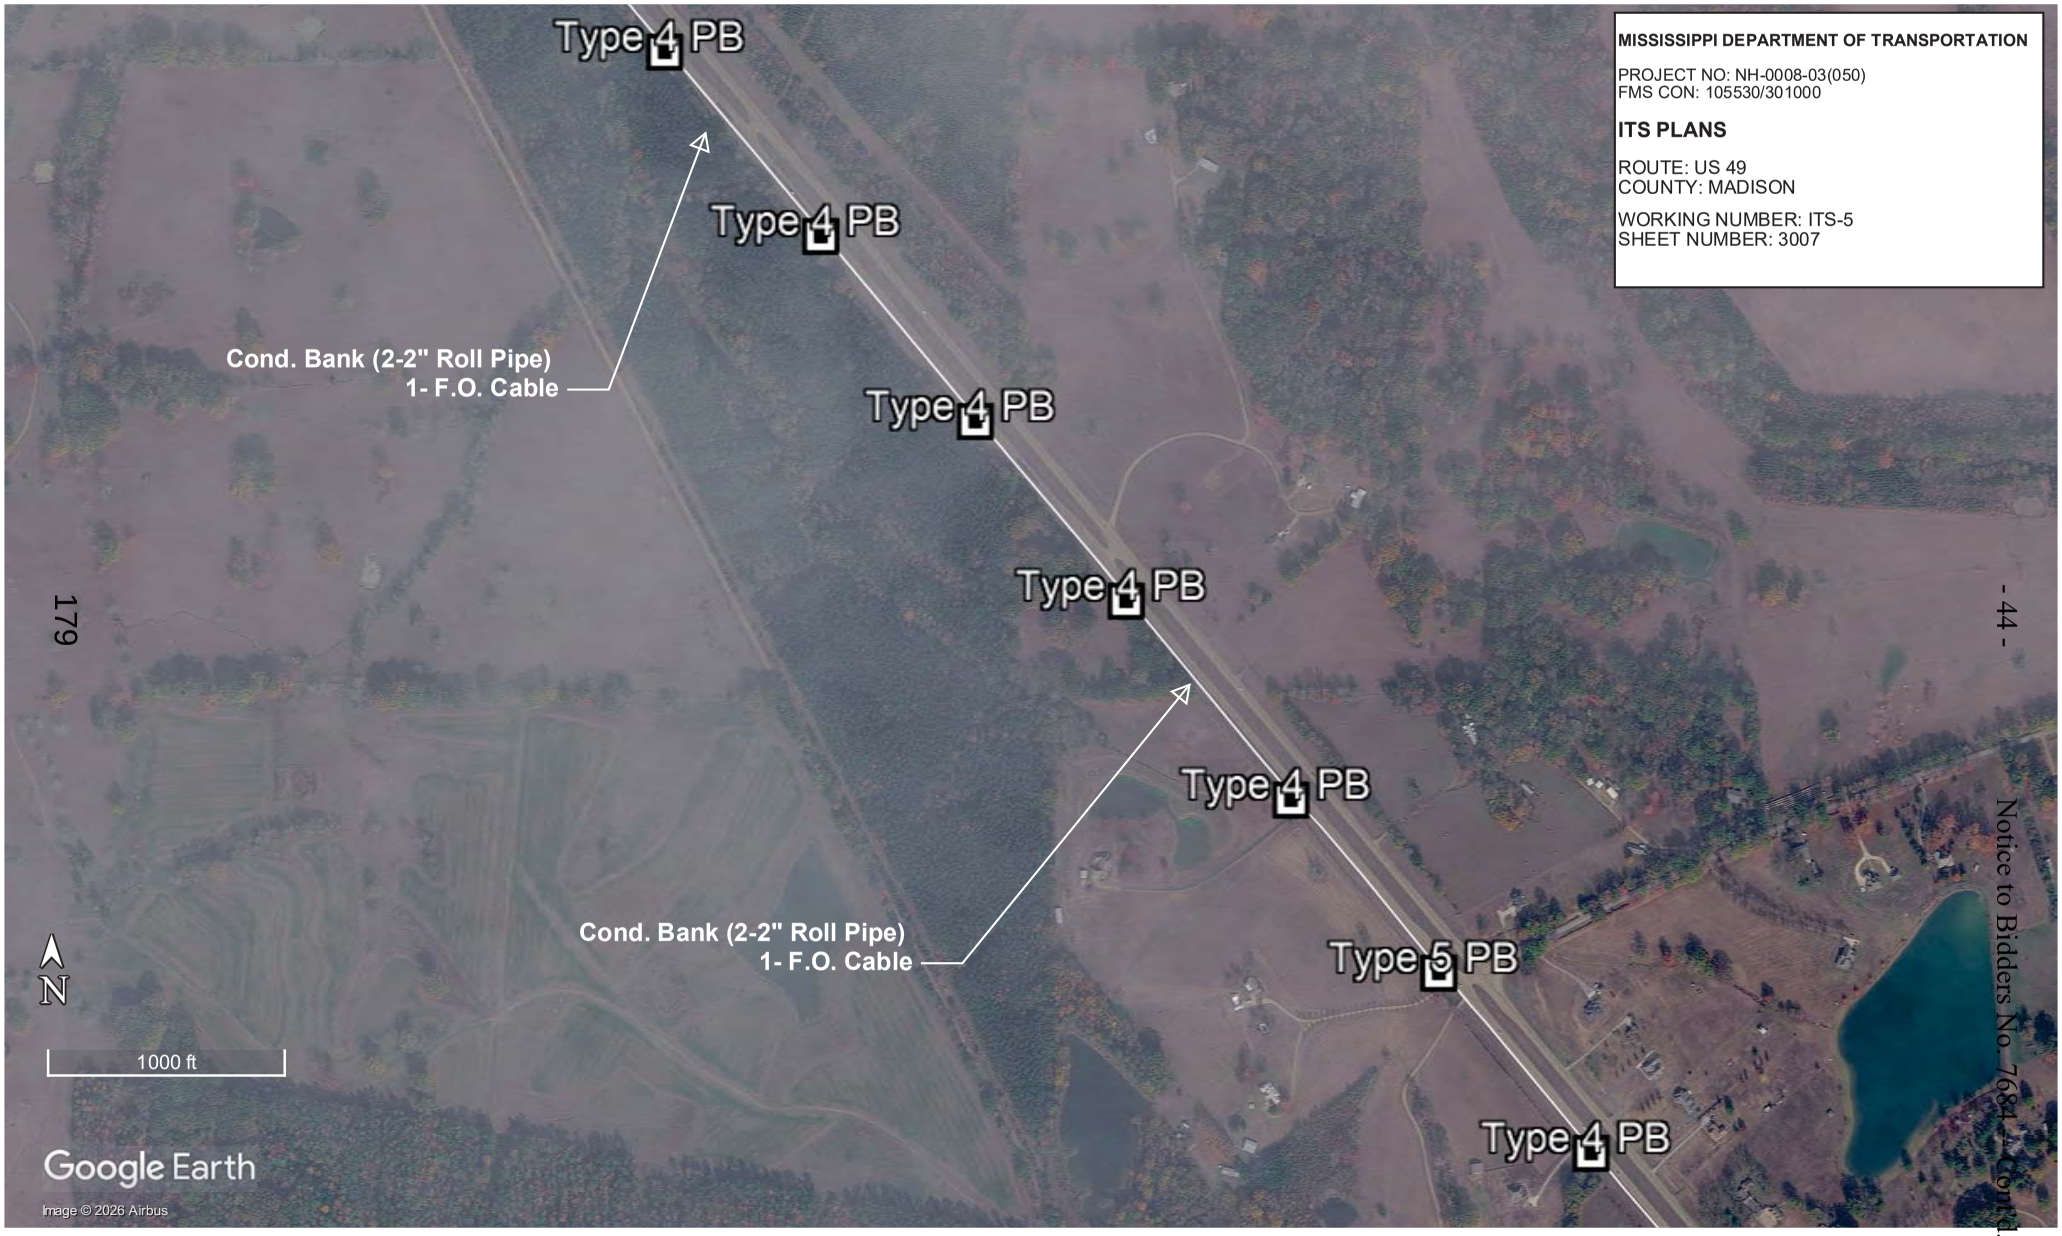
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
PROJECT NO: NH-0008-03(050)
FMS CON: 105530/301000
ITS PLANS
ROUTE: US 49
COUNTY: MADISON
WORKING NUMBER: ITS-5
SHEET NUMBER: 3007
Type 4 PB
Type 4 PB
Cond. Bank (2-2" Roll Pipe)
1- F.O. Cable
Type 4 PB
Type 4 PB
Type 4 PB
Cond. Bank (2-2" Roll Pipe)
1- F.O. Cable
Type 5 PB
Type 4 PB
179
N
1000 ft
Google Earth
Image © 2026 Airbus


MISSISSIPPI DEPARTMENT OF TRANSPORTATION
PROJECT NO: NH-0008-03(050)
FMS CON: 105530/301000
ITS PLANS
ROUTE: US 49
COUNTY: MADISON
WORKING NUMBER: ITS-6
SHEET NUMBER: 3008
Type 4 PB
Type 4 PB
Type 4 PB
Type 4 PB
Type 5 PB
Type 4 PB
Type 4 PB
Cond. Bank (2-2" Roll Pipe)
1- F.O. Cable
Cond. Bank (2-2" Roll Pipe)
1- F.O. Cable
Town Cre
180
45
N
1000 ft
Google Earth
Image © 2026 Airbus
Notice to Bidders No. 7684 -- Cont'd.


MISSISSIPPI DEPARTMENT OF TRANSPORTATION
PROJECT NO: NH-0008-03(050)
FMS CON: 105530/301000
ITS PLANS
ROUTE: US 49
COUNTY: MADISON
WORKING NUMBER: ITS-7
SHEET NUMBER: 3009
Type 4 PB
Cond. Bank (2-2" Roll Pipe)
1- F.O. Cable
Type 4 PB
Type 4 PB
181
N
700 ft
Google Earth
Image © 2026 Airbus

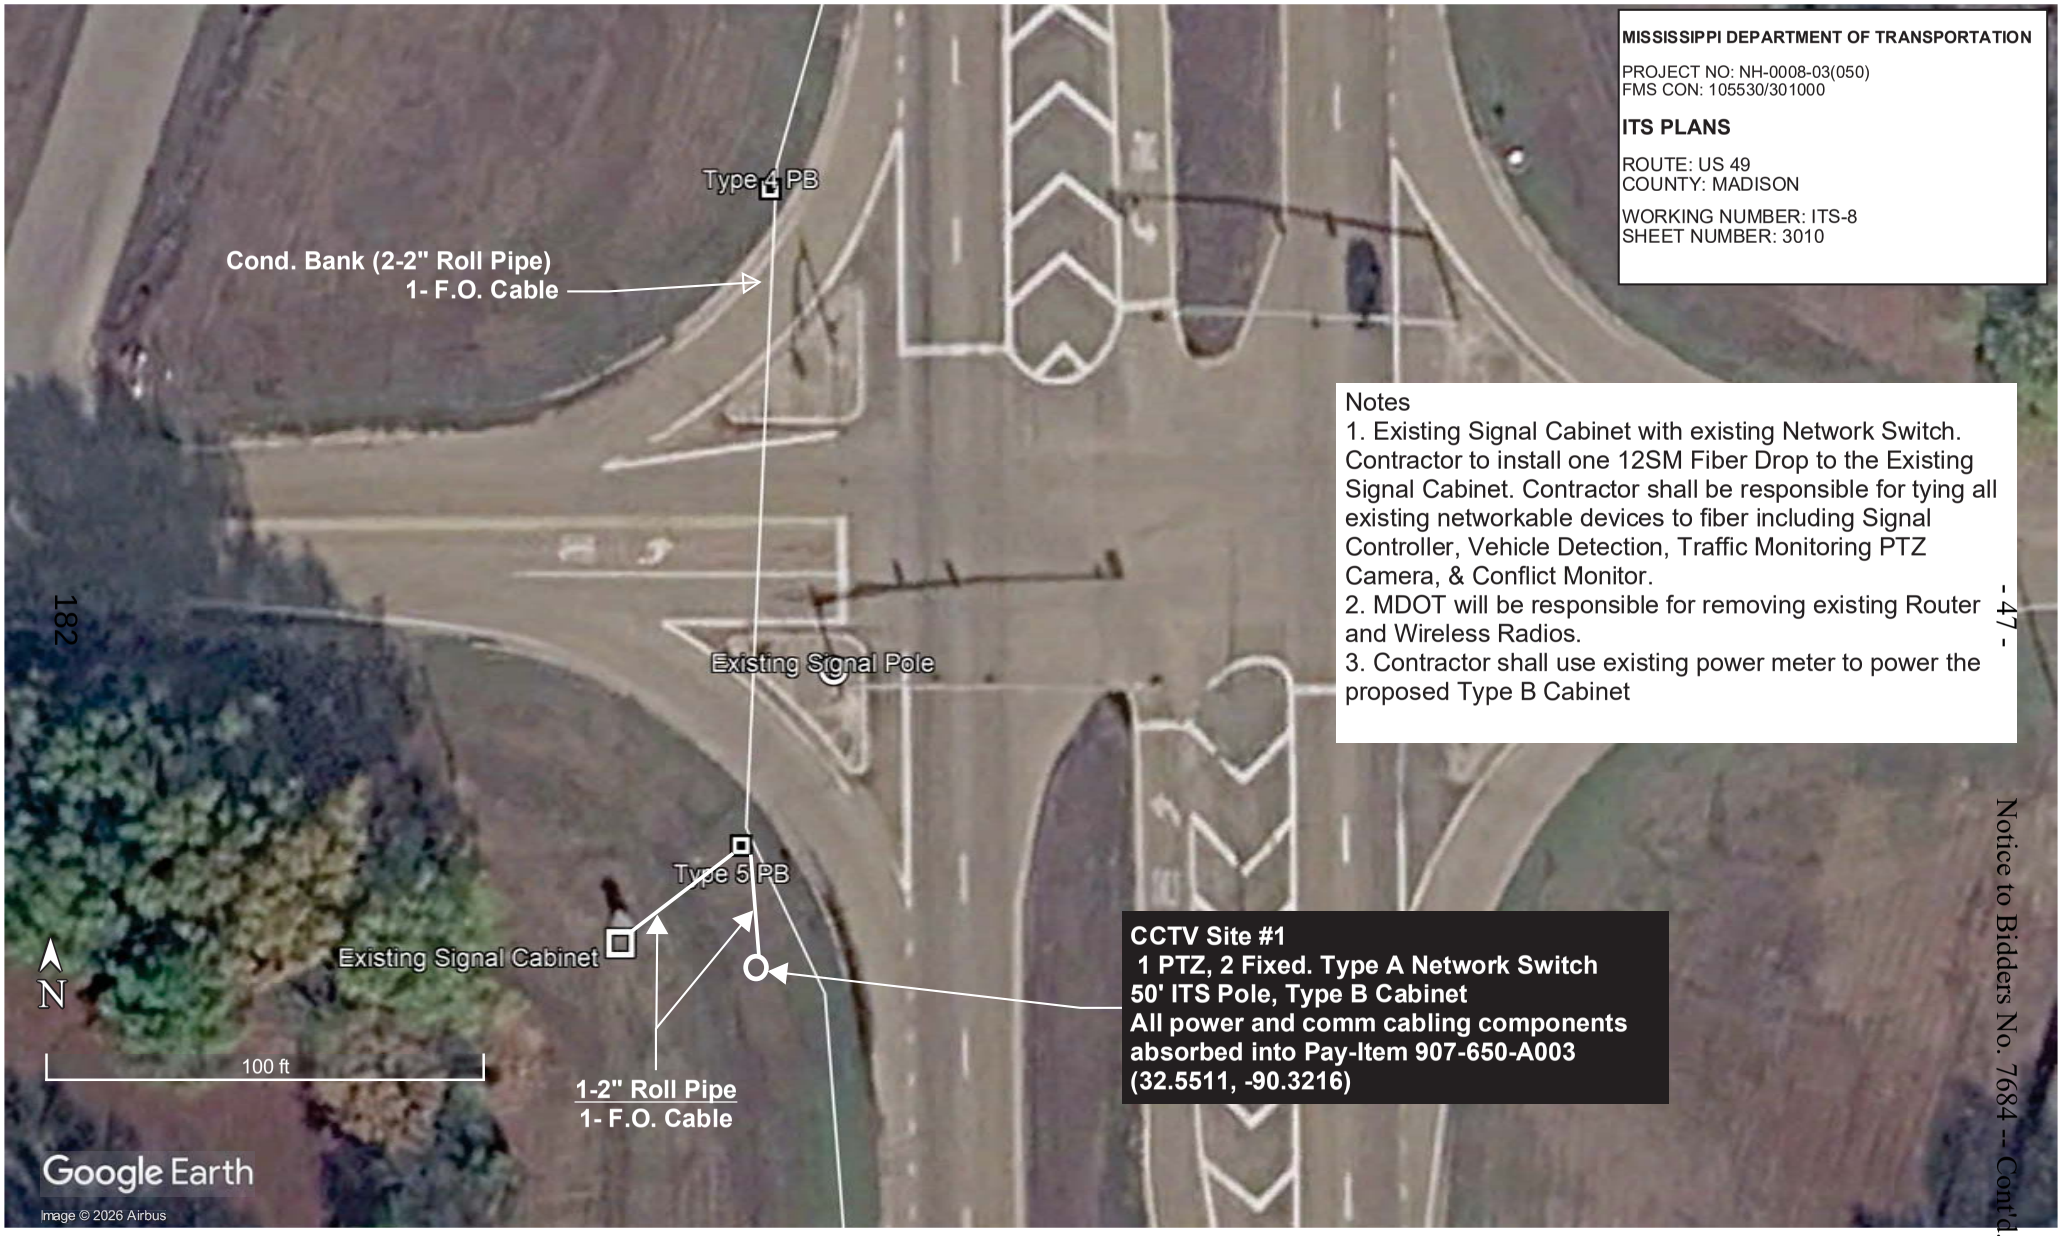
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
PROJECT NO: NH-0008-03(050)
FMS CON: 105530/301000
ITS PLANS
ROUTE: US 49
COUNTY: MADISON
WORKING NUMBER: ITS-8
SHEET NUMBER: 3010
Type 4 PB
Cond. Bank (2-2" Roll Pipe)
1- F.O. Cable
Notes
1. Existing Signal Cabinet with existing Network Switch. Contractor to install one 12SM Fiber Drop to the Existing Signal Cabinet. Contractor shall be responsible for tying all existing networkable devices to fiber including Signal Controller, Vehicle Detection, Traffic Monitoring PTZ Camera, & Conflict Monitor.
2. MDOT will be responsible for removing existing Router and Wireless Radios.
3. Contractor shall use existing power meter to power the proposed Type B Cabinet
Existing Signal Pole
Type 5 PB
Existing Signal Cabinet
CCTV Site #1
1 PTZ, 2 Fixed. Type A Network Switch
50' ITS Pole, Type B Cabinet
All power and comm cabling components absorbed into Pay-Item 907-650-A003
(32.5511, -90.3216)
N
100 ft
1-2" Roll Pipe
1- F.O. Cable
Google Earth
image © 2026 Airbus



MISSISSIPPI DEPARTMENT OF TRANSPORTATION

PROJECT NO: NH-0008-03(050)
FMS CON: 105530/301000

ITS PLANS

ROUTE: US 49
COUNTY: MADISON

WORKING NUMBER: ITS-9
SHEET NUMBER: 3011

Notice to Bidders No. 7684 -- Contd.



MISSISSIPPI DEPARTMENT OF TRANSPORTATION


PROJECT NO: NH-0008-03(050)
FMS CON: 105530/301000

ITS PLANS

ROUTE: US 49
COUNTY: MADISON

WORKING NUMBER: ITS-10
SHEET NUMBER: 3012

Notice to Bidders No. 7684 -- Cont'd.

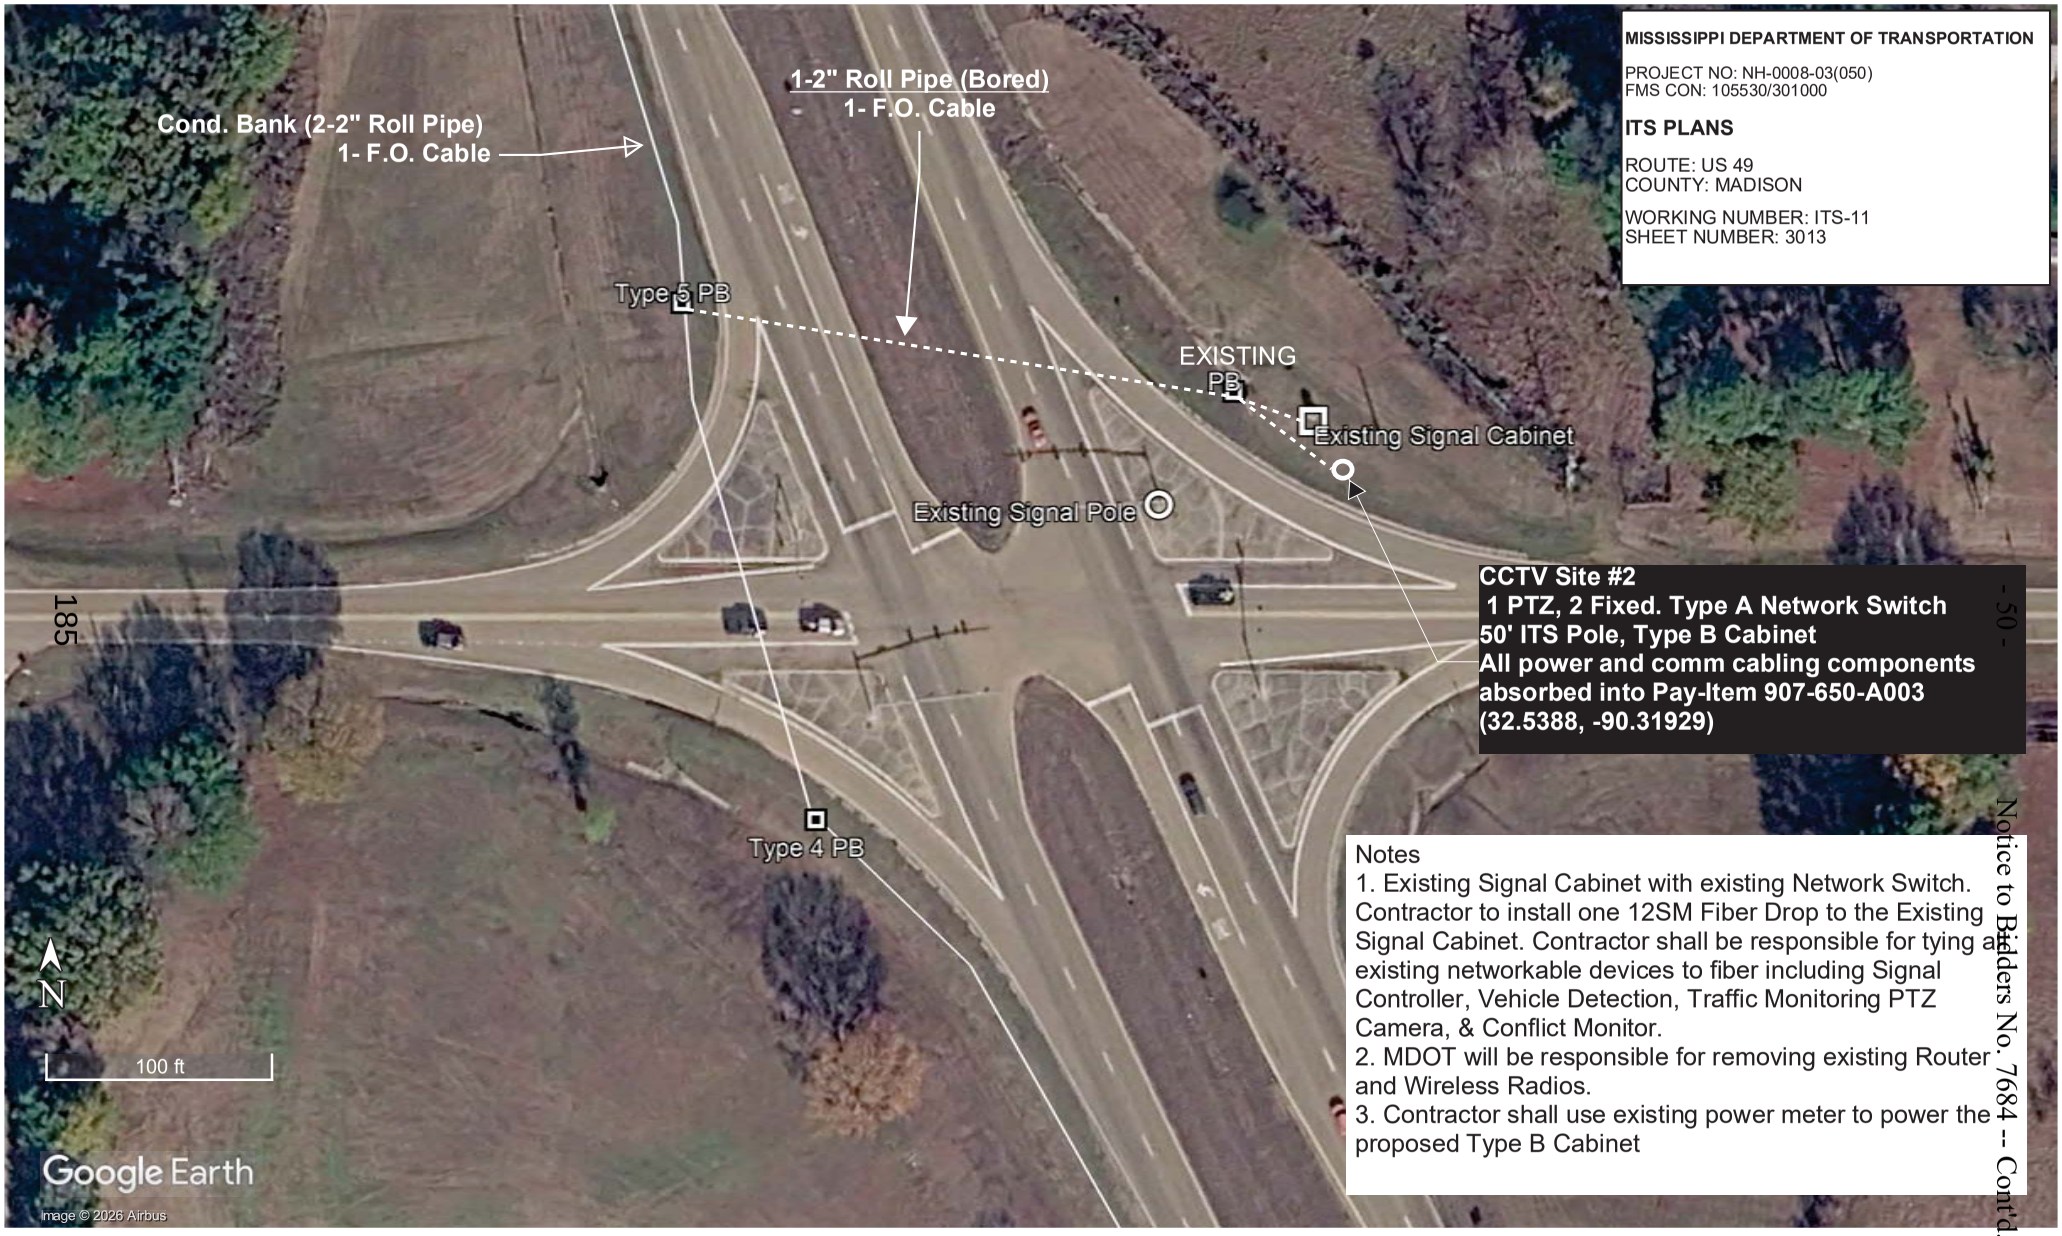

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

PROJECT NO: NH-0008-03(050)
FMS CON: 105530/301000

ITS PLANS

ROUTE: US 49
COUNTY: MADISON

WORKING NUMBER: ITS-11
SHEET NUMBER: 3013

CCTV Site #2
1 PTZ, 2 Fixed. Type A Network Switch
50' ITS Pole, Type B Cabinet
All power and comm cabling components absorbed into Pay-Item 907-650-A003
(32.5388, -90.31929)

Notes
1. Existing Signal Cabinet with existing Network Switch. Contractor to install one 12SM Fiber Drop to the Existing Signal Cabinet. Contractor shall be responsible for tying all existing networkable devices to fiber including Signal Controller, Vehicle Detection, Traffic Monitoring PTZ Camera, & Conflict Monitor.
2. MDOT will be responsible for removing existing Router and Wireless Radios.
3. Contractor shall use existing power meter to power the proposed Type B Cabinet


MISSISSIPPI DEPARTMENT OF TRANSPORTATION
PROJECT NO: NH-0008-03(050)
FMS CON: 105530/301000
ITS PLANS
ROUTE: US 49
COUNTY: MADISON
WORKING NUMBER: ITS-12
SHEET NUMBER: 3014
Type 4 PB
Type 4 PB
Type 4 PB
Type 4 PB
Type 5 PB
Type 4 PB
Cond. Bank (2-2" Roll Pipe)
1- F.O. Cable
Cond. Bank (2-2" Roll Pipe)
1- F.O. Cable
N
1000 ft
Google Earth
Image © 2026 Airbus


MISSISSIPPI DEPARTMENT OF TRANSPORTATION
PROJECT NO: NH-0008-03(050)
FMS CON: 105530/301000
ITS PLANS
ROUTE: US 49
COUNTY: MADISON
WORKING NUMBER: ITS-13
SHEET NUMBER: 3015
Type 4 PB
Cond. Bank (2-2" Roll Pipe)
1- F.O. Cable
Type 4 PB
Type 4 PB
Cond. Bank (2-2" Roll Pipe)
1- F.O. Cable
Type 4 PB
Type 5 PB
Cond. Bank (2-2" Roll Pipe)
1- F.O. Cable
Type 4 PB
N
6000 ft
Google Earth
Image © 2026 Airbus



MISSISSIPPI DEPARTMENT OF TRANSPORTATION


PROJECT NO: NH-0008-03(050)
FMS CON: 105530/301000

ITS PLANS

ROUTE: US 49
COUNTY: MADISON

WORKING NUMBER: ITS-14
SHEET NUMBER: 3016



MISSISSIPPI DEPARTMENT OF TRANSPORTATION
PROJECT NO: NH-0008-03(050)
FMS CON: 105530/301000
ITS PLANS
ROUTE: US 49
COUNTY: MADISON
WORKING NUMBER: ITS-15
SHEET NUMBER: 3017
Type 4 PB
Type 4 PB
Type 4 PB
Type 4 PB
Cond. Bank (2-2" Roll Pipe)
1- F.O. Cable
Cond. Bank (2-2" Roll Pipe)
1- F.O. Cable
Terminate All Fibers at this Type 5 PB
Type 5 PB
189
N
1000 ft
Madison County
Hinds County
Google Earth
Image © 2026 Airbus

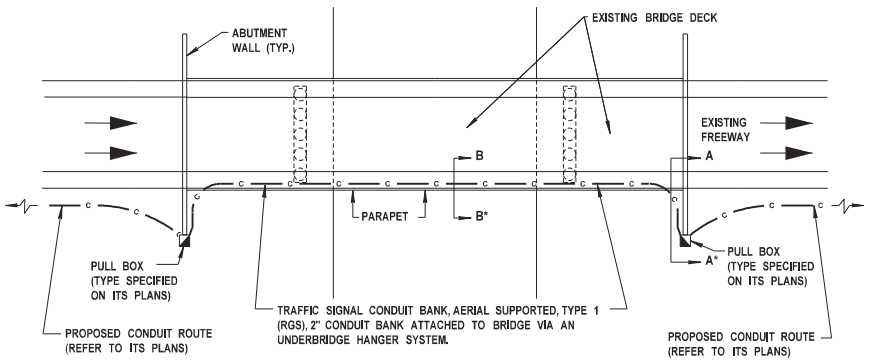

TYPICAL BRIDGE PLAN


NOT TO SCALE

* SEE TYPICAL SECTIONS THIS SHEET

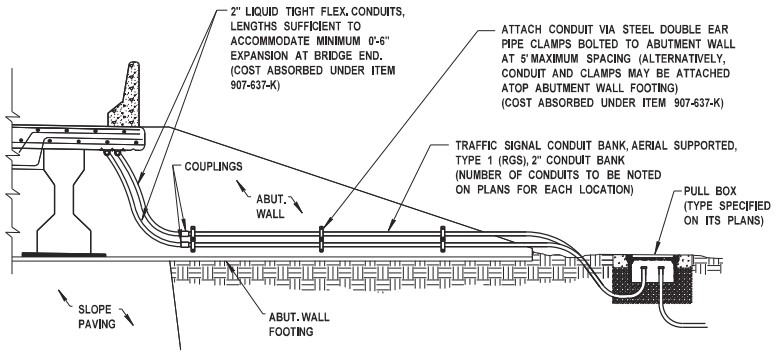

SECTION A-A: TYPICAL CONDUIT ATTACHMENT TO BRIDGE ABUTMENT WALL


NOT TO SCALE

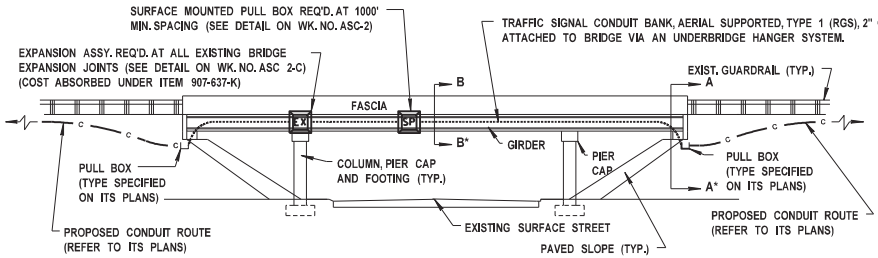

TYPICAL BRIDGE PROFILE

NOT TO SCALE

* SEE TYPICAL SECTIONS THIS SHEET

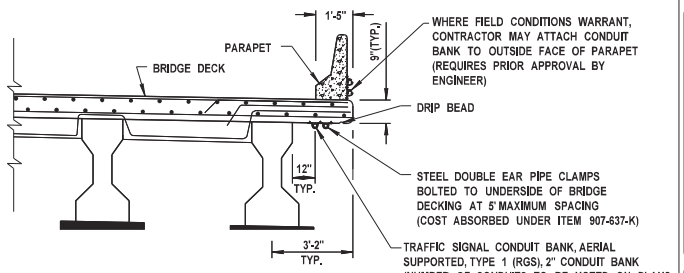

TYPICAL BRIDGE SECTION B-B

NOT TO SCALE

AERIAL SUPPORTED CONDUIT NOTES:


1. REFER TO ITS PLAN SHEETS FOR AERIAL SUPPORTED (i.e., STRUCTURE-ATTACHED) CONDUIT LOCATIONS.
2. THE CONDUIT HANGER SYSTEM IS TO BE SUSPENDED BENEATH THE BRIDGE DECK, CENTERED APPROXIMATELY BETWEEN THE OUTERMOST GIRDER AND BRIDGE PARAPET. ALL CONDUIT, HANGERS, EXPANSIONS, ETC. MUST BE ABOVE THE LOW POINT OF EACH SUPERSTRUCTURE. WHERE BELOW DECK OBSTRUCTIONS OR OTHER FIELD CONDITIONS WARRANT, CONTRACTOR MAY BE ALLOWED TO ATTACH CONDUIT BANK TO OUTER FACE OF BRIDGE PARAPET, PENDING APPROVAL BY THE ENGINEER.
3. NO WELDING OR DRILLING TO STRUCTURAL STEEL WILL BE PERMITTED. ATTACHMENT TO STRUCTURAL STEEL SHALL BE MADE BY CLAMPS, STRAPS, ETC.
4. ALL AERIAL SUPPORTED CONDUIT SHALL BE 2" TYPE 1 (RGS) UNLESS OTHERWISE NOTED ON PLANS, EXCEPT FOR SHORT SEGMENTS OF 2" LIQUID TIGHT FLEXIBLE CONDUIT TO BE USED AT BRIDGE ABUTMENTS, EXISTING BRIDGE EXPANSION JOINTS, AND AS INDICATED IN THE PLANS.
5. IN ALL CASES, THE CONDUIT SUPPORT SPACING SHALL BE A MAXIMUM OF FIVE (5) FEET.
6. CONDUIT SHALL NOT BE INSTALLED IN A MANNER WHICH OBSTRUCTS EXISTING BRIDGE DECK DRAINS.
7. CORE DRILLING OF EXISTING BRIDGE ABUTMENTS WILL NOT BE ALLOWED, UNLESS SPECIFICALLY REVIEWED AND APPROVED BY THE MDOT BRIDGE DIVISION.

DESIGNED BY:
DETAILED BY:
CHECKED BY:
DATE:
FMS CON: /
PROJECT NO.: - 55 -
COUNTY:
AERIAL SUPPORTED CONDUIT -- Continued
SHEET ID ASC-TC
SHEET NO. 3018


Notice to Bidders: Plan Sheet No. 190

190 PLAN SHEET

12/3/2024 11:51:14 AM ITS Standard Drawings ORD Format.dgn



ELECTRICAL PULL BOX

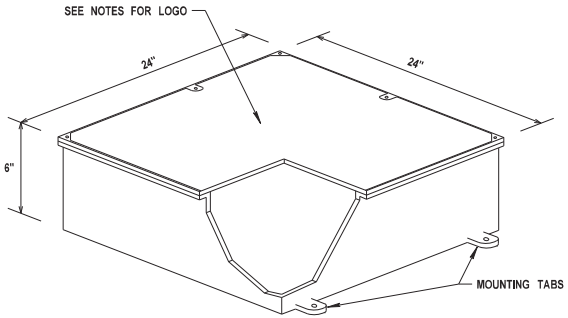

COMMUNICATION PULL BOX

TYPICAL SURFACE MOUNTED PULL BOX ASSEMBLY


NOT TO SCALE

SHOWN AS

SP

NOTES FOR SURFACE MOUNTED PULL BOX:

1. PULL BOX SHALL BE UL RATED TYPE 4X ALUMINUM.
2. ELECTRICAL POWER PULL BOX LIDS SHALL BE LABELED "MDOT ITS ELECTRIC".
3. COMM. PULL BOX LIDS SHALL BE LABELED "MDOT ITS COMMUNICATIONS".
4. DIMENSIONS ARE MINIMUMS.
5. MAXIMUM SPACING BETWEEN PULL BOXES SHALL BE 1000' FOR COMMUNICATION BOXES AND 400' FOR ELECTRICAL BOXES. CONTRACTOR MAY, AT HIS DISCRETION, FURNISH AND INSTALL ADDITIONAL PULL BOXES SHOULD HE DEEM THEM NECESSARY TO PROVIDE A COMPLETE AERIAL CABLE/CONDUIT INSTALLATION.
6. COST OF ALL SURFACE MOUNTED PULL BOXES SHALL BE ABSORBED UNDER ITEM NO. 907-637-K, AERIAL SUPPORTED CONDUIT BANK.

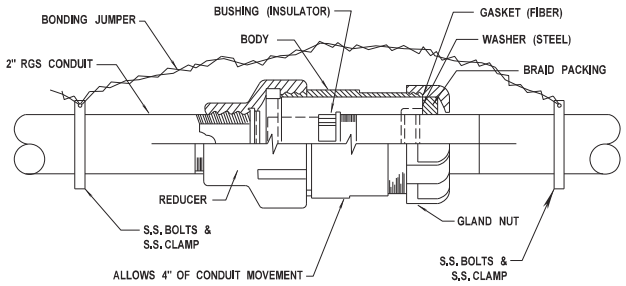

TYPICAL AERIAL CONDUIT EXPANSION ASSEMBLY

NOT TO SCALE

SHOWN AS (IF SHOWN)

EX

NOTES FOR EXPANSION ASSEMBLY:

1. THE DETAIL ABOVE IS TO SERVE AS A GUIDE ONLY. CONTRACTOR SHALL COORDINATE INSTALLATION OF EXPANSION ASSEMBLIES WITH THE MDOT BRIDGE DIVISION TO ENSURE THAT ANTICIPATED BRIDGE EXPANSION IS ADEQUATELY ACCOMMODATED AT EACH JOINT.
2. NO PORTION OF EXPANSION ASSEMBLY SHALL HANG BELOW BRIDGE SUPERSTRUCTURE.
3. COST OF EXPANSION ASSEMBLIES SHALL BE ABSORBED UNDER ITEM NO. 907-637-K, AERIAL SUPPORTED CONDUIT BANK.
4. EXPANSION ASSEMBLIES SHALL BE REQUIRED AT 125' MAX. SPACING AND AT ALL EXISTING BRIDGE EXPANSION JOINTS.

DEPARTMENT OF TRANSPORTATION STATE OF MISSISSIPPI

MDOT MISSISSIPPI DEPARTMENT OF TRANSPORTATION

DESIGNED BY:
DETAILED BY:
CHECKED BY:
DATE:

FMS CON: /
PROJECT NO.: - 56 -
COUNTY:

-AERIAL SUPPORTED CONDUIT-
TYPE 1 (RGS) CONDUIT
SURFACE MOUNTED PULL BOX
AND EXPANSION DETAILS
(FIBER AND POWER)

SHEET ID
ASC-2C


SHEET NO.
3019

Notice to Contractors -- Contract No. 184

191

PLAN SHEET

12/3/2024 11:51:16 AM ITS Standard Drawings ORD Format.dgn

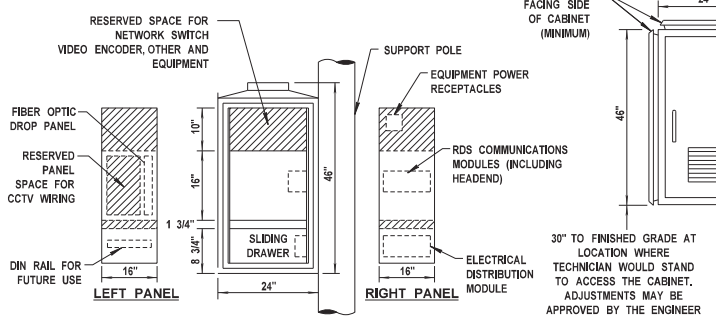


TYPE "B" FIELD CABINET LAYOUT

NOT TO SCALE

NOTES:

1. ALL DIMENSIONS ARE APPROXIMATE.

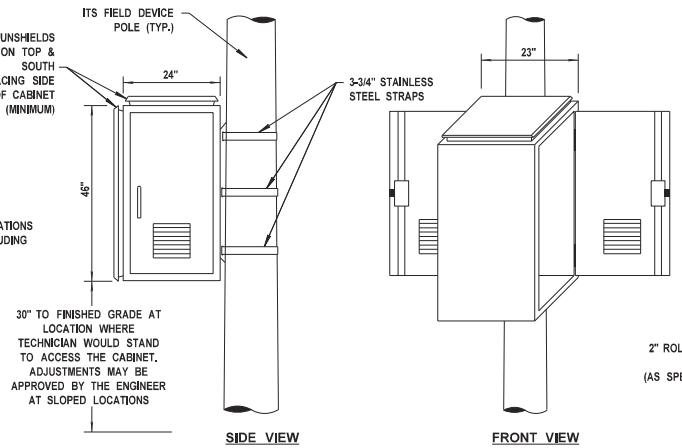



TYPE "B" FIELD CABINET (46" x 24" x 23")

NOT TO SCALE

NOTES:

1. FIELD CABINETS MAY BE ATTACHED TO A NUMBER OF DIFFERENT DEVICES (PROPOSED STRAIN POLES, PROPOSED UTILITY POLES, PROPOSED SPAN SIGN SUPPORTS, EXISTING LIGHT POLES, EXISTING SPAN OR CANTILEVER SIGN SUPPORTS). CABINET MAY ALSO BE INSTALLED AS PAD MOUNTED ON CONCRETE BASE AS SHOWN ON DETAIL THIS SHEET. REFER TO THE ITS PLAN SHEETS AND DETAIL SHEETS FOR SPECIFIC SITE REQUIREMENTS.
2. CABINET DIMENSIONS ARE NOMINAL MINIMUMS. SEE SPECIAL PROVISIONS FOR ADDITIONAL CABINET DETAILS.
3. CABINETS SHALL BE LABELED "MDOT ITS" WITH DEVICE NAME, TYPE, AND NUMBER.
4. STEP REQUIRED FOR NEW INSTALLATIONS (SEE CCTV DETAILS).

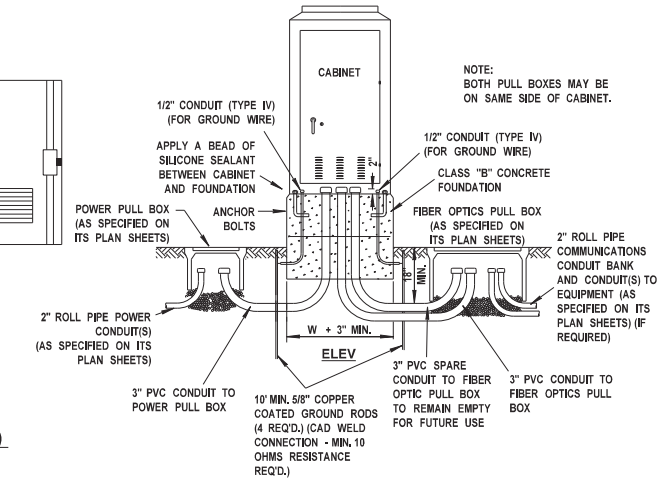

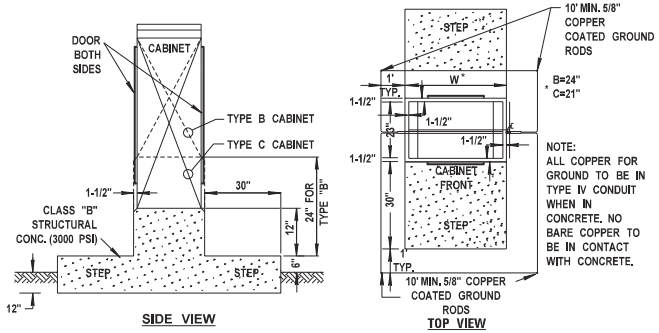


TYPICAL DETAIL OF BASE FOR DMS EQUIPMENT CABINET (TYPE C) - (50" x 21" x 23") AND GROUND MOUNTED TYPE B CABINET (46" x 24" x 23")

NOT TO SCALE

NOTES:

1. DIMENSIONS OF CABINETS TO BE VERIFIED PRIOR TO POURING FOUNDATION. DIMENSIONS SHOWN ABOVE ARE MINIMUMS.
2. ALL CONDUIT BETWEEN PULL BOXES AND THE CABINET FOUNDATION SHALL BE INCLUDED IN THE COST OF OTHER PAY ITEMS AND SHALL NOT BE MEASURED SEPARATELY FOR PAYMENT.

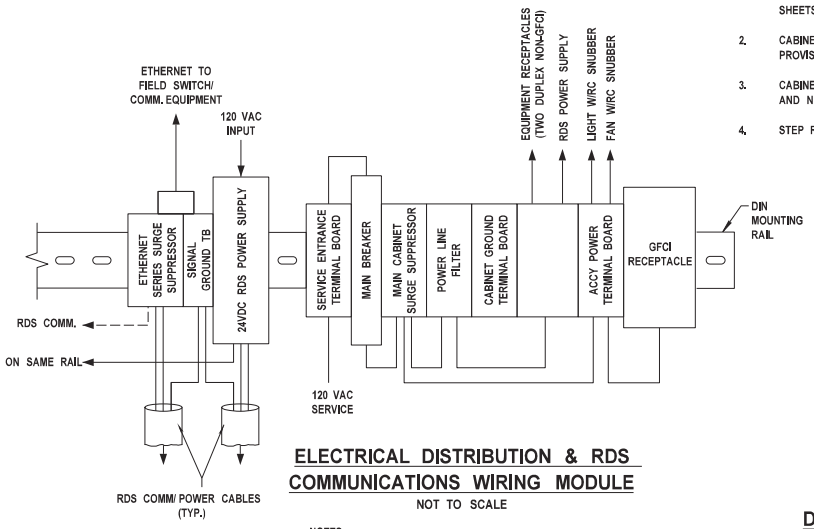


ELECTRICAL DISTRIBUTION & RDS COMMUNICATIONS WIRING MODULE

NOT TO SCALE

NOTES:

1. SOME EQUIPMENT SHOWN MAY NOT BE NECESSARY IF CAMERAS, BDS OR RDS EQUIPMENT IS IP ADDRESSABLE.



DETAIL: PLAN VIEW OF TYPE "B" FIELD CABINET ORIENTATION

NOT TO SCALE

DESIGNED BY:
DETAILED BY:
CHECKED BY:
DATE:

FMS CON: /
PROJECT NO.: - 57 -
COUNTY:


CABINET DETAILS
SHEET ID
CAB-1
SHEET NO.
3020

192

PLAN SHEET


12/3/2024 11:51:16 AM ITS Standard Drawings ORD Format.dgn

Notice to Bidders: Project STATE 7684 -- Contract

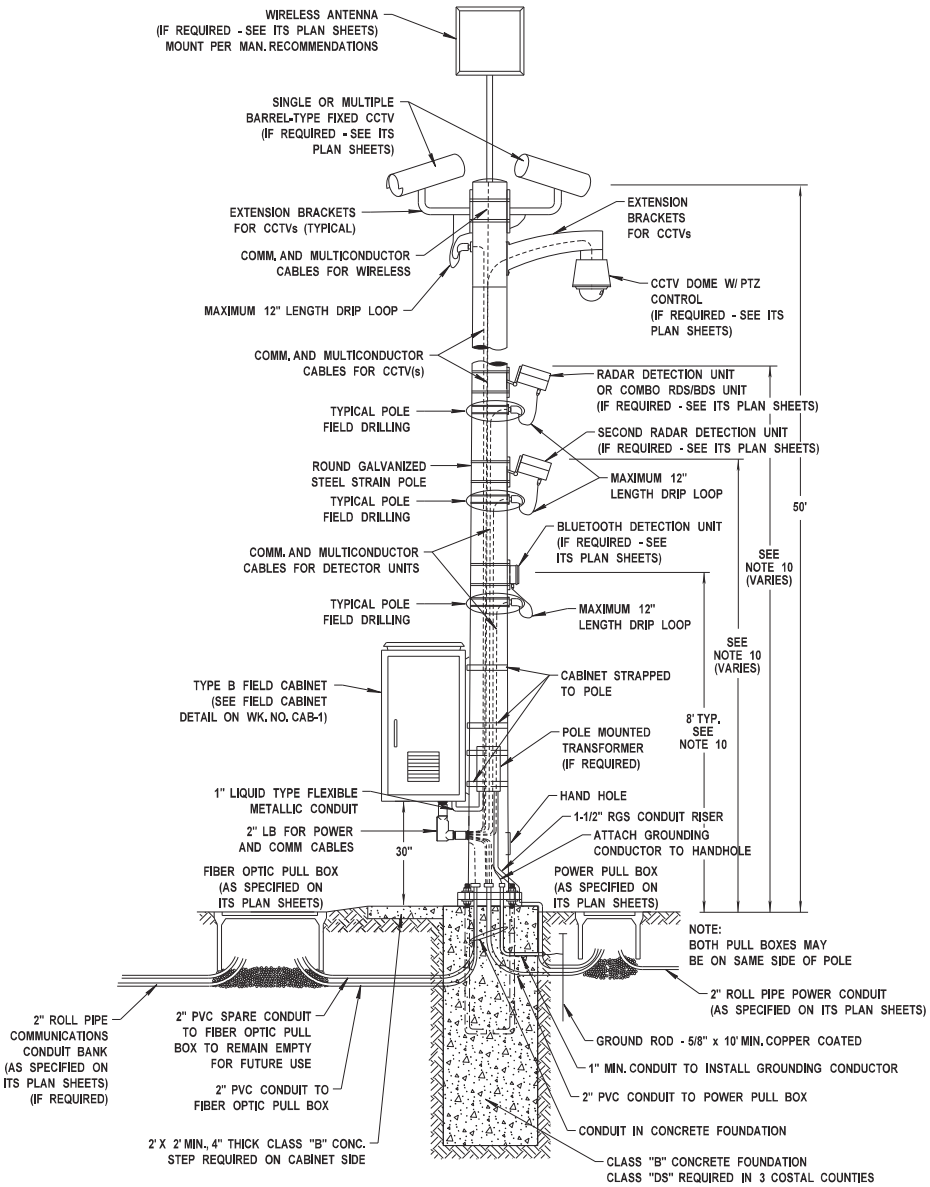

TYPICAL CCTV(s) ON 50' CAMERA POLE WITH DETECTORS AND WIRELESS

NOT TO SCALE

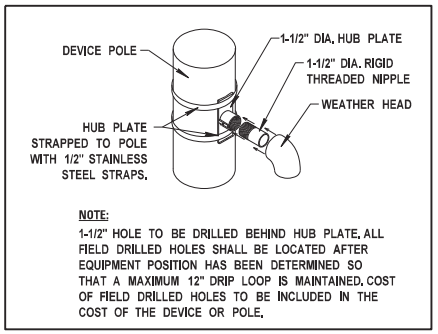

TYPICAL POLE FIELD DRILLING

NOT TO SCALE

NOTES:

1. THE CONTRACTOR SHALL SUBMIT FOUR (4) SETS OF LAYOUT/SHOP DRAWINGS OF THE POLE AND ITS COMPONENTS (INCLUDING THE PLAN OF ATTACHMENT) TO ITS PROJECT ENGINEER FOR REVIEW AND APPROVAL. ALL DRAWINGS SHALL BE STAMPED BY A PROFESSIONAL ENGINEER REGISTERED IN THE STATE OF MISSISSIPPI. ELECTRONIC SUBMITTALS ARE ACCEPTABLE.
2. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE FOUNDATION DESIGN AND SHALL SUBMIT TWO (2) COPIES OF THE DESIGN CALCULATIONS TO ITS PROJECT ENGINEER FOR REVIEW AND APPROVAL. ALL DRAWINGS SHALL BE STAMPED BY A PROFESSIONAL ENGINEER REGISTERED IN THE STATE OF MISSISSIPPI. ELECTRONIC SUBMITTALS ARE ACCEPTABLE.
3. SUPPORTS AND FOUNDATIONS ARE SHOWN FOR ILLUSTRATIVE PURPOSES ONLY. FOUNDATIONS AND ATTACHMENTS SHALL BE DESIGNED BY THE CONTRACTOR AS SPECIFIED ABOVE AND STAMPED BY A PROFESSIONAL ENGINEER REGISTERED IN THE STATE OF MISSISSIPPI. SEE SPECIAL PROVISIONS AND STANDARD SPECIFICATIONS AND DRAWINGS FOR FURTHER INFORMATION.
4. ALL EQUIPMENT CONNECTIONS SHALL BE MADE ACCORDING TO MANUFACTURER'S RECOMMENDATIONS AND APPROVED BY THE ENGINEER.
5. THE TOP OF THE FOUNDATION SHALL NOT PROJECT OVER 4" MAX. ABOVE THE GROUND LINE.
6. ALL CONDUIT BETWEEN PULL BOXES AND THE POLE FOUNDATION SHALL BE INCLUDED IN THE COST OF OTHER PAY ITEMS AND SHALL NOT BE MEASURED SEPARATELY FOR PAYMENT.
7. COMMUNICATION / POWER CABLES USED FOR CCTV, RDS, AND BDS FROM NETWORK SWITCH TO EQUIPMENT SHALL BE COST ABSORBED.
8. ALL GROUNDING CABLES AND EQUIPMENT SHALL BE COST ABSORBED. REFER TO SECTION 722.09 FOR MORE INFORMATION.
9. BOND RGS CONDUIT TO POLE GROUND ROD.
10. DETECTION UNIT MOUNTING HEIGHTS SHALL BE PER MANUFACTURERS RECOMMENDATIONS BASED ON SITE CONDITIONS, OFFSET, AND NUMBER OF LANES MONITORED.


DESIGNED BY:
DETAILED BY:
CHECKED BY:
DATE:
FMS CON: /
PROJECT NO.: - 58 -
COUNTY:

CCTV DETAILS:
CAMERA POLE WITH DETECTORS AND WIRELESS MOUNTING DETAILS


SHEET ID
CCTV1

SHEET NO.
3021


Contract ID: 180058 NHPP-0001-00(058)

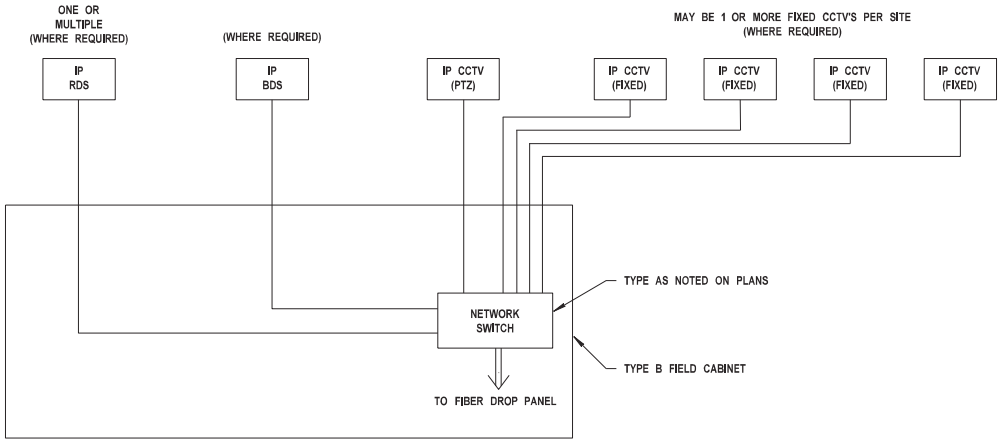


TYPICAL CCTV, BDS, AND RDS SITE - FIBER

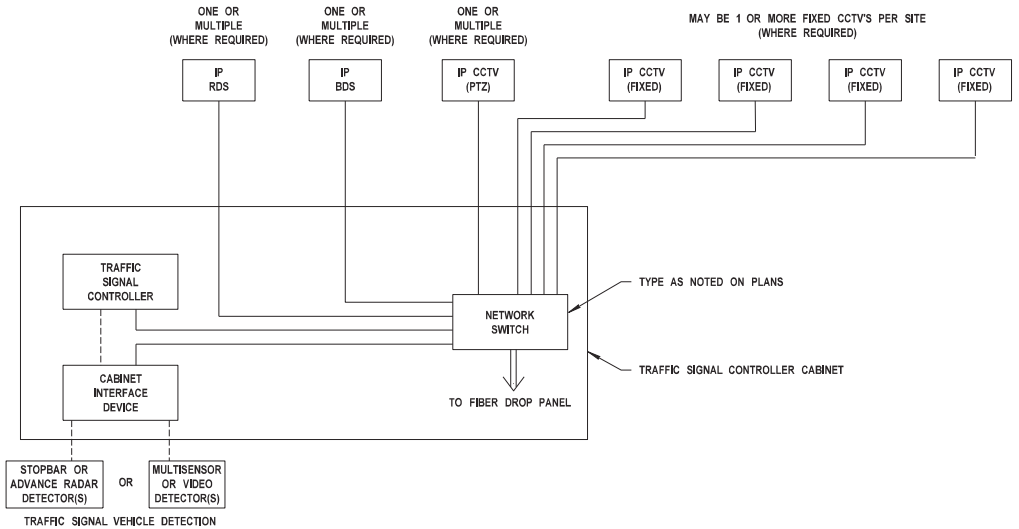

TYPICAL TRAFFIC SIGNAL WITH NETWORKABLE DETECTION AND CCTV, BDS, AND / OR RDS SITE - FIBER

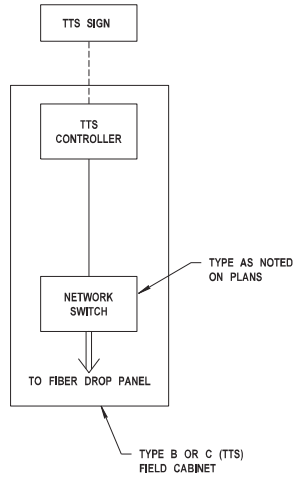

TYPICAL TTS SITE



TYPICAL DMS SITE

LEGEND

----- MFG. SPECIFIED DATA CABLE

——— CAT 6 ETHERNET CABLE / COMPOSITE TYPE CABLE

194

PLAN SHEET

12/3/2024 11:51:26 AM ITS Standard Drawings ORD Format.dgn


DESIGNED BY:
DETAILED BY:
CHECKED BY:
DATE:

FMS CON: /
PROJECT NO.: - 59 -
COUNTY:


ITS EQUIPMENT DETAILS

SHEET ID
SHEET NO. 3022

Notice to Bidders dated 7/8/24 -- Contract ID: 240184



PLAN VIEW

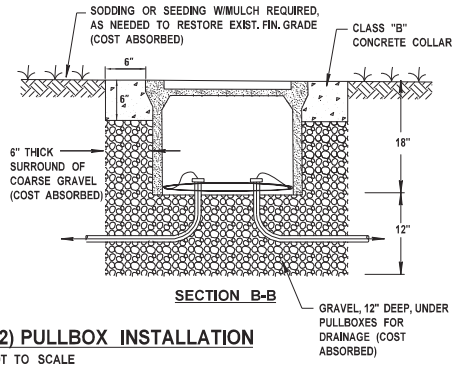

SECTION B-B

ELECTRICAL (TYPE 2) PULLBOX INSTALLATION

NOT TO SCALE


PRECAST CLASS "B" CONCRETE, CAST IRON, COMPOSOLITE, OR APPROVED EQUAL

NOMINAL MINIMUM DIMENSIONS

TYPE (min. nom. dims.)	W	L	D	LOGO
2 (13 in. x 24 in.)	13"	24"	18"	MDOT ITS ELECTRICAL

TYPE 2 PULLBOX NOTES:

1. NOMINAL PULLBOX DIMENSIONS: 25"(L) x 15"(W) x 18"(D)
2. GRAVEL, 12" DEEP, IS REQUIRED UNDER PULLBOXES FOR DRAINAGE (COST ABSORBED).
3. CONCRETE COLLAR, 6" x 6", IS REQUIRED FOR PULLBOXES PLACED IN SOIL (COST ABSORBED).
4. "MDOT ITS ELECTRICAL" LOGO REQUIRED.
5. COVERS SHALL BOLT DOWN.
6. PULL BOXES AND COVERS SHALL BE TIER 22 - 22,500-POUND DESIGN LOAD, 33,750-POUND TEST LOAD.




TRENCHING DETAIL - TYPICAL CONDUIT BANK

NOT TO SCALE

ELECTRIC AND/OR FIBER OPTIC CABLE INSTALLATIONS (# OF CONDUITS AND CABLES AS SHOWN ON PLANS)

CONDUIT INSTALLATION NOTES:


1. IN SOME CASES, CONTRACTOR SHALL HAVE THE OPTION TO INSTALL CONDUIT BY DIRECTIONAL BORING OR PLOWING. SEE WK. NO. GN-ITS FOR ADDITIONAL DETAILS.
2. SEPARATE PULL BOXES SHALL BE PROVIDED FOR POWER SUPPLY AND COMM. CABLES. WHERE SHOWN ON THE PLANS, TYPE 2 PULL BOXES WILL BE PROVIDED FOR POWER SUPPLY CABLES, AND TYPE 4 OR 5 PULL BOXES WILL BE PROVIDED FOR COMM. CABLES. POWER AND COMM. CABLES SHALL NOT BE INSTALLED WITHIN THE SAME PULL BOX UNLESS OTHERWISE SPECIFICALLY NOTED ON PLANS.
3. ALL CONDUITS TO BE SEALED WITH DUCT PLUG TO PREVENT WATER INTRUSION ONCE CABLE IS INSTALLED. COST TO BE ABSORBED IN CONDUIT PAY ITEMS.

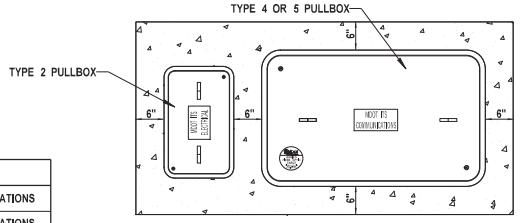

COMBINATION COLLAR FOR TYPE 2 AND 4 OR 5 BOX

NOT TO SCALE

USED WHEN TYPE 2 BOX IS SET ADJACENT TO TYPE 4 OR 5 BOX, MAINTAIN 6" MIN. COLLAR AROUND OUTSIDE OF LARGEST BOX




TRENCHING DETAIL - TYPICAL CONDUIT BANK

NOT TO SCALE

NOMINAL MINIMUM DIMENSIONS


TYPE (min. nom. dims.)	W	L	D	LOGO
4 (24 in. x 36 in.)	24"	36"	24"	MDOT ITS COMMUNICATIONS
5 (30 in. x 48 in.)	30"	48"	24"	MDOT ITS COMMUNICATIONS




SECTION C-C

TYPE 5 FIBER OPTIC PULLBOXES MUST BE USED AT ALL LOCATIONS WHERE TRUNK SPLICING IS REQUIRED IN THE PULLBOX.


TYPE 4 OR TYPE 5 FIBER OPTIC PULLBOXES MAY BE USED WHERE NO TRUNK SPLICING IS REQUIRED (AS SHOWN ON PLANS).



TOP VIEW



FRONT VIEW



FIBER OPTIC (TYPES 4 AND 5) PULLBOX NOTES:

1. NOTCHES SHALL BE PROVIDED FOR REMOVING THE COVER. COVER BOLTS SHALL BE TAMPER-RESISTANT.
2. COVER TO HAVE ROUGHENED TOP SURFACE.
3. LOGO (MDOT ITS COMMUNICATIONS) IS TO BE INSCRIBED ON TOP OF THE COVER.
4. PULL BOXES AND COVERS SHALL BE TIER 22 - 22,500-POUND DESIGN LOAD, 33,750-POUND TEST LOAD.
5. INSTALL STRUTS AND SPLICE CLOSURE INSIDE ALL TYPE 5 FIBER OPTIC PULLBOXES (COST ABSORBED).
6. WHERE PULLBOX IS INSTALLED OVER RUN OF EXISTING CONDUIT, EXISTING CONDUITS SHALL BE CUT AND COUPLED TO NEW LARGE RADIUS (6" MIN.) BENDS AS REQUIRED. (COST ABSORBED).

FIBER OPTIC (TYPE 4 OR 5) PULLBOX INSTALLATION

NOT TO SCALE

PRECAST CLASS "B" CONCRETE, CAST IRON, COMPOSOLITE, OR APPROVED EQUAL

PULLBOX GENERAL NOTES:

1. CONDUIT FOR FIBER OPTIC CABLE REQUIRED TO UTILIZE LARGE RADIUS BENDS (MINIMUM RADIUS 6") NO ELBOW JOINTS ALLOWED.
2. WHEN EXISTING PULLBOXES ARE TO BE REPLACED BY LARGER FIBER OPTIC PULLBOXES, THE COST OF REMOVAL, BACKFILL, SIDEWALK, ETC. TO BE COST ABSORBED.
3. THE COST OF ALL MODIFICATIONS, ADJUSTMENTS, MATERIALS, MOUNTING HARDWARE, ETC. TO BE ABSORBED IN OTHER ITEMS, UNLESS A DIRECT PAY ITEM IS PROVIDED.

MDOT
BURIED FIBER OPTIC CABLE
Call Before You Dig (601) 359-1454 LOCATION 0000

FIBER OPTIC PULLBOX LABEL

NOTES:

1. LABEL PROVIDED BY MDOT ITS DEPARTMENT INSTALLED BY CONTRACTOR ON COVER OF ALL COMMUNICATIONS PULLBOXES.
2. PULL BOX LOCATION LABELS TO BE NUMBERED IN SEQUENTIAL ORDER WITHIN THE PROJECT.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

DESIGNED BY:
DETAILED BY:
CHECKED BY:
DATE:

FMS CON: /
PROJECT NO.: - 60 -
COUNTY:

FIBER OPTIC DETAILS
PULLBOX AND GROUNDING
TRENCHING DETAILS


SHEET ID
FO1
SHEET NO.
3023

Notice to Bidders
NH-7784 -- Contract

195


PLAN SHEET

12/3/2024 11:51:27 AM ITS Standard Drawings ORD Format.dgn




RISER SEALING BUSHING FOR FIBER OPTIC CABLE


NOTE:
TOP OF BUSHING SHALL BE APPROXIMATELY 11" BELOW MESSENGER ATTACHMENT HEIGHT.




FIBER ENTRANCE TO EXISTING STEEL POLES

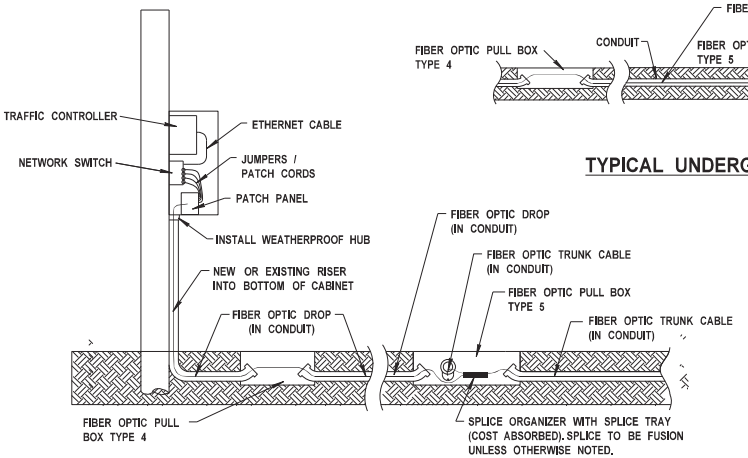


UNDERGROUND ENTRANCE FOR EMBEDDED STEEL, CONCRETE, OR WOOD POLE INTO POLE MOUNTED CABINET (EXTERNAL SPLICE)




TYPICAL UNDERGROUND SPLICE

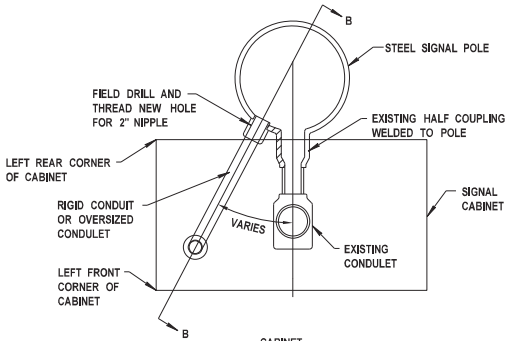




CONDUIT ENTRANCE DETAIL (EXISTING CABINET)

NOTE: TO BE USED ONLY WHEN SPARE CONDUIT IS NOT AVAILABLE.

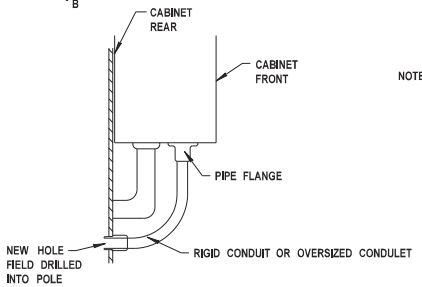


DETAIL OF NEW CONDUIT SWEEP INTO BOTTOM OF POLE MOUNTED CABINET ON STEEL POLE

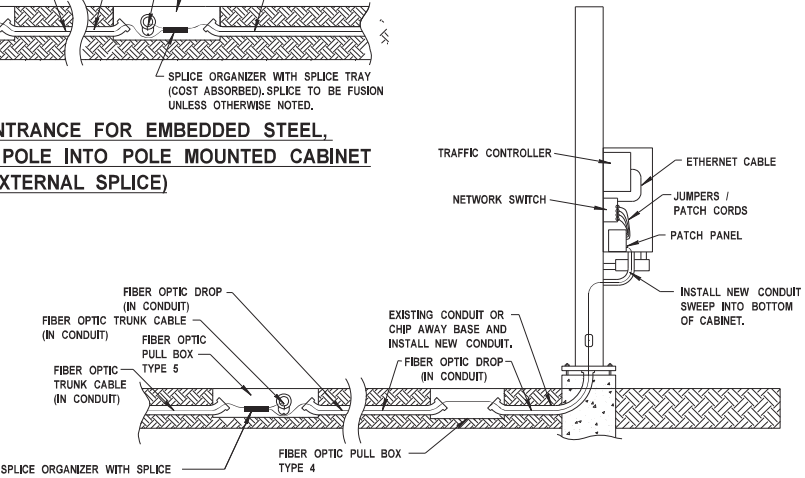

UNDERGROUND ENTRANCE FOR STEEL POLE INTO POLE MOUNTED CABINET (EXTERNAL SPLICE)

NOTE:
ALL MODIFICATIONS, ADJUSTMENTS, MATERIALS, ETC, TO BE COST ABSORBED, UNLESS OTHERWISE NOTED.

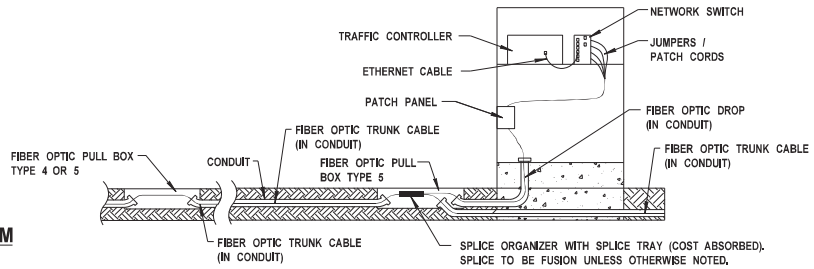

UNDERGROUND ENTRANCE INTO BASE MOUNTED CABINET (EXTERNAL SPLICE)

DESIGNED BY:
DETAILED BY:
CHECKED BY:
DATE:

FMS CON: /
PROJECT NO.: - 61 -
COUNTY:

FIBER OPTIC DETAILS
STATE PROJECT NO. ITS-0084-00(004)

SHEET ID
F8.2


SHEET NO.
3024

196

PLAN SHEET

12/3/2024 11:51:28 AM ITS Standard Drawings ORD Format.dgn

Notice to Bidders -- Continued

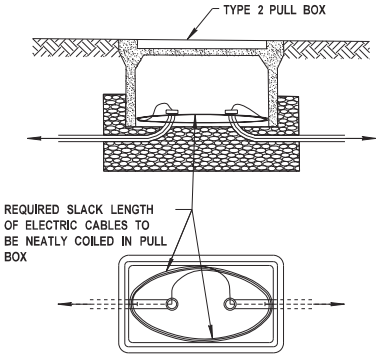

CABLE MANAGEMENT IN ELECTRICAL (TYPE 2) PULL BOX


NOT TO SCALE

TYPICAL CABLE COIL INSTALLATION GUIDE


(FEET OF COIL LENGTH PER ENTERING CABLE)

CABLE TYPE	TYPE 2 PULL BOX	TYPE 4 PULL BOX ON TRUNK	TYPE 4 PULL BOX ON DROP	TYPE 5 PULL BOX
FIBER OPTIC CABLES (TRUNK)		25		200
FIBER OPTIC CABLES (DROP)			10	100
ELECTRICAL SERVICE CONDUCTORS	10			
VDS LEAD-IN CABLE			10	
RDS COMM CABLE		20	20	20
DMS COMM CABLE			10	

NOTE: SEE SPECIAL PROVISION 907-661 FOR ADDITIONAL INFORMATION

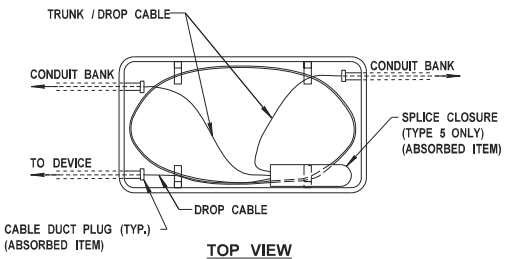

TOP VIEW

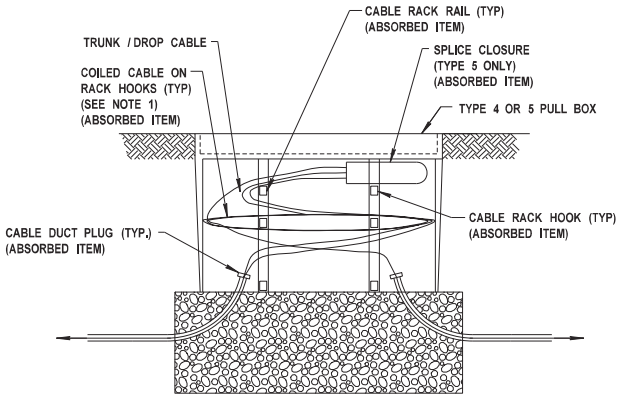

SIDE VIEW

CABLE MANAGEMENT IN FIBER OPTIC (TYPE 4 OR 5) PULL BOX

NOT TO SCALE

NOTES:

1. FIBER TRUNK AND DROP CABLE SHALL BE COILED TOGETHER. EACH RDS COMM CABLE SHALL BE COILED SEPARATELY AND SUPPORTED ON RACK HOOKS.
2. CONDUIT MAY ENTER EITHER SIDE OF THE PULL BOX (RATHER THAN THROUGH BOTTOM) WHERE FIELD CONDITIONS WARRANT.

DESIGNED BY:
DETAILED BY:
CHECKED BY:
DATE:

FMS CON: /
PROJECT NO.: - 62 -
COUNTY:

FIBER OPTIC DETAILS
FIBER OPTIC DETAILS

SHEET ID
F8.1


SHEET NO.
3025

197

PLAN SHEET

12/3/2024 11:51:29 AM ITS Standard Drawings ORD Format.dgn

Notice to Bidders -- Contract ID 240784
ITB Amendment 1

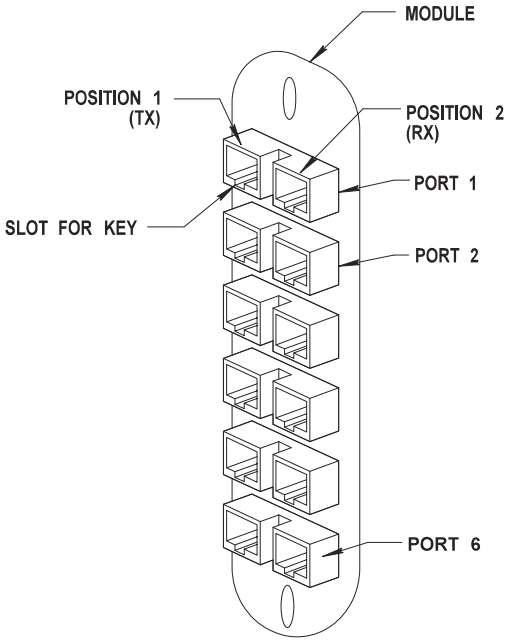


Module Detail

Trunk Cable Termination Cabinet


Cable				Cable Trunk Beginning				Cable Trunk Ending			
Tube	Fiber Color	Fiber Number	Module	FDC Port	Position	Ref	Module	FDC Port	Position	Ref
Blue	Blue	1	A	1	1	TX	A	1	1	RX
	Orange	2	A	1	2	RX	A	1	2	TX
	Green	3	A	2	1	TX	A	2	1	RX
	Brown	4	A	2	2	RX	A	2	2	TX
	Slate	5	A	3	1	TX	A	3	1	RX
	White	6	A	3	2	RX	A	3	2	TX
	Red	7	A	4	1	TX	A	4	1	RX
	Black	8	A	4	2	RX	A	4	2	TX
	Yellow	9	A	5	1	TX	A	5	1	RX
	Violet	10	A	5	2	RX	A	5	2	TX
	Rose	11	A	6	1	TX	A	6	1	RX
	Aqua	12	A	6	2	RX	A	6	2	TX
Orange	Blue	13	B	1	1	TX	B	1	1	RX
	Orange	14	B	1	2	RX	B	1	2	TX
	Green	15	B	2	1	TX	B	2	1	RX
	Brown	16	B	2	2	RX	B	2	2	TX
	Slate	17	B	3	1	TX	B	3	1	RX
	White	18	B	3	2	RX	B	3	2	TX
	Red	19	B	4	1	TX	B	4	1	RX
	Black	20	B	4	2	RX	B	4	2	TX
	Yellow	21	B	5	1	TX	B	5	1	RX
	Violet	22	B	5	2	RX	B	5	2	TX
	Rose	23	B	6	1	TX	B	6	1	RX
	Aqua	24	B	6	2	RX	B	6	2	TX
Green	Blue	25	C	1	1	TX	C	1	1	RX
	Orange	26	C	1	2	RX	C	1	2	TX
	Green	27	C	2	1	TX	C	2	1	RX
	Brown	28	C	2	2	RX	C	2	2	TX
	Slate	29	C	3	1	TX	C	3	1	RX
	White	30	C	3	2	RX	C	3	2	TX
	Red	31	C	4	1	TX	C	4	1	RX
	Black	32	C	4	2	RX	C	4	2	TX
	Yellow	33	C	5	1	TX	C	5	1	RX
	Violet	34	C	5	2	RX	C	5	2	TX
	Rose	35	C	6	1	TX	C	6	1	RX
	Aqua	36	C	6	2	RX	C	6	2	TX

Trunk Cable Termination Cabinet

Cable				Cable Trunk Beginning				Cable Trunk Ending			
Tube	Fiber Color	Fiber Number	Module	FDC Port	Position	Ref	Module	FDC Port	Position	Ref
Brown	Blue	37	D	1	1	TX	D	1	1	RX
	Orange	38	D	1	2	RX	D	1	2	TX
	Green	39	D	2	1	TX	D	2	1	RX
	Brown	40	D	2	2	RX	D	2	2	TX
	Slate	41	D	3	1	TX	D	3	1	RX
	White	42	D	3	2	RX	D	3	2	TX
	Red	43	D	4	1	TX	D	4	1	RX
	Black	44	D	4	2	RX	D	4	2	TX
	Yellow	45	D	5	1	TX	D	5	1	RX
	Violet	46	D	5	2	RX	D	5	2	TX
	Rose	47	D	6	1	TX	D	6	1	RX
	Aqua	48	D	6	2	RX	D	6	2	TX
Slate	Blue	49	E	1	1	TX	E	1	1	RX
	Orange	50	E	1	2	RX	E	1	2	TX
	Green	51	E	2	1	TX	E	2	1	RX
	Brown	52	E	2	2	RX	E	2	2	TX
	Slate	53	E	3	1	TX	E	3	1	RX
	White	54	E	3	2	RX	E	3	2	TX
	Red	55	E	4	1	TX	E	4	1	RX
	Black	56	E	4	2	RX	E	4	2	TX
	Yellow	57	E	5	1	TX	E	5	1	RX
	Violet	58	E	5	2	RX	E	5	2	TX
	Rose	59	E	6	1	TX	E	6	1	RX
	Aqua	60	E	6	2	RX	E	6	2	TX
White	Blue	61	F	1	1	TX	F	1	1	RX
	Orange	62	F	1	2	RX	F	1	2	TX
	Green	63	F	2	1	TX	F	2	1	RX
	Brown	64	F	2	2	RX	F	2	2	TX
	Slate	65	F	3	1	TX	F	3	1	RX
	White	66	F	3	2	RX	F	3	2	TX
	Red	67	F	4	1	TX	F	4	1	RX
	Black	68	F	4	2	RX	F	4	2	TX
	Yellow	69	F	5	1	TX	F	5	1	RX
	Violet	70	F	5	2	RX	F	5	2	TX
	Rose	71	F	6	1	TX	F	6	1	RX
	Aqua	72	F	6	2	RX	F	6	2	TX

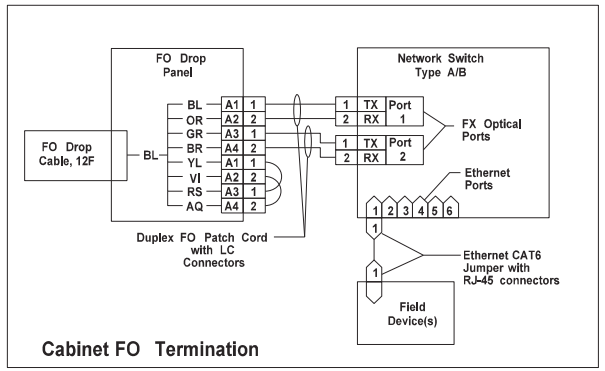


Cabinet FO Termination

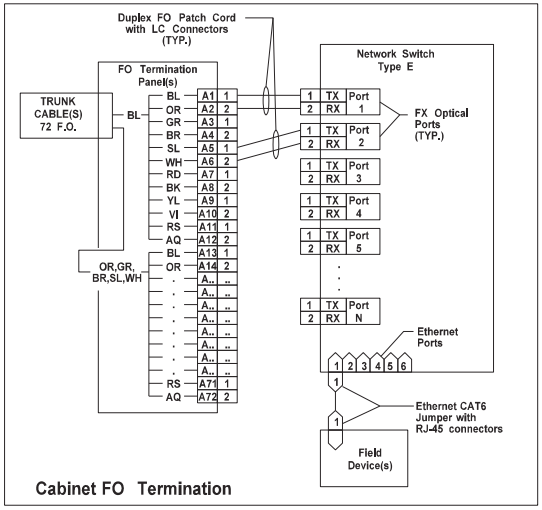

Cabinet FO Termination

Note: These connections are examples. See NTB for more detail.

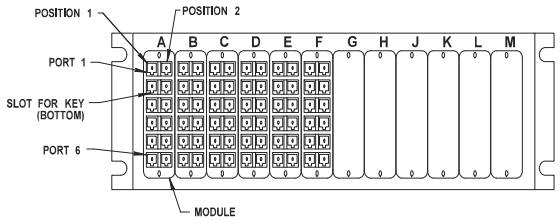

FO Termination Cabinet (Vertical Connector Module)

Notice to Bidders

FIBER OPTIC DETAILS

STATE PROJECT NO. H.0784 -- 00(

SHEET ID FO-1

SHEET NO. 3026

DESIGNED BY:

DETAILED BY:

CHECKED BY:

DATE:

FMS CON: /

PROJECT NO.: - 63 -

COUNTY:


MISSISSIPPI DEPARTMENT OF TRANSPORTATION

DEPARTMENT OF TRANSPORTATION STATE OF MISSISSIPPI

198

PLAN SHEET

12/3/2024 11:51:29 AM ITS Standard Drawings ORD Format.dgn

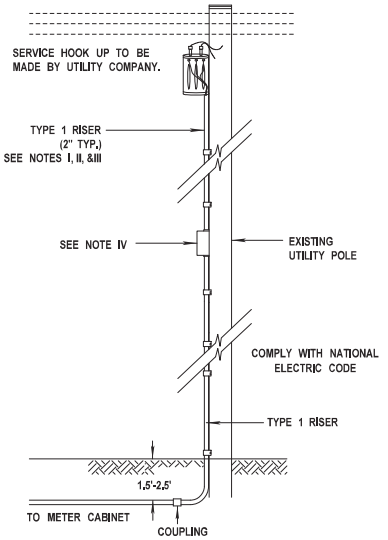

240/120V SINGLE PHASE UNDERGROUND UTILITY DEMARCATION DETAIL

NOT TO SCALE


NOTES FOR UNDERGROUND UTILITY DEMARCATION DETAIL

I. CONDUIT SHALL BE RIGID STEEL CONDUIT (NO EMT). CONDUCTORS AND CONDUIT SHALL BE SIZED AND INSTALLED IN ACCORDANCE WITH NATIONAL ELECTRICAL CODE.

II. COST OF CONDUIT AND CONDUCTORS TO BE ABSORBED IN OTHER ITEMS.


III. INSTALLATION OF CONDUIT AND CONDUCTORS ON EXISTING UTILITY POLE SHALL BE COORDINATED WITH THE PROJECT ENGINEER AND THE LOCAL POWER COMPANY. CONTRACTOR SHALL OBTAIN APPROVAL FROM THE UTILITY COMPANY BEFORE INSTALLATION.

IV. FOR 480 VOLT SERVICE PROVIDE ELECTRIC UTILITY PROVIDER APPROVED LOCKABLE, NON-FUSED DISCONNECT SWITCH ON THE SUPPLY SIDE OF THE METER BASE. IF LOAD DISCONNECT DOES NOT PROVIDE OVERCURRENT PROTECTION PROVIDE SEPARATE OVERCURRENT DEVICE IN ACCORDANCE WITH NATIONAL ELECTRIC CODE ARTICLE 230.91.

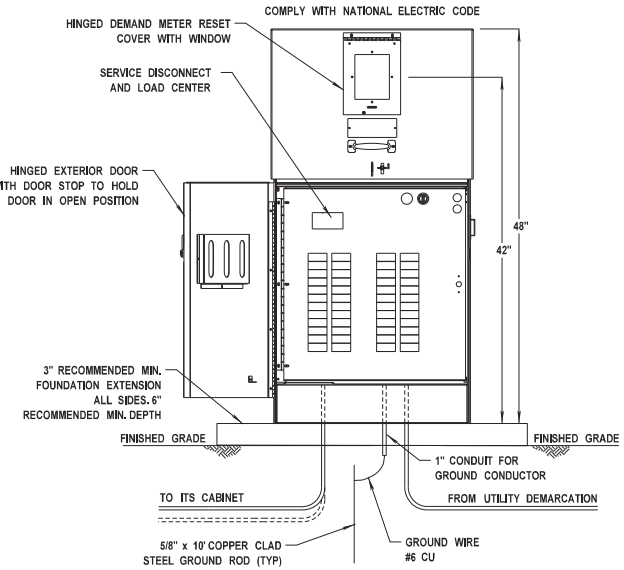

SINGLE PHASE (240/120V AND 480V) METER CABINET DEMARCATION DETAIL

NOT TO SCALE

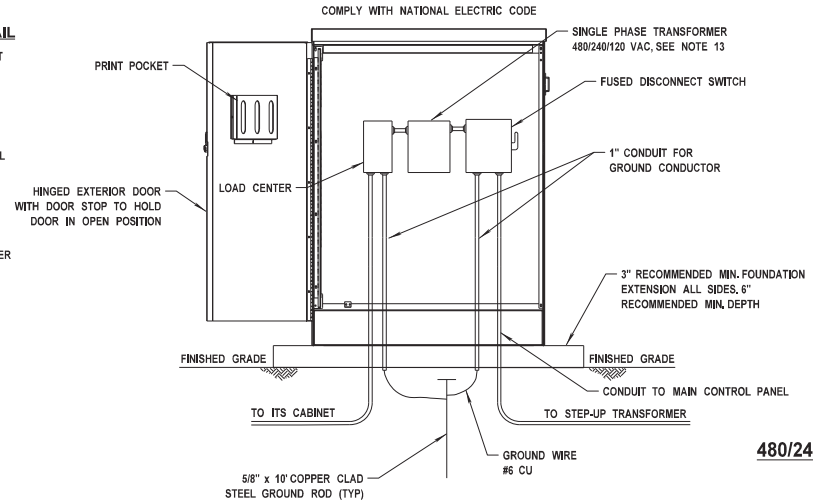

480/240/120V STEP-DOWN TRANSFORMER CABINET DETAIL

NOT TO SCALE

DETAIL NOTES:

(1) LOCATE METER CABINET WITHIN 100 FEET OF UTILITY DEMARCATION.

(2) LOCATE STEP-DOWN TRANSFORMER WITHIN 15 FEET OF ITS CABINET.

(3) REFER TO PLAN SHEETS FOR QUANTITY AND SIZE OF CONDUIT(S). SERVICE MAY BE REQUIRED TO CONNECT MULTIPLE CABINETS.

(4) CONDUIT SHALL BE SCHEDULE 80 GRAY PVC (WITH UV PROTECTION) OR RIGID STEEL CONDUIT (NO EMT). CONDUCTORS AND CONDUIT SHALL BE SIZED AND INSTALLED IN ACCORDANCE WITH NATIONAL ELECTRIC CODE.

(5) MAIN DISCONNECT CIRCUIT BREAKER OR FUSED DISCONNECT SHALL BE SIZED IN ACCORDANCE WITH NATIONAL ELECTRIC CODE AND BE NEMA TYPE 3R WITH PROVISION TO BE LOCKED IN OPEN OR CLOSED POSITION.

(6) LINE SIDE CIRCUIT BREAKER SHORT CIRCUIT RATING SHALL BE EQUAL OR GREATER THAN THE AVAILABLE INTERRUPTIBLE CAPACITY (AIC) AND SHALL BE RATED AS SERVICE ENTRANCE EQUIPMENT.

(7) ANY UNUSED OR OPEN HOLES IN METER BASE, MAIN DISCONNECT OR DISTRIBUTION PANEL SHALL BE PLUGGED WITH WATERTIGHT PLUGS. SELECT SIZE AND INSTALL IN ACCORDANCE WITH THE NATIONAL ELECTRIC CODE.

(8) COST OF POWER FEED, RACK, TRANSFORMER, CONDUIT, CONDUCTORS, DISCONNECT SWITCH, DISCONNECT FUSES, PANELBOARD, CIRCUIT BREAKERS, AND GROUND TO BE ABSORBED IN OTHER ITEMS.

(9) ALL EQUIPMENT TO BE PROVIDED, SIZED AND INSTALLED IN ACCORDANCE WITH NATIONAL ELECTRIC CODE.

(10) ALL CONDUIT CONNECTIONS TO BE RAINTIGHT

(11) PHYSICAL LOCATION OF POLE AND ANY GUYING AND BRACING (IF NEEDED) SHALL BE APPROVED BY THE ELECTRIC UTILITY PROVIDER.

(12) ANY RECEPTACLE SHALL BE A GROUND FAULT INTERRUPTING TYPE.

(13) TRANSFORMER SHALL BE DESIGNED FOR OUTDOOR INSTALLATION. RATING OF TRANSFORMER SHALL BE SIZED ACCORDING TO PLAN DETAILS.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

DESIGNED BY:
DETAILED BY:
CHECKED BY:
DATE:

FMS CON: /
PROJECT NO.: - 64 -
COUNTY:

POWER SERVICE CABINET AND POWER SERVICE METER POLE DETAILS

SHEET ID
POW-3A
SHEET NO.
3027

199

PLAN SHEET

12/3/2024 11:51:50 AM ITS Standard Drawings ORD Format.dgn

FMS CON: 105530/303000

STATE	PROJECT NO.
MISS.	

ITS GENERAL NOTES

1. ALL EXISTING UNDERGROUND UTILITIES ARE NOT SHOWN ON THE DRAWINGS. THE CONTRACTOR SHALL BE RESPONSIBLE FOR MAKING HIS OWN INDEPENDENT INVESTIGATIONS, INCLUDING SUB-SURFACE INVESTIGATIONS AS MAY BE NECESSARY TO LOCATE UTILITIES WITHIN THE PROJECT LIMITS. THE CONTRACTOR SHALL CONTACT MS811 FOR UTILITIES TO BE LOCATED.

2. ITS EQUIPMENT SHOWN ON THESE PLANS ARE IN APPROXIMATE LOCATIONS. ALL EQUIPMENT SHALL BE FIELD LOCATED BY THE CONTRACTOR WITH PROPOSED LOCATIONS APPROVED BY MDOT TO VERIFY PROPER PLACEMENT AND BEST SIGHT DISTANCE FOR EQUIPMENT, ADEQUATE ROADSIDE PROTECTION, ETC. THE CONTRACTOR SHALL STAKE EACH PROPOSED LOCATION A MINIMUM OF FIVE (5) WORKING DAYS PRIOR TO REVIEW BY MDOT. THE COST OF FIELD STAKING ITS EQUIPMENT WILL NOT BE MEASURED FOR SEPARATE PAYMENT AND SHALL BE ABSORBED UNDER OTHER ITEMS OF WORK. THE CONTRACTOR SHALL INSTALL ALL EQUIPMENT, PULLBOXES, AND CONDUIT WITHIN PUBLIC RIGHT-OF-WAY.

3. FIELD LOCATION ADJUSTMENTS MAY BE REQUIRED AT TIME OF EQUIPMENT INSTALLATION DUE TO POTENTIAL CONFLICTS OR OTHER FACTORS THAT WERE UNIDENTIFIABLE DURING THE PROJECT DESIGN PHASE. ANY REQUIRED ADJUSTMENTS SHALL BE APPROVED BY THE PROJECT ENGINEER.

4. ROADWAY EDGE OF ABOVE GROUND ITS EQUIPMENT TO BE LOCATED OUTSIDE OF CLEAR ZONE AREA UNLESS PROTECTED BY CURB, GUARD RAIL OR BRIDGE RAIL, USING AN APPROVED BREAK-AWAY APPARATUS, OR APPROVED BY THE PROJECT ENGINEER.

5. THE COST OF DISPOSING OF ALL UNUSED OR REMOVED MATERIALS (POLES, FIXTURES, SOIL, ETC.) SHALL BE ABSORBED FOR PAYMENT IN OTHER ITEMS.

6. ANY AREAS DISTURBED DURING ITS CONSTRUCTION SHALL BE RESTORED BY THE CONTRACTOR (TO INCLUDE GRASSING AND SITE GRADING) AS DIRECTED BY THE ENGINEER AND SHALL BE COST ABSORBED. ALL REMOVAL AND REPLACEMENT OF SIDEWALKS, ASPHALT, CONCRETE, SOD, GRASSING, SOIL, AND BACKFILL ARE COST ABSORBED AND CONSIDERED PART OF THE COST OF THE WORK UNLESS COVERED UNDER OTHER PAY ITEMS IN PLANS.

7. THE CONTRACTOR SHALL MAKE THE APPLICATION FOR POWER SERVICE, COORDINATING WITH MDOT AND LOCAL OFFICIALS IN ADVANCE OF REQUIRING THE ELECTRICAL SERVICES. IF ELECTRICAL SERVICE REQUIRES A SERVICE METER TO BE INSTALLED, CONTRACTOR TO CONTACT THE ELECTRIC UTILITY OWNER. ANY INSTALLATIONS OF AERIAL POWER CIRCUITS, POWER PANELS OR WOOD POLES TO PROVIDE POWER SERVICE SHALL MEET LOCAL EPA REQUIREMENTS AND BE COST ABSORBED. CONTRACTOR SHALL ESTABLISH POWER SERVICE IN HIS OR HER BILLING ADDRESS, AND SHALL PAY ALL UTILITY CONNECTION CHARGES AND CHARGES FOR SERVICE UNTIL FINAL PROJECT ACCEPTANCE. ALL TRANSFORMERS AND/OR TERMINAL BLOCKS NEEDED AT THE POWER SERVICE POINT OR AT THE DEVICE LOCATIONS SHALL BE COST ABSORBED IN THE APPROPRIATE 907-660 PAY ITEM.

8. CONTRACTOR SHALL BE RESPONSIBLE FOR ALL UTILITY MAKE-READY COST INCURRED TO PROVIDE POWER AND COMMUNICATION SERVICES TO THE EQUIPMENT, NOT A SEPARATE PAY ITEM (COST ABSORBED). THE CONTRACTOR SHALL BE RESPONSIBLE FOR MAKING AN INDEPENDENT INVESTIGATION INTO UTILITY MAKE-READY COST FOR BIDDING PURPOSES.

9. ALL COMMUNICATION PULLBOXES SHALL BE EITHER TYPE 4 OR TYPE 5 UNLESS OTHERWISE NOTED ON THE PLANS. EACH BELOW GROUND PULLBOX SHALL INCLUDE ADDITIONAL CABLE SLACK (SEE SPEC. PROVISION 907-661 FOR DETAILS.) THE ADDITIONAL CABLE SHALL BE COST ABSORBED UNDER THE APPROPRIATE 907-661, 907-636, OR 907-663 PAY ITEMS.

10. ALL FIBER SPLICES REQUIRED TO CONNECT TRUNK AND DROP CABLE TO NEW AND EXISTING EQUIPMENT SHALL NOT BE A SEPARATE PAY ITEM, BUT SHALL BE ABSORBED UNDER ITEM 907-661.

11. IT IS THE CONTRACTOR'S RESPONSIBILITY TO PROVIDE ENOUGH ANTENNAS, RADIOS, CABLES AND ACCESSORIES, BASED ON SELECTION OF EQUIPMENT, TO PRODUCE A FULLY FUNCTIONING SYSTEM AS INDICATED IN THESE PLANS.

12. MDOT INFORMATION SYSTEMS DIVISION (601.359.7470) WILL CONFIGURE ALL TYPE C AND ABOVE SWITCHES. MDOT IS WILL INSPECT SWITCHES FOR PROPER INSTALLATION DURING THE BURN IN PERIOD. CONTRACTOR SHALL COORDINATE THIS EFFORT THROUGH THE PROJECT ENGINEER ONCE THE SWITCH SUBMITTAL HAS BEEN ACCEPTED.

13. CONDUIT FOR POWER SUPPLY MAY BE RUN IN THE SAME TRENCH LINE AS COMMUNICATION LINES (SEE WKG. NO. FO-1), HOWEVER, SEPARATE ELECTRICAL PULLBOXES ARE TO BE INSTALLED. CONTRACTOR TO REVIEW PLANS BEFORE INSTALLING PULLBOXES AND FOUNDATIONS TO ASSURE ALL REQUIRED PULLBOXES AND CONDUITS ARE INSTALLED.

14. PAYMENT FOR FIBER OPTIC CABLE AND POWER CABLE SHALL BE MEASURED BASED ON HORIZONTAL MEASUREMENTS AS CALLED OUT IN THE PLANS AND INCLUDES SLACK IN PULLBOXES AS NOTED ON SHEET FO-3. PAYMENT FOR ETHERNET CABLE SHALL BE MEASURED BASED ON HORIZONTAL MEASUREMENTS AS CALLED OUT IN THE PLANS, INCLUDES VERTICAL RUNS IN POLES, AND INCLUDES SLACK IN PULLBOXES AS NOTED ON SHEET FO-3. CONDUIT SHALL BE MEASURED BASED ON HORIZONTAL MEASUREMENTS ONLY. HORIZONTAL MEASUREMENTS ARE IN THE HORIZONTAL PLANE ONLY AND DO NOT INCLUDE CHANGES IN ELEVATION OR SNAKING.

15. ALL GROUNDING CABLES AND EQUIPMENT SHALL BE COST ABSORBED. REFER TO SECTION 722.09 FOR MORE INFORMATION.

16. A TRACER WIRE SHALL BE INSTALLED IN CONDUIT THAT CARRIES FIBER OPTIC AND/OR COMMUNICATION CABLE, COST TO BE ABSORBED. CONDUIT THAT CARRIES FIBER OPTIC CABLE SHALL CONTAIN AN AWG #10 ORANGE TRACER WIRE, COST SHALL BE ABSORBED UNDER PAY ITEM 907-661. CONTRACTOR MAY OPT TO USE FIBER OPTIC CABLE WITH BUILT-IN TRACER WIRE, IF SO EXTERNAL TRACER WIRE WILL NOT BE REQUIRED.

17. CONDUIT FOR FIBER OPTIC CABLE REQUIRED TO UTILIZE MINIMUM 6" RADIUS BENDS. NO ELBOW JOINTS ALLOWED. UNDERGROUND DRILLED OR JACKED CONDUIT SHALL BE INSTALLED AT A MINIMUM DEPTH OF FIVE (5) FEET AND UNDERGROUND TRENCHED CONDUIT SHALL BE INSTALLED AT A MINIMUM DEPTH OF THREE (3) FEET UNLESS OTHERWISE DIRECTED BY THE ENGINEER.

18. ALL ABOVE GROUND CONDUIT SHALL BE TYPE 1 RIGID METAL. PVC SHALL NOT BE ALLOWED ABOVE GROUND UNLESS SPECIFICALLY OTHERWISE NOTED ON PLANS.

19. ALL CONDUITS TO BE SEALED WITH DUCT PLUG TO PREVENT WATER INTRUSION ONCE CABLE IS INSTALLED. COST TO BE ABSORBED IN CONDUIT PAY ITEMS.

20. FOR CONDUIT BANKS, ONE OR MORE (AS INDICATED ON THE PLANS) OF THE CONDUITS WILL BE FOR FUTURE USE AND SHALL INCLUDE A PULL STRING.

21. REEL-END SPLICE LOCATIONS SHALL BE SUBMITTED AND SHALL NOT OCCUR MORE OFTEN THAN EVERY 10,000 FEET. REEL-END SPLICE SHALL BE MADE IN A TYPE 5 PULLBOX AND SHALL UTILIZE A TYPE 5 PULLBOX ALREADY SHOWN ON THE PLANS, UNLESS OTHER LOCATIONS ARE APPROVED BY THE ENGINEER.

22. IF CONTRACTOR OPTS TO USE A SINGLE SLEEVE FOR INSTALLATION OF MULTIPLE CONDUITS, THE CONTRACTOR SHALL SUBMIT SIZE OF SLEEVE AND MATERIALS DATA TO THE ENGINEER FOR APPROVAL PRIOR TO INSTALLATION.

23. WHERE THE CONTRACTOR ENCOUNTERS PAVED DITCHES IN ROUTING OF CONDUIT, HE MAY TRENCH AND REPLACE DITCH OR JACK UNDER DITCH. THIS IS NOT A SEPARATE PAY ITEM. DAMAGE TO PAVED DITCHES AND/OR OTHER STRUCTURES CAUSED BY CONTRACTOR DURING THIS PROJECT SHALL BE REPAIRED (AS DIRECTED BY THE ENGINEER) AT NO COST TO THE STATE.

24. UNLESS CALLED OUT AND QUANTIFIED IN PLANS, ROADWAY SIGNS THAT ARE IN CONFLICT WITH CONSTRUCTION OF THIS PROJECT SHALL BE REMOVED AND RELOCATED BY THE CONTRACTOR AS DIRECTED BY THE ENGINEER, THE COST OF WHICH SHALL BE ABSORBED IN OTHER ITEMS BID.

25. ALL ITS COMPONENTS ARE SHOWN FOR ILLUSTRATIVE PURPOSES ONLY. SUPPORTS, ATTACHMENTS AND FOUNDATIONS SHALL BE DESIGNED BY THE CONTRACTOR ACCORDING TO STANDARD SPECIFICATIONS/SPECIAL PROVISIONS/PLAN DRAWINGS AND STAMPED BY A PROFESSIONAL ENGINEER REGISTERED IN THE STATE OF MISSISSIPPI. THE CONTRACTOR SHALL SUBMIT FOUR (4) SETS OF LAYOUT/SHOP DRAWINGS FOR ALL ITS COMPONENTS (INCLUDING THE PLAN OF ATTACHMENT) TO THE PROJECT ENGINEER FOR REVIEW AND APPROVAL. ELECTRONIC SUBMITTALS ARE ACCEPTABLE.

26. POLE FOUNDATIONS SHALL NOT EXCEED FOUR (4) INCHES ABOVE FINISHED GRADE.

27. SOME CENTERLINES SHOWN ON THESE PLANS MAY BE FOR GRAPHICAL REFERENCE PURPOSES ONLY AND ARE NOT STAKED IN THE FIELD.

28. PLAN SCALE INDICATIONS ARE FOR FULL SIZE (22" x 34") DRAWINGS. IF REDUCED SCALE PRINTS ARE USED, SCALE SHOULD BE VERIFIED.

29. IT IS THE CONTRACTOR'S RESPONSIBILITY TO COORDINATE WITH THE LOCAL POWER COMPANY TO DETERMINE IF ADEQUATE POWER IS AVAILABLE AT THE EXISTING POWER SERVICE DEMARCATION POINT. IF ADDITIONAL SERVICE IS REQUIRED, THE CONTRACTOR SHALL COORDINATE WITH THE LOCAL POWER COMPANY TO SUPPLY THE POWER REQUIRED. COST OF COORDINATING WITH POWER COMPANY AND MAKING ANY NECESSARY POWER UPGRADES SHALL BE INCLUDED IN BID PRICE FOR THE POWER CABLE PAY ITEM.

REVISION | BY | DATE

MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ITS GENERAL NOTES

PROJ. NO.: CRP-0008-03(050)
COUNTY: HINDS

FILE NAME: ITS-GN.dgn
DESIGN TEAM _____ CHECKED _____ DATE _____

WORKING NUMBER ITS-GN-1
SHEET NUMBER 3001

PLAN REVIEW DIVISION MISSISSIPPI DEPARTMENT OF TRANSPORTATION 2024

8/28/2024 5:21 PM ITS-GN.DGN

65 - Notice to Bidders No. 7684 -- Cont.

STATE	PROJECT NO.
MISS.	

ITS LEGEND

	EXISTING	PROPOSED
CABLE - COMM.	C C C C	C C C C
CABLE - ELEC. (U/G IN COND.)		
LABEL FOR CONDUIT AND CONDUIT TYPES	[CONDUIT DESCRIPTION(S)] / [CABLE DESCRIPTION(S)]	[CONDUIT DESCRIPTION(S)] / [CABLE DESCRIPTION(S)]
LABEL FOR DEVICE DESCRIPTIONS AND LOCATIONS	[DEVICE #(S) & DESCRIPTION(S)] / [LOCATION DESCRIPTION(S)]	[DEVICE #(S) & DESCRIPTION(S)] / [LOCATION DESCRIPTION(S)]
PULLBOX - COMM.		
PULLBOX - ELEC.	PB	PB
PULLBOX - SURFACE MOUNTED	SP	SP
LABEL FOR PULL BOX TYPE	X	X
DEMARC. PT. (POWER)		
TRANSFORMER	TR	TR
TRAFFIC SIGNAL CABINET	TSC	TSC or
CABINET (TYPE AS NOTED)	B	B
CLOSED-CIRCUIT TELEVISION (CCTV) (ALL TYPES)	CCTV	CCTV
DYNAMIC MESSAGE SIGN (DMS) (OVERHEAD) (TYPE 1)	DMS	DMS
DYNAMIC MESSAGE SIGN (DMS) (ROADSIDE) (TYPE 2 OR 3 AS INDICATED)	DMS TYPE 2 / TYPE 3	DMS TYPE 2 / TYPE 3
DMS (PORTABLE)	DMS	DMS
RADAR DETECTION SYSTEM (RDS)	RDS	RDS
BLUETOOTH DETECTION SYSTEM (BDS)	BDS	BDS
COMMUNICATIONS HUT	CH	CH
COMMUNICATIONS VAULT	V	V
WIRELESS RADIO		

	EXISTING	PROPOSED
GUARD RAIL		
SIGN STRUCTURE (OVERHEAD)		
RWIS STATION	RWIS	RWIS
HIGHWAY ADVISORY RADIO (HAR) TRANSMITTER	HAR	HAR
HAR SIGN W/FLASHERS	HAR	HAR
WIRELESS TRANSMISSION TOWER / ANTENNA		
TRAVEL TIME SIGN (ROADSIDE)	TTS	TTS
ADVANCED WARNING SIGN WITH FLASHING BEACON		

ABBREVIATIONS

E.O.T.L. - EDGE OF TRAVEL LANE
F.O. - FIBER OPTIC
COMM. - COMMUNICATION
ELEC. - ELECTRICAL
DEMARC. PT. - DEMARCATION POINT
CCTV - CLOSED CIRCUIT TELEVISION
DMS - DYNAMIC MESSAGE SIGN
RDS - RADAR DETECTION SYSTEM
BDS - BLUETOOTH DETECTION SYSTEM
RWIS - ROADWAY WEATHER INFO SYSTEM
HAR - HIGHWAY ADVISORY RADIO
TTS - TRAVEL TIME SIGN

MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ITS LEGEND

PROJ. NO.: CRP-0008-03(050)
COUNTY: HINDS
FILE NAME: ITS-LGN.dgn
DESIGN TEAM _____ CHECKED _____ DATE _____

WORKING NUMBER: ITS-LGN
SHEET NUMBER: 3002

REVISION | BY | DATE

Notice to Bidders No. 7684 -- Cons.

PLAN REVIEW DIVISION MISSISSIPPI DEPARTMENT OF TRANSPORTATION

8/28/2024 5:21:27 PM TS-LGN.DGN



MISSISSIPPI DEPARTMENT OF TRANSPORTATION

PROJECT NO: CRP-0008-03(050)
FMS CON: 105530/303000

ITS PLANS

ROUTE: US 49
COUNTY: HINDS

WORKING NUMBER: ITS-1
SHEET NUMBER: 3003



MISSISSIPPI DEPARTMENT OF TRANSPORTATION

PROJECT NO: CRP-0008-03(050)
FMS CON: 105530/303000

ITS PLANS

ROUTE: US 49
COUNTY: HINDS

WORKING NUMBER: ITS-2
SHEET NUMBER: 3004

Notice to Bidders No. 7684 -- Cont'd.


MISSISSIPPI DEPARTMENT OF TRANSPORTATION
PROJECT NO: CRP-0008-03(050)
FMS CON: 105530/303000
ITS PLANS
ROUTE: US 49
COUNTY: HINDS
WORKING NUMBER: ITS-3
SHEET NUMBER: 3005
MSEPOXY Epoxy Flooring
Type 4 PB
The Buck Shop Deer Processing
Cond. Bank (2-2" Roll Pipe)
1- F.O. Cable
Pocahontas Mounds
Pocahontas Mounds Roadside Park
204
Electrical Demarcation
40' Wood Pole
Type 2 PB
Power Cable 3C
Limekiln Creek
PP
Type 5 PB
-B-
CCTV Site #1
1 PTZ, 1 Fixed. Type A Network Switch
50' ITS Pole, Type B Cabinet
Fiber Drop Cable (12SM)
All power and comm cabling components
absorbed into Pay-Item 907-650-A003
(32.4677, -90.2896)
Hinds County Rest Area
N
700 ft
Google Earth
Image © 2026 Airbus
- 69 -
Notice to Bidders No. 7684 -- Cont'd.


MISSISSIPPI DEPARTMENT OF TRANSPORTATION
PROJECT NO: CRP-0008-03(050)
FMS CON: 105530/303000
ITS PLANS
ROUTE: US 49
COUNTY: HINDS
WORKING NUMBER: ITS-4
SHEET NUMBER: 3006
Type 5 PB
Hinds County Rest Area
Cond. Bank (2-2" Roll Pipe)
1- F.O. Cable
1-2" RGS COND (AERIAL SUPPORTED) 210'
1- F.O. Cable (AERIAL SUPPORTED) 210'
(See Sheets ASC-1C & 2C for Bridge Deck
Mount Details) (32.6032, -90.3641)
Type 4 PB
Type 4 PB
205
COCK OF THE WALK
Cond. Bank (2-2" Roll Pipe)
1- F.O. Cable
Type 4 PB
N
900 ft
Google Earth
Image © 2026 Airbus
- 70 -
Notice to Bidders No. 7684 -- Cont'd.



MISSISSIPPI DEPARTMENT OF TRANSPORTATION
PROJECT NO: CRP-0008-03(050)
FMS CON: 105530/303000
ITS PLANS
ROUTE: US 49
COUNTY: HINDS
WORKING NUMBER: ITS-5
SHEET NUMBER: 3007
Type 4 PB
Cond. Bank (2-2" Roll Pipe)
1- F.O. Cable
Type 4 PB
206
Type 4 PB
Cond. Bank (2-2" Roll Pipe)
1- F.O. Cable
Type 4 PB
N
1000 ft
Google Earth
Image © 2026 Airbus


MISSISSIPPI DEPARTMENT OF TRANSPORTATION
PROJECT NO: CRP-0008-03(050)
FMS CON: 105530/303000
ITS PLANS
ROUTE: US 49
COUNTY: HINDS
WORKING NUMBER: ITS-6
SHEET NUMBER: 3008
Type 4 PB
Cond. Bank (2-2" Roll Pipe)
1- F.O. Cable
Type 4 PB
Pocahontas Volunteer Fire Department
Cond. Bank (2-2" Roll Pipe)
1- F.O. Cable
Type 4 PB
207
N
1000 ft
Google Earth
Image © 2026 Airbus


MISSISSIPPI DEPARTMENT OF TRANSPORTATION
PROJECT NO: CRP-0008-03(050)
FMS CON: 105530/303000
ITS PLANS
ROUTE: US 49
COUNTY: HINDS
WORKING NUMBER: ITS-7
SHEET NUMBER: 3009
Type 5 PB
Cond. Bank (2-2" Roll Pipe)
1- F.O. Cable
Type 4 PB
Type 4 PB
Type 4 PB
Cond. Bank (2-2" Roll Pipe)
1- F.O. Cable
Type 4 PB
208
- 73 -
Notice to Bidders No. 7684 - Cont'd.
N
1000 ft
Google Earth
Image © 2026 Airbus


MISSISSIPPI DEPARTMENT OF TRANSPORTATION
PROJECT NO: CRP-0008-03(050)
FMS CON: 105530/303000
ITS PLANS
ROUTE: US 49
COUNTY: HINDS
WORKING NUMBER: ITS-8
SHEET NUMBER: 3010
Type 4 PB
Cond. Bank (2-2" Roll Pipe)
1- F.O. Cable
Type 4 PB
Bunk House
Live Oaks Golf Club
Type 4 PB
Reed House
209
- 74 -
Type 4 PB
Cond. Bank (2-2" Roll Pipe)
1- F.O. Cable
Notice to Bidders No. 7684 -- Cont'd.
Type 5 PB
Camp 49 Hinds County
Type 4 PB
N
1000 ft
Google Earth
Image © 2026 Airbus


MISSISSIPPI DEPARTMENT OF TRANSPORTATION
PROJECT NO: CRP-0008-03(050)
FMS CON: 105530/303000
ITS PLANS
ROUTE: US 49
COUNTY: HINDS
WORKING NUMBER: ITS-9
SHEET NUMBER: 3011
Type 4 PB
Type 4 PB
Cond. Bank (2-2" Roll Pipe)
1- F.O. Cable
St Charles
Type 4 PB
Type 4 PB
Cond. Bank (2-2" Roll Pipe)
1- F.O. Cable
Type 5 PB
Type 4 PB
Type 4 PB
Type 4 PB
New Development Group
Spencer Ready Mix Concrete
Pocahontas Baptist Church
210
N
1000 ft
Google Earth
Image © 2026 Airbus
- 75 -
Notice to Bidders No. 7684 -- Cont'd.

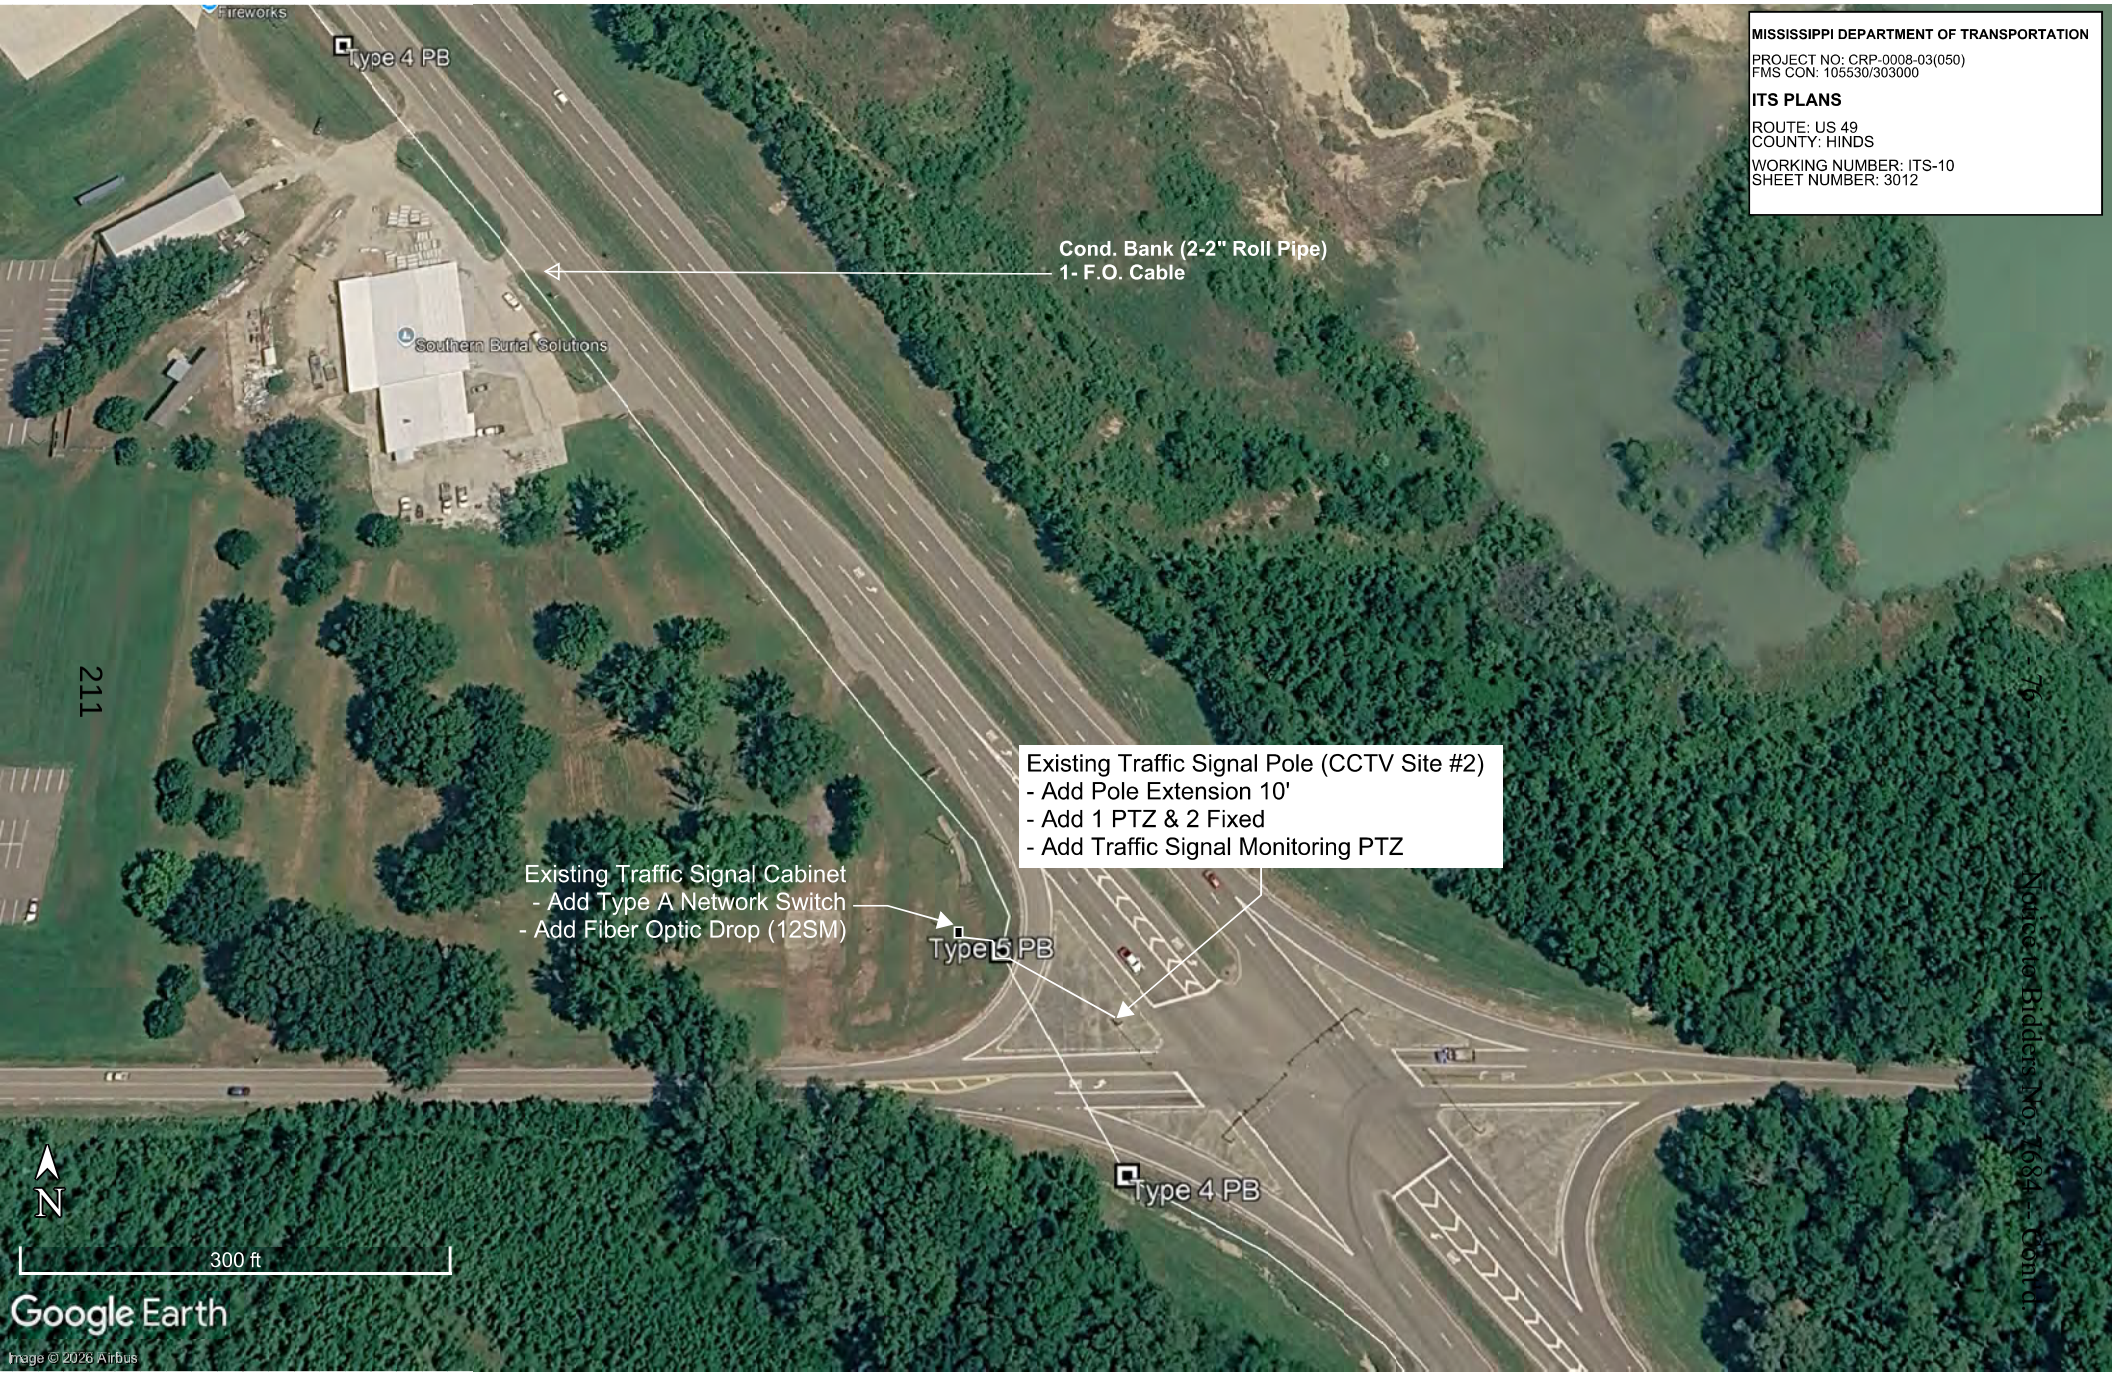
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
PROJECT NO: CRP-0008-03(050)
FMS CON: 105530/303000
ITS PLANS
ROUTE: US 49
COUNTY: HINDS
WORKING NUMBER: ITS-10
SHEET NUMBER: 3012
Type 4 PB
Cond. Bank (2-2" Roll Pipe)
1- F.O. Cable
Southern Burial Solutions
Existing Traffic Signal Pole (CCTV Site #2)
- Add Pole Extension 10'
- Add 1 PTZ & 2 Fixed
- Add Traffic Signal Monitoring PTZ
Existing Traffic Signal Cabinet
- Add Type A Network Switch
- Add Fiber Optic Drop (12SM)
Type 5 PB
Type 4 PB
211
76
Notice to Bidders No. 1684 - Cont'd.
N
300 ft
Google Earth
Image © 2026 Airbus



MISSISSIPPI DEPARTMENT OF TRANSPORTATION

PROJECT NO: CRP-0008-03(050)
FMS CON: 105530/303000

ITS PLANS

ROUTE: US 49
COUNTY: HINDS

WORKING NUMBER: ITS-11
SHEET NUMBER: 3013

- 77 -

Notice to Bidders No. 7684 - Cont'd



MISSISSIPPI DEPARTMENT OF TRANSPORTATION

PROJECT NO: CRP-0008-03(050)
FMS CON: 105530/303000

ITS PLANS

ROUTE: US 49
COUNTY: HINDS


WORKING NUMBER: ITS-12
SHEET NUMBER: 3014


MISSISSIPPI DEPARTMENT OF TRANSPORTATION
PROJECT NO: CRP-0008-03(050)
FMS CON: 105530/303000
ITS PLANS
ROUTE: US 49
COUNTY: HINDS
WORKING NUMBER: ITS-13
SHEET NUMBER: 3015
Type 4 PB
Cond. Bank (2-2" Roll Pipe)
1- F.O. Cable
Electrical Demarcation
40' Wood Pole
Type 2 PB
Power Cable 3C
Type 5 PB
Cond. Bank (2-2" Roll Pipe)
1- F.O. Cable
CCTV Site #3
1 PTZ, 2 Fixed. Type A Network Switch
50' ITS Pole, Type B Cabinet, Fiber Drop (12 SM)
All power and comm cabling components
absorbed into Pay-Item 907-650-A003
(32.3812, -90.2598)
PP
214
- 79 -
Notice to Bidders No. 768 - cont'd
N
700 ft
Google Earth
Image © 2026 Airbus


MISSISSIPPI DEPARTMENT OF TRANSPORTATION
PROJECT NO: CRP-0008-03(050)
FMS CON: 105530/303000
ITS PLANS
ROUTE: US 49
COUNTY: HINDS
WORKING NUMBER: ITS-14
SHEET NUMBER: 3016
Existing Traffic Signal Pole
- Add Traffic Signal Monitoring PTZ
Existing Traffic Signal Cabinet
- Add Type A Network Switch
- Add Fiber Optic Drop (12SM)
Type 5 PB
Cond. Bank (2-2" Roll Pipe)
1- F.O. Cable
Type 4 PB
Central Glass
I-55
I-80
N
300 ft
Google Earth
Image © 2026 Airbus
Notice to Bidders No. 7684 -- Contd.


MISSISSIPPI DEPARTMENT OF TRANSPORTATION
PROJECT NO: CRP-0008-03(050)
FMS CON: 105530/303000
ITS PLANS
ROUTE: US 49
COUNTY: HINDS
WORKING NUMBER: ITS-15
SHEET NUMBER: 3017
Undershepherd Ministry Church
People's Place Enterp
Type 4 PB
Hugh and Mary Smith Private Park
Cond. Bank (2-2" Roll Pipe)
1- F.O. Cable
216
Existing Traffic Signal Pole
- Add Traffic Signal Monitoring PTZ
Existing Traffic Signal Cabinet
- Add Type A Network Switch
- Add Fiber Optic Drop (12SM)
Type 5 PB
N
200 ft
Google Earth
Image © 2026 Airbus
Notice to Bidders No. 7684 - Cont'd.


MISSISSIPPI DEPARTMENT OF TRANSPORTATION
PROJECT NO: CRP-0008-03(050)
FMS CON: 105530/303000
ITS PLANS
ROUTE: US 49
COUNTY: HINDS
WORKING NUMBER: ITS-16
SHEET NUMBER: 3018
Cond. Bank (2-2" Roll Pipe)
1- F.O. Cable
Type 4 PB
Type 4 PB
A One Choice
OBannon Sandwiches
217
N
300 ft
Google Earth
Image © 2026 Airbus

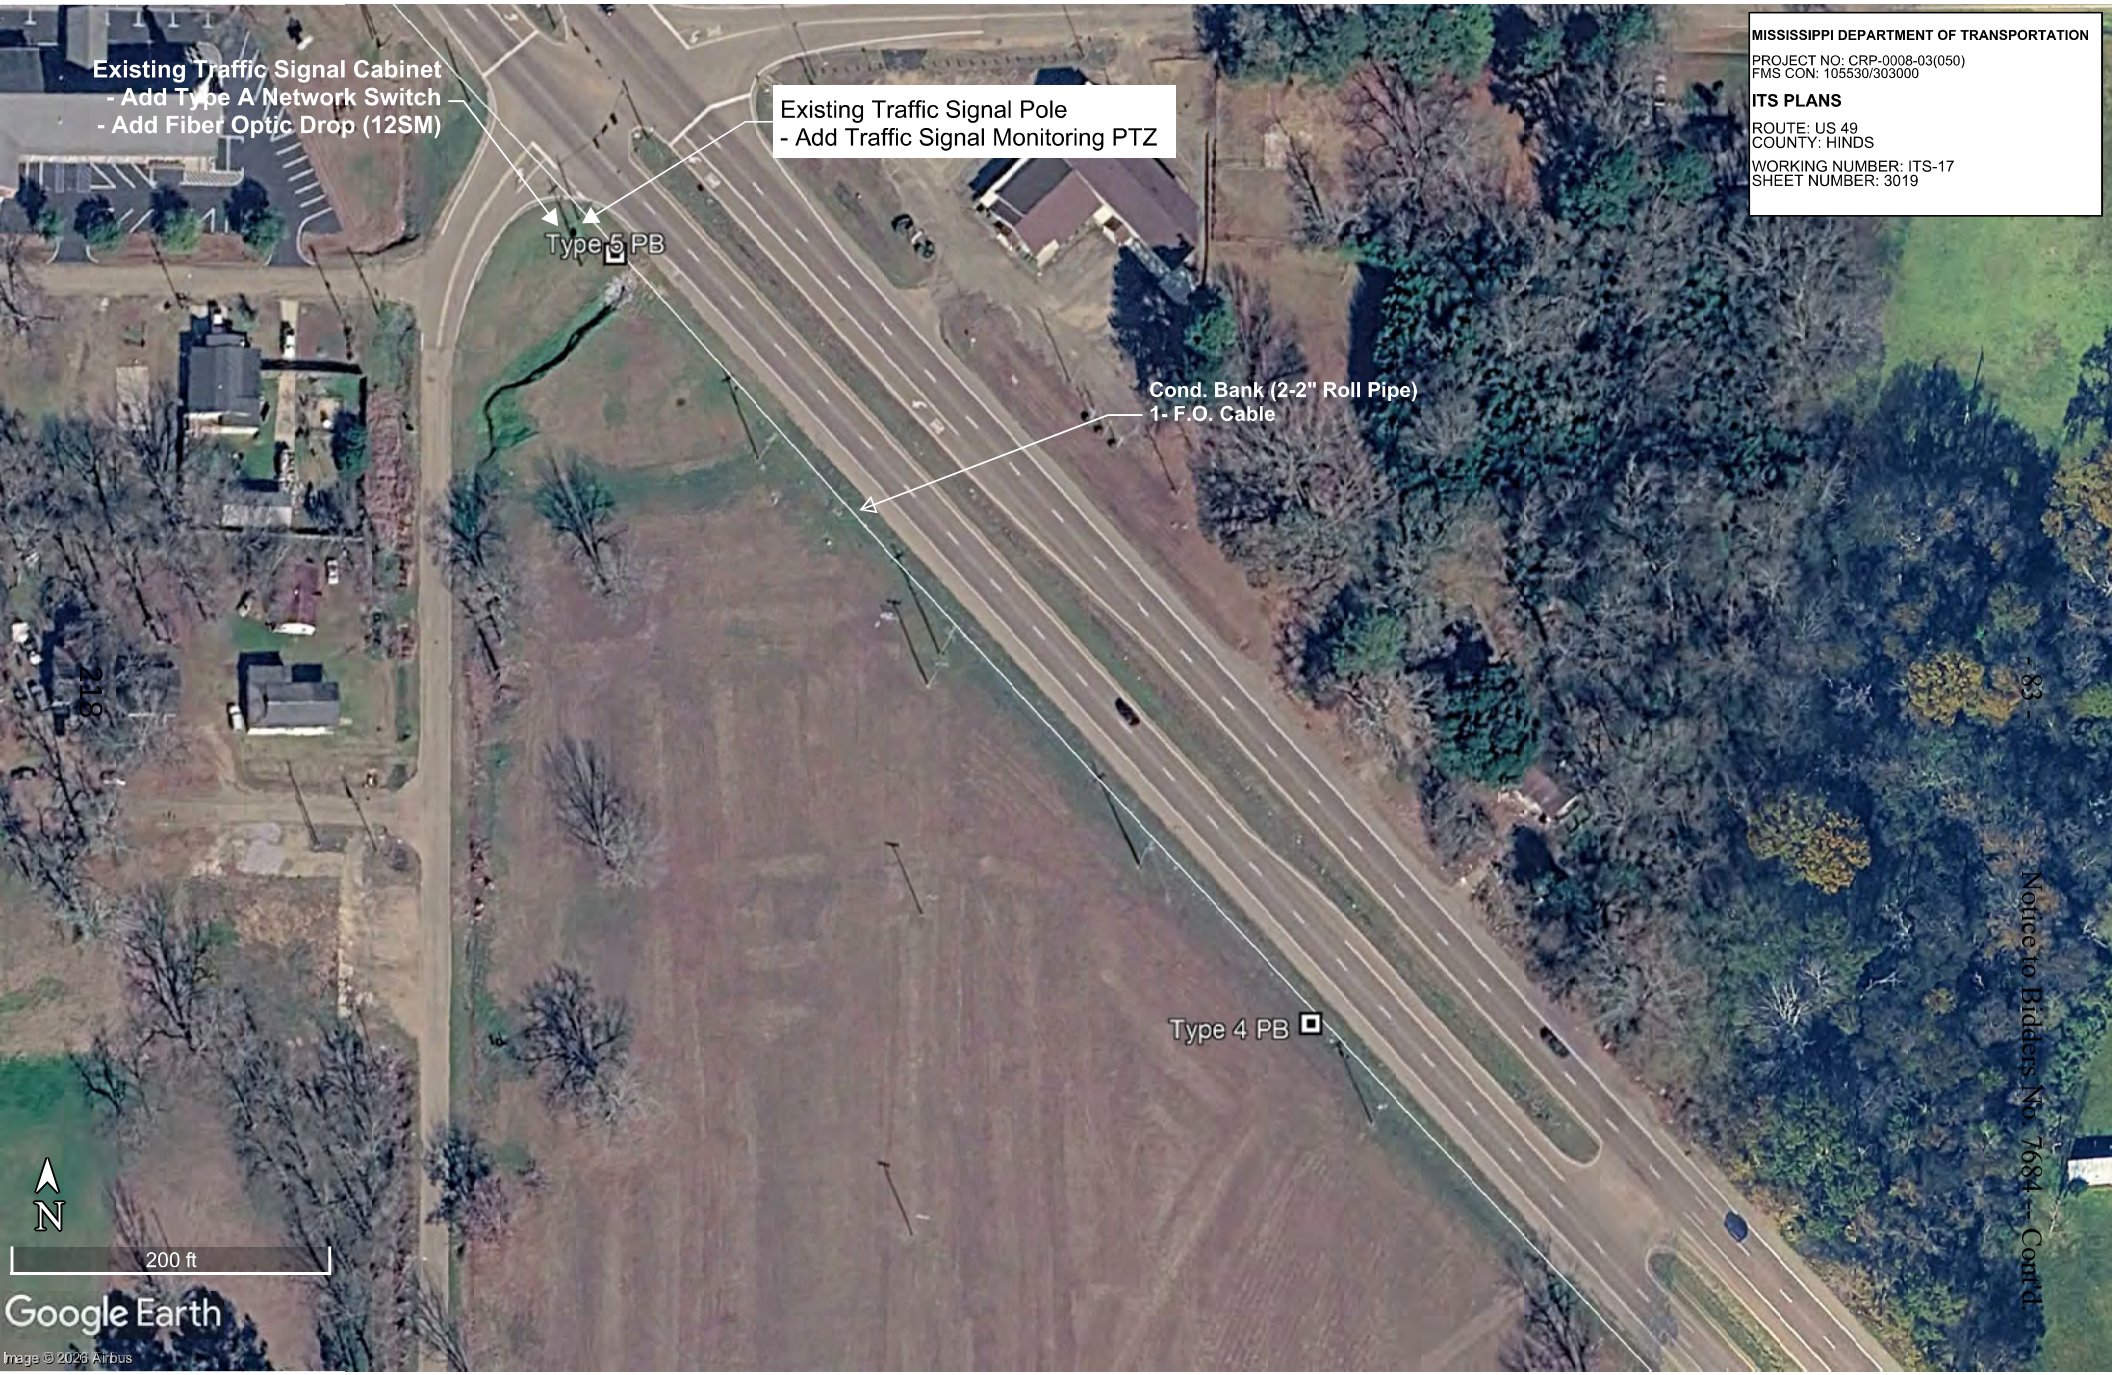

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

PROJECT NO: CRP-0008-03(050)
FMS CON: 105530/303000


ITS PLANS


ROUTE: US 49
COUNTY: HINDS

WORKING NUMBER: ITS-17
SHEET NUMBER: 3019

Notice to Bidders No. 7684 – Cont'd.


MISSISSIPPI DEPARTMENT OF TRANSPORTATION
PROJECT NO: CRP-0008-03(050)
FMS CON: 105530/303000
ITS PLANS
ROUTE: US 49
COUNTY: HINDS
WORKING NUMBER: ITS-18
SHEET NUMBER: 3020
Monroe's Donuts & Bakery
Dollar General
Type 4 PB
Cond. Bank (2-2" Roll Pipe)
1- F.O. Cable
DAVIS AUTOMOTIVE SERVICES
Type 4 PB
219
Electric Works Inc
Subway
Type 5 PB
Cond. Bank (2-2" Roll Pipe)
1- F.O. Cable
Luxury Inn
Type 4 PB
BP | Jackson
Type 4 PB
N
1000 ft
Google Earth
Image © 2026 Airbus

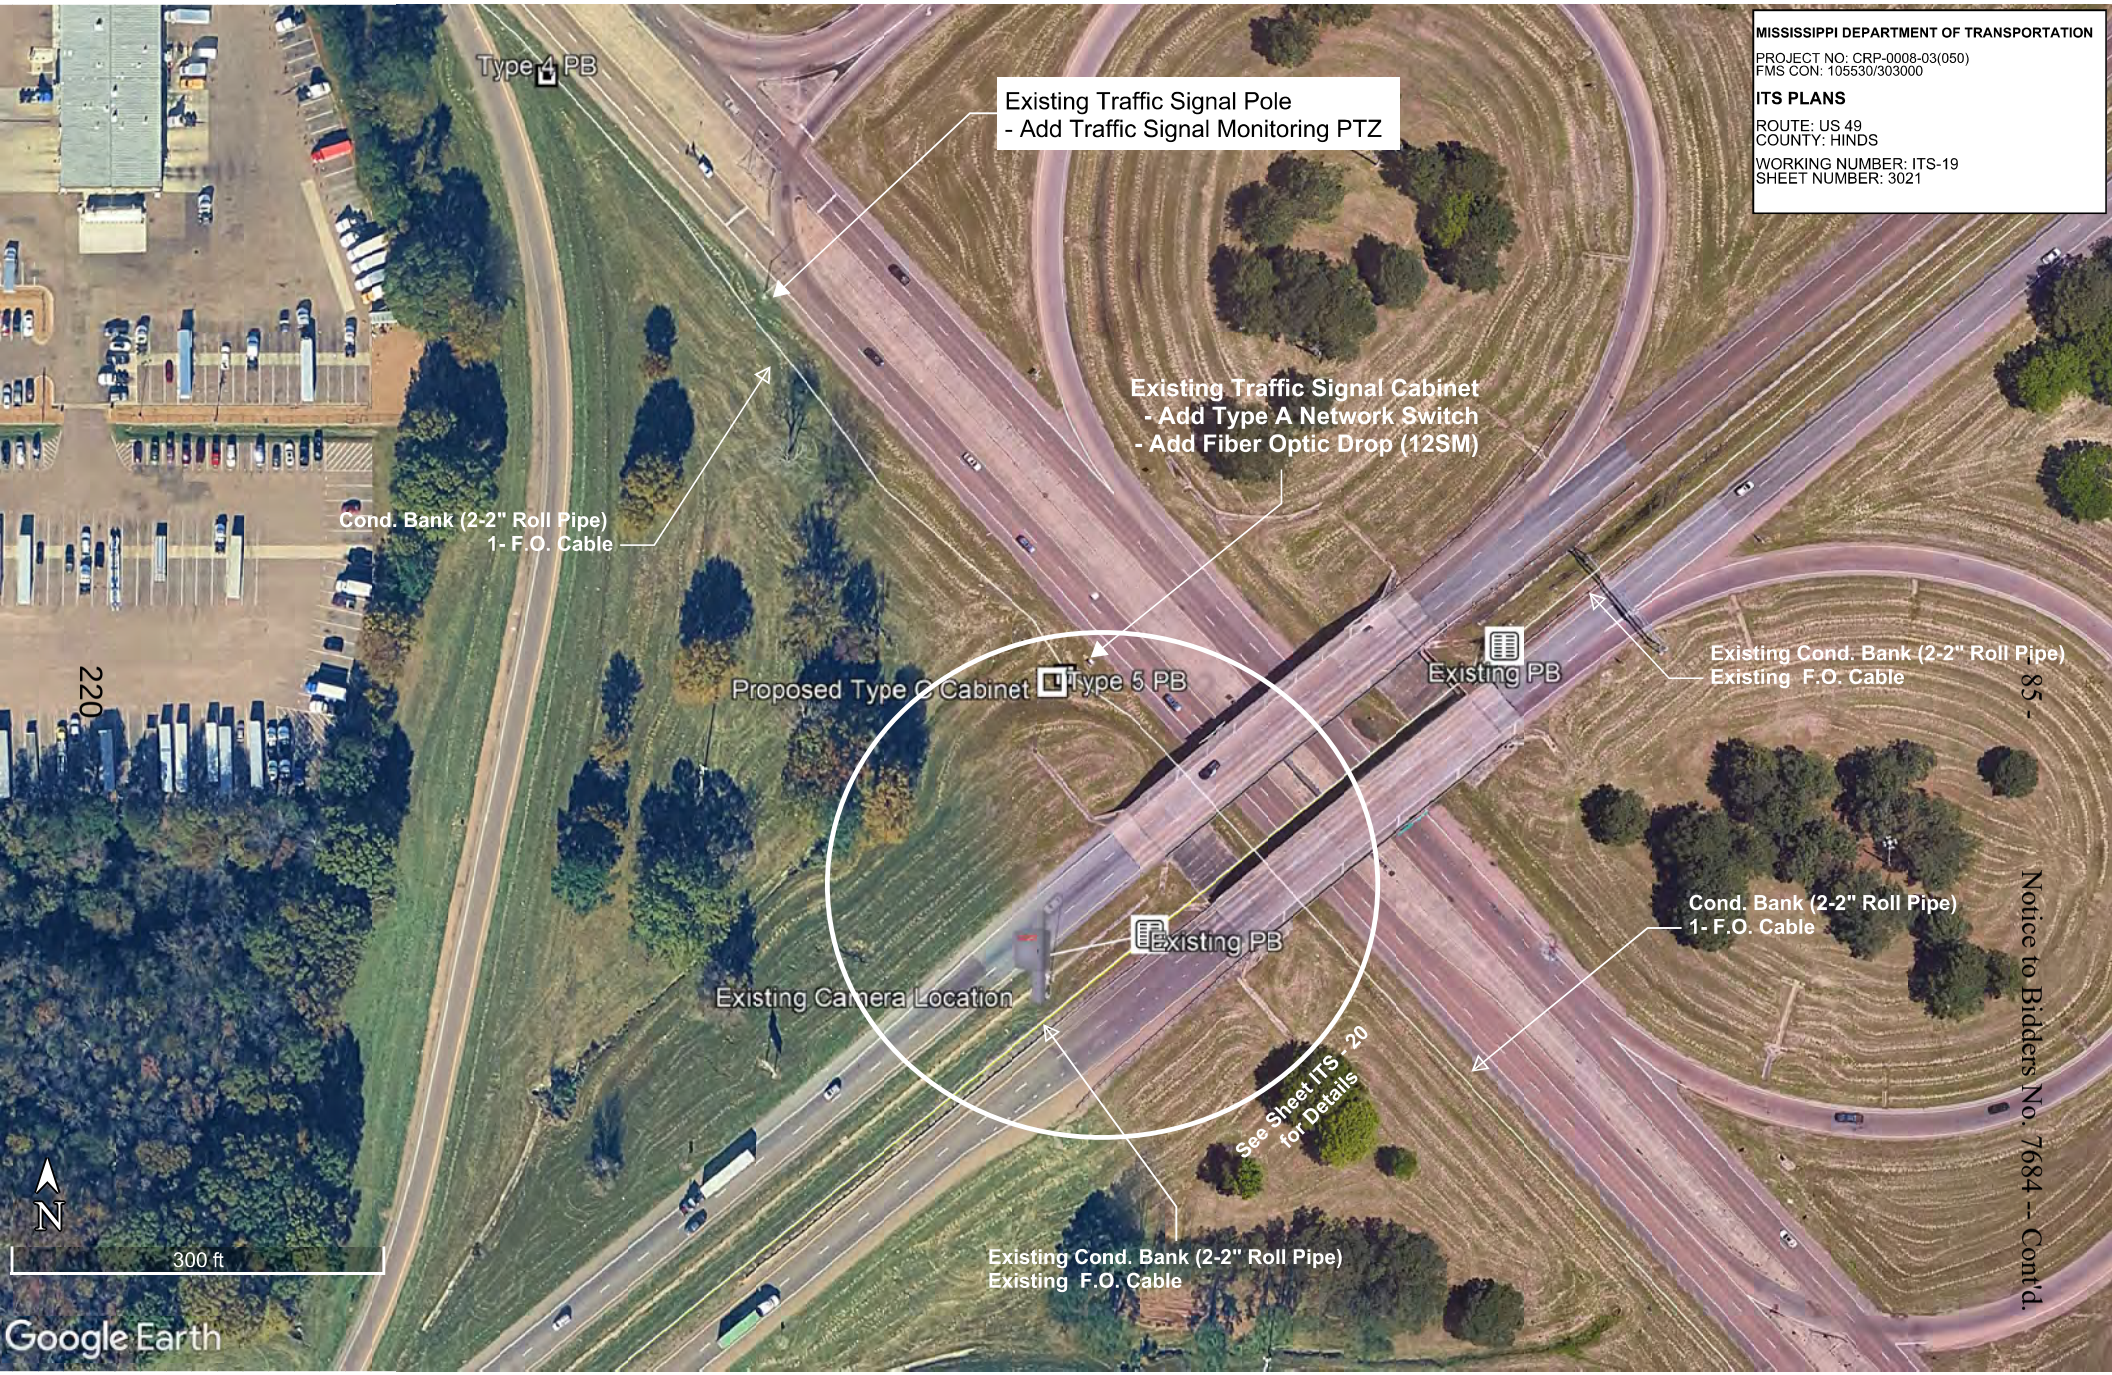
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
PROJECT NO: CRP-0008-03(050)
FMS CON: 105530/303000
ITS PLANS
ROUTE: US 49
COUNTY: HINDS
WORKING NUMBER: ITS-19
SHEET NUMBER: 3021
Type 4 PB
Existing Traffic Signal Pole
- Add Traffic Signal Monitoring PTZ
Existing Traffic Signal Cabinet
- Add Type A Network Switch
- Add Fiber Optic Drop (12SM)
Cond. Bank (2-2" Roll Pipe)
1- F.O. Cable
Proposed Type C Cabinet
Type 5 PB
Existing PB
Existing Cond. Bank (2-2" Roll Pipe)
Existing F.O. Cable
Existing PB
Existing Camera Location
Cond. Bank (2-2" Roll Pipe)
1- F.O. Cable
See Sheet ITS - 20
for Details
Existing Cond. Bank (2-2" Roll Pipe)
Existing F.O. Cable
220
N
300 ft
Google Earth
85 -
Notice to Bidders No. 7684 -- Cont'd.

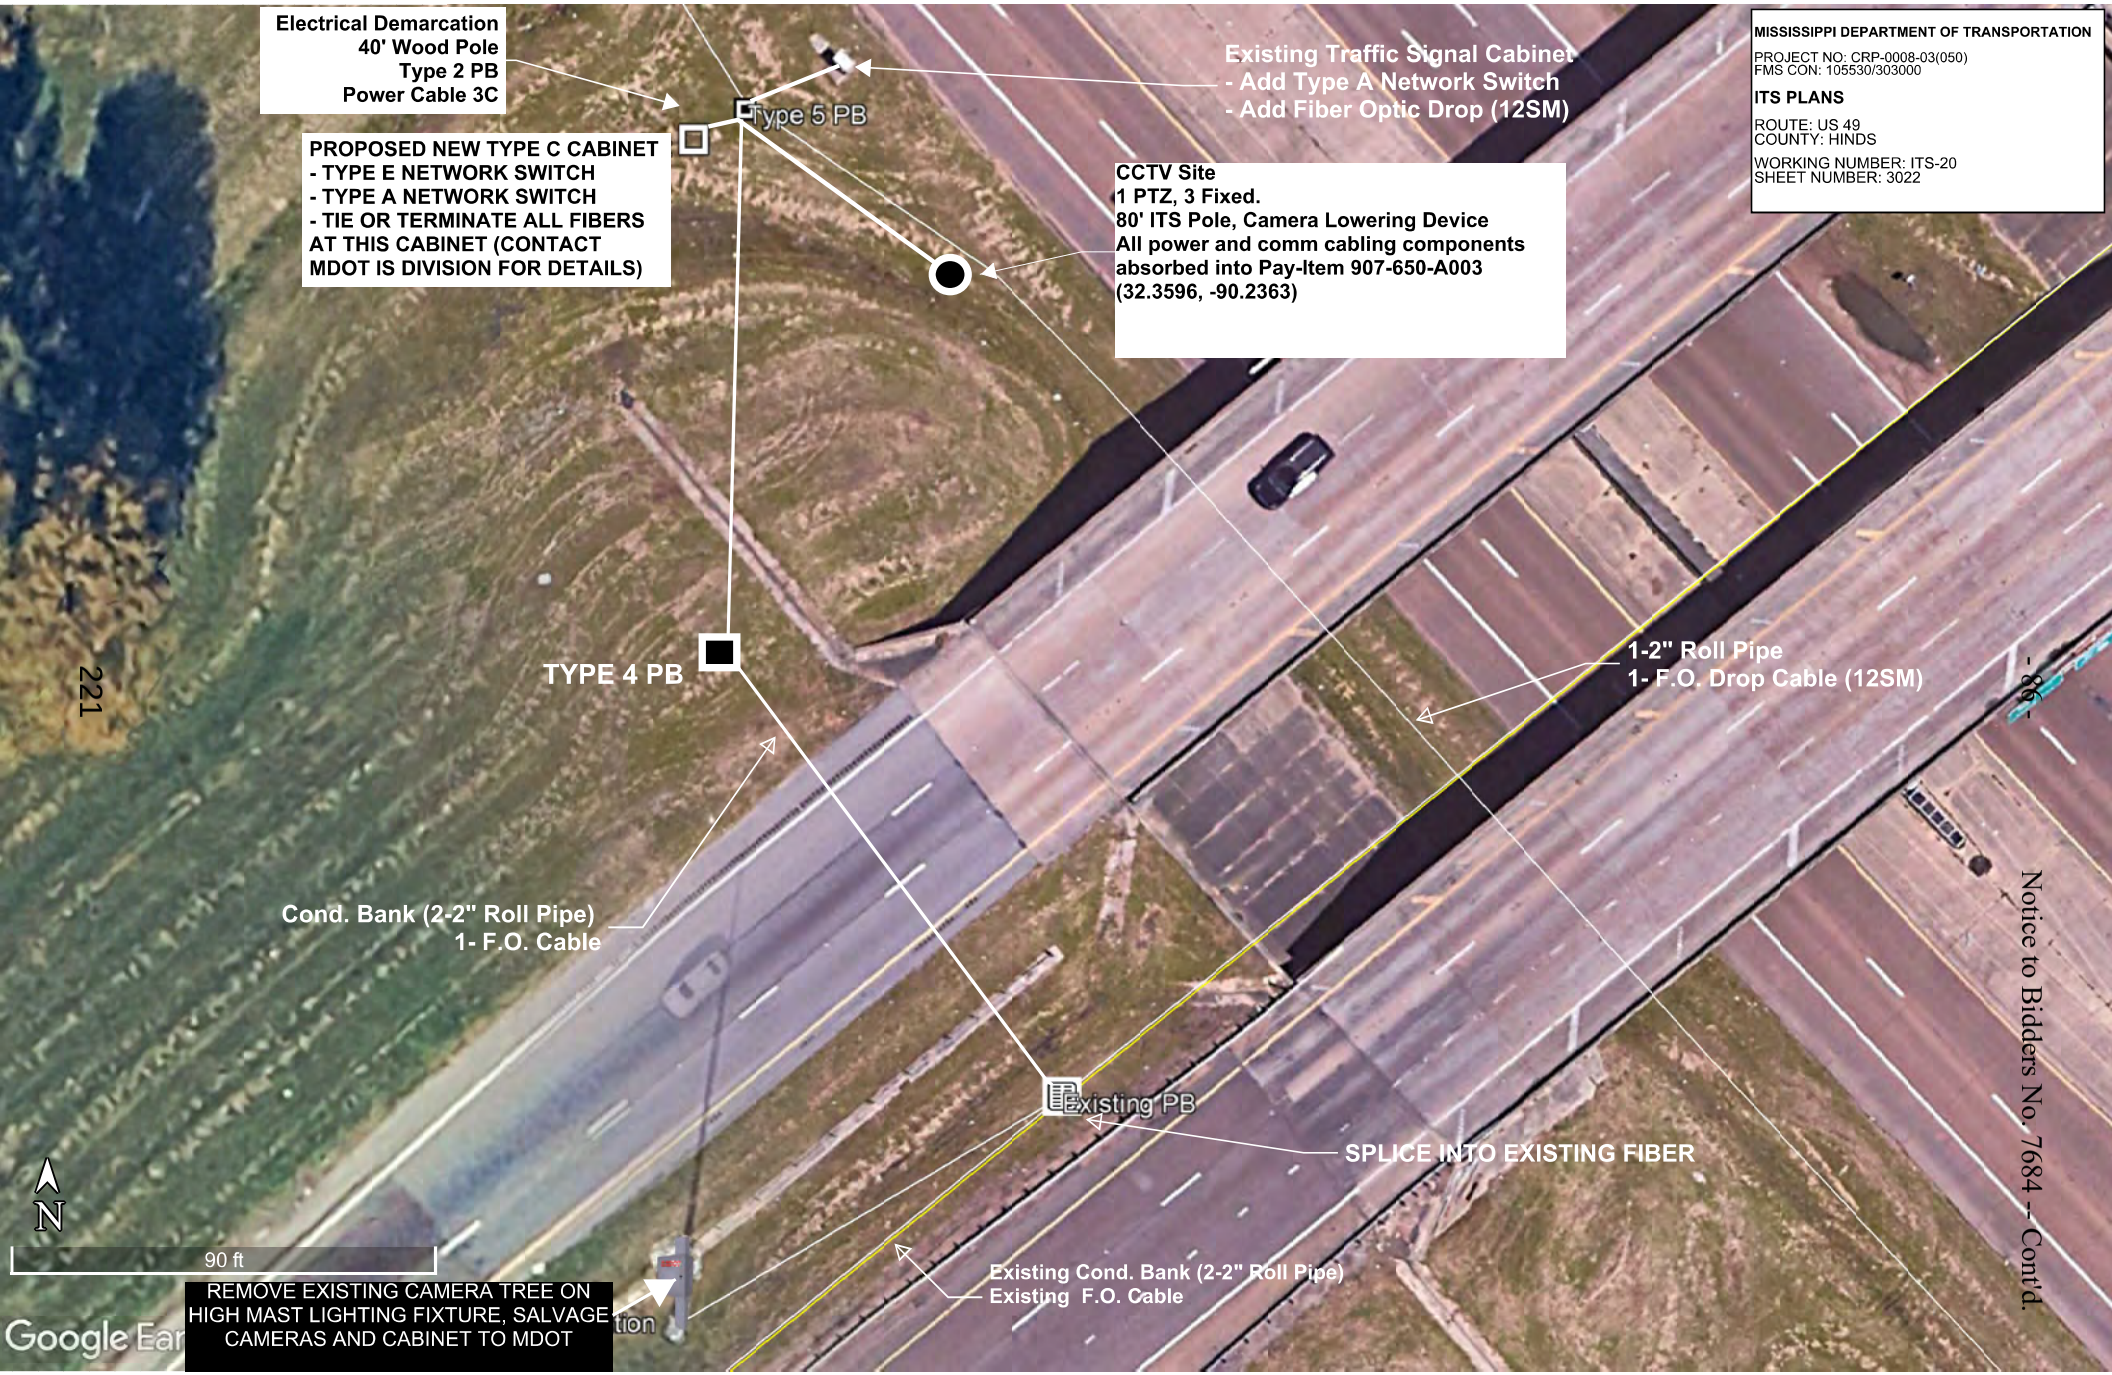

MISSISSIPPI DEPARTMENT OF TRANSPORTATION


PROJECT NO: CRP-0008-03(050)
FMS CON: 105530/303000

ITS PLANS

ROUTE: US 49
COUNTY: HINDS

WORKING NUMBER: ITS-20
SHEET NUMBER: 3022

Notice to Bidders No. 7684 – Cont'd.

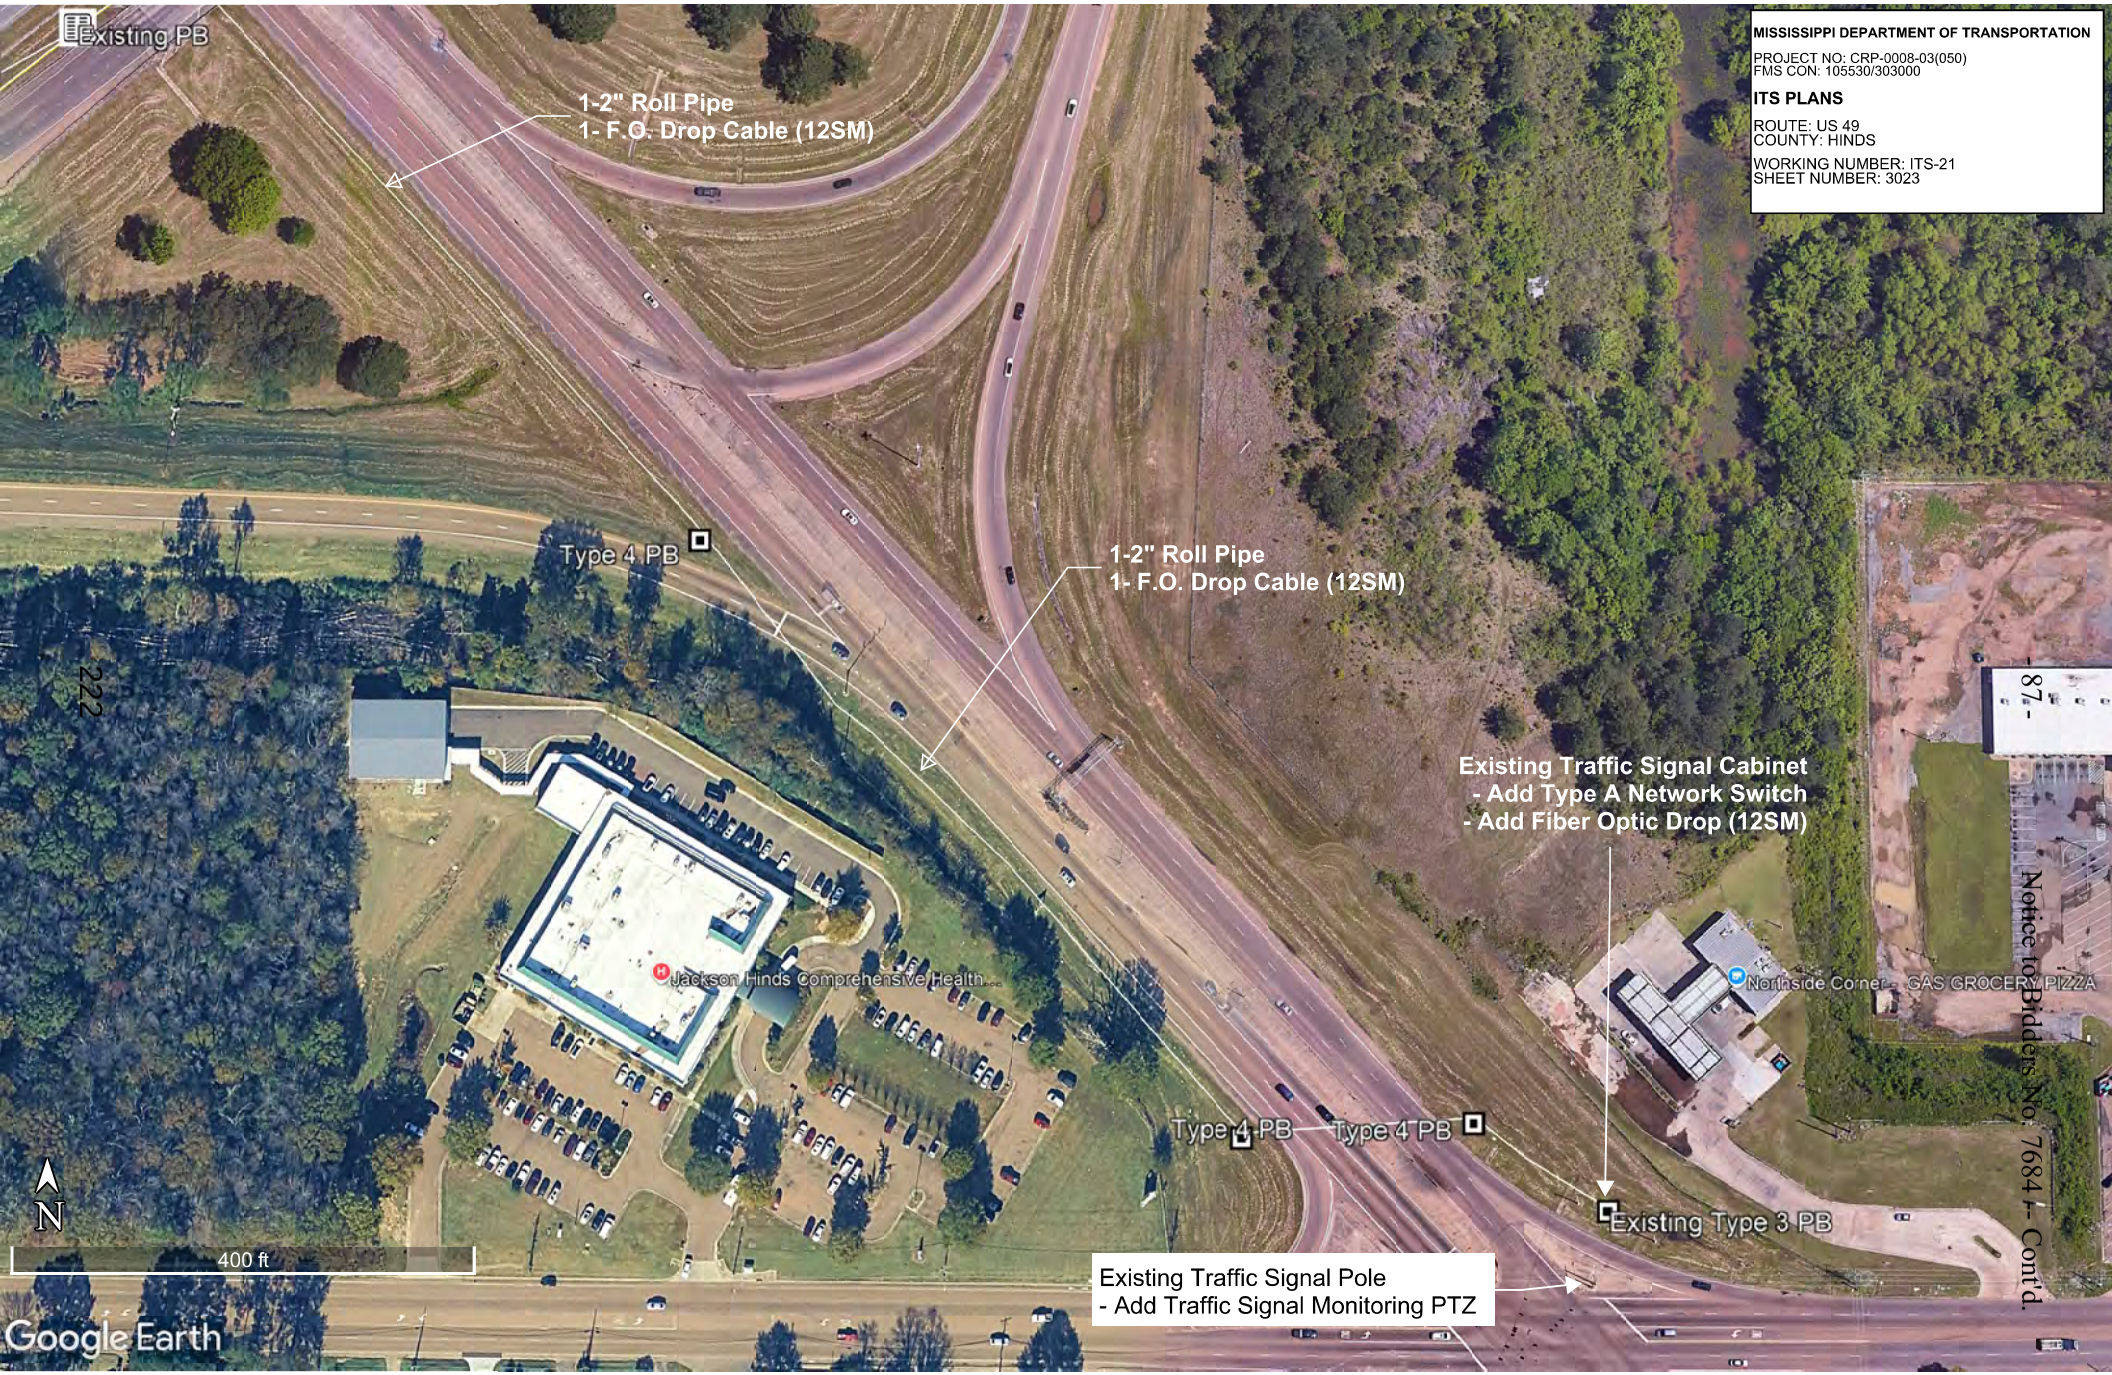

MISSISSIPPI DEPARTMENT OF TRANSPORTATION


PROJECT NO: CRP-0008-03(050)
FMS CON: 105530/303000

ITS PLANS

ROUTE: US 49
COUNTY: HINDS

WORKING NUMBER: ITS-21
SHEET NUMBER: 3023

Notice to Bidders No. 7684 - Cont'd.

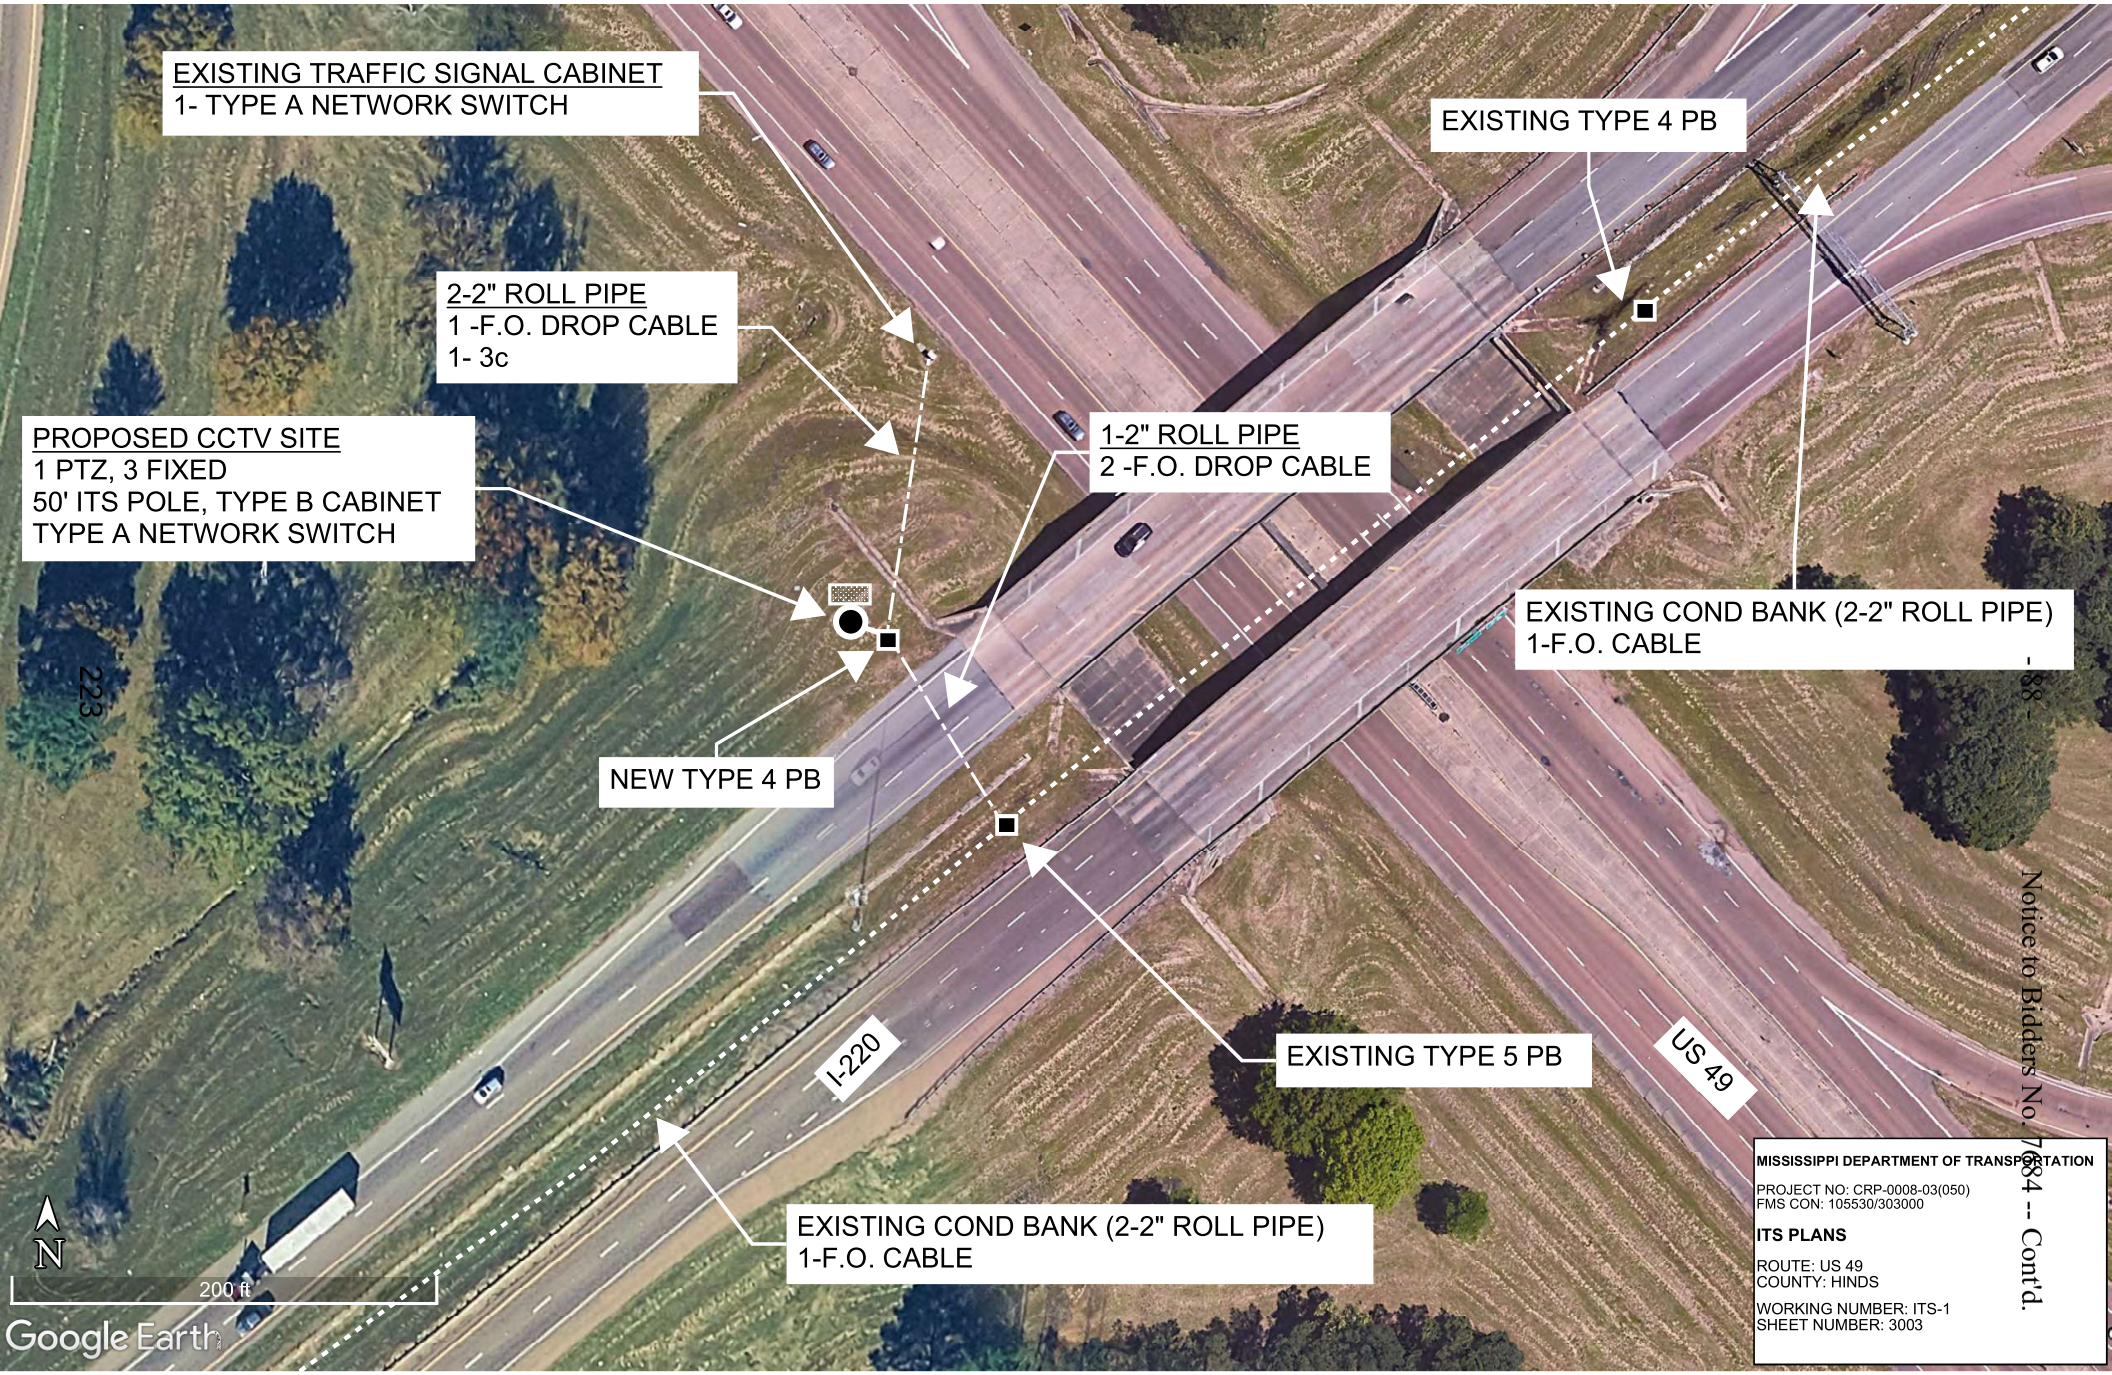


MISSISSIPPI DEPARTMENT OF TRANSPORTATION

PROJECT NO: CRP-0008-03(050)
FMS CON: 105530/303000

ITS PLANS

ROUTE: US 49
COUNTY: HINDS


WORKING NUMBER: ITS-1
SHEET NUMBER: 3003

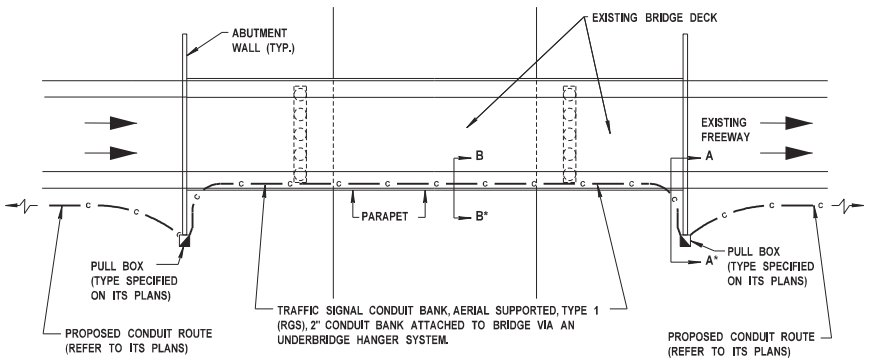

TYPICAL BRIDGE PLAN


NOT TO SCALE

* SEE TYPICAL SECTIONS THIS SHEET

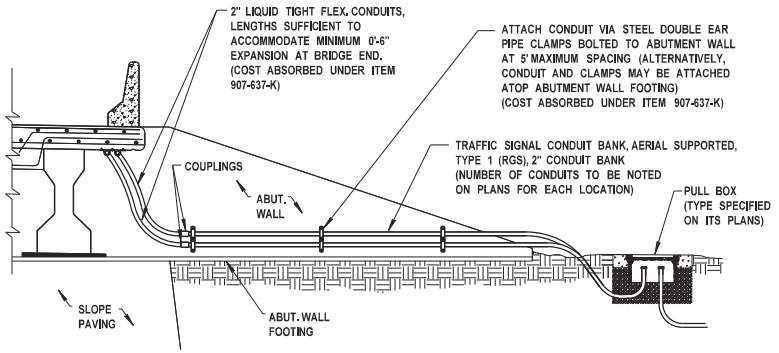

SECTION A-A: TYPICAL CONDUIT ATTACHMENT TO BRIDGE ABUTMENT WALL


NOT TO SCALE

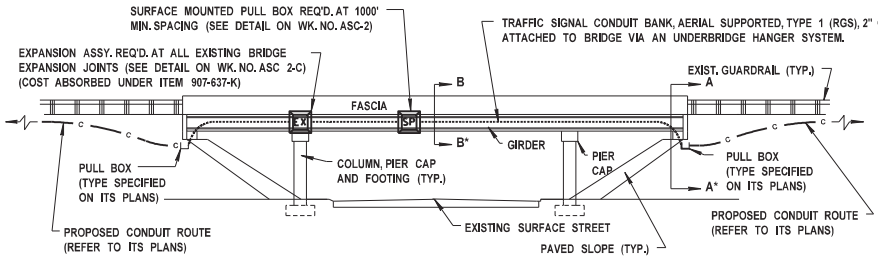

TYPICAL BRIDGE PROFILE

NOT TO SCALE

* SEE TYPICAL SECTIONS THIS SHEET

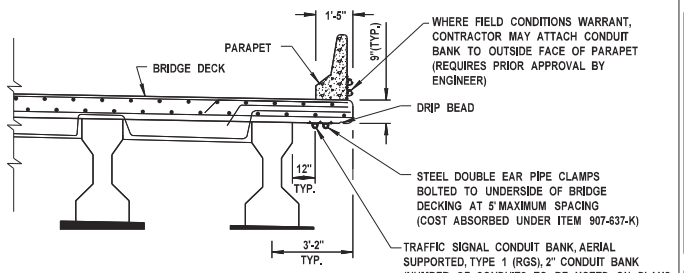

TYPICAL BRIDGE SECTION B-B

NOT TO SCALE

AERIAL SUPPORTED CONDUIT NOTES:

1. REFER TO ITS PLAN SHEETS FOR AERIAL SUPPORTED (i.e., STRUCTURE-ATTACHED) CONDUIT LOCATIONS.
2. THE CONDUIT HANGER SYSTEM IS TO BE SUSPENDED BENEATH THE BRIDGE DECK, CENTERED APPROXIMATELY BETWEEN THE OUTERMOST GIRDER AND BRIDGE PARAPET. ALL CONDUIT, HANGERS, EXPANSIONS, ETC. MUST BE ABOVE THE LOW POINT OF EACH SUPERSTRUCTURE. WHERE BELOW DECK OBSTRUCTIONS OR OTHER FIELD CONDITIONS WARRANT, CONTRACTOR MAY BE ALLOWED TO ATTACH CONDUIT BANK TO OUTER FACE OF BRIDGE PARAPET, PENDING APPROVAL BY THE ENGINEER.
3. NO WELDING OR DRILLING TO STRUCTURAL STEEL WILL BE PERMITTED. ATTACHMENT TO STRUCTURAL STEEL SHALL BE MADE BY CLAMPS, STRAPS, ETC.
4. ALL AERIAL SUPPORTED CONDUIT SHALL BE 2" TYPE 1 (RGS) UNLESS OTHERWISE NOTED ON PLANS, EXCEPT FOR SHORT SEGMENTS OF 2" LIQUID TIGHT FLEXIBLE CONDUIT TO BE USED AT BRIDGE ABUTMENTS, EXISTING BRIDGE EXPANSION JOINTS, AND AS INDICATED IN THE PLANS.
5. IN ALL CASES, THE CONDUIT SUPPORT SPACING SHALL BE A MAXIMUM OF FIVE (5) FEET.
6. CONDUIT SHALL NOT BE INSTALLED IN A MANNER WHICH OBSTRUCTS EXISTING BRIDGE DECK DRAINS.
7. CORE DRILLING OF EXISTING BRIDGE ABUTMENTS WILL NOT BE ALLOWED, UNLESS SPECIFICALLY REVIEWED AND APPROVED BY THE MDOT BRIDGE DIVISION.

DESIGNED BY:
DETAILED BY:
CHECKED BY:
DATE:

FMS CON: /
PROJECT NO.: - 89 -
COUNTY: HINDS

AERIAL SUPPORTED CONDUIT -- Continued


SHEET ID
ASC-TC

SHEET NO.
3024


Notice to Bidders: Do not use previous version of this sheet.

224 PLAN SHEET

12/3/2024 11:51:14 AM ITS Standard Drawings ORD Format.dgn



ELECTRICAL PULL BOX

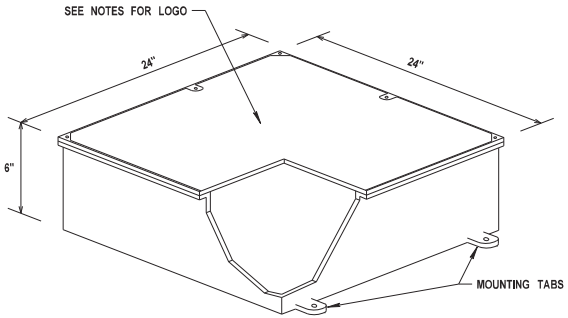

COMMUNICATION PULL BOX

TYPICAL SURFACE MOUNTED PULL BOX ASSEMBLY


NOT TO SCALE

SHOWN AS

SP

NOTES FOR SURFACE MOUNTED PULL BOX:

1. PULL BOX SHALL BE UL RATED TYPE 4X ALUMINUM.
2. ELECTRICAL POWER PULL BOX LIDS SHALL BE LABELED "MDOT ITS ELECTRIC".
3. COMM. PULL BOX LIDS SHALL BE LABELED "MDOT ITS COMMUNICATIONS".
4. DIMENSIONS ARE MINIMUMS.
5. MAXIMUM SPACING BETWEEN PULL BOXES SHALL BE 1000' FOR COMMUNICATION BOXES AND 400' FOR ELECTRICAL BOXES. CONTRACTOR MAY, AT HIS DISCRETION, FURNISH AND INSTALL ADDITIONAL PULL BOXES SHOULD HE DEEM THEM NECESSARY TO PROVIDE A COMPLETE AERIAL CABLE/CONDUIT INSTALLATION.
6. COST OF ALL SURFACE MOUNTED PULL BOXES SHALL BE ABSORBED UNDER ITEM NO. 907-637-K, AERIAL SUPPORTED CONDUIT BANK.

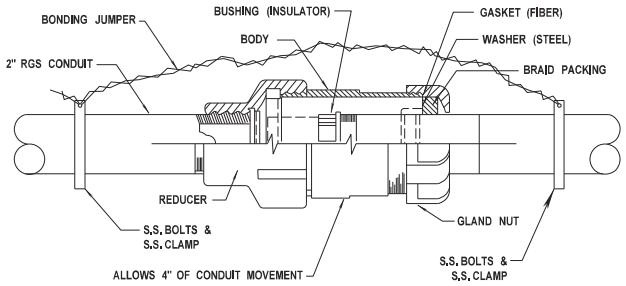

TYPICAL AERIAL CONDUIT EXPANSION ASSEMBLY

NOT TO SCALE

SHOWN AS (IF SHOWN)

EX

NOTES FOR EXPANSION ASSEMBLY:

1. THE DETAIL ABOVE IS TO SERVE AS A GUIDE ONLY. CONTRACTOR SHALL COORDINATE INSTALLATION OF EXPANSION ASSEMBLIES WITH THE MDOT BRIDGE DIVISION TO ENSURE THAT ANTICIPATED BRIDGE EXPANSION IS ADEQUATELY ACCOMMODATED AT EACH JOINT.
2. NO PORTION OF EXPANSION ASSEMBLY SHALL HANG BELOW BRIDGE SUPERSTRUCTURE.
3. COST OF EXPANSION ASSEMBLIES SHALL BE ABSORBED UNDER ITEM NO. 907-637-K, AERIAL SUPPORTED CONDUIT BANK.
4. EXPANSION ASSEMBLIES SHALL BE REQUIRED AT 125' MAX. SPACING AND AT ALL EXISTING BRIDGE EXPANSION JOINTS.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

DESIGNED BY:
DETAILED BY:
CHECKED BY:
DATE:

FMS CON: /
PROJECT NO.: - 90 -
COUNTY: HINDS

-AERIAL SUPPORTED CONDUIT-
TYPE 1 (RGS) CONDUIT
SURFACE MOUNTED PULL BOX
AND EXPANSION DETAILS
(FIBER AND POWER)

SHEET ID
ASC-2C


SHEET NO.
3025

Notice to Contractor -- Construction Plans

225

PLAN SHEET

12/3/2024 11:51:16 AM ITS Standard Drawings ORD Format.dgn

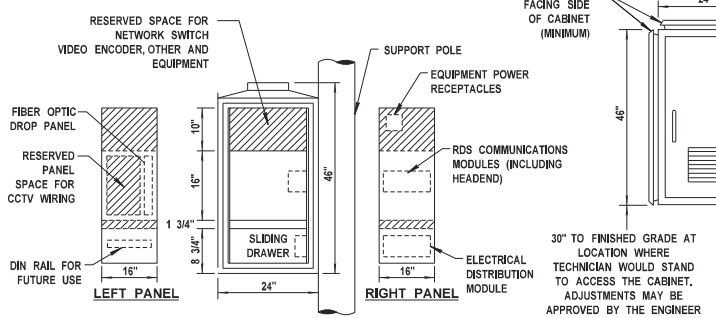


TYPE "B" FIELD CABINET LAYOUT

NOT TO SCALE

NOTES:

1. ALL DIMENSIONS ARE APPROXIMATE.

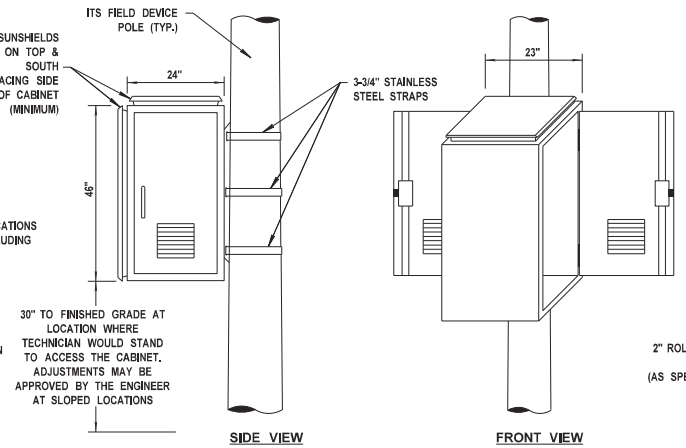



TYPE "B" FIELD CABINET (46" x 24" x 23")

NOT TO SCALE

NOTES:

1. FIELD CABINETS MAY BE ATTACHED TO A NUMBER OF DIFFERENT DEVICES (PROPOSED STRAIN POLES, PROPOSED UTILITY POLES, PROPOSED SPAN SIGN SUPPORTS, EXISTING LIGHT POLES, EXISTING SPAN OR CANTILEVER SIGN SUPPORTS). CABINET MAY ALSO BE INSTALLED AS PAD MOUNTED ON CONCRETE BASE AS SHOWN ON DETAIL THIS SHEET. REFER TO THE ITS PLAN SHEETS AND DETAIL SHEETS FOR SPECIFIC SITE REQUIREMENTS.
2. CABINET DIMENSIONS ARE NOMINAL MINIMUMS. SEE SPECIAL PROVISIONS FOR ADDITIONAL CABINET DETAILS.
3. CABINETS SHALL BE LABELED "MDOT ITS" WITH DEVICE NAME, TYPE, AND NUMBER.
4. STEP REQUIRED FOR NEW INSTALLATIONS (SEE CCTV DETAILS).

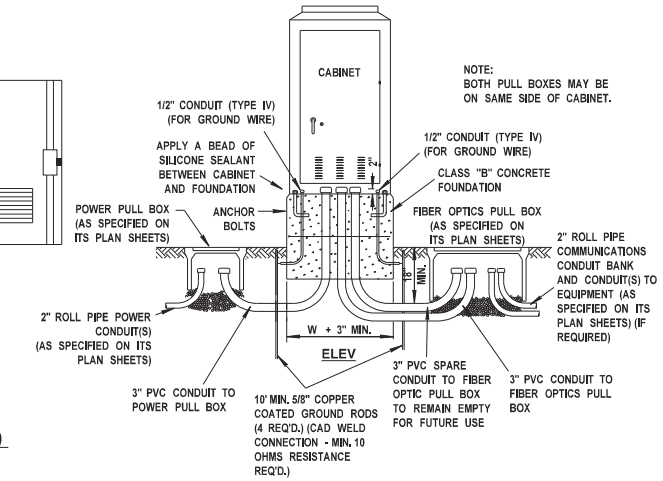

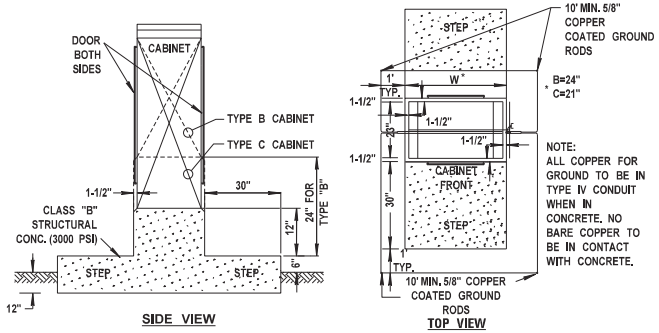


TYPICAL DETAIL OF BASE FOR DMS EQUIPMENT CABINET (TYPE C) - (50" x 21" x 23") AND GROUND MOUNTED TYPE B CABINET (46" x 24" x 23")

NOT TO SCALE

NOTES:

1. DIMENSIONS OF CABINETS TO BE VERIFIED PRIOR TO POURING FOUNDATION. DIMENSIONS SHOWN ABOVE ARE MINIMUMS.
2. ALL CONDUIT BETWEEN PULL BOXES AND THE CABINET FOUNDATION SHALL BE INCLUDED IN THE COST OF OTHER PAY ITEMS AND SHALL NOT BE MEASURED SEPARATELY FOR PAYMENT.

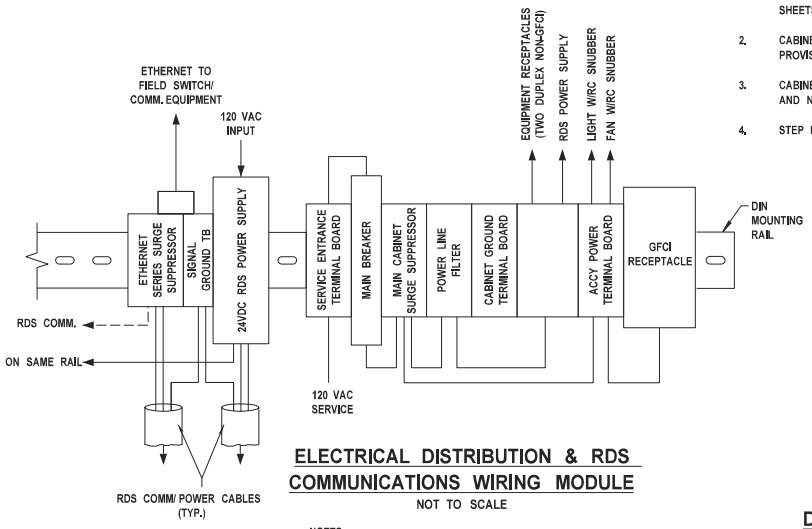


ELECTRICAL DISTRIBUTION & RDS COMMUNICATIONS WIRING MODULE

NOT TO SCALE

NOTES:

1. SOME EQUIPMENT SHOWN MAY NOT BE NECESSARY IF CAMERAS, BDS OR RDS EQUIPMENT IS IP ADDRESSABLE.



DETAIL: PLAN VIEW OF TYPE "B" FIELD CABINET ORIENTATION

NOT TO SCALE

DESIGNED BY:
DETAILED BY:
CHECKED BY:
DATE:

FMS CON: /
PROJECT NO.: - 91 -
COUNTY: HINDS

CABINET DETAILS
STATE PROJECT NO. H.M.T.7684 -- Contract No. 113

SHEET ID
CAB-1


SHEET NO.
3026

Notice to Bidders

226


PLAN SHEET

12/3/2024 11:51:16 AM ITS Standard Drawings ORD Format.dgn

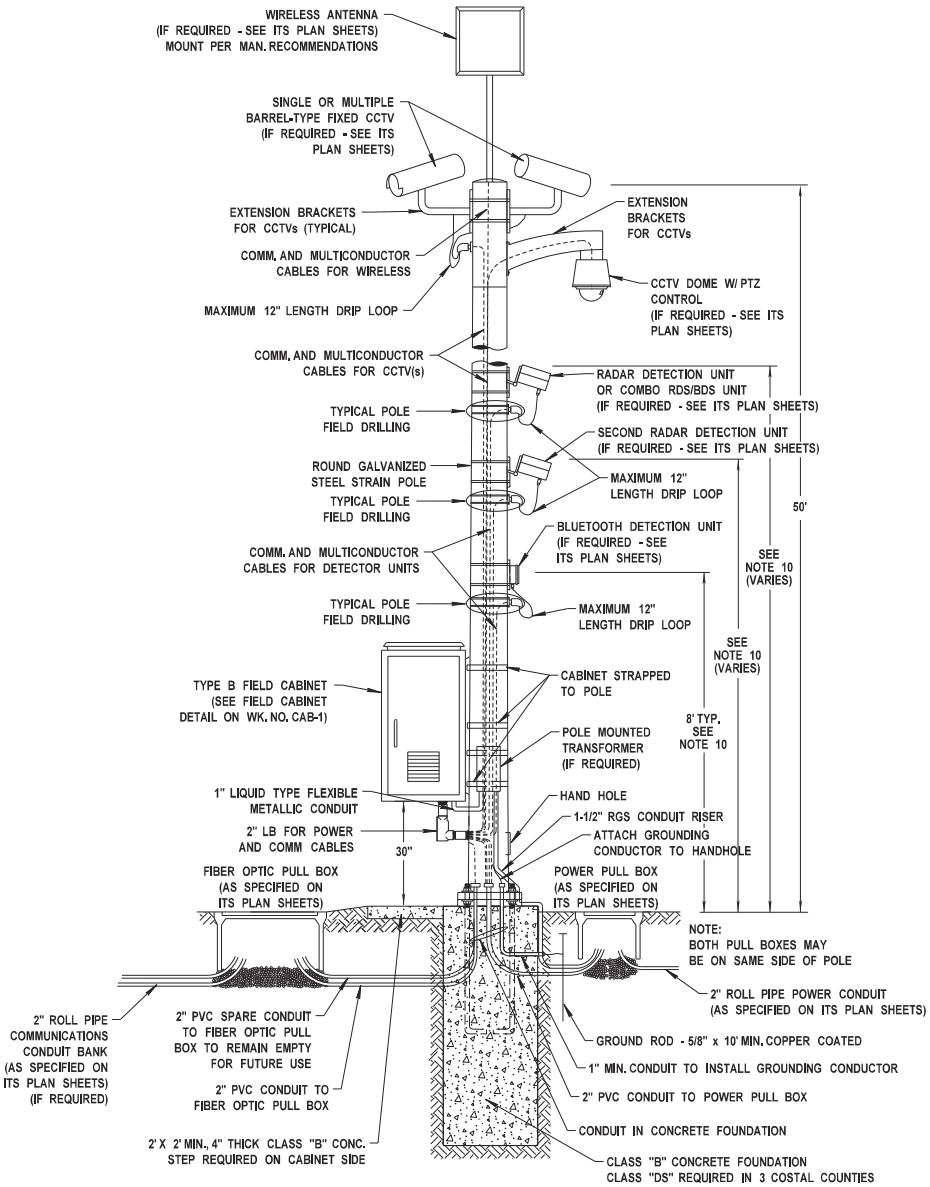

TYPICAL CCTV(s) ON 50' CAMERA POLE WITH DETECTORS AND WIRELESS

NOT TO SCALE

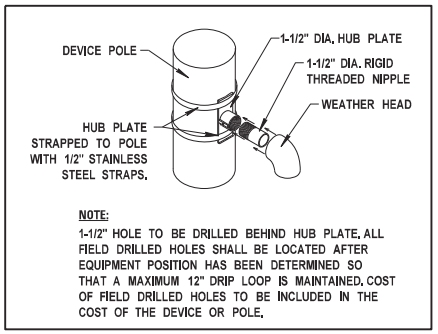

TYPICAL POLE FIELD DRILLING

NOT TO SCALE

NOTES:

1. THE CONTRACTOR SHALL SUBMIT FOUR (4) SETS OF LAYOUT/SHOP DRAWINGS OF THE POLE AND ITS COMPONENTS (INCLUDING THE PLAN OF ATTACHMENT) TO ITS PROJECT ENGINEER FOR REVIEW AND APPROVAL. ALL DRAWINGS SHALL BE STAMPED BY A PROFESSIONAL ENGINEER REGISTERED IN THE STATE OF MISSISSIPPI. ELECTRONIC SUBMITTALS ARE ACCEPTABLE.
2. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE FOUNDATION DESIGN AND SHALL SUBMIT TWO (2) COPIES OF THE DESIGN CALCULATIONS TO ITS PROJECT ENGINEER FOR REVIEW AND APPROVAL. ALL DRAWINGS SHALL BE STAMPED BY A PROFESSIONAL ENGINEER REGISTERED IN THE STATE OF MISSISSIPPI. ELECTRONIC SUBMITTALS ARE ACCEPTABLE.
3. SUPPORTS AND FOUNDATIONS ARE SHOWN FOR ILLUSTRATIVE PURPOSES ONLY. FOUNDATIONS AND ATTACHMENTS SHALL BE DESIGNED BY THE CONTRACTOR AS SPECIFIED ABOVE AND STAMPED BY A PROFESSIONAL ENGINEER REGISTERED IN THE STATE OF MISSISSIPPI. SEE SPECIAL PROVISIONS AND STANDARD SPECIFICATIONS AND DRAWINGS FOR FURTHER INFORMATION.
4. ALL EQUIPMENT CONNECTIONS SHALL BE MADE ACCORDING TO MANUFACTURER'S RECOMMENDATIONS AND APPROVED BY THE ENGINEER.
5. THE TOP OF THE FOUNDATION SHALL NOT PROJECT OVER 4" MAX. ABOVE THE GROUND LINE.
6. ALL CONDUIT BETWEEN PULL BOXES AND THE POLE FOUNDATION SHALL BE INCLUDED IN THE COST OF OTHER PAY ITEMS AND SHALL NOT BE MEASURED SEPARATELY FOR PAYMENT.
7. COMMUNICATION / POWER CABLES USED FOR CCTV, RDS, AND BDS FROM NETWORK SWITCH TO EQUIPMENT SHALL BE COST ABSORBED.
8. ALL GROUNDING CABLES AND EQUIPMENT SHALL BE COST ABSORBED. REFER TO SECTION 722.09 FOR MORE INFORMATION.
9. BOND RGS CONDUIT TO POLE GROUND ROD.
10. DETECTION UNIT MOUNTING HEIGHTS SHALL BE PER MANUFACTURERS RECOMMENDATIONS BASED ON SITE CONDITIONS, OFFSET, AND NUMBER OF LANES MONITORED.

DESIGNED BY:
DETAILED BY:
CHECKED BY:
DATE:

FMS CON: /
PROJECT NO.: - 92 -
COUNTY: HINDS

CCTV DETAILS:
CAMERA POLE WITH DETECTORS AND WIRELESS MOUNTING DETAILS


SHEET ID
CCTV1

SHEET NO.
3027


227

PLAN SHEET


12/3/2024 11:51:17 AM ITS Standard Drawings ORD Format.dgn

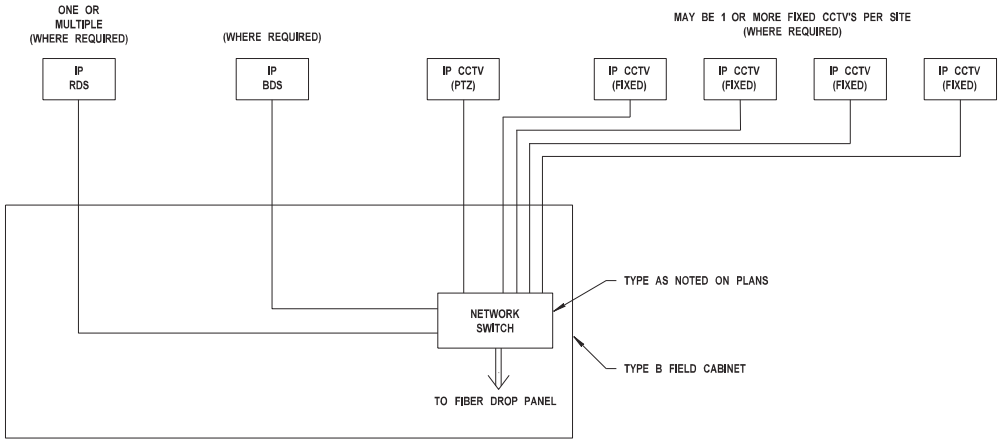


TYPICAL CCTV, BDS, AND RDS SITE - FIBER

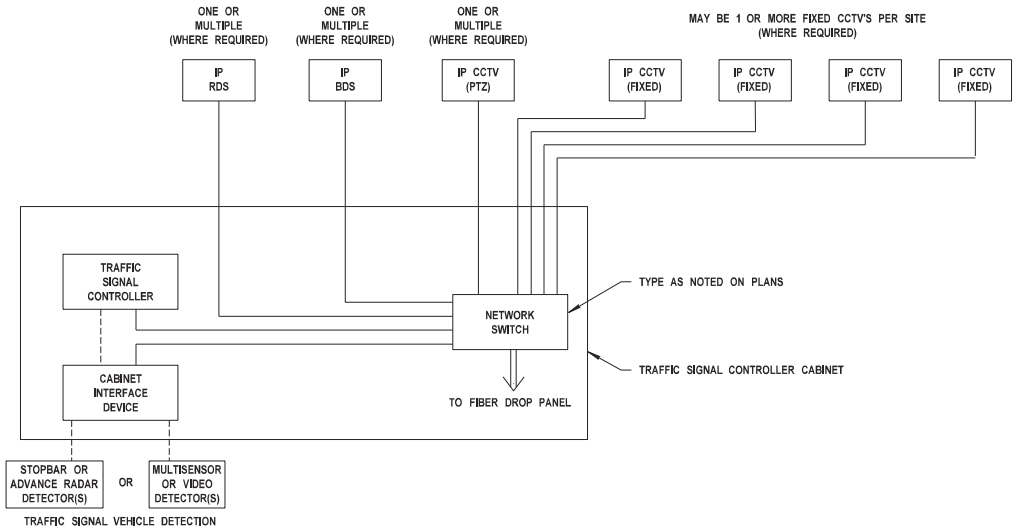

TYPICAL TRAFFIC SIGNAL WITH NETWORKABLE DETECTION AND CCTV, BDS, AND / OR RDS SITE - FIBER

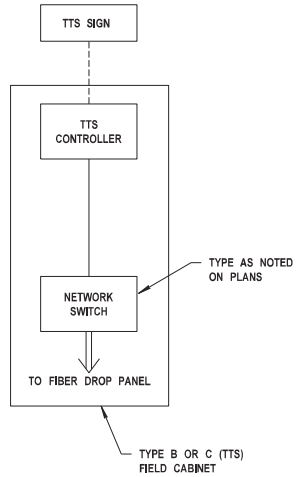

TYPICAL TTS SITE



TYPICAL DMS SITE

LEGEND

----- MFG. SPECIFIED DATA CABLE

——— CAT 6 ETHERNET CABLE / COMPOSITE TYPE CABLE

Notice to Bidders - 93 - Continued

ITS EQUIPMENT DETAILS


DESIGNED BY:
DETAILED BY:
CHECKED BY:
DATE:

FMS CON: /
PROJECT NO.:
COUNTY: HINDS


SHEET ID
SHEET NO. 3028

12/3/2024 11:51:26 AM ITS Standard Drawings ORD Format.dgn PLAN SHEET

228



PLAN VIEW

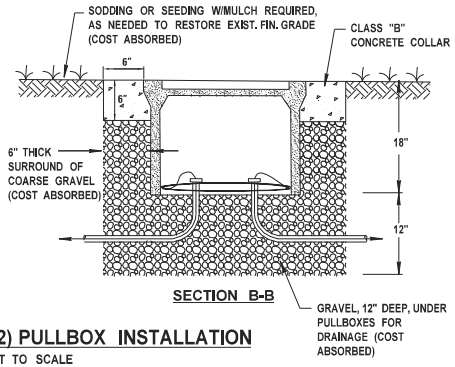

SECTION B-B

ELECTRICAL (TYPE 2) PULLBOX INSTALLATION

NOT TO SCALE


PRECAST CLASS "B" CONCRETE, CAST IRON, COMPOSOLITE, OR APPROVED EQUAL

NOMINAL MINIMUM DIMENSIONS

TYPE (min. nom. dims.)	W	L	D	LOGO
2 (13 in. x 24 in.)	13"	24"	18"	MDOT ITS ELECTRICAL

TYPE 2 PULLBOX NOTES:

1. NOMINAL PULLBOX DIMENSIONS: 25"(L) x 15"(W) x 18"(D)
2. GRAVEL, 12" DEEP, IS REQUIRED UNDER PULLBOXES FOR DRAINAGE (COST ABSORBED).
3. CONCRETE COLLAR, 6" x 6", IS REQUIRED FOR PULLBOXES PLACED IN SOIL (COST ABSORBED).
4. "MDOT ITS ELECTRICAL" LOGO REQUIRED.
5. COVERS SHALL BOLT DOWN.
6. PULL BOXES AND COVERS SHALL BE TIER 22 - 22,500-POUND DESIGN LOAD, 33,750-POUND TEST LOAD.

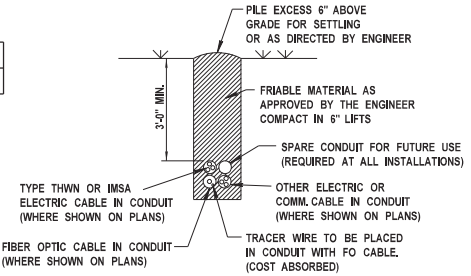


TRENCHING DETAIL - TYPICAL CONDUIT BANK

NOT TO SCALE

ELECTRIC AND/OR FIBER OPTIC CABLE INSTALLATIONS (# OF CONDUITS AND CABLES AS SHOWN ON PLANS)

CONDUIT INSTALLATION NOTES:

1. IN SOME CASES, CONTRACTOR SHALL HAVE THE OPTION TO INSTALL CONDUIT BY DIRECTIONAL BORING OR PLOWING. SEE WK. NO. GN-ITS FOR ADDITIONAL DETAILS.
2. SEPARATE PULL BOXES SHALL BE PROVIDED FOR POWER SUPPLY AND COMM. CABLES. WHERE SHOWN ON THE PLANS, TYPE 2 PULL BOXES WILL BE PROVIDED FOR POWER SUPPLY CABLES, AND TYPE 4 OR 5 PULL BOXES WILL BE PROVIDED FOR COMM. CABLES. POWER AND COMM. CABLES SHALL NOT BE INSTALLED WITHIN THE SAME PULL BOX UNLESS OTHERWISE SPECIFICALLY NOTED ON PLANS.
3. ALL CONDUITS TO BE SEALED WITH DUCT PLUG TO PREVENT WATER INTRUSION ONCE CABLE IS INSTALLED. COST TO BE ABSORBED IN CONDUIT PAY ITEMS.

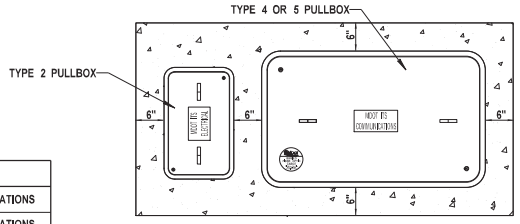


COMBINATION COLLAR FOR TYPE 2 AND 4 OR 5 BOX

NOT TO SCALE

USED WHEN TYPE 2 BOX IS SET ADJACENT TO TYPE 4 OR 5 BOX, MAINTAIN 6" MIN. COLLAR AROUND OUTSIDE OF LARGEST BOX

NOMINAL MINIMUM DIMENSIONS


TYPE (min. nom. dims.)	W	L	D	LOGO
4 (24 in. x 36 in.)	24"	36"	24"	MDOT ITS COMMUNICATIONS
5 (30 in. x 48 in.)	30"	48"	24"	MDOT ITS COMMUNICATIONS



SECTION C-C


TYPE 5 FIBER OPTIC PULLBOXES MUST BE USED AT ALL LOCATIONS WHERE TRUNK SPLICING IS REQUIRED IN THE PULLBOX.

TYPE 4 OR TYPE 5 FIBER OPTIC PULLBOXES MAY BE USED WHERE NO TRUNK SPLICING IS REQUIRED (AS SHOWN ON PLANS).




TRENCHING DETAIL - TYPICAL CONDUIT BANK


NOT TO SCALE



TOP VIEW



FRONT VIEW



FIBER OPTIC (TYPES 4 AND 5) PULLBOX NOTES:

1. NOTCHES SHALL BE PROVIDED FOR REMOVING THE COVER. COVER BOLTS SHALL BE TAMPER-RESISTANT.
2. COVER TO HAVE ROUGHENED TOP SURFACE.
3. LOGO (MDOT ITS COMMUNICATIONS) IS TO BE INSCRIBED ON TOP OF THE COVER.
4. PULL BOXES AND COVERS SHALL BE TIER 22 - 22,500-POUND DESIGN LOAD, 33,750-POUND TEST LOAD.
5. INSTALL STRUTS AND SPLICE CLOSURE INSIDE ALL TYPE 5 FIBER OPTIC PULLBOXES (COST ABSORBED).
6. WHERE PULLBOX IS INSTALLED OVER RUN OF EXISTING CONDUIT, EXISTING CONDUITS SHALL BE CUT AND COUPLED TO NEW LARGE RADIUS (6" MIN.) BENDS AS REQUIRED. (COST ABSORBED).

FIBER OPTIC (TYPE 4 OR 5) PULLBOX INSTALLATION

NOT TO SCALE

PRECAST CLASS "B" CONCRETE, CAST IRON, COMPOSOLITE, OR APPROVED EQUAL

PULLBOX GENERAL NOTES:

1. CONDUIT FOR FIBER OPTIC CABLE REQUIRED TO UTILIZE LARGE RADIUS BENDS (MINIMUM RADIUS 6") NO ELBOW JOINTS ALLOWED.
2. WHEN EXISTING PULLBOXES ARE TO BE REPLACED BY LARGER FIBER OPTIC PULLBOXES, THE COST OF REMOVAL, BACKFILL, SIDEWALK, ETC. TO BE COST ABSORBED.
3. THE COST OF ALL MODIFICATIONS, ADJUSTMENTS, MATERIALS, MOUNTING HARDWARE, ETC. TO BE ABSORBED IN OTHER ITEMS, UNLESS A DIRECT PAY ITEM IS PROVIDED.

BURIED FIBER OPTIC CABLE
Call Before You Dig
(601) 359-1454
LOCATION 0000

FIBER OPTIC PULLBOX LABEL

NOTES:

1. LABEL PROVIDED BY MDOT ITS DEPARTMENT INSTALLED BY CONTRACTOR ON COVER OF ALL COMMUNICATIONS PULLBOXES.
2. PULL BOX LOCATION LABELS TO BE NUMBERED IN SEQUENTIAL ORDER WITHIN THE PROJECT.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

DESIGNED BY:
DETAILED BY:
CHECKED BY:
DATE:

FMS CON: /
PROJECT NO.: - 94 -
COUNTY: HINDS

FIBER OPTIC DETAILS
PULLBOX AND CONDUIT
TRENCHING DETAILS


Notice to Bidders
Addendum No. 4
Contract No. 307784 -- Contract ID 180094

SHEET ID
FO1
SHEET NO.
3029

229


PLAN SHEET

12/3/2024 11:51:27 AM ITS Standard Drawings ORD Format.dgn




RISER SEALING BUSHING FOR FIBER OPTIC CABLE


NOTE:
TOP OF BUSHING SHALL BE APPROXIMATELY 11" BELOW MESSENGER ATTACHMENT HEIGHT.




FIBER ENTRANCE TO EXISTING STEEL POLES

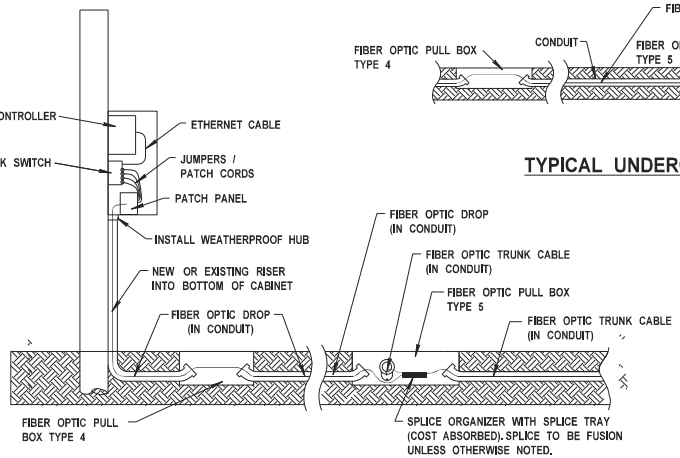


UNDERGROUND ENTRANCE FOR EMBEDDED STEEL, CONCRETE, OR WOOD POLE INTO POLE MOUNTED CABINET (EXTERNAL SPLICE)




TYPICAL UNDERGROUND SPLICE

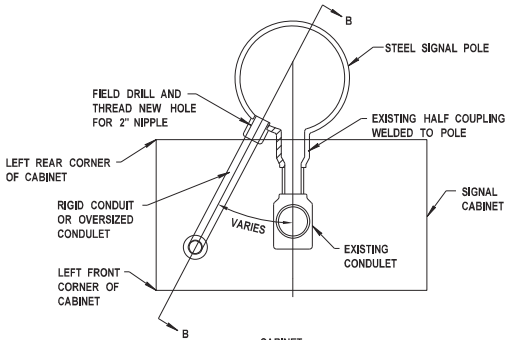




CONDUIT ENTRANCE DETAIL (EXISTING CABINET)

NOTE: TO BE USED ONLY WHEN SPARE CONDUIT IS NOT AVAILABLE.

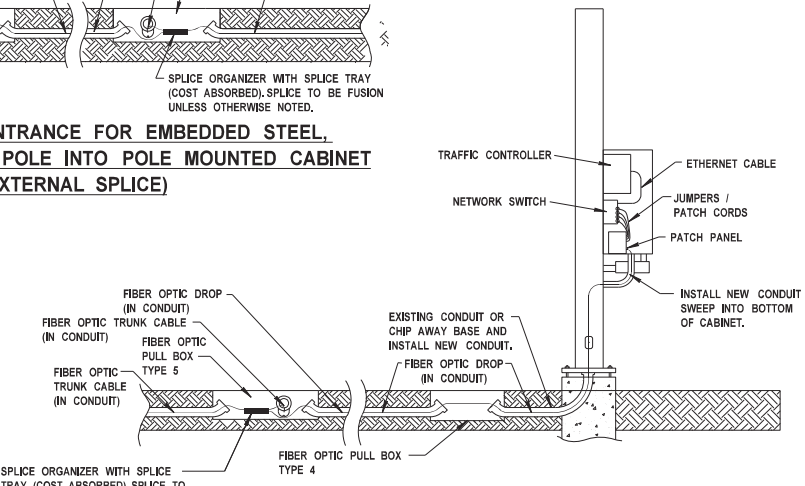


UNDERGROUND ENTRANCE FOR STEEL POLE INTO POLE MOUNTED CABINET (EXTERNAL SPLICE)



DETAIL OF NEW CONDUIT SWEEP INTO BOTTOM OF POLE MOUNTED CABINET ON STEEL POLE

NOTE:
ALL MODIFICATIONS, ADJUSTMENTS, MATERIALS, ETC, TO BE COST ABSORBED, UNLESS OTHERWISE NOTED.

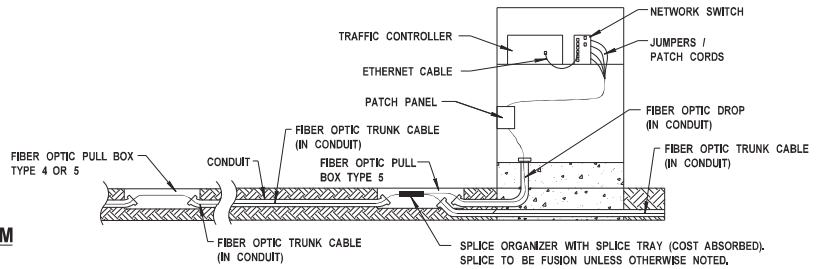

UNDERGROUND ENTRANCE INTO BASE MOUNTED CABINET (EXTERNAL SPLICE)


DESIGNED BY:
DETAILED BY:
CHECKED BY:
DATE:
FMS CON: /
PROJECT NO.: - 95 -
COUNTY: HINDS
FIBER OPTIC DETAILS
STANDARD DRAWING NO. TS-804
SHEET ID
F8.2
SHEET NO.
3030

Notice to Bidders -- Contract ID: 110784

230

PLAN SHEET

12/3/2024 11:51:28 AM ITS Standard Drawings ORD Format.dgn

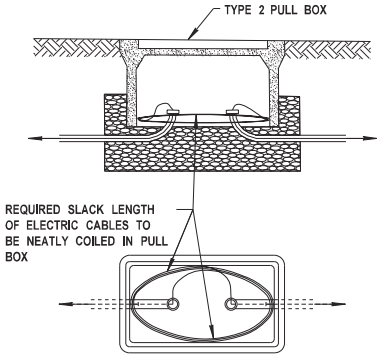

CABLE MANAGEMENT IN ELECTRICAL (TYPE 2) PULL BOX


NOT TO SCALE

TYPICAL CABLE COIL INSTALLATION GUIDE


(FEET OF COIL LENGTH PER ENTERING CABLE)

CABLE TYPE	TYPE 2 PULL BOX	TYPE 4 PULL BOX ON TRUNK	TYPE 4 PULL BOX ON DROP	TYPE 5 PULL BOX
FIBER OPTIC CABLES (TRUNK)		25		200
FIBER OPTIC CABLES (DROP)			10	100
ELECTRICAL SERVICE CONDUCTORS	10			
VDS LEAD-IN CABLE			10	
RDS COMM CABLE		20	20	20
DMS COMM CABLE			10	

NOTE: SEE SPECIAL PROVISION 907-661 FOR ADDITIONAL INFORMATION

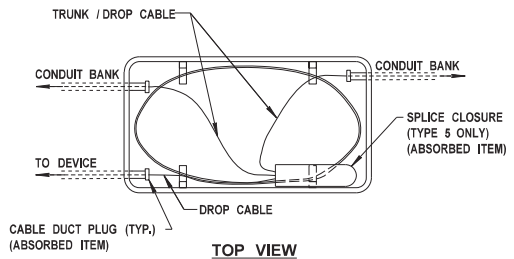

TOP VIEW

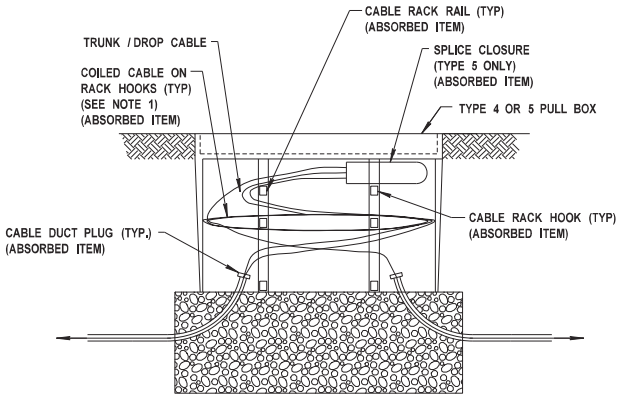

SIDE VIEW

CABLE MANAGEMENT IN FIBER OPTIC (TYPE 4 OR 5) PULL BOX

NOT TO SCALE

NOTES:

1. FIBER TRUNK AND DROP CABLE SHALL BE COILED TOGETHER. EACH RDS COMM CABLE SHALL BE COILED SEPARATELY AND SUPPORTED ON RACK HOOKS.
2. CONDUIT MAY ENTER EITHER SIDE OF THE PULL BOX (RATHER THAN THROUGH BOTTOM) WHERE FIELD CONDITIONS WARRANT.

Notice to Bidders - Contract ID 220084

DEPARTMENT OF TRANSPORTATION MISSISSIPPI

MDOT MISSISSIPPI DEPARTMENT OF TRANSPORTATION

DESIGNED BY:
DETAILED BY:
CHECKED BY:
DATE:

FMS CON: /
PROJECT NO.: - 96 -
COUNTY: HINDS

FIBER OPTIC DETAILS
FIBER OPTIC DETAILS


SHEET ID
FO-23

SHEET NO.
3031

231

PLAN SHEET

12/3/2024 11:51:29 AM ITS Standard Drawings ORD Format.dgn

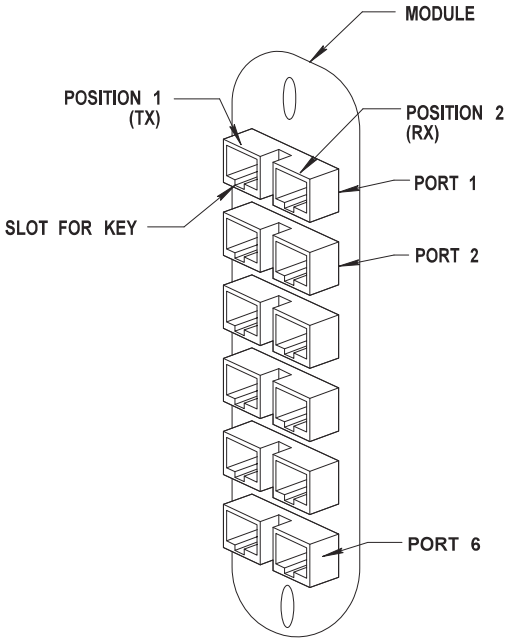


Module Detail

Trunk Cable Termination Cabinet


Cable				Cable Trunk Beginning				Cable Trunk Ending			
Tube	Fiber Color	Fiber Number	Module	FDC Port	Position	Ref	Module	FDC Port	Position	Ref
Blue	Blue	1	A	1	1	TX	A	1	1	RX
	Orange	2	A	1	2	RX	A	1	2	TX
	Green	3	A	2	1	TX	A	2	1	RX
	Brown	4	A	2	2	RX	A	2	2	TX
	Slate	5	A	3	1	TX	A	3	1	RX
	White	6	A	3	2	RX	A	3	2	TX
	Red	7	A	4	1	TX	A	4	1	RX
	Black	8	A	4	2	RX	A	4	2	TX
	Yellow	9	A	5	1	TX	A	5	1	RX
	Violet	10	A	5	2	RX	A	5	2	TX
	Rose	11	A	6	1	TX	A	6	1	RX
	Aqua	12	A	6	2	RX	A	6	2	TX
Orange	Blue	13	B	1	1	TX	B	1	1	RX
	Orange	14	B	1	2	RX	B	1	2	TX
	Green	15	B	2	1	TX	B	2	1	RX
	Brown	16	B	2	2	RX	B	2	2	TX
	Slate	17	B	3	1	TX	B	3	1	RX
	White	18	B	3	2	RX	B	3	2	TX
	Red	19	B	4	1	TX	B	4	1	RX
	Black	20	B	4	2	RX	B	4	2	TX
	Yellow	21	B	5	1	TX	B	5	1	RX
	Violet	22	B	5	2	RX	B	5	2	TX
	Rose	23	B	6	1	TX	B	6	1	RX
	Aqua	24	B	6	2	RX	B	6	2	TX
Green	Blue	25	C	1	1	TX	C	1	1	RX
	Orange	26	C	1	2	RX	C	1	2	TX
	Green	27	C	2	1	TX	C	2	1	RX
	Brown	28	C	2	2	RX	C	2	2	TX
	Slate	29	C	3	1	TX	C	3	1	RX
	White	30	C	3	2	RX	C	3	2	TX
	Red	31	C	4	1	TX	C	4	1	RX
	Black	32	C	4	2	RX	C	4	2	TX
	Yellow	33	C	5	1	TX	C	5	1	RX
	Violet	34	C	5	2	RX	C	5	2	TX
	Rose	35	C	6	1	TX	C	6	1	RX
	Aqua	36	C	6	2	RX	C	6	2	TX

Trunk Cable Termination Cabinet

Cable				Cable Trunk Beginning				Cable Trunk Ending			
Tube	Fiber Color	Fiber Number	Module	FDC Port	Position	Ref	Module	FDC Port	Position	Ref
Brown	Blue	37	D	1	1	TX	D	1	1	RX
	Orange	38	D	1	2	RX	D	1	2	TX
	Green	39	D	2	1	TX	D	2	1	RX
	Brown	40	D	2	2	RX	D	2	2	TX
	Slate	41	D	3	1	TX	D	3	1	RX
	White	42	D	3	2	RX	D	3	2	TX
	Red	43	D	4	1	TX	D	4	1	RX
	Black	44	D	4	2	RX	D	4	2	TX
	Yellow	45	D	5	1	TX	D	5	1	RX
	Violet	46	D	5	2	RX	D	5	2	TX
	Rose	47	D	6	1	TX	D	6	1	RX
	Aqua	48	D	6	2	RX	D	6	2	TX
Slate	Blue	49	E	1	1	TX	E	1	1	RX
	Orange	50	E	1	2	RX	E	1	2	TX
	Green	51	E	2	1	TX	E	2	1	RX
	Brown	52	E	2	2	RX	E	2	2	TX
	Slate	53	E	3	1	TX	E	3	1	RX
	White	54	E	3	2	RX	E	3	2	TX
	Red	55	E	4	1	TX	E	4	1	RX
	Black	56	E	4	2	RX	E	4	2	TX
	Yellow	57	E	5	1	TX	E	5	1	RX
	Violet	58	E	5	2	RX	E	5	2	TX
	Rose	59	E	6	1	TX	E	6	1	RX
	Aqua	60	E	6	2	RX	E	6	2	TX
White	Blue	61	F	1	1	TX	F	1	1	RX
	Orange	62	F	1	2	RX	F	1	2	TX
	Green	63	F	2	1	TX	F	2	1	RX
	Brown	64	F	2	2	RX	F	2	2	TX
	Slate	65	F	3	1	TX	F	3	1	RX
	White	66	F	3	2	RX	F	3	2	TX
	Red	67	F	4	1	TX	F	4	1	RX
	Black	68	F	4	2	RX	F	4	2	TX
	Yellow	69	F	5	1	TX	F	5	1	RX
	Violet	70	F	5	2	RX	F	5	2	TX
	Rose	71	F	6	1	TX	F	6	1	RX
	Aqua	72	F	6	2	RX	F	6	2	TX

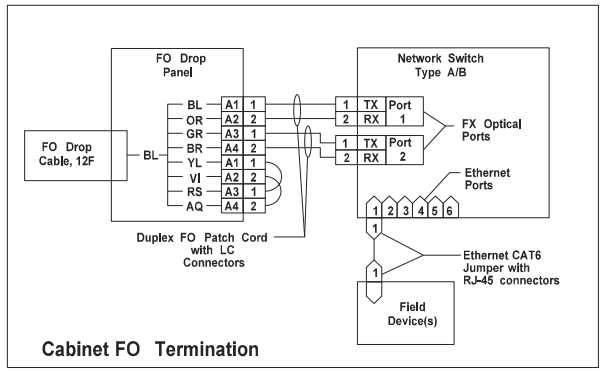


Cabinet FO Termination

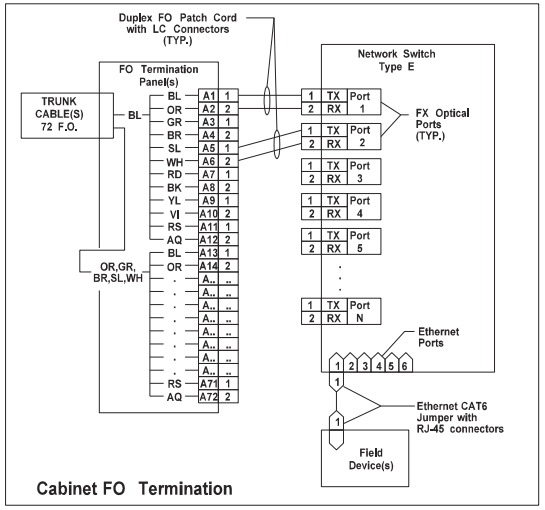

Cabinet FO Termination

Note: These connections are examples. See NTB for more detail.

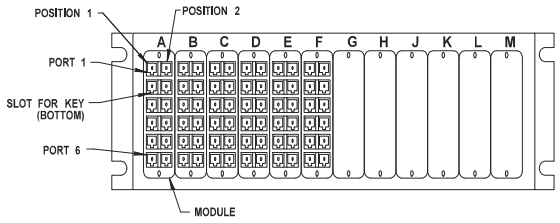

FO Termination Cabinet (Vertical Connector Module)

232

PLAN SHEET

12/3/2024 11:51:29 AM ITS Standard Drawings ORD Format.dgn


DESIGNED BY:
DETAILED BY:
CHECKED BY:
DATE:

FMS CON: /
PROJECT NO.: - 97 -
COUNTY: HINDS

FIBER OPTIC DETAILS
STATE PROJECT NO. 0097-00-784 -- Control No. 107784

SHEET ID
FO-1
SHEET NO.
3032

Notice to Bidders

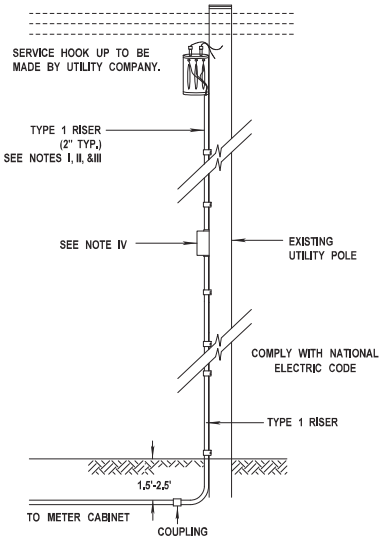

240/120V SINGLE PHASE UNDERGROUND UTILITY DEMARCATION DETAIL

NOT TO SCALE


NOTES FOR UNDERGROUND UTILITY DEMARCATION DETAIL

I. CONDUIT SHALL BE RIGID STEEL CONDUIT (NO EMT). CONDUCTORS AND CONDUIT SHALL BE SIZED AND INSTALLED IN ACCORDANCE WITH NATIONAL ELECTRICAL CODE.

II. COST OF CONDUIT AND CONDUCTORS TO BE ABSORBED IN OTHER ITEMS.

III. INSTALLATION OF CONDUIT AND CONDUCTORS ON EXISTING UTILITY POLE SHALL BE COORDINATED WITH THE PROJECT ENGINEER AND THE LOCAL POWER COMPANY. CONTRACTOR SHALL OBTAIN APPROVAL FROM THE UTILITY COMPANY BEFORE INSTALLATION.

IV. FOR 480 VOLT SERVICE PROVIDE ELECTRIC UTILITY PROVIDER APPROVED LOCKABLE, NON-FUSED DISCONNECT SWITCH ON THE SUPPLY SIDE OF THE METER BASE. IF LOAD DISCONNECT DOES NOT PROVIDE OVERCURRENT PROTECTION PROVIDE SEPARATE OVERCURRENT DEVICE IN ACCORDANCE WITH NATIONAL ELECTRIC CODE ARTICLE 230.91.

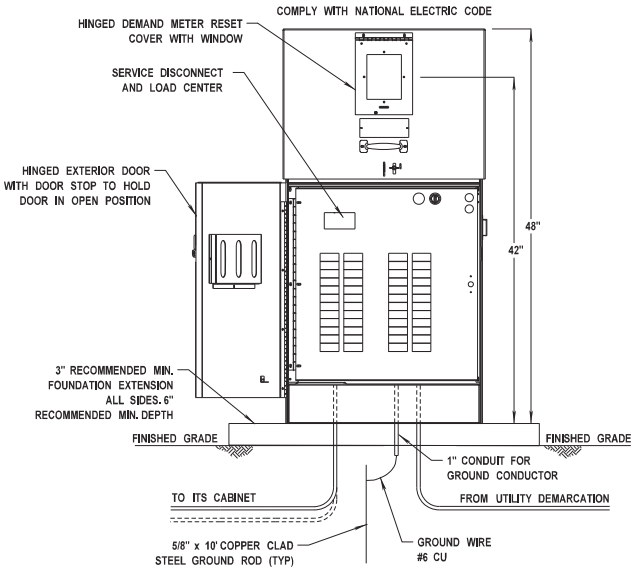

SINGLE PHASE (240/120V AND 480V) METER CABINET DEMARCATION DETAIL

NOT TO SCALE

DETAIL NOTES:

(1) LOCATE METER CABINET WITHIN 100 FEET OF UTILITY DEMARCATION.

(2) LOCATE STEP-DOWN TRANSFORMER WITHIN 15 FEET OF ITS CABINET.

(3) REFER TO PLAN SHEETS FOR QUANTITY AND SIZE OF CONDUIT(S). SERVICE MAY BE REQUIRED TO CONNECT MULTIPLE CABINETS.

(4) CONDUIT SHALL BE SCHEDULE 80 GRAY PVC (WITH UV PROTECTION) OR RIGID STEEL CONDUIT (NO EMT). CONDUCTORS AND CONDUIT SHALL BE SIZED AND INSTALLED IN ACCORDANCE WITH NATIONAL ELECTRIC CODE.

(5) MAIN DISCONNECT CIRCUIT BREAKER OR FUSED DISCONNECT SHALL BE SIZED IN ACCORDANCE WITH NATIONAL ELECTRIC CODE AND BE NEMA TYPE 3R WITH PROVISION TO BE LOCKED IN OPEN OR CLOSED POSITION.

(6) LINE SIDE CIRCUIT BREAKER SHORT CIRCUIT RATING SHALL BE EQUAL OR GREATER THAN THE AVAILABLE INTERRUPTIBLE CAPACITY (AIC) AND SHALL BE RATED AS SERVICE ENTRANCE EQUIPMENT.

(7) ANY UNUSED OR OPEN HOLES IN METER BASE, MAIN DISCONNECT OR DISTRIBUTION PANEL SHALL BE PLUGGED WITH WATERTIGHT PLUGS. SELECT SIZE AND INSTALL IN ACCORDANCE WITH THE NATIONAL ELECTRIC CODE.

(8) COST OF POWER FEED, RACK, TRANSFORMER, CONDUIT, CONDUCTORS, DISCONNECT SWITCH, DISCONNECT FUSES, PANELBOARD, CIRCUIT BREAKERS, AND GROUND TO BE ABSORBED IN OTHER ITEMS.


(9) ALL EQUIPMENT TO BE PROVIDED, SIZED AND INSTALLED IN ACCORDANCE WITH NATIONAL ELECTRIC CODE.

(10) ALL CONDUIT CONNECTIONS TO BE RAINTIGHT

(11) PHYSICAL LOCATION OF POLE AND ANY GUYING AND BRACING (IF NEEDED) SHALL BE APPROVED BY THE ELECTRIC UTILITY PROVIDER.

(12) ANY RECEPTACLE SHALL BE A GROUND FAULT INTERRUPTING TYPE.

(13) TRANSFORMER SHALL BE DESIGNED FOR OUTDOOR INSTALLATION. RATING OF TRANSFORMER SHALL BE SIZED ACCORDING TO PLAN DETAILS.

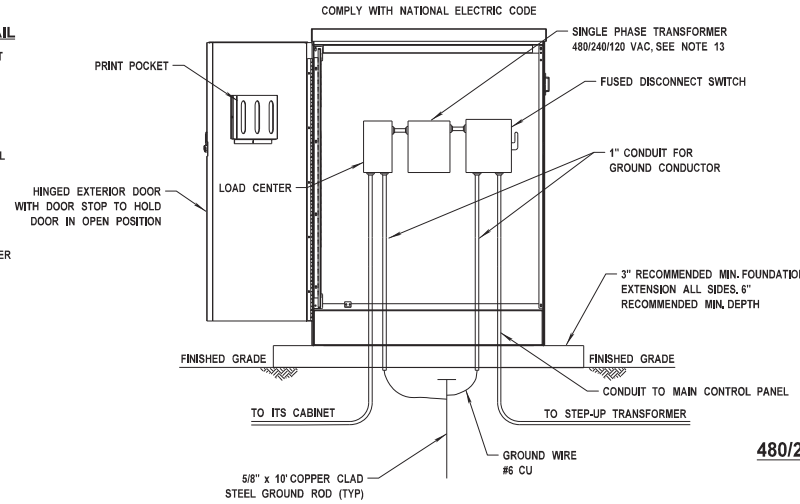

480/240/120V STEP-DOWN TRANSFORMER CABINET DETAIL

NOT TO SCALE

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

DESIGNED BY:
DETAILED BY:
CHECKED BY:
DATE:

FMS CON: /
PROJECT NO.: - 98 -
COUNTY: HINDS

POWER SERVICE CABINET AND POWER SERVICE METER POLE DETAILS


SHEET ID POW-3A

SHEET NO. 3033

Notice: This document is the property of the Mississippi Department of Transportation (MDOT). Unauthorized use is prohibited.


PLAN SHEET

12/3/2024 11:51:50 AM ITS Standard Drawings ORD Format.dgn

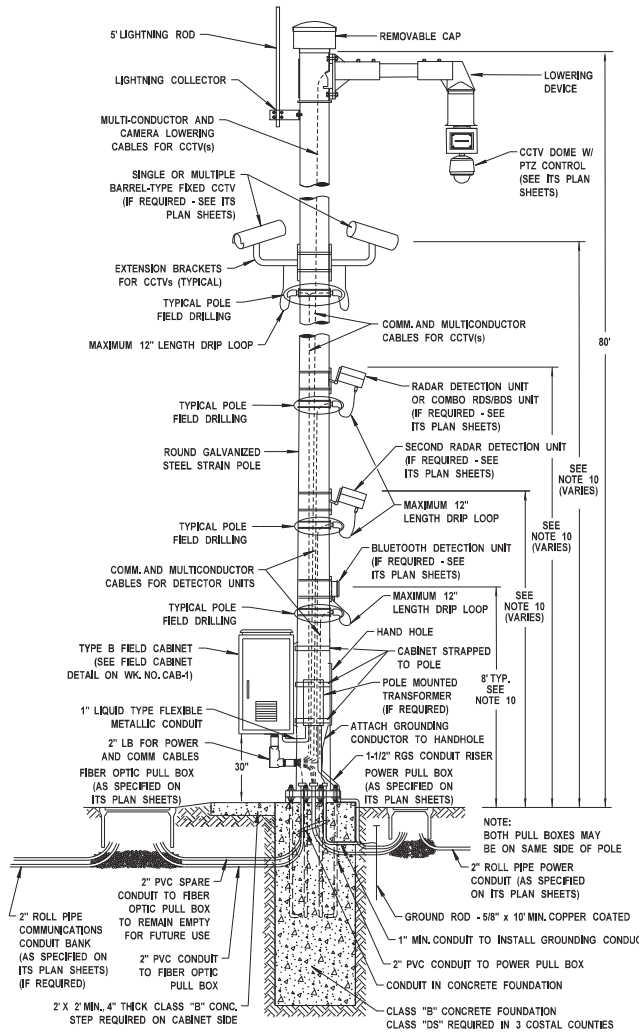


TYPICAL CCTV(s) ON 80' CAMERA POLE WITH CAMERA LOWERING DEVICE AND DETECTORS

NOT TO SCALE

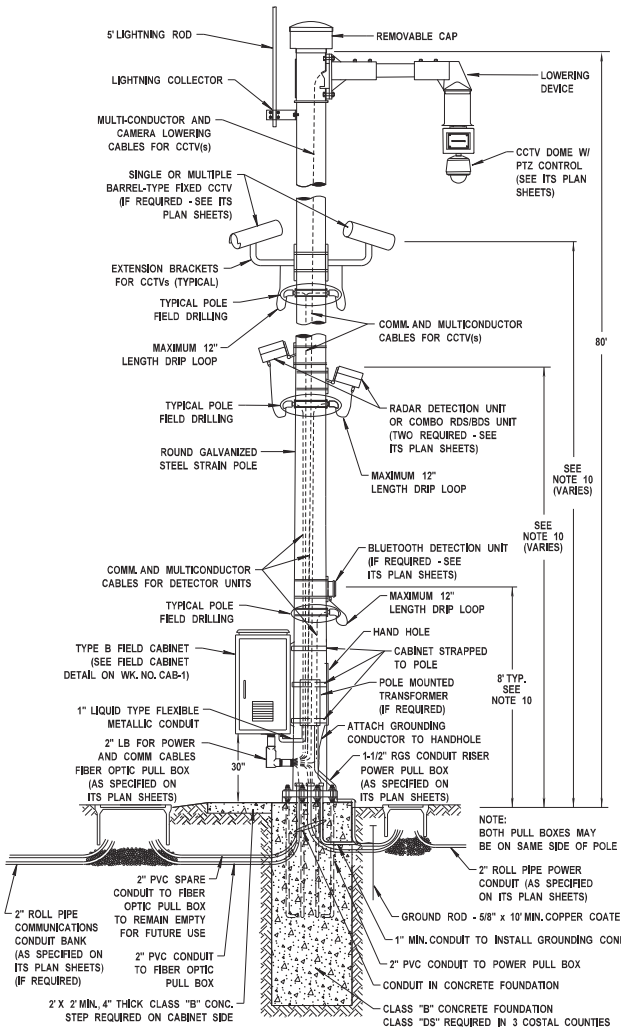

TYPICAL CCTV(s) ON 80' CAMERA POLE WITH CAMERA LOWERING DEVICE AND DETECTORS (DUAL LANES RADAR)

NOT TO SCALE



NOTE:
1-1/2" HOLE TO BE DRILLED BEHIND HUB PLATE. ALL FIELD DRILLED HOLES SHALL BE LOCATED AFTER EQUIPMENT POSITION HAS BEEN DETERMINED SO THAT A MAXIMUM 12" DRIP LOOP IS MAINTAINED. COST OF FIELD DRILLED HOLES TO BE INCLUDED IN THE COST OF THE DEVICE OR POLE.

TYPICAL POLE FIELD DRILLING

NOT TO SCALE

NOTES:

1. THE CONTRACTOR SHALL SUBMIT FOUR (4) SETS OF LAYOUT/SHOP DRAWINGS OF THE POLE AND ITS COMPONENTS (INCLUDING THE PLAN OF ATTACHMENT) TO ITS PROJECT ENGINEER FOR REVIEW AND APPROVAL. ALL DRAWINGS SHALL BE STAMPED BY A PROFESSIONAL ENGINEER REGISTERED IN THE STATE OF MISSISSIPPI. ELECTRONIC SUBMITTALS ARE ACCEPTABLE.
2. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE FOUNDATION DESIGN AND SHALL SUBMIT TWO (2) COPIES OF THE DESIGN CALCULATIONS TO ITS PROJECT ENGINEER FOR REVIEW AND APPROVAL. ALL DRAWINGS SHALL BE STAMPED BY A PROFESSIONAL ENGINEER REGISTERED IN THE STATE OF MISSISSIPPI. ELECTRONIC SUBMITTALS ARE ACCEPTABLE.
3. SUPPORTS AND FOUNDATIONS ARE SHOWN FOR ILLUSTRATIVE PURPOSES ONLY. FOUNDATIONS AND ATTACHMENTS SHALL BE DESIGNED BY THE CONTRACTOR AS SPECIFIED ABOVE AND STAMPED BY A PROFESSIONAL ENGINEER REGISTERED IN THE STATE OF MISSISSIPPI. SEE SPECIAL PROVISIONS AND STANDARD SPECIFICATIONS AND DRAWINGS FOR FURTHER INFORMATION.
4. ALL EQUIPMENT CONNECTIONS SHALL BE MADE ACCORDING TO MANUFACTURER'S RECOMMENDATIONS AND APPROVED BY THE ENGINEER.
5. THE TOP OF THE FOUNDATION SHALL NOT PROJECT OVER 4" MAX. ABOVE THE GROUND LINE.
6. ALL CONDUIT BETWEEN PULL BOXES AND THE POLE FOUNDATION SHALL BE INCLUDED IN THE COST OF OTHER PAY ITEMS AND SHALL NOT BE MEASURED SEPARATELY FOR PAYMENT.
7. COMMUNICATION / POWER CABLES USED FOR CCTV, RDS, AND BDS FROM NETWORK SWITCH TO EQUIPMENT SHALL BE COST ABSORBED.
8. ALL GROUNDING CABLES AND EQUIPMENT SHALL BE COST ABSORBED. REFER TO SECTION 722.09 FOR MORE INFORMATION.
9. BOND RGS CONDUIT TO POLE GROUND ROD.
10. DETECTION UNIT MOUNTING HEIGHTS SHALL BE PER MANUFACTURERS RECOMMENDATIONS BASED ON SITE CONDITIONS, OFFSET, AND NUMBER OF LANES MONITORED.
11. ALL EQUIPMENT MOUNTED ON THE POLE WILL BE PLACED IN SUCH A WAY THAT IT WILL NOT INTERFERE WITH THE CAMERA LOWERING DEVICE.

DESIGNED BY:
DETAILED BY:
CHECKED BY:
DATE:
FMS CON: /
PROJECT NO.: - 99 -
COUNTY:

CCTV DETAILS
TYPICAL CCTV(s) ON 80' CAMERA POLE WITH CAMERA LOWERING DEVICE AND DETECTORS (DUAL LANES RADAR)


SHEET ID
CCTV-8B

SHEET NO.
3034

234

PLAN SHEET

12/3/2024 11:51:23 AM ITS Standard Drawings ORD Format.dgn

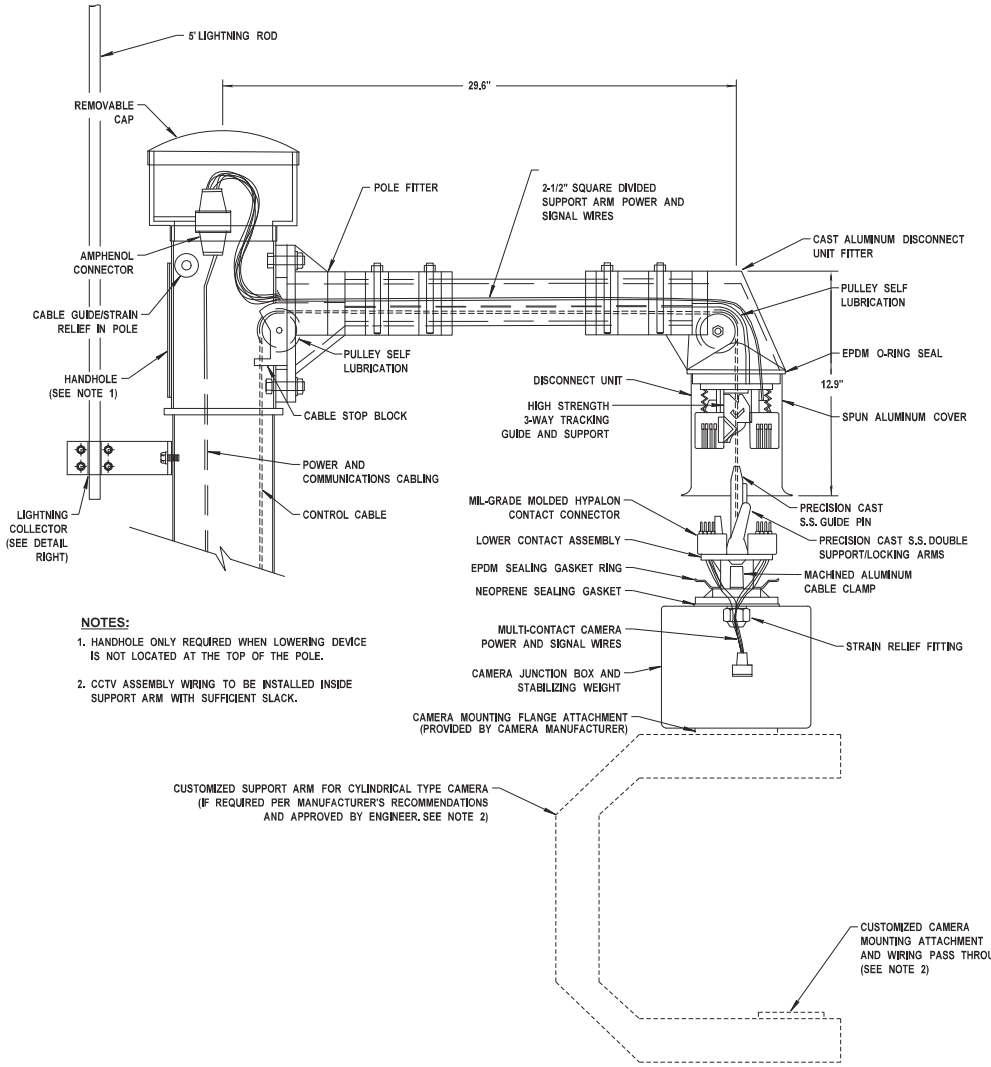


NOTES:

1. HANDHOLE ONLY REQUIRED WHEN LOWERING DEVICE IS NOT LOCATED AT THE TOP OF THE POLE.
2. CCTV ASSEMBLY WIRING TO BE INSTALLED INSIDE SUPPORT ARM WITH SUFFICIENT SLACK.

CAMERA LOWERING DEVICE

NOT TO SCALE

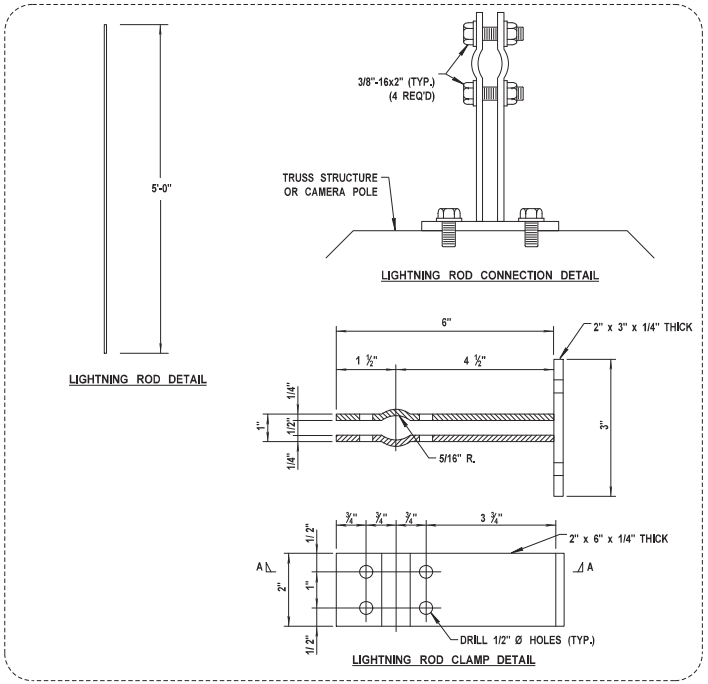

LIGHTNING COLLECTOR DETAILS

NOT TO SCALE

Notice to Bidders: Camera Lowering Device

CCTV DETAILS

DESIGNED BY:
DETAILED BY:
CHECKED BY:
DATE:
FMS CON: /
PROJECT NO.: - 100 -
COUNTY:
SHEET ID
CCTV 9
SHEET NO.
3035

235

PLAN SHEET

12/3/2024 11:51:24 AM ITS Standard Drawings ORD Format.dgn

YAZOO COUNTY - SUMMARY OF QUANTITY SHEET (105530/304000)

Pay Item	Name	UNIT	QTY	*Notes*
907-618-A001	Maintenance of Traffic	LS	1	
620-A001	Mobilization	LS	1	
907-637-H001	Traffic Signal Conduit Bank, Underground, Rolled Pipe, 2 @ 2"	LF	20	***1, 4***
907-637-K001	Traffic Signal Conduit Bank, Aerial Supported, Type 1, 2 @ 2"	LF	480	
907-661-A006	Fiber Optic Cable, Aerial, 72 SM	LF	500	***5, 6***

Notes

1 Quantities may be adjusted based on field conditions

4 Installation may be trenching, plowing, or boring at Contractor's discretion. Bid prices shall be the same regardless of which installation method is used. Trenched or plowed rolled pipe shall be Schedule 40 Pipe or Larger. Bored, Drilled, or Jacked rolled pipe shall be Schedule 80 Pipe or larger.

5 Contractor shall coordinate with MDOT IS Division for all Fiber termination and splicing details. 6 Contractor shall be responsible for submitting as-builts for the newly installed fiber optic cables (including Fiber Trunk and Fiber Drops), ITS Pullboxes with Type, and ITS/Signal Cabinets with an accuracy within 3 feet. All survey data must be provided to MDOT IS Division in both KMZ file and a Shapefile formats. This work shall be cost absorbed under Pay-Item 907-661-A004 & A006 and 907-661-B002.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 - NOTICE TO BIDDERS NO. 7685 **CODE: (SP)**

DATE: **04/22/2026**

SUBJECT: **Cooperation Between Contractors**

PROJECT: **NH-0008-03(050) / 105530301 - Madison County**
CRP-0008-03(050) / 105530302 - Madison County
CRP-0008-03(050) / 105530303 - Hinds County
CRP-0008-03(050) / 105530304 - Yazoo County

The Bidder's attention is hereby called to Subsection 105.07, Cooperation between Contractors, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction.

The Bidder is advised that this project adjoins the following project that may be under construction before the completion of this contract:

NHPP-0008-04(085) / 108150304 – Yazoo County

The Contractor shall cooperate in all respects and shall coordinate construction of all phases of work with the Contractor of the adjoining project. Failure to coordinate work schedules, such as but not limited to lane closures, shall not be reason to modify contract time.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 - NOTICE TO BIDDERS NO. 7686 **CODE: (SP)**

DATE: 04/22/2026

SUBJECT: Temporary Construction Signs

PROJECT: NH-0008-03(050) / 105530301 - Madison County
CRP-0008-03(050) / 105530302 - Madison County
CRP-0008-03(050) / 105530303 - Hinds County
CRP-0008-03(050) / 105530304 - Yazoo County

Bidders are hereby advised of the following regarding the Temporary Construction Signs required:

Should the Bidders elect to install Temporary Construction Signs by first driving short u-channel sections and then bolting the longer, correct height u-channel sections to them, the Bidders are advised that these short sections shall be a minimum of five (5) feet from the ground level when driven and the splice must consist of a minimum of eighteen (18) inches of overlap with a total of four (4) bolts. Bidders are also advised that it is mandatory that these short sections be removed at the completion of the project.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 - NOTICE TO BIDDERS NO. 7687 **CODE: (SP)**

DATE: **04/21/2026**

SUBJECT: **Underground Utilities**

PROJECT: **NH-0008-03(050) / 105530301 - Madison County**
CRP-0008-03(050) / 105530302 - Madison County
CRP-0008-03(050) / 105530303 - Hinds County
CRP-0008-03(050) / 105530304 - Yazoo County

Bidders are hereby advised that utility lines owned and maintained by MDOT may be present within the project limits. These utilities are not located by Mississippi 811. It shall be the Contractor's responsibility to coordinate with MDOT to have the utility lines located and marked prior to beginning work. The Contractor shall give a minimum of three (3) working days of advance notice for locate requests. Also, the Contractor shall be responsible for contacting local public agencies that are not members of Mississippi 811.

Additionally, it shall be the Contractor's responsibility to maintain the utility markings and have the ability to survey the marked utilities and re-establish said utility markings as needed. The Department shall only be responsible for locating and marking the utilities once per Contract.

The contacts for MDOT utility lines are as follows:

Underground Power Lines:
Michael Lee – 601-683-3341 – mlee@mdot.ms.gov
Billy Coward – 601-683-3341 – bcoward@mdot.ms.gov

Underground Communication Lines:
Kerby McFarland – 601-359-7450 – kmcfarland@mdot.ms.gov
Steven Newell – 601-359-7450 – snewell@mdot.ms.gov
Henry Lewis – 601-359-1454 – hlewis@mdot.ms.gov

Underground Signal Lines:
Amrik Singh – 601-359-1454 – asingh@mdot.ms.gov
Kenneth Welch – 601-359-1454 – kwelch@mdot.ms.gov

"General Decision Number: MS20260137 01/02/2026

Superseded General Decision Number: MS20250137

State: Mississippi

Construction Type: Highway

County: Madison County in Mississippi.

HIGHWAY CONSTRUCTION PROJECTS

Modification Number | Publication Date
0 | 01/02/2026

ELEC0480-010 01/01/2025

	Rates	Fringes
TRAFFIC SIGNALIZATION		
Electrician	$ 30.35	11.39

SUMS2010-060 08/04/2014

	Rates	Fringes
CARPENTER (Form Work Only)	$ 12.32	0.00
CEMENT MASON/CONCRETE FINISHER	$ 12.85	0.39
ELECTRICIAN	$ 24.04	5.87
HIGHWAY/PARKING LOT STRIPING: Truck Driver (Line Striping Truck)	$ 10.86	0.00
INSTALLER - GUARDRAIL	$ 12.07	0.00
INSTALLER - SIGN	$ 11.54	0.00
IRONWORKER, REINFORCING	$ 15.52	0.00
LABORER: Common or General, Including Asphalt Raking, Shoveling, Spreading; and Grade Checking	$ 10.38	0.00
LABORER: Flagger	$ 9.91	0.00
LABORER: Luteman	$ 12.88	0.00
LABORER: Mason Tender - Cement/Concrete	$ 11.27	0.00
LABORER: Pipelayer	$ 13.44	0.00
LABORER: Laborer-Cones/ Barricades/Barrels - Setter/Mover/Sweeper	$ 10.26	0.00
OPERATOR: Asphalt Spreader	$ 14.71	0.00
OPERATOR: Backhoe/Excavator/Trackhoe	$ 14.37	0.00

OPERATOR: Bobcat/Skid Steer/Skid Loader.....$ 11.64 0.00

OPERATOR: Broom/Sweeper.....$ 10.48 0.00

OPERATOR: Bulldozer.....$ 13.88 0.00

OPERATOR: Concrete Saw.....$ 15.50 0.00

OPERATOR: Crane.....$ 15.00 0.00

OPERATOR: Distributor.....$ 10.95 0.00

OPERATOR: Grader/Blade.....$ 14.28 0.00

OPERATOR: Grinding/Grooving Machine.....$ 15.90 0.00

OPERATOR: Loader.....$ 13.28 0.00

OPERATOR: Mechanic.....$ 13.00 0.00

OPERATOR: Milling Machine.....$ 14.68 0.00

OPERATOR: Mixer.....$ 14.25 0.00

OPERATOR: Oiler.....$ 12.35 0.00

OPERATOR: Paver (Asphalt, Aggregate, and Concrete).....$ 11.74 0.00

OPERATOR: Roller (All Types)....$ 10.85 0.00

OPERATOR: Scraper.....$ 12.25 0.00

OPERATOR: Tractor.....$ 10.56 0.00

TRUCK DRIVER: Flatbed Truck.....$ 14.06 0.00

TRUCK DRIVER: Lowboy Truck.....$ 12.08 0.00

TRUCK DRIVER: Mechanic.....$ 13.00 0.00

TRUCK DRIVER: Water Truck.....$ 10.00 0.00

TRUCK DRIVER: Dump Truck (All Types).....$ 11.02 0.00

TRUCK DRIVER: Semi/Trailer Truck.....$ 12.50 0.00

WELDERS - Receive rate prescribed for craft performing operation to which welding is incidental.

==========

Note: Executive Order (EO) 13706, Establishing Paid Sick Leave for Federal Contractors applies to all contracts subject to the Davis-Bacon Act for which the contract is awarded (and any solicitation was issued) on or after January 1, 2017. If this contract is covered by the EO, the contractor must provide employees with 1 hour of paid sick leave for every 30 hours they work, up to 56 hours of paid sick leave each year.

Employees must be permitted to use paid sick leave for their own illness, injury or other health-related needs, including preventive care; to assist a family member (or person who is like family to the employee) who is ill, injured, or has other health-related needs, including preventive care; or for reasons resulting from, or to assist a family member (or person who is like family to the employee) who is a victim of, domestic violence, sexual assault, or stalking. Additional information on contractor requirements and worker protections under the EO is available at https://www.dol.gov/agencies/whd/government-contracts.

Note: Executive Order 13658 generally applies to contracts subject to the Davis-Bacon Act that were awarded on or between January 1, 2015 and January 29, 2022, and that have not been renewed or extended on or after January 30, 2022. Executive Order 13658 does not apply to contracts subject only to the Davis-Bacon Related Acts regardless of when they were awarded. If a contract is subject to Executive Order 13658, the contractor must pay all covered workers at least $13.30 per hour (or the applicable wage rate listed on this wage determination, if it is higher) for all hours spent performing on the contract in 2025. The applicable Executive Order minimum wage rate will be adjusted annually.   Additional information on contractor requirements and worker protections under Executive Order 13658 is available at www.dol.gov/whd/govcontracts.

Unlisted classifications needed for work not included within the scope of the classifications listed may be added after award only as provided in the labor standards contract clauses (29CFR 5.5 (a) (1) (iii)).

The body of each wage determination lists the classifications and wage rates that have been found to be prevailing for the type(s) of construction and geographic area covered by the wage determination. The classifications are listed in alphabetical order under rate identifiers indicating whether the particular rate is a union rate (current union negotiated rate), a survey rate, a weighted union average rate, a state adopted rate, or a supplemental classification rate.

Union Rate Identifiers

A four-letter identifier beginning with characters other than ""SU"", ""UAVG"", ?SA?, or ?SC? denotes that a union rate was prevailing for that classification in the survey. Example: PLUM0198-005 07/01/2024. PLUM is an identifier of the union whose collectively bargained rate prevailed in the survey for this classification, which in this example would be Plumbers. 0198 indicates the local union number or district council number where applicable, i.e., Plumbers Local 0198. The next number, 005 in the example, is an internal number used in processing the wage determination. The date, 07/01/2024 in the example, is the effective date of the most current negotiated rate.

Union prevailing wage rates are updated to reflect all changes over time that are reported to WHD in the rates in the collective bargaining agreement (CBA) governing the classification.

Union Average Rate Identifiers

The UAVG identifier indicates that no single rate prevailed for those classifications, but that 100% of the data reported for the classifications reflected union rates. EXAMPLE: UAVG-OH-0010 01/01/2024. UAVG indicates that the rate is a weighted union average rate. OH indicates the State of Ohio. The next number, 0010 in the example, is an internal number used in producing the wage determination. The date, 01/01/2024 in the example, indicates the date the wage determination was updated to reflect the most current union average rate.

A UAVG rate will be updated once a year, usually in January, to reflect a weighted average of the current rates in the collective bargaining agreements on which the rate is based.

Survey Rate Identifiers

The ""SU"" identifier indicates that either a single non-union rate prevailed (as defined in 29 CFR 1.2) for this classification in the survey or that the rate was derived by computing a weighted average rate based on all the rates reported in the survey for that classification. As a weighted average rate includes all rates reported in the survey, it may include both union and non-union rates. Example: SUFL2022-007 6/27/2024. SU indicates the rate is a single non-union prevailing rate or a weighted average of survey data for that classification. FL indicates the State of Florida. 2022 is the year of the survey on which these classifications and rates are based. The next number, 007 in the example, is an internal number used in producing the wage determination. The date, 6/27/2024 in the example, indicates the survey completion date for the classifications and rates under that identifier.

?SU? wage rates typically remain in effect until a new survey is conducted. However, the Wage and Hour Division (WHD) has the discretion to update such rates under 29 CFR 1.6(c)(1).

State Adopted Rate Identifiers

The ""SA"" identifier indicates that the classifications and prevailing wage rates set by a state (or local) government were adopted under 29 C.F.R 1.3(g)-(h). Example: SAME2023-007 01/03/2024. SA reflects that the rates are state adopted. ME refers to the State of Maine. 2023 is the year during which the state completed the survey on which the listed classifications and rates are based. The next number, 007 in the example, is an internal number used in producing the wage determination. The date, 01/03/2024 in the example, reflects the date on which the classifications and rates under the ?SA? identifier took effect under state law in the state from which the rates were adopted.

WAGE DETERMINATION APPEALS PROCESS

1) Has there been an initial decision in the matter? This can be:

a) a survey underlying a wage determination
b) an existing published wage determination
c) an initial WHD letter setting forth a position on a wage determination matter
d) an initial conformance (additional classification

and rate) determination

On survey related matters, initial contact, including requests for summaries of surveys, should be directed to the WHD Branch of Wage Surveys. Requests can be submitted via email to davisbaconinfo@dol.gov or by mail to:

Branch of Wage Surveys
Wage and Hour Division
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

Regarding any other wage determination matter such as conformance decisions, requests for initial decisions should be directed to the WHD Branch of Construction Wage Determinations. Requests can be submitted via email to BCWD-Office@dol.gov or by mail to:

Branch of Construction Wage Determinations
Wage and Hour Division
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

2) If an initial decision has been issued, then any interested party (those affected by the action) that disagrees with the decision can request review and reconsideration from the Wage and Hour Administrator (See 29 CFR Part 1.8 and 29 CFR Part 7). Requests for review and reconsideration can be submitted via email to dba.reconsideration@dol.gov or by mail to:

Wage and Hour Administrator
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

The request should be accompanied by a full statement of the interested party's position and any information (wage payment data, project description, area practice material, etc.) that the requestor considers relevant to the issue.

3) If the decision of the Administrator is not favorable, an interested party may appeal directly to the Administrative Review Board (formerly the Wage Appeals Board). Write to:

Administrative Review Board
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210.

==========

END OF GENERAL DECISION
"

"General Decision Number: MS20260134 01/02/2026

Superseded General Decision Number: MS20250134

State: Mississippi

Construction Type: Highway

County: Hinds County in Mississippi.

HIGHWAY CONSTRUCTION PROJECTS

Modification Number | Publication Date
0 | 01/02/2026

ELEC0480-010 01/01/2025

	Rates	Fringes
TRAFFIC SIGNALIZATION		
Electrician	$ 30.35	11.39

SUMS2010-057 08/04/2014

	Rates	Fringes
CARPENTER (Form Work Only)	$ 13.73	0.00
CEMENT MASON/CONCRETE FINISHER	$ 13.93	0.00
ELECTRICIAN	$ 24.04	5.87
HIGHWAY/PARKING LOT STRIPING: Truck Driver (Line Striping Truck)	$ 11.81	0.00
INSTALLER - GUARDRAIL	$ 12.07	0.00
INSTALLER - SIGN	$ 12.13	0.00
IRONWORKER, REINFORCING	$ 15.47	0.00
LABORER: Common or General, Including Asphalt Raking, Shoveling, Spreading; and Grade Checking	$ 10.32	0.00
LABORER: Flagger	$ 9.69	0.00
LABORER: Luteman	$ 12.88	0.00
LABORER: Mason Tender - Cement/Concrete	$ 12.11	0.00
LABORER: Pipelayer	$ 13.44	0.00
LABORER: Laborer-Cones/ Barricades/Barrels - Setter/Mover/Sweeper	$ 10.39	0.00
OPERATOR: Asphalt Spreader	$ 14.71	0.00
OPERATOR: Backhoe/Excavator/Trackhoe	$ 16.01	0.00

OPERATOR: Bobcat/Skid Steer/Skid Loader.....$ 11.64 0.00

OPERATOR: Broom/Sweeper.....$ 9.75 0.00

OPERATOR: Bulldozer.....$ 13.87 0.00

OPERATOR: Concrete Saw.....$ 14.38 0.00

OPERATOR: Crane.....$ 21.33 0.00

OPERATOR: Distributor.....$ 10.25 0.00

OPERATOR: Grader/Blade.....$ 14.31 0.00

OPERATOR: Grinding/Grooving Machine.....$ 15.90 0.00

OPERATOR: Loader.....$ 11.96 0.00

OPERATOR: Mechanic.....$ 15.20 0.00

OPERATOR: Milling Machine.....$ 14.68 0.00

OPERATOR: Mixer.....$ 14.25 0.00

OPERATOR: Oiler.....$ 12.13 0.00

OPERATOR: Paver (Asphalt, Aggregate, and Concrete).....$ 11.59 0.00

OPERATOR: Roller (All Types)....$ 11.53 0.00

OPERATOR: Scraper.....$ 12.25 0.00

OPERATOR: Tractor.....$ 11.81 0.00

TRUCK DRIVER: Flatbed Truck.....$ 14.06 0.00

TRUCK DRIVER: Lowboy Truck.....$ 12.56 0.00

TRUCK DRIVER: Mechanic.....$ 13.00 0.00

TRUCK DRIVER: Water Truck.....$ 10.00 0.00

TRUCK DRIVER: Dump Truck (All Types).....$ 11.39 0.00

TRUCK DRIVER: Semi/Trailer Truck.....$ 14.60 0.00

WELDERS - Receive rate prescribed for craft performing operation to which welding is incidental.

==========

Note: Executive Order (EO) 13706, Establishing Paid Sick Leave for Federal Contractors applies to all contracts subject to the Davis-Bacon Act for which the contract is awarded (and any solicitation was issued) on or after January 1, 2017. If this contract is covered by the EO, the contractor must provide employees with 1 hour of paid sick leave for every 30 hours they work, up to 56 hours of paid sick leave each year.

Employees must be permitted to use paid sick leave for their own illness, injury or other health-related needs, including preventive care; to assist a family member (or person who is like family to the employee) who is ill, injured, or has other health-related needs, including preventive care; or for reasons resulting from, or to assist a family member (or person who is like family to the employee) who is a victim of, domestic violence, sexual assault, or stalking. Additional information on contractor requirements and worker protections under the EO is available at https://www.dol.gov/agencies/whd/government-contracts.

Note: Executive Order 13658 generally applies to contracts subject to the Davis-Bacon Act that were awarded on or between January 1, 2015 and January 29, 2022, and that have not been renewed or extended on or after January 30, 2022. Executive Order 13658 does not apply to contracts subject only to the Davis-Bacon Related Acts regardless of when they were awarded. If a contract is subject to Executive Order 13658, the contractor must pay all covered workers at least $13.30 per hour (or the applicable wage rate listed on this wage determination, if it is higher) for all hours spent performing on the contract in 2025. The applicable Executive Order minimum wage rate will be adjusted annually.   Additional information on contractor requirements and worker protections under Executive Order 13658 is available at www.dol.gov/whd/govcontracts.

Unlisted classifications needed for work not included within the scope of the classifications listed may be added after award only as provided in the labor standards contract clauses (29CFR 5.5 (a) (1) (iii)).

The body of each wage determination lists the classifications and wage rates that have been found to be prevailing for the type(s) of construction and geographic area covered by the wage determination. The classifications are listed in alphabetical order under rate identifiers indicating whether the particular rate is a union rate (current union negotiated rate), a survey rate, a weighted union average rate, a state adopted rate, or a supplemental classification rate.

Union Rate Identifiers

A four-letter identifier beginning with characters other than ""SU"", ""UAVG"", ?SA?, or ?SC? denotes that a union rate was prevailing for that classification in the survey. Example: PLUM0198-005 07/01/2024. PLUM is an identifier of the union whose collectively bargained rate prevailed in the survey for this classification, which in this example would be Plumbers. 0198 indicates the local union number or district council number where applicable, i.e., Plumbers Local 0198. The next number, 005 in the example, is an internal number used in processing the wage determination. The date, 07/01/2024 in the example, is the effective date of the most current negotiated rate.

Union prevailing wage rates are updated to reflect all changes over time that are reported to WHD in the rates in the collective bargaining agreement (CBA) governing the classification.

Union Average Rate Identifiers

The UAVG identifier indicates that no single rate prevailed for those classifications, but that 100% of the data reported for the classifications reflected union rates. EXAMPLE: UAVG-OH-0010 01/01/2024. UAVG indicates that the rate is a weighted union average rate. OH indicates the State of Ohio. The next number, 0010 in the example, is an internal number used in producing the wage determination. The date, 01/01/2024 in the example, indicates the date the wage determination was updated to reflect the most current union average rate.

A UAVG rate will be updated once a year, usually in January, to reflect a weighted average of the current rates in the collective bargaining agreements on which the rate is based.

Survey Rate Identifiers

The ""SU"" identifier indicates that either a single non-union rate prevailed (as defined in 29 CFR 1.2) for this classification in the survey or that the rate was derived by computing a weighted average rate based on all the rates reported in the survey for that classification. As a weighted average rate includes all rates reported in the survey, it may include both union and non-union rates. Example: SUFL2022-007 6/27/2024. SU indicates the rate is a single non-union prevailing rate or a weighted average of survey data for that classification. FL indicates the State of Florida. 2022 is the year of the survey on which these classifications and rates are based. The next number, 007 in the example, is an internal number used in producing the wage determination. The date, 6/27/2024 in the example, indicates the survey completion date for the classifications and rates under that identifier.

?SU? wage rates typically remain in effect until a new survey is conducted. However, the Wage and Hour Division (WHD) has the discretion to update such rates under 29 CFR 1.6(c)(1).

State Adopted Rate Identifiers

The ""SA"" identifier indicates that the classifications and prevailing wage rates set by a state (or local) government were adopted under 29 C.F.R 1.3(g)-(h). Example: SAME2023-007 01/03/2024. SA reflects that the rates are state adopted. ME refers to the State of Maine. 2023 is the year during which the state completed the survey on which the listed classifications and rates are based. The next number, 007 in the example, is an internal number used in producing the wage determination. The date, 01/03/2024 in the example, reflects the date on which the classifications and rates under the ?SA? identifier took effect under state law in the state from which the rates were adopted.

WAGE DETERMINATION APPEALS PROCESS

1) Has there been an initial decision in the matter? This can be:

a) a survey underlying a wage determination
b) an existing published wage determination
c) an initial WHD letter setting forth a position on a wage determination matter
d) an initial conformance (additional classification

and rate) determination

On survey related matters, initial contact, including requests for summaries of surveys, should be directed to the WHD Branch of Wage Surveys. Requests can be submitted via email to davisbaconinfo@dol.gov or by mail to:

Branch of Wage Surveys
Wage and Hour Division
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

Regarding any other wage determination matter such as conformance decisions, requests for initial decisions should be directed to the WHD Branch of Construction Wage Determinations. Requests can be submitted via email to BCWD-Office@dol.gov or by mail to:

Branch of Construction Wage Determinations
Wage and Hour Division
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

2) If an initial decision has been issued, then any interested party (those affected by the action) that disagrees with the decision can request review and reconsideration from the Wage and Hour Administrator (See 29 CFR Part 1.8 and 29 CFR Part 7). Requests for review and reconsideration can be submitted via email to dba.reconsideration@dol.gov or by mail to:

Wage and Hour Administrator
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

The request should be accompanied by a full statement of the interested party's position and any information (wage payment data, project description, area practice material, etc.) that the requestor considers relevant to the issue.

3) If the decision of the Administrator is not favorable, an interested party may appeal directly to the Administrative Review Board (formerly the Wage Appeals Board). Write to:

Administrative Review Board
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210.

==========

END OF GENERAL DECISION
"

"General Decision Number: MS20260123 01/02/2026

Superseded General Decision Number: MS20250123

State: Mississippi

Construction Type: Highway

County: Yazoo County in Mississippi.

HIGHWAY CONSTRUCTION PROJECTS

Modification Number | Publication Date
0 | 01/02/2026

SUMS2010-046 08/04/2014

	Rates	Fringes
CARPENTER (Form Work Only)	$ 12.26	0.12
CARPENTER, Excludes Form Work	$ 14.21	0.00
CEMENT MASON/CONCRETE FINISHER	$ 13.23	0.00
ELECTRICIAN	$ 22.64	7.73
HIGHWAY/PARKING LOT STRIPING: Truck Driver (Line Striping Truck)	$ 12.63	0.00
INSTALLER - GUARDRAIL	$ 11.42	0.00
INSTALLER - SIGN	$ 11.56	0.00
IRONWORKER, REINFORCING	$ 16.43	0.00
LABORER: Common or General, Including Asphalt Raking, Shoveling, Spreading and Concrete Work	$ 10.92	0.00
LABORER: Flagger	$ 9.83	0.00
LABORER: Grade Checker	$ 10.46	0.00
LABORER: Landscape	$ 9.82	0.00
LABORER: Mason Tender - Cement/Concrete	$ 11.69	0.00
LABORER: Pipelayer	$ 13.13	0.00
LABORER: Laborer-Cones/ Barricades/Barrels - Setter/Mover/Sweeper	$ 10.53	0.00
OPERATOR: Asphalt Spreader	$ 16.13	0.00
OPERATOR: Backhoe/Excavator/Trackhoe	$ 13.28	0.00
OPERATOR: Broom/Sweeper	$ 10.17	0.00

OPERATOR: Bulldozer.....$ 15.69 0.00

OPERATOR: Concrete Saw.....$ 13.60 0.00

OPERATOR: Crane.....$ 16.00 0.00

OPERATOR: Distributor.....$ 11.70 0.00

OPERATOR: Drill.....$ 19.22 0.00

OPERATOR: Grader/Blade.....$ 13.84 0.00

OPERATOR: Loader.....$ 11.73 0.00

OPERATOR: Mechanic.....$ 16.28 0.00

OPERATOR: Milling Machine.....$ 15.38 0.00

OPERATOR: Mixer.....$ 14.85 0.00

OPERATOR: Oiler.....$ 13.08 0.48

OPERATOR: Paver (Asphalt,
Aggregate, and Concrete).....$ 13.01 0.00

OPERATOR: Piledriver.....$ 15.13 0.00

OPERATOR: Roller (All Types)....$ 12.14 0.00

OPERATOR: Scraper.....$ 12.63 0.00

OPERATOR: Tractor.....$ 9.98 0.00

OPERATOR: Trencher.....$ 15.00 0.00

TRUCK DRIVER: Flatbed Truck.....$ 13.29 0.00

TRUCK DRIVER: Lowboy Truck.....$ 12.49 0.00

TRUCK DRIVER: Mechanic.....$ 12.35 0.00

TRUCK DRIVER: Off the Road
Truck.....$ 12.31 0.00

TRUCK DRIVER: Water Truck.....$ 13.15 0.00

TRUCK DRIVER: Dump Truck (All
Types).....$ 13.58 0.00

TRUCK DRIVER: Semi/Trailer
Truck.....$ 17.34 0.00

WELDERS - Receive rate prescribed for craft performing operation to which welding is incidental.

==========

Note: Executive Order (EO) 13706, Establishing Paid Sick Leave for Federal Contractors applies to all contracts subject to the Davis-Bacon Act for which the contract is awarded (and any solicitation was issued) on or after January 1, 2017. If this contract is covered by the EO, the contractor must provide employees with 1 hour of paid sick leave for every 30 hours they work, up to 56 hours of paid sick leave each year.

Employees must be permitted to use paid sick leave for their own illness, injury or other health-related needs, including preventive care; to assist a family member (or person who is like family to the employee) who is ill, injured, or has other health-related needs, including preventive care; or for reasons resulting from, or to assist a family member (or person who is like family to the employee) who is a victim of, domestic violence, sexual assault, or stalking. Additional information on contractor requirements and worker protections under the EO is available at https://www.dol.gov/agencies/whd/government-contracts.

Note: Executive Order 13658 generally applies to contracts subject to the Davis-Bacon Act that were awarded on or between January 1, 2015 and January 29, 2022, and that have not been renewed or extended on or after January 30, 2022. Executive Order 13658 does not apply to contracts subject only to the Davis-Bacon Related Acts regardless of when they were awarded. If a contract is subject to Executive Order 13658, the contractor must pay all covered workers at least $13.30 per hour (or the applicable wage rate listed on this wage determination, if it is higher) for all hours spent performing on the contract in 2025. The applicable Executive Order minimum wage rate will be adjusted annually. Additional information on contractor requirements and worker protections under Executive Order 13658 is available at www.dol.gov/whd/govcontracts.

Unlisted classifications needed for work not included within the scope of the classifications listed may be added after award only as provided in the labor standards contract clauses (29CFR 5.5 (a) (1) (iii)).

The body of each wage determination lists the classifications and wage rates that have been found to be prevailing for the type(s) of construction and geographic area covered by the wage determination. The classifications are listed in alphabetical order under rate identifiers indicating whether the particular rate is a union rate (current union negotiated rate), a survey rate, a weighted union average rate, a state adopted rate, or a supplemental classification rate.

Union Rate Identifiers

A four-letter identifier beginning with characters other than ""SU"", ""UAVG"", ?SA?, or ?SC? denotes that a union rate was prevailing for that classification in the survey. Example: PLUM0198-005 07/01/2024. PLUM is an identifier of the union whose collectively bargained rate prevailed in the survey for this classification, which in this example would be Plumbers. 0198 indicates the local union number or district council number where applicable, i.e., Plumbers Local 0198. The next number, 005 in the example, is an internal number used in processing the wage determination. The date, 07/01/2024 in the example, is the effective date of the most current negotiated rate.

Union prevailing wage rates are updated to reflect all changes over time that are reported to WHD in the rates in the collective bargaining agreement (CBA) governing the classification.

Union Average Rate Identifiers

The UAVG identifier indicates that no single rate prevailed for those classifications, but that 100% of the data reported for the classifications reflected union rates. EXAMPLE: UAVG-OH-0010 01/01/2024. UAVG indicates that the rate is a weighted union average rate. OH indicates the State of Ohio. The next number, 0010 in the example, is an internal number used in producing the wage determination. The date, 01/01/2024 in the example, indicates the date the wage determination was updated to reflect the most current union average rate.

A UAVG rate will be updated once a year, usually in January, to reflect a weighted average of the current rates in the collective bargaining agreements on which the rate is based.

Survey Rate Identifiers

The ""SU"" identifier indicates that either a single non-union rate prevailed (as defined in 29 CFR 1.2) for this classification in the survey or that the rate was derived by computing a weighted average rate based on all the rates reported in the survey for that classification. As a weighted average rate includes all rates reported in the survey, it may include both union and non-union rates. Example: SUFL2022-007 6/27/2024. SU indicates the rate is a single non-union prevailing rate or a weighted average of survey data for that classification. FL indicates the State of Florida. 2022 is the year of the survey on which these classifications and rates are based. The next number, 007 in the example, is an internal number used in producing the wage determination. The date, 6/27/2024 in the example, indicates the survey completion date for the classifications and rates under that identifier.

?SU? wage rates typically remain in effect until a new survey is conducted. However, the Wage and Hour Division (WHD) has the discretion to update such rates under 29 CFR 1.6(c)(1).

State Adopted Rate Identifiers

The ""SA"" identifier indicates that the classifications and prevailing wage rates set by a state (or local) government were adopted under 29 C.F.R 1.3(g)-(h). Example: SAME2023-007 01/03/2024. SA reflects that the rates are state adopted. ME refers to the State of Maine. 2023 is the year during which the state completed the survey on which the listed classifications and rates are based. The next number, 007 in the example, is an internal number used in producing the wage determination. The date, 01/03/2024 in the example, reflects the date on which the classifications and rates under the ?SA? identifier took effect under state law in the state from which the rates were adopted.

WAGE DETERMINATION APPEALS PROCESS

1) Has there been an initial decision in the matter? This can be:

a) a survey underlying a wage determination
b) an existing published wage determination
c) an initial WHD letter setting forth a position on a wage determination matter
d) an initial conformance (additional classification

and rate) determination

On survey related matters, initial contact, including requests for summaries of surveys, should be directed to the WHD Branch of Wage Surveys. Requests can be submitted via email to davisbaconinfo@dol.gov or by mail to:

Branch of Wage Surveys
Wage and Hour Division
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

Regarding any other wage determination matter such as conformance decisions, requests for initial decisions should be directed to the WHD Branch of Construction Wage Determinations. Requests can be submitted via email to BCWD-Office@dol.gov or by mail to:

Branch of Construction Wage Determinations
Wage and Hour Division
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

2) If an initial decision has been issued, then any interested party (those affected by the action) that disagrees with the decision can request review and reconsideration from the Wage and Hour Administrator (See 29 CFR Part 1.8 and 29 CFR Part 7). Requests for review and reconsideration can be submitted via email to dba.reconsideration@dol.gov or by mail to:

Wage and Hour Administrator
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

The request should be accompanied by a full statement of the interested party's position and any information (wage payment data, project description, area practice material, etc.) that the requestor considers relevant to the issue.

3) If the decision of the Administrator is not favorable, an interested party may appeal directly to the Administrative Review Board (formerly the Wage Appeals Board). Write to:

Administrative Review Board
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210.

==========

END OF GENERAL DECISION
"

SUPPLEMENT TO FORM FHWA-1273

DATE: 07/26/2022

SUBJECT: Federal Contract Provisions for Subcontracts

Federal Contract Provisions for Subcontracts

All subcontracts shall be in writing and contain all pertinent provisions and requirements of the prime contract.

Each "Request for Permission to Subcontract" (Mississippi Department of Transportation Form CAD-720) shall include a copy of the subcontract. The federal contract provisions (FHWA-1273, SUPPLEMENT TO FORM FHWA-1273, NOTICE OF REQUIREMENT FOR AFFIRMATIVE ACTION TO ENSURE EQUAL EMPLOYMENT OPPORTUNITY (EXECUTIVE ORDER 11246), DAVIS-BACON AND RELATED ACT PROVISIONS (WAGE RATES)) must be physically incorporated as part of the subcontract. A completed Mississippi Department of Transportation Form CAD-521 and Form CAD-725 must be attached to the CAD-720.

REQUIRED CONTRACT PROVISIONS
FEDERAL-AID CONSTRUCTION CONTRACTS

I. General
II. Nondiscrimination
III. Non-segregated Facilities
IV. Davis-Bacon and Related Act Provisions
V. Contract Work Hours and Safety Standards Act Provisions
VI. Subletting or Assigning the Contract
VII. Safety: Accident Prevention
VIII. False Statements Concerning Highway Projects
IX. Implementation of Clean Air Act and Federal Water Pollution Control Act
X. Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion
XI. Certification Regarding Use of Contract Funds for Lobbying
XII. Use of United States-Flag Vessels:

ATTACHMENTS

A. Employment and Materials Preference for Appalachian Development Highway System or Appalachian Local Access Road Contracts (included in Appalachian contracts only)

I. GENERAL

1. Form FHWA-1273 must be physically incorporated in each construction contract funded under title 23, United States Code, as required in 23 CFR 633.102(b) (excluding emergency contracts solely intended for debris removal). The contractor (or subcontractor) must insert this form in each subcontract and further require its inclusion in all lower tier subcontracts (excluding purchase orders, rental agreements and other agreements for supplies or services). 23 CFR 633.102(e).

The applicable requirements of Form FHWA-1273 are incorporated by reference for work done under any purchase order, rental agreement or agreement for other services. The prime contractor shall be responsible for compliance by any subcontractor, lower-tier subcontractor or service provider. 23 CFR 633.102(e).

Form FHWA-1273 must be included in all Federal-aid design-build contracts, in all subcontracts and in lower tier subcontracts (excluding subcontracts for design services, purchase orders, rental agreements and other agreements for supplies or services) in accordance with 23 CFR 633.102. The design-builder shall be responsible for compliance by any subcontractor, lower-tier subcontractor or service provider.

Contracting agencies may reference Form FHWA-1273 in solicitation-for-bids or request-for-proposals documents, however, the Form FHWA-1273 must be physically incorporated (not referenced) in all contracts, subcontracts and lower-tier subcontracts (excluding purchase orders, rental agreements and other agreements for supplies or services related to a construction contract). 23 CFR 633.102(b).

2. Subject to the applicability criteria noted in the following sections, these contract provisions shall apply to all work performed on the contract by the contractor's own organization and with the assistance of workers under the contractor's immediate superintendence and to all work performed on the contract by piecework, station work, or by subcontract. 23 CFR 633.102(d).

3. A breach of any of the stipulations contained in these Required Contract Provisions may be sufficient grounds for withholding of progress payments, withholding of final payment, termination of the contract, suspension / debarment or any other action determined to be appropriate by the contracting agency and FHWA.

4. Selection of Labor: During the performance of this contract, the contractor shall not use convict labor for any purpose within the limits of a construction project on a Federal-aid highway unless it is labor performed by convicts who are on parole, supervised release, or probation. 23 U.S.C. 114(b). The term Federal-aid highway does not include roadways functionally classified as local roads or rural minor collectors. 23 U.S.C. 101(a).

II. NONDISCRIMINATION (23 CFR 230.107(a); 23 CFR Part 230, Subpart A, Appendix A; EO 11246)

The provisions of this section related to 23 CFR Part 230, Subpart A, Appendix A are applicable to all Federal-aid construction contracts and to all related construction subcontracts of $10,000 or more. The provisions of 23 CFR Part 230 are not applicable to material supply, engineering, or architectural service contracts.

In addition, the contractor and all subcontractors must comply with the following policies: Executive Order 11246, 41 CFR Part 60, 29 CFR Parts 1625-1627, 23 U.S.C. 140, Section 504 of the Rehabilitation Act of 1973, as amended (29 U.S.C. 794), Title VI of the Civil Rights Act of 1964, as amended (42 U.S.C. 2000d et seq.), and related regulations including 49 CFR Parts 21, 26, and 27; and 23 CFR Parts 200, 230, and 633.

The contractor and all subcontractors must comply with: the requirements of the Equal Opportunity Clause in 41 CFR 60-1.4(b) and, for all construction contracts exceeding $10,000, the Standard Federal Equal Employment Opportunity Construction Contract Specifications in 41 CFR 60-4.3.

Note: The U.S. Department of Labor has exclusive authority to determine compliance with Executive Order 11246 and the policies of the Secretary of Labor including 41 CFR Part 60, and 29 CFR Parts 1625-1627. The contracting agency and the FHWA have the authority and the responsibility to ensure compliance with 23 U.S.C. 140, Section 504 of the Rehabilitation Act of 1973, as amended (29 U.S.C. 794), and Title VI of the Civil Rights Act of 1964, as amended (42 U.S.C. 2000d et seq.), and related regulations including 49 CFR Parts 21, 26, and 27; and 23 CFR Parts 200, 230, and 633.

The following provision is adopted from 23 CFR Part 230, Subpart A, Appendix A, with appropriate revisions to conform to the U.S. Department of Labor (US DOL) and FHWA requirements.

1. Equal Employment Opportunity: Equal Employment Opportunity (EEO) requirements not to discriminate and to take affirmative action to assure equal opportunity as set forth under laws, executive orders, rules, regulations (*see* 28 CFR Part 35, 29 CFR Part 1630, 29 CFR Parts 1625-1627, 41 CFR Part 60 and 49 CFR Part 27) and orders of the Secretary of Labor as modified by the provisions prescribed herein, and imposed pursuant to 23 U.S.C. 140, shall constitute the EEO and specific affirmative action standards for the contractor's project activities under this contract. The provisions of the Americans with Disabilities Act of 1990 (42 U.S.C. 12101 et seq.) set forth under 28 CFR Part 35 and 29 CFR Part 1630 are incorporated by reference in this contract. In the execution of this contract, the contractor agrees to comply with the following minimum specific requirement activities of EEO:

a. The contractor will work with the contracting agency and the Federal Government to ensure that it has made every good faith effort to provide equal opportunity with respect to all of its terms and conditions of employment and in their review of activities under the contract. 23 CFR 230.409 (g)(4) & (5).

b. The contractor will accept as its operating policy the following statement:

"It is the policy of this Company to assure that applicants are employed, and that employees are treated during employment, without regard to their race, religion, sex, sexual orientation, gender identity, color, national origin, age or disability. Such action shall include: employment, upgrading, demotion, or transfer; recruitment or recruitment advertising; layoff or termination; rates of pay or other forms of compensation; and selection for training, including apprenticeship, pre-apprenticeship, and/or on-the-job training."

2. EEO Officer: The contractor will designate and make known to the contracting officers an EEO Officer who will have the responsibility for and must be capable of effectively administering and promoting an active EEO program and who must be assigned adequate authority and responsibility to do so.

3. Dissemination of Policy: All members of the contractor's staff who are authorized to hire, supervise, promote, and discharge employees, or who recommend such action or are substantially involved in such action, will be made fully cognizant of and will implement the contractor's EEO policy and contractual responsibilities to provide EEO in each grade and classification of employment. To ensure that the above agreement will be met, the following actions will be taken as a minimum:

a. Periodic meetings of supervisory and personnel office employees will be conducted before the start of work and then not less often than once every six months, at which time the contractor's EEO policy and its implementation will be reviewed and explained. The meetings will be conducted by the EEO Officer or other knowledgeable company official.

b. All new supervisory or personnel office employees will be given a thorough indoctrination by the EEO Officer, covering all major aspects of the contractor's EEO obligations within thirty days following their reporting for duty with the contractor.

c. All personnel who are engaged in direct recruitment for the project will be instructed by the EEO Officer in the contractor's procedures for locating and hiring minorities and women.

d. Notices and posters setting forth the contractor's EEO policy will be placed in areas readily accessible to employees, applicants for employment and potential employees.

e. The contractor's EEO policy and the procedures to implement such policy will be brought to the attention of employees by means of meetings, employee handbooks, or other appropriate means.

4. Recruitment: When advertising for employees, the contractor will include in all advertisements for employees the notation: "An Equal Opportunity Employer." All such advertisements will be placed in publications having a large circulation among minorities and women in the area from which the project work force would normally be derived.

a. The contractor will, unless precluded by a valid bargaining agreement, conduct systematic and direct recruitment through public and private employee referral sources likely to yield qualified minorities and women. To meet this requirement, the contractor will identify sources of potential minority group employees and establish with such identified sources procedures whereby minority and women applicants may be referred to the contractor for employment consideration.

b. In the event the contractor has a valid bargaining agreement providing for exclusive hiring hall referrals, the contractor is expected to observe the provisions of that agreement to the extent that the system meets the contractor's compliance with EEO contract provisions. Where implementation of such an agreement has the effect of discriminating against minorities or women, or obligates the contractor to do the same, such implementation violates Federal nondiscrimination provisions.

c. The contractor will encourage its present employees to refer minorities and women as applicants for employment. Information and procedures with regard to referring such applicants will be discussed with employees.

5. Personnel Actions: Wages, working conditions, and employee benefits shall be established and administered, and personnel actions of every type, including hiring, upgrading, promotion, transfer, demotion, layoff, and termination, shall be taken without regard to race, color, religion, sex, sexual orientation, gender identity, national origin, age or disability. The following procedures shall be followed:

a. The contractor will conduct periodic inspections of project sites to ensure that working conditions and employee facilities do not indicate discriminatory treatment of project site personnel.

b. The contractor will periodically evaluate the spread of wages paid within each classification to determine any evidence of discriminatory wage practices.

c. The contractor will periodically review selected personnel actions in depth to determine whether there is evidence of discrimination. Where evidence is found, the contractor will promptly take corrective action. If the review indicates that the discrimination may extend beyond the actions reviewed, such corrective action shall include all affected persons.

d. The contractor will promptly investigate all complaints of alleged discrimination made to the contractor in connection with its obligations under this contract, will attempt to resolve such complaints, and will take appropriate corrective action

within a reasonable time. If the investigation indicates that the discrimination may affect persons other than the complainant, such corrective action shall include such other persons. Upon completion of each investigation, the contractor will inform every complainant of all of their avenues of appeal.

6. Training and Promotion:

a. The contractor will assist in locating, qualifying, and increasing the skills of minorities and women who are applicants for employment or current employees. Such efforts should be aimed at developing full journey level status employees in the type of trade or job classification involved.

b. Consistent with the contractor's work force requirements and as permissible under Federal and State regulations, the contractor shall make full use of training programs (i.e., apprenticeship and on-the-job training programs for the geographical area of contract performance). In the event a special provision for training is provided under this contract, this subparagraph will be superseded as indicated in the special provision. The contracting agency may reserve training positions for persons who receive welfare assistance in accordance with 23 U.S.C. 140(a).

c. The contractor will advise employees and applicants for employment of available training programs and entrance requirements for each.

d. The contractor will periodically review the training and promotion potential of employees who are minorities and women and will encourage eligible employees to apply for such training and promotion.

7. Unions: If the contractor relies in whole or in part upon unions as a source of employees, the contractor will use good faith efforts to obtain the cooperation of such unions to increase opportunities for minorities and women. 23 CFR 230.409. Actions by the contractor, either directly or through a contractor's association acting as agent, will include the procedures set forth below:

a. The contractor will use good faith efforts to develop, in cooperation with the unions, joint training programs aimed toward qualifying more minorities and women for membership in the unions and increasing the skills of minorities and women so that they may qualify for higher paying employment.

b. The contractor will use good faith efforts to incorporate an EEO clause into each union agreement to the end that such union will be contractually bound to refer applicants without regard to their race, color, religion, sex, sexual orientation, gender identity, national origin, age, or disability.

c. The contractor is to obtain information as to the referral practices and policies of the labor union except that to the extent such information is within the exclusive possession of the labor union and such labor union refuses to furnish such information to the contractor, the contractor shall so certify to the contracting agency and shall set forth what efforts have been made to obtain such information.

d. In the event the union is unable to provide the contractor with a reasonable flow of referrals within the time limit set forth in the collective bargaining agreement, the contractor will, through independent recruitment efforts, fill the employment vacancies without regard to race, color, religion, sex, sexual orientation, gender identity, national origin, age, or disability; making full efforts to obtain qualified and/or qualifiable minorities and women. The failure of a union to provide sufficient referrals (even though it is obligated to provide exclusive referrals under the terms of a collective bargaining agreement) does not relieve the contractor from the requirements of this paragraph. In the event the union referral practice prevents the contractor from meeting the obligations pursuant to Executive Order 11246, as amended, and these special provisions, such contractor shall immediately notify the contracting agency.

8. Reasonable Accommodation for Applicants / Employees with Disabilities: The contractor must be familiar with the requirements for and comply with the Americans with Disabilities Act and all rules and regulations established thereunder. Employers must provide reasonable accommodation in all employment activities unless to do so would cause an undue hardship.

9. Selection of Subcontractors, Procurement of Materials and Leasing of Equipment: The contractor shall not discriminate on the grounds of race, color, religion, sex, sexual orientation, gender identity, national origin, age, or disability in the selection and retention of subcontractors, including procurement of materials and leases of equipment. The contractor shall take all necessary and reasonable steps to ensure nondiscrimination in the administration of this contract.

a. The contractor shall notify all potential subcontractors, suppliers, and lessors of their EEO obligations under this contract.

b. The contractor will use good faith efforts to ensure subcontractor compliance with their EEO obligations.

10. Assurances Required:

a. The requirements of 49 CFR Part 26 and the State DOT's FHWA-approved Disadvantaged Business Enterprise (DBE) program are incorporated by reference.

b. The contractor, subrecipient or subcontractor shall not discriminate on the basis of race, color, national origin, or sex in the performance of this contract. The contractor shall carry out applicable requirements of 49 CFR part 26 in the award and administration of DOT-assisted contracts. Failure by the contractor to carry out these requirements is a material breach of this contract, which may result in the termination of this contract or such other remedy as the recipient deems appropriate, which may include, but is not limited to:
(1) Withholding monthly progress payments;
(2) Assessing sanctions;
(3) Liquidated damages; and/or
(4) Disqualifying the contractor from future bidding as non-responsible.

c. The Title VI and nondiscrimination provisions of U.S. DOT Order 1050.2A at Appendixes A and E are incorporated by reference. 49 CFR Part 21.

11. Records and Reports: The contractor shall keep such records as necessary to document compliance with the EEO requirements. Such records shall be retained for a period of three years following the date of the final payment to the contractor for all contract work and shall be available at reasonable times and places for inspection by authorized representatives of the contracting agency and the FHWA.

a. The records kept by the contractor shall document the following:

(1) The number and work hours of minority and non-minority group members and women employed in each work classification on the project;

(2) The progress and efforts being made in cooperation with unions, when applicable, to increase employment opportunities for minorities and women; and

(3) The progress and efforts being made in locating, hiring, training, qualifying, and upgrading minorities and women.

b. The contractors and subcontractors will submit an annual report to the contracting agency each July for the duration of the project indicating the number of minority, women, and non-minority group employees currently engaged in each work classification required by the contract work. This information is to be reported on Form FHWA-1391. The staffing data should represent the project work force on board in all or any part of the last payroll period preceding the end of July. If on-the-job training is being required by special provision, the contractor will be required to collect and report training data. The employment data should reflect the work force on board during all or any part of the last payroll period preceding the end of July.

III. NONSEGREGATED FACILITIES

This provision is applicable to all Federal-aid construction contracts and to all related construction subcontracts of more than $10,000. 41 CFR 60-1.5.

As prescribed by 41 CFR 60-1.8, the contractor must ensure that facilities provided for employees are provided in such a manner that segregation on the basis of race, color, religion, sex, sexual orientation, gender identity, or national origin cannot result. The contractor may neither require such segregated use by written or oral policies nor tolerate such use by employee custom. The contractor's obligation extends further to ensure that its employees are not assigned to perform their services at any location under the contractor's control where the facilities are segregated. The term "facilities" includes waiting rooms, work areas, restaurants and other eating areas, time clocks, restrooms, washrooms, locker rooms and other storage or dressing areas, parking lots, drinking fountains, recreation or entertainment areas, transportation, and housing provided for employees. The contractor shall provide separate or single-user restrooms and necessary dressing or sleeping areas to assure privacy between sexes.

IV. DAVIS-BACON AND RELATED ACT PROVISIONS

This section is applicable to all Federal-aid construction projects exceeding $2,000 and to all related subcontracts and lower-tier subcontracts (regardless of subcontract size), in accordance with 29 CFR 5.5. The requirements apply to all projects located within the right-of-way of a roadway that is functionally classified as Federal-aid highway. 23 U.S.C. 113. This excludes roadways functionally classified as local roads or rural minor collectors, which are exempt. 23 U.S.C. 101. Where applicable law requires that projects be treated as a project on a Federal-aid highway, the provisions of this subpart will apply regardless of the location of the project. Examples include: Surface Transportation Block Grant Program projects funded under 23 U.S.C. 133 [excluding recreational trails projects], the Nationally Significant Freight and Highway Projects funded under 23 U.S.C. 117, and National Highway Freight Program projects funded under 23 U.S.C. 167.

The following provisions are from the U.S. Department of Labor regulations in 29 CFR 5.5 “Contract provisions and related matters” with minor revisions to conform to the FHWA-1273 format and FHWA program requirements.

1. Minimum wages (29 CFR 5.5)

a. *Wage rates and fringe benefits.* All laborers and mechanics employed or working upon the site of the work (or otherwise working in construction or development of the project under a development statute), will be paid unconditionally and not less often than once a week, and without subsequent deduction or rebate on any account (except such payroll deductions as are permitted by regulations issued by the Secretary of Labor under the Copeland Act (29 CFR part 3)), the full amount of basic hourly wages and bona fide fringe benefits (or cash equivalents thereof) due at time of payment computed at rates not less than those contained in the wage determination of the Secretary of Labor which is attached hereto and made a part hereof, regardless of any contractual relationship which may be alleged to exist between the contractor and such laborers and mechanics. As provided in paragraphs (d) and (e) of 29 CFR 5.5, the appropriate wage determinations are effective by operation of law even if they have not been attached to the contract. Contributions made or costs reasonably anticipated for bona fide fringe benefits under the Davis-Bacon Act (40 U.S.C. 3141(2)(B)) on behalf of laborers or mechanics are considered wages paid to such laborers or mechanics, subject to the provisions of paragraph 1.e. of this section; also, regular contributions made or costs incurred for more than a weekly period (but not less often than quarterly) under plans, funds, or programs which cover the particular weekly period, are deemed to be constructively made or incurred during such weekly period. Such laborers and mechanics must be paid the appropriate wage rate and fringe benefits on the wage determination for the classification(s) of work actually performed, without regard to skill, except as provided in paragraph 4. of this section. Laborers or mechanics performing work in more than one classification may be compensated at the rate specified for each classification for the time actually worked therein: *Provided,* That the employer's payroll records accurately set forth the time spent in each classification in which work is performed. The wage determination (including any additional classifications and wage rates conformed under paragraph 1.c. of this section) and the Davis-Bacon poster (WH–1321) must be posted at all times by the contractor and its subcontractors at the site of the work in a prominent and accessible place where it can be easily seen by the workers.

b. *Frequently recurring classifications.* (1) In addition to wage and fringe benefit rates that have been determined to be prevailing under the procedures set forth in 29 CFR part 1, a wage determination may contain, pursuant to § 1.3(f), wage and fringe benefit rates for classifications of laborers and mechanics for which conformance requests are regularly submitted pursuant to paragraph 1.c. of this section, provided that:

(i) The work performed by the classification is not performed by a classification in the wage determination for which a prevailing wage rate has been determined;

(ii) The classification is used in the area by the construction industry; and

(iii) The wage rate for the classification bears a reasonable relationship to the prevailing wage rates contained in the wage determination.

(2) The Administrator will establish wage rates for such classifications in accordance with paragraph 1.c.(1)(iii) of this section. Work performed in such a classification must be paid at no less than the wage and fringe benefit rate listed on the wage determination for such classification.

c. *Conformance.* (1) The contracting officer must require that any class of laborers or mechanics, including helpers, which is not listed in the wage determination and which is to be employed under the contract be classified in conformance with the wage determination. Conformance of an additional classification and wage rate and fringe benefits is appropriate only when the following criteria have been met:

(i) The work to be performed by the classification requested is not performed by a classification in the wage determination; and

(ii) The classification is used in the area by the construction industry; and

(iii) The proposed wage rate, including any bona fide fringe benefits, bears a reasonable relationship to the wage rates contained in the wage determination.

(2) The conformance process may not be used to split, subdivide, or otherwise avoid application of classifications listed in the wage determination.

(3) If the contractor and the laborers and mechanics to be employed in the classification (if known), or their representatives, and the contracting officer agree on the classification and wage rate (including the amount designated for fringe benefits where appropriate), a report of the action taken will be sent by the contracting officer by email to *DBAconformance@dol.gov*. The Administrator, or an authorized representative, will approve, modify, or disapprove every additional classification action within 30 days of receipt and so advise the contracting officer or will notify the contracting officer within the 30–day period that additional time is necessary.

(4) In the event the contractor, the laborers or mechanics to be employed in the classification or their representatives, and the contracting officer do not agree on the proposed classification and wage rate (including the amount designated for fringe benefits, where appropriate), the contracting officer will, by email to *DBAconformance@dol.gov*, refer the questions, including the views of all interested parties and the recommendation of the contracting officer, to the Administrator for determination. The Administrator, or an authorized representative, will issue a determination within 30 days of receipt and so advise the contracting officer or will notify the contracting officer within the 30–day period that additional time is necessary.

(5) The contracting officer must promptly notify the contractor of the action taken by the Wage and Hour Division under paragraphs 1.c.(3) and (4) of this section. The contractor must furnish a written copy of such determination to each affected worker or it must be posted as a part of the wage determination. The wage rate (including fringe benefits where appropriate) determined pursuant to paragraph 1.c.(3) or (4) of this section must be paid to all workers performing work in the classification under this contract from the first day on which work is performed in the classification.

d. *Fringe benefits not expressed as an hourly rate.* Whenever the minimum wage rate prescribed in the contract for a class of laborers or mechanics includes a fringe benefit which is not expressed as an hourly rate, the contractor may either pay the benefit as stated in the wage determination or may pay another bona fide fringe benefit or an hourly cash equivalent thereof.

e. *Unfunded plans.* If the contractor does not make payments to a trustee or other third person, the contractor may consider as part of the wages of any laborer or mechanic the amount of any costs reasonably anticipated in providing bona fide fringe benefits under a plan or program, *Provided,* That the Secretary of Labor has found, upon the written request of the contractor, in accordance with the criteria set forth in § 5.28, that the applicable standards of the Davis-Bacon Act have been met. The Secretary of Labor may require the contractor to set aside in a separate account assets for the meeting of obligations under the plan or program.

f. *Interest.* In the event of a failure to pay all or part of the wages required by the contract, the contractor will be required to pay interest on any underpayment of wages.

2. Withholding (29 CFR 5.5)

a. *Withholding requirements.* The contracting agency may, upon its own action, or must, upon written request of an authorized representative of the Department of Labor, withhold or cause to be withheld from the contractor so much of the accrued payments or advances as may be considered necessary to satisfy the liabilities of the prime contractor or any subcontractor for the full amount of wages and monetary relief, including interest, required by the clauses set forth in this section for violations of this contract, or to satisfy any such liabilities required by any other Federal contract, or federally assisted contract subject to Davis-Bacon labor standards, that is held by the same prime contractor (as defined in § 5.2). The necessary funds may be withheld from the contractor under this contract, any other Federal contract with the same prime contractor, or any other federally assisted contract that is subject to Davis-Bacon labor standards requirements and is held by the same prime contractor, regardless of whether the other contract was awarded or assisted by the same agency, and such funds may be used to satisfy the contractor liability for which the funds were withheld. In the event of a contractor's failure to pay any laborer or mechanic, including any apprentice or helper working on the site of the work all or part of the wages required by the contract, or upon the contractor's failure to submit the required records as discussed in paragraph 3.d. of this section, the contracting agency may on its own initiative and after written notice to the contractor, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds until such violations have ceased.

b. *Priority to withheld funds.* The Department has priority to funds withheld or to be withheld in accordance with paragraph

2.a. of this section or Section V, paragraph 3.a., or both, over claims to those funds by:

(1) A contractor's surety(ies), including without limitation performance bond sureties and payment bond sureties;

(2) A contracting agency for its reprocurement costs;

(3) A trustee(s) (either a court-appointed trustee or a U.S. trustee, or both) in bankruptcy of a contractor, or a contractor's bankruptcy estate;

(4) A contractor's assignee(s);

(5) A contractor's successor(s); or

(6) A claim asserted under the Prompt Payment Act, 31 U.S.C. 3901–3907.

3. Records and certified payrolls (29 CFR 5.5)

a. *Basic record requirements* (1) *Length of record retention.* All regular payrolls and other basic records must be maintained by the contractor and any subcontractor during the course of the work and preserved for all laborers and mechanics working at the site of the work (or otherwise working in construction or development of the project under a development statute) for a period of at least 3 years after all the work on the prime contract is completed.

(2) *Information required.* Such records must contain the name; Social Security number; last known address, telephone number, and email address of each such worker; each worker's correct classification(s) of work actually performed; hourly rates of wages paid (including rates of contributions or costs anticipated for bona fide fringe benefits or cash equivalents thereof of the types described in 40 U.S.C. 3141(2)(B) of the Davis-Bacon Act); daily and weekly number of hours actually worked in total and on each covered contract; deductions made; and actual wages paid.

(3) *Additional records relating to fringe benefits.* Whenever the Secretary of Labor has found under paragraph 1.e. of this section that the wages of any laborer or mechanic include the amount of any costs reasonably anticipated in providing benefits under a plan or program described in 40 U.S.C. 3141(2)(B) of the Davis-Bacon Act, the contractor must maintain records which show that the commitment to provide such benefits is enforceable, that the plan or program is financially responsible, and that the plan or program has been communicated in writing to the laborers or mechanics affected, and records which show the costs anticipated or the actual cost incurred in providing such benefits.

(4) *Additional records relating to apprenticeship.* Contractors with apprentices working under approved programs must maintain written evidence of the registration of apprenticeship programs, the registration of the apprentices, and the ratios and wage rates prescribed in the applicable programs.

b. *Certified payroll requirements* (1) *Frequency and method of submission.* The contractor or subcontractor must submit weekly, for each week in which any DBA- or Related Acts-covered work is performed, certified payrolls to the contracting agency. The prime contractor is responsible for the submission of all certified payrolls by all subcontractors. A contracting agency or prime contractor may permit or require contractors to submit certified payrolls through an electronic system, as long as the electronic system requires a legally valid electronic signature; the system allows the contractor, the contracting agency, and the Department of Labor to access the certified payrolls upon request for at least 3 years after the work on the prime contract has been completed; and the contracting agency or prime contractor permits other methods of submission in situations where the contractor is unable or limited in its ability to use or access the electronic system.

(2) *Information required.* The certified payrolls submitted must set out accurately and completely all of the information required to be maintained under paragraph 3.a.(2) of this section, except that full Social Security numbers and last known addresses, telephone numbers, and email addresses must not be included on weekly transmittals. Instead, the certified payrolls need only include an individually identifying number for each worker (*e.g.,* the last four digits of the worker's Social Security number). The required weekly certified payroll information may be submitted using Optional Form WH–347 or in any other format desired. Optional Form WH–347 is available for this purpose from the Wage and Hour Division website at *https://www.dol.gov/sites/dolgov/files/WHD/legacy/files/wh347/.pdf* or its successor website. It is not a violation of this section for a prime contractor to require a subcontractor to provide full Social Security numbers and last known addresses, telephone numbers, and email addresses to the prime contractor for its own records, without weekly submission by the subcontractor to the contracting agency.

(3) *Statement of Compliance.* Each certified payroll submitted must be accompanied by a "Statement of Compliance," signed by the contractor or subcontractor, or the contractor's or subcontractor's agent who pays or supervises the payment of the persons working on the contract, and must certify the following:

(i) That the certified payroll for the payroll period contains the information required to be provided under paragraph 3.b. of this section, the appropriate information and basic records are being maintained under paragraph 3.a. of this section, and such information and records are correct and complete;

(ii) That each laborer or mechanic (including each helper and apprentice) working on the contract during the payroll period has been paid the full weekly wages earned, without rebate, either directly or indirectly, and that no deductions have been made either directly or indirectly from the full wages earned, other than permissible deductions as set forth in 29 CFR part 3; and

(iii) That each laborer or mechanic has been paid not less than the applicable wage rates and fringe benefits or cash equivalents for the classification(s) of work actually performed, as specified in the applicable wage determination incorporated into the contract.

(4) *Use of Optional Form WH–347.* The weekly submission of a properly executed certification set forth on the reverse side of Optional Form WH–347 will satisfy the requirement for submission of the "Statement of Compliance" required by paragraph 3.b.(3) of this section.

(5) *Signature.* The signature by the contractor, subcontractor, or the contractor's or subcontractor's agent must be an original handwritten signature or a legally valid electronic signature.

(6) *Falsification.* The falsification of any of the above certifications may subject the contractor or subcontractor to civil or criminal prosecution under 18 U.S.C. 1001 and 31 U.S.C. 3729.

(7) *Length of certified payroll retention.* The contractor or subcontractor must preserve all certified payrolls during the course of the work and for a period of 3 years after all the work on the prime contract is completed.

c. *Contracts, subcontracts, and related documents.* The contractor or subcontractor must maintain this contract or subcontract and related documents including, without limitation, bids, proposals, amendments, modifications, and extensions. The contractor or subcontractor must preserve these contracts, subcontracts, and related documents during the course of the work and for a period of 3 years after all the work on the prime contract is completed.

d. *Required disclosures and access* (1) *Required record disclosures and access to workers.* The contractor or subcontractor must make the records required under paragraphs 3.a. through 3.c. of this section, and any other documents that the contracting agency, the State DOT, the FHWA, or the Department of Labor deems necessary to determine compliance with the labor standards provisions of any of the applicable statutes referenced by § 5.1, available for inspection, copying, or transcription by authorized representatives of the contracting agency, the State DOT, the FHWA, or the Department of Labor, and must permit such representatives to interview workers during working hours on the job.

(2) *Sanctions for non-compliance with records and worker access requirements.* If the contractor or subcontractor fails to submit the required records or to make them available, or refuses to permit worker interviews during working hours on the job, the Federal agency may, after written notice to the contractor, sponsor, applicant, owner, or other entity, as the case may be, that maintains such records or that employs such workers, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds. Furthermore, failure to submit the required records upon request or to make such records available, or to permit worker interviews during working hours on the job, may be grounds for debarment action pursuant to § 5.12. In addition, any contractor or other person that fails to submit the required records or make those records available to WHD within the time WHD requests that the records be produced will be precluded from introducing as evidence in an administrative proceeding under 29 CFR part 6 any of the required records that were not provided or made available to WHD. WHD will take into consideration a reasonable request from the contractor or person for an extension of the time for submission of records. WHD will determine the reasonableness of the request and may consider, among other things, the location of the records and the volume of production.

(3) *Required information disclosures.* Contractors and subcontractors must maintain the full Social Security number and last known address, telephone number, and email address of each covered worker, and must provide them upon request to the contracting agency, the State DOT, the FHWA, the contractor, or the Wage and Hour Division of the Department of Labor for purposes of an investigation or other compliance action.

4. Apprentices and equal employment opportunity (29 CFR 5.5)

a. *Apprentices* (1) *Rate of pay.* Apprentices will be permitted to work at less than the predetermined rate for the work they perform when they are employed pursuant to and individually registered in a bona fide apprenticeship program registered with the U.S. Department of Labor, Employment and Training Administration, Office of Apprenticeship (OA), or with a State Apprenticeship Agency recognized by the OA. A person who is not individually registered in the program, but who has been certified by the OA or a State Apprenticeship Agency (where appropriate) to be eligible for probationary employment as an apprentice, will be permitted to work at less than the predetermined rate for the work they perform in the first 90 days of probationary employment as an apprentice in such a program. In the event the OA or a State Apprenticeship Agency recognized by the OA withdraws approval of an apprenticeship program, the contractor will no longer be permitted to use apprentices at less than the applicable predetermined rate for the work performed until an acceptable program is approved.

(2) *Fringe benefits.* Apprentices must be paid fringe benefits in accordance with the provisions of the apprenticeship program. If the apprenticeship program does not specify fringe benefits, apprentices must be paid the full amount of fringe benefits listed on the wage determination for the applicable classification. If the Administrator determines that a different practice prevails for the applicable apprentice classification, fringe benefits must be paid in accordance with that determination.

(3) *Apprenticeship ratio.* The allowable ratio of apprentices to journeyworkers on the job site in any craft classification must not be greater than the ratio permitted to the contractor as to the entire work force under the registered program or the ratio applicable to the locality of the project pursuant to paragraph 4.a.(4) of this section. Any worker listed on a payroll at an apprentice wage rate, who is not registered or otherwise employed as stated in paragraph 4.a.(1) of this section, must be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed. In addition, any apprentice performing work on the job site in excess of the ratio permitted under this section must be paid not less than the applicable wage rate on the wage determination for the work actually performed.

(4) *Reciprocity of ratios and wage rates.* Where a contractor is performing construction on a project in a locality other than the locality in which its program is registered, the ratios and wage rates (expressed in percentages of the journeyworker's hourly rate) applicable within the locality in which the construction is being performed must be observed. If there is no applicable ratio or wage rate for the locality of the project, the ratio and wage rate specified in the contractor's registered program must be observed.

b. *Equal employment opportunity.* The use of apprentices and journeyworkers under this part must be in conformity with

the equal employment opportunity requirements of Executive Order 11246, as amended, and 29 CFR part 30.

c. Apprentices and Trainees (programs of the U.S. DOT).

Apprentices and trainees working under apprenticeship and skill training programs which have been certified by the Secretary of Transportation as promoting EEO in connection with Federal-aid highway construction programs are not subject to the requirements of paragraph 4 of this Section IV. 23 CFR 230.111(e)(2). The straight time hourly wage rates for apprentices and trainees under such programs will be established by the particular programs. The ratio of apprentices and trainees to journeyworkers shall not be greater than permitted by the terms of the particular program.

5. Compliance with Copeland Act requirements. The contractor shall comply with the requirements of 29 CFR part 3, which are incorporated by reference in this contract as provided in 29 CFR 5.5.

6. Subcontracts. The contractor or subcontractor must insert FHWA-1273 in any subcontracts, along with the applicable wage determination(s) and such other clauses or contract modifications as the contracting agency may by appropriate instructions require, and a clause requiring the subcontractors to include these clauses and wage determination(s) in any lower tier subcontracts. The prime contractor is responsible for the compliance by any subcontractor or lower tier subcontractor with all the contract clauses in this section. In the event of any violations of these clauses, the prime contractor and any subcontractor(s) responsible will be liable for any unpaid wages and monetary relief, including interest from the date of the underpayment or loss, due to any workers of lower-tier subcontractors, and may be subject to debarment, as appropriate. 29 CFR 5.5.

7. Contract termination: debarment. A breach of the contract clauses in 29 CFR 5.5 may be grounds for termination of the contract, and for debarment as a contractor and a subcontractor as provided in 29 CFR 5.12.

8. Compliance with Davis-Bacon and Related Act requirements. All rulings and interpretations of the Davis-Bacon and Related Acts contained in 29 CFR parts 1, 3, and 5 are herein incorporated by reference in this contract as provided in 29 CFR 5.5.

9. Disputes concerning labor standards. As provided in 29 CFR 5.5, disputes arising out of the labor standards provisions of this contract shall not be subject to the general disputes clause of this contract. Such disputes shall be resolved in accordance with the procedures of the Department of Labor set forth in 29 CFR parts 5, 6, and 7. Disputes within the meaning of this clause include disputes between the contractor (or any of its subcontractors) and the contracting agency, the U.S. Department of Labor, or the employees or their representatives.

10. Certification of eligibility. a. By entering into this contract, the contractor certifies that neither it nor any person or firm who has an interest in the contractor's firm is a person or firm ineligible to be awarded Government contracts by virtue of 40 U.S.C. 3144(b) or § 5.12(a).

b. No part of this contract shall be subcontracted to any person or firm ineligible for award of a Government contract by virtue of 40 U.S.C. 3144(b) or § 5.12(a).

c. The penalty for making false statements is prescribed in the U.S. Code, Title 18 Crimes and Criminal Procedure, 18 U.S.C. 1001.

11. Anti-retaliation. It is unlawful for any person to discharge, demote, intimidate, threaten, restrain, coerce, blacklist, harass, or in any other manner discriminate against, or to cause any person to discharge, demote, intimidate, threaten, restrain, coerce, blacklist, harass, or in any other manner discriminate against, any worker or job applicant for:

a. Notifying any contractor of any conduct which the worker reasonably believes constitutes a violation of the DBA, Related Acts, this part, or 29 CFR part 1 or 3;

b. Filing any complaint, initiating or causing to be initiated any proceeding, or otherwise asserting or seeking to assert on behalf of themselves or others any right or protection under the DBA, Related Acts, this part, or 29 CFR part 1 or 3;

c. Cooperating in any investigation or other compliance action, or testifying in any proceeding under the DBA, Related Acts, this part, or 29 CFR part 1 or 3; or

d. Informing any other person about their rights under the DBA, Related Acts, this part, or 29 CFR part 1 or 3.

V. CONTRACT WORK HOURS AND SAFETY STANDARDS ACT

Pursuant to 29 CFR 5.5(b), the following clauses apply to any Federal-aid construction contract in an amount in excess of $100,000 and subject to the overtime provisions of the Contract Work Hours and Safety Standards Act. These clauses shall be inserted in addition to the clauses required by 29 CFR 5.5(a) or 29 CFR 4.6. As used in this paragraph, the terms laborers and mechanics include watchpersons and guards.

1. Overtime requirements. No contractor or subcontractor contracting for any part of the contract work which may require or involve the employment of laborers or mechanics shall require or permit any such laborer or mechanic in any workweek in which he or she is employed on such work to work in excess of forty hours in such workweek unless such laborer or mechanic receives compensation at a rate not less than one and one-half times the basic rate of pay for all hours worked in excess of forty hours in such workweek. 29 CFR 5.5.

2. Violation; liability for unpaid wages; liquidated damages. In the event of any violation of the clause set forth in paragraph 1. of this section the contractor and any subcontractor responsible therefor shall be liable for the unpaid wages and interest from the date of the underpayment. In addition, such contractor and subcontractor shall be liable to the United States (in the case of work done under contract for the District of Columbia or a territory, to such District or to such territory), for liquidated damages. Such liquidated damages shall be computed with respect to each individual laborer or

mechanic, including watchpersons and guards, employed in violation of the clause set forth in paragraph 1. of this section, in the sum currently provided in 29 CFR 5.5(b)(2)* for each calendar day on which such individual was required or permitted to work in excess of the standard workweek of forty hours without payment of the overtime wages required by the clause set forth in paragraph 1. of this section.

* $31 as of January 15, 2023 (See 88 FR 88 FR 2210) as may be adjusted annually by the Department of Labor, pursuant to the Federal Civil Penalties Inflation Adjustment Act of 1990.

3. Withholding for unpaid wages and liquidated damages

a. *Withholding process.* The FHWA or the contracting agency may, upon its own action, or must, upon written request of an authorized representative of the Department of Labor, withhold or cause to be withheld from the contractor so much of the accrued payments or advances as may be considered necessary to satisfy the liabilities of the prime contractor or any subcontractor for any unpaid wages; monetary relief, including interest; and liquidated damages required by the clauses set forth in this section on this contract, any other Federal contract with the same prime contractor, or any other federally assisted contract subject to the Contract Work Hours and Safety Standards Act that is held by the same prime contractor (as defined in § 5.2). The necessary funds may be withheld from the contractor under this contract, any other Federal contract with the same prime contractor, or any other federally assisted contract that is subject to the Contract Work Hours and Safety Standards Act and is held by the same prime contractor, regardless of whether the other contract was awarded or assisted by the same agency, and such funds may be used to satisfy the contractor liability for which the funds were withheld.

b. *Priority to withheld funds.* The Department has priority to funds withheld or to be withheld in accordance with Section IV paragraph 2.a. or paragraph 3.a. of this section, or both, over claims to those funds by:

(1) A contractor's surety(ies), including without limitation performance bond sureties and payment bond sureties;

(2) A contracting agency for its reprocurement costs;

(3) A trustee(s) (either a court-appointed trustee or a U.S. trustee, or both) in bankruptcy of a contractor, or a contractor's bankruptcy estate;

(4) A contractor's assignee(s);

(5) A contractor's successor(s); or

(6) A claim asserted under the Prompt Payment Act, 31 U.S.C. 3901–3907.

4. Subcontracts. The contractor or subcontractor must insert in any subcontracts the clauses set forth in paragraphs 1. through 5. of this section and a clause requiring the subcontractors to include these clauses in any lower tier subcontracts. The prime contractor is responsible for compliance by any subcontractor or lower tier subcontractor with the clauses set forth in paragraphs 1. through 5. In the event of any violations of these clauses, the prime contractor and any subcontractor(s) responsible will be liable for any unpaid wages and monetary relief, including interest from the date of the underpayment or loss, due to any workers of lower-tier subcontractors, and associated liquidated damages and may be subject to debarment, as appropriate.

5. Anti-retaliation. It is unlawful for any person to discharge, demote, intimidate, threaten, restrain, coerce, blacklist, harass, or in any other manner discriminate against, or to cause any person to discharge, demote, intimidate, threaten, restrain, coerce, blacklist, harass, or in any other manner discriminate against, any worker or job applicant for:

a. Notifying any contractor of any conduct which the worker reasonably believes constitutes a violation of the Contract Work Hours and Safety Standards Act (CWHSSA) or its implementing regulations in this part;

b. Filing any complaint, initiating or causing to be initiated any proceeding, or otherwise asserting or seeking to assert on behalf of themselves or others any right or protection under CWHSSA or this part;

c. Cooperating in any investigation or other compliance action, or testifying in any proceeding under CWHSSA or this part; or

d. Informing any other person about their rights under CWHSSA or this part.

VI. SUBLETTING OR ASSIGNING THE CONTRACT

This provision is applicable to all Federal-aid construction contracts on the National Highway System pursuant to 23 CFR 635.116.

1. The contractor shall perform with its own organization contract work amounting to not less than 30 percent (or a greater percentage if specified elsewhere in the contract) of the total original contract price, excluding any specialty items designated by the contracting agency. Specialty items may be performed by subcontract and the amount of any such specialty items performed may be deducted from the total original contract price before computing the amount of work required to be performed by the contractor's own organization (23 CFR 635.116).

a. The term “perform work with its own organization” in paragraph 1 of Section VI refers to workers employed or leased by the prime contractor, and equipment owned or rented by the prime contractor, with or without operators. Such term does not include employees or equipment of a subcontractor or lower tier subcontractor, agents of the prime contractor, or any other assignees. The term may include payments for the costs of hiring leased employees from an employee leasing firm meeting all relevant Federal and State regulatory requirements. Leased employees may only be included in this term if the prime contractor meets all of the following conditions: (based on longstanding interpretation)

(1) the prime contractor maintains control over the supervision of the day-to-day activities of the leased employees;
(2) the prime contractor remains responsible for the quality of the work of the leased employees;

(3) the prime contractor retains all power to accept or exclude individual employees from work on the project; and

(4) the prime contractor remains ultimately responsible for the payment of predetermined minimum wages, the submission of payrolls, statements of compliance and all other Federal regulatory requirements.

b. "Specialty Items" shall be construed to be limited to work that requires highly specialized knowledge, abilities, or equipment not ordinarily available in the type of contracting organizations qualified and expected to bid or propose on the contract as a whole and in general are to be limited to minor components of the overall contract. 23 CFR 635.102.

2. Pursuant to 23 CFR 635.116(a), the contract amount upon which the requirements set forth in paragraph (1) of Section VI is computed includes the cost of material and manufactured products which are to be purchased or produced by the contractor under the contract provisions.

3. Pursuant to 23 CFR 635.116(c), the contractor shall furnish (a) a competent superintendent or supervisor who is employed by the firm, has full authority to direct performance of the work in accordance with the contract requirements, and is in charge of all construction operations (regardless of who performs the work) and (b) such other of its own organizational resources (supervision, management, and engineering services) as the contracting officer determines is necessary to assure the performance of the contract.

4. No portion of the contract shall be sublet, assigned or otherwise disposed of except with the written consent of the contracting officer, or authorized representative, and such consent when given shall not be construed to relieve the contractor of any responsibility for the fulfillment of the contract. Written consent will be given only after the contracting agency has assured that each subcontract is evidenced in writing and that it contains all pertinent provisions and requirements of the prime contract. (based on long-standing interpretation of 23 CFR 635.116).

5. The 30-percent self-performance requirement of paragraph (1) is not applicable to design-build contracts; however, contracting agencies may establish their own self-performance requirements. 23 CFR 635.116(d).

VII. SAFETY: ACCIDENT PREVENTION

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

1. In the performance of this contract the contractor shall comply with all applicable Federal, State, and local laws governing safety, health, and sanitation (23 CFR Part 635). The contractor shall provide all safeguards, safety devices and protective equipment and take any other needed actions as it determines, or as the contracting officer may determine, to be reasonably necessary to protect the life and health of employees on the job and the safety of the public and to protect property in connection with the performance of the work covered by the contract. 23 CFR 635.108.

2. It is a condition of this contract, and shall be made a condition of each subcontract, which the contractor enters into pursuant to this contract, that the contractor and any subcontractor shall not permit any employee, in performance of the contract, to work in surroundings or under conditions which are unsanitary, hazardous or dangerous to his/her health or safety, as determined under construction safety and health standards (29 CFR Part 1926) promulgated by the Secretary of Labor, in accordance with Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C. 3704). 29 CFR 1926.10.

3. Pursuant to 29 CFR 1926.3, it is a condition of this contract that the Secretary of Labor or authorized representative thereof, shall have right of entry to any site of contract performance to inspect or investigate the matter of compliance with the construction safety and health standards and to carry out the duties of the Secretary under Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C. 3704).

VIII. FALSE STATEMENTS CONCERNING HIGHWAY PROJECTS

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

In order to assure high quality and durable construction in conformity with approved plans and specifications and a high degree of reliability on statements and representations made by engineers, contractors, suppliers, and workers on Federal-aid highway projects, it is essential that all persons concerned with the project perform their functions as carefully, thoroughly, and honestly as possible. Willful falsification, distortion, or misrepresentation with respect to any facts related to the project is a violation of Federal law. To prevent any misunderstanding regarding the seriousness of these and similar acts, Form FHWA-1022 shall be posted on each Federal-aid highway project (23 CFR Part 635) in one or more places where it is readily available to all persons concerned with the project:

18 U.S.C. 1020 reads as follows:

"Whoever, being an officer, agent, or employee of the United States, or of any State or Territory, or whoever, whether a person, association, firm, or corporation, knowingly makes any false statement, false representation, or false report as to the character, quality, quantity, or cost of the material used or to be used, or the quantity or quality of the work performed or to be performed, or the cost thereof in connection with the submission of plans, maps, specifications, contracts, or costs of construction on any highway or related project submitted for approval to the Secretary of Transportation; or

Whoever knowingly makes any false statement, false representation, false report or false claim with respect to the character, quality, quantity, or cost of any work performed or to be performed, or materials furnished or to be furnished, in connection with the construction of any highway or related project approved by the Secretary of Transportation; or

Whoever knowingly makes any false statement or false representation as to material fact in any statement, certificate, or report submitted pursuant to provisions of the Federal-aid Roads Act approved July 11, 1916, (39 Stat. 355), as amended and supplemented;

Shall be fined under this title or imprisoned not more than 5 years or both."

IX. IMPLEMENTATION OF CLEAN AIR ACT AND FEDERAL WATER POLLUTION CONTROL ACT (42 U.S.C. 7606; 2 CFR 200.88; EO 11738)

This provision is applicable to all Federal-aid construction contracts in excess of $150,000 and to all related subcontracts. 48 CFR 2.101; 2 CFR 200.327.

By submission of this bid/proposal or the execution of this contract or subcontract, as appropriate, the bidder, proposer, Federal-aid construction contractor, subcontractor, supplier, or vendor agrees to comply with all applicable standards, orders or regulations issued pursuant to the Clean Air Act (42 U.S.C. 7401-7671q) and the Federal Water Pollution Control Act, as amended (33 U.S.C. 1251-1387). Violations must be reported to the Federal Highway Administration and the Regional Office of the Environmental Protection Agency. 2 CFR Part 200, Appendix II.

The contractor agrees to include or cause to be included the requirements of this Section in every subcontract, and further agrees to take such action as the contracting agency may direct as a means of enforcing such requirements. 2 CFR 200.327.

X. CERTIFICATION REGARDING DEBARMENT, SUSPENSION, INELIGIBILITY AND VOLUNTARY EXCLUSION

This provision is applicable to all Federal-aid construction contracts, design-build contracts, subcontracts, lower-tier subcontracts, purchase orders, lease agreements, consultant contracts or any other covered transaction requiring FHWA approval or that is estimated to cost $25,000 or more – as defined in 2 CFR Parts 180 and 1200. 2 CFR 180.220 and 1200.220.

1**. Instructions for Certification – First Tier Participants:**

a. By signing and submitting this proposal, the prospective first tier participant is providing the certification set out below.

b. The inability of a person to provide the certification set out below will not necessarily result in denial of participation in this covered transaction. The prospective first tier participant shall submit an explanation of why it cannot provide the certification set out below. The certification or explanation will be considered in connection with the department or agency's determination whether to enter into this transaction. However, failure of the prospective first tier participant to furnish a certification or an explanation shall disqualify such a person from participation in this transaction. 2 CFR 180.320.

c. The certification in this clause is a material representation of fact upon which reliance was placed when the contracting agency determined to enter into this transaction. If it is later determined that the prospective participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the contracting agency may terminate this transaction for cause of default. 2 CFR 180.325.

d. The prospective first tier participant shall provide immediate written notice to the contracting agency to whom this proposal is submitted if any time the prospective first tier participant learns that its certification was erroneous when submitted or has become erroneous by reason of changed circumstances. 2 CFR 180.345 and 180.350.

e. The terms "covered transaction," "debarred," "suspended," "ineligible," "participant," "person," "principal," and "voluntarily excluded," as used in this clause, are defined in 2 CFR Parts 180, Subpart I, 180.900-180.1020, and 1200. “First Tier Covered Transactions” refers to any covered transaction between a recipient or subrecipient of Federal funds and a participant (such as the prime or general contract). “Lower Tier Covered Transactions” refers to any covered transaction under a First Tier Covered Transaction (such as subcontracts). “First Tier Participant” refers to the participant who has entered into a covered transaction with a recipient or subrecipient of Federal funds (such as the prime or general contractor). “Lower Tier Participant” refers any participant who has entered into a covered transaction with a First Tier Participant or other Lower Tier Participants (such as subcontractors and suppliers).

f. The prospective first tier participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency entering into this transaction. 2 CFR 180.330.

g. The prospective first tier participant further agrees by submitting this proposal that it will include the clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transactions," provided by the department or contracting agency, entering into this covered transaction, without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions exceeding the $25,000 threshold. 2 CFR 180.220 and 180.300.

h. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. 2 CFR 180.300; 180.320, and 180.325. A participant is responsible for ensuring that its principals are not suspended, debarred, or otherwise ineligible to participate in covered transactions. 2 CFR 180.335. To verify the eligibility of its principals, as well as the eligibility of any lower tier prospective participants, each participant may, but is not required to, check the System for Award Management website (https://www.sam.gov/). 2 CFR 180.300, 180.320, and 180.325.

i. Nothing contained in the foregoing shall be construed to require the establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of the prospective participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.

j. Except for transactions authorized under paragraph (f) of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the department or agency may terminate this transaction for cause or default. 2 CFR 180.325.

* * * * *

2. Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion – First Tier Participants:

a. The prospective first tier participant certifies to the best of its knowledge and belief, that it and its principals:

(1) Are not presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participating in covered transactions by any Federal department or agency, 2 CFR 180.335;.

(2) Have not within a three-year period preceding this proposal been convicted of or had a civil judgment rendered against them for commission of fraud or a criminal offense in connection with obtaining, attempting to obtain, or performing a public (Federal, State, or local) transaction or contract under a public transaction; violation of Federal or State antitrust statutes or commission of embezzlement, theft, forgery, bribery, falsification or destruction of records, making false statements, or receiving stolen property, 2 CFR 180.800;

(3) Are not presently indicted for or otherwise criminally or civilly charged by a governmental entity (Federal, State or local) with commission of any of the offenses enumerated in paragraph (a)(2) of this certification, 2 CFR 180.700 and 180.800; and

(4) Have not within a three-year period preceding this application/proposal had one or more public transactions (Federal, State or local) terminated for cause or default. 2 CFR 180.335(d).

(5) Are not a corporation that has been convicted of a felony violation under any Federal law within the two-year period preceding this proposal (USDOT Order 4200.6 implementing appropriations act requirements); and

(6) Are not a corporation with any unpaid Federal tax liability that has been assessed, for which all judicial and administrative remedies have been exhausted, or have lapsed, and that is not being paid in a timely manner pursuant to an agreement with the authority responsible for collecting the tax liability (USDOT Order 4200.6 implementing appropriations act requirements).

b. Where the prospective participant is unable to certify to any of the statements in this certification, such prospective participant should attach an explanation to this proposal. 2 CFR 180.335 and 180.340.

* * * * *

3. **Instructions for Certification - Lower Tier Participants:**

(Applicable to all subcontracts, purchase orders, and other lower tier transactions requiring prior FHWA approval or estimated to cost $25,000 or more - 2 CFR Parts 180 and 1200). 2 CFR 180.220 and 1200.220.

a. By signing and submitting this proposal, the prospective lower tier participant is providing the certification set out below.

b. The certification in this clause is a material representation of fact upon which reliance was placed when this transaction was entered into. If it is later determined that the prospective lower tier participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the department, or agency with which this transaction originated may pursue available remedies, including suspension and/or debarment.

c. The prospective lower tier participant shall provide immediate written notice to the person to which this proposal is submitted if at any time the prospective lower tier participant learns that its certification was erroneous by reason of changed circumstances. 2 CFR 180.365.

d. The terms "covered transaction," "debarred," "suspended," "ineligible," "participant," "person," "principal," and "voluntarily excluded," as used in this clause, are defined in 2 CFR Parts 180, Subpart I, 180.900 – 180.1020, and 1200. You may contact the person to which this proposal is submitted for assistance in obtaining a copy of those regulations. “First Tier Covered Transactions” refers to any covered transaction between a recipient or subrecipient of Federal funds and a participant (such as the prime or general contract). “Lower Tier Covered Transactions” refers to any covered transaction under a First Tier Covered Transaction (such as subcontracts). “First Tier Participant” refers to the participant who has entered into a covered transaction with a recipient or subrecipient of Federal funds (such as the prime or general contractor). “Lower Tier Participant” refers any participant who has entered into a covered transaction with a First Tier Participant or other Lower Tier Participants (such as subcontractors and suppliers).

e. The prospective lower tier participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency with which this transaction originated. 2 CFR 1200.220 and 1200.332.

f. The prospective lower tier participant further agrees by submitting this proposal that it will include this clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transaction," without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions exceeding the $25,000 threshold. 2 CFR 180.220 and 1200.220.

g. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A participant is responsible for ensuring that its principals are not suspended, debarred, or otherwise ineligible to participate in covered transactions. To verify the eligibility of its principals, as well as the eligibility of any lower tier prospective participants, each participant may, but is not required to, check the System for Award Management website (https://www.sam.gov/), which is compiled by the General Services Administration. 2 CFR 180.300, 180.320, 180.330, and 180.335.

h. Nothing contained in the foregoing shall be construed to require establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.

i. Except for transactions authorized under paragraph e of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily

excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the department or agency with which this transaction originated may pursue available remedies, including suspension and/or debarment. 2 CFR 180.325.

* * * * *

4. Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion--Lower Tier Participants:

a. The prospective lower tier participant certifies, by submission of this proposal, that neither it nor its principals:

(1) is presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participating in covered transactions by any Federal department or agency, 2 CFR 180.355;

(2) is a corporation that has been convicted of a felony violation under any Federal law within the two-year period preceding this proposal (USDOT Order 4200.6 implementing appropriations act requirements); and

(3) is a corporation with any unpaid Federal tax liability that has been assessed, for which all judicial and administrative remedies have been exhausted, or have lapsed, and that is not being paid in a timely manner pursuant to an agreement with the authority responsible for collecting the tax liability. (USDOT Order 4200.6 implementing appropriations act requirements)

b. Where the prospective lower tier participant is unable to certify to any of the statements in this certification, such prospective participant should attach an explanation to this proposal.

* * * * *

XI. CERTIFICATION REGARDING USE OF CONTRACT FUNDS FOR LOBBYING

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts which exceed $100,000. 49 CFR Part 20, App. A.

1. The prospective participant certifies, by signing and submitting this bid or proposal, to the best of his or her knowledge and belief, that:

a. No Federal appropriated funds have been paid or will be paid, by or on behalf of the undersigned, to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with the awarding of any Federal contract, the making of any Federal grant, the making of any Federal loan, the entering into of any cooperative agreement, and the extension, continuation, renewal, amendment, or modification of any Federal contract, grant, loan, or cooperative agreement.

b. If any funds other than Federal appropriated funds have been paid or will be paid to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with this Federal contract, grant, loan, or cooperative agreement, the undersigned shall complete and submit Standard Form-LLL, "Disclosure Form to Report Lobbying," in accordance with its instructions.

2. This certification is a material representation of fact upon which reliance was placed when this transaction was made or entered into. Submission of this certification is a prerequisite for making or entering into this transaction imposed by 31 U.S.C. 1352. Any person who fails to file the required certification shall be subject to a civil penalty of not less than $10,000 and not more than $100,000 for each such failure.

3. The prospective participant also agrees by submitting its bid or proposal that the participant shall require that the language of this certification be included in all lower tier subcontracts, which exceed $100,000 and that all such recipients shall certify and disclose accordingly.

XII. USE OF UNITED STATES-FLAG VESSELS:

This provision is applicable to all Federal-aid construction contracts, design-build contracts, subcontracts, lower-tier subcontracts, purchase orders, lease agreements, or any other covered transaction. 46 CFR Part 381.

This requirement applies to material or equipment that is acquired for a specific Federal-aid highway project. 46 CFR 381.7. It is not applicable to goods or materials that come into inventories independent of an FHWA funded-contract.

When oceanic shipments (or shipments across the Great Lakes) are necessary for materials or equipment acquired for a specific Federal-aid construction project, the bidder, proposer, contractor, subcontractor, or vendor agrees:

1. To utilize privately owned United States-flag commercial vessels to ship at least 50 percent of the gross tonnage (computed separately for dry bulk carriers, dry cargo liners, and tankers) involved, whenever shipping any equipment, material, or commodities pursuant to this contract, to the extent such vessels are available at fair and reasonable rates for United States-flag commercial vessels. 46 CFR 381.7.

2. To furnish within 20 days following the date of loading for shipments originating within the United States or within 30 working days following the date of loading for shipments originating outside the United States, a legible copy of a rated, ‘on-board’ commercial ocean bill-of-lading in English for each shipment of cargo described in paragraph (b)(1) of this section to both the Contracting Officer (through the prime contractor in the case of subcontractor bills-of-lading) and to the Office of Cargo and Commercial Sealift (MAR-620), Maritime Administration, Washington, DC 20590. (MARAD requires copies of the ocean carrier's (master) bills of lading, certified onboard, dated, with rates and charges. These bills of lading may contain business sensitive information and therefore may be submitted directly to MARAD by the Ocean Transportation Intermediary on behalf of the contractor). 46 CFR 381.7.

ATTACHMENT A - EMPLOYMENT AND MATERIALS PREFERENCE FOR APPALACHIAN DEVELOPMENT HIGHWAY SYSTEM OR APPALACHIAN LOCAL ACCESS ROAD CONTRACTS (23 CFR 633, Subpart B, Appendix B)
This provision is applicable to all Federal-aid projects funded under the Appalachian Regional Development Act of 1965.

1. During the performance of this contract, the contractor undertaking to do work which is, or reasonably may be, done as on-site work, shall give preference to qualified persons who regularly reside in the labor area as designated by the DOL wherein the contract work is situated, or the subregion, or the Appalachian counties of the State wherein the contract work is situated, except:

a. To the extent that qualified persons regularly residing in the area are not available.

b. For the reasonable needs of the contractor to employ supervisory or specially experienced personnel necessary to assure an efficient execution of the contract work.

c. For the obligation of the contractor to offer employment to present or former employees as the result of a lawful collective bargaining contract, provided that the number of nonresident persons employed under this subparagraph (1c) shall not exceed 20 percent of the total number of employees employed by the contractor on the contract work, except as provided in subparagraph (4) below.

2. The contractor shall place a job order with the State Employment Service indicating (a) the classifications of the laborers, mechanics and other employees required to perform the contract work, (b) the number of employees required in each classification, (c) the date on which the participant estimates such employees will be required, and (d) any other pertinent information required by the State Employment Service to complete the job order form. The job order may be placed with the State Employment Service in writing or by telephone. If during the course of the contract work, the information submitted by the contractor in the original job order is substantially modified, the participant shall promptly notify the State Employment Service.

3. The contractor shall give full consideration to all qualified job applicants referred to him by the State Employment Service. The contractor is not required to grant employment to any job applicants who, in his opinion, are not qualified to perform the classification of work required.

4. If, within one week following the placing of a job order by the contractor with the State Employment Service, the State Employment Service is unable to refer any qualified job applicants to the contractor, or less than the number requested, the State Employment Service will forward a certificate to the contractor indicating the unavailability of applicants. Such certificate shall be made a part of the contractor's permanent project records. Upon receipt of this certificate, the contractor may employ persons who do not normally reside in the labor area to fill positions covered by the certificate, notwithstanding the provisions of subparagraph (1c) above.

5. The provisions of 23 CFR 633.207(e) allow the contracting agency to provide a contractual preference for the use of mineral resource materials native to the Appalachian region.

6. The contractor shall include the provisions of Sections 1 through 4 of this Attachment A in every subcontract for work which is, or reasonably may be, done as on-site work.

NOTICE OF REQUIREMENTS FOR AFFIRMATIVE ACTION TO ENSURE EQUAL EMPLOYMENT OPPORTUNITY (EXECUTIVE ORDER 11246)

1. The Offeror's or Bidder's attention is called to the "Equal Opportunity Clause" and the "Standard Federal Equal Employment Opportunity Construction Contract Specifications" set forth herein.

2. The goal for female participation, expressed in percentage terms for the Contractor's aggregate workforce in each trade on all construction work, is 6.9%.

Until further notice	Goals for minority participation for each trade (percent)
SHSA Cities:	
Pascagoula - Moss Point	16.9
Biloxi - Gulfport	19.2
Jackson	30.3
SMSA Counties:	
Desoto	32.3
Hancock, Harrison, Stone	19.2
Hinds, Rankin	30.3
Jackson	16.9
Non-SMSA Counties:	
George, Greene	26.4
Alcorn, Benton, Bolivar, Calhoun, Carroll, Chickasaw, Clay, Coahoma, Grenada, Itawamba, Lafayette, Lee, Leflore, Marshall, Monroe, Montgomery, Panola, Pontotoc, Prentiss, Quitman, Sunflower, Tallahatchie, Tate, Tippah, Tishomingo, Tunica, Union, Washington, Webster, Yalobusha	26.5
Attala, Choctaw, Claiborne, Clarke, Copiah, Covington, Franklin, Holmes, Humphreys, Issaquena, Jasper, Jefferson, Jefferson Davis, Jones Kemper, Lauderdale, Lawrence, Leake, Lincoln, Lowndes, Madison, Neshoba, Newton, Noxubee, Oktibbeha, Scott, Sharkey, Simpson, Smith, Warren, Wayne, Winston, Yazoo	32.0
Forrest, Lamar, Marion, Pearl River, Perry, Pike, Walthall	27.7
Adams, Amite, Wilkinson	30.4

These goals are applicable to all the Contractor's construction work (whether or not it is Federal or federally assisted) performed in the covered area. If the contractor performs construction work in a geographical area located outside of the covered area, it shall apply the goals established for such geographical area where the work is actually performed. With regard to this second area, the contractor also is subject to the goals for both its federally involved and nonfederally involved construction.

The Contractor's compliance with the Executive Order and the regulations in 41 CFR Part 60-4 shall be based on its implementation of the Equal Opportunity clause, specific affirmative action obligations required by the specifications set forth in 41 CFR 60-4.3(a), and its efforts to meet the goals. The hours of minority and female employment and training must be substantially uniform throughout the length of the contract, and in each trade, and the Contractor shall make a good faith effort to employ minorities and women evenly on each of its projects. The transfer of minority or female employees or trainees from Contractor to Contractor or from project to project for the sole purpose of meeting the Contractor's goals shall be a violation of the contract, the Executive Order and the regulations in 41 CFR Part 60-4.2(d). Compliance with the goals will be measured against the total work hours performed.

3. The Contractor shall provide written notification to the Director of the Office of Federal Contract Compliance Programs within 10 working days of award of any construction subcontract in excess of $10,000 at any tier for construction work under the contract resulting from this solicitation. The notification shall list the name, address and telephone number of the subcontractor, employer identification number of the subcontractor, estimated dollar amount of the subcontract; estimated starting and completion dates of the subcontract; and the geographical area in which the subcontract is to be performed.

4. As used in this Notice, and in the contract resulting from this solicitation, the "covered area" is to the county and city (if any), stated in the advertisement.

5. The notification required in Paragraph 3 shall be addressed to the following:

Contract Compliance Officer
Mississippi Department of Transportation
P.O. Box 1850
Jackson, Mississippi 39215-1850

(12/04/2018)

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-101-1 **CODE: (IS)**

DATE: 07/20/2023

SUBJECT: Definitions and Terms

Section 101, Definitions and Terms, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

907-101.01--Abbreviations. After the abbreviation API on page 1, add the following.

APL Approved Products List

Replace the abbreviation for AWPA on page 1 with the following.

AWPA American Wood Protection Association

907-101.02--Definitions. Delete the sentence after the list of holidays in Subsection 101.02 on page 6 under **holidays, legal**, and substitute the following.

When a legal holiday falls on a Saturday or Sunday, the succeeding Monday, or as proclaimed by the Governor, will be observed as a legal holiday.

Delete the definition for Notice to Proceed in Subsection 101.02 on page 8, and substitute the following.

Notice to Proceed - Written notice to the Contractor to proceed with the contract work.

Delete the definition for "Plans" in Subsection 101.02 on page 8, and substitute the following.

plans - The approved plans, profiles, typical cross-sections, working drawings and supplemental drawings, or exact reproduction thereof, that show the location, character, dimensions, and details of the work to be done. The plans may also include electronic files, referred to on the plans as Electronic Files Identified as Plans, which may include engineering models, spreadsheets, CADD files or other electronic files used to convey design intent. When the contract does not have an official set of plans, reference to the plans shall mean the contract documents.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-102-2 **CODE: (IS)**

DATE: 11/22/2017

SUBJECT: Bidding Requirements and Conditions

Section 102, Bidding Requirements and Conditions, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

907-102.01--Prequalification of Bidders. Delete the last sentence of the third paragraph of Subsection 102.01 on page 13, and substitute the following.

The Bidder's Certificate of Responsibility number must be on file with the Department's Contract Administration Division prior to request for permission to bid.

907-102.02--Contents of Proposal Forms. Delete the fourth paragraph in Subsection 102.02 on page 13, and substitute the following.

Prospective bidders must complete an online request for permission to be eligible to bid a project. Upon approval, the bidder will be authorized to submit a bid electronically using Bid Express at http://bidx.com.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-104-2 **CODE: (SP)**

DATE: 06/17/2025

SUBJECT: Minor Alteration to the Contract

Section 104, Scope of Work, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows:

907-104.02--Alterations of Plans or Character of Work.

907-104.02.3--Minor Alteration to the Contract. In the first paragraph of Subsection 104.02.3 on page 25, change $10,000.00 to $25,000.00.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-105-2 **CODE: (IS)**

DATE: 07/20/2023

SUBJECT: Control of Work

Section 105, Control of Work, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

907-105.01--Authority of the Engineer. Delete the first sentence of the second paragraph of Subsection 105.01 on page 31, and substitute the following.

The Engineer has the right to suspend the work wholly or in part and to withhold payments because of the Contractor's failure to correct conditions unsafe for workmen or the general public, for failure to carry out provisions of the Contract, or for failure to carry out orders.

907-105.02--Plans and Working Drawings. Delete the first paragraph of Subsection 105.02 on page 31, and substitute the following.

After the contract is executed by the Executive Director, the Contractor will receive, free of charge, two bound copies of the proposal and contract documents (one executed and one blank) two full scale copies of the plans, five half-scale copies of the Plans, and Electronic Files Identified as Plans. The Contractor shall have one copy of the proposal and contract documents and one half-scale copy of the plans available at all times during work activity on the project.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-106-5 **CODE: (IS)**

DATE: 4/20/2026

SUBJECT: Control of Materials

Section 106, Control of Materials, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

After Subsection 106.13 on page 47, add the following:

907-106.14--Buy America/Build America. Buy America (BABA) Materials Sourcing Requirements for Federal-Aid Projects.

The "Infrastructure Investment and Jobs Act" (the "Act"), or Bipartisan Infrastructure Law (BIL), was enacted on November 15, 2021 (See Public Law No. 117-58, Sections 70901-70953). The Build America, Buy America (BABA) provisions of the Act expand the previous Buy America requirements beyond what was currently required for steel and iron products.

Articles, materials, or supplies will only be classified under one of the following categories: iron or steel products, construction materials, manufactured products, or excluded materials (as further described in subsection 907-700.01.1). An article, material, or supply shall not be considered to fall under multiple categories. The applicable classification of the article, material, or supply being permanently incorporated into a construction project will be based on the status at the time the article, material, or supply is brought to the project work site.

Any iron or steel products, construction materials, and manufactured products that are permanently incorporated into a construction project, shall be domestically manufactured and compliant with current requirements of the Act, including 2 CFR 184, 2 CFR 200.322, 0MB 24-02 Memo and related requirements therein, and with the current requirements within 23 CFR 635.410.

It is the prime Contractor's responsibility to ensure all submittals and/or certifications required by the above listed Buy America/BABA provisions are submitted to the Project Engineer prior to the article, material, or supply being incorporated into the work.

Buy America/BABA provisions do not apply to temporarily used articles, materials, or supplies that:
(1) are specified to be removed at the end of the project per the contract provisions, or (2) are specified to remain in place per the contract provisions and are also documented by the Department in the contract provisions to be removed in a subsequent imminent, near-term phased project.

The following categories, as described above, require Domestic Materials Self-Certification Form (as described within Subsection 907-700.01.2) on construction projects:

Iron or Steel Products
Construction Materials
Manufactured Products.

Buy America/BABA provisions do not apply to excluded materials.

A non-exclusive list of items that must comply with the above listed Buy America/BABA requirements and require the submittal of the Buy America Domestic Materials Self- Certification Form may be viewed at www.goMDOT.com under Business Center ➔ Engineering Standards/Guides/Manuals ➔ Construction Materials.

The list of items referenced above is not all-inclusive. All iron or steel products, construction material, and manufactured products permanently incorporated into the project shall comply with the applicable Buy America/Build America (BABA) requirements, regardless of whether such items are specifically Identified.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-108-4 **CODE: (SP)**

DATE: 10/07/2020

SUBJECT: Subletting of Contract

Section 108, Prosecution and Progress, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

907-108.01--Subletting of Contract.

907-108.01.1--General. Delete the third sentence of the tenth paragraph of Subsection 108.01.1 on the bottom of page 72.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-108-6 **CODE: (SP)**

DATE: 03/11/2025

SUBJECT: Default and Termination of Contract

Section 108, Prosecution and Progress, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

907-108.08--Default and Termination of Contract. At the end of the Subsection 108.08 on page 85, add the following.

907-108.08.1--Debarment of Contractor. If the Contractor is declared to be in default under this Subsection and the Contract terminated for the reason(s) indicated in Subsections 108.08 (d), (f), or (g) above, the Commission may, in its discretion and in addition to default and termination, declare the Contractor to be debarred from bidding on any other projects for a period of one (1) year from the date of the termination letter. If the debarred Contractor has multiple on-going Contracts with the Commission and receives a one (1) year debarment, the on-going Contract(s) may continue; however, the Contractor will not be allowed to bid another project until one (1) year has passed from date of the termination letter.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-109-5 **CODE: (IS)**

DATE: 11/14/2023

SUBJECT: Measurement and Payment

Section 109, Measurement and Payment, of the 2017 Edition of the Mississippi StandardSpecifications for Road and Bridge Construction is hereby amended as follows.

907-109.01--Measurement of Quantities. Delete the sixth full paragraph of Subsection 109.01on page 88, and substitute the following.

If appropriate based on the specific circumstances of the project, the Contractor may request that material specified to be measured by the cubic yard or ton be converted to the other measure. The Contractor must submit this request to the Engineer. The Engineer will provide an approval or denial in writing. The decision is in the sole discretion of the Engineer. If approved, factors for this conversion will be determined by the District Materials Engineer and agreed to by the Contractor. The conversion of the materials along with the conversion factor will be incorporated into the Contract by supplemental agreement. The supplemental agreement must be executed before such method of measurement is used.

907-109.04--Extra Work.

907-109.04.1--Supplemental Agreement. Delete the second paragraph of Subsection 109.04.1 on page 90.

907-109.04.2--Force Account Agreement. Delete the last sentence of subparagraph (c) in Subsection 109.04.2 on page 91, and substitute the following.

An amount will be added equal to fifteen percent (15%) of the sum thereof, excluding sales tax.

Delete subparagraph (d) in Subsection 109.04.2 on pages 91 & 92, and substitute the following.

(d) **Equipment.** Equipment used for force account work shall be of sufficient size and type necessary to perform the required work in an economic and expeditious manner. The Contractor must provide the manufacturer, make, model, year, type of fuel and other necessary information to determine proper hourly payment rates. Subject to advance approval of the Engineer, actual transportation cost for a distance of not more than 200 miles will be reimbursed for equipment not already on the project.

For equipment authorized by the Engineer for use on the force account work, the Engineer will use the equipment rental rates from the "*Rental Rate Blue Book*" as published on the Equipment Watch website www.equipmentwatch.com for the time period the force account work is authorized to determine payment to the Contractor. The maximum allowable rates

are determined as follows:

1. The hourly equipment rate will equal the FHWA total hourly rate. This rate takes into account adjustment factors for age and region.
2. The hourly estimated operating costs have been included in the FHWA total hourly rate.
3. The idle and standby rates shall be as listed in the "*Rental Rate Blue Book*" as reported by *Equipment Watch*.
4. These rates include the basic machine plus any necessary attachments.

Standby rates shall apply when equipment is not in operation and is approved by the Engineer to standby for later use to complete the work. Idle rates shall apply to equipment located on the project and the engine is burning fuel but no ground engaging or other components are actively engaged in meaningful work. In general, idle or standby rates shall apply when equipment is not in use, but will be needed again to complete the work and the cost of moving the equipment will exceed the accumulated standby cost. If the idle standby cost should exceed the equipment moving cost to or from the work site, the Contractor will be entitled to the moving cost only. Idle or standby rates will be used under the following conditions:

1. The equipment is totally dedicated to the force account work and not used intermittently on other work.
2. Idle or standby cost will be considered only after equipment has been operated on force account work.
3. The sum of idle or standby time and operating time shall not exceed eight (8) hours per day or 40 hours in a week.
4. Idle or standby payment will not apply to days not normally considered to be work days such as holidays, weekends, or days of inclement weather when no other work is taking place.

The Department will not pay for idle or standby time when equipment is inoperable, for time spent repairing equipment, or for the time elapsed after the Engineer has advised the Contractor that the equipment is no longer needed. The Department will determine if it will be more cost effective to pay standby time on approved equipment on site or for multiple mobilizations.

If equipment is needed, which is not included in the *Rental Rate Blue Book* as reported by *Equipment Watch*, the Department and Contractor will agree upon reasonable rental rates in writing before the equipment is used.

All equipment shall be subject to approval from day to day in accordance with the requirements of Subsection 108.05.

907-109.06--Partial Payment.

907-109.06.2--Advancement on Materials.
Delete the next to last paragraph of Subsection 109.06.2 on page 95, and substitute the following.

Materials for which an advanced payment has been allowed must be paid for by the Contractor within 30 days of the estimate on which the advanced payment was first allowed and proof of said payment must be verified by the supplier. If proof of payment is not furnished within the allowable 30 days, the advanced payment will be deducted on subsequent current estimates until such time that proof of payment is furnished.

907-109.07--Changes in Material Costs. After the fifth paragraph of Subsection 109.07 on page 96, change the web address to the following.

https://mdot.ms.gov/portal/current_letting

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-201-1 **CODE: (SP)**

DATE: 03/01/2017

SUBJECT: Clearing and Grubbing

PROJECT: NH-0008-03(050) / 105530301 - Madison County
CRP-0008-03(050) / 105530302 - Madison County
CRP-0008-03(050) / 105530303 - Hinds County
CRP-0008-03(050) / 105530304 - Yazoo County

Section 201, Clearing and Grubbing, of the 2017 Edition of the Standard Specifications for Road and Bridge Construction is hereby amended as follows.

907-201.03--Construction Requirements. After Subsection 201.03.2 on page 103, add the following.

907-201.03.3--Random Clearing, Stream Bank Clearing. The stream bank areas associated with the bank stabilization work, shall be cleared of trees, brush, drift, miscellaneous debris, or other obstruction that would hinder excavation or grading and subsequent construction of bank stabilization operations. Clearing shall be limited to the absolute minimum necessary for construction of the work. Stream bank slopes, low top banks, terraces, and high top banks not located within the construction limits of the bank stabilization countermeasures shall not be cleared. Any materials of value removed shall be stockpiled landward of the top bank as directed by the Engineer. Care shall be taken by the Contractor not to cut or injure any trees which do not unreasonably interfere with construction. It is the intent of these specifications that growth around the work area, including the channel bank, be preserved to the maximum extent practicable.

Prior to placing stone, all snags, stumps, or other obstructions that may conflict with the bank stabilization countermeasure shall be either cut off flush with the finished slope grade or grubbed out and removed from the area to be covered by stone. No grubbing will be required beyond the slope stake limits of the structure.

Requests to clear right-of-way or easement shall be submitted for approval and shall be limited to the approved areas. All trees and brush within the areas authorized to be cleared shall be felled and, together with drift and other debris, disposed of in accordance with Subsection 107.22.2.

If not burned, materials and debris shall be removed from the right-of-way and/or easement and disposed of outside the limits of view from any public road or facility. Locations for disposal shall be obtained by the Contractor in accordance with Subsection 104.05.

907-201.03.4--Random Clearing, Clearing and Snagging. All logs, trees, limbs, branches, log/brush jams or other obstructions which are located within the limits of the longitudinal stone dikes, bendway weirs, and riprap revetment shall be removed from the stream as directed by the

Engineer. The area to be cleared and snagged shall include the perimeter and flow area of the channel extending a minimum 15 feet beyond the riverside limits of the structure and up to the channel top bank. Trees on the channel bank slope that are leaning over the bank stabilization work or other objects that may fall into the channel shall be included.

Burning of waste vegetation resulting from clearing and snagging shall be in accordance with the requirements of Subsection 107.22.2.

If not burned, materials and debris shall be removed from the right-of-way and/or easement and disposed of outside the limits of view from any public road or facility. Locations for disposal shall be obtained by the Contractor in accordance with Subsection 104.05.

907-201.04--Method of Measurement. After the paragraph in Subsection 201.04.3 on page 103, add the following.

The designated areas of clearing and snagging will be measured per station in accordance with the typical sections shown on the plans. This shall apply to the longitudinal stone dikes, bendway weirs, and portions of the riprap revetment riverward of the channel top bank. Separate measurement shall be made for stream bank clearing required and satisfactorily completed on the landside bank for the stone windrow dikes, trench-fill, and riprap revetment.

907-201.05--Basis of Payment. Add the following to the list of pay items on page 104.

907-201-C: Random Clearing and Grubbing - per station or acre

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-401-4 **CODE: (IS)**

DATE: 03/02/2026

SUBJECT: Asphalt Pavement - General

Section 401, Asphalt Pavement - General, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows..

907-401.02--Materials.

907-401.02.6--Standards of Acceptance.

907-401.02.6.4—Acceptance Procedure for Density.

Delete the paragraph and Lot Determination table of Subsection 401.02.6.4 and substitute the following:

Each completed lift will be accepted with respect to compaction on a lot to lot basis from density tests performed by the Department. For normal production days, every 350 tons will be considered a lot. When cores are being used for the compaction evaluation, randomly obtain one core from each lot. When the nuclear density gauge is being used for compaction evaluation, obtain two random readings from each lot and average the results. See Chapter 7 of the latest edition of MDOT's Field Manual for Asphalt Mixtures for more details. Additional tests may be required by the Engineer to determine acceptance of work appearing deficient. The Contractor shall furnish and maintain traffic control for all compaction evaluations, including coring, required in satisfying specified density requirements.

907-401.02.6.4.1 –Roadway Density.

Delete the last sentence in section 1 of Subsection 401.02.6.4.1 on page 250 and substitute the following:

For all other leveling, no density shall be required but the pavement shall be rolled to refusal densification as defined in Subsection 907-401.02.6.4.3.

907-401.02.6.4.3—Roll to Refusal Densification.

Roll to refusal densification is defined as the number of roller passes to maximize the in-place unit weight of the mixture. A density gauge shall be used to determine the number of passes to achieve the maximum in-place unit weight.

907-401.02.6.4.4—Irregular Areas.

Irregular areas are defined as a mat where an established rolling pattern cannot be obtained. Irregular areas include areas with a width of less than 8 feet or shorter than 300 feet in length, pre-leveling, wedging [less than fifty percent (50%) of width greater than minimum lift thickness], ramp pads, median crossovers, turnouts, and other areas where an established rolling pattern cannot be obtained.

907-401.02.6.8--Acceptance Procedure for Pavement Smoothness Using Mean Roughness Index (MRI). Delete the third sentence of the second paragraph of Subsection 401.02.6.8 on page 253, and substitute the following.

The surface shall be tested and corrected to a smoothness index as described herein except those locations or specific projects that are excluded from smoothness testing with an IPS.

Delete the third, fourth and fifth paragraphs of Subsection 401.02.6.8 on pages 253 & 254, and substitute the following.

The smoothness of the surface lift will be determined for traffic lanes, auxiliary lanes, climbing lane and two-way turn lanes. Areas excluded from a smoothness test with the IPS are acceleration and deceleration lanes, tapered sections, transition sections for width, shoulders, crossovers, ramps, side street returns, etc. The roadway pavement on bridge replacement projects having 1,000 feet or less of pavement on each side of the structure will be excluded from a smoothness test. Smoothness testing shall exclude 264 feet from each transverse joint that separates the pavement from a bridge deck, bridge approach slab or existing pavement not constructed under the contract. This can apply to any other exceptions including, but not limited to, railroad crossings and manholes. Segments containing a considerable number of encroachments such as intersections, manholes, curb and gutter sections, etc. may be excluded at the Engineer's discretion.

Once paving has concluded, one final smoothness measurement shall be performed for both pay adjustments and corrective action. Multiple smoothness measurements for pay adjustments and correction can still be performed at the Engineer's discretion. These measurements must be performed at the posted speed limit or 50 miles per hour (±5 miles per hour), whichever is lower. Measurements will be made in both wheel paths of exterior and interior lanes. The wheel paths shall be designated as being located three feet (3') and nine feet (9') from centerline or longitudinal joint, respectively. Testing will also be required on sections that have been surface corrected. No smoothness testing shall be performed when there is any residual moisture on the pavement surface. Any additional testing shall meet the requirements of Subsection 907-403.03.2.

The surface lift will be accepted on a continuous interval basis for pavement smoothness. Continuous reporting is based upon all MRI values for a specified running interval. These values are averaged and presented at the midpoint of the specified running interval.

Delete the last sentence of the last paragraph of Subsection 401.02.6.8 on page 254, and substitute the following.

All tests and corrections shall be in accordance with AASHTO R 54, Accepting Pavement Ride Quality When Measured Using Inertial Profiling Systems.

Delete Subsection 401.02.6.9 on pages 254 & 255, and substitute the following.

907-401.02.6.9--Inertial Profiling System.

907-401.02.6.9.1--General. The Inertial Profiling System (IPS), furnished and operated by the Contractor under the supervision of the Engineer or the Engineer's representative, shall be a dual-line laser on a high speed vehicle meeting the requirements of AASHTO M 328, Standard Specification for Inertial Profiler. Additionally, each IPS should be equipped with a GPS to ensure distance measurement accuracy. The profiler system and operator shall be certified at an MDOT approved regional calibration facility in accordance with AASHTO R 56, Standard Practice for Certification of Inertial Profiler Systems and AASHTO R 57, Operating Inertial Profiler Systems.

907-401.02.6.9.2--Computer Requirements. The computer measurement program must be menu driven, Windows compatible, and able to produce unfiltered profiler runs in the Pavement Profile (*.ppf) file format. The computer shall have the ability to display and print data on site for verification and shall have the ability to save and transfer data via Universal Serial Bus (USB) flash drive, which shall be provided by the Contractor.

All runs must be stored in a directory named in the following format for acceptance by the Project Engineer:

Project_County_Route

All profiler runs must be named in the following format for acceptance by the Project Engineer:

Direction_Lane_BeginStation_EndStation

In addition to manufacturers' software; the latest version of FHWA's ProVAL software shall be installed on the IPS computer.

907-401.03--Construction Requirements.

907-401.03.1--Specific Requirements.

907-401.03.1.2--Tack Coat. Delete the fourth sentence of Subsection 401.03.1.2 and substitute the following:

A hand wand will only be allowed for applying tack coat on irregular areas as defined in Subsection 907-401.02.6.4.4 if the distributor bar is not a feasible option.

907-401.03.1.4--Density. Delete the first sentence of the first paragraph of Subsection 401.03.1.4 and substitute the following.

The lot density for all dense graded pavement lifts, except for irregular areas as defined in Subsection 907-401.02.6.4.4, shall not be less than the specified percent (92% or 93%) of the maximum density based upon AASHTO T 209 for the day's production..

Delete the third paragraph of Subsection 401.03.1.4 and substitute the following.

Irregular areas as defined in Subsection 907-401.02.6.4.4 shall be compacted to roll to refusal densification as defined in Subsection 907-401.02.6.4.3.

907-401.03.9--Material Transfer Equipment. In the third sentence of Subsection 401.03.9 on page 261, change "include:" to "include".

907-401.03.14--Shoulder Wedge. In the second sentence of the first paragraph of Subsection 401.03.14 on page 263, change "cross roads" to "crossroads".

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-403-4 **CODE: (SP)**

DATE: **03/19/2025**

SUBJECT: **Asphalt Pavements**

Section 403, Asphalt Pavements, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows:

907-403.03--Construction Requirements.

907-403.03.2--Smoothness Tolerances. In the tenth paragraph of Subsection 403.03.2 on page 283, change "Sections(s)" to "Segment(s)".

907-403.03.2.1--Smoothness Tolerances for Mean Roughness Index (MRI). After the second paragraph of Subsection 403.03.2.1 on page 283, add the following.

For all projects, smoothness data shall be reported by two MRI methods:

1. A continuous long interval MRI report
2. A continuous 25-foot short interval MRI report

At the bottom of page 283 and top of 284 in Subsection 403.03.2.1, delete the paragraphs for Category, A, Category B, and Category C, and substitute the following.

Category A projects shall have a long interval surface MRI of not more than 60 inches per mile.

Category B projects shall have a long interval surface MRI of not more than 70 inches per mile.

Category C projects shall have the existing surface profiled at no additional cost to the State. These projects shall be measured by a long fixed interval (528-foot) surface MRI and meet the following requirements:

A 50% improvement in MRI from the existing surface
or
80 inches per mile (whichever value is higher)

Delete the first, second, and third full paragraphs on page 284, and substitute the following.

For all projects, areas of the surface lift with localized roughness greater than 160 inches per mile as determined by the continuous short interval (25') report will be identified for correction by the Contractor.

When a project has multiple lifts, the intermediate lift shall meet the short interval requirement of 200 inches per mile. Corrective action must be taken on those segments that do not meet this requirement. No unit price adjustment will be applied on the underlying lift.

Delete the table at the bottom of page 284, and substitute the following.

Mean Roughness Index (inches / mile)	Contract Price Adjustment Percent of Asphalt Unit Bid Price
Above 20.0 Over	REMOVE AND REPLACE *
15.1 to 20.0 Over	80
10.1 to 15.0 Over	85
5.1 to 10.0 Over	90
0.1 to 5.0 Over	95
Required Surface MRI	100

* In lieu of removal and replacement, segments may be brought into compliance through corrective action at the discretion of the Project Engineer.

Delete the table and footnote at the top of page 285, and substitute the following.

Mean Roughness Index (inches/mile) Percent Improvement	Contract Price Adjustment Percent of Asphalt Unit Bid Price
Below 30.1 Percent	80 **
30.1 to 35.0 Percent	80
35.1 to 40.0 Percent	85
40.1 to 45.0 Percent	90
45.1 to 50.0 Percent	95
Above 50%	100

** Segments that show less than 30 percent improvement as well as a final surface MRI greater than 100 inches/mile will be subject to removal.

Before the last paragraph on Subsection 403.03.2.1 on page 285, add the following.

Corrective action for all categories must be taken on those segments that exceed the localized roughness or the 'Remove and Replace' threshold. All locations must be located and marked by the Contractor and approved by the Project Engineer before corrective action shall take place. The minimum remove and replace length will be 528 feet (0.1 mile). Additional smoothness testing shall be required on segments following corrective action and/or replacement and will be required to meet *at least* the maximum surface MRI short of 'Remove and Replace' tolerance.

907-403.05--Basis of Payment.

907-403.05.2--Pay Items. Add the "907" prefix to the list of pay items on page 291.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-407-1 **CODE: (SP)**

DATE: **01/16/2026**

SUBJECT: **Tack Coat**

Section 407, Tack Coat, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

907-407.03—Construction Requirements.

907-407.03.3—Application of Bituminous Material.

Delete the second sentence of the first paragraph of Subsection 407.03.3 and substitute the following.

A hand wand will only be allowed for applying tack coat on irregular areas as defined in Subsection 907-401.02.6.4.4.

907-407-05-- Basis of Payment.

Add the "907" prefix to the pay item listed on page 309.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-413-2 **CODE: (SP)**

DATE: 05/09/2023

SUBJECT: Cleaning and Sealing Joints and Cracks

Section 413, Cleaning and Sealing Joints and Cracks, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

907-413.03--Construction Requirements.

907-413.03.3--Sawing and Sealing Transverse Joints in Asphalt Pavement.

907-413.03.3.4--Sealing. Delete the last sentence of the last paragraph of Subsection 413.03.3.4 on page 333, and substitute the following.

Poured joint sealing material shall only be placed when the air temperature is within the limits specified by the manufacturer.

907-413.05--Basis of Payment. Delete the last pay item listed on page 336, and substitute the following.

907-413-E: Sawing and Sealing Transverse Joints in Asphalt Pavement - per linear foot

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-420-4 **CODE: (SP)**

DATE: **02/19/2019**

SUBJECT: **Undersealing**

Section 907-420, Undersealing, is hereby added to and made a part of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction as follows.

SECTION 907-420 -- UNDERSEALING

907-420.01--Description. This work shall consist of filling voids (undersealing) in the soil adjacent to a pipe culvert(s), box culverts(s), bridge structure(s), or other locations determined by the Engineer. It is intended that the voids around the pipe culverts will be filled from the surface and voids around the box culverts will be filled from within the box culvert.

907-420.02--Material. The material for filling the voids shall be a "hydro-sensitive" high density polyurethane meeting the following requirements.

Properties	Test Value	Test Method
Density, lbs./ft., minimum	4.0	ASTM D 1622
Tensile Strength, psi, minimum	100	ASTM D 1622
Compression Strength, psi (at yield point), minimum	90	ASTM D 1621

The Contractor shall furnish the Engineer with certified test reports showing that the material meets the requirements of the specification.

907-420.03--Construction Requirements. All undersealing will be done at the locations specified in the plans, or as directed by the Engineer.

907-420.03.1--Equipment. The equipment shall be that customarily used in undersealing operations. Generally, it shall consist of a pneumatic or electric drill capable of drilling holes of adequate size in the embankment soil or culvert wall to accomplish the work. The exact depth into the embankment shall be determined by the Contractor. The equipment shall be in satisfactory operating condition and operated in such a manner as to prevent unnecessary damage to existing roadways, structures, and the surrounding area. The pump shall be capable of injecting the high density polyurethane at a rate and to a depth necessary to fill the void adjacent to the existing structures.

907-420.03.2--Drilling Holes. Unless otherwise shown in the plans, the size and location of the injection holes shall be as determined by the Manufacturer/Contractor.

907-420.03.3--Injection Process. The nozzle of the discharge hose shall be secured in the drilled hole in a manner that provides an adequate seal during the pumping process. The polyurethane

material shall be injected through the drilled holes until all known or encountered voids are filled. The rate and amount of material injection shall be determined by the Manufacturer/Contractor.

When the nozzle is removed, the hole shall be plugged or sealed to the satisfaction of the Engineer. Any excess polyurethane material shall be removed.

907-420.04--Method of Measurement. Undersealing, complete and accepted, will be measured by the pound. The quantity of urethane will be based on the supplier's packaging information for the material delivered and incorporated into the project.

907-420.05--Basis of Payment. Undersealing, as measured prescribed above, will be paid for at the contract unit price per pound, which price shall include all mobilization, labor, equipment, tools, materials, and incidentals necessary to complete the required work.

Cost for maintenance of traffic and individual traffic control devices as required for undersealing operations shall be included in the unit price for undersealing and will not be measured for separate payment.

Payment will be made under:

907-420-A: Undersealing - per pound

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-601-1 **CODE: (IS)**

DATE: 11/21/2023

SUBJECT: Structural Concrete

Section 601, Structural Concrete, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

907-601.02--Materials.

907-601.02.1--General. Delete the first sentence of Subsection 601.02.1 on page 377, and substitute the following.

Materials for structural concrete and their use, care, and handling shall be in accordance with Subsection 907-804.02.

907-601.02.2--Classification of Concrete. Delete the second sentence of Subsection 601.02.2 on page 377, and substitute the following.

Classes of concrete are identified in Subsection 907-799.01.

907-601.03--Construction Requirements.

Delete Subsection 601.03.1 on page 378 and substitute the following.

907-601.03.1--Blank.

907-601.05--Basis of Payment. Delete the pay items listed at the end of Subsection 601.05, and substitute the following.

907-601-A: Class ___ Structural Concrete - per cubic yard

907-601-B: Class ___ Structural Concrete, Minor Structures - per cubic yard

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-605-1 **CODE: (IS)**

DATE: 11/21/2023

SUBJECT: Underdrains

Section 605, Underdrains, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

907-605.02--Materials.

907-605.02.4--Edge Drain Pipe and Fittings.

907-605.02.4.4--Miscellaneous. Delete the first paragraph of Subsection 605.02.4.4 on page 398, and substitute the following.

Concrete for aprons shall be Class "C" concrete meeting the requirements of Section 907-799.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-618-12 **CODE: (SP)**

DATE: 05/03/2024

SUBJECT: Traffic Control Management

Section 618, Maintenance of Traffic and Traffic Control Plan, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

907-618.01--Description.

907-618.01.2--Traffic Control Management. Delete subparagraph (g) of Subsection 618.01.2 on page 441, and substitute the following.

g) Perform a minimum of once-a-week inspections from the Notice to Proceed until a Partial or Final Maintenance Release is obtained. Once work begins, daily daytime inspections and weekly nighttime inspections are required on projects with predominantly daytime work, and daily nighttime inspections and weekly daytime inspections are required on projects with predominantly nighttime work. Weekly inspections will be allowed for periods outside of active construction. When lane closures are present or any non-fixed signs or traffic handling devices such as cones or barrels are in place, inspections shall be performed daily whether work is being performed or not.

907-618.05--Basis of Payment. Delete pay item 618-A on page 449 and substitute the following.

907-618-A: Maintenance of Traffic - lump sum

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-626-12 **CODE: (IS)**

DATE: 06/17/2025

SUBJECT: Thermoplastic Traffic Markings

Section 626, Thermoplastic Traffic Markings, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

Delete Section 626 on pages 492 thru 496, and substitute the following.

SECTION 626 - THERMOPLASTIC TRAFFIC MARKINGS

907-626.01--Description. This work consists of furnishing materials and placing thermoplastic pavement markings of the type specified in conformity with these specifications and the details shown on the plans or established. All hot-applied thermoplastic pavement markings shall be coated with a double-drop combination of optics.

This work may also consist of placing an audible bump or puck style marking system on the edge line that provides an audible and vibratory warning when driven over. The marking system shall be a road marking system of the dimensions indicated at regular and predetermined intervals.

This work may also consist of placing a profile or raised shape marking system on centerline or edge line that provides audible and vibratory warning when driven over. The marking system shall be a road marking system of the dimensions indicated and at regular and predetermined intervals. When placed on centerline, the markings system shall consist of an extruded black transverse thermoplastic bar of the dimensions indicated at regular and predetermined intervals.

This work may also consist of placing high contrast thermoplastic markings. High contrast thermoplastic markings shall consist of placing thermoplastic pavement markings over a black thermoplastic pavement marking to enhance the marking's visibility.

All pavement marking material, excluding lines over rumble strips, shall be applied using the extrusion/ribbon method. Lines placed over rumble strips shall be applied using the atomization/spray method, unless the extrusion/ribbon method can be demonstrated to perform adequately and is approved by the Engineer.

Permanent pavement marking tape (permanent cold plastic tape) may be used in lieu of hot applied thermoplastic markings. Substitution will only be allowed for pay items 907-626-A through H. Substituted pavement marking tape shall be of the same color and width as that required for the hot applied thermoplastic. Unless otherwise specified, the markings, whether hot applied or pavement marking tape, shall be of the same type of material for the entire project. Stop bars and crosswalks shall not be substituted with pavement marking tape and shall be alkyd hot-applied thermoplastic markings or heat-fused preformed pavement markings. Material and construction

requirements for substituted pavement marking tape shall meet the requirements of Special Provision 907-628. The layout and spacing for substituted pavement markings will remain as shown in the plans, or in the contract documents, for hot applied thermoplastic markings. Measurement of adhesive substituted pavement markings shall be made in accordance with Special Provision 907-628. Payment for adhesive substituted pavement markings shall be made at the unit price for the appropriate hot applied thermoplastic marking.

When thermoplastic pavement markings are used on bridge decks or concrete surfaces, the surface shall be sealed with an epoxy sealer prior to the application of thermoplastic.

907-626.02--Materials. All pavement marking materials shall meet the requirements of Special Provision 907-720.

907-626.02.1--Audible Bumps. Audible bumps shall have a profile such that the leading and trailing edges are sloped at a sufficient angle to create an audible and vibratory warning.

Audible bumps shall be at least 0.45 inches above the pavement surface at the highest point of the bump. The height shall be measured after the application of drop-on material. The bumps shall have a minimum dimension of two and one-half inches (2½") in both transverse and longitudinal directions. The bumps may have a drainage channel. The width of each drainage channel shall not exceed one-quarter of an inch (¼") at the bottom of the channel.

907-626.02.2--Audible Transverse Bars. The length of transverse bars is the measurement lateral to the direction of travel, also known as transverse width. The width of transverse bars is the measurement parallel to the travel way.

Transverse bars on centerline shall have a length of 10 inches, a width of three inches (3"), and a height of 350 mils. Transverse bars on centerline shall be placed on 2-foot centers through no-passing zones and 5-foot centers through passing zones. Transverse bars on centerline shall be placed in advance of permanent thermoplastic markings.

Transverse bars on edge lines shall have a length of six inches (6"), a width of three inches (3"), and a height of 350 mils. Transverse bars on edge lines shall be placed on 2-foot centers. Tolerance for the longitudinal and transverse measurements shall be one quarter of an inch (¼") and the tolerance for height shall be 50 mils. The above dimensions are based on 6-inch strip application.

Thermoplastic material for edge line transverse bars shall be as specified on the Plans and meet the requirements of Special Provision 907-720 or as specified on the plans. Thermoplastic material for centerline transverse bars shall be black and shall meet the requirements of Special Provision 907-720.

907-626.02.3--High Contrast Markings. High contrast markings shall be black with the pertinent marking color overlaid on top and shall meet the requirements of Special Provision 907-720.

907-626.03--Construction Requirements.

907-626.03.1--Equipment. Equipment for hot application shall be of sufficient size and stability to ensure smooth, uniform, properly aligned markings of the dimensions specified. The equipment shall be suitably equipped for heating and controlling the flow of the material. The equipment shall be constructed to provide continuous mixing and agitation of the material. The conveying parts of the equipment, between the main material reservoir and applicator, shall be so constructed as to prevent accumulation and clogging. The equipment shall be constructed so that all mixing and conveying parts, up to and including the applicator, maintain the material at the plastic temperature. The thermoplastic material shall be dispensed at a temperature recommended by the manufacturer. The applicator shall include a cutoff device remotely controlled to provide clean, square stripe ends and to provide a method for applying skip lines. The thermoplastic reservoir shall be insulated and equipped with an automatic thermostatic control to maintain the proper temperature of the material.

The application equipment shall be capable of automatic placement of intermittent and continuous line patterns in single or double line applications simultaneously. The intermittent timer mechanism shall provide a variable ratio of materials applied and variable cycle length such that accurate placement of new patterns, or replacement of existing patterns can be achieved.

The equipment shall also be capable of applying the top dressing of optics (beads) in a manner that firmly embeds them into the surface of the thermoplastic material for at least one half of the diameter of the larger gradation sizes of the optics. The dispensing equipment shall be equipped with an automatic cut-off control for the application of the optics that is synchronized with the cut-off of the thermoplastic material.

Optics applied to the surface of the completed stripe shall be applied by an automatic dispenser attached to the pavement marking equipment in such a manner that the optics are immediately dispensed upon the completed line. The dispenser shall be equipped with an automatic cutoff control, synchronized with the cutoff of the pavement marking equipment. The double-drop optics as defined in 907-720 shall be automatically applied at a uniform rate to achieve the minimum retroreflectivity requirements of 907-626.

907-626.03.2--Construction Details. The thermoplastic compound shall be screed or ribbon extruded to the pavement surface. Heat-fused, pre-formed pavement markings shall be fusible to asphalt surfaces by means of the normal heat of a propane weed-burner type of torch or other heating device as recommended by the manufacturer. Heat-fused, pre-formed pavement markings shall be instantly highly reflective without the application of additional optics.

Thermoplastic markings shall not be applied to the pavement surface when the pavement surface temperature is less than 55°F. The pavement surface shall be dry, to the satisfaction of the Engineer, before application will be permitted. Unless otherwise specified by the manufacturer, thermoplastic pavement marking material shall be applied to the surface between 400°F and 450°F with a recommended application temperature being 420°F.

Immediately before application, all areas to be marked shall be thoroughly cleaned. Cleaning may be done by rotary brooms, air blast, scrapers, or whatever combination of equipment is necessary to clean the pavement thoroughly without damage to the pavement surface. On areas of pavement

cured with compound, the membrane shall be removed completely by shot blasting, sand blasting or other approved method. Before edge striping, particular care shall be taken to remove all vegetation, loose soil, and the like from the area to be marked. Should other methods fail, the surface shall be wetted with a water jet and scrubbed as necessary to dislodge all foreign material. After washing, the surface shall be allowed to dry thoroughly, and all films of dried mud apparent after surface drying shall be removed before application of markings. Marking shall follow as closely as practicable after the surface has been cleaned and dried, but no markings shall be applied until the surface has been inspected and permission given to proceed. The cost for preparing the surface shall be included in the contract unit prices for the marking items.

Unless otherwise directed by the Engineer, traffic stripes that are conflicting with the thermoplastic stripe shall be removed prior to placement of the thermoplastic material. Removal of pavement markings shall be done by a means that will not gouge the surface of the pavement in a manner that requires patching to ensure the integrity of the pavement. Temporary paint stripe may be left in place when satisfactorily placed in the proper location. Any temporary stripe not covered shall be removed. Payment for removal of stripe, except temporary stripe, will be made under Section 202.

On newly constructed asphalt pavements, any sand, grit, or other surface contaminants shall be removed using compressed air and/or sweeping. Water blasting may be necessary to remove surface contaminants which cannot be removed by the use of compressed air and/or sweeping. This work is considered surface preparation.

The finished lines shall have well defined edges and the thickness of thermoplastic markings above the roadway surface shall be no less than 90 mils for edge lines, center lines, lane lines, barrier lines, and detail stripe including gore markings, and no less than 120 mils for crosswalks, stop lines, and railroad, word and symbol markings. The minimum thickness, as required above, will be measured in the center of the line when gauged. The minimum thickness one-half inch (½") from the edges shall not be less than 75% of the thickness required in the center.

Any thermoplastic traffic marking less than the required thickness shall be corrected by recapping at no additional costs to the Department. Although a thickness tolerance of 25 percent from center to edge is allowed, a consistent underrun of any amount in thickness as determined by the Engineer will not be acceptable.

The length and width of lines shall be within a tolerance of ±3 inches and ±1/8 inch, respectively. For skip markings, the tolerance for intervals shall not exceed the line length tolerance. On curves, unsightly variations from the normal curvature will not be permitted unless specifically shown on the plans or ordered by the Engineer.

Heat-fused, pre-formed pavement markings shall be supplied with a minimum average thickness of 90 mils before application on the roadway surface.

All newly applied thermoplastic material shall be protected from traffic until the material is sufficiently dry so as not to sustain damage from vehicle tires. Any material so damaged by traffic shall be repaired, and the thermoplastic material tracked onto the pavement shall be removed and

replaced.

907-626.03.3--Reflectivity Requirements. The longitudinal pavement markings shall meet the following retroreflectivity values when measured within 10 to 30 calendar days of placement, after removing loose beads.

Table 1. Minimum Dry Retroreflectivity

Color	All Stripe without Rumble mcd/m²/lx	Rumble Stripe mcd/m²/lx
White	375	250
Yellow	225	150

For projects with less than two miles between the BOP and EOP, retroreflectivity measurements will not be required.

907-626.03.3.1--Measuring Devices. Retroreflectivity measurements are required to be taken using a vehicle mounted mobile retroreflectometer using 30-meter geometry with video and mapping capabilities as per AASHTO T-398. The retroreflectometer and operator shall be certified by the manufacturer, authorized representative of the manufacturer, or an MDOT approved program such as the Texas A&M Transportation Institute (TTI) Mobile Retroreflectometer Certification Program. The Contractor shall provide copies of current certifications for the operator(s) and the device(s) to the Engineer.

907-626.03.3.2--Acceptance Procedure. Averages of the mobile measurements shall be provided for every 0.1 miles unless otherwise specified or approved. Take measurements on each section of roadway for each series of markings (i.e., edge line, center skip line, each line of a double line, etc.) and for each direction of traffic flow. Measure each line in both directions for centerlines on two-way roadways (i.e., measure both double solid line in both directions and measure all center skip lines in both directions). Furnish measurements in compliance with the below requirements. Use all equipment in accordance with the manufacturer's recommendations and directions. Inform the Engineer at least 24 hours before taking any measurements.

A marking meets the retroreflectivity requirements if:

- The combined average retroreflectivity value for a one-mile segment meets the minimum retroreflectivity values specified, and
- Within the one-mile segment, no more than three consecutive 0.1 mile intervals shall have an average retroreflectivity value below the minimum required value.

The one-mile segment will start from the beginning of the data collection and end after a mile worth of measurements have been taken; each subsequent mile of measurements will be a new segment. If the remainder is 0.5 miles or less, it shall be included in the previous mile segment, otherwise the remaining segment of greater than 0.5 mile shall be its own segment. Centerlines with 2 stripes (either solid or broken) will result in 2 miles of data for each mile segment. Each centerline stripe must be tested for compliance as a stand-alone stripe.

The Contractor may elect to restripe with a minimum of 0.060 in. (60 mils) at no cost to the Department each one-mile segment that failed to meet the minimum retroreflectivity requirements.

Measurements shall be retaken within 10 to 30 calendar days after the second application for the mile segment for that series of markings. If the markings do not meet minimum retroreflectivity after the second application, the Engineer may require removal of all existing markings, a new application as initially specified, and a repeat of the application process until minimum retroreflectivity requirements are met.

907-626.03.3.3--Mobile Retroreflectivity Data Collection. Mobile Retroreflectivity Data Collection (MRDC) shall be conducted on dry pavement only and when the ambient air temperature is greater than 40°F. Data shall be submitted to the Engineer no later than 3 working days after the day the data is collected. Submit all raw data collected in addition to all other data submitted. Provide data files in Microsoft Excel format or a format approved by the Engineer. The data file and video must contain the following information.

907-626.03.3.3.1--Data File. Data files shall be provided with the following:

- Date;
- District;
- County;
- Name of mobile retroreflectometer operator;
- Route number with reference markers or other reference information provided by the Engineer to indicate the location of beginning and end data collection points on that roadway;
- Cardinal direction;
- Line type (single solid, single broken, double solid, etc.);
- Line color;
- File name corresponding to video;
- Data for each centerline listed separately;
- Average reading taken for each 0.1-mi. interval (or interval designated by the Engineer);
- Accurate GPS coordinates (within 20 ft.) for each interval;
- Color-coding for each interval indicating passing or failing, unless otherwise directed by the Engineer (passing and failing thresholds provided by the Engineer);
- Graphical representation of the MRDC (y-axis showing retroreflectivity and x-axis showing intervals) corresponding with each data file;
- Distance in miles driven while measuring the pavement markings;
- Event codes (pre-approved by the Engineer) indicating problems with measurement;
- Upper validation threshold (may be included separately with the raw data but must be clearly identified with the data collected using that threshold).

907-626.03.3.3.2--Map. A map shall be provided in an electronic format approved by the Engineer with each MRDC submission that includes the following information:

- Date;
- District number;
- County;

- Color-coded 1-mi. intervals (or interval length designated by the Engineer) for passing and failing retroreflectivity values or retroreflectivity threshold values provided by the Engineer; and
- Percentage of passing and failing intervals, if required by the Engineer.

907-626.03.3.3.3--Video. A high-quality video file shall be provided with the following information:

- Date and corresponding data file name on label;
- District number;
- County;
- Route number with reference markers or other designated reference information to indicate the location of beginning and end collection points on that roadway; and
- Retroreflectivity values presented on the same screen with the following information:
    - Date;
    - Location;
    - Starting and ending mileage;
    - Total miles;
    - Retroreflectivity readings; and
    - Upper validation thresholds (may be included separately with the raw data but must be clearly identified with the data collected using that threshold).

907-626.03.4--Reflectivity Verification Testing. The Engineer or a third party may perform retroreflectivity verification testing on any project. At a minimum, each Contractor performing work for the Department will be verified on an annual basis. The Contractor-submitted retroreflectivity data will be compared to the verification test data to determine acceptability of the Contractor's mobile retroreflectometer data. Comparison of the data will result in one of the two scenarios below:

- Contractor's Data is Validated – If the difference between Contractor's and Engineer/third party data is 20% or less, then the Contractor's data is validated. The Contractor's data will be used for acceptance.
- Contractor's Data is not Validated – If the difference between the Contractor's and Engineer/third party data is more than 20%, then the Contractor's data is not validated. The Engineer/third party data will be used for acceptance and the Contractor will be required to take corrective action prior to additional Contractor data collection and may require re-certification of the mobile retroreflectometer.

907-626.04--Method of Measurement. Thermoplastic stripe completed in accordance with the plans and specifications will be measured by the mile or by the linear foot, as indicated, from end-to-end of individual stripes. In the case of skip lines the measurement will include skip intervals. The length used to measure centerline, lane lines, and edge stripes will be the horizontal length computed along the roadway.

Detail traffic stripe will be measured by the linear foot from end-to-end of individual stripes. Measurements will be made along the surface of each stripe and will exclude skip intervals where

skips are specified. Stripes more than six inches (6") in width will be converted to equivalent lengths of 6-inch stripe.

Hot-applied legend, which is to include railroad markings, pedestrian crosswalks, and stop lines, will be measured by the square foot or linear foot. Pay areas of individual letters and symbols will usually be shown on the plans and measured by the square foot. Transverse railroad bands, pedestrian crosswalks and stop lines will generally be measured by the linear foot, in which case, stripes more than six inches (6") in width will be converted to equivalent lengths of 6-inch widths.

Pre-formed legend which is to include railroad markings and pedestrian crosswalks will be measured and paid for by each.

The length measured for thermoplastic audible bump edge stripe will not include the permanent thermoplastic edge stripe. Permanent thermoplastic edge stripe will be measured for payment under a separate pay item.

Thermoplastic audible bar centerline skip stripe will be measured by the linear foot or mile. Measurements will be made along the surface from end-to-end of the stripe and will include skip intervals. The length used to measure audible bar centerline stripe will be the horizontal length computed along the roadway. The length measured for thermoplastic audible bar centerline skip stripe will not include the permanent centerline continuous or skip stripe. Permanent centerline continuous and skip stripe will be measured for payment under separate pay items.

Thermoplastic audible bar edge stripe will be measured by the linear foot or mile. Measurements will be made along the surface from end-to-end of the stripe. The length used to measure thermoplastic audible bar edge stripe will be the horizontal length computed along the roadway. The length measured for thermoplastic audible bar edge stripe will not include the permanent thermoplastic edge stripe. Permanent thermoplastic edge stripe will be measured for payment under a separate pay item.

907-626.05--Basis of Payment. Thermoplastic traffic markings will be paid for at the contract unit price per mile, linear foot, square foot or each as applicable. Any deductions for non-satisfactory material test results will be made after final testing has been performed.

Payment will be made under:

907-626-A:	6" Thermoplastic Traffic Stripe, Skip White	- per linear foot or mile
907-626-B:	6" Thermoplastic Traffic Stripe, Continuous White	- per linear foot or mile
907-626-C:	6" Thermoplastic Edge Stripe, Continuous White	- per linear foot or mile
907-626-D:	6" Thermoplastic Traffic Stripe, Skip Yellow	- per linear foot or mile
907-626-E:	6" Thermoplastic Traffic Stripe, Continuous Yellow	- per linear foot or mile

907-626-F:	6" Thermoplastic Edge Stripe, Continuous Yellow	- per linear foot or mile
907-626-G:	Thermoplastic Detail Stripe, Color *	- per linear foot
907-626-H:	Thermoplastic Legend, Color *	- per linear foot, square foot, or per each
907-626-Q:	Thermoplastic Audible Bump Edge Stripe	-per linear foot or mile
907-626-R:	Thermoplastic Detail Audible *** Stripe, Color **,	-per mile
907-626-AA:	6" High Contrast Thermoplastic Traffic Stripe, Skip White	- per linear foot or mile
907-626-BB:	6" High Contrast Thermoplastic Traffic Stripe, Continuous White	- per linear foot or mile
907-626-CC:	6" High Contrast Thermoplastic Edge Stripe, Continuous White	- per linear foot or mile
907-626-DD:	6" High Contrast Thermoplastic Traffic Stripe, Skip Yellow	- per linear foot or mile
907-626-EE:	6" High Contrast Thermoplastic Traffic Stripe, Continuous Yellow	- per linear foot or mile
907-626-FF:	6" High Contrast Thermoplastic Edge Stripe, Continuous Yellow	- per linear foot or mile
907-626-GG:	High Contrast Thermoplastic Detail Stripe, Color *	- per linear foot
907-626-HH:	High Contrast Thermoplastic Legend, Color *	- per linear foot, square foot, or each

* Indicate Blue - ADA if applicable
** Indicate White or Black
*** Indicate Centerline - Passing Zone, Centerline - No-Passing Zone, or Edge Line

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-627-1 **CODE: (IS)**

DATE: 06/24/2024

SUBJECT: Raised Pavement Markers

Section 627, Raised Pavement Markers, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows:

Delete Subsection 627.02 on page 496, and substitute the following.

907-627.02--Materials. Pavement and jiggle markers of the types specified shall conform to the applicable requirements of Subsection 907-720.06 and shall be listed on the Department's APL.

Type B through G High Performance reflective markers shall be listed on the Department's APL for high performance raised pavement markers.

The bituminous adhesive for pavement markers shall meet the requirements of Subsection 907-720.07.3.

907-627.05--Basis of Payment. Add the "907" prefix to the pay items listed on page 498.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SUPPLEMENT TO SPECIAL PROVISION NO. 907-631-1

DATE: 08/27/2024

SUBJECT: Traffic Signal Systems - General

Before Subsection 907-631.02.4 on page 1, add the following.

907-631.02.3--Regulations and Code. At the end of the second paragraph, add the following.

The Certified IMSA Traffic Signal Construction Technician Level II employee is not required to be on-site during construction. Proof of this certification shall be provided prior to award of contract.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-631-1 **CODE: (IS)**

DATE: 11/15/2017

SUBJECT: Traffic Signal Systems - General

Section 631, Traffic Signal Systems - General, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

907-631.02--Materials.

907-631.02.4--Operations. Delete the second paragraph in Subsection 631.02.4 on page 513 and substitute the following.

The Contractor shall conduct the work at all times in such a manner as to ensure the least possible inconvenience to the traveling public, and to property owners on the streets, alleys, and other public places where the construction will take place.

907-631.02.5--Electrical Service. Delete the first paragraph in Subsection 631.02.5 on page 515 and substitute the following.

It shall be the Contractor's responsibility to make the necessary arrangements with the local power company to provide the electrical service for any new installation. The Contractor shall pay for, at no cost to the Department, all deposits, hook-up charges, or other service fees required by the power company for the establishment of new service. The cost of all such fees shall be considered incidental and absorbed within existing pay items. The Department or the local agency will be responsible for payment of the monthly service bill for the new power service installation. It shall be the responsibility of the Contractor to swap the electrical service account over to the Department or local agency.

907-631.03--Construction Requirements.

907-631.03.2--Electrical Service Equipment. Delete the paragraphs of Subsection 631.03.2 on pages 515 and 516, and substitute the following.

The power supply assembly shall consist of all equipment mounted in a Power Service Pedestal as described in Subsection 722.13 or as otherwise shown in the plans. The configuration and installation of the equipment mounted on the assembly shall meet the safety requirements and approval of the utility company or municipality furnishing power for operation.

When required, service poles shall be provided by the Contractor and consist of wood poles with required pole line hardware, conduit, ground rods, guy wires and anchors and all other accessories and appurtenances mounted on the pole, except those items furnished by the utility company or

municipality, or as specified separately in the contract or plans. Costs of service poles shall be included in other items bids.

Main disconnect switches shall be separately housed on the power supply assembly. Circuit breaker cabinets and meters shall not be installed on the street or walk side of the pole or pedestal.

907-631.03.3--Performance Tests. Delete the second sentence of Subsection 631.03.3 on page 516.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-632-1 **CODE: (IS)**

DATE: 11/15/2017

SUBJECT: Traffic Signal Cabinet Assemblies

Section 632, Traffic Signal Cabinet Assemblies, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

Delete Section 632 on pages 517 thru 538, and substitute the following.

SECTION 907-632 - TRAFFIC SIGNAL CABINET ASSEMBLIES

907-632.01--Description. This work consists of furnishing, assembling, configuring and installing all component materials and software required to form completed traffic signal controller assemblies, closed loop master controller assemblies and signal system installation of the types specified, in conformity with these specifications, to ensure fully operational traffic signal installations as shown on the plans.

907-632.02--Materials.

907-632.02.1--Cabinet Assembly. Cabinet Assemblies shall meet the NEMA 3R requirements and be constructed principally of 0.125-inch thick, 5052-H32 aluminum. The aluminum shall have a mill finish per NEMA TS 2 7.7.3. Intermittent welds may be used for construction and any un-welded cabinet seams shall be sealed with clear RTV silicone. All external fasteners shall be stainless steel and no holes will be allowed in top of cabinet.

The door handles shall be stainless steel or cast aluminum. Door hinges shall be of the continuous type with a stainless steel hinge pin. Rivets are not be used to attach the hinge. The main door stop rod shall be constructed using stainless steel. The door stop mechanism shall be adjustable and capable of being securely latched in multiple opened positions including 90 degrees and a maximum of 120 degrees. The brackets attaching the stop rod to the door and cabinet shall be aluminum and welded in place. The main door cylinder lock shall be a #2 key type lock. Two (2) traffic industry standard No. 2 keys shall be provided with each cabinet and shall be made using heavy duty key blanks.

Extruded aluminum channels permanently attached to the right and left cabinet sides shall be provided for attaching adjustable shelving and mounting of other component panels. The cabinet shall have two (2) shelves installed. Both shelves shall be provided with the front edge pre-drilled with 0.25-inch holes located twelve (12) inches apart.

907-632.02.2--Physical Features.

907-632.02.2.1--Pull Out Drawer. A pull out drawer shall be installed and centered under the

bottom shelf. The drawer shall be made of 0.080-inch thick, 5052-H32 aluminum and come out on full extension drawer slides. The pull out drawer shall provide an approximate 16-inch x 14-inch working area and have the ability to bear a constant 25 pound burden. There shall be a compartment for document storage. The lid shall be hinged at the rear, to gain access to the storage area. The drawer will be used to store documents as well as support a notebook computer. The drawer slides shall be of the full extension ball bearing type. Dimensions of the drawer shall be large enough to support a notebook computer and a drawer of sufficient size to hold at least two (2) copies of the cabinet drawings and other related cabinet documentation. The surface of the lid shall have a non-slip surface.

907-632.02.2.2--Cabinet Lighting. Cabinets shall be provided with a minimum of two (2) white light LED modules. One (1) lighting module shall be installed along the front top section of the cabinet and the second lighting module shall be installed underneath the bottom cabinet shelf in such a location as to provide direct lighting of the load bay area of the cabinet but must not interfere with the cabinet drawer operation.

Both LED lighting modules shall be controlled by a NEMA rated, commercial quality, pushbutton door switch. The cabinet lighting shall turn on when the cabinet main door is opened and shall turn off when the main door is closed or an ON/OFF NEMA rated, commercial quality, toggle switch mounted on the inside cabinet door service panel shall be provided to turn both LED lighting modules on or off.

907-632.02.2.3--Police Panel Switches. Police panel switches shall be provided with all controller cabinets. All switches shall be hard wired and labeled as to their function.

NORMAL-FLASH: When this switch is in the FLASH position, all signal indications shall transfer to the flashing mode. AC power shall be removed from the load switches when the signal indications transfer to the flashing mode.

The controller unit shall operate in accordance with appropriate specifications during the flashing mode. When the switch is placed in the NORMAL position, transfer from the flash mode to normal operation shall be made in accordance with uniform code flash requirements.

SIGNAL ON-OFF: AC power shall be removed from the signal heads and the intersection will become dark when this switch is in the OFF position.

MANUAL CONTROL ON-OFF: When this switch is in the ON position, a logic ground shall be applied to the manual control enable input of the controller unit.

INTERVAL ADVANCE INPUT JACK: A manual jack shall be installed on the police panel. The jack shall inter-mate with a 3-circuit, ¼-inch diameter phone plug. The tip and ring (middle) circuits of the jack shall be connected to the logic ground and the interval advance inputs of the controller unit. When the manual hand cord is plugged into the jack and the pushbutton is pressed, logic ground shall be connected to the interval advance input of the controller unit.

When specified in the contract documents, an interval advance cord shall be provided. The cord

shall have a minimum length of three (3) feet. It shall have a ¼-inch diameter, three circuit plug connected to one end and a manual pushbutton enclosed in a hand-held enclosure at the other end. A complete cycle (push-release) of the manual pushbutton shall terminate the controller unit interval which is active except the vehicular yellow and red clearance intervals. Cycling the push-button during the vehicular yellow or all red clearance intervals shall not terminate the timing of those intervals.

907-632.02.2.4--Service Panel Switches. Service panel switches shall be hard wired and clearly labeled to identify as to their functions. Service panel switches shall be mounted on the service panel located on the inside of the main cabinet door. Alternate switch locations may be described in the plans or contract documents but final switch design and location shall be approved by the Engineer prior to cabinet fabrication.

NORMAL-FLASH: When this switch is in the FLASH position, all signal indications shall transfer to the flashing mode. AC power shall be removed from the load switches when the signal indications transfer to the flashing mode.

The controller unit shall operate in accordance with appropriate specifications during the flashing mode. When the switch is placed in the NORMAL position transfer from the flash mode to normal operation shall be made in accordance with uniform code flash requirements.

CONTROLLER ON-OFF: When this switch is in the OFF position, AC power shall be removed from the controller. When this switch is returned to the ON position, the controller unit shall perform normal start up functions and resume normal operation in accordance with the applicable specification.

STOP TIME-RUN-NORMAL: A 3-position manual switch shall be provided which places the controller into Stop Time mode manually or through remote input.

VEHICLE DETECTORS: A 3-position switch shall be provided for each vehicle and pedestrian detector circuit. All switches shall be located on a panel mounted on the inside of the main cabinet door. The switch panel shall be labeled CALL SWITCH. Labeling of phase number and intended function (vehicles or pedestrian calls) shall be provided for each switch.

The vehicle detector switch functions are defined as follows:

Locked Call	Call is continually placed into the controller unit.
Off (center)	Vehicle detector is connected to the controller unit vehicle detector input, i.e. normal detector operation.
Momentary Call	Call is continuous as long as the switch is manually held in this position.

907-632.02.2.5--Police and Service Panel Locations. The police and service panels shall be constructed of 5052-H32 0.125-inch thick aluminum.

The police panel shall be located behind the police door which is enclosed within the main door.

The police door shall be hinged and provided with a neoprene gasket seal. Access to any portion or equipment contained behind the main cabinet door shall not be accessible through any part of the police panel. The police panel shall be of appropriate dimensions to accommodate all switch or devices described within this specification, the plans or contract document. The police door shall be provided with a treasury #2 key type lock and two (2) keys for the police door lock shall be provided with each cabinet.

The service panel shall be mounted on the inside portion of the main cabinet door, adjacent to the back side of the police panel or on the left hand side of the cabinet.

907-632.02.2.6--Cabinet Ventilation. Cabinets shall be vented to allow dissipation of the heat generated by the equipment contained within. All cabinets shall have a thermostatically controlled exhaust fan located at the top of the cabinet that is capable of 100 cubic feet per minute air displacement. The thermostat shall be mounted on the inside top of the cabinet and shall have a nominal temperature range from 80°F to 170°F.

The intake vent shall be louvered or equivalent design to prevent rain infiltration. The vent area will be located along the bottom portion of the cabinet door. A 16-inch x 12-inch x 1-inch disposable pleated air filter shall be provided on the inside portion of the cabinet and shall fully cover the vent area.

907-632.02.2.7--Air Filter Assembly. Air filters shall be one piece and shall be held firmly in place against the cabinet door in order to prevent dust from bypassing the perimeter of the filter and shall fully cover the vent area. Wing nuts or thumbscrews are preferred. Air filter shall be a 16-inch x 12-inch x 1-inch disposable pleated filter.

907-632.02.2.8--Cabinet Sizes.

907-632.02.2.8.1--Type I Cabinet. A Type I cabinet, 51"H x 30"W x 18"D, may be used for both pole and base mounted cabinets that require a maximum eight (8) position load bay. Pole mounted cabinets do not require rear access.

907-632.02.2.8.2--Type II Cabinet. A Type II cabinet, 51"H x 36"W x 18"D, may be used for both pole and base mounted cabinets that require a maximum twelve (12) position load bay. Pole mounted cabinets do not require rear access.

907-632.02.2.8.3--Type III Cabinet. A Type III cabinet, 56"H x 44"W x 27"D, shall be used for base mount installations and shall require a sixteen (16) position load bay and rear access door.

907-632.02.2.8.4--Type IV Cabinet. A Type IV dual chamber cabinet, 56"H x 57"W x 29"D, shall be used for base mount installations and shall require a sixteen (16) position load bay, rear access door, and external generator plug. When called for in the plans, a UPS shall be housed inside this cabinet.

907-632.02.2.8.5--Type V Cabinet. A Type V cabinet, 77"H x 44"W x 27"D, shall be used for base mount installations and shall require a sixteen (16) position load bay and rear access door.

907-632.02.3--Power Distribution Panel. The power panel shall be wired to provide the necessary power to all equipment. It shall be manufactured from 0.125-inch thick, 5052- H32 aluminum. The power panel shall house the following components: Main Breaker, Auxiliary Breakers, and Terminal Block. The panel shall be of such design so as to allow a technician to easily access the main and auxiliary breakers.

A 3-position terminal block with a removable insulated cover accepting up to AWG #4 stranded wire shall be supplied for accepting only the incoming power lines. This terminal block shall be in advance of and supply only the 30-amp main breaker, 10-amp and 5-amp Auxiliary breakers, AC neutral buss and earth ground buss.

907-632.02.3.1--Ground and Neutral Busbars. Cabinet grounding shall meet the requirements set forth in Subsection 722.09 for grounding and ground rods. A solid copper ground busbar shall be mounted on the side of the cabinet wall adjacent to the power panel for the connection of chassis ground wires. If more than one (1) ground busbar is used in a cabinet, a minimum of an AWG #6 copper wire shall be used to bond them.

The copper ground busbar shall have a minimum of thirteen (13) connector points, each capable of securing at least one (1) AWG #6 conductor.

A solid copper neutral busbar shall be mounted on the side of the cabinet wall adjacent to the power panel for the connection of AC neutral wires.

The copper neutral busbar shall have a minimum of thirteen (13) connector points, each capable of securing at least one (1) AWG #6 conductor.

907-632.02.3.2--Terminal Strips. Conductors shall be terminated on terminal strips with insulated terminal lugs. When two (2) or more conductors are terminated on field wiring terminal strip screws, a terminal ring lug shall be used for termination of those conductors. The voltage and current rating of terminal strips shall be greater than the voltage and current rating of the wire which is terminated on the terminal strip.

907-632.02.3.3--Cabinet Receptacles. A 3-wire 115 Volt AC (15A) Ground Fault Circuit Interrupt (GFCI) duplex receptacle shall be provided in the cabinet for maintenance use. It shall be securely mounted near the bottom right side of the cabinet and easily accessible.

Two (2) 3-wire 115 Volt AC (15A) non-GFCI protected outlets shall be installed, one on each side of the cabinet. These two (2) outlets are used for communication or other auxiliary equipment.

907-632.02.3.4--Operating Line Voltage. All equipment shall be designed to operate from a 120 volt, 60 cycle AC supply. Operation shall be satisfactory at voltages from 105 volts to 130 volts. All operating voltages into and out of the controller shall be NEMA level DC voltages except for the controller AC power source (Connector A, Pin p – AC-Control and Pin U – AC Common).

907-632.02.3.5--Circuit Breakers. Circuit breakers shall meet the requirements set forth in

Subsection 722.07. A 30-amp main breaker, with a minimum of 10,000 amp interrupting capacity, shall be provided for all cabinets to supply power to the controller, MMU, signals, and rack power supply.

Two (2) auxiliary breakers shall be provided. The first breaker, 10-amp, shall supply power to the fan, light, GFCI utility receptacle and two (2) auxiliary standard receptacles. The second breaker, 5-amp, shall be installed to supply power for the Controller Unit and MMU2. The above circuit breakers line side shall be jumpered together and will be fed from an external main circuit. A third 5-amp breaker shall be required if an ITS camera panel is called for in the plans.

907-632.02.3.6--Main Line Arrestors. Surge protection shall be provided that meets the requirements set forth in Subsection 722.12. A main line arrestor shall be provided to reduce the effects of voltage transients on the AC power line. It shall be installed after the circuit breaker. The main line arrestor shall be sufficient to protect all equipment and devices as per the plans and the following minimum specifications.

- Multi-stage Hybrid Design
- Series induction filtering
- Thermally protected Metal Oxide Varistors (TMOV's)
- Operating Voltage: 120 VAC
- Clamping Voltage: 395 VAC
- Operating Current: 15 A
- Peak Surge Current: 50 kA/Mode, 100 kA/Phase
- Operating Frequency: 47-63Hz
- EMI Attenuation: 40 dB Typ
- SPD Technology: TMOV's w/ W-C Filter
- Modes of Protection: L-N, L-G, N-G
- Status Indication: Power On & TMOV's Functional
- Connection Type: ¼-20 Stainless Steel Stud
- Operating Temperature: -40°F to +185°F

907-632.02.3.7--Solid State Main Line Relay (SSR). A normally-open, 75-amp, hybrid SSR shall be provided on the power distribution panel. The relay shall include a LED indicator to verify circuit power.

907-632.02.4--Terminal Facilities Board. The Terminal Facility shall be a hardwired load bay for NEMA TS 2 Type 1 actuated controllers. The load bay shall include either eight (8), twelve (12) or sixteen (16) load switch positions, as specified by the plans, and shall be centered along the back of the cabinet below the bottom shelf.

All wires terminated behind the backboard, as well as any additional panels, shall be soldered. No pressure or solderless connectors shall be used, unless they are soldered to the wire and tab after connection.

907-632.02.4.1--Load Switches and Flashers. Solid State Load Switches, compatible with low

wattage LED signals, shall be provided for the sequence called for on the plans. The load switch sockets shall be wired for triple-signal load switches conforming to NEMA TS 1-1994 and NEMA TS 2-2003 requirements.

The flasher socket shall be wired for and provided with a Type 3, two (2) circuit Solid State Flasher conforming to NEMA TS 1-1994 and NEMA TS 2-2003 requirements. It shall be possible to flash either the amber or red indication on any load switch outputs. It shall be possible to easily change the flash indication from the front side of the panel using readily available tools such as a screwdriver. A nominal flash rate of 50 to 60 FPM shall be provided. Flash rate shall be stable when used with generators or inverters.

Support(s) shall be provided to support the Flasher and Load Switches at some point approximately half of the total length from the panel surface. Sufficient area beneath the Load Switch or Flasher shall be clear in order to allow for free flow of air across the Load Switches or Flasher. Load Switches and Flashers must be provided with LED indicator lights on the side facing the cabinet door.

907-632.02.4.2--Flash Transfer Relay. All flash transfer relays, as a minimum, shall meet NEMA TS 1 requirements. The number of relays that shall be supplied with each cabinet shall accommodate the number of signal phases as indicated in the project plans. The coil of the flash transfer relay must be de-energized for flash operation.

907-632.02.5--Cabinet Wiring. Controller cabinets shall be wired in accordance with the signal phasing plans. If phases are indicated as omitted for future use, or if phases are not shown to be used in the plans, the cabinet shall be wired for use of the phases shown as future or unused. Load Switches shall not be provided for future or unused phases.

Wiring in the cabinets shall conform to the requirements of the National Electrical Code (NEC) and all of these specifications. All conductors in the cabinet shall be stranded copper. All wiring shall be laced. All wiring shall be in accordance as specified by Section 636 and Subsection 722.03 for Electric Cable and IMSA Specification 19 and/or 20 for Signal Wiring.

Connector harnesses for controller, conflict monitor, vehicle detectors, and accessory equipment (including NEMA defined Card Rack with power supply and pre-wired optical detection slots) shall be provided and wired into the cabinet circuitry. Connecting cables for controller and conflict monitor harnesses shall be sleeved in a braided mesh. All wires shall be securely terminated on terminal strips. The lay of the interconnect cable between the components must be such that when the door is closed, it does not press against the cables or force the cables against the various components inside the cabinets.

All communication wiring shall be bundled and routed independently of all other wiring. All live conductors shall be covered with suitable insulating material. All equipment grounds shall run directly and independently to the grounding bus.

All wires shall be cut and terminated as close as possible to the proper length before assembly. Consideration of equipment location adjustments must be made when determining appropriate

wire lengths. Excessive lengths of wire or cable shall not be allowed. All line voltage conductors used in controller cabinet shall conform to the following color code:

AC Neutral: White
AC Hot: Black
Safety Ground: Green

907-632.02.5.1--Signal Terminal Arrestor Grounding Bar. A field terminal arrestor grounding bar shall be provided along the back portion of the cabinet for the installation of signal arrestors. This bar shall be attached using an AWG #10 stranded copper to the earth ground circuitry.

907-632.02.5.2--Signal Terminal Arrestors. The field terminal arrestor shall be a three (3) circuit protective device intended for use on traffic control load relay outputs. The arrestor shall be furnished with three (3) leads and a grounding stud which will be used to attach the arrestor to the grounding bar. The field terminal arrestor shall meet the following minimum specifications:

- Operating Voltage: 120 VAC
- Clamping Voltage: 475 VAC
- Peak Surge Current: 10 kA
- Operating Frequency: 47 – 63 Hz
- SPD Technology: MOV's
- Connection Type: Wire Leads
- Lead Wire: 14 AWG 12" Length
- Ground Stud: 10 x 32 5/8" Length
- Operating Temperature: -40°F to +185°F

907-632.02.6--Accessory Components.

907-632.02.6.1--Traffic Actuated Controller Unit. The fully actuated controller unit shall, at a minimum, meet the requirements of both NEMA TS 1–1989 and NEMA TS 2-2003 requirements for actuated controller units. The controller shall be of the TS 2 Type 2 configuration. The controller shall be provided with the multiple communication interface devices or properties as defined below.

- 10 Base-T Ethernet with front panel RJ-45 connector
- IEEE defined MAC address
- EIA-232 port
- External Serial Fiber options for both single and multi-mode (optional as per plans)
- External FSK 1200 bps modem (optional as per plans)
- D connector with 37 pin configuration for TS 1 compatibility
- USB port for signal controller database upload/download to the controller flash
- Controller
- ECOMM Compatible

The controller unit must have an alphanumeric backlit LCD display with a minimum of sixteen

(16) lines at 40 characters per line. The controller must be air-cooled with sufficient ventilation openings and capable of operating between -30°F and 165°F. The controller unit must be provided with a time-of-day clock, automatic daylight savings time adjustment and a power supply for maintaining SRAM during a power outage. The controller unit shall be capable of being used in a Closed-Loop System and must be capable of operating in the role of master controller in a Closed Loop System. The controller unit firmware shall be fully compatible with the Department's existing Traffic Signal Management Software. The Contractor shall ensure all controller firmware versions are compatible with the existing Traffic Signal Management Software that the Regional Department staff currently utilizes prior to submitting the controller for approval. The Contractor shall notify the Department if any special controller configuration or firmware is needed prior to submitting the controller for approval based on project requirements.

Where Flashing Yellow Arrow (FYA) operations are being used, all traffic signal controller firmware shall be capable of delaying the onset of the flashing yellow arrow.

All operator entered data shall be stored and backed up on to a flash memory device provided with the controller unit at no cost. This flash memory device shall require no battery to support value storage. No internal components of circuitry shall require battery support. The database shall be able to be backed up to a USB drive via the USB drive on the controller.

Traffic Actuated Controllers shall be of the Type shown on the plans. Type 1 Controllers shall have a Linux based processor and a minimum of one (1) USB port. Type 2 Controllers shall have the same features as Type 1 Controllers with the addition of an ATC backplane.

Type 3 Controllers shall have all features of the Type 2 Controller with the addition of the ATC module. All three (3) types of actuated controllers shall have Master controller capability, and if required shall be designated with 'M' in the plans.

907-632.02.6.2--Closed Loop Master Controller Unit. When called for in the plans, this work also consists of furnishing, installing and configuring the equipment, software and accessories necessary to connect one (1) traffic Closed-Loop Master Controller to its corresponding central or portable PC-based Traffic Computer Facility Control System via a communications connection. The communications or network connection device will be either existing or provided by the Contractor.

907-632.02.6.2.1--General. The Master shall monitor intersections in the system, display status and operational state and provide traffic flow data from intersection vehicle detectors. The Master shall include all communications equipment and software necessary to provide reporting to a remote terminal as well as upload/download of all local intersection data and provide timing synchronization. Communications to local controllers from the Master and from the Master to the central-office computer facility shall be by FSK, 900 MHz Radio, Broadband Radio, Serial Fiber, Ethernet, Fiber, Cell Modem or Leased Line, as indicated in the plans. The Master shall be able to run on the same controller simultaneously operating the intersection, with the local signal control software, on any given controller unit.

907-632.02.6.2.2--System Configuration. The system architecture shall be designed to minimize

the effect of equipment failures on system operation and performance. The system consists of four (4) principal elements:

- Local System Intersection Controllers
- Communication (Telemetry Links)
- On-Street Master(s)
- Central-Office Computer Software

907-632.02.6.2.3--Local System Intersection Controller. The local system intersection controllers connected to the Master controller unit shall be capable of controlling a fully actuated two (2) to sixteen (16) phase intersection and shall meet or exceed NEMA TS 1-1989 and TS 2-2003 standards for fully actuated traffic control units. The local controller shall have internal communication capability with direct access to the data memory. The local system controller shall be capable of processing controller and detector data and provide all necessary intersection control functions. The local system intersection controller shall meet the requirements of the Traffic Actuated Controller Unit.

907-632.02.6.2.4--Communications (Telemetry) Links. The communications links for the "Closed-Loop" System shall perform the following functions:

- Provide the medium (radio/fiber/hardwire/etc.) for two-way communications between the On-Street Master and the local intersection controllers.
- Provide the medium for two-way communication between the On-Street Master and the central-office computer facility.
- Error checking shall be included in both mediums to assure transmission and reception of valid data.

907-632.02.6.2.5--On-Street Master. The On-Street Master may be located at an intersection and connected via the communication network to at least 32 local intersection controllers. The Master shall be capable of implementing Traffic Responsive Control, Time Base Control, Manual Control or Remote Control modes of operation.

Analysis of sampling sensor data from at least 64 system detectors and corresponding selection of the best Traffic Responsive timing pattern shall be provided by the On-Street Master during the Traffic Responsive mode of operation.

Automatic and continuous monitoring of system activity shall be provided by the On-Street Master to include both Master and intersection alarm conditions.

System parameter entry shall be provided via the On-Street Master including all Master and local intersection assignment and group parameters. Master parameters shall include:

- System coordination setup and pattern data entry by group
- System time base event scheduler
- System traffic responsive computational and pattern selection setup by group
- Intersection system group and detector assignments

The On-Street Master shall provide comprehensive system report generation including, as a minimum: system, intersection, detector and failure status and history reports in addition to system performance reporting.

A RS-232C interface shall be provided on the On-Street Master to allow for printing of reports or for interconnecting to a remote central site.

To enhance overall system operation and increase system management flexibility, the On- Street Master shall also support two-way dial-up communications to a central office computer for control, monitoring, data collection and for timing pattern updating purposes, all from a remote central office location. Continuous, seven (7) days/week - 24 hours/day, system monitoring shall be enhanced by the On-Street Master's capability to automatically dial-up the central office computer upon detection of user defined critical alarm conditions.

907-632.02.6.2.6--System Functional Requirements.

907-632.02.6.2.6.1--Operator Interface. In order to provide ease in programming and operation, the system shall provide a simplified user-friendly menu format at each local, master and central office facility. No special programming skills shall be required for the user to fully access and operate this control and monitoring system at any level.

All programming, both of the local intersection controllers and the On-Street Master(s) shall be via a front panel keyboard and display, driven by English Language menus. All data change entries will be automatically verified against established ranges prior to acceptance to prevent programming data errors. Data access shall be controlled by user- definable access controls.

907-632.02.6.2.6.2--System Traffic Control. The system shall have the capability of controlling a minimum of sixteen (16) vehicle phases and eight (8) pedestrian phases. The system shall have the capability of implementing a minimum of four (4) timing rings, fifteen (15) alternate sequences, and sixteen (16) offsets.

The system shall provide the capability of selecting any of the following operational modes on a group basis:

- Traffic Responsive
- Time Base (Time-of-Day/Day-of-Week)
- Remote (External Command)
- Manual (Operator Entry)

The system shall be capable of implementing system FLASH and system FREE operation. The system shall have the capability to command, on/off based on time, up to eight (8) independent special functions.

907-632.02.6.2.6.3--Detectors. The system shall have the capability of accepting and processing data from at least 632 system detectors for Traffic Responsive program selection.

907-632.02.6.2.6.4--Pattern Selection. In addition to providing Manual and Remote program selection capability, the Master shall provide for Traffic Responsive and Time Base modes of operation for timing pattern selection.

907-632.02.6.2.6.4.1--Traffic Responsive Mode. Traffic plan selection in the Traffic Responsive mode shall be user-enabled and supplied with the controller, per the plans and specifications. The pattern selection shall be based on sampling detector volume and occupancy analysis by the On-Street Master.

907-632.02.6.2.6.4.2--Time Base Mode. The system shall provide the capability of implementing time-of-day, day-of-week and week-of-year control for each of the two (2) groups using an internal time clock referenced to the 60-Hz AC power line frequency for its time base. The Time Base mode shall contain automatic adjustment for leap year and daylight savings time changes.

The system Time Base mode shall provide, as a minimum, 100 events each capable of requesting any of the 48 traffic control patterns along with Traffic Responsive override enable or auxiliary events consisting of enable/disable any of up to four (4) system-wide special functions and setting sample and log interval time periods.

907-632.02.6.2.6.5--System Control Priority. The system coordination control (program-in-effect) for each group shall be selected on a priority basis. The priority from highest to lowest shall be as follows:

- Manual Control Entry
- External Control (Remote Command)
- Time Base Control (Time-of-Day/Day-of-Week) (Traffic Responsive control will prevail whenever Traffic Responsive Override Enable is active and the selected cycle length is greater than that being commanded by Time Base)
- Traffic Responsive Control

907-632.02.6.2.6.6--Measures of Effectiveness. The system shall have the capability to report selected Measures of Effectiveness (MOE's) on an intersection basis. MOE calculations shall be made on all phases by the local system intersection controller and as a minimum shall include measures such as: volume, number of stops, delays and green utilization. These measures shall be calculated on the basis of the active timing plan. Alternate ways of reporting MOE'S may be approved on a case-by-case review.

907-632.02.6.2.6.7--Uploading and Downloading. The system shall provide, for any selected local system intersection controller, the capability of uploading and downloading any or all, new or modified local intersection parameters from the central-office computer and the Department Central Traffic Signal Management Software, and shall include, as a minimum, all: Phase Timing and Unit Data; Coordination Data, Time Base Data; Preemption Data, System Communication Parameters, System Traffic Responsive Data, and any other System Data residing at the intersection such as Detector Diagnostic Values, Report Parameters and Speed Parameters.

During either uploading or downloading operations, normal traffic control operations shall not be suspended. All data shall be continually accessible and may be displayed at the On- Street Master or the central office computer.

907-632.02.6.2.6.8--System Monitoring and Diagnostics. The system shall automatically and continually monitor system activity and log/report occurrences of Master and intersection alarm conditions. All alarm condition events shall include at the intersection, (Master and central-office computer) an alpha-numeric description of the event as well as the time and date of occurrence.

As a minimum, monitored master alarms conditions shall include:

- Insufficient or Improper Data
- Failed Computational Channels
- Failed System Detectors
- Intersection Communication Failure
- Failed Controllers
- Minimum of six (6) special user defined alarms for user application flexibility
- Monitored intersection alarms conditions shall include as a minimum:
- Cycle Faults and Failures
- Coordination Failures
- Voltage Monitor
- Conflict, Local and Remote Flash Conditions
- Preempt
- Local Free
- Minimum of six (6) special user defined alarms for additional user flexibility.

When the Master detects a critical alarm condition, as defined by the user, it shall automatically dial-up the central office computer and report the condition. On a BUSY or NO ANSWER, the system may be programmed, at user option, to alert a secondary computer.

The system shall also automatically and continually monitor, verify and attempt to correct Sync Pulse, Time Base Clock and Pattern-In-Effect. The system shall provide capabilities to perform diagnostics on system and local detectors, communications and intersection operations. When a fault has been detected, an indication shall be provided. It shall be possible to isolate the fault to the failed unit from controls and indicators available on the Master unit. Auxiliary equipment such as a data terminal or CRT shall not be required to identify the failure.

907-632.02.6.2.6.9--Real Time Display. The Master shall provide for any selected local system intersection controller, real-time status information on its front panel. Real-time intersection status information shall include simultaneous display of: vehicle and pedestrian signal and detector status by phase, overlap signal status and cars waiting count by phase. Real-time controller status information shall include simultaneous display of: two (2) Ring Active timers, On/Next, Call/Recall and Hold/Omit Status by phase, Coordination, Preempt and Stop Time Status.

907-632.02.6.2.6.10--System Management. The system, without hardware changes but with its

ability to directly modify Master and intersection parameters, shall provide the user system configuration and operational controls of the following functions: add/delete controllers and system detectors, enable Traffic Responsive mode, assign intersections to groups, assign system detectors to computational channels and channels to pattern select routines, and assign special and/or standard detectors as system detectors for use with computational channels or to track activity.

907-632.02.6.2.6.11--System Logging and Reports. The system shall automatically and continually process system data and log/report on occurrence of changes in intersection status, system detector status, communications status, controller status and local detector status in addition to system program changes, Traffic Responsive computations, measures of effectiveness and performance.

907-632.02.6.2.6.12--Security. The On-Street Master shall provide for a user-specified security code entry before any data may be altered. In order to view any parameter, security code entry shall not be required. Security access shall be automatically rescinded approximately ten (10) minutes after either access was gained or the last parameter change was entered. The Master and local controller shall have the ability via keyboard to disable security code requirements, allowing for perpetual access without requiring hardware changes.

907-632.02.6.2.7--Design Characteristics. The On-Street Master shall be designed to operate in either an office or field environment and shall be suitably housed in a separate enclosure or in a local intersection cabinet. The Master shall be designed to meet the following electrical and mechanical requirements:

907-632.02.6.2.7.1--Programming and Security. Operator programmable data entry shall be accomplished through panel keyboard(s). The Master shall prevent the alteration of keyboard set variables prior to the user having entered a specific access code through the keyboard. The Master shall maintain user-programmable variables in non-volatile memory with a battery-backed RAM to assure continued efficient system operation.

907-632.02.6.2.7.2--Test and Repair. To enhance maintenance and trouble-shooting activities, On-Street Masters shall include resident diagnostics as a standard. No extender- cards, special tools or PROMs shall be necessary to fully maintain these components. The Master unit design shall ensure that all printed circuit boards be readily accessible for maintenance testing purposes. All fuses, connectors and controls shall be accessible from the front of the Master unit.

907-632.02.6.2.8--Traffic Signal System Software. All Traffic Signal System Software shall be compatible with the latest version of the Department's existing Master and local controllers and existing Traffic Signal Management Software for the Department region.

907-632.02.6.2.8.1--Traffic Signal Closed Loop Software. The Traffic Signal Closed-Loop Software shall provide the ability to manage Master and local controller databases including the uploading and downloading of data parameters. The software shall provide status information and provide reporting capabilities for Master and local controller data, alarms and logs.

907-632.02.6.2.8.2--Traffic Signal System Workstation Software. The Traffic Signal System Workstation shall provide the ability to manage Master and local controller databases including the uploading and downloading of data parameters. The software shall provide status information and provide reporting capabilities for Master and local controller data, alarms and logs.

The Traffic Signal System Workstation Software shall also be capable of operating as a network-connected user workstation to existing centralized signal systems and their associated databases.

When disconnected from the centralized signal system, the software shall be capable of running as a standalone system similar to the Closed-Loop Software. Under this mode, the software shall provide management, report and status functions for Master and local controllers. Under Standalone Mode of operation the software shall allow for its own database(s) for data management without the need for connecting to a centralized signal system database.

907-632.02.6.2.9--Services. Technical services shall be provided, as required, to assist in installation and initial setup of the Closed-Loop Master System and its sub-components. Technical assistance with database migration and/or setup, as well as the development of graphics (such as master maps and local intersection depictions) and the assignment of associated attributes such as detectors, phasing, signals, etc., shall be provided as required. Additionally, training shall be provided on a basic or advanced target user level, as required.

907-632.02.6.3--Malfunction Management Unit (MMU2). The Malfunction Management Unit (MMU2) shall be a shelf-mountable, sixteen (16) channel, solid-state, IP addressable MMU. The MMU2 shall accomplish the detection of, and response to, improper and conflicting signals and improper operating voltages in a traffic signal controller assembly, including support for four (4) section Flashing Yellow Arrow (FYA) left turn displays. The MMU2 shall be capable of running a minimum of twelve (12) different modes of FYA operation.

The MMU2 shall meet or exceed Section 4 requirements of the NEMA Standards Publication No. TS 2-2003 including NEMA TS 2 Amendment #4-2012 and provide downward compatibility to NEMA Standards Publication No. TS 1-1989: Type 12 Operation, in addition to those specifications set forth in this document.

The MMU2 shall include a graphics based Liquid Crystal Display (LCD) to view the current monitor status and navigate the unit's menus. An RJ-45 Ethernet Port shall be provided for communications.

A built-in Diagnostic Wizard shall be provided that displays detailed diagnostic information regarding the fault being analyzed. This mode shall provide a concise view of the signal states involved in the fault, pinpoint faulty signal inputs and provide guidance on how the technician should isolate the cause of the malfunction. The Diagnostic Wizard shall be automatically invoked when the MMU2 is in the fault mode and the HELP button is pressed. It shall also be automatically invoked when the MMU2 is in the Previous Fail (PF) event log display and the HELP button is pressed.

A built-in Setup Mode shall be provided that automatically configures the Dual Indication Enable, Field Check Enable, Red Fail Enable and Minimum Yellow Plus Red Clearance Enable parameters from user input consisting only of channel assignment and class (vehicle, ped, pp-turn, FYA, etc.) responses.

The MMU2 shall be capable of operating in the Type 12 mode with SDLC communications enabled on Port 1. The Channel Status display shall operate in the Type 12 configuration and provide the Field Check function for up to four (4) Pedestrian Walk inputs.

In the interest of reliability and repair ability, printed circuit board mounted MS connectors shall not be acceptable. Internal MS harness wire shall be a minimum of nineteen (19) strand AWG 22 wire.

907-632.02.6.4--NEMA defined Card Rack and Power Supply. A minimum of one (1) NEMA compliant detector card rack with five (5) slot positions (first slot for power supply and four (4) available slots) shall be provided in each cabinet. The detector rack shall be installed on the bottom shelf of the cabinet. The power supply for the NEMA defined card slots shall be provided as a 175W minimum with four (4) independent regulated channels of 24 VDC each rated at 0.75 amps over the full NEMA operating temperature range of -30°F to +165°F. The output should be regulated to 24 VDC +/- 15%. Each of the four (4) outputs shall be independently fused, each with a separate LED for displaying output and fuse status for each of the four (4) outputs. Each of the four (4) outputs shall be protected against voltage transients by a minimum 1500 watt suppressor. All card racks shall be wired for the type detection shown in the plan sheets.

Card Guides shall be provided on the top and bottom of the card rack for each connector position.

907-632.02.6.5--In-Cabinet Network.

907-632.02.6.5.1--Communications Arrestor. The Controller Cabinet network shall consist of an SDLC connection between the Controller Unit and MMU2. Surge suppression for this network shall meet the requirements set forth in Subsection 722.12 and the following minimum requirements below:

- Operating Voltage: 5 VDC
- Clamping Voltage: 8 VDC
- Operating Current: 1.5 A
- Peak Surge Current: 47 A (10x1000 μs)
- Frequency Range: 0 to 20 MHz
- Insertion Loss: < 0.1 dB at 20 MHz
- SPD Technology: SAD
- Connection Type: DB-15
- Operating Temperature: -40°F to +185°F

907-632.02.6.6--System Communications.

907-632.02.6.6.1--Traffic Signal Ethernet Switch. When specified in the plans or contract

documents, a traffic signal Ethernet switch shall be installed in the cabinet assembly. It shall meet the requirements for the type specified in Section 907-663. Ethernet patch cables of sufficient length shall be provided for all supplied Ethernet ready cabinet components. The switch and all components shall be connected and configured.

907-632.02.6.6.2--Fiber Optic Patch Panel. When specified in the plans or contract documents, fiber optic attenuator patch cords shall be installed in the cabinet assembly as specified in Section 907-661.

907-632.02.6.6.3--Wireless Communications. When specified in the plans or contract documents, wireless communication components shall be installed in the cabinet assembly and shall be as specified in Section 907-662.

907-632.02.6.6.4--Serial Port Server or Terminal Server. When specified in the plans or contract documents, serial port servers shall be installed in the cabinet assembly and shall be as specified in Subsection 907-663.02.2.

907-632.02.6.6.5--GPS Clock. This work includes furnishing a Global Positioning System (GPS) Synchronization clock that can be used to sync the internal clocks in traffic signal controllers when coordination is desired, but communication is not necessary. The GPS Clock System shall provide GPS based time and date synchronization to provide coordination of traffic controllers to a common time base. The system shall process GPS Time data using a tamper/vandal resistant GPS antenna and correct for Time Zone, Daylight Savings Time, Leap Years, and GPS Leap Seconds. The processed time information shall be sent to the traffic controller in the native format for the respective controller. A contact closure synchronization pulse with variable pulse width shall be available for a once per day update. If the GPS antenna is blocked for up to one (1) hour prior to scheduled time of synchronization, the system shall synchronize the traffic controllers with less than 0.4 seconds variance from the accuracy provided under normal operation with GPS satellites in view.

- The GPS Clock shall also meet the following minimum specifications:
- Input Voltage: 9-24 VDC
- Current Draw: 150 mA (max) at 12 VDC: 125 mA (max) at 24 VDC
- Contact Closure: 750 mA at 30 VDC
- Temperature Rating: -29.4°F to +167°F

GPS unit shall be mounted to the traffic signal controller cabinet as per the manufacturer's recommendation. Any and all holes created in the cabinet for the purpose of mounting the GPS unit shall be sealed to the satisfaction of the Engineer at no direct pay.

907-632.02.6.6.6--Power-Over-Ethernet Arrestor. Surge suppression that meets the requirements set forth in Subsection 722.12 shall be provided. In addition, the following minimum specifications shall be supplied for loads that require Power-Over-Ethernet with isolated shielded or non-shielded cable:

- Operating Voltage: 48 VDC
- Clamping Voltage: 68 VDC
- Operating Current: 0.75 A per Pin Continuous
- Peak Surge Current: 10 kA
- Insertion Loss: < 0.1 dB
- SPD Technology: GDT, SAD, with series PTC
- Modes of Protection: All Lines (1-8) Protected (L-L) and (L-G): Signal High- Low; High-Ground; Low-Ground
- Transmission Speeds: 10BaseT; 100BaseT; 1000BaseT
- Connection Type: RJ-45
- Operating Temperature: -40°F to +185°F

907-632.02.7--Detector Panel. A vehicle detector harness shall be provided to connect the detector panel to the card rack. The detector panel shall accept the connection of sixteen (16) field loop inputs and four (4) pedestrian detector inputs.

907-632.02.7.1--Detector Input Arrestors. Field Loop and Pedestrian input arrestors shall meet the requirements set forth in Subsection 722.12. Field loop arrestors shall have differential and common mode protection and be provided with the following minimum specifications:

- Operating Voltage: 75 VDC
- Clamping Voltage: 130 VDC
- Peak Surge Current: 250 A
- SPD Technology: Silicon Break-Over
- Operating Temperature: -40°F to +185°F

Pedestrian input arrestors shall be a four (4) circuit device provided with the following minimum specifications:

- Operating Voltage: 30 VDC
- Clamping Voltage: 36 VDC
- Operating Current: 0.15 A
- Peak Surge Current: 10 kA (8 x 20 μs)
- Frequency Range: 0 to 20 MHz
- Insertion Loss: < 0.1 dB at 20 MHz
- SPD Technology: GDT, SAD, with Series PTC
- Connection Type: Terminal Block with compression lugs; Terminals accept up to
- 10 AWG
- Operating Temperature: -40°F to +185°F

907-632.02.8--System Detectors. The controller shall have the ability to receive input data from up to eight (8) special system detectors in addition to the normal actuated controller unit phase detectors. The user shall have the option to assign any of the phase detectors as "system detectors".

907-632.02.9--Preemption. The cabinet shall be completely wired to accept and service calls from preemption phase selector modules, associated optical detector units and GPS units. Optical detector units and GPS unit cabinet components shall be as specified in Section 639. Provision for two (2) standard card modules shall be accommodated in a separate card rack for preemption. The preemption card rack shall provide a minimum of eight (8) channels.

Provisions shall also be made in the cabinet to accommodate Railroad Preemption when specified in the plans or contract documents. Railroad Preemption shall meet the requirements set forth in Section 639. While it is not necessary that a Railroad Preemption interface board be provided with the cabinet, the cabinet and back panel shall be designed so that a Railroad Preemption interface panel that uses a relay to isolate the track switch from the controller cabinet circuitry can be installed. Preempt 1 and 2, in the case of gate down preemption, shall be reserved for Railroad Preemptions; all subsequent preemptions shall be reserved for Emergency Vehicle, Fire Station, or Police Preemption.

907-632.02.10--Uninterruptable Power Supply. When specified in the plans or contract documents an Uninterruptable Power Supply (UPS) System shall be installed in the cabinet assembly. The UPS shall be installed in the cabinet and meet the requirements set forth in Section 633.

907-632.02.11--Power Service Pedestal. A Power Service Pedestal shall be provided as described in Section 631.03.2.

907-632.03--Construction Requirements.

907-632.03.1--Mounting. Traffic Signal Cabinet Assemblies shall be wall or pole mounted, base mounted on a concrete cabinet pad, or base mounted using a composite enclosure as specified below and as shown in the plans.

Power Service Pedestal shall be base mounted on a concrete cabinet pad or on a composite enclosure as specified below and as shown in the plans.

907-632.03.1.1--Wall or Pole Mounted. Wall or pole mount hardware shall be provided for mounting cabinets in specific installations as indicated in the design plans. Wall or pole mounted cabinets shall be manufactured with rigid tabs, rigid brackets or other acceptable configuration for attachment of the cabinet to the wall or pole support. Rigid attachment devices must allow for field alignment of cabinet to the wall or pole support.

907-632.03.1.2--Concrete Cabinet Pad. Concrete foundations shall be constructed of Class B concrete in specific installations as indicated in the design plans.

Cabinets for installation on a concrete base shall be manufactured with rigid tabs, rigid brackets or other acceptable configuration for attachment of the cabinet bottom to its flat support structure. Rigid attachment devices must allow for field alignment of cabinet with the support base. Concrete base construction details shall be provided in the design plan drawings.

907-632.03.1.3--Composite Enclosure. Cabinets for installation on a composite enclosure base shall be manufactured with rigid tabs, rigid brackets or other acceptable configuration for attachment of the cabinet bottom to its' flat support structure. Rigid attachment devices must allow for field alignment of cabinet with the composite enclosure. Composite enclosure attachment details shall be provided as shown in the plans.

907-632.03.2--Documentation. Documentation packages shall be delivered for each unit at the same time as the equipment to which it pertains.

A minimum of two (2) sets of complete schematic drawings and equipment documentation shall be supplied with each cabinet. The first copy shall be placed in a clear re-sealable print pouch of sufficient size to accommodate one (1) complete set of folded cabinet prints and placed in the pull-out drawer of the cabinet and the second copy shall be provided to the Department. Comprehensive controller data shall be included as part of the cabinet documentation package and shall be placed in the cabinet drawer pouch. Digital copies of all cabinet documentation shall be provided to the Department before final acceptance.

The documentation packages shall contain a schematic wiring diagram of the controller cabinet assembly and all auxiliary equipment. The schematic wiring diagram, including a symbols legend, shall show in detail all integrated circuits, transistors, resistors, capacitors, inductors as well as switches and indicators. All parts shown shall be easily identified on both in the cabinet and on the schematic diagram. Model numbers shall be used on schematic diagram when available.

A complete physical description of the signal cabinet assembly shall be provided to include at least the physical dimensions of the unit, weight, temperature ratings, voltage requirements, power requirements, material of construction, and complete performance specifications.

A complete set of operation guides, user manuals, and performance specifications shall be provided.

Detailed programming instructions, preventative maintenance requirements, and troubleshooting procedures shall also be provided for the controllers. These documents shall fully cover all programming procedures and programmable options capable of being made to the controllers and associated traffic control equipment. Instructions for modifications within the range of the capabilities of the unit such as changes in phases or sequences and programming matrix boards shall be included.

An intersection diagram shall be provided on the cabinet door showing geometric configuration, lane use assignments, controller cabinet and signal pole locations, vehicle and pedestrian signal head locations, vehicle and pedestrian detector zone locations, ring-barrier phasing diagram, and detector channel assignments. The intersection diagram shall be labeled with, at a minimum, a North Arrow, main street name(s), side street name(s), signal pole numbers, vehicle and pedestrian head type(s), detector zone designations, volume density and phase recall requirements, flash sequence. All field wires within the cabinet shall be labeled to coincide with those shown on the intersection diagram.

907-632.04--Method of Measurement. Traffic Signal Cabinet Assembly will be measured as a unit per each.

Remove and Replace Existing Traffic Signal Cabinet Assembly will be measured as unit per each.

Modify Existing Traffic Signal Cabinet will be measured as a unit per each.

Solid State Traffic Actuated Controller, of the type specified in the project plans, will be measured as a unit per each.

Signal Software License, of the type specified in the project plans, will be measured as a unit per each.

Malfunction Management Unit, of the type specified in the project plans, will be measured as a unit per each.

Card Rack, of the type specified in the project plans, will be measured as a unit per each.

GPS Clock, as specified in the project plans, will be measured as a unit per each.

Power Service Pedestal, as specified in the project plans, will be measured as a unit per each.

All pay items shall be inclusive of all materials, work, system integration, testing and incidentals necessary for a complete and operable unit in place and accepted. All removal, turn on, and acceptance of equipment, devices, traffic signals, and traffic signal assemblies shall follow Section 631 - Traffic Signal Systems-General prior to payment.

907-632.05--Basis of Payment. Traffic Signal Cabinet Assembly, measured as prescribed above, will be paid for at the contract unit price per each for each type(s) specified in the contract, which price shall be full compensation for furnishing, installing, configuring, wiring, testing, and mounting foundation construction, cabinets, relays, terminals, circuit breakers, modules, coordination and time base control programs, connectors wiring, overlap equipment, load switches, power cables, power supplies, controller mechanism and housing, MMU2, mounting material, all other materials, and all equipment, labor, tools, and incidentals necessary to complete the work.

Remove and Replace Existing Traffic Signal Cabinet Assembly, measured as prescribed above, will be paid for at the contract unit price per each for each type(s) specified in the contract, which price shall be full compensation for furnishing, installing, configuring, wiring, testing, cabinets, relays, terminals, circuit breakers, modules, coordination and time base control programs, connectors wiring, overlap equipment, load switches, power cables, power supplies, controller mechanism and housing, MMU2, mounting material, all other materials, removal, disposal, transfer, storage, and/or resetting of components that are existing, all other components included in the traffic signal cabinet, and all equipment, labor, tools, and incidentals necessary to complete the work.

Modify Existing Traffic Signal Cabinet, measured as prescribed above, will be paid for at the

contract unit price per each, which price shall be full compensation for furnishing, installing, configuring, and mounting all components, wiring, and devices; rewiring, reconfiguring, removal, disposal, transfer, storage, and/or resetting of existing components and devices, installing or changing coordination and time base control programs in the traffic signal cabinet assemblies, testing, final cleanup, all equipment, labor, tools, and incidentals necessary to complete the work.

Solid State Traffic Actuated Controller, measured as prescribed above, will be paid for at the contract unit price per each for each type(s) specified in the contract, which price shall be full compensation for all labor, equipment, tools, materials inclusive of the controller mechanism(s) and housing(s), all power cables, power supplies, wiring, factory and manufacturing inspection, attachment hardware, testing, storage, packaging, shipping, warranty, and all work, equipment, and appurtenances, and all incidentals necessary to provide a fully functional traffic controller ready for use. It shall also include all documentation including operations and maintenance manuals and other material necessary to document the operation of the traffic controller.

Signal Software Licenses, measured as prescribed above, will be paid for at the contract unit price per each for each type(s) specified in the contract, which price shall be full compensation for all labor, equipment, tools, materials inclusive of furnishing, installing and configuring the Signal Software, all power cables, power supplies, wiring, factory and manufacturing inspection, testing, storage, packaging, shipping, warranty, appurtenances, and all incidentals necessary to provide fully functional Signal Software ready for use. It shall also include all documentation including operations and maintenance manuals and other material necessary to document the operation of the Signal Software.

Malfunction Management Unit, measured as prescribed above, will be paid for at the contract unit price per each for each type(s) specified in the contract, which price shall be full compensation for all labor, equipment, tools, materials inclusive of furnishing, installing and configuring the Malfunction Management Unit (MMU2), all power cables, power supplies, wiring, attachment hardware, factory and manufacturing inspection, testing, storage, packaging, shipping, warranty, and all work, equipment, and appurtenances, and all incidentals necessary to provide a fully functional Malfunction Management Unit (MMU2) ready for use. It shall also include all documentation including operations and maintenance manuals and other material necessary to document the operation of the Malfunction Management Unit (MMU2).

Card Rack, measured as prescribed above, will be paid for at the contract unit price per each for each type(s) specified in the contract, which price shall be full compensation for all labor, equipment, tools, materials inclusive of furnishing, installing and configuring the Card Rack, all power cables, power supplies, wiring, attachment hardware, factory and manufacturing inspection, testing, storage, packaging, shipping, warranty, and all work, equipment, and appurtenances, and all incidentals necessary to provide a fully functional Card Rack ready for use. It shall also include all documentation including operations and maintenance manuals and other material necessary to document the operation of the Card Rack.

GPS Clock, measured as prescribed above, will be paid for at the contract unit price per each for each type(s) specified in the contract, which price shall be full compensation for all labor, equipment, tools, materials inclusive of furnishing, installing and configuring the Global

Positioning System (GPS) Clock(s), all power cables, power supplies, wiring, attachment hardware, factory and manufacturing inspection, testing, storage, packaging, shipping, warranty, and all incidentals necessary to provide a fully functional GPS Clock ready for use. It shall also include all documentation including operations and maintenance manuals and other material necessary to document the operation of the GPS Clock.

Power Service Pedestal, measured as prescribed above, will be paid for at the contract unit price per each for each type(s) specified in the contract, which price shall be full compensation for furnishing, installing, configuring, wiring, testing, and mounting foundation construction, cabinets, circuit breakers, connectors wiring, mounting material, all other materials, and all equipment, labor, tools, and incidentals necessary to complete the work.

Payment will be made under:

907-632-A:	Solid State Traffic Signal Cabinet Assembly, Type __ Cabinet, Type __ Controller	- per each
907-632-B:	Remove and Replace Existing Traffic Signal Cabinet Assembly, Type __ Cabinet, Type __ Controller	- per each
907-632-C:	Modify Existing Traffic Signal Cabinet Assembly	- per each
907-632-D:	Solid State Traffic Actuated Controller, Type ____	- per each
907-632-E:	Single-user Workstation Signal Software License	- per each
907-632-F:	Single-user Server Signal Software License	- per each
907-632-G:	Malfunction Management Unit	- per each
907-632-H:	Card Rack, ___ Position	- per each
907-632-I:	GPS Clock	- per each
907-632-J:	Power Service Pedestal	- per each

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-634-4 **CODE: (IS)**

DATE: 05/25/2021

SUBJECT: Traffic Signal and ITS Equipment Poles

Section 634, Traffic Signal and ITS Equipment Poles, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

907-634.02--Materials.

907-634.02.1--Poles. Delete the bullet for Type X poles in Subsection 634.02.1 on page 542 and substitute the following.

- Type X -- Aluminum Pole for Detectors

After Type XI poles in Subsection 634.02.1 on page 542, add the following.

- Type XII -- ITS Extension Poles

907-634.02.1.1--Traffic Signal Poles. Delete the first, third, fourth, and fifth bullets in Subsection 634.02.1.1 on pages 542 and 543, and substitute the following.

- Self-supporting straight or upswept mast arm(s), in accordance with Plan details. Where possible, the mast arms shall match the adjacent signal poles in the area unless otherwise stated;
- Tag installed on shaft side opposite the mainline highway and located approximately 48 inches above the top of the Baseplate;
- Minimum nominal size of four (4) inches wide by 26 inches tall reinforced hand-hole with included terminal block(s);
- A ½-inch coarse thread grounding stud shall be located on the interior side of the pole hand-hole opening;

907-634.02.1.2--Galvanized Steel Poles for Cameras. Delete the second paragraph of Subsection 634.02.1.2 on page 543, and substitute the following.

Unless specified otherwise in the plans, poles shall be designed in accordance with the AASHTO *Standard Specifications for Structural Supports for Highway Signs, Luminaries and Traffic Signals,* as specified in the plans, including all interims and updates. Design life shall be 50 years for all poles. The design wind speed for all parts of the structure shall meet the wind requirements set forth in the latest edition of the AASHTO Wind Map, as stated in Subsection 722.02.3. The pole shall meet the design wind loading with all equipment installed.

In the fifth sentence of the fifth paragraph of Subsection 634.02.1.2 on page 544, change "butt welded" to butt-welded" and change "radio graphically" to radio-graphically."

Delete the second bullet in Subsection 634.02.1.2 on page 544, and substitute the following.

- Consideration shall be given for all possible loading combinations including ice and wind loads.

After the fourth bullet in Subsection 634.02.1.2 on page 544, add the following.

- Top of pole deflection shall not exceed one (1) inch deflection from center due to 30 mph (non-gust) winds or the maximum deflection allowed by Subsection 722.02.3, whichever is more restrictive, for 80-foot poles.

In the first bullet in Subsection 634.02.1.2 at the bottom of page 544, change "cross sectional" to "cross-sectional."

In the second paragraph of Subsection 634.02.1.2.4 on page 545, change "butt weld" to "butt-weld."

907-634.02.1.3--Galvanized Steel Poles for Detectors. In the first paragraph of Subsection 634.02.1.3 on page 546, change "ground mounted" to "ground-mounted."

Delete the second paragraph of Subsection 634.02.1.3 on page 546, and substitute the following.

Unless specified otherwise in the plans, poles shall be designed in accordance with the AASHTO *Standard Specifications for Structural Supports for Highway Signs, Luminaries and Traffic Signals*, as specified in the plans, including all interims and updates. Design life shall be 50 years for all poles. The design wind speed for all parts of the structure shall meet the wind requirements set forth in the latest edition of the AASHTO Wind Map, as stated in Subsection 722.02.3.

Delete the last two sentences of the fifth paragraph of Subsection 634.02.1.3 on page 546, and substitute the following.

Design wind loading shall be as indicated in Subsection 722.02.3 unless otherwise noted in the plans. The pole shall meet design wind loading with all equipment installed.

907-634.02.1.4--Aluminum Poles for Detectors. Delete the second paragraph of Subsection 634.02.1.4 on page 547, and substitute the following.

Unless specified otherwise in the plans, poles shall be designed in accordance with the AASHTO *Standard Specifications for Structural Supports for Highway Signs, Luminaries and Traffic Signals*, as specified in the plans, including all interims and updates. Design life shall be 50 years for all poles. The design wind speed for all parts of the structure shall meet the wind requirements set forth in the latest edition of the AASHTO Wind Map, as stated in Subsection 722.02.3. The pole shall meet design wind loading with detector(s) installed.

907-634.02.1.5--Structure-Mounted ITS Equipment Poles. Delete the second paragraph of Subsection 634.02.1.5 on page 548, and substitute the following.

Unless specified otherwise in the plans, poles shall be designed in accordance with the AASHTO *Standard Specifications for Structural Supports for Highway Signs, Luminaries and Traffic Signals*, as specified in the plans, including all interims and updates. Design life shall be 50 years for all poles. The design wind speed for all parts of the structure shall meet the wind requirements set forth in the latest edition of the AASHTO Wind Map, as stated in Subsection 722.02.3. For projects that are in areas with higher wind standards, the higher standard is required. The pole shall meet design wind loading with all equipment installed.

In the fifth sentence of the fifth paragraph of Subsection 634.02.1.5 on page 548, change "butt welded" to butt-welded" and change "radio graphically" to radio-graphically."

Delete the second bullet in Subsection 634.02.1.5 on page 548, and substitute the following.

- Consideration shall be given for all possible loading combinations including ice and wind loads, as stated in Subsection 722.02.

In the first bullet in Subsection 634.02.1.5 at the top of page 549, change "cross sectional" to "cross-sectional."

After Subsection 634.02.1.8 on page 549, add the following.

907-634.02.1.9--ITS Extension Poles. ITS extension poles are used to provide ITS devices a mounting location with a vertical or horizontal clearance away from an existing pole or structure to which they are to be attached. As such, extension poles and the mounting and attachment hardware shall be of a material that will not cause galvanic corrosion with existing or proposed equipment. If possible, the extension poles shall be similar in color to the base pole or structure, unless otherwise directed. They shall meet the requirements of the base pole, the plans, and Subsection 722.02. Design considerations shall be given to the additional loading being subjected to the base pole or structure.

907-634.02.2--Camera Lowering Device. The lowering device system shall be designed to support, raise, and lower a standard CCTV camera, lens, housing, PTZ mechanism, cabling, connectors, and other supporting field components. The camera connector box shall be cast ZA-12 (12% Al and 88% Zn) and have a minimum weight that ensures stability of the camera during raising and lowering operation. The camera connector box shall have fully gasketed doors to prevent water intrusion. The bottom of the camera connector box shall be equipped with a condensation/moisture exit system. The camera connector block shall be molded in thermoset, weather-resistant, synthetic rubber designed to handle harsh environments.

Electrical contacts must also be designed to handle harsh environments. There shall be a locking mechanism between the fixed and movable components. For the movable components, a latching mechanism shall be provided to hold the device in place (when latched all weight shall be removed

from the lowering cable) and to raise or lower the assembly using the lowering tool and lowering cable. The suspension contact unit housing shall be weatherproof with a gasket to isolate the interior from dust and moisture.

All pulleys shall have sealed, self-lubricated bearings, oil tight bronze bearings, or sintered bronze bushings. The lowering cable shall be a minimum 1/8-inch diameter stainless steel aircraft cable. Internal wireways shall prevent the stainless steel lifting cable from contacting power or video cabling. The only cable permitted to move is the lifting cable, all other cables must remain stable and secure during lowering and raising operations.

The lowering tool shall consist of a lightweight metal frame and winch assembly, a quick release cable connector, an adjustable safety clutch, and a variable speed industrial duty electric drill motor. This tool shall be able to access the lifting cable through a pole hand hole, shall support itself and the load during lowering, and shall provide a means to prevent freewheeling when loaded. This tool shall have a reduction gear to reduce the manual effort required during lifting operations. In addition, this tool shall be provided with an adapter for operating the lowering device with a portable drill using a clutch mechanism. The portable lowering tool shall be included as part of the installed system. The lowering device shall include customized adapter brackets to install cylindrical type PTZ CCTV cameras that have a mounting base below the camera assembly and is require to be installed in an upright position.

907-634.03--Construction Requirements.

907-634.03.1--Foundations. Delete the last sentence of the fourth paragraph of Subsection 632.03.1 on page 550, and substitute the following.

Where foundations are constructed in areas where the pavement edge elevation and shoulder edge elevation differ more than twelve (12) inches, taller foundations may be used but must be approved by the Engineer.

After Subsection 634.03.3 on page 552, add the following.

907-634.03.4--Submittals. The submittal requirements defined in the Notice to Bidders entitled "ITS General Requirements", along with the requirements in this specification, shall be met for all ITS components. All costs associated with submittals shall be included in the overall contract price; no separate payment will be made for any documenting and submitting.

907-634.03.5--Quality Assurance. The quality assurance requirements defined in the Notice to Bidders entitled "ITS General Requirements" shall be met for all ITS components. All costs associated with the quality assurance requirements shall be included in the overall contract price.

907-634.04--Method of Measurement. After the last sentence of the fourth paragraph of Subsection 634.04 on page 552, add the following.

Field conditions may require taller foundations than specified in the plans. In which case, the addition concrete will be paid for at the contract bid price per cubic yard for pole foundations.

After the sixth paragraph of Subsection 634.04 on page 553, add the following.

ITS extension poles of the type specified will be measured as a unit quantity per each.

Delete the last paragraph in Subsection 634.04 on page 553 and substitute the following.

Wooden poles will be measured as a unit quantity per each.

Camera lowering device will be measured as a unit quantity per each.

907-634.05--Basis of Payment. Delete the fourth paragraph of Subsection 634.05 on page 553, and substitute the following.

Camera pole with foundation and detector pole with foundation, measured as prescribed above, will be paid for at the contract unit price per each, which price shall be full compensation for furnishing all materials, all documentation and submittals, for excavating, backfilling, replacing sod, and for all constructing, placing, curing, erecting, installing, connecting and testing; for foundations, poles, pole bases, conduit inside foundation as indicated on the plans, connections to support structures, caps, covers, ground wire, ground rods, hardware and for all equipment, tools, labor and incidentals necessary to complete the work and quality assurance, including remote and local control of the camera site complete in place and ready for use.

Camera lowering device and camera lowering tool, as described above, shall be paid for at the contract unit price per each. This price shall be full compensation for all materials, design, installation, equipment, tools, labor and incidentals associated with providing and installing the camera lowering device and the camera lowering tool.

Delete the sixth paragraph of Subsection 634.05 on page 553, and substitute the following.

Structure-mounted equipment pole, measured as prescribed above, will be paid for at the contract unit price per each, which price shall be full compensation for furnishing all materials, all documentation and submittals, for all constructing, placing, erecting, installing, connecting and testing, for poles, conduit between structure attachment location as indicated in the plans; wiring between pole-mounted devices and field cabinet; all structure-mounting hardware indicated in the plans, caps, covers, ground wire, ground rods, hardware and for all equipment, tools, labor and incidentals necessary to complete the work and quality assurance, including remote and local control of the camera site complete in place and ready for use.

ITS extension poles, measured as prescribed above, will be paid for at the contract unit price per each, which price shall be full compensation for furnishing all materials, all documentation and submittals, for installing the extension pole, mounting attachments as necessary, adjusting the pole to meet specific project needs, and for all equipment, tools, labor, and incidentals necessary to complete the work and quality assurance.

After the last paragraph of Subsection 634.05 on page 554, add the following.

Sizing poles and their appurtenances to field conditions is the Contractor's responsibility. No separate payment will be made for designing to meet project specifications and field conditions.

Delete the pay items listed on page 554, and substitute the following.

907-634-A:	Traffic Signal Equipment Pole, Type __, __' Shaft, __' Arm *	- per each
907-634-B:	Traffic Signal Equipment Pole Shaft Extension, ___' **	- per each
907-634-C:	Pole Foundations, Class ___ Concrete	- per cubic yard
907-634-D:	Slip Casing, ___" Diameter	- per linear foot
907-634-E:	Camera Pole with Foundation, ___' Pole	- per each
907-634-F:	Detector Pole with Foundation, ___' Pole	- per each
907-634-G:	Traffic Signal Equipment Pole Mast Arm Extension, ___' **	- per each
907-634-H:	ITS Equipment Pole, Structure Mounted, ___' Pole	- per each
907-634-I:	Wood Pole, Class ___ Height ____'	- per each
907-634-J	ITS Extension Pole, _____' **	- per each
907-634-K:	Camera Lowering Device	- per each

* Multiple Arms may be indicated
** Additional information may be indicated

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-636-3 **CODE: (IS)**

DATE: **05/25/2021**

SUBJECT: **Electrical Cable**

Section 636, Electrical Cable, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

907-636.01--Description. Delete the last sentence of the last paragraph in Subsection 636.01 on page 555 and substitute the following.

It shall include excavating, laying, placing tracer cable or tape, backfilling, replacing sod, aerial supports and/or pull-through conduits, as applicable; and transformer enclosures and/or terminal boxes when not placed under other items of the contract.

907-636.02--Materials. After the paragraph of Subsection 636.02 on page 555, add the following.

907-636.02.1--ITS Ground Mounted Meter Enclosure.

907-636.02.1.1--Meter Base. Meter bases shall be NEMA Type 3R with a minimum rating of 100 amps and shall meet the requirements of the local utility. The meter base shall be provided with ampere rating of meter sockets based on sockets being wired with insulated wire rated at least 167°F. The meter base shall be designed for underground service.

Meter bases shall be 4-terminal, 600 volt, single phase, 3-wire furnished with the following:

(a) Line, load and neutral terminals accepting #8 to 2/0 AWG copper/aluminum wire,
(b) Ringed or ringless type, with or without bypass,
(c) Made of galvanized steel,
(d) Listed as meeting UL Standard UL-414, and
(e) Underground service entrance as specified.

The meter bases shall have electrostatically applied dry powder paint finish, light gray in color, with a minimum thickness of 2.4 mils.

A 1-inch watertight hub for threaded rigid conduit shall be furnished with meter base.

907-636.02.1.2--Disconnect. External electrical service disconnects shall be furnished with a single pole 50-amp inverse time circuit breaker with at least 10,000 RMS symmetrical amperes short circuit current rating in a lockable in open or closed position in accordance with National Electric Code (NEC) and be a NEMA 3R Type enclosure. The disconnect shall be listed as meeting UL Standard UL-489 and marked as being suitable for use as service equipment.

The disconnect enclosure shall be fabricated from galvanized steel and electrostatically apply dry powder paint finish, light gray in color, to yield a minimum thickness of 2.4 mils. Ground bus and neutral bus shall be provided with at least four terminals with minimum wire capacity range of number 14 through number 4.

For 480V service, a local utility approved, lockable, non-fused disconnect switch on the supply side of the meter base shall be furnished, installed, and labeled as "Utility Disconnect". A separate load side disconnect with overcurrent protection shall be provided within two feet (2') of the meter.

907-636.02.1.3--Ground Mounted – Pedestal – Service Panel. The pedestal shall be of NEMA Type 3R rainproof construction and shall be UL Listed as "Enclosed Industrial Control Equipment" (UL 508A). External construction shall comply with UL50 requirements and shall be of G90 galvanized steel with light green #14672 Federal Specification 595 polyurethane industrial grade powder paint.

Hinges shall be stainless steel and of the continuous piano hinge type.

The pedestal mounting bolts shall not be externally accessible. The pedestal shall be able to be embedded in concrete or use anchor bolts for mounting on concrete base. Either pedestal mounting base or anchor bolt kit shall be used for installation.

The service pedestal should have three separate isolated sections for metering equipment, utility termination and customer equipment.

The metering section shall be pad-lockable and sealable and have a hinged swing hood with an integral hinged polycarbonate sealable window for access to demand meters. Meter socket type shall meet the requirements of the serving utility.

The utility termination section shall be pad-lockable and sealable and shall have a stainless steel handle provided on a lift-off cover. Sufficient clearance shall be provided for a 4-inch diameter conduit for utility cables entrance. Utility landing lugs shall be UL listed and shall accommodate conductor sizes between AWG #6 – 350 kcmil.

The customer compartment door shall be hinged on the left hand side. A stainless pad-lockable hasp shall be provided to secure customer compartment. A door keeper shall be provided to keep the door in an open position. A print pocket shall be provided on the inside of the door in a weatherproof sleeve. Required UL labeling shall be located on the inside of the customer door. Distribution and control equipment shall be behind an internal dead-front door with a quarter-turn securing latch and be hinged to open more than 90 degrees. The dead-front door shall be hinged on the same side as the customer section door. All distribution and control equipment shall be factory wired using 600-volt wire sized to NEC and UL requirements.

The service pedestal shall be rated for operation at 10K minimum amps interrupting capacity (AIC). The provided documentation shall list circuit breaker combinations and those to be used for de-rated operation for series ratings. Circuit breakers shall be permanently labeled with engraved name plates.

The serving utility shall be contacted for necessary requirements before ordering or installing equipment.

907-636.02.2--ITS Ground Mounted Transformer Enclosure.

907-636.02.2.1--Disconnect. The disconnect shall meet the requirements of Subsection 907-636.02.1.2.

907-636.02.2.2--Ground Mounted - Pedestal – Service Panel. The ground mounted - pedestal – service panel shall meet the requirements of Subsection 907-636.02.1.3. In addition, the transformer shall be rated to match the requirement of the primary service and the types of load served as specified in the plans. The transformer unit shall be installed inside the enclosure and meet all applicable codes. Each transformer shall be furnished as one complete unit and wiring of multiple transformers to meet the required ratings at each enclosure location is not allowed. Step-up and Step-down transformers shall be designed specifically for each application. Reverse feeding of step-up and step-down transformers is not allowed. All transformers shall be designed for outdoor installation and rated 600 VAC and below.

907-636.03--Construction Requirements.

907-636.03.1--Direct Buried Cable. After the fourth sentence of Subsection 636.03.1 on page 555, add the following.

Direct buried electric cable shall not be placed in the same trench as fiber optic cables.

907-636.04--Method of Measurement. Delete the first paragraph of Subsection 636.04 on page 557, and substitute the following.

Electric cable of the type specified, constructed as specified on the plans, will be measured by the linear foot. Measurement will be computed horizontally along the conduit, messenger cable or mast arm and vertically along the pole. Measurement in underground conduit is only in the horizontal plane and no additional quantity shall be added for conduit depth or change in elevation of the conduit. No extra length will be allowed for cable inside signal heads, drip loops, or sag in aerial supported cable. Tracer tape, when required in the plans, used with tracer cable will not be measured for separate payment but shall be included in the contract price for Tracer Cable. The terminals for the measurements of lengths will be considered specifically as the center of the pull boxes, poles, signal heads or controller cabinets.

After the first paragraph of Subsection 636.04 on page 557, add the following.

ITS Ground Mounted Enclosures, complete in place and accepted, will be measured as a unit quantity per each for a complete and operable unit in accordance with the contract provisions.

907-636.05--Basis of Payment. After the first paragraph of Subsection 636.05 on page 557, add the following.

ITS Ground mounted enclosures, measured as prescribed above, will be required wherever ground mounted meter enclosures or step-up or step-down transformers are noted as required in the plans. The enclosures shall be paid for at the contract unit price bid per each; which price shall be full compensation for any transformers (as described in the plans), foundation construction, cabinets, pedestals, meter bases, disconnects, relays, terminals, circuit breakers, sockets, hubs, buses, connectors, mounting material, all other materials for constructing, installing, connecting, testing and final cleanup; and for all equipment, labor, tools and incidentals necessary to complete the work in accordance with the contract documents.

In the first sentence of the second paragraph of Subsection 636.05 on page 557, change "relaid" to "re-laid".

Delete the list of pay items on pages 557 and 558, and substitute the following.

907-636-A:	Electric Cable, Direct Burial, Type, AWG ___, ___ Conductor	- per linear foot
907-636-B:	Electric Cable, Underground in Conduit, Type, AWG ___, ___ Conductor	- per linear foot
907-636-C:	Electric Cable, Aerial Supported, Type, AWG ___, ___ Conductor	- per linear foot
907-636-D:	Electric Cable, Aerial Supported in Conduit, Type, AWG ___, ___ Conductor	- per linear foot
907-636-E:	Electric Cable, Underground in Conduit, Tracer Cable	- per linear foot
907-636-F:	Electric Cable, Repair	- per linear foot
907-636-G:	Underground Cable and Conduit, Removed	- per linear foot
907-636-H:	Underground Cable and Conduit, Removed and Re-laid	- per linear foot
907-636-I:	ITS Ground Mounted _*_ Enclosure	- per each

* Indicate Meter or Transformer

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-637-3 **CODE: (IS)**

DATE: **05/25/2021**

SUBJECT: Traffic Signal Conduit and Pull Boxes

Section 637, Traffic Signal Conduit and Pull Boxes, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

907-637.02--Materials.

907-637.02.1--Pull Box / Enclosures. Delete the first sentence of the second paragraph of Subsection 637.02.1 on page 558, and substitute the following.

For grade level pull boxes and enclosures only, Tier 22 (22,500-pound design load, 33,750-pound test load) enclosures with minimum size dimensions as shown in the detail drawings on the plans shall be installed for use in traffic signal construction. Enclosure boxes shall be open bottom.

Delete the fourth sentence of the second paragraph of Subsection 637.02.1 on page 558.

907-637.03--Construction Requirements.

907-637.03.1--Pull box/Enclosures. Delete the sixth sentence of the first paragraph of Subsection 637.03.1 on page 559, and substitute the following.

Enclosures located in soil or sodded areas shall be installed with a supporting poured concrete collar or approved composite collar assembly, as shown by details on the plans.

907-637.03.2.1--Conduit Duct Bank. Delete the first sentence of subparagraph a) under Bored or drilled conduit in Subsection 637.03.2.1 on page 560, and substitute the following.

All conduits under railroad tracks shall be horizontal directional bored or drilled at a minimum of ten (10) feet below the railroad bed, or as required by the Railroad Company.

Delete Subsections 637.03.2.4 and 637.03.2.5 on pages 561 & 562, and substitute the following.

907-637.03.2.4--Blank.

907-637.03.2.5--Blank.

After Subsection 637.03.2.7 on page 563, add the following.

907-637.03.3--Submittals. The submittal requirements defined in the Notice to Bidders entitled "ITS General Requirements" shall be met if the NTB is included as part of the Project Proposal

and Contract Documents. In all cases, submittals shall be thorough and timely. All costs associated with submittals shall be included in the overall contract price; no separate payment will be made for any documenting and submitting.

907-637.03.4--Quality Assurance. The quality assurance requirements defined in the Notice to Bidders entitled "ITS General Requirements" shall be met if the NTB is included as part of the Project Proposal and Contract Documents. In all cases, the Contractor shall conduct, maintain, and leave the worksite in a professional and organized manner. All costs associated with the quality assurance requirements shall be included in the overall contract price.

907-637.04--Method of Measurement. Delete subparagraphs a) and b) in Subsection 637.04 on page 563, and substitute the following.

a) From center to center of pull box and/or foundation.
b) Any above ground vertical conduit runs, as indicated in the plans. Measurement in underground conduit is only in the horizontal plane and no additional quantity shall be added for conduit depth or change in elevation of the conduit.

907-637.05--Basis of Payment. Delete the first, second, third, fourth and fifth paragraphs of Subsection 637.05 on page 564, and substitute the following.

Pull Box Enclosures, measured as prescribed above, will be paid for at the contract unit price per each, which price shall be full compensation for furnishing all materials including the cover, installing, crushed gravel underlayment, poured concrete collars, replacement of sod or existing grassing, final clean-up and for all equipment, all documentation and submittals, tools, labor and incidentals necessary to complete the work and quality assurance.

Conduit / Duct Bank, measured as prescribed above, will be paid for per linear feet, which price shall be full compensation for all materials, equipment, labor, trenching, installing, backfilling trench, plowing, directional boring, restoration, marking tape, pull tape, duct plugs, fittings, testing, bore logs, all documentation and submittals, and all other incidentals necessary for the installation and quality assurance of the conduit system.

Rigid Galvanized Steel, measured as prescribed above, will be paid for per linear feet, which price shall be full compensation for all materials, equipment, labor, all documentation and submittals, all related materials including but not limited to couplings, mounting straps, bonding to ground, etc., that is installed on sign structures, poles or between the pull boxes, and all other incidentals necessary for the installation and quality assurance of the conduit system.

Duct Plugs and Sealant will be included in the cost of the conduit and will not be measured separately.

Delete the pay items listed on page 564 and substitute the following.

907-637-A: Pull Box Enclosure, Type - per each

907-637-B:	Pull Box Enclosure, Structure Mounted, Type	- per each
907-637-C:	Traffic Signal Conduit, Underground, Type, Size	- per linear foot
907-637-D:	Traffic Signal Conduit, Underground Drilled or Jacked, Type, Size	- per linear foot
907-637-E:	Traffic Signal Conduit, Structural Conduit, Type, Size	- per linear foot
907-637-F:	Traffic Signal Conduit, Aerial Supported, Type, No, Size	- per linear foot
907-637-G:	Traffic Signal Conduit, Underground Encased in Concrete, Type, Size	- per linear foot
907-637-H:	Traffic Signal Conduit Bank, Underground, Type, No., Size	- per linear foot
907-637-I:	Traffic Signal Conduit Bank, Underground Drilled or Jacked, Type, No., Size	- per linear foot
907-637-J:	Traffic Signal Conduit Bank, Structural Conduit, Type, No., Size	- per linear foot
907-637-K:	Traffic Signal Conduit Bank, Aerial Supported, Type, Size and Number	- per linear foot

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-650-5 **CODE: (SP)**

DATE: **05/04/2023**

SUBJECT: **On-Street Video Equipment**

Section 907-650, On-Street Video Equipment, is hereby added to and made part of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction as follows.

SECTION 907-650 - ON-STREET VIDEO EQUIPMENT

907-650.01--Description. This work shall consist of providing all labor, materials, equipment, and incidentals necessary to furnish, install, test, train, and operate CCTV Camera Systems. CCTV Camera System shall provide TMC personnel with live streaming video of the roadway network via CCTV Camera Systems including both fixed and PTZ cameras. PTZ Signal Monitoring Camera shall provide Traffic Engineering personnel with live streaming video of the roadway network via CCTV Camera Systems utilizing a PTZcamera.

907-650.02--Materials. All materials furnished, assembled, fabricated or installed shall be new, corrosion resistant.

Support equipment for the CCTV Camera Systems shall be provided in a Type B ITS Equipment Cabinet as described in Section 660. For PTZ Signal Monitoring Camera, support equipment shall be house in existing or new Traffic Signal Cabinet.

The CCTV Camera System shall comply with the following minimum materials specifications:

907-650.02.1--General Capabilities and Performance Requirements. Overall CCTV Camera System capabilities and performance requirements include the following:

1) CCTV PTZ Cameras shall be placed and installed at fixed locations to provide full coverage of the mainline travel lanes and shoulders.
2) CCTV Fixed Cameras shall be placed and installed at fixed locations to provide coverage of the mainline travel lanes. The cameras shall be provided with a varifocal lens which shall be adjusted by the Contractor for the desired view of the mainline. At major intersections fixed cameras shall also be adjusted to the desired view of the surface streets.
3) The CCTV Camera System components shall be compatible with each other and be of rugged design and suitable for reliable operation when mounted in their fixed locations.
4) All new PTZ and the Fixed cameras shall be provided as Ethernet IP-based or as indicated in project plan sheets or Notice to Bidders. If analog cameras are required, they shall conform to requirements detailed in Subsection 650.02.2, Analog Camera Unit.
5) The CCTV Camera System shall be capable of attended and unattended, continuous 24 hours per day operation at fixed sites.

6) The Contractor shall ensure that the installed equipment provides unobstructed video of the roadway, traffic, and other current conditions around a roadside CCTV field site; that it responds to camera control signals from an operator of the system; and that the video images can be transmitted to remote locations interfaced to the system for observation.
7) PTZ and IP based cameras shall be capable of being remotely controlled and programmed.
8) All PTZ enclosures shall be provided with the ability to be pressurized for environmental protection.
9) PTZ Dome type cameras shall be mounted together with the zoom lens and integrated into the pan and tilt device within the dome enclosure forming a totally integrated, easily removable assembly.
10) All cameras shall include a high quality integrated camera/lens combination.
11) The camera shall also be equipped with an auto-iris lens capability compatible with the zoom lens supplied.
12) Iris capability shall include a provision for manual override via software.
13) The PTZ camera shall be capable of auto-focus during zoom-in or zoom-out, with provisions for override via software.
14) Overexposure protection shall be provided - the camera shall not be degraded or damaged under normal reasonable operating conditions.
15) The capability for local control of pan, tilt and zoom functions shall be provided at the roadside cabinet using vendor-supplied software installed on a laptop computer.
16) All IP Based CCTV cameras shall support the NTCIP 1205 v1.08 or later version if backward compatible communication protocol.

907-650.02.2--Analog Camera Unit. The minimum Camera Unit requirements include:

1) The camera unit shall incorporate solid-state design and provide digital signal processing (DSP) capable of providing clear and low-bloom color video pictures during daylight hours and monochrome video at night when the roadway is illuminated with minimal roadway lighting.
2) The Analog Camera shall be fully compliant with all aspects of the National Television Standards Committee (NTSC) specification, and produce NTSC compatible video.
3) The Analog camera shall operate over wide dynamic light conditions ranging from low light/dusk to full sunlight having day (color)/night (monochrome) switchover and iris control, with user-selectable manual and automatic control capabilities.
4) The camera unit shall be equipped with a low light level sensor to automatically switch the camera to monochrome mode.
5) The camera unit shall be equipped with an override capability to allow the camera to be manually switched via software to turn off the automatic low light level sensor switch feature for Color or Monochrome operation.
6) Image sensor: 1/3 inch charge-coupled device (CCD) employing digital video signal processing (DSP) technology with a minimum Effective Picture Elements of 768 horizontal x 494 vertical pixels.
7) The camera unit shall include integrated image stabilization.
8) Sensitivity: The camera shall maintain usable video under both day and nighttime lighting conditions.
9) Video output synchronization shall be 2 to 1 interlace and will observe the NTSC (color) and EIA RS-170 (black and white) standards.

10) Resolution: 470 lines horizontal and 350 TV lines vertical, NTSC equivalent.
11) Signal-to-noise ratio: 48 dB, minimum with AGC off, un-weighted, and 4.5MHz filter.
12) Video Signal Format: National Television Standards Committee (NTSC) composite video output of 1 $Volt_{p-p}$ at 75 ohms, unbalanced.

907-650.02.3--Internet Protocol IP Camera Unit. IP cameras shall provide the same functionality as the analog camera units specified in subsection 907-650.02.2, in addition to the following minimum requirements:

1) Power over Ethernet or 24 VAC Power Input.
2) Open Architecture.
3) Shall utilize H.264 (Video Coding Experts Group (VCEG)/Moving Picture Experts Group)Video Compression Technology types as directed by the Intelligent Transportation Systems Program Manager
4) Standard Definition (SD) Units Shall be capable of 2 simultaneous H.264 video streams.
    a. The primary stream shall provide 480p at 30 fps and the ability to be reduced to D1 resolution at 30 fps.
    b. The secondary stream shall provide a minimum CIF resolution 30fps.
5) High Definition Units (HD) Shall be capable of 2 simultaneous H.264 video streams.
    a. The primary stream shall provide 720p at 30 fps at a minimum and the ability to be reduced to D1 resolution at 30 fps.
    b. The secondary stream shall provide a minimum CIF resolution 30fps.
6) Image sensor: 1/3 inch charge-coupled device (CCD)
7) Shall be capable to take video snapshots in JPEG format and transfer image via FTP.
8) IP encoded streams and Video Compression Technology shall be compatible with the existing video streaming servers and decoders for the www.mdottraffic.com WEB site or as approved by the Intelligent Transportation Systems Program Manager.
9) Internet Protocols: TCP, UDP (Unicast, Multicast IGMP V2), UPnP, DNS, DHCP, RTP, NTP
10) Support Real Time Streaming Protocol (RTSP)
11) Multilevel Password Protection.
12) EDR (Extended Dynamic Range).
13) C/CS Lens Mount.
14) Backlight Compensation.
15) Low Profile Top/Bottom Mount.
16) BNC Service Connector. Tap shall be installed inside cabinet.

907-650.02.4--PTZ Camera Lens. The minimum camera lens requirements include:

1) The camera lens shall have a minimum F-Stop of 1.4 to 1.6.
2) Optical and Digital Zoom:
    a. Shall provide an optical zoom of 35X for analog dome cameras.
    b. Shall provide a minimum optical zoom of 18X and a minimum digital zoom of 6X for IP PTZ cameras.
3) Zoom Control: The zoom magnification shall be fully controllable via the remote PTZ mechanism. The time to pass through the full range of movement of Iris, Zoom and Focus shall in no case exceed 10 seconds.

4) Iris and Focus: Support automatic iris and focus control with manual override capability. The iris shall be in a closed position when there is no power.
5) White or Color Balance: Support automatic or set to yield optical results under various outdoor lighting conditions.
6) Shutter Speed: Support automatic or set to yield optimal results under low lighting conditions without blooming or smearing, auto-iris on. Provide electronic shutter that is selectable in steps.
7) The lens shall be equipped for continuous remote control of zoom, focus and iris.
8) Mechanical or electrical means shall be provided to protect motors from overrunning in extreme positions.
9) The zoom lens shall be an integrated camera/lens combination.
10) Vibration or ambient temperature changes shall not affect the automatic iris function, focus mechanism and zoom mechanism.
11) The lens shall be optically clear, impact resistant and acrylic. The acrylic lens shall not yellow and shall not introduce appreciable light loss or geometric distortion over a 10-year service life when exposed to the environment.
12) The zoom mechanism shall be designed for maintenance-free operations. All gearing and bearings shall be self-lubricating with lubrication and gearing tolerances compatible with the environmental specifications contained herein.

907-650.02.5--Character Generator. The minimum character generator requirements include:

1) The capability of generating and superimposing lines of English language text on the video image/stream shall be provided.
2) A minimum of 20 characters per line that are between 10 and 30 horizontal TV lines in height shall be provided.
3) Control (enable, disable and edit) of this feature shall be available remotely and at the field site using a laptop computer.
4) The text messages shall be stored in non-volatile memory.
5) Characters shall be white with a black border to ensure legibility in varied scenes.
6) The following minimum text insertion requirements shall be provided with the ability to individually turn each one on or off:
   a. Camera ID
   b. Sector Message
   c. Alarm Messages
   d. Pan/Tilt Azimuth/Elevation
   e. Compass Direction in 8 discreet zones

907-650.02.6--PTZ Enclosure. The minimum PTZ enclosure requirements include:

1) Sealed, pressurized dome enclosure that provides complete protection for the camera and lens assembly from moisture and airborne contaminants.
2) Environmental resistant and tamper proof meeting NEMA 4X or IP-67 rating requirements.
3) The dome enclosure shall be constructed in such a way that unrestricted camera views can be obtained at all camera and lens positions.
4) Dome environmental control shall be provided by nitrogen pressurization with a Schrader Valve for pressurization and purging. The enclosure shall be designed to be pressurized to

the manufactures recommended level with dry nitrogen. The notation "CAUTION – PRESSURIZED" shall be printed on the rear plate of the enclosure and shall be clearly visible and readable.

5) An alarm shall be displayed under low-pressure conditions and displayed on the camera video. The low-pressure alarm shall be on/off selectable by the operator at the TMC.
6) The PTZ dome enclosure shall consist of a two-piece (upper and lower half) dome.
7) A harness and cables shall be provided with each enclosure to extend the video, power and data from the CCTV Camera System to the field cabinet. No harness shall be exposed. All entry points shall have gaskets to prevent moisture entry. A sealed connector shall be at the top of the dome.
8) The dome enclosure shall assist in preventing lens fogging and effectively reduce internal temperatures.
9) The enclosure shall minimize glare and provide overexposure protection for the camera when pointed directly at the sun.
10) The enclosure shall be equipped with a heater, a defroster and a thermostat.
11) The camera equipment inside the dome enclosure shall meet all its specified requirements when operating under the following conditions:
    a. Ambient Temperatures: From -40ºC to +65ºC (-40ºF to +149ºF). A heater/blower shall be used to maintain internal dome temperatures within the manufacturer required operating temperatures for their equipment.
    b. Relative Humidity: 5% and 95%, non-condensing.
12) Total weight of CCTV cameras (including the housing, sunshield, and all internal components shall be less than 18 pounds.
13) At a minimum, dome enclosures shall be secured with a mounting plate/attachment designed to withstand a 90mph sustained wind speed with a 30% gust factor. For projects that are in areas with higher wind standards, the higher standard is required.

907-650.02.7--Pan and Tilt Unit (PTU). The minimum pan and tilt unit requirements include:

1) The motorized, remotely controlled Pan/Tilt unit shall be mounted within the dome enclosure. The unit shall be integrated with the CCTV control system.
2) For dome enclosed units, the unit shall provide a minimum continuous tilt (vertical) movement of 90 degrees from horizontal and continuous pan (horizontal) movement of 360 degrees.Tilt speed shall be variable from zero up to 40 degrees per second, minimum, and the pan speed shall be variable from zero up to 80 degrees per second, minimum.
3) For separately housed tilt motor units (non-Dome Cameras), the unit shall provide a minimum continuous tilt (vertical) movement of +90° to -90° from horizontal and continuous pan (horizontal) movement of 360 degrees.Tilt speed shall be variable from zero up to 34 degrees per second, minimum, and the pan speed shall be variable from zero up to 80 degrees per second, minimum.
4) The unit shall be capable of simultaneous pan, tilt movements and zoom on one camera
5) Drive motors shall be capable of instantaneous reversing, be corrosion resistant, not require lubrication, and have overload protection.
6) Braking shall be provided in both pan and tilt movements to enable fast stop and reversal and to prevent drifting.
7) The viewing limits shall be set by a minimum of eight (8) discreet privacy zones that are software selectable.

907-650.02.8--Camera Control Receiver – Driver. The minimum camera control receiver-driver requirements include:

1) The camera control receiver shall provide a single point interface for control, power and video communications.
2) The camera control receiver-driver shall be included within the dome enclosure and control the camera, pan/tilt and lens functions at each CCTV site.
3) The unit shall provide alphanumeric generation for on-screen titles.
4) The unit shall provide the ability to display diagnostic information on the screen in response to user commands.
5) The diagnostic information shall include current pan, tilt, zoom and focus positions, and error codes for power, communication, position and memory problems.
6) The capability for programmed tours shall be provided.
7) The camera control receiver shall use non-volatile memory to store the required information for presets, camera ID and sector text.
8) Presets shall meet the following requirements:
   a. A minimum of 64 presets shall be supported. Each preset shall consist of pan, tilt, zoom and focus positions.
   b. The Contractor shall develop and install ten (10) presets for each camera. The Contractor shall submit the preset locations to the MDOT ITS Engineer for review and approval.
9) Protocols: CCTV cameras shall support at a minimum the Pelco D and the NTCIP 1205 v1.08 communication protocol. No camera control receiver-driver shall use non-published protocols. The Contractor shall provide protocol documentation.
10) Communications Interface: The communications interface shall support communications compliant with RS- 232,and/or 485 (user selectable), or shall provide a network interface port.
11) Serial communications interface shall be compatible with the Video Encoder serial port as defined in Section 907-665 .
12) Standard interface connectors shall be provided.
13) The local video input and output connections shall be the BNC type for analog cameras. IP Based Cameras should stream video over the Ethernet connection but include a BNC type connection for local testing, configuration, and calibration.
14) Connector(s) shall also be used for connecting the control outputs from the control receiver-driver unit to the camera, lens and pan/tilt mechanisms.

907-650.02.9--Fixed Camera Lens. The fixed camera lens shall meet the following minimum requirements.

1) Type ..... Varifocal
2) Format Size ..... 1/3 Inch
3) Mount Type ..... CS
4) Focal Length 5-50
5) Zoom Ratio ..... 1.4 -360
6) Relative Aperture (F) 1.6-360
7) Iris ..... Auto (Direct Drive)
8) Focus ..... Manual

9) Zoom ..... Manual
10) Minimum Object Distance ..... 0.5 m
11) Back Focal Length ..... 10.05 mm
12) The camera lens shall have a minimum F-Stop of 1.4 to 1.6.
13) Shall provide a varifocal zoom of 5-50 mm.
14) Iris: Support automatic iris control with manual override capability. The iris shall be in a closed position when there is no power.
15) White or Color Balance: Support automatic or set to yield optical results under various outdoor lighting conditions.
16) Shutter Speed: Support automatic or set to yield optimal results under low lighting conditions without blooming or smearing, auto-iris on. Provide electronic shutter that is selectable in steps.
17) Vibration or ambient temperature change shall not affect the automatic iris function, focus mechanism or zoom mechanism.
18) The lens shall be optically clear, impact resistant and acrylic. The acrylic lens shall not yellow and shall not introduce appreciable light loss or geometric distortion over a 10-year service life when exposed to the environment.

907-650.02.10--Fixed Camera Enclosure. The fixed camera lens shall meet the following minimum requirements.

1) Designed for Outdoor Applications
2) Maintenance access for servicing
3) Environmental resistant and tamper proof meeting NEMA 4X or IP-66 rating requirements.
4) A harness and cables shall be provided with each enclosure to extend the video, power and data from the CCTV Camera System to the field cabinet. No harness shall be exposed. All entry points shall have gaskets to prevent moisture
5) The enclosure shall minimize glare and provide overexposure protection for the camera when pointed directly at the sun.
6) The enclosure shall be equipped with a heater, a defroster and a thermostat.
7) The camera equipment inside the enclosure shall meet all its specified requirements when operating under the following conditions:
   a. Ambient Temperatures: -10ºC to +50ºC (14ºF to +122ºF). A heater/blower shall be used to maintain internal temperatures within the manufacturer required operating temperatures for their equipment.
   b. Relative Humidity: 5% and 95%, non-condensing.
8) Total weight of CCTV cameras (including the housing, sunshield, and all internal components shall be less than 18 pounds.
9) The enclosure shall be secured with a mounting plate/attachment designed to withstand a 90mph sustained wind speed with a 30% gust factor. For projects that are in areas with higher wind standards, the higher standard is required.

907-650.02.11--Electrical. The minimum electrical requirements include:

1) The CCTV Camera System shall be furnished with any and all equipment required for a fully functional system, including all appropriate power and communications cables as defined by the manufacturer.

2) The power cables shall be sized to meet the applicable National Electrical Code (NEC) requirements.
3) Total power consumption shall not exceed 125 watts.
4) All devices supplied as system components shall accept, as a primary power source, 120 volts of alternating current (VAC) at an input of 60 hertz. Any device that requires source input other than 120 VAC at 60 hertz, such as cameras, PTUs, receiver/drives and dome heaters/blowers that operate at 24 volts or other, shall be furnished with the appropriate means of conversion.
5) IP fixed cameras shall receive Power over Ethernet (POE) with appropriate cabling.

907-650.02.12--Coaxial Cabling. The minimum coaxial interconnect cable requirements include:

1) The coaxial cable from the CCTV Camera System to the equipment cabinet shall be double braided (95% coverage) coaxial cable.
2) RG 59/U, 20AWG, bare copper conductor, polyethylene insulation.
3) 98% tinned copper, double braid shield, black polyethylene jacket.
4) Characteristic Impedance: 75 ohms, nominal.
5) Capacitance (conductor to shield): 21pF/ft; Inductance: 0.131uH/ft, nominal.

907-650.02.13--Surge Protection. All CCTV Camera System electrical interconnects shall be protected from voltage surges caused by lightning and external electromagnetic fields. Surge protection devices shall meet the requirements of the Notice to Bidders entitled "ITS General Requirements" as well as the requirements stated below.

1) Surge protectors shall be furnished for all non-dielectric cable and conductors (video, data/signal and device/assembly power) between the CCTV Camera System and the equipment cabinet.
2) The surge protectors shall have leads that are kept to a minimum length as recommended by the surge device manufacturer.
3) All surge protection devices shall be designed to meet the temperature and humidity requirements expected in this type of outdoor application.
4) All Surge protectors shall be U.L. listed (UL 1449, UL 497, 497A, 497B, etc., as appropriate) and bonded to the same single-point ground point.
5) Coaxial Cable. Surge protectors for coaxial cable shall meet/provide the following functionality:
   a. Attenuation: 0.1dB @10 MHz, typical
   b. Input/Output Impedance: 75 ohms nominal
   c. Operating Voltage of the surge protector shall match characteristics of the ITS device/assembly
   d. Peak Surge Current: 5,000-amperes for an 8x20 microsecond waveform
   e. Response Time: 1 nanosecond or less
6) Low Voltage/Signal Cable. Surge protectors for data/signal/control cable shall meet/provide the following functionality:
   a. Peak Surge Current: 10,000-amperes for an 8x20 microsecond waveform
   b. Response Time: 1 nanosecond or less
   c. Life Expectancy: Capable of surviving at a minimum of 25 occurrences at 2000-amperes

7) CCTV Power. Surge protectors for power from equipment cabinet power distribution to the CCTV Camera System shall meet/provide the following functionality:
   a. Frequency: DC to 10MHz
   b. Clamping Voltage: < 30VAC (rms) or 42VDC
   c. Insertion Loss: < 0.2dB
   d. Input/Output Impedance: 75 ohms, typical
   e. Peak Surge Current: 3000-amperes
   f. Response Time: 1 nanosecond or less
8) Surge protection for the IP Fixed cameras shall include provisioning for the Power over ETHERNET (POE) cabling and voltages.

907-650.02.14--PTZ Signal Monitoring Camera. The PTZ Signal Monitoring Camera shall meet the following minimum requirements.

1) Single housing with a Fixed Camera and PTZ Camera that allows for tandem viewing from both camera lens
2) Designed for outdoor locations
3) Environmental resistant and tamper proof meeting NEMA 4X or IP-66 rating requirements
4) Sealed, pressurized dome enclosure and fixed camera enclosure that provides complete protection for the camera and lens assembly from moisture and airborne contaminants
5) The dome enclosure shall be constructed in such a way that unrestricted camera views can be obtained at all camera and lens positions.
6) Total weight of CCTV cameras (including the housing, sunshield, and all internal components shall be less than 14 pounds
7) High Quality 4 MP Resolution Imaging or better
8) Shall provide Low-Light performance with expansive night view for up to 400 ft IR distance
9) Minimum of 32x Optical Zoom and 16x Digital Zoom
10) Minimum 1/1.8" progressive scan CMOS sensor
11) Shall provide semi-auto, manual and auto focus
12) Shall support 24 VAC and Hi-PoE
13) The enclosure shall be equipped with a heater, a defroster and a thermostat
14) The Fixed Camera Lens shall have a minimum 79° Horizontal FOV and 42° Vertical FOV with a focal length of f/1.0.
15) The PTZ Camera Lens shall have a minimum 60° to 2.3° (wide-tele) Horizontal FOV with a focal length of f/1.5
16) Smart Features shall include:
   a) Motion Detection
   b) Alarm inputs and outputs
   c) Region Entrance and Exit Detection
   d) Manual and Panorama Tracking
   e) Minimum of 32 Presets with Patrol and Pattern Scan
17) Up to 20 Simultaneous Live Views and 32 Users/Hosts
18) Shall support Internet Explorer, Chrome, Firefox and Safari Web Browsers
19) The camera equipment inside the enclosure shall meet all its specified requirements when operating under the following conditions:
   a) Ambient Temperatures: -30ºC to +65ºC (-22ºF to +149ºF).
   b) Relative Humidity: 5% and 95%, non-condensing.

c) Maximum 42 W Power Consumption including heater and IR light

907-650.03--Installation Requirements. All equipment shall be installed according to the manufacturer's recommendations, the Plans and as follows:

1) The Contractor shall provide the MDOT with a written inventory of items received and the condition in which they were received. Inventory shall be inclusive of make, model, and serial numbers, MAC address, and installation GPS coordinates. All equipment shall be installed according to the manufacturer's recommendations or as directed by the MDOT.
2) Materials and associated accessories/adapters shall not be applied contrary to the manufacturer's recommendations and standard practices.
3) Shall include all materials needed to permanently mount the CCTV camera to the support structure as indicated in the plans.
4) Furnish and install power, video, and data cables, and any and all ancillary equipment required to provide a complete and fully operational CCTV system site.
5) Verify all wiring meets NEC requirements where applicable.
6) All above requirements apply to both new CCTV sites as well as sites where an existing CCTV is being replaced.
7) Any new, additional or updated drivers required for the existing ATMS software to communicate and control new CCTV installed by the Contractor shall be the responsibility of the Contractor.

907-650.03.1--Testing. All equipment associated with the CCTV Camera Systems site shall undergo testing to verify conformance to requirements of the plans and these special provisions. The Contractor shall conduct a Project Testing Program as required in the Notice to Bidders entitled "ITS General Requirements." All costs associated with the Project Testing Program shall be included in the overall contract price; no separate payment will be made for any testing.

907-650.03.2--Submittals. The submittal requirements defined in the Notice to Bidders entitled "ITS General Requirements" shall be met. All costs associated with submittals shall be included in the overall contract price; no separate payment will be made for any documenting and submitting.

907-650.03.3--Quality Assurance. The quality assurance requirements defined in the Notice to Biddes entitled "ITS General Requirements" shall be met. All costs associated with the quality assurance requirements shall be included in the overall contract price.

907-650.03.4--Warranty. At a minimum, the warranty requirements defined in the Notice to Bidders entitled "ITS General Requirements" shall be met. All costs associated with the warranty requirements shall be included in the overall contract price.

907-650.03.5--Training. The minimum training requirements shall be as defined in the Notice to Bidders entitled "General ITS Requirements."

907-650.04--Method of Measurement. On-Street Video Equipment will be measured per each camera installation.

On-Street Video Equipment Training shall be measured as a lump sum which shall include all coordination, materials, labor, training location costs, and all incidentals required to complete the training as described in the Notice to Bidders entitled "ITS General Requirements."

907-650.05--Basis of Payment. On-Street Video Equipment, measured as prescribed above, will be paid for at the contract unit price bid per each, which price shall be full compensation for furnishing all materials inclusive of camera unit, housing, pan/tilt drive, receiver/driver, software driver, mounting hardware, any necessary enclosures, items necessary to mount the camera unit from a mast arm pole, steel strain pole, pole extension pipe, etc., for all installing, connecting, cutting, pulling and testing and for all equipment, tools, labor, all documentation and submittals, quality assurance, warranties, and incidentals necessary to complete the work and quality assurance.

Required cabinet facilities, including transformer and/or disconnects, will not be measured for separate payment.

Progress payments for the On-Street Video System will be paid as follows:

1) 50% of the contract unit price upon delivery of equipment and approval of any bench and/or pre-installation test results, as prescribed in Project Testing Program;

2) An additional 40% of the contract unit price upon approval of Stand Alone Acceptance Test results; and

3) Final 10% of the contract unit price upon Final Project Acceptance.

On-Street Video Equipment Training, measured as prescribed above, will be paid for at the contract unit lump sum price, which price shall be full compensation for all training costs including coordination, materials, labor, training location costs, and all incidentals required to complete the training as described in the Notice to Bidders entitled "ITS General Requirements."

Payment will be made under:

907-650-A: On-Street Video Equipment Type _*_ - per each

907-650-B: On-Street Video Equipment Training - lump sum

* PTZ, Fixed, Analog, IP Based, PTZ Signal Monitoring, etc.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-659-5 **CODE: (IS)**

DATE: 05/25/2021

SUBJECT: Traffic Management Center (TMC) Modifications

Section 907-659, Traffic Management Center (TMC) Modifications, is hereby added to and becomes part of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction as follows:

SECTION 907-659 -- TRAFFIC MANAGEMENT CENTER (TMC) MODIFICATIONS

907-659.01--Description. This work consists of modifying the MDOT Statewide Traffic Management Center (TMC) located in the Information Systems Division on the 2rd Floor, at 401 North West Street, Jackson, Mississippi, 39201. Regional and City Traffic Management Centers may be located statewide. The following is a list of existing/planned centers and their addresses:

Northwest Regional Combined TMC – 8791 Northwest Drive, Southaven, Mississippi (Police Department)
City of Ridgeland TOC – 100 West School Street , Ridgeland, Mississippi (City Hall)
Oxford Combined TMC – 715 Mollybarr Road, Oxford, Mississippi (Oxford Police Department)
Hattiesburg Regional TMC/EOC – 6356 Hwy 49N, Hattiesburg, Mississippi (MDOT District 6 Headquarters)
Batesville Regional TMC/EOC – 150 Hwy 51N, Batesville, Mississippi (MDOT District 2 Headquarters)
Natchez Combined TMC – 233 Devereaux Drive, Natchez, Mississippi (Police Department)
Gulf Regional TMC – 16499 Hwy 49, Saucier, Mississippi (MDOT Lyman Project Office)
Tupelo Regional TMC – 1909 N. Gloster Street, Tupelo, Mississippi (MDOT District 1 Headquarters)

Additional Traffic Management Centers may be added as needed.

907-659.02--Blank.

907-659.03--Construction and Operation Requirements.

907-659-03.1--TMC Modifications. The MDOT TMC modifications required to integrate and operate the traffic systems and devices shall be provided. These include, but are not limited to, expanding the central video management system, interconnecting the appropriate number of video interfaces to the TMC video management systems, expanding the MSTraffic backbone network through radio communications, wireless communications, T1 lines or fiber communications, expanding or configuring signals in the existing Central Traffic Signal software system, or upgrading existing signal systems, expanding the Automated Traffic Management System (ATMS), and integrating all the existing computing facilities. All TMC modifications must meet

U.S. Department of Transportation Intelligent Transportation System (ITS) Standards, Policies, and Architectures as well as MDOTs applicable Statewide or Regional Architecture.

907-659.03.1.1--TMC Modifications - Software. The Contractor shall initially use vendor supplied software to test all ITS systems installed, interfaced or configured on this project and demonstrate full compliance with the contract requirements. A minimum of two (2) licensed copies of each system of the vendor supplied software must be provided to MDOT upon completion of the testing for each component.

907-659.03.1.2--MDOT ATMS Software. The Contractor shall update the licenses and license keys for the existing MDOT ATMS software to include all ITS devices, existing and provided by the Contractor under this project, for which the existing ATMS has modules and device drivers. The Contractor is required to fully configure the existing ATMS software for operation, status monitoring, configuring, and control of the CCTV systems installed, interfaced or configured on this project. At a minimum, this shall include:

- Update and configure the existing map to show the locations of all ITS devices, existing and provided by the Contractor, for which the existing ATMS has modules and device drivers, including but not limited to CCTV systems, with dynamic icons.
- Install and configure all devices, existing and provided by the Contractor, for which the existing ATMS has modules and device drivers, including but not limited to CCTV systems, into the software's database.
- Configure the systems so the new devices shall send multiple bandwidth streams directly to the MDOT website and TMC video wall.

The Contractor is required to arrange for the ATMS vendor to be on-site to complete this configuration and provide the required testing to show that the software is fully functioning for each CCTV.

907-659.03.1.3--TMC Modifications - Video Systems. The Contractor shall provide, install, and integrate any needed video system equipment or video wall streaming servers for the existing video wall controller that shall be capable of displaying the video streams from the camera streams provided by the Contractor and displaying them as video windows on the existing video wall as controlled by the video wall controller through the ATMS software client or on the MDOT WEB page or VDMS system.

907-659.03.2--TMC Modifications - Monitor Systems. Roadway traffic monitor locations shall provide local control functions related to traffic slowdowns and other congestion monitors as defined by MDOT Traffic Engineering. Additionally, the traffic monitor systems shall provide on-line data for use by the existing MDOT ATMS for engineering, operations, planning, incident, and mdottraffic.com purposes. This data shall include, but is not limited to, per vehicle raw data which shall be transmitted to and stored and managed by the ATMS. The traffic monitor systems shall be capable of utilizing any combination of loop, microloop, radar, Bluetooth, DSRC, and/or video detection information. The system shall provide a consistent communication and management system regardless of detection methods used. All Traffic Monitoring Systems must meet U.S.

Department of Transportation Intelligent Transportation System (ITS) Standards, Policies, and Architectures as well as MDOT's applicable Statewide or Regional Architecture.

907-659.03.3--TMC Modifications – Installation Requirements. All equipment shall be installed according to the manufacturer's recommendations, the Plans and as follows:

1) Any new, additional or updated drivers required for the existing ATMS software to communicate and control new devices installed by Contractor shall be the responsibility of the Contractor.
2) Installation of all equipment and software shall be included. The Contractor must provide the MDOT ITS Manager with an Installation Schedule. The Installation Schedule must be approved by the State Traffic Engineer.
3) All equipment and software must be fully functional and pass a Final Inspection by the ITS Manager and Project Engineer before being accepted by MDOT.

907-659.03.4--Testing. All equipment and software associated with the TMC modifications shall undergo testing to verify conformance to requirements of the plans and these special provisions. The Contractor shall conduct a Project Testing Program as required in the Notice to Bidders entitled "ITS General Requirements." All costs associated with the Project Testing Program shall be included in the overall contract price; no separate payment will be made for any testing.

907-659.03.5--Submittals. The submittal requirements defined in the Notice to Bidders entitled "ITS General Requirements" shall be met. All costs associated with submittals shall be included in the overall contract price; no separate payment will be made for any documenting and submitting.

907-659.03.6--Quality Assurance. The quality assurance requirements defined in the Notice to Bidders entitled "ITS General Requirements" shall be met. All costs associated with the quality assurance requirements shall be included in the overall contract price.

907-659.03.7--Warranty. At a minimum, the warranty requirements defined in the Notice to Bidders entitled "ITS General Requirements" shall be met. All costs associated with the warranty requirements shall be included in the overall contract price.

907-659.03.8--Training. The minimum training requirements shall be as defined in the Notice to Bidders entitled "ITS General Requirements" and shall cover the system architecture, operations, and maintenance of the TMC systems.

907-659.04--Method of Measurement. Traffic Management Center Modifications, Traffic Management Center Modifications – Monitor Systems, and Traffic Management Center Modifications – Software Only, and Traffic Management Center Modifications – Training, complete in place, tested and accepted, will be measured on a lump sum basis.

907-659.05--Basis of Payment. Traffic Management Center Modifications, and Traffic Management Center Modifications – Monitor Systems, measured as prescribed above, will be paid for at the contract lump sum price, which price shall be full compensation for furnishing all

materials, all documentation and submittals, warranties, installing, connecting, cutting, pulling and testing, all equipment, tools, labor, quality assurance, and all incidentals necessary to complete the work.

Traffic Management Center Modifications – Software Only, measured as prescribed above, will be paid for at the contract lump sum price, which price shall be full compensation for incorporating or adjusting all ITS systems installed, interfaced or configured on this project into the existing ATMS system, for furnishing all materials, all documentation and submittals, testing, warranties, quality assurance, and all incidentals necessary to complete the work.

Traffic Management Center Modifications – Training, measured as prescribed above, will be paid for at the contract unit lump sum price, which price shall be full compensation for all training costs including coordination, materials, labor, training location costs, and all incidentals required to complete the training as described in the Notice to Bidders entitled "ITS General Requirements."

Payment will be made under:

907-659-A: Traffic Management Center Modifications	- lump sum
907-659-B: Traffic Management Center Modifications – Monitor Systems	- lump sum
907-659-C: Traffic Management Center Modifications – Training	- lump sum
907-659-D: Traffic Management Center Modifications – Software Only	- lump sum

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-660-1 **CODE: (IS)**

DATE: 05/25/2021

SUBJECT: ITS Equipment Cabinets

Section 660, ITS Equipment Cabinets, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

907-660.02--Materials.

907-660.02.2--Equipment and Materials. Delete the second paragraph of Subsection 660.02.2 on page 659, and substitute the following.

The cabinet enclosure shall be manufactured from 0.125-inch aluminum. The cabinet and integral materials shall be as recommended by the manufacturers for outside plant use and the intended application. This requirement shall include wiring and electrical materials and configurations (including connector pin-outs) that are wholly or partially related to the field device applications (CCTV, RDS, VDS, etc.).

907-660.02.4--Terminal Blocks and Component Terminals. Delete subparagraph 5) in Subsection 660.02.4 on page 659, and substitute the following.

5) Communications: orange

907-660.02.6--Labels.

907-660.02.6.1--Cabinet Labels. Delete the first paragraph of Subsection 660.02.6.1 on page 660, and substitute the following.

Labels shall be provided with agency name, project number, device name and ID labels on all cabinets.

Delete the fourth paragraph of Subsection 660.02.6.1 on page 660, and substitute the following.

The agency name labels shall be “MDOT ITS” in one continuous adhesive sheet.

The device ID labels shall include the device name as an acronym and a hyphen and shall be one continuous adhesive sheet. Device name acronyms are “CCTV-“, “RDS-“, “VDS-“or “DMS-“.

Delete the last paragraph of Subsection 660.02.6.1 on page 660, and substitute the following.

Labels shall be installed along the top of the cabinet with MDOT ITS label at the top and the device ID labels immediately underneath. Labels shall be visible from both directions of travel.

Additional labels may be required to meet visibility requirements. MDOT project number labels shall be installed on the inside of the cabinet door.

907-660.02.6.2--Voltage Labels. Delete the second paragraph of Subsection 660.02.6.2 on page 660, and substitute the following.

Labels shall be flat black lettering on a reflective yellow background. Lettering shall be a minimum of one inch (1") in height.

907-660.02.7--Type A Cabinet. Delete the third paragraph of Subsection 660.02.7 on page 660.

907-660.02.7.1--RDS Communication Wiring. Delete the first sentence of Subsection 660.02.7.1 on page 661, and substitute the following.

RDS communication wiring shall meet the following when using RS-485 communication cable:

In subparagraph 3) of Subsection 660.02.7.1 on page 661, change "RDS comm. Cables" to "RDS comm. cables."

907-660.02.8--Type B Cabinet. Delete the first paragraph of Subsection 660.02.8 on page 661.

All Type B cabinets, except those at solar power locations, shall be uniform in manufacture and assembly, capable of supporting the field equipment as shown on the plans. As a minimum, support is required for two (2) RDS units; one (1) network switch; two (2) radios/antennas; RDS comm. cable; and fiber drop panel terminations, regardless of the devices shown in the plans at a specific location.

907-660.02.8.2--Electrical Subsystems. Delete the second sentence of the first paragraph of Subsection 660.02.7.1 on page 662.

Delete subparagraph 7) of Subsection 660.02.7.2 on page 663, and substitute the following.

7) A singular electrical distribution bus bar for grounding and bonding conductors shall be located on the same rail but separate from the service entrance terminal block and connected to the entrance ground with a #6 AWG green insulated wire. The grounding bus bar shall have a minimum terminating capability of two (2) - #6 AWG conductors and ten (10) - #10 to #18 AWG conductors. Grounding requirements defined in the Notice to Bidders entitled "ITS General Requirements" shall be met unless otherwise specified in the plans. All cost associated with grounding shall be included in the overall contract price; no separate payment will be made for any grounding unless expressly noted in project documentation.

907-660.02.8.4--RDS Communications Subsystem. Delete the three paragraphs in Subsection 660.02.8.4 on pages 663 and 664, and substitute the following.

Where RDS are shown in the plans, DIN rail-mounted components shall have a nominal 24VDC output power supply, capable of user setting between 23 and 28VDC minimum, with minimum 1A output rating and minimum operating temperature range of -13°F to +158°F. Power supply

shall provide terminal facilities for a minimum of three sets of #14 AWG conductors (in the RDS comm cable). Maximum size of the power supply shall be 1 inch (W) x 7 inches (H) x 7 inches (D). The power supply shall be connected to the EQUIP POWER distribution block for 120VAC input.

If a terminal server is used, interconnection wiring shall be provided between the RDS communications subsystem and the terminal server.

Where an RS-485 communication cable is installed, a surge suppressor for the RS-485 data signal, wired between the terminal server and the RDS units shall be provided. The surge suppressor shall protect the 4-wire RS-485 data signal with hybrid multi-stage suppression components including gas tube and silicon avalanche diode. The surge suppressor shall have a response time no greater than 1 nanosecond. The surge suppressor shall provide terminal facilities for a minimum of four (4) 2-pair cables of #22 AWG conductors.

Delete Subsection 660.02.8.5 on page 664, and substitute the following.

907-660.02.8.5--Component Subsystem. The requirements listed for each component's subsystem shall be met by installing the required power, surge, etc. support equipment in the Type B Cabinet where that component is shown in the plans.

907-660.02.9--Type C Communication Hub Cabinet. Delete the fourth sentence of the second paragraph of Subsection 660.02.9 on page 664, and substitute the following.

The side panels shall be fabricated from 5052 sheet aluminum alloy with minimum dimensions of 50 inches (H) x 21 inches (W).

In the second sentence of the third paragraph of Subsection 660.02.9, change "grommetted" to "grommeted."

907-660.02.9.2--Electrical Systems. In subparagraph 9) of Subsection 660.02.9.2 on page 665, change "upper right side" to "upper, right-side."

907-660.02.9.3--Lighting Subsystem. In the second sentence of Subsection 660.02.9.3, change "cool white" to "cool-white."

907-660.03--Construction Requirements.

907-660.03.2--Type B and C. Delete the first paragraph of Subsection 660.03.2 on page 666, and substitute the following.

Equipment in the Type B and C cabinets shall be installed and configured in accordance with the requirements for that equipment, including RDS units, BDS units, VDS units, CCTV, network switches, radios/antennas, communication cables, and/or fiber distribution or drop panels.

Delete Subsection 660.03.3 on page 667, and substitute the following.

907-660.03.3--Cabinet Modifications. All cabinet modifications shall adhere to the requirements as listed in this specification and in the Notice to Bidders entitled "Cabinet Modifications."

907-660.03.4--Testing. All equipment associated with the ITS equipment cabinet shall undergo testing to verify conformance to requirements of the plans and special provisions. The Contractor shall conduct a Project Testing Program as required in the Notice to Bidders entitled "ITS General Requirements." All costs associated with the Project Testing Program shall be included in the overall contract price; no separate payment will be made for any testing.

907-660.03.5--Submittals. The submittal requirements defined in the Notice to Bidders entitled "ITS General Requirements" shall be met. All costs associated with submittals shall be included in the overall contract price; no separate payment will be made for any documenting and submitting.

907-660.03.6--Quality Assurance. The quality assurance requirements defined below and in the Notice to Bidders entitled "ITS General Requirements" shall be met. All costs associated with the quality assurance requirements shall be included in the overall contract price.

Installation or modification of the cabinets, hardware, and incidentals shall be done so in a good and workmanlike manner. All components and cables shall be placed in an organized fashion. Cables with excessive slack shall be zip-tied and/or placed so that they do not impede the access to any components. Any debris associated with the installation or modification shall be cleaned and removed. All power supplies, surge suppressors, and components with the ability to be DIN rail or panel mounted, should be.

907-660.05--Basis of Payment. Delete the first paragraph of Subsection 660.05 on page 668, and substitute the following.

Equipment Cabinet and Equipment Cabinet Modifications, measured as prescribed above, will be paid for at the contract unit price per each, which shall be full compensation for all labor, tools, materials, equipment, system integration, testing, system documentation and submittals, mounting hardware, foundations, fiber splicing, external conduit entrances including conduit bodies and nipples, electrical service, pole grounding, terminations, and all incidentals necessary to complete the work and quality assurance.

Delete the list of pay items on page 668, and add the following.

907-660-A: Equipment Cabinet, Type __ - per each

907-660-B: Cabinet Modifications - per each

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SUPPLEMENT TO SPECIAL PROVISION NO. 907-661-6

DATE: 08/06/2024

SUBJECT: Fiber Optic Cable (OSP)

After Subsection 907-661.03.17 on page 18, add the following.

907-661.03.18--As-Builts. The Contractor shall collect survey data of the location of the fiber optic cables, (including fiber trunk lines and fiber drop lines) (including buried fiber and aerial fiber), ITS pull boxes, and ITS and traffic signal cabinets. The survey data shall be accurate within three feet (3') and shall include the type of fiber patch panel inside the cabinets and the number of strands terminated on each patch panel. The Contractor shall furnish to the Department survey data of the locations and other attributes in both KMZ and Shapefile (SHP) formats. Since the survey data submittal is considered a part of the pay item, and the pay item is not complete until the survey data submittal is received, contract time will not be suspended until such time the Contractor submits the survey data to the Department.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-661-6 **CODE: (IS)**

DATE: **05/25/2021**

SUBJECT: **Fiber Optic Cable (OSP)**

Section 907-661, Fiber Optic Cable, is hereby added to and becomes part of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction as follows.

SECTION 907-661 -- FIBER OPTIC CABLE (OSP)

907-661.01--Description. The work shall consist of the construction of the infrastructure required to install, replace, or upgrade fiber optic cable. The infrastructure shall include all necessary conduits, pull boxes, pole line hardware, building entries, risers and fiber cable to make a complete system.

907-661.02--Materials.

907-661.02.1--Single Mode Fiber Optic Cable (FO Cable). The Contractor shall provide 72-count fiber optic cable, unless otherwise stated in the plans, that meets the following requirements:

- All-dielectric, outdoor hardened (outside plant – OSP), loose tube cable with central strength/anti-buckling member
- Dry water blocking materials and construction
- Reverse oscillating "SZ" stranded buffer tube construction
- High tensile strength yarn
- Medium density polyethylene outer jacket
- 72-fiber cable with six (6) active buffer tubes and 12 individual stranded fibers per buffer tube, unless otherwise stated in the plans
- Cable construction design that allows for no more than the number of active buffer tube positions
- Maximum diameter 0.48 inches
- Maximum weight 0.07 pounds per foot
- Attentuation shall not exceed 0.4 dB/km at 1310 nm and 0.3 dB/km at 1550 nm.

The Contractor shall provide a Corning ALTOS All-Dielectric, Pirelli FlexLink, OFS MiDia, or approved equivalent cable. This cable shall be designated as a trunk cable.

The Contractor shall ensure that the cable can withstand a maximum pulling tension of 600 pounds (lbf) during installation and 180 pounds (lbf) installed long term (at rest).

The cable shall have a shipping, storage and operating temperature range of -30°C to +70°C and installation temperature range of -30°C to +60°C.

The Contractor shall provide cable with outer jacket marking using the following template.

Manufacturer's Name -"Optical Cable" - Month/Year of Manufacture -Telephone Handset Symbol - "MDOT" - "72F SM" (if applicable, replace 72 with the actual number of fibers)

The Contractor shall include in the outer jacket marking the cable sequential length in accordance with the following:

- In English units every two (2) feet
- Within -0/+1% of the actual length of the cable
- In contrasting color to the cable jacket
- Marking font height no less than 0.10 inch
- On any single length of cable on a reel, the sequential length markings do not run through "00000"

907-661.02.2--Single Mode Fiber Optic Cable Indoor/Outdoor Riser Rated. The Contractor shall provide fiber optic plenum rated cable that meets the following requirements when called for on the Plans:

- All-dielectric, inside plant, loose tube central core cable
- High tensile strength yarn surrounding the central tube core
- Dry water blocking materials and construction
- 72-fiber cable with six (6) active buffer tubes and 12 individual stranded fibers per buffer tube, unless otherwise stated on the plans
- Corning Freedm LST All-Dielectric, Pirelli CentraLink, OFS Allwave, or approved equivalent cables shall be provided. This cable shall be designated as the building entry cable.
- Attentuation shall not exceed 0.4 dB/km at 1310 nm and 0.3 dB/km at 1550 nm.

The Contractor shall ensure that the cable can withstand a maximum pulling tension of 300 pounds (lbf) during installation.

The cable shall have a shipping, storage and operating temperature range of -30°C to +70°C and an installation temperature range of -10°C to +60°C.

The Contractor shall provide cable with outer jacket marking using the following template.

Manufacturer's Name - "Optical Cable" - Month/Year of Manufacture - Telephone Handset Symbol - "MDOT" - "72F SM" (if applicable, replace 72 with the actual number of fibers)

The Contractor shall include in the outer jacket marking the cable sequential length in accordance with the following:

- English units every two (2) feet.
- Within -0/+1% of the actual length of the cable
- Contrasting color to the cable jacket
- Marking font height no less than 0.10 inch
- The sequential length markings do not run through "00000" on any single length of cable

on a reel

907-661.02.3--Single Mode Fiber Optic Drop Cable (FO Drop Cable). The Contractor shall provide 12-count Single Mode Fiber, Pre-Terminated Drop Cable Assemblies. These assemblies shall be employed when connecting a camera, traffic controller, DMS or other device to the main cable.

Assemblies shall be factory assembled and terminated on one end with ceramic ferrule, LC compatible, heat cured epoxy connectors with an operational temperature of -40°C to +70°C. Each connector shall have a minimum of a 1-inch strain relief boot.

Insertion loss for each connector shall not exceed 0.30 dB.

Return loss for single mode connectors shall be greater than 45 dB.

Each assembly shall be fully tested and those test results placed on a test tag for each assembly.

Each assembly shall be individually packaged within a box or reel, with the submitted manufacturer's part number marked on the outside of the package.

Individual 250-µm coated fibers shall be up-jacketed to 1/8-inch using fan-out tubing. This tubing shall contain a 900-µm Teflon inner tube, aramid yarn strength members and an outer jacket.

The fan-out tubing shall be secured to the cable in a hard epoxy plug transition. Length of the individual legs shall be a minimum of three feet with the length difference between the shortest and longest legs of the assembly being no more than two inches.

The 12-Fiber, Pre-terminated Drop Cable Assemblies provided shall meet the following minimum requirements:

- All-dielectric, outdoor hardened, loose tube central core cable shall be used
- High tensile strength yarn surrounding the central tube core
- Dry water blocking materials and construction
- Twelve (12) individual stranded fibers contained within the central tube core
- Corning Freedm LST All-Dielectric, Pirelli CentraLink, OFS Allwave, or approved equivalent cables shall be used. This cable shall be designated as the drop cable

The Contractor shall ensure that the cable can withstand a maximum pulling tension of 300 pounds (lbf) during installation.

The cable shall have a shipping, storage and operating temperature range of -30°C to +70°C and an installation temperature range of -10°C to +60°C.

The Contractor shall provide cable with outer jacket marking using the following template.

Manufacturer's Name - "Optical Cable" - Month/Year of Manufacture - Telephone Handset Symbol - "MDOT" - "12F SM"

The Contractor shall include in the outer jacket marking the cable sequential length in accordance with the following:

- English units every two (2) feet
- Within -0/+1% of the actual length of the cable
- Contrasting color to the cable jacket
- Marking font height no less than 0.10 inch
- The sequential length markings do not run through "00000" on any single length of cable on a reel

907-661.02.4--Multimode Fiber Optic Drop Cable (MM FO Drop Cable). The Contractor shall provide 12-count Multimode Fiber, Pre-Terminated Drop Cable Assemblies. These assemblies shall be employed when connecting a camera, traffic controller, DMS or other device to the main cable.

Cable Assembly shall be rated for outdoor environment and have operational temperature of -40°C to +70°C. Each connector shall have a minimum of a 1-inch strain relief boot. The Cable Assembly shall also be pre-terminated on one end.

Insertion loss for each connector shall not exceed 0.30 dB.

Attenuation shall not exceed 3 dB/km for 850 nm and 1dB/km for 1300 nm.

Each assembly shall be fully tested and those test results placed on a test tag for each assembly.

Each assembly shall be individually packaged within a box or reel, with the submitted manufacturer's part number marked on the outside of the package.

The fan-out tubing shall be secured to the cable in a hard epoxy plug transition. Length of the individual legs shall be a minimum of three feet with the length difference between the shortest and longest legs of the assembly being no more than two inches.

The 12-Fiber, Pre-terminated Drop Cable Assemblies provided shall meet the following minimum requirements:

- All-dielectric, outdoor hardened, loose tube central core cable shall be used
- High tensile strength yarn surrounding the central tube core
- Dry water blocking materials and construction
- Twelve (12) individual stranded fibers contained within the central tube core
- Corning Freedm LST All-Dielectric, Pirelli CentraLink, or approved equivalent cables shall be used. This cable shall be designated as the drop cable

The Contractor shall ensure that the cable can withstand a maximum pulling tension of 300 pounds (lbf) during installation.

The cable shall have a shipping, storage and operating temperature range of -30°C to +70°C and

an installation temperature range of -10°C to +60°C.

The Contractor shall provide cable with outer jacket marking using the following template.

Manufacturer's Name - "Optical Cable" - Month/Year of Manufacture - Telephone Handset Symbol - "MDOT" - "12F MM"

The Contractor shall include in the outer jacket marking the cable sequential length in accordance with the following:

- English units every two (2) feet
- Within -0/+1% of the actual length of the cable
- Contrasting color to the cable jacket
- Marking font height no less than 0.10 inch
- The sequential length markings do not run through "00000" on any single length of cable on a reel

907-661.02.5--Plenum Rated Nonmetallic Corrugated Raceway. The Contractor shall provide plenum rated nonmetallic corrugated raceway inside buildings when cable is not in rigid conduit or when it is called for on the plans.

The installation shall conform to NEC articles 770 and 800.

Raceway shall meet UL Standards 910 and 2024.

The Contractor shall provide 2-inch diameter raceway unless larger is called for in the plans.

907-661.02.6--Fiber Optic Splices. All splices shall be created according to the latest version of the manufacturer's cable installation procedures unless otherwise noted in the plans or by the Project Engineer.

The Contractor shall utilize a Fiber Optic Fusion Splicer for the splicing of all fibers with a fully automatic, portable fusion splicer that provides consistent low loss (max 0.10 dB) splices. The splicer shall provide three-axis fiber core alignment using light injection and loss measurement techniques. The fusing process shall be automatically controlled. The splicer shall provide splice loss measurements on an integral display, as well as a magnified image of the fiber alignment.

907-661.02.7--Fiber Optic Connectors. The Contractor shall provide fiber optic connectors for all fiber optic infrastructures including but not limited to fiber optic termination cabinets, fiber optic drop panels, and fiber optic patch cords.

The Contractor shall provide only factory-installed keyed LC compatible connectors for all fiber optic infrastructures.

Field-installed connectors shall not be used.

Adapter couplers shall not be used to change connector types.

Ceramic ferule connectors, factory-installed, with a thermal-set heat-cured epoxy and machine polished mating face shall be used.

Connectors shall be installed as per manufacturer application and recommendations, including proper termination to the outer-tubing (900-micron tubing, 3-mm fan out tubing, etc.) required for the application.

Connectors rated for an operating temperature of -40°C to +75 °C shall be used.

Simplex connectors for all male LC connectors shall be used and a latching cover for two male connectors being used in a duplex configuration shall be provided. Female couplers may be duplex but must allow simplex mating connectors.

Dust caps shall be provided for all exposed male connectors and female couplers at all times until permanent connector installation.

907-661.02.8--Fiber Optic Termination Cabinet (FO Termination Cabinet). Fiber optic termination cabinets shall be provided in communications hubs, field junctions, and the MDOT Traffic Management Center (TMC) as shown in the Plans for termination of all fibers of the fiber optic cable(s).

The Contractor shall provide wall/shelf mount 12-fiber distribution cabinets equipped with fiber optic connector modules in a 12-fiber configuration. These will be used in field equipment and communication cabinet locations. Pre-terminated fiber distribution cabinets shall not be used without prior approval from Project Engineer.

Termination cabinets with cable management features included shall be provided.

The Contractor shall use termination cabinets that are fully compatible with all components of the fiber optic infrastructure as specified, including, but not limited to, fiber optic cable, fiber optic fusion splices and fiber optic connectors.

The Contractor shall provide rack-mount termination cabinets designed to fit standard 19-inch EIA equipment racks.

The Contractor shall provide all mounting hardware and supports to mount the termination cabinets in the locations shown in the Plans.

The Contractor shall provide fiber optic termination cabinets providing a minimum of 72-fiber connectors and capable of storing a minimum of 72 fusion splices in splice trays.

The Contractor shall provide termination cabinets that integrate the splice trays and connector modules into one compartment within one cabinet, or houses the splice trays and connector modules in separate compartments integrated into one cabinet.

The maximum dimensions of a complete termination cabinet shall be 7-rack units, 12¼ inches high by 16 inches deep.

Fiber optic termination cabinets shall be fully enclosed metallic construction with a protective hinged front cover for the connector ports.

The cabinet shall have cable access on all sides of the enclosed area behind the connector port panel.

The Contractor shall provide sufficient splice trays for storing a minimum of 72 fusion splices in 12 or 24-splice increments.

The Contractor shall provide termination cabinets with fiber optic connector modules in a 12 fiber configuration of six (6) rows of one (1) duplex connector couplers. Connector modules shall mount vertically in the termination cabinet front panel.

Connector modules shall include clearly legible and permanent labeling of each of the 12 fiber connector couplers, and shall be labeled and identified as shown in the Plans.

The Contractor shall provide factory-assembled 12-fiber termination interconnect cables (pigtail cables) to be fusion spliced to the outdoor hardened or indoor cable and connected to the rear of the connector modules.

Termination interconnect cables shall be all-dielectric, single jacketed cable with high tensile strength yarn surrounding 12 individual 900-micron fibers following EIA/TIA-598B color identification with factory-installed connectors.

The Contractor shall provide all incidental and ancillary materials including but not limited to grommets, cable strain relief and routing hardware, blank connector panels and labeling materials.

The cable shall be new (unused) and of current design and manufacture.

907-661.02.9--OSP Closures for Aerial, Pole Mount, Pedestal and Hand Hold Environments.
OSP closures for aerial, pole mount, pedestal and hand hole shall be capable of accepting up to eight cables. The closures shall be capable of storing up to eight 90-inch lengths of expressed buffer tubes and up to 96 splices.

Assembly shall be accomplished without power supplies, torches, drill kits or any special tools. Re-entry shall require no additional materials.

Sealing shall be accomplished by enclosing the splices in a polypropylene case that is clamped together with a stainless steel latch and sealed with an O-ring.

Closure shall be capable of strand mounting with the addition of a strand mounting bracket.

Splice case shall be non-filled, non-encapsulate to prevent water intrusion, and shall allow re-entry without any special tools.

The closure shall be capable of preventing a 10-foot water head from intruding into the splice compartment for a period of seven (7) days.

It is the responsibility of the Contractor to ensure that the water immersion test has been performed by the manufacturer or an independent testing laboratory, and the appropriate documentation has been submitted to the Engineer.

907-661.02.10--OSP Closures for Drop Cable Splice Points. OSP closures for aerial, pole mount, pedestal and hand hold shall be capable of accepting the trunk cable and two drop cables. The closures shall be capable of storing up to eight 90-inch lengths of expressed buffer tubes and up to 48 splices.

Assembly shall be accomplished without power supplies, torches, drill kits or any special tools. Re-entry shall require no additional materials.

Sealing shall be accomplished by enclosing the splices in a polypropylene case that is clamped together with a stainless steel latch and sealed with an O-ring.

Closure shall be capable of strand mounting with the addition of a strand mounting bracket.

Splice case shall be non-filled, non-encapsulate to prevent water intrusion, and shall allow re-entry without any special tools.

The closure shall be capable of preventing a 10-foot water head from intruding into the splice compartment for a period of seven days.

It is the responsibility of the Contractor to ensure that the water immersion test has been performed by the manufacturer or an independent testing laboratory, and the appropriate documentation has been submitted to the Engineer.

907-661.02.11--Patch Cords and Jumper Cables. Any patch cords or jumper cables required to connect the new fiber and equipment at existing locations shall be considered incidental and shall be included in the cost of pay items 907-661-A and 907-661-B.

Any patch cords used for system configuration shall be compatible with fiber types and connectors specified herein.

Single-mode patch cords shall be yellow in color.

Jacketing material shall conform to the appropriate NEC requirement for the environment in which installed.

All cordage shall incorporate a 900-µm buffered fiber, aramid yarn strength members and an outer jacket.

Patch cords may be simplex or duplex, depending on the application.

Attenuation shall be less than 1.0 dB/km @ 1310 nm, 0.75 dB/km @ 1550 and have a total attenuation of less than .5 dB.

The Contractor shall be responsible to determine and provide attenuators with the proper attenuation to not exceed the optical budgets of the equipment connected by patch cables.

907-661.02.12--Cable Labels. The Contractor shall provide cable labels that meet the following requirements:

- Self-coiling wrap-around type
- PVC or equivalent plastic material with UV and fungus inhibitors
- Base materials and graphics/printing inks/materials designed for underground outdoor hardened use including solvent resistance, abrasion resistance and water absorption
- Minimum size of 2.5 inches wide by 2.5 inches long
- Minimum thickness of 0.010 inches
- Orange label body with pre-printed text in bold black block-style font with minimum text height of 0.375 inches
- The Contractor shall pre-print the following text legibly on labels used for all fiber optic trunk cables:

  Caution Fiber Optic Cable Mississippi Department of Transportation (601) 359-1454

- The Contractor shall pre-print the following text legibly on labels used or all fiber optic drop cables (FO Drop Cable):

  Caution Fiber Optic Drop Cable Mississippi Department of Transportation (601) 359-1454

- On all cable labels, the Contractor shall print the text specified above twice on the label with the text of the second image inverted. The end result shall be text which "reads correctly" when the label is coiled onto a cable.

907-661.02.13--Cable Markers. The Contractor shall provide low profile soil cable markers which meet the following requirements:

- 3.5 inches in diameter
- UV stabilized for Maximum fade resistance
- Durable and abrasion resistant
- Lawn mower resistant
- Orange in color
- Printed Legend:

Fiber Optic Cable
Mississippi Department of Transportation
Traffic Engineering Division (601)359-1454

The Contractor shall install cable markers with a 13-inch nylon stake every 500 feet along the fiber run.

907-661.02.14--Tracer Cable. Tracer cable requirements as defined in Section 636, along with

the requirements in this specification, shall be met. Conduit detection wire shall be #10 AWG stranded copper, orange-insulated, THHN -THWN conductor.

907-661.02.15--Project Submittal Program Requirements. The Contractor shall provide project submittals for all fiber optic infrastructures. The project submittals for fiber optic infrastructure shall include all items in this provision and any additional requirements included in any Notice to Bidders.

The Contractor shall provide project submittals including manufacturer recommended operations, maintenance and calibration procedures for the following equipment:

- Fiber optic installation and testing tools
- Fusion splicers
- Cable pulling strain dynamometers and breakaway links
- Cable air jetting/blowing systems
- OTDRs
- Optical attenuation testers (light sources and power meters)

The Contractor shall submit documentation and proof of manufacturer recommended operator training and certification for the following equipment:

- Fusion splicers
- Cable air jetting/blowing systems
- OTDRs
- Optical attenuation testers (light sources and power meters)

907-661.03--Construction Requirements. All equipment shall be installed according to the manufacturer's recommendations, the Plans and as follows.

907-661.03.1--General Requirements. Fiber optic cable shall meet the following general requirements.

a) The Contractor shall install all fiber optic infrastructures according to the manufacturer's recommended procedures and specifications.
b) The Contractor shall provide all necessary interconnections, services and adjustments required for a complete and operable data transmission system.
c) The Contractor shall ensure conduit is clean and undamaged prior to installing fiber optic cable.
d) The Contractor shall install all fiber trunk, drop, and patch cables such that attenuation shall be less than 1.0 dB/km @ 1310 nm, 0.75 dB/km @ 1550.
e) All pole attachments, service loops and conduit risers shall be placed to minimize the possibility of damage as well as to facilitate future expansion or modernization.
f) The cable shall be installed in continuous runs as indicated on the plans. Splices shall be allowed only at drop points or reel end points specified in the plans.
g) At drop locations only, those fibers necessary to complete the communication path shall be spliced. Other fibers in the cable(s) shall be left undisturbed, with a minimum of five feet of buffer tube coiled inside the closure.

h) Sufficient slack shall be left at each drop point to enable access of the cable components and splicing to occur on the ground. This is typically two times the pole height plus 15 feet.
i) For aerial (not including aerial fiber in conduit attached to bridges) installations, the following minimum slack requirements shall apply:
   - For aerial slack storage at splice points, a radius controlling device shall be used for securing resulting cable slack at aerial splice points and shall be mounted directly to the strand.
   - For aerial cable runs exceeding 6-pole spans between splice points as indicated on the plans, two opposing radius controlling devices shall be placed on the span 50 feet apart to provide for a 100-foot service loop for future drops and for slack for repair and pole relocations.
j) Drop cable shall be routed to the controller cabinets via conduit risers as illustrated in the plans. The cable entrance shall be sealed with a duct plug designed for fiber optic cable to prevent water ingress.
k) The minimum requirement for fiber protection outside a fiber optic enclosure in ALL cases shall be 1/8-inch fan-out tubing, containing a hollow 900-µm tube, aramid strength members and an outer jacket, and shall be secured to the cable sheath.
l) The minimum requirement for fiber protection inside wall mount or rack mount fiber enclosure shall be 900-µm buffering, intrinsic to the cable in the case of tight buffered fibers, or in the case of 250-µm coated fibers, a fan-out body and 900-µm tubing secured to the buffer tube(s).
m) When high airspeed blowing (HASB) method or piston method is used, ensure that the volume of air passing through the conduit does not exceed the conduit manufacturer's recommendation.
n) The manufacturer's recommended maximum pulling tension shall not be exceeded. Pulling attachments shall be designed to not degrade the optical and mechanical characteristics of the fiber optic cable during installation.
o) During installation, even if the tension specifications for the cable are not exceeded the first ten feet shall be discarded.
p) Warning tape shall be placed 12 inches above the cable not to deviate ±18 inches from the centerline of the optical cable. Warning tape shall be at least two inches wide and colored orange.

907-661.03.2--Cable Shipping and Delivery. The cable shall be packaged on reels for shipment. Each package shall contain only one continuous length of cable. The packaging shall be constructed as to prevent damage to the cable during shipping and handling.

Both ends of the cable shall be sealed to prevent the ingress of moisture.

A weatherproof reel tag shall be attached to each reel identifying the reel and cable so that it can be used by the manufacturer to trace the manufacturing history of the cable and the fiber. A cable data sheet shall be included with each reel containing the following information:

- Manufacturer name
- Cable part number
- Factory order number
- Cable length.

- Factory measured attenuation of each fiber

The Contractor shall cover the cable with a protective and thermal wrap.

The outer end of the cable shall be securely fastened to the reel head so as to prevent the cable from becoming loose in transit. The inner end of the cable shall be projected a minimum of 6.5 feet into a slot in the side of the reel, or into housing on the inner slot of the drum, in such a manner as to make it available for testing.

Each reel shall be plainly marked to indicate the direction in which it is to be rolled to prevent loosening of the cable on the reel.

907-661.03.3--Cable Handling and Installation. The Contractor shall not exceed the maximum recommended pulling tension during installation as specified by the cable manufacturer.

The Contractor shall continuously monitor pulling tensions with calibrated measuring devices, such as a strain dynamometer.

The Contractor shall ensure that the minimum depth of the cable is a minimum of 36 inches unless shown otherwise in plans.

All pulled installations shall be protected with calibrated breakaway links.

The Contractor shall ensure that the minimum recommended bend radius is not exceeded during installation as specified by the cable manufacturer. Unless the manufacturer's recommendations are more stringent, the following guidelines shall be used for minimum bend radius:

- 20 X Cable Diameter Short Term - During Installation
- 10 X Cable Diameter Long Term - Installed

Before cable installation, the cable reels and reel stands shall be carefully inspected for imperfections or faults such as nails that might cause damage to the cable as it is unreeled.

All necessary precautions shall be taken to protect reeled cable from vandals or other sources of possible damage while unattended. Any damage to reeled cable or the reel itself shall necessitate replacement of the entire cable section at no additional cost to the State.

Whenever unreeled cable is placed on the pavement or surface above a pull box, the Contractor shall provide means of preventing vehicular or pedestrian traffic through the area in accordance with the safe maintenance of traffic provisions.

The cable shall be kept continuous throughout the pull. Cable breaks and reel end splices are permitted only in Type 5 pull boxes and occur at a minimum of 10,000 feet.

Where a cable ends in an underground fiber optic closure, all unused fibers and buffer tubes shall be secured and stored in splice trays in preparation for future reel end splicing and continuation.

907-661.03.4--Cable Storage. The Contractor shall properly store all cable to minimize susceptibility to damage. The proper bend radius shall be maintained, both short and long term, during cable storage.

Storage coils shall be neat in even length coils, with no cross over or tangling.

Storage coils of different cables shall be kept completely separate except when the cables terminate in the same splice closure.

Storage coils shall be secured to cable racking hardware with tie wraps, Velcro straps, or non-metallic cable straps with locking/buckling mechanism. No adhesive or self-adhering tapes, metal wires and straps, or rope/cord shall be used to secure coils.

Unless otherwise noted on the plans, the following are the requirements for cable storage for underground applications:

- Trunk cable in Type 4 pull box ..... 25 feet
- Trunk cable in Type 5 pull box ..... 200 feet
- Trunk cable in Surface Mounted pull box ..... 5 feet
- Drop cable in Type 4 pull box ..... 10 feet
- Drop cable in Type 5 pull box, not terminated in a splice closure ..... 10 feet
- Drop cable in Surface Mounted pull box, not terminated in a splice closure .....5 feet
- Drop cable in Type 5 pull box, terminated in a splice closure with the trunk cable ..... 100 feet
- Drop cable in Surface Mounted pull box, terminated in a splice closure with the trunk cable ..... 5 feet
- Trunk cable end in Type 5 pull box ..... 200 feet
- Drop cable terminated in same splice closure as trunk cable end ..... 200 feet
- Trunk cable end in Surface Mounted pull box ..... 10 feet

The Contractor shall label each pull box with a numbered disk obtained from the Traffic Engineering Division. The disk shall be installed in accordance with the manufacturer's specification on the lid of each pull box. Numbers shall be noted on the As-Built plans for each pull box.

No slack cable shall be stored inside the communications hub building or Control Center.

907-661.03.5--Cable Labels. Cable labels shall be installed on all trunk and drop fiber optic cables. The installed cable shall be cleaned of all dirt and grease before applying any label.

The Contractor shall label all cables in or at every location where the cable is exposed outside of a conduit, innerduct or pole using the cable IDs for trunk cables or the device number for drop cables.

As a minimum, cable labels shall be installed in the following locations:

- Within 12 inches of every cable entry to a pull box, equipment cabinet, communications

hub, or the TMC
- Within 12 inches of the exterior entry point of every fiber optic splice closure, termination cabinet and drop panel
- Every 30 feet for the entire length of cable in any storage coil in pull boxes
- Within one (1) foot of every pole attachment
- On every riser
- On every splice enclosure

907-661.03.6--Tracer Cable. Tracer cable requirements as defined in Section 636 Electrical Cable, along with the requirements in this specification, shall be met. The Contractor shall install one tracer cable where one or more conduits are installed. Tracer cable is required for all installation methods, including trenching, directional boring, or plowing. Conduit or Fiber Optic Cable with preinstalled tracer cable shall not be used without prior approval from Project Engineer.

Only one tracer wire is required per installed conduit bank regardless of the number of conduits installed in that segment. Tracer cable shall be installed inside the conduit.

Tracer cable is not required for structure mounted conduit, except where underground segments of structure mounted conduit are greater than 20 feet in length.

The tracer cable shall be continuous and unspliced between pull boxes and shall enter the pull boxes at the same location as the conduit with which it is installed, entering under the lower edge of the pull box.

Four (4) feet of tracer cable shall be coiled and secured in each pull box or vault.

When two or more tracer cables are in any pull box, the Contractor shall mechanically splice all tracer cable together.

Tracer cable is required in drop cable conduits.

A tracer cable surge protection system shall be furnished and installed. Tracer cables shall be attached to surge protection systems designed to dissipate high transient voltages or other electrical surges. The tracer cable surge protection system shall be grounded to a driven rod within 10 feet of the system using AWG #6 single conductor wire as detailed in the plans. Grounding shall be done through a stand alone system not connected to power or ITS device grounding. The surge protection system shall normally allow signals generated by locate system to pass through the protection system without going to ground.

907-661.03.7--Splicing into Existing Fiber Optic Cable. At some locations, the Contractor may be required to splice new drop cable into existing fiber optic cable at existing pull boxes. The Contractor is responsible to protect all existing fiber during this work. No separate payment shall be made for splicing into the existing fiber. The cost for all fiber optic work and equipment shall be included in the bid price for pay items 907-661-A and 907-661-B.

The Contractor must notify the Project Engineer in writing no less than ten (10) days in advance of doing any work to existing fiber optic cable. Before any work can begin the Contractor must

have obtained approval from the Project Engineer.

907-661.03.8--Replace Fiber Optic Cable. In locations specified in the Plans, the Contractor shall be required to remove and replace existing fiber optic cable with new fiber optic cable. The new fiber optic cable shall be an equivalent cable having the same cable type, assembly, connectors, size, construction, buffer tube construction, temperature characteristics, tensile strength, and optical characteristics. The cable type and mode shall be the same unless specified as otherwise in the Plans or Notice to Bidders. The new cable shall be a compatible replacement having equivalent or improved link characteristics. The Contractor shall install the cable as per manufacturer application and recommendations and adhere to the Installation Requirements and Testing specifications as stated herein. No separate payment will be made for this work. The cost for pulling new fiber optic cable for cable replacement, and splicing/terminating all fibers shall be included in the cost of pay item 907-661-D.

907-661.03.9--Replace Fiber Optic Drop Cable. In locations specified in the Plans, the Contractor shall be required to remove and replace existing fiber optic drop cable with new fiber optic drop cable. The new fiber optic drop cable shall be an equivalent cable having the same cable type, assembly, connectors, size, construction, buffer tube construction, temperature characteristics, tensile strength, and optical characteristics. The cable type and mode shall be the same unless specified as otherwise in the Plans or Notice to Bidders. The new cable shall be a compatible replacement having equivalent or improved link characteristics. The Contractor is required to install the cable as per manufacturer application and recommendations and adhere to the Installation Requirements and Testing specifications as stated herein. No separate payment will be made for this work. The cost for pulling new fiber optic drop cable for cable replacement, and splicing/terminating all fibers shall be included in the cost of pay item 907-661-E.

907-661.03.10--Upgrade Fiber Optic Cable. In locations specified in the Plans, the Contractor shall be required to upgrade existing fiber optic cable to new cable that adheres to the respective cable specification and requirements. The cable type and mode shall be the same unless specified as otherwise in the Plans or Notice to Bidders. The cable upgrade shall be treated as a new cable installation and adhere to all corresponding specifications and requirements stated herein. No separate payment will be made for this work. The cost for pulling new fiber optic to upgrade existing cable, and splicing/terminating all fibers shall be included in the cost of pay item 907-661-G.

907-661.03.11--Fiber Optic Connections at Existing Communication Nodes. In some locations, the Contractor shall be required to pull new fiber optic cable into an existing communications hut. No separate payment will be made for this work. The cost for pulling the fiber into the hut, providing and installing the termination equipment, and terminating all the fibers shall be included in the cost of pay items 907-661-A and 907-661-B.

907-661.03.12--Drop and Insert Applications. The signal from the TMC to local controllers, cameras, and/or dynamic message signs will be conveyed via the backbone and branch cables.

The appropriate closure (Subsection 907-661.02.8) shall be used.

A 12-port fiber distribution cabinet and appropriate jumper shall be installed within the cabinet at locations approved by the Engineer.

At each device, the applicable fibers will be routed in and out of the equipment cabinet using a pre-terminated drop cable.

Only fibers required for the drop and insert shall be cut, no other fibers in the cable shall be cut without the approval of the Engineer.

The fibers shall be connected to the transmission equipment via LC/LC fiber optic patch cables.

The drop cable shall be routed in a position that will allow access to all installed components without movement of the cable.

In traffic signal control boxes, the drop cable shall be routed up the left rear corner to a shelf mounted fiber optic termination cabinet.

In ITS equipment or communication cabinets the cable shall be routed neatly allowing for service of all installed components.

907-661.03.13--Testing. The fiber optic infrastructure shall undergo testing to verify conformance to requirements of the plans and these special provisions. The Contractor shall conduct a Project Testing Program as required in the Notice to Bidders entitled "ITS General Requirements." All costs associated with the Project Testing Program shall be included in the overall contract price; no separate payment will be made for any testing.

907-661.03.13.1--Pre-Installation Test (PIT). In addition to the requirements set forth in the Notice to Bidders entitled "ITS General Requirements", the Contractor shall, at a minimum, perform a PIT on all FO Cable prior to any cable removal from the shipping reels.

The Contractor shall perform a PIT on each cable reel delivered to the job site.

The PIT for FO Cable shall include but is not limited to:

- A visual inspection of each cable and reel
- An OTDR Test and documentation as required in the Standalone Acceptance Test (SAT) for three randomly selected fibers from each buffer tube

An Optical Attenuation Test is not required. However, if the Contractor decides to perform one of these tests for his or her own protection, it should be documented and provided to the Engineer.

907-661.03.13.2--Standalone Acceptance Test (SAT). In addition to the requirements set forth in the Notice to Bidders entitled "ITS General Requirements", the Contractor shall, at a minimum, perform an SAT on all fiber optic infrastructures on this project after field installation is complete, including but not limited to all splicing and terminations. All fiber in pull boxes shall be in its final position, mounted to the racks, prior to the start of testing.

An SAT for each fiber in each cable shall include OTDR Tests and Optical Attenuation Tests.

For the Attenuation Tests, all fibers in all FO Cables and FO Drop Cables shall be tested from termination point to termination point, including:

- Fibers from FO Termination Cabinet to FO Termination Cabinet
- Fibers from FO Termination Cabinet to FO Drop Panel
- Fibers from FO Drop Panel to FO Drop Panel
- Fibers from FO Termination Cabinet to the end of the cable run in the last FO closure

All test results shall confirm compliance with this TSP including but not limited to optical fibers and fusion splices. No event in any given fiber may exceed 0.10 dB. Any event measured above 0.10 dB shall be replaced or repaired at the event point.

Test documentation shall include but is not limited to:

- Cable & fiber identification
- Cable & fiber ID and location - Physical location (device ID and station number of FO Termination Cabinet, FO Drop Panel, or cable end FO closure), fiber number, and truck or drop cable ID for both the beginning and end point
- Operator name
- Engineer's representative
- Date & time
- Setup and test conditions parameters
- Wavelength
- Pulse width Optical Time Domain Reflectometer (OTDR)
- Refractory index (OTDR)
- Range (OTDR)
- Scale (OTDR)
- Ambient temperature
- Test results for OTDR test (each direction and averaged)
- Total fiber trace (miles)
- Splice loss/gain (dB)
- Events > 0.05 dB
- Measured length (cable marking)
- Total length (OTDR measurement)
- Test results for attenuation test (each direction and averaged)
- Measured cable length (cable marking)
- Total length (OTDR measurement from OTDR test)
- Number of splices (determined from as-builts)
- Total link attenuation

The OTDR Test shall be conducted using the standard operating procedure and recommended materials as defined by the manufacturer of the test equipment.

The Contractor shall use a factory patch cord ("launch cable") of a length equal to the "dead zone" of the OTDR to connect the OTDR and the fiber under test.

Bi-directional OTDR tests shall be conducted and bi-directional averages calculated for each fiber.

All tests shall be conducted at 1310 and 1550 nm for single mode cable.

The Contractor shall conduct the Optical Attenuation Test using the standard operating procedure and recommended materials as defined by the manufacturer of the test equipment.

Bi-directional Optical Attenuation tests shall be conducted and bi-directional averages calculated for each fiber.

Tracer Cable shall undergo testing to verify conformance to requirements of the plans and these special provisions. A continuity or tone test shall be performed after installation to confirm that a continuous run of tracer cable was installed for the full length of the conduit runs.

The Traffic Engineering ITS Department may perform additional testing of any and all infrastructure using their own equipment. The Contractor may observe this testing.

The burn-in period cannot start until the Traffic Engineering ITS Department is satisfied with the installation.

907-661.03.14--Submittals. The submittal requirements defined in the Notice to Bidders entitled "ITS General Requirements", along with the requirements below and throughout this specification, shall be met. All costs associated with submittals shall be included in the overall contract price; no separate payment will be made for any documenting and submitting.

907-661.03.15--Quality Assurance. The quality assurance requirements defined in the Notice to Bidders entitled "ITS General Requirements" shall be met. All costs associated with the quality assurance requirements shall be included in the overall contract price.

907-661.03.16--Warranty. At a minimum, the warranty requirements defined in the Notice to Bidders entitled "ITS General Requirements" shall be met.

907-661.03.17--Training. The minimum training requirements shall be as defined in the Notice to Bidders entitled "ITS General Requirements."

907-661.04--Method of Measurement. Fiber optic cable of the type specified will be measured by the linear foot, and shall be obtained by accurate measurement of the runs including horizontally, vertically, aerially along the messenger cable, from the trunk line to the controller cabinet, and with liberal allowances made for slack in boxes, as indicated in the plans.

The cost for all fiber optic work, equipment and testing shall be included in the bid price for fiber optic cable.

All required cabinet facilities shall not be measured for separate payment. All standard or special fiber optic modems, fan out boxes, connectors, termination cabinets, patch cords, raceways, splicing devices, splicing, warning tape, above ground markers, backplane facilities, twisted pair communications cable interface devices, etc., and any other cabinet modifications required for the fiber optic system shall be included in the price bid for other items of work.

Fiber Optic Cable Training shall be measured as a lump sum which shall include all coordination, materials, labor, training location costs, and all incidentals required to complete the training as described in the Notice to Bidders entitled "ITS General Requirements."

907-661.05--Basis of Payment. Fiber optic cable, measured as prescribed above, will be paid for at the contract unit price bid per linear foot, which price shall be full compensation for documentation and submittals, warranties, furnishing all materials, for all installing, connecting, cutting, pulling and testing, all equipment, tools, labor, quality assurance, and all incidentals necessary to complete the work.

Fiber Optic Cable Training, measured as prescribed above, will be paid for at the contract unit lump sum price, which price shall be full compensation for all training costs including coordination, materials, labor, training location costs, and all incidentals required to complete the training as described in the Notice to Bidders entitled "ITS General Requirements."

Payment will be made under:

907-661-A:	Fiber Optic Cable, *	- per linear foot
907-661-B:	Fiber Optic Drop Cable, *	- per linear foot
907-661-D:	Replace Fiber Optic Cable, *	- per linear foot
907-661-E:	Replace Fiber Optic Drop Cable, *	- per linear foot
907-661-G:	Upgrade Fiber Optic Cable, *	- per linear foot
907-661-H	Fiber Optic Cable Training	- lump sum

* Indicate the type of cable. Cable may be aerially supported as indicated in the plans.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-663-6 **CODE: (IS)**

DATE: 12/15/2023

SUBJECT: Networking Equipment

Section 907-663, Networking Equipment, is hereby added to and made part of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction as follows.

SECTION 907-663 -- NETWORKING EQUIPMENT

907-663.01--Description. This section specifies the minimum requirements for providing networking communication equipment, including network switches, terminal servers, fiber optic modems, SD-WAN routers, and associated cabling, furnished and installed.

Network Switches are divided into three (3) categories; Layer 2 hardened, Layer 3 hardened, and Layer 3 non-hardened. There can be multiple types per category such as Type A, B, C etc. Types will be defined by options based on versions and numbers of ports, and/or additional modules such as built in fiber modems, wireless components, and terminal servers. The number of specific port versions will also be defined by plan requirements, NTBs, and Special Provisions.

Field and core hardened category switches shall be environmentally hardened devices.. These switches support Intelligent Transportation Elements deployed on arterial streets and the highway system where network switches are required for communications but HVAC systems are not available for environmental control. Elements include but are not limited to traffic signals, dynamic message signs, surveillance cameras, and vehicle detection systems. Field and core non-hardened category switches will support the Intelligent Transportation System and be installed in the Traffic Management Center and Communications Huts which are environmentally controlled.

This section also specifies the minimum requirements for standalone and network switch module terminal servers, standalone and network switch modules, SD-WAN Routers, and Ethernet Network cable. The terminal servers shall be hardened. The terminal server device, also commonly referred to as a port server device, will be used to communicate bi-directionally between IP-based Ethernet network systems and existing field devices that communicate or are controlled via a full-duplex serial interface. SD-WAN Routers shall be used to provide data network connectivity via a cellular network bi-directionally to remote sites such as portable traffic signal sites, portable CMS, smart work zones, ITS site locations, or devices that need serial or Ethernet communication that can be provided over cellular service.

The Ethernet network cable will be installed in conduit and cabinets between elements that are within 300 feet of each other to eliminate the need for two hardened switches. The work shall consist of providing all labor, materials, equipment, and incidentals necessary to furnish, install, and test the networking equipment.

907-663.02--Materials. Network switches, terminal servers, cell modems, and associated cabling will be placed in the field device cabinets and shall meet the following requirements.

907-663.02.1--Network Switch Requirements. All network switches shall adhere to the following minimum requirements.

1) Field switch optical ports shall meet the following:
   a. The minimum optical budget between transmit and received ports shall be 18dB.
   b. Shall include LC connector types.
   c. Optical receiver maximum input power level shall not be exceeded.
   d. Optical attenuators shall be added as needed; fiber optic attenuator patch cords shall be in accordance with Section 657 of the Standard Specifications. It is the Contractor's responsibility to determine where attenuators are needed and shall be included in the cost of the switch.
   e. The Contractor shall be required to measure the optical power on each optical port to ensure that power entering the receiver is within the acceptable power budget of the optical port.
   f. Optical interface equipment shall operate at 1310 nm.
2) Operate from 100 VAC to 200 VAC.
3) Meet the IEEE 802.3 (10Mbps Ethernet) standard.
4) Meet the IEEE 802.3u (Fast Ethernet 100 Mbps) standard.
5) Meet the IEEE 802.3x (Full Duplex with Flow Control) standard.
6) Meet the IEEE 802.1p (Priority Queuing) standard.
7) Meet the IEEE 802.1Q (VLAN) standard per port for up to four VLAN's.
8) Meet the IEEE 802.1w (Rapid Spanning Tree Protocol) standard.
9) Meet the IEEE 802.3ad (Port Trunking) standard for a minimum of two groups of four ports.
10) The field switches shall meet IEEE 802.3D (Spanning Tree Protocol) standard.
11) Capable of mirroring any port to any other port within the switch.
12) Password manageable through:
   a. SNMP
   b. Telnet/CLI
   c. HTTP (Embedded Web Server) with Secure Sockets Layer (SSL)
13) Full implementation of SNMPv1 and SNMPv2c.
14) Full implementation of GVRP (Generic VLAN Registration Protocol).
15) Full implementation of IGMP and IGMP snooping.
16) Minimum MTBF of 100,000 hrs using Bellcore TS-332 standard.
17) Full implementation of RFC 783 (TFTP) to allow remote firmware upgrades.
18) UL approved.
19) The field switch shall provide LED status indicators as follows:
   1) power on and off
   2) network status per port (transmit, receive, link, speed)
20) Unused ports (copper and optical) shall be covered with rubber or plastic dust caps/covers.
21) Switches Types that are required to be Environmentally Hardened shall meet the following environmental requirements:
   a. The field switches [this excludes Types C, E and F] shall operate between -34° to +74°C, including power supply.

b. The field switches [this excludes Types C, E and F] shall operate from 10% to 90% non-condensing humidity.

907-663.02.1.1–Layer 2 Network Switch. Layer 2 network switches shall be provided in locations where only Layer 2 network functionality is required. These locations will generally be field site locations. Layer 2 network switches shall adhere to the following minimum requirements.

1) Shall be environmental hardened
2) Rack, shelf or DIN rail mountable. If shelf mounted, the Contractor must furnish and install a shelf if shelf space is not available in the facility. Any shelf used shall be ventilated as per the Network Switch manufacturer recommendation.
3) All power transformers provided shall be "fastening mechanism" type. No plug-in types shall be permitted. All corded transformers shall be mountable with the ability to neatly secure power cords.

907-663.02.1.1.1--Type A Network Switch. Type A network switches shall be a layer 2 network switch at minimum and shall be environmentally hardened. The Type A shall be provided in situations where a minimal number of interface ports are required. The Type A switch shall adhere to the following minimum requirements in addition to the Layer 2 network switch requirements.

1) Minimum of six 10/100/1000 Base-TX ports. Each port shall connect via RJ-45 connector.
2) Minimum of two 1000 Base Long Reach optical ports.

907-663.02.1.1.2--Type B Network Switch. Type B network switches shall be a Layer 2 network switch at minimum and shall be environmentally hardened. The Type B shall be provided in situation where minimal number of interface ports are required. The Type B switch shall adhere to the following minimum requirements in addition to the Layer 2 network switch requirements.

1) Minimum of twelve (12) 10/100/1000 Base-TX ports. Each port shall connect via RJ-45 connector.
2) Minimum of two (2) 1000 Base Long Reach optical ports.

907-663.02.1.2–Layer 3 Network Switch. Layer 3 network switches shall be provided in locations where Layer 2 and Layer 3 network functionality is required. These locations will generally be Environmental Controlled Field HUBs, TMC equipment rooms, and control rooms. Where Layer 3 Network Switching is required but Environmental Control is not available, Environmentally Hardened Type Layer 3 switches shall be provided. In addition to meeting the general network Requirements, Layer 3 Switches have the following additional Requirements:

1) Each switch shall provide Layer 2 and Layer 3 switching and routing services.
2) Each switch shall meet the IEEE 802.1d (Virtual Bridge) standard.
3) Each switch shall meet the IEEE 802.1x (authentication) standard.
4) Access Control Lists (ACLs)
5) IPv4 and IPv6 multicast
6) IP Service-Level Agreement (IP SLA)
7) Open Shortest Path First (OSPFv2 and OSPFv3)
8) Border Gateway Protocol (BGP)

9) Enhanced Interior Gateway Routing Protocol (EIGRP)

907-663.02.1.2.1--Type C Network Switch Requirements. The Type C network switch, which is a base core switch, will be installed in the communication hubs and shall meet the following requirements:

1) Each switch shall be populated with modules including the following features and capabilities:
   a. Minimum of 64Gbps/48Mpps module Bandwidth
   b. Minimum of 8-GE uplink ports available per network switch assembly. The Contractor shall provide an uplink SFP optical module compatible with the interface for the uplink as indicated in the Location & Configuration of Communication Nodes notice to bidders for each uplink
   c. In one (or more) modules: 24 Ethernet 10/100/1000 RJ-45 ports
2) Optical receiver maximum input power level shall not be exceeded.
3) Optical attenuators shall be added as needed; fiber optic attenuator patch cords shall be in accordance with Section 657 of the Standard Specifications. It is the Contractor's responsibility to determine where attenuators are needed and shall be included in the cost of the switch.
4) 19" rack mountable.
5) Supports 10 gigabit ethernet of SFP optics.
6) NEBS Level 3 compliant.
7) Meet the requirements of :
   a. IEEE 802.3z
   b. IEEE 802.3ab
   c. IEEE 802.1Q
   d. GR-20-CORE: Generic requirements for Optical Fiber and Optical Fiber Cable
   e. GR-326-CORE: Generic Requirements for Singlemode
8) Full implementation of BGPv4 protocol as outlined by RFCs: 4271, 6286, 6608, 6793, 7606, 7705, 8212
9) Full implementation of OSPF protocol as outlined by RFCs: 2178, 1583, 1587, 1745, 1765, 1850, 2154, 2328, 1850, 1997, 2385, 2439, 2842, 2918, 2370.
10) Capable of mirroring any port to any other port within the switch.
11) Password manageable through:
   a. SSH (Secure Shell)
12) Full implementation of MLD (Multicast Listener Discovery).
13) Full implementation of IGMPv2.
14) Full implementation of PIM-SM and PIM-DM.
15) Comply with FCC 47 CRF Part 15 Class A emissions.
16) Bandwidth flow rate limiting policing support per port.
17) Full security implementation of
   a. Support SSH, 802.1x (rel 2)
   b. Access Control Lists (ACL's)
   c. RADIUS authentication
   d. TACACS+ authentication
18) The power supply units shall be hot swappable.

907-663.02.1.2.1.1--Type C1 Network Switch Requirements. The Type C1 network switch will be installed in communication hubs where a maximum total of 4 pair/(8 strands) of fiber optic cable will be actively in use or in environmentally controlled wireless towers and shall meet the following requirements:

1) Each switch shall be populated with an 4-port SFP gigabit ethernet module and also include the following features and capabilities:
   a. Minimum of 88Gbps Switching Capacity and 480Gbps Stacking Bandwidth
   b. In one (or more) Fiber SFP-based module(s): a minimum of 8 1000Base-X (SFP-based) compatible access ports which may also be used as uplink ports. The Contractor shall provide whichever is greater between a minimum number of SFP optic modules to interface to the fiber as indicated in the plans and NTBs, or a minimum of eight (8) and shall meet the following minimum requirements:
      i. Optical budget of 18dB
      ii. Switch shall be stackable and contain dual power supplies
      iii. Same optical wavelength as Type A & B switches
      iv. Same optical transmitter power as Type A & B switches
2) Non-Chassis based switch
3) Operate from 23° to 113°F.
4) RIPng, OSPFv6, and EIGRPv6 support
5) Full implementation of GMRP (Generic Multicast Registration Protocol).
6) Have redundant power supplies installed.

907-663.02.1.2.1.2--Type C2 Network Switch Requirements. The Type C2 network switch will be installed in the Communication Hubs where a minimum total of 5 pair/ (10 strands) of fiber optic cable will be actively in use. This type switch may also be installed in environmentally controlled wireless towers if the minimum total of 5 pair/(10 strands) fiber optic cable in-use rule applies. This type switch shall also meet the following requirements:

1) Each switch shall be populated with three (3) modules including the following features and capabilities:
   a. In one (or more) Fiber SFP-based module(s): a minimum of 48 1000Base-X (SFP-based) compatible access ports and a minimum of 8 1000Base-X (SFP-based) uplink ports. The Contractor shall provide whichever is greater between a minimum number of SFP optic modules to interface to the fiber as indicated in the plans and NTBs, or a minimum of 14 and shall meet the following minimum requirements:
      i. Optical budget of 18dB
      ii. Hot-swappable network modules
      iii. Same optical wavelength as Type A & B switches
      iv. Same optical transmitter power as Type A & B switches
2) Operate from 10 to 90% non-condensing humidity
3) Operate from 32° to 104°F.
4) Designed as a chassis with easy to remove modules.
5) Chassis backplane shall be passive.
6) All modules shall be hot-swappable.
7) Must have installed redundant power supplies in which each supports a minimum of 4200 watts.

8) Switch assembly shall have a minimum of three (3) module slots.
9) Blank covers for all remaining slots.

907-663.02.1.2.1.3--Type C3 Network Switch Requirements. The Type C3 network switch will be installed in the communication hubs where a minimum total of 5 pair/(10 strands) of fiber optic cable will be actively in use. This type switch may also be installed in environmentally controlled wireless towers if the minimum total of 5 pair/(10 strands) fiber optic cable in-use rule applies. This type switch shall also meet the following requirements:

1) Each switch shall be populated with modules including the following features and capabilities:
    a. Redundant Layer 2/3 switching and routing services
    b. In one (or more) Fiber SFP-based module(s): a minimum of 48 1000Base-X (SFP-based) compatible access ports and a minimum of 8 1000Base-X (SFP-based) uplink ports. The Contractor shall provide whichever is greater between a minimum number of SFP optic modules to interface to the fiber as indicated in the plans and NTBs, or a minimum of 14 and shall meet the following minimum requirements:
        i. Optical budget of 18dB
        ii. Hot-swappable network modules
        iii. Same optical wavelength as Type A & B switches
        iv. Same optical transmitter power as Type A & B switches
2) Operate from 32° to 104°F.
3) Operate from 10 to 90% non-condensing humidity
4) Designed as a chassis with easy to remove modules.
5) Chassis backplane shall be passive.
6) All modules shall be hot-swappable.
7) Must have installed redundant power supplies in which each supports a minimum of 4200 watts.
8) Switch assembly shall have a minimum of 6 module slots.
9) Blank covers for all remaining slots.

907-663.02.1.2.1.4--Type C4 Network Switch Requirements. The Type C4 network switch will be installed in the communication hubs where no less than 21 pairs/(42 strands) of fiber optic cables will be active and in use and shall meet the following requirements:

1) Each switch shall be populated with modules including the following features and capabilities:
    a. Redundant Layer 2/3 switching and routing services
    b. The switch chassis shall be capable of accommodating up to 440 Gbps per slot.
    c. In one (or more) Fiber SFP-based module(s): a minimum of 48 1000Base-X (SFP-based) compatible access ports and a minimum of 8 1000Base-X (SFP-based) uplink ports. The Contractor shall provide whichever is greater between a minimum number of SFP optic modules to interface to the fiber as indicated in the plans and NTBs, or a minimum of 14 and shall meet the following minimum requirements:
        i. Optical budget of 18dB
        ii. Hot-swappable network modules
        iii. Same optical wavelength as Type A & B switches

iv. Same optical transmitter power as Type A & B switches

2) Operate from 32° to 104°F.
3) Supports relative humidity - Ambient (noncondensing) operating: 5% to 90%
4) Designed as a chassis with easy to remove modules.
5) Chassis backplane shall be passive.
6) All modules shall be hot-swappable.
7) Must have installed dual-redundant (4) power supplies in which each supports a minimum of 3000 watts.
8) Switch assembly shall have a minimum of seven (7) module slots.
9) Blank covers for all remaining slots.

907-663.02.1.2.2--Type D Network Switch Requirements. The Type D network switch shall be of chassis design. The switch shall be able to accept a minimum of four (4) different types of modular cards. The Type D network switch shall meet the minimum requirements specified below:

1) The switch shall be chassis designed with a minimum of four (4) module slots.
2) Each switch shall be able to accept the following type modules:
   a. Ethernet module:
      i. A minimum number of six (6) 10/100Base-TX compatible RJ45 ports.
      ii. The Contractor shall provide the minimum number of modules necessary to meet or exceed the required number of ports as indicated in the plans and NTBs.
      iii. Total required bandwidth per chassis shall not exceed 10 Gbps
   b. Fiber based modules:
      i. The module shall accept SFP type fiber modules.
      ii. The Contractor shall supply any necessary fiber modules that meet the requirements of speed, type of fiber, and link budget connection.
      iii. The Contractor shall provide the minimum number of modules necessary to meet or exceed the required number of ports as indicated in the plans and NTBs.
   c. WAN module:
      i. T1, DS3 or Metro Ethernet Interface (as per NTB or project plans)
         1) The Interface shall be T1, DS3 or Metro Ethernet
         2) The ports shall connect via RJ45 connector.
      ii. Cellular Interface
         1) Contractor shall provide information to the Project Engineer to enable activation of the modem.
         2) Contractor shall get prior approval from the Project Engineer on selection of cellular radio type (HSPA/EVDO)
   d. Terminal Server module:
      i. Module that meets terminal server requirements Subsection 663.02.6
   e. Power Supply module:
      i. The power module provided shall be "screw terminal block" type. No pluggable terminal block.
      ii. Input power: Same as Type A and Type B switches.
      iii. Power module shall be hot-swappable.
      iv. The Contractor shall supply the necessary amount of power supplies to meet power requirements for all cards installed and the chassis itself

3) Software license shall be provided to match functionality of installed modules.
4) Shall be DIN or Panel mountable.
5) Password manageable through:
    a. SSHv2 (Secure Shell)
6) Full implementation of VRRP.
7) Comply with FCC 47 CRF Part 15 Class A emissions.
8) Bandwidth flow rate limiting policing support per port.
9) Full security implementation of
    a. Support SSH2, 802.1x (rel 2)
    b. Access Control Lists (ACL's)
    c. RADIUS
10) Blank covers for all remaining slots.
11) Electronic surfaces shall be covered with conformal coating for additional environmental protection.

907-663.02.1.2.3--Type E Network Switch Requirements. The Type E network switch will be installed in locations where multiple backbone fibers converge or high concentration of ports are needed for a field location but need a hardened switch and shall meet the following requirements:

1) Each switch shall be populated with redundant switch fabric modules that meet the following minimum requirements:
    a. Minimum of 2-GE uplinks available per card with a minimum capability to expand to eight (8). The Contractor shall provide an uplink SFP optical module compatible with the interface for the uplink as indicated in the Notice to Bidders entitled "Location & Configuration of Communication Nodes" for each uplink.
2) The Contractor will need to determine port count configuration based on the project plans for the Type E switch. Optical interfaces shall include 1000 Base-X (SFP-based module(s)) with a minimum of four (4) ports. The Contractor shall provide whichever is greater between a minimum number of SFP optic modules to interface to the fiber as indicated in the plans and NTBs, or a minimum of six (6) and shall have a minimum Optical budget of 18dB and be the same optical wavelength as Type A & B switches.
    a. Optical receiver maximum input power level shall not be exceeded.
    b. Optical attenuators shall be added as needed; fiber optic attenuator patch cords shall be in accordance with Section 657 of the Standard Specifications. It is the Contractor's responsibility to determine where attenuators are needed and shall be included in the cost of the switch.
3) Include a minimum of eight (8) Ethernet 10/100/1000 ports
4) Include a minimum of four (4) SFP ports must support 1000-Base-X/10 gigabit-ethernet-optics.
5) 19" rack mountable.
6) Chassis backplane shall be passive.
7) Meet the requirements of :
    a. IEEE 802.3z
    b. IEEE 802.3ah
    c. IEEE 802.1Q
    d. GR-20-CORE: Generic requirements for Optical Fiber and Optical Fiber Cable
    e. GR-326-CORE: Generic Requirements for Singlemode

8) Full implementation of BGPv4 protocol as outlined by RFCs: 4271, 6286, 6608, 6793, 7606, 7705, 8212
9) Full implementation of OSPF protocol as outlined by RFCs: 2178, 1583, 1587, 1745, 1765, 1850, 2154, 2328, 1850, 1997, 2385, 2439, 2842, 2918, 2370.
10) Capable of mirroring any port to any other port within the switch.
11) Password manageable through:
    a. SSHv2 (Secure Shell)
12) Full implementation of GMRP (Generic Multicast Registration Protocol).
13) Full implementation of IGMPv2.
14) Full implementation of PIM-SM and PIM-DM.
15) Full implementation of DVMRPv3.
16) Full implementation of VRRP.
17) Comply with FCC 47 CRF Part 15 Class A emissions.
18) Bandwidth flow rate limiting policing support per port.
19) Full security implementation of
    a. Support SSH2, 802.1x (rel 2)
    b. Access Control Lists (ACL's)
    c. RADIUS
    d. TACACS
20) Have redundant power supplies installed.
21) Blank covers for all remaining slots.
22) Have options or modules to add a terminal server as specified in Subsection 663.02.2
23) Have options or modules to add a cellular interface as specified in Subsection 663.02.3

907-663.02.1.2.3.1--Type E1 Network Switch Requirements. The Type E1 network switch will be installed in locations where multiple backbone fibers converge or a high concentration of ports are needed for a field location and a hardened switch is required and shall meet the following requirements:

1) Each switch shall be populated with redundant switch fabric modules that meet the following minimum requirements:
    a. 56 to 64Gbps switching bandwidth/41.67 mpps with 64byte packets
2) Based from the project plans, the Contractor must determine the appropriate configuration of port types and count by selecting one of the options below:
    a. Include a minimum of 12 10/100/1000 ethernet ports and a minimum of 16 optical 1000Base-X(SFP-Based).
    b. Include a minimum of 24 10/100/1000 ethernet ports and a minimum of 4 optical 1000 base-X (SFP-Based).
3) Operate from -45° to +75°C.
4) Operate relative humidity of 5% to 95% noncondensing

907-663.02.1.2.3.2--Type E2 Network Switch Requirements. The Type E2 network switch will be installed in locations where multiple backbone fibers converge or a high concentration of ports are needed for a field location, a hardened switch and larger bandwidth are needed, and shall meet the following requirements:

1) Each switch shall be populated with redundant switch fabric modules that meet the following minimum requirements:
   a. 128Gbps switching bandwidth/41.67 mpps with 64byte forwarding rate
2) Based from the project plans, the Contractor must determine the appropriate configuration of port types and count by selecting one of the options below:
   A. Include a minimum of 12 10/100/1000 ethernet ports and a minimum of 12 optical 1000Base-X(SFP-Based).
   B. Include a minimum of 12 10/100/1000 ethernet ports and a minimum of 16 optical 1000 base-X (SFP-Based).
3) Supports 10 gigabit ethernet of SFP optics.
4) Operate from -40° to +85°C.
5) Operate relative humidity of 0% to 95% noncondensing

907-663.02.1.2.4--Type F Network Switch Requirements. The Type F network switch will be Layer 3 switches installed in field locations with wireless communications or access points and shall meet the following requirements:

1) Each switch shall be populated with switch modules that meet the following minimum requirements:

   a. 20Gbps Aggregate Bandwidth
   b. Minimum of 4-GE uplinks available per switch with a minimum of 2 being fiber ports. The Contractor shall provide an uplink SFP optical module compatible with the interface for the uplink as indicated in the Notice to Bidders entitled "Location & Configuration of Communication Nodes" for each uplink.
   c. SD flash port for swappable Management Card configuration
   d. Supports High Density Power over Ethernet (PoE) for up to 8 devices
   e. Supports Cisco Common Industrial Protocol (CIP)
   f. Support of SCADA (Supervisory Control And Data Acquisition) connectivity.
   g. Can be supported with IP services.

2) In addition to the uplink ports, interfaces ports shall include:
   a. 8 PoE 10/100/1000
   b. 4 SFP ports
      i. Optical receiver maximum input power level shall not be exceeded.
      ii. Optical attenuators shall be added as needed; fiber optic attenuator patch cords shall be in accordance with Section 657 of the Standard Specifications. It is the Contractor's responsibility to determine where attenuators are needed and shall be included in the cost of the switch.
3) DIN Rail Mountable.
4) Operate from -40° to +70°C.
5) Operate from 5% to 95% non-condensing humidity
6) Supports IEEE 802.1AE MACsec, Security Group Access Control Lists (SGACL)
7) RIPng, OSPFv6, and EIGRPv6 support
8) Full implementation of IGMPv2.
9) Full implementation of PIM-SM and PIM-DM.
10) Supports Redundant DC input voltage

11) Power supplies with PoE support and 6' minimum power cord(s).

907-663.02.2--Terminal Server. Terminal server shall adhere to the following minimum requirements.

1) 10/100 Base-T Ethernet port connection
2) RJ-45/DB9 Serial port connection
3) RS-232/422/485 selectable serial connections
4) Baud rates up to 230 Kbps
5) Full Modem and hardware flow control
6) TCP/UDP Socket Services
7) UDP Multicast
8) Telnet and Reverse Telnet
9) Modem emulation
10) SNMP (Read/Write)
11) PPP
12) Port buffering
13) HTTP
14) Remote management
15) DHCP/RARP/ARP-Ping for IP address assignment
16) LED status for link and power
17) The terminal server shall support a minimum of four (4) bi-directional serial communications over Ethernet 10/100 Base-TX.
18) Each terminal server shall have a minimum of four (4) EIA-232/422/485 serial interface ports. These ports shall be individually and independently configurable, directly or over the network, to EIA-232/422/485 mode of operation as defined by the EIA for data format, data rate and data structure (e.g., the number of bits, parity, stop bits, etc.). Each serial port shall support up to 230 Kbps.
19) Each serial port shall support IP addressing and socket number selection.
20) The equipment shall provide the capability to establish an IP connection directly from a workstation to any encoder IP address and socket number transport serial data.
21) Each terminal server shall have an Ethernet Interface (10/100Base-TX protocol, Full/Half-Duplex, Auto Sense (802.3), RJ-45).

907-663.02.3--SD-WAN Router. The SD-WAN (Software Defined Wide Area Network) router supports next generation wide area networking leveraging multiple internet connection types. The SD-WAN router shall be the alternative selection instead of cellular modem communications to provide network communications to very small data networks to connect to the traffic management centers.

907-663.02.3.1--Functional Requirements. SD-WAN Router, antenna, wiring assemble, configuration software, and installation necessary shall be provided and furnished for a working cellular wireless communication connection in accordance with plans and specifications and compatible with the requirements of the MDOT system, and the wireless service carrier used by MDOT. Unless otherwise indicated on the plans, all items that are required to complete the installation and ensure an operational system shall be supplied by the Contractor whether listed above or not. Items required but not listed above shall be at no direct pay. All components supplied

by the Contractor are the responsibility of the Contractor. It shall be the responsibility of the Contractor to properly configure and deliver a working SD-WAN cellular communications system. It shall be the responsibility of the Contractor to determine the final configuration of all electrical connections. Cellular account setup shall be coordinated with MDOT Information Systems Division. Warranty and cellular carrier account shall be transferred into MDOT's name upon acceptance of the project.

907-663.02.3.2--SD-WAN Router System. The SD-WAN shall adhere to the following minimum requirements.

1) Each router shall meet the following minimum requirements:
   a. Layer 2/3 switching and routing services.
   b. Minimum of 250 Mbps bidirectional Throughput
   c. Minimum of Four 10/100BASE-T Fast Ethernet ports or better
   d. Minimum of 2 x GE RJ45 LAN ports
   e. Supports Cisco Common Industrial Protocol (CIP)
   f. Support of SCADA, DNP3, T101-104, Raw Socket TCP, and UDP.
   g. Provides LTE QoS with support for up to 8 concurrent bearers on each cellular WAN interface for traffic classification and prioritization.
   h. 1-year warranty, maintenance, and support.
   i. Dual active LTE backhaul with expansion module.
   j. Virtual Router Redundancy Protocol (VRRP) (RFC 2338)
   k. Hot Standby Router Protocol (HSRP)
   l. Dual SIM support on the LTE module for cellular failover
   m. IPv6 unicast and multicast forwarding.
   n. IPv6 ACLs
   o. IPv6 over cellular
   p. IPv6 routing

2) WAN Interfaces
   a. Combo 10/100/1000 Gigabit Ethernet port (RJ45 and SFP) on the base platform and additional 10/100/1000 Gigabit Ethernet SFP on the expansion module and include supported SFPs - *The Contractor shall provide an uplink SFP optical module compatible with the interface for the uplink as indicated in the Location & Configuration of communication Nodes notice to bidders for each uplink.*
   b. LTE: Modular with options for single and dual active LTE and LTE-Advanced
   c. LTE in United States supports 3 cellular companies AT&T, cSpire and Verizon.
   d. LTE bands 1-5, 7, 8, 12, 13, 20, 25, 26, 29, 30, and 41
   e. FDD LTE 700 MHz (band 12), 700 MHz (band 29), 800 MHz (band 20), 850 MHz (band 5 CLR), 850 MHz (band 26 Low), 900 MHz (band 8), 1800 MHz (band 3), 1900 MHz (band 2), 1900 MHz (PCS band 25), 1700 MHz and 2100 MHz (band 4 AWS), 2100 MHz (band 1), 2300 MHz (band 30), or 2600 MHz (band 7)
   f. TDD LTE 2500 MHz (band 41)
   g. Carrier aggregation band combinations: 1+8; 2+(2,5,12,13,29); 3+(7,20); 4+(4,5,12,13,29); 7+(7,20); 12+30, 5+30, and 41+41
   h. Theoretical download and upload speeds: 300 and 50 Mbps.

3) IPv4 and IPv6 services features
   a. Routing Information Protocol Versions 1 and 2 (RIPv1 and RIPv2)
   b. Generic Routing Encapsulation (GRE) and Multipoint GRE (MGRE)
   c. Standard 802.1d Spanning Tree Protocol (STP)
   d. Network Address Translation (NAT)
   e. Dynamic Host Configuration Protocol (DHCP) server, relay, and client
   f. Dynamic DNS (DDNS)
   g. DNS proxy
   h. DNS spoofing
   i. Access Control Lists (ACLs)
   j. IPv4 and IPv6 multicast
   k. IP Service-Level Agreement (IP SLA)
   l. Open Shortest Path First (OSPFv2 and OSPFv3)
   m. Border Gateway Protocol (BGP)
   n. Enhanced Interior Gateway Routing Protocol (EIGRP)
   o. Virtual Route Forwarding (VRF) Lite
   p. Next-Hop Resolution Protocol (NHRP)
   q. Serial data encapsulation and relay
   r. L2TPv3 over sub-interfaces and VLAN

907-663.02.3.3--Environmental Characteristic. Environmental operating temperature ranges shall be as follows.

a. Operate from –40 to 140°F (–40 to 60°C) in a sealed NEMA cabinet with no airflow.
b. Operate from –40 to 158°F (–40 to 70°C) in a vented cabinet with 40 Linear Feet per Minute (LFM) of air
c. Operate from –40 to 167°F (–40 to 75°C) in a forced air enclosure with 200 LFM of air type tested at 85°C for 16 hours
d. Optical receiver maximum input power level shall not be exceeded.
e. Optical attenuators shall be added as needed.
f. Fiber optic attenuator patch cords shall be in accordance with Section 657 of the Mississippi Standard Specifications for Road and Bridge Construction. It is the Contractor's responsibility to determine where attenuators are needed and shall be included in the cost of the switch

907-663.02.4--Ethernet Network Cable. Ethernet network cables shall adhere to the following minimum requirements.

1) 4 Pair #24 AWG STP Category 6, Category 5e, or other ethernet cable (generally meeting Category 6 Specifications, the applicable requirements of Subsection 722.03 and approved by MDOT) as per manufacturer's recommendations.
2) These items are paid for as ethernet network cable installed between cabinets and does not apply to other patch cords installed inside cabinets or huts.
3) Supplied ethernet network cable shall be suitable for use outdoors in ducts and as a minimum meet the following requirements:
   a. Fully water blocked
   b. Conforms to the National Electrical Code Article 800

c. UL 1581 certified
d. Voltage Rating 300 Volts or greater
e. Operating and installation temperature (-4°F to 140°F)
f. The allowable bend radius must be 10 times the Cable's Outside Diameter or smaller
g. Recommended for 1000Base-T applications for a distance of 100 meters.

907-663.02.4.1--Ethernet Patch Cords. The ethernet patch cords shall be furnished and installed as needed to connect the network switches with other equipment. Ethernet patch cords shall be considered an incidental component for this project and furnished and installed as needed to provide a functional system. Ethernet patch cords shall meet the following minimum requirements:

1) All patch cords shall be from the same manufacturer.
2) Shall incorporate four (4) pair 24 AWG stranded PVC Category 6, Category 5e, or other Ethernet cable (generally meeting Category 6 Specifications and approved by MDOT) as required by the manufacturer.
3) Shall be factory made; Contractor or vendor assembled patch cords are not permitted.
4) Shall be TIA/EIA 568-B.2-1 compliant. Patch Cords shall be compliant to T568B pin configuration (which ever is used).
5) Certified by the manufacturer for Category 5e or Category 6 performance criteria.
6) Length as needed. Excessive slack is not permitted.

907-663.02.5--Submittals. The submittal requirements defined in the Notice to Bidders entitled "ITS General Requirements", along with the requirements below and throughout this specification, shall be met. All costs associated with submittals shall be included in the overall contract price; no separate payment will be made for any documenting and submitting.

The Contractor shall provide project submittals for network switches including scheduling requirements. The project submittals for network switches, terminal servers, cellular modems, and fiber optic modems shall include but are not limited to the specific requirements in this subsection.

1) The Contractor shall submit detailed cut sheets which document compliance with all parameters required in this section. If a parameter is not covered in the cut sheet a signed statement from the manufacturer on letterhead shall be submitted as an attachment. Failure to address all requirements will result in rejection of the submittal.
2) The Contractor shall submit documentation and proof of manufacturer-recommended training and certification for the installation and configuration of network switches.
3) The Contractor shall submit technical specifications for the minimum transmitter port to receiver port optical attenuation required for the switches to function in accordance with this specification for the optical links shown on the plans.

907-663.03--Construction Requirements. All networking equipment shall be installed according to the manufacturer's recommendations, the Plans and as follows:

1) Network switches shall only be configured and installed by the switch manufacturer trained personnel.

2) Network switches shall be installed in accordance with manufacturer's guidelines and requirements.
3) The Contractor shall request from the Department, switch configuration information (such as IP address, VLAN Tag values, etc.) not more than 30 days after the switch submittals have been approved.
4) The Contractor shall provide as needed the necessary Ethernet patch cords and fiber optic patch cords for a complete and functional installation.
5) Ethernet network cable installed in conduit shall be installed and terminated per the manufacturers recommended procedures. Slack Ethernet network cable shall be provided in pullboxes as indicated in the plans.
6) The Contractor shall provide training for proper management of the equipment installed. This training should cover daily operation as well as maintenance and configuration of the switching equipment installed as part of this project and meet the requirements of Subsection 663.03.4 of this document.
7) The Contractor shall provide the MDOT with a written inventory of items received and the condition in which they were received. Inventory shall be inclusive of make, model, and serial numbers, MAC address, and installation GPS coordinates. All equipment shall be installed according to the manufacturer's recommendations or as directed by the MDOT.
8) Any new, additional or updated drivers required for the existing ATMS software to communicate and control new networking equipment installed by the Contractor shall be the responsibility of the Contractor.

907-663.03.1--Switch Configuration Requirements. The Contractor shall configure network switches as follows:

1) All 100 Base-TX ports shall be configured as follows:
   a. RSTP/STP – Off.
   b. Unused TX ports shall be disabled.
   c. Operating TX ports shall be programmed to filter only for the MAC address of the connected device.
2) All 1000 Base-FX ports shall be configured as follows:
   a. RSTP/STP – On.
   b. IGMP Snooping – On.
3) The Type D switch configuration shall be as outline in the Project plans and details.
4) All network switches shall be installed and configured with the same firmware configuration. The optimum settings shall be used consistently system-wide. Any locations that require different settings for optimum performance shall be approved by the Engineer.
5) The Switches shall be configured to enable multicasting and turn on multicast protocols.
6) The Contractor may submit an alternate switch configuration to the ITS Engineer for review and approval. The ITS Engineer will review alternate switch configuration documentation. The goal of the switch configuration is to reduce the network delay, as well as provide network redundancy.
7) The Contractor shall submit an electronic copy of all final and approved configurations of all switches to the Project Engineer and to the ITS Engineer.

907-663.03.2--Testing. All networking equipment shall undergo testing to verify conformance to requirements of the plans and these special provisions. The Contractor shall conduct a Project

Testing Program as required in the Notice to Bidders entitled "ITS General Requirements." All costs associated with the Project Testing Program shall be included in the overall contract price; no separate payment will be made for any testing.

907-663.03.3--Documentation. As-built Plans showing switch configuration and connections shall be provided to the Project Engineer and ITS Engineer in electronic format.

The Contractor shall submit documentation and proof of measured optical power budgets to all optical links of all type switches. All equipment and software must be fully functional and pass a Final Inspection by the ITS Manager and Project Engineer before being accepted by the MDOT

907-663.03.4--Warranty At a minimum, the warranty requirements defined in the Notice to Bidders entitled "ITS General Requirements" or this specification, whichever is longer, shall be met. All costs associated with the warranty requirements shall be included in the overall contract price.

907-663.03.5--Training. The minimum training requirements shall be as defined in the Notice to Bidders entitled "ITS General Requirements."

907-663.03.6--Quality Assurance. The quality assurance requirements defined in the Notice to Bidders entitled "ITS General Requirements" shall be met. All costs associated with the quality assurance requirements shall be included in the overall contract price.

907-663.04--Method of Measurement. Network switches of the type specified will be measured per each installation as specified in the Project plans. Such measurement shall be inclusive of furnishing, installing, system integration and testing of a network switch including all chassis, modules, power cables, power supplies, software, license, fiber optic patch cords, fiber optic attenuator patch cords, Ethernet patch cords and all incidental components, attachment hardware, mounting shelf and hardware, testing requirements, warranties and all work, equipment and appurtenances as required to provide a fully functional switch ready for use. Type C, Type D, and Type E network switch module cards shall be specified per Project plans or NTBs for each site location. It shall also include all system documentation including: shop drawings, operations and maintenance manuals, wiring diagrams, block diagrams, and other material necessary to document the operation of the switch and network.

Terminal server will be measured per each installation. Such measurement shall be inclusive of furnishing, installing, system integration and testing of a Terminal Server including all incidental components, attachment hardware, mounting shelf and hardware, testing requirements, warranties, and all work, equipment and appurtenances as required to provide a fully functional Terminal Server ready for use.

SD-WAN Routers shall be measured per each and will include the, router, antenna, reset timers, cabling, factory and manufacturing inspection, testing, storage, packaging, shipping, warranty, and all work, equipment, and appurtenances as required to effect the full operation and control of the SD-WAN Router complete in place and ready for use.

Ethernet network cable, installed in conduit, will be measured by the linear foot, and shall be obtained by accurate measurement of the runs including horizontally, vertically, aerially along the messenger cable, from the device to the device cabinet, and with liberal allowances made for slack in boxes, as indicated in the plans.

Network equipment training shall be measured as a lump sum which shall include all coordination, materials, labor, training location costs, and all incidentals required to complete the training as described in the Notice to Bidders entitled "ITS General Requirements."

907-663.05--Basis of Payment. Network Switches, Terminal Servers, SD-WAN Routers and Fiber Optic Modems, measured as prescribed above, will be paid for at the contract unit price bid per each. The price shall be full compensation for documentation and submittals, warranties, testing, all labor, tools, materials, equipment, quality assurance, and all incidentals necessary to complete the work.

Ethernet network cable installed between cabinets will be paid for by linear foot measured horizontally.

Network equipment training, measured as prescribed above, will be paid for at the contract unit lump sum price, which price shall be full compensation for all training costs including coordination, materials, labor, training location costs, submittals, and all incidentals required to complete the training as described in the Notice to Bidders entitled "ITS General Requirements."

Payment will be made under:

907-663-A:	Network Switch, Type __	- per each
907-663-B:	Terminal Server	- per each
907-663-C	SD-WAN Router	- per each
907-663-D:	Ethernet Network Cable, Installed in Conduit	- per linear foot
907-663-E:	Network Equipment Training	- lump sum

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-700-3 **CODE: (IS)**

DATE: 4/20/2026

SUBJECT: Materials and Tests

Section 700, Materials and Tests, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

Delete fourth, fifth, sixth, and seventh paragraph of Subsection 700.01 on page 713, and add the following.

907-700.01.1--Buy America/Build America. Buy America (BABA) Requirements.

Iron or Steel Products. Iron or steel or wire products (including prestressed cables and strands) are products that consist wholly or predominantly of iron or steel or a combination of both.

Predominantly of iron or steel or a combination of both means that the cost of the iron and steel content exceeds 50 percent of the total cost of all components. The cost of iron and steel is the cost of the iron or steel mill products (such as bar, billet, slab, wire, plate, or sheet), castings, or forgings utilized in the manufacture of the product and a good faith estimate of the cost of the iron and steel components.

Iron or steel or wire products, as described above, that are permanently incorporated into a construction project must be produced domestically. All manufacturing processes for iron or steel or wire products, from the initial melting stage through the application of coatings, that are permanently incorporated into a construction project, must occur domestically. However, pig iron and processed, pelletized, and reduced iron ore manufactured outside of the United States may be used in the domestic manufacturing process for iron and/or steel and/or wire products. Coating includes all processes that protect or enhance the value of the material to which the coating is applied.

Construction Materials. Construction materials are articles, materials, or supplies that consist of only one of the items listed (non-ferrous metals, plastic and polymer-based products, glass, fiber-optic cables (including drop cables), optical fibers, lumber, drywall, and engineered woods). Minor additions of articles, materials, supplies, or binding agents to a construction material do not change the categorization of the construction material. All manufacturing processes for the listed construction materials, from the initial processes as described within 2 CFR 184.6 to the final processes as described within 2 CFR 184.6, that are permanently incorporated into a construction project, must occur domestically.

Manufactured Products. Manufactured products are articles, materials, or supplies that have been processed into a specific form or shape; or when combined with other articles, materials, or supplies create a product with different properties than the individual articles, materials, or supplies. An item that is classified as an iron or steel product, a construction material, or an excluded material is not a manufactured product. However, an article, material, or supply classified as a manufactured product

may include components that are iron or steel products, excluded materials, or other product categories as specified by law or in 2 CFR part 184. Mixtures of excluded materials delivered to a work site without final form for incorporation into a project are not a manufactured product. For construction projects obligated on or after October 1, 2025, the manufactured product must be manufactured domestically. For construction projects obligated on or after October 1, 2026, the manufactured product must be manufactured domestically and the cost of the components of the manufactured product that are mined, produced, or manufactured domestically is greater than 55 percent of the total cost of all components of the manufactured product.

Excluded Materials. Excluded materials, as listed in Section 70917(c) of the Build America, Buy America (BABA) Act, are cement and cementitious materials; aggregates such as stone, sand, or gravel; or aggregate binding agents or additives. However, an article, material, or supply classified as a manufactured product may include components that are iron or steel products, excluded materials, or other product categories as specified by law or in 2 CFR part 184. Mixtures of excluded materials delivered to a work site without final form for incorporation into a project are not a manufactured product.

Domestically shall be understood to mean all States of the United States, District of Columbia, Puerto Rico, American Samoa, Guam, and Virgin Islands and any other place subject to the jurisdiction of the United States.

907-700.01.2—Certificate of Compliance Requirements. Prior to incorporation into the work, the Contractor shall furnish the Project Engineer with a Domestic Materials Self-Certification Form documenting conformance to the requirements of Subsection 907-106.14. Attached hereto is the Domestic Materials Self-Certification Form that shall be furnished by the Contractor to the Project Engineer.

Domestic Materials
Self-Certification Form

This certification is for a manufacturer/supplier to certify the below articles, materials, or supplies are in compliance with the applicable domestic material content procurement preferences found in the Buy America Act requirements (23 CFR 635.410) and the Build America, Buy America Act (BABA) requirements (2 CFR part 184). The individual completing this form takes full responsibility for the information included in the form. State agencies have the authority to request additional details related to the information provided in the form. All forms shall be submitted via AASHTO DataMine for delivery to authorized governmental users through the Industry Document Repository. The manufacturer/supplier is required to include updates to process changes within 10 days of the change occurring via uploading a revised form into DataMine.

PART 1: COMPANY CONTACT INFORMATION

Company/Producer/Manufacturer Name:

Supplier Representative Name:

Contact Email Address: Contact Phone Number:

Date Form is Being Submitted: mm/dd/yyyy

PART 2: DETAILS OF THE ARTICLE, MATERIAL, OR SUPPLY:

Using Table 1 below, provide the classification of the article, material, or supply as one of the following: (1) iron or steel product; (2) construction material (3) manufactured product; or (4) excluded materials including Section 70917(c) materials.

Classification	
Producer of the Article, Material, or Supply:	
Product/Model/Part/Material:	
Manufacturing Address:	
Manufacturing City:	
Manufacturing State:	
Manufacturing Zip Code:	
DataMine # (if applicable):	
Federal/State/Local Project number(s):	
Pay Code Number (PCN):	
Project Item code:	
Project Item Description:	
Quantity Certified:	

TABLE 1: Material Classifications

(1) Iron or Steel Product	
Wholly or predominantly Iron or Steel, or a combination of both (23 CFR 635.410(b)(1)(ii))	Certification requires predominantly of iron or steel or a combination of both means that the cost of the iron and steel content exceeds 50 percent of the total cost of all its components. The cost of iron and steel is the cost of the iron or steel mill products (such as bar, billet, slab, wire, plate, or sheet), castings, or forgings utilized in the manufacture of the product and a good faith estimate of the cost of iron or steel components.
(2) Construction Material	
Non-Ferrous Metals (2 CFR 184.6(a)(1))	Certification requires all manufacturing processes, from initial smelting or melting through final shaping, coating, and assembly, occurred in the United States.
Plastic and Polymer based products (including polyvinyl chloride, composite building materials, and polymers used in fiber optic cables) (2 CFR 184.6(a)(2))	Certification requires all manufacturing processes, from initial combination of constituent plastic or polymer-based inputs, or where applicable, constituent composite materials, until the item is in its final form, occurred in the United States.
Glass (including optic glass) (2 CFR 184.6(a)(3))	Certification requires all manufacturing processes, from initial batching and melting of raw materials through annealing, cooling, and cutting, occurred in the United States.
Fiber Optic Cable (including drop cable) (2 CFR 184.6(a)(4))	Certification requires all manufacturing processes, from the initial ribboning (if applicable), through buffering, fiber stranding and jacking, occurred in the United States. All manufacturing processes also include the standards for glass and optical fiber, but not for non-ferrous metals, plastics and polymer-based products, or any others.
Optical Fiber (2 CFR 184.6(a)(5))	Certification requires all manufacturing processes, from the initial preform fabrication stage through the completion of the draw, occurred in the United States
Lumber (2 CFR 184.6(a)(6))	Certification requires all manufacturing processes, from initial debarking through treatment and planing, occurred in the United States.
Drywall (2 CFR 184.6(a)(7))	Certification requires all manufacturing processes, from initial blending of mined or synthetic gypsum plaster and additives through cutting and drying of sandwiched panels, occurred in the United States.
Engineered Wood (2 CFR 184.6(a)(8))	Certification requires all manufacturing processes, from initial combination of constituent materials until the wood product is in its final form, occurred in the United States.
(3) Manufactured Product	
Manufactured Products other than Precast Concrete Products and Intelligent Transportation Systems and Other Electronic Hardware Systems Installed on the Highway ROW or Other Real Property (23 CFR 635.410(c)(1)(vii)) and 23 CFR 635.410(c)(1)(iv)	• Certification requires for projects obligated before October 1, 2025, no certification is required (excludes EV chargers). • Certification requires for projects obligated on or after October 1, 2025, certification requires the final manufacturing process occurred in the United States (excludes EV chargers). • Certification requires for projects obligated on or after October 1, 2026, and all EV chargers , certification requires the final manufacturing process occurred in the United States and the cost of the components that are mined,

	produced, or manufactured in the United States is greater than 55 percent of the total cost of all components of the manufactured product.
Precast Concrete Products (23 CFR 635.410(c)(2)(i))	Classified as a manufactured product must comply with both the wholly or predominantly iron or steel or a combination of both product and manufactured product certification requirements as stated above.
Intelligent Transportation Systems and Other Electronic Hardware Systems Installed on the Highway ROW or Other Real Property (23 CFR 635.410(c)(2)(ii))	Classified as a manufactured product must comply with both the wholly or predominantly iron or steel or a combination of both product certification requirements for any iron or steel enclosures as well as the manufacturing certification requirements as stated above.
(4) Excluded Materials	
Excluded Materials Including Section 70917(c) Materials (23 CFR 635.410(c)(1)(ii))	No certification is required for excluded materials including Section 70917(c) materials. Section 70917(c) materials means cement and cementitious materials; aggregates such as stone, sand, or gravel; or aggregate binding agents or additives.

PART 3: DECLARATION OF SUBMITTAL

Do the articles, materials, or supplies submitted in this form comply with applicable domestic materials content procurement preferences found in the Buy America Act requirements (23 CFR 635.410) and the Build America, Buy America Act requirements (2 CFR part 184) (Y/N)? _____

PART 4: CERTIFICATION (Read and check all boxes before signing)
Note: State Departments of Transportation may have different language requirements for this section.

☐ I certify that the description above is a true and accurate description of the article, material, or supply provided, and that the undersigned is in a position to legally bind the Company/Organization represented in this form.

☐ I certify that the iron or steel product, construction material, or manufactured product complies with the applicable Buy America or BABA requirements.

Signature: Date: mm/dd/yyyy

Printed Name:
Title:
Company/Organization:
Company/Organization address:

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SUPPLEMENT TO SPECIAL PROVISION NO. 907-701-4

DATE: 11/05/2024

SUBJECT: Hydraulic Cement

907-701.04--Blended Hydraulic Cement.

907-701.04.1--Types of Blended Hydraulic Cement. After the last paragraph of Subsection 907-701.04.1 on page 1, add the following.

Blended cement Types IL meeting the "HE" high early strength requirement listed in AASHTO M 240, Table 3 shall have the "(HE)" suffix added to the type designation.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-701-4 **CODE: (IS)**

DATE: 11/21/2023

SUBJECT: Hydraulic Cement

Section 701, Hydraulic Cement, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

907-701.01--General. In the first sentence of the second paragraph of Subsection 701.01 on page 718, change "mills" to "plants."

In the second sentence of the sixth paragraph of Subsection 701.01 on pages 718 and 719, change "shall" to "will."

907-701.02--Portland Cement.

907-701.02.1-General. Delete Subsections 701.02.1.1, 701.02.1.2, 701.02.2, 701.02.2.1, and 701.02.2.2 on pages 719 and 720, and substitute the following.

907-701.02.1.1--Types of Portland Cement. Portland cement shall be either Type I, Type II, or Type III conforming to AASHTO M85 or Type III (MS). Type III (MS) is defined as a Type III cement conforming to AASHTO M85 having a maximum tricalcium aluminate (C_3A) content of 8%.

907-701.02.2--Blank.

907-701.02.2.1--Blank.

907-701.02.2.2--Blank.

Delete Subsection 701.04 on pages 720 and 721, and substitute the following.

907-701.04--Blended Hydraulic Cement.

907-701.04.1--Types of Blended Hydraulic Cement. Blended hydraulic cements (blended cements) shall be of the following types and conform to AASHTO M 240:

Type IL – Portland-limestone cement
Type IP – Portland-pozzolan cement
Type IS – Portland blast-furnace slag cement

Blended cement Types IL, IP, and IS meeting the "MS" sulfate resistance requirement listed in AASHTO M 240, Table 3 shall have the "(MS)" suffix added to the type designation.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-702-4 **CODE: (IS)**

DATE: 09/11/2018

SUBJECT: Bituminous Materials

Section 702, Bituminous Materials, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

907-702.04--Sampling. Delete the sentence in Subsection 702.04 on page 722, and substitute the following.

Sampling of bituminous materials shall be as set out in AASHTO R 66.

907-702.07--Emulsified Asphalt. Delete the last sentence in Subsection 702.07 on page 724, and substitute the following.

Asphalt for fog seal shall conform to the requirements of Subsection 907-702.12, Table V.

907-702.12--Tables. Delete Table V in Subsection 702.12 on page 729, and substitute the following.

TABLE V
SPECIFICATION FOR FOG SEAL

	LD-7		CHPF-1		
Test Requirements	**Min.**	**Max.**	**Min.**	**Max.**	**Test Method**
Viscosity, Saybolt Furol, @ 25°C, Sec.	10	100	-	100	AASHTO T 72
Storage Stability Test, 24 hr, %	-	1	-	1	AASHTO T 59
Settlement, 5 day, %	-	5	-	-	AASHTO T 59
Oil Distillate, %	-	1	-	-	AASHTO T 59
Sieve Test, % *	-	0.3	-	0.1	AASHTO T 59
Residue by Distillation, %	40	-	40	-	AASHTO T 59
Test on Residue from Distillation					
Penetration @ 25°C, 100g, 5 sec	-	20	40	90	AASHTO T 49
Softening Point, °C	65	-	-	-	ASTM D 36
Solubility in trichloroethylene, %	97.5	-	-	-	AASHTO T 44
Elastic Recovery @ 25°C, %	-	-	40	-	AASHTO T 301
Original DSR @ 82° (G*/Sinδ, 10 rad/sec)	1	-	-	-	AASHTO T 111

* The Sieve Test result is tested for reporting purposes only and may be waived if no application problems are present in the field.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-703-2 **CODE: (SP)**

DATE: 11/29/2022

SUBJECT: Gradation

Section 703, Aggregates, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

907-703.03--Coarse Aggregates for Hydraulic Cement Concrete.

907-703.03.2--Detail Requirements.

907-703.03.2.4--Gradation. In the table in Subsection 703.03.2.4 on page 734, add 100 for the percent passing by weight on the 1½-inch sieve for Size No. 67 aggregates.

Delete Note 2 under the table in Subsection 703.03.2.4 on page 734, and substitute the following.

Note [2] – 100 percent shall pass the 1-inch sieve for Size 67 used in Class F and Class FX concrete.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-705-1 **CODE: (IS)**

DATE: 06/13/2018

SUBJECT: Stone Riprap

Section 705, Stone Blanket Protection and Filter Blanket Materials, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

907-705.04--Stone Riprap. Delete the last sentence of the first paragraph of Subsection 705.04 on page 750, and substitute the following.

Quality requirements for rock to be furnished under these specifications will come from a pre-approved source and be visually approved prior to use.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-707-3 **CODE: (IS)**

DATE: **10/27/2021**

SUBJECT: **Joint Materials**

Section 707, Joint Materials, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

907-707.02--Joint Filler.

907-707.02.2--Preformed Sponge, Rubber, Cork and Closed-Cell Polypropylene Foam Joint Fillers for concrete Paving and Structural Constructions. Delete the two paragraphs of Subsection 707.02.2 on page 755, and substitute the following.

Preformed joint filler shall conform to AASHTO M 153 for sponge, rubber, and cork and tested according to ASTM D545. The type required will be indicated on the plans.

Closed-cell polypropylene foam shall conform to the requirements in ASTM D8139 and tested in accordance with ASTM D545.

907-707.02.3--Wood. Delete paragraph (b) of Subsection 707.02.3 on page 755, and substitute the following:

(b) Dimensions shall be as shown on the plans Dimensions shown on the plans are "dressed" sizes in accordance with Table 3 of the American Softwood Lumber Standard, SP-20. At the discretion of the Engineer, a 3/4-inch dressed board may be used in lieu of a 1-inch dressed board. A tolerance of plus or minus 1/16 inch thickness and plus or minus 1/8 inch width will be permitted. For slip-form paving a tolerance of minus 1/4 inch on each end in length will be permitted.

907-707.06--Flexible Plastic Gasket for Joining Conduit. Delete the third paragraph of Subsection 707.06 on page 756, and substitute the following.

The Department may require the performance test described in ASTM C 990.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-711-2 **CODE: (IS)**

DATE: 09/11/2018

SUBJECT: Plain Steel Wire

Section 711, Reinforcement and Wire Rope, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

907-711.02--Deformed and Plain Carbon-Steel Bars for Concrete Reinforcing.

907-711.02.3--Steel Welded and Non-Welded Wire Reinforcement, Plain and Deformed, for Concrete.

907-711.02.3.1--Plain Steel Wire. Delete the sentence in Subsection 711.02.3.1 on pages 780 and 781, and substitute the following.

Plain steel wire and plain steel welded wire shall conform to the requirements of AASHTO M 336.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-712-1 **CODE: (SP)**

DATE: 12/07/2021

SUBJECT: Fence and Guardrail

Section 712, Fence and Guardrail, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

907-712.01--General. After the sentence in Subsection 712.01 on page 785, add the following.

All materials' inspection, testing, and certification will be performed in accordance with the requirements of the current version of the Department's *Materials Division Inspection, Testing, and Certification Manual*.

Delete Subsections 712.02 and 712.03 on page 785, and substitute the following.

907-712.02--Barbed Wire. Barbed wire shall conform to the requirements of AASHTO M 280. In the coastal counties of Hancock, Harrison, and Jackson, either Coating Type Z Class 3 or Coating Type A shall be furnished. In all other areas of the State, either Coating Type Z Class 1, Coating Type Z Class 3, Coating Type ZA Class 60, or Coating Type A shall be furnished.

907-712.03--Metallic-Coated, Steel Woven Wire Fence Fabric. Woven wire fencing (i.e., "hog wire") shall conform to the requirements of AASHTO M 279. In the coastal counties of Hancock, Harrison, and Jackson, either Coating Type Z Class 3 or Coating Type A shall be furnished. In all other areas of the State, either Coating Type Z Class 1, Coating Type Z Class 3, Coating Type ZA Class 60, or Coating Type A shall be furnished.

907-712.04--Chain Link Fence. Delete Subsections 712.04.1 thru 712.04.7 on pages 785 & 786, and substitute the following.

907-712.04.1--Fabric. In the coastal counties of Hancock, Harrison, and Jackson, either Type I Class D, Type II, Type III, or Type IV fabrics shall be furnished. In all other areas of the State, either Type I Class C, Type I Class D, Type II, Type III, or Type IV fabrics shall be furnished.

907-712.04.2--Tie Wire. Tie wire shall be of the same material as the fencing wire being used, shall be of good commercial quality, and shall meet the requirements of AASHTO M 181. Either Type I, Type II, Type III, or Type IV tie wire shall be furnished.

907-712.04.3--Tension Wire. Tension wire shall be of the same material as the fencing wire being used, shall be of good commercial quality, and shall meet the requirements of AASHTO M 181. In the coastal counties of Hancock, Harrison, and Jackson, either Type I Class 3, Type II, Type III, or Type IV tension shall be furnished. In all other areas of the State, either Type II, Type III, Type IV, or Type I Classes 1, 2, or 3 tension wires shall be furnished.

907-712.04.4--Posts Rails, Gate Frames, and Expansion Sleeves. Posts, rails, gate frames, and expansion sleeves shall conform to the requirements for posts in Subsection 712.05.2, unless otherwise designated in the contract.

907-712.04.5--Miscellaneous Fittings and Hardware. Miscellaneous fittings and hardware shall conform to the requirements of Subsection 712.16.

907-712.05--Fence Posts and Braces.

907-712.05.1--Treated Timber Posts and Braces.

907-712.05.1.1--General. Delete the third, fourth, fifth, and sixth paragraphs of Subsection 712.05.1.1 on page 787, and substitute the following.

All wood posts and braces shall be treated in accordance with Subsections 718.03 and 718.04.

907-712.05.1.2--Round Posts. Delete the last sentence of the last paragraph of Subsection 712.05.1.2 on page 788.

907-712.05.1.3--Sawed Posts. Delete the last sentence of the paragraph of Subsection 712.05.1.3 on page 788.

907-712.05.1.4--Sawed Braces. Delete the last sentence of the paragraph of Subsection 712.05.1.4 on page 788.

Delete Subsection 712.05.2 on page 788, and substitute the following.

907-712.05.2--Metal Posts.

907-712.05.2.1--Round Steel Pipe. Round steel pipe shall meet the requirements of AASHTO M 181, either Grade 1 (i.e., meeting the requirements in ASTM F 1083) or Grade 2 (i.e., meeting the requirements of ASTM F 1043).

Round steel pipe shall be sized in accordance with NPS (nominal pipe size) designations as shown on Plans, and not according to the outer or inner pipe diameter.

907-712.05.2.2--Steel Fence Post and Assemblies, Hot-Wrought. Steel posts with the following section shapes, Tee, channel or U, and Y-Bar shall meet the requirements of AASHTO M 281, galvanized in accordance with the requirements of AASHTO M 111, unless otherwise specified in the contract. Acceptance of these steel posts shall be by certification from the manufacturer, producer, supplier, or fabricator, as applicable.

907-712.05.2.3--Blank.

907-712.05.2.4--Steel H-Beam Posts. Steel H-Beam posts shall be produced from structural quality weldable steel having a minimum yield strength of 45,000 psi and shall be galvanized in accordance with ASTM A 123. Steel H-Beam line posts shall be 2.250 inches by 1.625 inches and shall weigh 3.43 pounds per foot. A tolerance of plus or minus 5.0 percent is allowed for

weight per foot. A tolerance of plus or minus 1.0 percent is allowed for dimensions.

907-712.05.2.5--Aluminum-Alloy Posts and Assemblies. Round aluminum-alloy posts shall meet the requirements of ASTM B 241, Alloy 6061, T6. Aluminum-Alloy H-Beam posts shall meet the requirements of ASTM B 221, Alloy 6061, T6.

907-712.05.2.6--Formed Steel Section Posts. Formed steel section posts, "C" sections, shall be formed from sheet steel conforming to ASTM A 1011, Grade 45, and shall be galvanized in accordance with ASTM A 123.

907-712.06--Guard and Guardrail Posts.

907-712.06.2--Treated Wood Posts.

907-712.06.2.1--Square Posts. Delete the paragraph in Subsection 712.06.2.1 on page 789, and substitute the following.

All square posts shall be inspected for conformance with Section 712.05, except that the posts may be rough and shall be within ±3/8" of the dimensions shown on the plans.

907-712.06.2.2--Round Posts. Delete the paragraph in Subsection 712.06.2.2 on page 789, and substitute the following.

All round posts shall be inspected for conformance with Section 712.05, except that the posts shall be of the shape and dimensions shown on the plans.

907-712.06.5--Treated Wood Blocks for Use with Metal Guardrail Posts. Delete the paragraphs of Subsection 712.06.5 on pages 789 & 790, and substitute the following.

Treated wood blocks for use with metal guardrail posts shall be within ±3/8" of the size and dimensions shown on the plans, except that a minus tolerance shall not be allowed for the slotted width in which the metal post must fit.

Delete Subsection 712.16 on page 791, and substitute the following.

907-712.16--Hardware. All ferrous metal hardware for fencing such as bolts, nuts, washers, and metal straps shall be as specified on the plans and galvanizing shall not be less than 1.0 ounce per square foot of uncoated area. Aluminum coated hardware shall be coated with aluminum meeting the requirements of AASHTO M 181 for aluminum coating and at the rate of not less than 0.4 ounces per square foot of uncoated area.

Aluminum alloy hardware shall conform to the requirements of ASTM B 221 for extruded aluminum alloy 6063, T6. The finished members shall be of uniform quality.

Aluminum-zinc coated hardware shall be coated with an aluminum-zinc alloy meeting the chemical requirements and weight of coating specified for aluminum-zinc alloy coated metal gates.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-714-4 **CODE: (SP)**

DATE: **07/28/2025**

SUBJECT: **Miscellaneous Materials**

Section 714, Miscellaneous Materials, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

907-714.01--Water.

907-714.01.1--General. Delete the last sentence of the second paragraph in Subsection 714.01.1 on page 794.

907-714.01.2--Water for Use in Concrete. Delete Subsection 714.01.2 on page 794, and substitute the following:

Water from municipal sources is permitted be used as mixing water in concrete, mortar, and grout without Department testing. Water from non-municipal water sources used in mixing of concrete, mortar, and grout which does not meet the requirements in Subsection 714.01.1 shall be tested for conformance as required in AASHTO M157, Table 1 and Table 2.

907-714.01.3--Water for Use in Chemically Stabilized Based. Delete the first sentence of first paragraph in Subsection 714.01.3 on page 794, and substitute the following:

Water used in the construction of bases that contain cement, lime, or other chemical additive shall be as set out in Subsection 714.01.1. Water from municipal sources is permitted to be used without testing for conformance to the requirements below. If water is not from a municipal source, it shall not contain impurities in excess of the following limits:

Delete Subsection 714.01.6 on page 795, and substitute the following.

907-714.01.6--Blank.

907-714.05--Fly Ash.

907-714.05.1--General. Delete the first sentence of the fifth paragraph in Subsection 714.05.1 on page 797.

Delete Subsection 714.06 on page 798, and substitute the following.

907-714.06--Slag Cement.

907-714.06.1--General. The slag cement source must be approved for listing in the Department's

APL prior to use. The acceptance of slag cement shall be based on certified test reports, certification of shipment from the supplier, and tests performed on samples obtained after delivery in accordance with the Department's *Materials Division Inspection, Testing, and Certification Manual* and Department SOP.

The Contractor shall provide suitable means for storing and protecting the slag cement against dampness and contamination. Separate storage silos, bins, or containers shall be provided for slag cement. Slag cement that is partially set, caked or contains lumps shall not be used.

The State Materials Engineer shall be notified in writing of the nature, amount and identity of any processing or other additions made to the slag cement during production.

Slag cement from different mills shall not be mixed or used alternately in any one class of construction or structure without written permission from the Engineer; except that this requirement will not be applicable to cement treatment of design soils or bases.

No additional cementitious materials, such as blended hydraulic cement, fly ash, metakaolin, or others, shall be added to or as a replacement for hydraulic cement when used with slag cement in the production of concrete. The replacement of hydraulic cement with slag cement shall be in accordance with the applicable replacement content specified in Subsection 701.02.2.

907-714.06.2--Specific Requirements. Slag cement shall meet the requirements of AASHTO M 302, Grade 100 or 120. Slag cement shall contain no chlorides.

907-714.13--Geotextiles.

907-714.13.11--Tables. Delete Table 1 in Subsection 714.13.11 on page 813, and substitute the following.

Table 1 - Geotextiles

Type Designation	I[1]	II[1]	III	IV	V	VI		VII		VIII	IX	
	Sediment Control		Drainage	Paving	Separation & Drainage	Separation, Stabilization & Reinforcement				High Strength		
Physical Property[2]						Woven	Non-Woven	Woven	Non-Woven			**Test Method**
Grab Strength (lb)	50	90	110	90	200	280	180	450	280	----	----	ASTM D 4632
Elongation (%)	----	50% max @ 45 lb	20% min	50% min @ break	50% min	50% max	50% Min	50% max	50% Min	----	----	ASTM D 4632
Seam Strength (lb)	----	----	70	----	180	240	160	400	240	----	----	ASTM D 4632
Puncture Strength (lb)	----	----	40	----	80	110	75	180	115	----	----	ASTM D 6241
Trapezoidal Tear (lb)	----	----	40	----	80	100	70	150	100	----	----	ASTM D 4533
Asphalt Retention (gal/yd^2)	----	----	----	0.2	----	----	----	----	----	----	----	ASTM D 6140
Permittivity (sec^{-1}) min	0.05	0.05	0.5	----	0.2	0.2	0.2	0.2	0.2	----	----	ASTM D 4491
AOS Woven (mm) max	0.60	0.60	0.6	----	0.6	0.43	----	0.43	----	----	----	ASTM D 4751
AOS Non-Woven (mm) max	0.84	0.84	0.43	----	0.43	----	0.43	----	0.43	----	----	
Tensile Strength after UV (% Retained)	70% @ 500 hr	70% @ 500 hr	50% @ 500 hr	----	50% @ 500 hr	50% @ 500 hr	50% @ 500 hr	50% @ 500 hr	50% @ 500 hr	----	----	ASTM D 4355
Melting Point °(F)	----	----	----	325	----	----	----	----	----	----	----	ASTM D 276
Minimum Ultimate Tensile Strength[3] (lb/in)	----	----	----	----	----	----	----	----	----	660	2000	ASTM D 4595

Notes: 1 - All property values, with the exception of apparent opening size (AOS), represent minimum average roll values in the weakest principal direction. Values for AOS represent the maximum average roll values, 2 - Values not identified in this table should meet manufacturer certification for the use and application, 3- Machine direction

Delete Subsec

907-714.15--Geogrids.

907-714.15.1–General. A geogrid is defined as a geosynthetic formed by a regular network of connected elements with apertures greater than 0.25 inch to allow interlocking with surrounding soil, rock, and other surrounding materials to function primarily as reinforcement.

Geogrid shall be manufactured from an expanded strain hardened monolithic polymer sheet composed of one or more synthetic polymers and shall be mildew resistant and inert to biological degradation and naturally encountered chemicals, alkalis and acids. The geogrid shall contain stabilizers and/or inhibitors, or a resistance finish or covering to make it resistant to deterioration from direct sunlight, ultraviolet rays, and heat.

Geogrid manufacturers shall participate in and be in compliance with the American Association of State Highway Transportation Officials (AASHTO) National Transportation Product Evaluation Program's (NTPEP) Geosynthetics audit program. Geogrid shall meet the requirements of Table II for the application and type shown on the plans and shall be selected from the Department's Approved Lists.

907-714.15.1.1--Geogrid for Retaining Walls and Reinforced Soil Slopes. Geogrid for retaining walls and reinforced soil slopes shall be creep tested in accordance with AASHTO R69 and meet Long Term Design Load, Minimum Ultimate Tensile Strength, and open area criteria listed in Table II. Manufacturers shall perform at least one long-term creep test for no less than 10,000 hours in accordance to ASTM D 5262 for each polymer or composition of polymers from which the geogrid is produced. The long-term design load that shall be reported for design use, shall be that load at which no more than 10% strain occurs over a 100-year design life of the geogrid, as calculated in accordance with AASHTO R69. Long-term design loads shall be reported unfactored, and the AASHTO strength reduction factors (Durability and Installation, and safety factors) will be considered by the Department's Geotechnical Branch on a site specific design basis.

907-714.15.1.2--Geogrid for Subgrade Stabilization. Geogrid for subgrade stabilization shall meet Minimum Ultimate Tensile Strength and open area criteria listed in Table II.

907-714.15.2--Marking, Shipment, and Storage. Each roll or container of geogrid shall be visibly labeled with the name of the manufacturer, trade name of the product, lot number, and quantity of material. In addition, each roll or container shall be clearly tagged to show the type designation that corresponds to that required by the plans. During shipment and storage the geogrid shall be protected from direct sunlight, and temperatures above 120°F or below 0°F. The geogrid shall either be wrapped and maintained in a heavy duty protective covering or stored in a safe enclosed area to protect from damage during prolonged storage.

907-714.15.3--Manufacturer Certification. The Contractor shall furnish the Engineer three copies of the manufacturer's certified test reports indicating that the geogrid furnished conforms to the requirements of the specifications and is of the same composition as the originally approved by the Department.

907-714.15.4--Acceptance Sampling and Testing. Final acceptance of each shipment will be

based upon results of tests performed by the Department on verification samples submitted from the project, as compared to the manufacturer's certified test reports. The Engineer will select one roll or container at random from each shipment for sampling. As sample extending full width of the randomly selected roll or container and being at least five (5) square yards in area will be obtained and submitted by the Engineer. All material samples shall be provided at no cost to the State.

TABLE II
GEOGRIDS

Physical Properties	Type Designation						Test Method
	I	II	III	IV	V	VI	
Long Term Design Load[1], pounds per foot, Machine Direction	250	500	750	1500	2500	3500	AASHTO R69, ASTM D5262
Minimum Ultimate Tensile Strength[2], pounds per foot, Machine Direction	500	1000	1500	3000	5000	7000	ASTM D6637
Open Area, percent	70	70	50	50	50	50	Direct Measurement

[1] Minimum design criteria requirement.
[2] Minimum Average Roll Value (MARV).

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-718-1 **CODE: (SP)**

DATE: 12/07/2021

SUBJECT: Timber and Dimension Lumber

Section 718, Timber and Dimension Lumber, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

Delete the Subsections in Section 718 on pages 836 thru 838, and substitute the following.

907-718.01--General. All timber and dimension lumber shall be Southern pine and shall conform in all respects to applicable requirements of AASHTO M 168. The Department reserves the right to sample and to test all materials at any time; all inspection, testing, and certification of materials will be performed in accordance with the requirements of the current version of the Department's *Materials Division Inspection, Testing, and Certification Manual*.

Timber and dimension lumber shall be furnished in the sizes shown on the plans or as specified. Unless otherwise specified, timber and dimension lumber shall be No. 1, or better, graded according to the latest American Lumber Standards.

Only one type of preservative shall be used for the treatment of materials for any one class of construction on a project, unless otherwise specified.

Where treated timber and dimensional lumber is to be used in non-highway construction or use, such as decking, handrails in walking trails, or in any manner where general public exposure by touch is possible, the treatment requirements will be as per project plans and/or approved by the State Materials Engineer.

907-718.02--Untreated Timber and Dimension Lumber. Untreated timber and dimension lumber shall conform to the requirements of AASHTO M 168.

907-718.03--Treated Timber and Dimension Lumber. Timber and dimension lumber to be treated shall meet the requirements herein specified and shall be treated as specified. Treated timber or dimensional lumber will not be accepted for use unless it has been inspected by an authorized representative of the Department and found to be satisfactory after treatment.

907-718.03.1--Blank.

907-718.03.2--Treatment.

907-718.03.2.1--General. All materials shall be treated in accordance with AASHTO M 133 unless otherwise directed by the Environmental Protection Agency (EPA).

907-718.03.2.2--Blank.

907-718.03.2.3--Inspection. Treated timber and dimension lumber shall be inspected by an authorized representative of the Department before being incorporated into the work. Treatment reports shall be provided to the Department for each lot of material supplied.

907-718.03.3--Blank.

907-718.03.4--Storage of Treated Material. All material treated for stock shall be stacked as compactly as possible on a well-drained surface. Material shall be supported on sills spaced as necessary, not to exceed 10 foot intervals and shall have at least one foot of air space beneath the stacks.

All materials treated with preservatives for use in buildings and applications where painting is required shall be dried after treatment. The treated wood shall be dried in accordance with American Lumber Standards.

907-718.04--Preservative. Preservatives shall be as specified in AASHTO M 133 unless otherwise directed by the Environmental Protection Agency (EPA).

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-720-4 **CODE: (IS)**

DATE: **06/17/2025**

SUBJECT: **Pavement Marking Materials**

Section 720, Pavement Marking Materials, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

Delete Section 720 on pages 840 thru 854, and substitute the following.

SECTION 720 - PAVEMENT MARKING MATERIALS

907-720.01--General. The Department reserves the right to perform sampling and testing of any materials at any time. Upon request of the Engineer, samples of the material shall be furnished.

907-720.02--Color Requirements. All pavement markings except raised pavement markers are required to meet the color requirements of ASTM D6628.

907-720.03--Optics. Optics used in thermoplastic pavement markings shall consist of a double-drop system of glass beads or advanced optics.

907-720.03.1--Glass Beads. The manufacturer shall furnish the Engineer with a certified test report indicating that the glass beads meet AASHTO M 247. AASHTO Type 4 beads shall be applied to the newly placed stripe first, followed by the application of AASHTO Type 1 or Type 2 beads. Type 1, 2, and 4 glass beads shall be transparent, clean, colorless glass, smooth and spherically shaped, free from milkiness, pits, or excessive air bubbles. Type 1, 2, and 4 glass beads shall be coated with a bead coating that is compatible with the traffic marking material to which the glass beads will be applied and will provide adequate moisture proofing, increased adhesion, and optimum embedment of the glass beads.

907-720.03.1.1—Acceptance Procedure. The Contractor shall furnish the Engineer with a copy of the manufacturer's certified test reports for the lot(s) of materials from which the shipment originated. The test report shall show all the test results for the material properties and characteristics as specified herein. The test report shall state that the material represented by the test results meets all the requirements of the contract. It shall be the Contractor's responsibility to furnish the manufacturer's test report to the Engineer for each shipment of material to the project.

Acceptance sampling and testing will be in accordance with the Materials Division Inspection, Testing, and Certification Manual (Materials Manual).

907-720.03.2--Advanced Optics. Advanced optics are materials that do not meet the specific requirements of AASHTO M 247 but produce a final drop-on optics system that meets or exceeds the reflectivity requirements in Special Provision 907-626. Advanced optics shall be a double-

drop system that is pre-approved and listed on the Department's Approved Products List.

907-720.03.2.1—Acceptance Procedure. The Contractor shall furnish the Engineer with a copy of the manufacturer's certified test reports for the lot(s) of materials from which the shipment originated. The test report shall show all the test results for the material properties and characteristics as specified herein. The test report shall state that the material represented by the test results meets all the requirements of the contract. It shall be the Contractor's responsibility to furnish the manufacturer's test report to the Engineer for each shipment of material to the project.

Acceptance sampling and testing may be conducted at the request of the Engineer.

907-720.04--Thermoplastic Marking Material. Thermoplastic marking material shall meet the color requirements of Subsection 907-720.02.

There shall be no obvious change in the color of the material if held at its plastic temperature for a period of four (4) hours nor by reason of four (4) re-heatings to its plastic temperature.

The pavement markings shall maintain its original dimension and placement. The material shall not be slippery when wet and it shall not lift from the pavement in freezing weather.

907-720.04.1--Extruded Thermoplastic Material. Extruded thermoplastic pavement marking material shall meet the requirements of AASHTO M 249, and shall meet the requirements of 907-720.04 with the following exceptions:

- Blue - ADA thermoplastic marking material shall meet the requirements of Subsection 907-720.04.2 with the exception that the color shall be Blue – ADA, and the Contractor may use hot applied thermoplastic materials meeting the satisfaction of the Engineer.

907-720.04.2--Spray-Applied Thermoplastic Material. Spray-applied thermoplastic pavement marking material shall meet the requirements of AASHTO M 249 and shall meet the requirements of 907-720.04.

907-720.04.3--Pre-formed Thermoplastic Material. Heat-fused, pre-formed thermoplastic pavement marking material shall meet the color requirements of 907-720.02.

907-720.04.4—Acceptance Procedure. The Contractor shall furnish the Engineer with a copy of the manufacturer's certified test reports for the lot(s) of materials from which the shipment originated. The test report shall show all the test results for the material properties and characteristics as specified herein. The test report shall state that the material represented by the test results meets all the requirements of the contract. It shall be the Contractor's responsibility to furnish the manufacturer's test report to the Engineer for each shipment of material to the project.

907-720.05--Pavement Marking Tape. Pavement marking tape shall be listed on the Department's Approved Lists.

907-720.05.1—Cold Plastic Pavement Markings (Permanent Pavement Marking Tape). Pavement marking tape for use in roadway applications shall be designated on the Department's Approved Lists as permanent.

The prefabricated markings described shall consist of white or yellow pigmented plastic films with reflective optics uniformly distributed throughout their entire cross-sectional area, and be capable of being affixed by either a pressure sensitive pre-coated adhesive or a liquid contact cement. The markings shall be provided complete in a form that will facilitate rapid application and protect the markings in shipment and storage. The manufacturer shall identify proper solvents and/or adhesives to be applied at the time of application, all equipment necessary for proper application, and recommendations for application that will assure an effective performance life.

Prefabricated legends and symbols shall conform to the applicable shapes and sizes as outlined in the current "Manual on Uniform Traffic Control Devices."

907-720.05.1.1--Specific Requirements. Unless otherwise indicated on the plans, the patterned material without adhesive shall have a minimum caliper of 0.065 inch at the thickest portion of the patterned cross-section and a minimum caliper of 0.020 inch at the thinnest portion of the cross-section. The material shall be a pliant polymer film with 50±15% of the surface are raised and presenting a near vertical face angle of 0° to 60° to traffic from any direction. The channels between the raised areas shall be substantially free of exposed optics or particles.

The size and quality of the optics will be such that performance requirements of Subsection 907-720.02 for the retroreflective pliant polymer film shall be met. The pigments shall be selected and blended to provide a marking film that is white or yellow conforming to the performance requirements of Subsection 907-720.02 through the expected life of the film.

907-720.05.1.2--Conformability and Resealing. The marking shall be capable of conforming to pavement contours, breaks, faults, etc. through the action of traffic at normal pavement temperatures.

The marking shall have resealing characteristics that allows it to be capable of fusing with itself and previously applied marking of the same composition under normal conditions of use. The marking shall be capable of use for patching worn areas of the same type in accordance with manufacturer's instructions.

907-720.05.1.3--Tensile Strength and Elongation. The material shall have a minimum tensile strength of 40 pounds per square inch of cross section when tested according to ASTM D 638. A 6-inch x 1-inch x 0.06-inch sample shall be tested at a temperature between 70°F and 80°F using a jaw speed of 12 inches per minute.

The material shall have a minimum elongation of 75% at break when tested according to ASTM D 638 using a jaw speed of 12 inches per minute.

907-720.05.1.4--Skid Resistance. The surface of the material shall provide a minimum skid resistance value of 45 BPN when tested according to ASTM E 303 except values will be taken at

downweb and at a 45-degree angle from downweb. These two values will then be averaged to find the skid resistance of the patterned surface.

907-720.05.1.5--Effective Performance Life and Warranty. When applied according to the recommendations of the manufacturer the pavement marking tape shall provide a neat and durable marking that will not flow or distort due to temperature if the pavement surface remains stable. The film shall be weather resistant and through normal traffic wear shall show no appreciable fading, lifting, or shrinkage throughout the useful life of the marking, nor shall it show significant tearing, roll back, or other signs of poor adhesion.

All manufacturer's standard warranties and guarantees on pavement marking tape, which are provided as customary trade practice, shall be delivered to the Engineer at the final inspection. All warranties and guarantees shall be made out to the Department.

907-720.05.1.6—Acceptance Procedure. The Contractor shall furnish the Engineer with a copy of the manufacturer's certified test reports for the lot(s) of materials from which the shipment originated. The test report shall show all the test results for the material properties and characteristics as specified herein. The test report shall state that the material represented by the test results meets all the requirements of the contract. It shall be the Contractor's responsibility to furnish the manufacturer's test report to the Engineer for each shipment of material to the project.

Acceptance sampling and testing will be in accordance with the Materials Division Inspection, Testing, and Certification Manual (Materials Manual). Samples of the material shall be furnished and shall be provided at no cost to the State.

907-720.05.2--Preformed Pavement Markings for Construction Zones. Preformed pavement markings for construction zones shall be designated Department's Approved Lists as temporary. Retroreflective preformed pavement markings for construction zones shall be as specified on the plans or in the contract documents.

The markings shall be provided in specified widths and shapes. Preformed words and symbols shall conform to the applicable shapes and sizes as outlined in the current "Manual on Uniform Traffic Control Devices for Streets and Highways," or as modified.

The materials shall be packaged in accordance with accepted commercial standards and when stored indoors in a cool dry place, shall be suitable for use one year after date of purchase.

907-720.05.2.1--Specific Requirements. Preformed markings shall consist of retroreflective materials on a conformable backing and shall meet the performance requirements of Subsection 907-720.02. The markings shall consist of a mixture of high-quality polymeric materials, pigments, and optics with a reflective layer of optics bonded to the top surface. The markings shall be pre-coated with a pressure sensitive adhesive capable of adhering to pavement in accordance with the manufacturer's instructions without the use of heat, solvents, or other additional adhesives. The markings and/or adhesive shall not require any curing time after application. A coated non-metallic medium shall be incorporated with the pressure sensitive adhesive to facilitate removal.

907-720.05.2.2—Acceptance Procedure. The Contractor shall furnish the Engineer with a copy of the manufacturer's certified test reports for the lot(s) of materials from which the shipment originated. The test report shall show all the test results for the material properties and characteristics as specified herein. The test report shall state that the material represented by the test results meets all the requirements of the contract. It shall be the Contractor's responsibility to furnish the manufacturer's test report to the Engineer for each shipment of material to the project.

907-720.06--Raised Pavement Markers. Pavement markers shall be listed on the Department's Approved Lists and shall conform to ASTM D 4280.

907-720.06.1--Packaging. Shipments shall be made in containers acceptable to common carriers and packaged in such a manner as to ensure delivery in perfect condition. All damaged shipments shall be replaced by the Contractor. Each package shall be clearly marked as to the name of the manufacturer, type, quantity enclosed, lot number, and date of manufacture.

907-720.06.2--Non-Reflective Pavement Markers. Non-reflective pavement markers are occasionally referred to as "jiggle markers". Non-reflective markers consisting of a heat-fired, vitreous, ceramic base, and a heat-fired, opaque, glazed surface are permitted for use; the bottom of the marker shall not be glazed. Ceramic markers shall be produced from any suitable combination of intimately mixed clays, shales, talcs, flints, feldspars, or other inorganic material. Ceramic markers shall be thoroughly and evenly matured, and all non-reflective pavement markers shall be free from defects which affect appearance or serviceability.

Ceramic non-reflective markers shall conform to the following finish and testing requirements in Table 2 below.

Table 2

Ceramic Non-Reflective Marker Requirements	
Glaze Thickness	0.005 inch, minimum
Mohs Hardness	6, minimum
Autoclave	Glaze shall not spall, craze, or peel.
Compressive Strength	750 psi, minimum
Water Absorption	2.0%, maximum

907-720.06.3—Acceptance Procedure. The Contractor shall furnish the Engineer with a copy of the manufacturer's certified test reports for the lot(s) of materials from which the shipment originated. The test report shall show all the test results for the material properties and characteristics as specified herein. The test report shall state that the material represented by the test results meets all the requirements of the contract. It shall be the Contractor's responsibility to furnish the manufacturer's test report to the Engineer for each shipment of material to the project.

907-720.07--Adhesive for Pavement Markers. The adhesive shall be listed on the Department's Approved Lists and shall be an asphaltic material suitable for bonding pavement markers to surfaces when the road surface and marker temperatures are in the range of 50°F to 160°F. The composition of the adhesive must be such that its properties will not deteriorate when heated to and applied at temperatures up to 425°F. Samples may be submitted in the form of an adhesive

testing package from each batch or material obtained from a package shipped to the project.

907-720.07.1--Packaging and Labeling. The adhesive shall be packaged in self-releasing cardboard containers that will stack properly. The label shall show the manufacturer, quantity, and lot or batch number. "Adhesive for Pavement Markers" or "Adhesive for Traffic Markers" shall be printed in bold lettering on the label.

907-720.07.2--Bituminous Adhesive. The asphaltic adhesive material shall be flexible type.

907-720.07.2.1--Flexible Bituminous Adhesive. Flexible bituminous adhesive shall be designated on the Department's Approved Lists as flexible and shall comply with requirements of Table 3 below.

Table 3

Flexible Bituminous Adhesive Properties			
	Min	Max	Test Method
Penetration @ 77°F	-	25	ASTM D 5
Softening Point, °F	200	-	ASTM D 36
Brookfield Viscosity @ 400°F, cp.	-	10,000	ASTM D 3236
Ductility @ 77°F, 5 cm/min	15	-	ASTM D 113
Ductility @ 39.2°F, 1 cm/min	5	-	ASTM D 113
Asphalt Compatibility	Pass		ASTM D 5329
Flexibility @ 20°F	Pass		Per Subsection

907-720.07.3—Acceptance Procedure. The Contractor shall furnish the Engineer with a copy of the manufacturer's certified test reports for the lot(s) of materials from which the shipment originated. The test report shall show all the test results for the material properties and characteristics as specified herein. The test report shall state that the material represented by the test results meets all the requirements of the contract. It shall be the Contractor's responsibility to furnish the manufacturer's test report to the Engineer for each shipment of material to the project.

Acceptance sampling and testing will be in accordance with the Materials Division Inspection, Testing, and Certification Manual (Materials Manual). Samples of the material shall be furnished and shall be provided at no cost to the State.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-721-4 **CODE: (IS)**

DATE: **04/19/2022**

SUBJECT: **Materials for Signing**

Section 721, Materials for Signing, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

907-721.06--Reflective Sheeting.

907-721.06.2--Performance Requirements. Delete Table 4 and Table 5 in Subsection 721.06.2 on pages 860 & 861, and substitute the following.

MINIMUM COEFFICIENTS OF RETROREFLECTION
Candela per foot candle per square foot (cd/fc/ft^2)
Per ASTM Designation D4956

TABLE 4
Type IX Sheeting

Observation Angle	Entrance Angle	White	Yellow	Green	Red	Blue	Fluorescent Yellow/Green	Fluorescent Yellow	Fluorescent Orange
0.2°	-4.0°	380	285	38	76	17	300	230	115
0.2°	+30.0°	215	162	22	43	10	170	130	65
0.5°	-4.0°	240	180	24	48	11	190	145	72
0.5°	+30.0°	135	100	14	27	6.0	110	81	41
1.0°	-4.0°	80	60	8.0	16	3.6	64	48	24
1.0°	+30.0°	45	34	4.5	9.0	2.0	36	27	14

TABLE 5
Type XI Sheeting

Observation Angle	Entrance Angle	White	Yellow	Green	Red	Blue	Brown	Fluorescent Yellow/Green	Fluorescent Yellow	Fluorescent Orange
0.2°	-4.0°	580	435	58	87	26	17	460	350	175
0.2°	+30.0°	220	165	22	33	10	7.0	180	130	66
0.5°	-4.0°	420	315	42	63	19	13	340	250	125
0.5°	+30.0°	150	110	15	23	7.0	5.0	120	90	45
1.0°	-4.0°	120	90	12	18	5.0	4.0	96	72	36
1.0°	+30.0°	45	34	5.0	7.0	2.0	1.0	36	27	14

After Subsection 721.10 on page 864, add the following.

907-721.11--Digital Applied Printing. The following addresses the requirements for digitally printed finished retroreflective traffic control signs on flat sheet aluminum and digitally printed traffic sign faces intended to be applied to a sign substrate.

907-721.11.1--Digitally Printed Ink Systems. Traffic signs must be produced using components, and processes that comply with the retroreflective sheeting manufacturer's recommendations.

Digital printed ink systems used to print traffic signs must meet and comply with daytime and nighttime chromaticity (color standards) as recognized in ASTM D4956 "Standard Specification for Retroreflective Sheeting for Traffic Control."

Digital printed ink systems must meet 70% of the initial retroreflectivity specifications of each respective reflective film color as found in ASTM D4956 "Standard Specification for Retroreflective Sheeting for Traffic Control."

Prior to fabrication and preferably at the preconstruction meeting, the Contractor shall advise the Project Engineer in writing as to which signs on the project will be digitally printed and which ones will be screen printed. The Contractor shall submit to the Project Engineer certifications for all digitally printed signs, which will be forwarded to the State Traffic Engineer for review.

907-721.11.2--Protective Overlay Film. Permanent traffic signs printed with digital ink systems will be fabricated with a full sign protective overlay film designed to provide a smooth surface needed for retroreflectivity, and to protect the sign from fading and UV degradation. The overlaminate shall comply with the retroreflective sheeting manufacturer's recommendations to ensure proper adhesion and transparency and will also meet the reflective film durability as identified in Table 1.

Table 1
Retroreflective Film Minimum Durability Requirements

ASTM D4956 Type	Full Sign Replacement Term (years)	Sheeting Replacement Term (years)
IV	7	10
VIII	7	10
IX	7	12
XI	7	12

Temporary signs used in work zones printed with black ink only will not require a protective overlay film as long as the finished sign is warranted for a minimum outdoor durability of three years by the sheeting manufacturer.

907-721.11.3--Inspection. During fabrication, the Contractor shall provide sufficient testing and quality control throughout fabrication to insure good workmanship. Once the material has been received, it may be subject to random testing to ensure compliance with all requirements. If any test samples do not conform to the requirements, the entire order may be returned at the vendor's expense.

907-721.11.4--Traffic Sign Performance Warranty Provisions. Based on the ASTM Type of sheeting specified, traffic control signs shall be warranted for the duration shown in Table 1. The Contractor shall supply a copy of the warranty document with complete details of terms and conditions upon request of the Department.

907-721.11.5--Certified Digital Sign Fabricator. Sign fabricators using digital imaging methods to produce regulated traffic signs must be certified by the reflective sheeting manufacturer whose materials are used to produce the delivered signs.

Certified sign fabricators must undergo an audit process by the sheeting manufacturer to ensure they have the proper equipment, manufacturing capabilities, manufacturing application processes and the materials required to fulfill the sheeting manufacturer's warranty obligations. Sign fabricators must recertify annually with reflective sheeting manufacturers or utilize a 3rd party certifier approved by the reflective sheeting manufacturer.

The Contractor shall submit proof of Sign Fabricator Certification as issued by the retroreflective sign sheeting manufacturer to the Project Engineer upon delivery of the signs, or with the Shop Drawings.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-722-1 **CODE: (IS)**

DATE: 11/15/2017

SUBJECT: Materials for Traffic Signal Installation

Section 722, Materials for Traffic Signal Installation, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follow.

907-722.02.3--Design Strength Requirements. Delete Subsection 722.02.3 on pages 864 thru 866, and substitute the following.

Unless specified otherwise in the plans, poles shall meet the requirements of the AASHTO *Standard Specifications for Structural Supports for Highway Signs, Luminaires, and Traffic Signals,* as specified in the plans with all interim supplements. All components of the assemblies shall be designed to the following:

- Importance Factor: 1.0; 50 year mean recurrence interval
- Basic Wind Speed (3 second gust): As shown on the project plans
- Minimum Gust Effect Factor: 1.14
- Fatigue Category: II
- Ice Loading: As shown on the project plans
- Natural Wind Gust Pressure Loads: Included
- Truck Induced Gust Pressure Loads: Not included
- Galloping: Not included

907-722.02.5--Mast Arms for Traffic Signal and Equipment Poles. Delete the first four sentences of the third paragraph of Subsection 722.02.5 on page 867, and substitute the following.

Anchor base plates must meet the minimum requirements of ASTM A36 or ASTM A709 Grade 36 or ASTM A572 Grade 50 and must be welded to the shaft by either telescoped with two continuous arc welds or by back up ring using full penetration welds.. Flange plate shall telescope the large end of the arm and be welded by either two (2) continuous arc welds, one (1) being on the outside of the plate, adjacent to the shaft, and the other one (1) on the inside at the end of the tubular cross section or by back up ring using full penetration welds. The thru-bolt flange plate or tapped flange plate supporting the mast arm shall be welded to the pole near the top and supported side plate tangent to the pole and gusset plates both top and bottom. The thru-bolt or tapped flange plate must be sufficient to develop the full capacity of the connecting bolts.

907-722.03--Electric Cable. Delete the paragraphs for Loop Detector Wire and Loop Detector Lead-in Cable in Subsection 722.03 on page 869.

Delete the first sentence of "Communication Cable" in Subsection 722.03 on page 870, and substitute the following.

Communication cables shall be as per the manufacturer's recommendation.

907-722.05.4--Type III or Type IV Rigid Non-Metallic Conduit. After the last sentence of Subsection 722.05.4 on page 871, add the following.

Schedule 40 conduit shall be used unless otherwise noted in the plans.

Delete the title of Subsection 722.13.3 on page 876, and substitute the following.

907-722.13.3--Power Service Pedestal.

Delete the first paragraph of Subsection 722.13.3 on page 876, and substitute the following.

The pedestal shall be of NEMA Type 3R rainproof construction and shall be UL Listed as "Enclosed Industrial Control Equipment" (UL 508A). External construction shall comply with UL50 requirements and shall be unpainted aluminum.

Nominal size of the pedestal shall be 48"H x 16"W x 16"D.

Pedestal shall have a voltage rating or 120v/240v single phase with an Amperage rating of 800A.

After the first sentence of the seventh paragraph of Subsection 722.13.3 on page 876, add the following.

An outdoor rated heavy duty combination lock shall be provided to lock the customer compartment door.

907-722.14.1.3--Optical System. Delete the sixteenth paragraph of Subsection 722.14.1.3 on page 879, and substitute the following.

The signal module on-board circuitry shall include voltage surge protection to withstand high-repetition noise transients and low-repetition high-energy transients as stated in Section 2.1.6, NEMA Standard TS 2, 1992.

Delete the last sentence of the seventeenth paragraph of Subsection 722.14.1.3 on page 879, and substitute the following.

Load switches shall be compatible with NEMA TS 1 or later, or Model 170-1989 or later.

Delete Subsection 722.14.5 on page 882, and substitute the following.

907-722.14.5--Blank.

Delete Subsections 722.14.7 and 722.14.8 on page 882.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SUPPLEMENT TO SPECIAL PROVISION NO. 907-799-1

DATE: 07/28/2025

SUBJECT: Hydraulic Cement Concrete Mixtures

907-799.01.1--Materials. Delete *Ground Granulated Blast Furnace Slag (GGBFS)* from the list in Subsection 907-799.01.1 on page 1, and substitute the following.

Slag Cement 714.06

Delete the title for Subsection 907-799.02 on page 1, and substitute the following.

907-799.01.2--Classification and Uses of Concrete.

Delete numbers 9 through 15 in the classes and general use list on pages 1 & 2, and substitute the following.

9) Class F (SCC) – Self Consolidating Concrete for prestressed members.
10) Class DS – Concrete for drilled shafts.
11) Class FX – Extra Strength concrete for prestressed members, as shown on plans.
12) Class FX (SCC) – Extra Strength Self Consolidating concrete for prestressed members, as shown on plans.
13) Class PA – Concrete paving.
14) Class PO – Concrete for repair of concrete paving.
15) Class PP – Concrete for special design requirements.
16) Class S – For all seal concrete deposited under water.
17) Class WT – Fiber-reinforced concrete pavement.

907-799.02--Hydraulic Cement Concrete Mixture Design. Add the following to Table 1 on page 3.

F[8] (SCC)	67	0.40	5000	28[-4][12]	See Note[4]
FX[8] (SCC)	67	As per mixture design	As shown on plans	28[-4][12]	See Note[4]

Delete Note 8 of Table 1 on page 4, and substitute the following.

[8] Type III, Type IL (HE), or Type III (MS) cement may be used in these Classes of concrete.
[12] Refers to slump flow in inches. It shall be acquired by ASTM C1611.

907-799.02.1.1--Portland Cement. Delete the paragraph in Subsection 907-799.02.1.1 on page 4, and substitute the following.

Portland cement (cement) shall be either Type I or Type II. Type III, Type IL (HE), or Type III (MS), may be used for the production of precast or precast-prestressed concrete members or Classes of concrete with Note 8 in Table 1.

907-799.02.2--Replacement of Portland Cement or Blended Cement. Delete Table X on page 5, and substitute the following.

Table X
Replacement Ranges of Portland Cements and Blended Cements by Fly Ash or Slag Cement

Portland Cement or Blended Cement Type	Fly Ash Replacement Range (%)	Slag Cement Replacement Range (%)
Types I, II, III, and III (MS)	20 – 25	45 – 50
Types IL, IL (MS), and IL (HE)	20 – 35	35 – 40
Types IS and IS (MS)	20 – 25	20 - 25
Types IP and IP (MS)	No replacement combination allowed	

907-799.02.4--Exposure to Soluble Sulfates or Seawater. Delete Table R on page 6, and substitute the following.

Table R
Cementitious Materials Combinations for Soluble Sulfate Conditions or Seawater

	Exposure to Moderate Sulfates or Exposure to Seawater	**Exposure to Severe Sulfates**
Water-soluble sulfate (SO4) in soil, % by mass	0.10 – 0.20	0.20 – 2.00
Sulfate (SO4) in water, ppm	150 – 1,500	1,500 – 10,000
Portland Cement or Blended Cement Types	**Replacement Ranges by SCMs (%)**	
Type I or Type III	24.5 – 25.0% Class F fly ash, or 49.5 – 50.0% Slag cement, or 19.5 – 20.0% Metakaolin	49.5 – 50.0% Slag cement
Type II or Type III (MS)	See Note 1	24.5 – 25.0% Class F fly ash, or 49.5 – 50.0% Slag cement, or 19.5 – 20.0% Metakaolin
Type IL or IL (HE)	24.5 – 35.0% Class F fly ash, or 49.5 – 50.0% Slag cement, or 19.5 – 20.0% Metakaolin	49.5 – 50.0% Slag cement

Type IL (MS)	See Note 1	24.5 – 35.0% Class F fly ash, or 49.5 – 50.0% Slag cement, or 19.5 – 20.0% Metakaolin
Type IS	24.5 – 25.0% Class F fly ash, or 24.5 – 25.0% Slag cement, or 19.5 – 20.0% Metakaolin	24.5 – 25.0% Class F fly ash, or 24.5 – 25.0% Slag cement, or 19.5 – 20.0% Metakaolin
Type IS (MS)	See Note 1	24.5 – 25.0% Class F fly ash, or 24.5 – 25.0% Slag cement, or 19.5 – 20.0% Metakaolin
Type IP (MS)	No replacement combination allowed	Type not allowed

[1] Class F fly ash or slag cement may be added as a replacement for cement as allowed in Subsection 907-799.02.2.

907-799.03--Proportioning of Hydraulic Cement Concrete Mixture Design.

907-799.03.1--Proportioning on the Basis of Previous Field Experience of Trial Mixtures. Delete subparagraph (c) on page 7, and substitute the following.

(c) Consists of 10 consecutive tests, an average of three cylinders per test, tested at 28 days. For concrete categorized as a self-consolidating concrete (SCC) mixture, the test data for the plastic concrete shall include the slump flow data, instead of the slump data, and at least one test to determine the static segregation. For all mixture designs, for each of these tests on the plastic concrete the test data shall meet the acceptance criteria of Subsection 907-804.02.13.1.

907-799.03.2--Proportioning on the Basis of Laboratory Trial Mixtures. Add the following to the list of restrictions on page 8.

(g) For concrete categorized as a SCC mixture, the mixture shall be designed to produce a slump flow within ±2 inches of the maximum permitted and a maximum static segregation of 15.0 percent. The concrete shall not be rodded or vibrated during casting the test specimens.

(h) For concrete categorized as a SCC mixture, test specimens shall be made in accordance with the above listed specifications with the exception that the concrete shall not be rodded or vibrated during casting the test specimens.

907-799.05--Field Verification of Concrete Mixture Design. Delete the second and third paragraphs on page 9, and substitute with the following.

The Contractor's Certified Quality Control Technicians shall test each concrete mixture design upon the first placement of the mix. Aggregates and concrete tests during the first placement shall be as follows.

Aggregates	Concrete
Bulk Specific Gravity	Water Content
Moisture	Slump or Slump Flow
Gradation	Air Content
	Unit Weight
	Yield
	Static Segregation

For all Classes of concrete, the mixture shall be verified to yield within 2.0% of the correct volume when all the mix water is added to the batch, either by the batch plant or as ice used to control mixture acceptance temperature. For concrete categorized as a SCC mixture, the mixture shall produce a slump flow within minus four inches (4") of the maximum permitted and a static segregation less than 15.0%.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-799-1 **CODE: (IS)**

DATE: 11/21/2023

SUBJECT: Hydraulic Cement Concrete Mixtures

Section 907-799, Hydraulic Cement Concrete Mixtures, is hereby added to and made part of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction as follows.

SECTION 907-799 - HYDRAULIC CEMENT CONCRETE MIXTURES

907-799.01--General.

907-799.01.1--Materials. The materials for hydraulic cement concrete mixtures shall meet the requirements of the following Subsections:

Portland Cement	701.01 and 701.02
Blended Cement	701.01 and 701.04
Fine Aggregate	703.02
Coarse Aggregate	703.03
Lightweight Aggregate	703.19.02
Synthetic Structural Fiber	711.04
Admixtures	713.02
Water	714.01.1 and 714.01.2
Fly Ash	714.05
Ground Granulated Blast Furnace Slag (GGBFS)	714.06
Metakaolin	907-714.09.01

907-799.02--Classification and Uses of Concrete. The classes and general uses of hydraulic cement concrete (concrete) mixtures are as follows:

1) Class AA - Concrete for bridge construction and concrete exposed to seawater.
2) Class B - General use, heavily reinforced sections, cast-in-place concrete piles, and conventional concrete piles.
3) Class BD - Concrete for bridge decks.
4) Class BDX - Extra strength concrete for bridge decks.
5) Class BDO - Concrete for bridge deck overlay.
6) Class C - Massive sections or lightly reinforced sections.
7) Class D - Massive unreinforced sections and riprap.
8) Class F - Concrete for prestressed members.
9) Class DS - Concrete for drilled shafts.
10) Class FX - Extra strength concrete for prestressed members, as shown on plans.
11) Class PA - Concrete paving.

12) Class PO - Concrete for repair of concrete paving.
13) Class PP - Concrete for special design requirements.
14) Class S - For all seal concrete deposited under water.
15) Class WT - Fiber-reinforced concrete pavement.

907-799.02--Hydraulic Cement Concrete Mixture Design. At least 10 working days prior to production of concrete, the Contractor shall submit to the Engineer proposed concrete mixture designs complying with the Department's *Concrete Manual*. Materials shall be from approved sources meeting the requirements of the Standard Specifications. Proportions for the mixture designs shall be for the class concrete required by the plans and shall meet the requirements of the "Master Proportion Table for Hydraulic Cement Concrete Designs" listed in Table 1. The concrete producer shall assign a permanent unique mixture number to each mixture design. Each mixture design shall be field verified as required in Subsection 907-799.03.3. Acceptable field verification data shall be required for final approval of a mixture design.

All concrete mixture designs will be reviewed by the Materials Division prior to use. Concrete mixture designs disapproved will be returned to the Contractor with a statement explaining the disapproval.

If the maturity method is used to estimate the compressive strength for applications such as early opening to traffic or form removal, the Contractor shall also submit compressive strength/maturity documentation developed in accordance with Subsection 804.03.15 for the mixture prior to production of concrete.

If the Contractor chooses to cure the concrete in accordance with the requirements listed under **Length of Time Defined by Development of Compressive Strength** in Subsection 804.03.17, the compressive strength/maturity relationship shall be developed for the mixture design for a minimum of 28 days following the requirements of Subsection 804.03.15. The compressive strength/maturity relationship information shall be submitted with the mixture design information.

Table 1
MASTER PROPORTION TABLE FOR HYDRAULIC CEMENT CONCRETE DESIGNS

Class	Required Coarse Aggregate Size No.[7]	Maximum w/cm Ratio	Specified Compressive Strength (f'_c) psi	Maximum Permitted Slump inches[5]	Total Air Content (%)
AA	57 or 67	0.45	4000	8	3.0-6.0
B	57 or 67	0.50	3500	8	3.0-6.0
BD[2, 3]	57 or 67	0.45[1]	4000	5	3.0-6.0 5.0 8.0
BDX[2, 3]	57 or 67	0.45[1]	4500	5	3.0-6.0 5.0 8.0
BDO[3, 6, 8, 11]	7, 8, or 78	As per mixture design	2500	6	3.0-6.0
C	57 or 67	0.55	3000	8	3.0-6.0
D	57 or 67	0.70	2000	8	3.0-6.0
DS	67	0.45	4000	8±1	See Note[4]
F[8]	67	0.40	5000	8	See Note[4]
FX[8]	67	As per mixture design	As shown on plans	8	See Note[4]
PA	467 or 57[9]	0.48	3500	3	3.0-6.0
PO[8, 11]	57 or 67	As per mixture design	3500	8	3.0-6.0
PP	57 or 67	0.45	Per Plans	8	3.0-6.0
S	57 or 67	0.45	3000	8	3.0-6.0
WT[3, 8, 10, 11]	57 or 67	0.40	3500	4	3.0-6.0

[1] For Class BD concrete for bridge decks, the minimum water/cementitious material ratio shall be 0.43 and the maximum cementitious material content shall be 550 pounds per cubic yard.
For Class BDX concrete for bridge decks, the minimum water/cementitious material ratio shall be 0.42 and the maximum cementitious material content shall be 564 pounds per cubic yard.

[2] For bridge decks constructed following the requirements of Subsection 804.03.19.7.3, Subsection 804.03.14.2, and Subsection 804.03.17.2, then the Class BD or Class BDX mixture design shall contain lightweight aggregate (LWA) and have an internal curing water content of 8.0 lbs per 100 lbs of total cementitious materials in the mixture design; mixture designs not containing LWA and the required minimum internal curing water content shall not be used.

[3] An approved synthetic structural fiber shall be incorporated into the mixture at 1.25 times the approved dosage rate. For each additional pound of fibers per cubic yard added in excess

of the requirement stated above, an additional inch of slump will be allowed up to a maximum permitted slump of eight (8) inches.

[4] Entrained air is not required for Class F, FX, and DS concrete unless exposed to seawater. For concrete not exposed to seawater, the total air content shall not exceed 6.0%. For concrete exposed to seawater, the total air content shall be 3.0-6.0%.

[5] Except as noted for Class DS concrete, the design slump selected by the Contractor for the mixture design may be less than the maximum permitted slump. The design slump is the maximum acceptance slump for field acceptance in accordance with Subsection 907-804.02.13.1.2. Except as noted for Class DS concrete, minus slump requirements shall meet those set forth in Table 3 of AASHTO M157.

[6] For Class BDO the mixture design shall include a minimum 564 pounds per cubic yard of cementitious material with a minimum 15 percent fly ash replacement. The specified strength shall be achieved prior to Opening To Traffic.

[7] Other small coarse aggregate sizes meeting the requirements of Subsection 703.03.2.4 may be used in conjunction with the coarse aggregate sizes listed. Lightweight aggregate (LWA) meeting the requirements of Subsection 703.19.2 may also be used as a partial replacement for fine aggregate.

[8] Type III or Type III (MS) portland cement may be used in these Classes of concrete.

[9] The oven-dry coarse aggregate volume per cubic yard of concrete shall be a minimum of 72%.

[10] The coarse aggregate size requirements shall meet the requirements of Subsection 907-799.02.4.2.

[11] Non-chloride based accelerating admixtures may be used in these Classes of concrete.

907-799.02.1--Allowable Hydraulic Cement Types.

907-799.02.1.1--Portland Cement. Portland cement (cement) shall be either Type I or Type II. Type III or Type III (MS) may be used for the production of precast or precast-prestressed concrete members or Classes of concrete with Note 8 in Table 1.

907-799.02.1.2--Blended Cement. Blended hydraulic cements (blended cements) shall be of the following types and conform to Subsection 701.04:

Type IL – Portland-limestone cement
Type IP – Portland-pozzolan cement
Type IS – Portland blast-furnace slag cement

Blended cement Types IL, IP, and IS meeting the "MS" sulfate resistance requirements listed in AASHTO M 240, Table 3 may also be used.

907-799.02.2--Replacement of Portland Cement or Blended Cement. Replacement of portland cement or blended cement shall be on a weight basis. At least 50% by weight of total cementitious material per cubic yard shall be portland cement.

Except as noted for concrete exposed to soluble sulfates or sea water in Subsection 907-799.02.4, the maximum replacement limits of portland cement or blended cement by weight by fly ash and

slag cement shall be in accordance with Table X provided the 50% by weight of total cementitious material per cubic yard of portland cement is maintained.

Table X
Replacement Ranges of Portland cements and Blended cements by Fly Ash or Slag Cement

Portland cement or Blended cement type	Fly ash replacement range (%)	Slag cement replacement range (%)
Types I, II, III, and III (MS)	20 - 25	45 - 50
Types IL and IL (MS)	20 - 35	35 - 40
Types IS and IS (MS)	20 - 25	20 - 25
Types IP and IP (MS)	No replacement combination allowed	

Replacement contents below the range minimum in Table X may be used in concrete, but the concrete does not qualify for any special considerations, such as the maximum acceptance temperature for concrete in Subsection 804.02.13.1.5. Special considerations shall only apply for replacement of both portland cement and blended cement by either fly ash or slag cement.

907-799.02.3--Alkali Content. The total alkali content for all classes of concrete shall not exceed 4.0 lb per cubic yard based on the alkali contribution from the portland cement. The maximum cement alkali content reported on the cement mill certificate shall be used in this determination. An example calculation can be found in the Department's *Concrete Manual*.

907-799.02.4--Exposure to Soluble Sulfates or Seawater. When portland cement or blended cement concrete is exposed to moderate or severe soluble sulfate conditions or to seawater listed, cement types and replacement of cement by Class F fly ash, slag cement, or metakaolin shall be as follows in Table R.

Class C fly ash shall not be used as a replacement for cement in any of the sulfate exposure conditions listed below. Type IP blended cement shall not be used in any of the sulfate exposure conditions listed below.

Table R
Cementitious Materials Combinations for Soluble Sulfate Conditions or Seawater

	Exposure to Moderate Sulfates or Exposure to Seawater	**Exposure to Severe Sulfates**
Water-soluble sulfate (SO_4) in soil, % by mass	0.10 - 0.20	0.20 - 2.00
Sulfate (SO_4) in water, ppm	150 - 1,500	1,500 - 10,000
Portland cement or Blended cement types	**Replacement Ranges by SCMs (%)**	
Type I or Type III	24.5 - 25.0% Class F fly ash, or 49.5 - 50.0% Slag cement, or 19.5 - 20.0% Metakaolin	49.5 - 50.0% Slag cement
Type II or Type III (MS)	See Note 1	24.5 - 25.0% Class F fly ash, or 49.5 - 50.0% Slag cement, or 19.5 - 20.0% Metakaolin
Type IL	24.5 - 35.0% Class F fly ash, or 49.5 - 50.0% Slag cement, or 19.5 – 20.0% Metakaolin	49.5 - 50.0% Slag cement
Type IL (MS)	See Note 1	24.5 - 35.0% Class F fly ash, or 49.5 - 50.0% Slag cement, or 19.5 - 20.0% Metakaolin
Type IS	24.5 - 25.0% Class F fly ash, or 24.5 - 25.0% Slag cement, or 19.5 - 20.0% Metakaolin	24.5 - 25.0% Class F fly ash, or 24.5 - 25.0% Slag cement, or 19.5 - 20.0% Metakaolin
Type IS (MS)	See Note 1	24.5 - 25.0% Class F fly ash, or 24.5 - 25.0% Slag cement, or 19.5 - 20.0% Metakaolin
Type IP (MS)	No replacement combination allowed	Type not allowed

[1] Class F fly ash or slag cement may be added as a replacement for cement as allowed in Subsection 907-799.02.2.

907-799.02.5--Chemical Admixtures. At least one water-reducing admixture or water-reducing/set-retarding admixture shall be used in all classes of concrete in accordance with the manufacturer's recommended dosage range. Admixtures providing a specific performance characteristic other than those of water reduction or set retardation may be used in accordance with the manufacturer's recommended dosage range. Accelerating admixtures shall not be used unless approved by the State Materials Engineer and as applied to Classes by Note 11 in Table 1. Any combinations of admixtures shall be approved by the Engineer before their use.

907-799.02.6--Aggregates.

907-799.02.6.1--Lightweight Aggregate Requirements for Bridge Decks. For bridge decks constructed following the requirements of Subsection 804.03.19.7.3, Subsection 804.03.14.2 and Subsection 804.03.17.2, then the Class BD or Class BDX mixture design shall contain LWA meeting the requirements of Subsection 703.19.2 and have an internal curing water content of 8.0 lbs. per 100 lbs. of total cementitious materials in the mixture design; mixture designs not containing LWA and the required minimum internal curing water content shall not be used.

907-799.02.6.2--Class WT Concrete. Class WT concrete used in fiber-reinforced concrete pavements with a design thickness greater than or equal to 4 inches, size 57 coarse aggregate shall be used. Class WT concrete used in fiber-reinforced concrete pavements with a design thickness less than 4 inches, size 67 coarse aggregate shall be used.

907-799.03--Proportioning of Hydraulic Cement Concrete Mixture Design. Proportioning of hydraulic cement concrete shall be based on an existing mixture of which the producer has field experience and documentation or based on a recently batched laboratory mixture tested according to the required specifications.

907-799.03.1--Proportioning on the Basis of Previous Field Experience of Trial Mixtures. Where a concrete production facility has a record, based on at least 10 consecutive strength tests from at least 10 different batches within the past 12 months from a mixture not previously used on Department projects, the standard deviation shall be calculated. The record of tests from which the standard deviation is calculated shall:

(a) Represent similar materials and conditions to those expected. Changes in materials and proportions within the test record shall not have been more closely restricted than those for the proposed work.
(b) Represent concrete produced to meet a specified strength.
(c) Consist of 10 consecutive tests, average of three cylinders per test, tested at 28 days. For all mixture designs, for each of these tests on the plastic concrete the test data shall meet the acceptance criteria of Subsection 804.02.13.1.

The standard deviation, *s,* shall be calculated as:

$$s = \left[\sum (X_i - \bar{X})^2 \div (N - 1)\right]^{1/2}$$

where:

X_i = the strength result of an individual test
$\bar{X}$ = the average of individual tests in the series
N = number of tests in the series

When the concrete production facility does not have a record of tests for calculation of standard deviation, as required in the above formula, the requirements of Subsection 907-799.03.2 shall govern.

The required average compressive strength (f'_{cr}) used as the basis for selection of concrete proportions shall conform to the inequality listed below, while using a standard deviation, s, calculated as shown above.

$$\overline{X} \geq f'_{cr}$$

where:

$$f'_{cr} = f'_c + 1.43s$$

where:

f'_c = specified compressive strength of concrete, psi
f'_{cr} = required average compressive strength of concrete, psi
s = standard deviation, psi

1.43 represents the Lower Quality Index necessary to assure that 93% of compressive strength tests are above f'_c.

907-799.03.2--Proportioning on the Basis of Laboratory Trial Mixtures. When an acceptable record of field test results is not available, concrete proportions shall be established based on laboratory trial mixtures meeting the following restrictions:

(a) The combination of materials shall be those intended for use in the proposed work.
(b) Trial mixtures having proportions and consistencies suitable for the proposed work shall be made using the ACI 211.1 as a guide to proportion the mixture design.
(c) Trial mixtures shall be designed to produce a slump within ±¾ inch of the design slump allowed, and for air-entrained concrete, ±0.5 percent of the maximum permitted air content in Table 1 in Subsection 907-799.02. The temperature of freshly mixed concrete in trial mixtures shall be reported.
(d) For each proposed mixture, at least three compressive test cylinders shall be made and cured in accordance with AASHTO R 39. Each change of water-cement ratio shall be considered a new mixture. The cylinders shall be tested for strength in accordance with AASHTO T 22 and shall be tested at 28 days.
(e) The required average strength of laboratory trial mixes shall exceed f'_c by 1200 psi for concrete mixture designs less than 5000 psi and by 1400 psi for concrete mixture designs of 5000 psi or more.
(f) The laboratory trial batch mixtures shall have been made within the previous 12 months before being submitted for approval and shall not have been previously used on Department projects.

907-799.04--Documentation of Average Strength. Documentation that the proposed concrete proportions will produce an average strength equal to or greater than the required average shall consist of the strength test records from field tests or results from laboratory trial mixtures.

907-799.05--Field Verification of Concrete Mixture Design. Unless otherwise noted within this Subsection, and except for Class PO, concrete mixture designs will only be tentatively approved pending field verification submission. All concrete placed using a mixture design which has not been acceptably field verified will not be paid for by the Department until field verification is submitted and approved as having been found to meet the requirements in this Subsection and those in the Department's *Concrete Manual*. The requirements for yield, slump, or total air content shall be successfully met within the first three (3) production days. Mixture designs may be transferred to other projects without additional field verification testing if the most recent field verification testing was conducted within the past twelve (12) months. All concrete mixtures will have a complete field verification performed and submitted to the Department's Materials Division every 12 months.

The Contractor's Certified Quality Control Technicians shall test each concrete mixture design upon the first placement of the mixture. Aggregates and concrete tests during the first placement shall be as follows.

Aggregates	Concrete
Bulk Specific Gravity	Water Content
Moisture	Slump
Gradation	Air Content
	Unit Weight
	Yield

For all Classes of concrete, the mixture shall be verified to yield within 2.0% of the correct volume when all the mix water is added to the batch, either by the batch plant or as ice used to control mixture acceptance temperature.

For all Classes of concrete other than DS, F, and FX, the mixture shall produce a slump within a minus 1½-inch tolerance of the design for mixtures with a design slump of three inches (3") or less or within a minus 2½-inch tolerance of the design for mixtures with a design slump of greater than three inches (3"), and producing a total air content within the allowable air content range in Table 3.

For Class DS, the slump range shall be 8 inches ±1 inch. For Class DS exposed to seawater, the total air content shall be within the allowable air content range in Table 3. For Class DS not exposed to seawater the total air content shall be within the requirements in Table 3.

For Classes F and FX, the slump shall be within a minus 1½-inch tolerance of the design for mixtures with a design slump of three inches (3") or less or within a minus 2½-inch tolerance of the design for mixtures with a design slump of greater than three inches (3"). For Classes F and FX exposed to seawater, the total air content shall be within the allowable air content range in Table 3. For Classes F and FX not exposed to seawater the total air content shall be within the requirements in Table 3.

The mixture shall be adjusted and retested, if necessary, on subsequent placements until the above-mentioned properties are met.

If the requirements for yield, slump, or total air content are not met within the first three (3) production days, subsequent field verification testing shall not be permitted on Department projects, and the mixture design shall not be used until the requirements listed above are met. Any mixture design adjustments, changes in the mixture proportions, are to be made by a Class III Certified Technician representing the Contractor. After the mixture design has been verified and adjustments made, verification test results will be reviewed by the Engineer.

907-799.05.1--Field Verification and Slump Loss of Class DS Concrete Mixture Designs. Prior to placement of Class DS concrete mixture, the Contractor shall provide test results of a slump loss test using approved methods to demonstrate that the mixture meets the four-hour requirement in Subsection 803.03.2.7.1. The Contractor shall notify the Department 48 hours prior to performing the slump loss test. These tests shall be conducted successfully by an approved testing laboratory during the installation of the trial shaft, with personnel from the Department present. As an alternative, the slump loss test can be performed prior to the installation of the trial shaft.

The slump loss test shall be conducted at temperatures and conditions similar to those expected at the job site at the time of the installation of the trial shaft. The sample for the slump loss test shall be from a minimum batch size of four (4) cubic yards of concrete. If the temperature between a successful slump loss test and the installation of the production shaft exceeds 10ºF above the concrete temperature, another successful slump loss test shall be performed on the first truckload of concrete as part of the installation of the trial shaft. The requirement to limit the time between the previous slump loss test and an installation of the trial shaft also applies to Class DS concrete mixture designs being transferred from another project. During any shaft installation a slump loss test shall be conducted by the Contractor at the direction of the Engineer from the concrete at the site for verification of slump loss requirements using a sample from a minimum batch size of four cubic yards of concrete.

907-799.05.2--Field Verification of Class BDO and Class WT Concrete Mixture Designs. Prior to mixture design submittal, the Contractor shall perform a field verification on Class BDO and Class WT concrete mixture designs and submit the field verification data and batch ticket information as part of the mixture submittal.

In addition to the requirements in Subsection 907-799.03.3, this documentation must indicate that the mixture achieves the requirements in Table 1 for:

- the compressive strengths required for acceptance within 28 days;
- the compressive strengths required for early opening to traffic within the time specified by the Engineer; and
- if the maturity method is to be used to estimate the compressive strength for early opening to traffic, the strength/maturity relationship shall be verified within 10% of the predicted compressive strength value determined by the maturity curve following the requirements of AASHTO T325 during the field verification.

907-799.06--Adjustments of Mixtures. The mixture design may be adjusted by the Class III Certified Technician representing the Contractor in accordance with the allowable revisions listed in paragraph 5.7 of the Department's *Concrete Manual*. Written notification shall be submitted to the Engineer a minimum of seven (7) days prior to any source or brand of material change, aggregate size change, allowable material type change, or decrease in any cementitious material content. Any adjustments of the concrete mixture design shall necessitate repeat of field verification procedure as described in Subsection 907-799.05 and approval by the Engineer.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-808-1 **CODE: (IS)**

DATE: 11/01/2018

SUBJECT: Joint Repair

Section 808, Joint Repair, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

907-808.04--Method of Measurement. Delete the paragraph in Subsection 808.04 on page 1009, and substitute the following.

When a pay item is included in the plans, joint repair will be measured by the linear foot and mortar mix will be measured by the gallon. The volume of measurement for the epoxy/sand mortar mix will be determined from the summation of the volumes of the epoxy components and the volume of sand will not be measured for payment.

907-808.05--Basis of Payment. Delete the paragraph in Subsection 808.05 on page 1009, and substitute the following.

When a pay item is included in the plans, joint repair, measured as prescribed above, will be paid for at the contract unit price per linear foot, which price shall be full compensation for furnishing and placing all materials, labor, tools, equipment, and all incidentals necessary to complete the work.

When a pay item is included in the plans, mortar mix, measured as prescribed above, will be paid for at the contract unit price per gallon, which price shall be full compensation for furnishing all materials including sand and forming materials, and all incidentals necessary to complete the work. No payment will be made for the sand used in the epoxy mortar mix.

The price bid for each item of work shall include the cost of continuous maintenance of traffic and protective services as required by the Department's Traffic Control Plan. This shall include all required individual traffic control devices.

Payment will be made under:

907-808-A: Joint Repair - per linear foot

907-808-B: Mortar Mix - per gallon

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISIONS NO. 907-823-8 **CODE: (SP)**

DATE: 08/06/2024

SUBJECT: Preformed Joint Seal

Section 907-823, Preformed Joint Seal, is hereby added to and becomes a part of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction as follows.

SECTION 907-823--PREFORMED JOINT SEAL

907-823.01--Description. This work consists of furnishing and installing preformed joint seals in accordance with these specifications and the details shown in the Plans or drawings provided.

907-823.02--Materials. The Contractor shall furnish a manufacturer's certification stating that the material used meets the requirements of this specification.

The preformed joint seal shall be one of the following, or an approved equal. The size of the seal, Type I, Type II, or Type III shall be determined based on the size of the joint opening, as detailed in the Plans or drawings provided. It is the Contractor's responsibility to ensure that the size selected is appropriate for the width of the joint. Type I shall be used for joint openings less than two inches (2"). Type II shall be used for joint openings greater than two inches (2"), with the maximum joint opening being two and one-half inches (2½"). Type III shall be used for joint openings greater than two and one-half inch (2½"), with the maximum joint opening being three and one-half inch (3½"). In cases where the joint opening (design width "A" plus seat widths on both sides of the joint opening) is greater than four inches (4"), another type of expansion material shall be required as directed by the Director of Structures, State Bridge Engineer.

1. Silicoflex Joint Sealing System
   Manufactured by R.J. Watson, Inc. in Alden, NY
   www.rjwatson.com

2. Wabo®SPS Joint System
   Manufactured by Watson Bowman Acme Corporation in Amherst, NY
   www.wbacorp.com

3. Silspec SSS Silicone Strip Seal
   Manufactured by SSI Commercial & Highway Construction Materials in Tulsa, OK
   www.ssicm.com

907-823.03--Construction Methods. Preformed joint seals shall be installed in accordance with the manufacturer's recommendations. The material shall seal the deck surface, gutters, and curbs to prevent moisture or other contaminants from leaking through the joints. The joint seal shall be installed in such a manner that the top surface of the material is within the minimum and maximum depths below the roadway or bridge surface recommended by the manufacturer.

Saw cutting for the joint repair shall be accomplished by sawing at the locations and depth shown on the joint repair detail sheets in the plans or in the contract documents. Saw cuts shall be as near vertical as possible at the saw line of the repair area. The saw cut depth shall be equivalent to the installation depth required by the manufacturer's specifications, and the type specified shall be the same as the type specified for preformed joint seal.

907-823.04--Method of Measurement. Preformed joint seal of the type specified will be measured in linear feet along the length of the centerline joint.

Saw cuts of the type specified will be measured by the linear foot along the length of the bridge deck on each side of the centerline joint.


907-823.05--Basis of Payment. Preformed joint seal, measured as prescribed above, will be paid for at the contract unit price per linear foot, which shall be full compensation for furnishing all labor, equipment, tools, materials, and incidentals necessary to complete the work.

Saw cuts, measured as prescribed above, will be paid for at the contract unit price per linear foot, which shall be full compensation for furnishing all labor, equipment, tools, materials, and incidentals necessary to complete the work.

Payment will be made under:


907-823-A: Preformed Joint Seal, Type ___ - per linear foot

907-823-B: Saw Cut, Type _____ - per linear foot

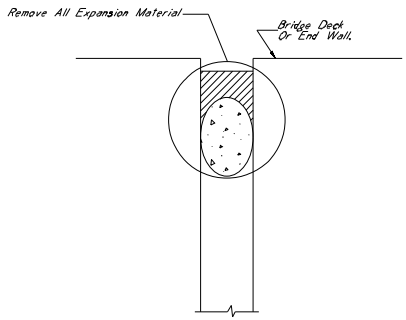


TYPICAL SECTION AT EXISTING JOINT

Showing Existing Expansion Materials To Be Removed And Replaced With Preformed Joint Seal

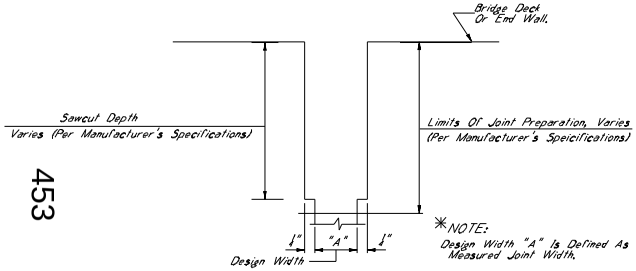


TYPICAL SECTION AT JOINT AFTER REMOVAL OF EXISTING SEAL AND SAWCUT

Showing Limits Of Joint Preparation For Application Of New Joint Seal Materials And Sawcut

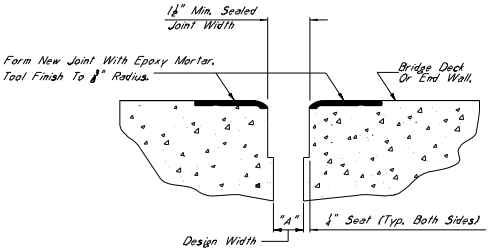

TYPICAL SECTION AT SAWCUT & JOINT REPAIR

Showing Area Where Repairs Are Made After Sawcut, With Epoxy Mortar Or Approved Equivalent

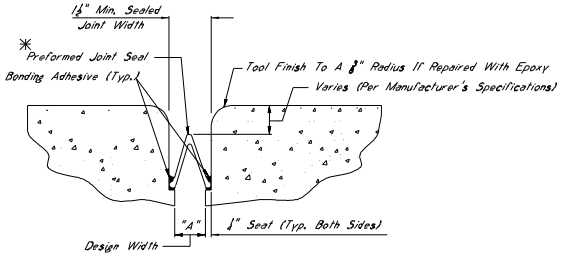

TYPICAL SECTION AT SAWCUT & SEALED JOINT

Showing Sealed Joint After Sawcut

*NOTES:

1. The Preformed Joint Seal Shall Be One Of The Following, Installed According To The Manufacturer's Specifications:


   A. Silicoflex Joint Sealing System
   Manufactured By R.J. Watson, Inc. In Alden, NY
   www.rjwatson.com

   B. Wabo SPS Joint System
   Manufactured By Watson Bowman Acme Corporation In Amherst, NY
   www.wbacorp.com

   C. Silspec S55 Silicone Strip Seal
   Manufactured By SSI Commercial & Highway Construction Materials
   www.ssicm.com

2. For Estimating Purposes, The RJ Watson Silicoflex Joint Sealing System Was Selected. However, Should Another Supplier Be Chosen, It Is The Contractor's Responsibility To Ensure That The Manufacturer's Recommendations Are Followed For Joint Preparation, Installation Depths And Widths, Adhesive Setting Times, And Any Other Variances Between The Specifications Provided By The Manufacturers. A Manufacturer Representative Shall Be Present At The Time Joint Sealing Begins To Ensure That The Contractor Is Properly Schooled In Installation Of The Joint Material.

3. Joints Shall Be Sealed At Their Design Widths, Dimension "A", Which Is Defined As The Actual Width Of The Joint Opening. This Width Does Not Account For The ½" Seat Required On Both Sides Of The Joint. Preformed Joint Seal, Type I, Shall Be Used For Design Widths Less Than 2". Preformed Joint Seal, Type II, Shall Be Used For Design Widths Greater Than or Equal To 2", With The Maximum Design Width Being 2½". Type III Shall Be Used For Design Width Greater Than 2½", With The Maximum Design Width Being 3½". In Cases Where Design Widths Are Greater Than 3½", Another Type Of Expansion Material Shall Be Required As Directed By The Director Of Structures, State Bridge Engineer. It Is The Contractor's Responsibility To Ensure That The Size Selected Is Appropriate For The Width Of The Joint.



ELEVATION AT END OF SPAN

*NOTES:

For Jersey Shape Barriers, The Minimum Required Vertical Joint Seal Dimension Within The Barrier Is 3".
For Post And Beam Barriers, The Minimum Required Vertical Joint Seal Dimension Within The Barrier is 6".

NOTES ON ASSOCIATED ITEMS OF WORK:

907-808-A002 JOINT REPAIR

Description: Shall Include The Work Necessary To Repair Joints In Preparation For The Placement Of New Expansion Material, As Designated In The Detail Drawings Provided. Epoxy Mortar Shall Also Be Included Under This Item Of Work. Removal Of Existing Silicone Sealed, Compression, And AC Sealed Joint Materials Will Not Be Paid For Directly And Shall Be Considered As Absorbed Under This Item Of Work. Removal Of Joint Materials And Any Trash And Debris (Including But Not Limited to Compacted Dirt, Vegetation and Trash) Located At Any Depth Within The Joint Shall Be Included Under This Item Of Work. All Other Requirements Shall Be In Accordance With The Applicable Provisions Of Section 808 Of The Specifications And Any Other Sections Specified Therein.

Basis Of Payment: The Accepted Quantities Will Be Paid For In Linear Feet At The Contract Unit Price Along The Length Of The Bridge Deck On Each Side Of The Centerline Joint.

907-808-A003 JOINT REPAIR WITHOUT EPOXY

Description: Shall Include The Work Necessary To Repair Joints In Preparation For The Placement Of New Expansion Material, As Designated In The Detail Drawings Provided. Removal Of Existing Silicone Sealed, Compression, And AC Sealed Joint Materials Shall Be Included Under This Item Of Work. Removal Of Joint Materials And Any Trash And Debris (Including But Not Limited to Compacted Dirt, Vegetation and Trash) Located At Any Depth Within The Joint Shall Be Included Under This Item Of Work. All Other Requirements Shall Be In Accordance With The Applicable Provisions Of Section 808 Of The Specifications And Any Other Sections Specified Therein.

Basis Of Payment: The Accepted Quantities Will Be Paid For In Linear Feet At The Contract Unit Price Along The Length Of The Bridge Deck On Each Side Of The Centerline Joint.

907-823-B001 SAW CUT, TYPE I
907-823-B002 SAW CUT, TYPE II
907-823-B003 SAW CUT, TYPE III

Description: The Saw Cut Depth Shall Be Equivalent To The Installation Depth Required By The Manufacturer's Specifications. The Saw Cut Type Shall Be The Same As The Preformed Joint Seal Selected.

Basis of Payment: The Accepted Quantities Will Be Paid For In Linear Feet At The Contract Unit Price Along The Length Of The Bridge Deck, On Each Side Of The Centerline Joint. It Is The Contractor's Responsibility To Ensure That The Proper Depth Is Selected Based On The Manufacturer's Recomendations.

907-823-A001 PREFORMED JOINT SEAL, TYPE I
907-823-A002 PREFORMED JOINT SEAL, TYPE II
907-823-A003 PREFORMED JOINT SEAL, TYPE III

Description: Shall Include The Manufacturer's Required Joint Preparation Including Sandblasting Both Sides Of The Joint And Blowing The Joint Free Of Debris With Compressed Air And Placement Of The New Preformed Joint Seal


Basis Of Payment: The Accepted Quantities Will Be Paid For In Linear Feet At The Contract Unit Price Along The Length Of The Centerline Joint.

EPOXY MORTAR AND POLYMER CONCRETE NOTES:

Either Epoxy Mortar Or Polymer Concrete May Be Used. Guidelines For Selection Of Materials Can Be Found In Section 808 of the Specifications.


GENERAL NOTES:

1. Specifications: Mississippi Standard Specifications For Road And Bridge Construction, 2017.
2. No Change Of Plans Will Be Permitted Except By Written Approval Of The Director Of Structures, State Bridge Engineer. Minor Changes To Detail Of Design Or Construction Procedure May Be Authorized By The Bridge Engineer Provided Such Changes Will Not Be Cause For Contract Price Adjustment.
3. Work For Which No Pay Item Is Provided In The Proposal Will Not Be Paid For Directly And Shall Therefore Be Considered An Absorbed Item of Work.




TYPICAL SECTION AT EXISTING JOINT

Showing Existing Expansion Device To Be Removed And Replaced With Preformed Joint Seal

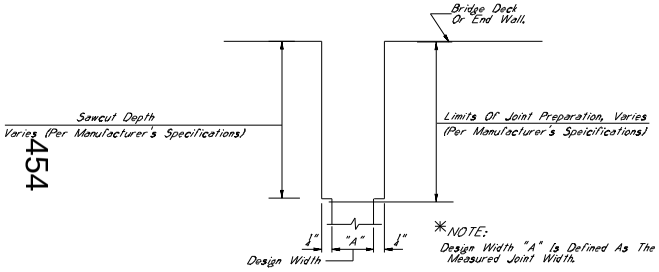


TYPICAL SECTION AT JOINT AFTER REMOVAL OF EXISTING SEAL AND SAWCUT

Showing Limits Of Joint Preparation For Application Of New Joint Seal Materials And Sawcut

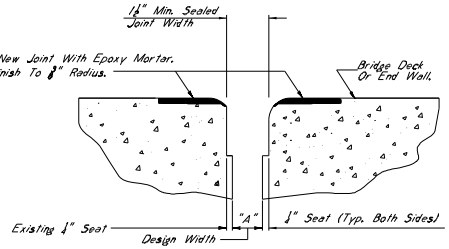

TYPICAL SECTION AT SAWCUT & JOINT REPAIR

Showing Area Where Repairs Are Made After Sawcut, With Epoxy Mortar Or Approved Equivalent

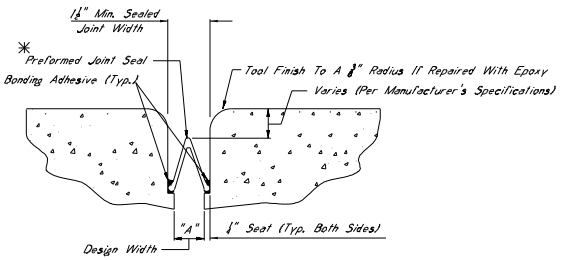

TYPICAL SECTION AT SAWCUT & SEALED JOINT

Showing Sealed Joint After Sawcut And Repair With Epoxy Mortar

✳NOTES:

1. The Preformed Joint Seal Shall Be One Of The Following, Installed According To The Manufacturer's Specifications:


   A. Silicoflex Joint Sealing System
   Manufactured By R.J. Watson, Inc. In Alden, NY
   www.rjwatson.com

   B. Wabo SPS Joint System
   Manufactured By Watson Bowman Acme Corporation In Amherst, NY
   www.wbacorp.com

   C. Silspec SSS Silicone Strip Seal
   Manufactured By SSI Commercial & Highway Construction Materials
   www.ssicm.com

2. For Estimating Purposes, The RJ Watson Silicoflex Joint Sealing System Was Selected. However, Should Another Supplier Be Chosen, It Is The Contractor's Responsibility To Ensure That The Manufacturer's Recommendations Are Followed For Joint Preparation, Installation Depths And Widths, Adhesive Setting Times, And Any Other Variances Between The Specifications Provided By The Manufacturers. A Manufacturer Representative Shall Be Present At The Time Joint Sealing Begins To Ensure That The Contractor Is Properly Schooled In Installation Of The Joint Material.

3. Joints Shall Be Sealed At Their Design Widths, Dimension "A", Which Is Defined As The Actual Width Of The Joint Opening. This Width Does Not Account For The ½" Seat Required On Both Sides Of The Joint. Preformed Joint Seal, Type I, Shall Be Used For Design Widths Less Than 2". Preformed Joint Seal, Type II, Shall Be Used For Design Widths Greater Than or Equal To 2", With The Maximum Design Width Being 2½". Type III Shall Be Used For Design Width Greater Than 2½", With The Maximum Design Width Being 3½". In Cases Where Design Widths Are Greater Than 3½", Another Type Of Expansion Material Shall Be Required As Directed By The Director Of Structures, State Bridge Engineer. It Is The Contractor's Responsibility To Ensure That The Size Selected Is Appropriate For The Width Of The Joint.



✳NOTES:

For Jersey Shape Barriers, The Minimum Required Vertical Joint Seal Dimension Within The Barrier Is 3".
For Post And Beam Barriers, The Minimum Required Vertical Joint Seal Dimension Within The Barrier Is 6".

ELEVATION AT END OF SPAN

NOTES ON ASSOCIATED ITEMS OF WORK:

907-808-A002 JOINT REPAIR

Description: Shall Include The Work Necessary To Repair Joints In Preparation For The Placement Of New Expansion Material, As Designated In The Detail Drawings Provided. Removal Of Joint Materials And Any Trash And Debris (Including But Not Limited To Compacted Dirt, Vegetation and Trash) Located At Any Depth Within The Joint Shall Be Included Under This Item Of Work. Epoxy Mortar Shall Also Be Included Under This Item Of Work. Removal of Existing Silicone Sealed, Compression, And AC Sealed Joint Materials Will Not Be Paid For Directly And Shall Be Considered As Absorbed Under This Item Of Work. All Other Requirements Shall Be In Accordance With The Applicable Provisions Of Section 808 Of The Specifications And Any Other Sections Specified Therein.

Basis Of Payment: The Accepted Quantities Will Be Paid For In Linear Feet At The Contract Unit Price Along The Length Of The Bridge Deck On Each Side Of The Centerline Joint.

907-808-A003 JOINT REPAIR WITHOUT EPOXY

Description: Shall Include The Work Necessary To Repair Joints In Preparation For The Placement Of New Expansion Material, As Designated In The Detail Drawings Provided. Removal Of Existing Silicone Sealed, Compression, And AC Sealed Joint Materials Shall Be Included Under This Item Of Work. Removal Of Joint Materials And Any Trash And Debris (Including But Not Limited To Compacted Dirt, Vegetation and Trash) Located At Any Depth Within The Joint Shall Be Included Under This Item Of Work. All Other Requirements Shall Be In Accordance With The Applicable Provisions of Section 808 Of The Specifications And Any Other Sections Specified Therein.

Basis Of Payment: The Accepted Quantities Will Be Paid For In Linear Feet At The Contract Unit Price Along The Length Of The Bridge Deck On Each Side Of The Centerline Joint.

907-823-A001 SAW CUT, TYPE I
907-823-A002 SAW CUT, TYPE II
907-823-A003 SAW CUT, TYPE III

Description: The Saw Cut Depth Shall Be Equivalent To The Installation Depth Required By The Manufacturer's Specifications. The Saw Cut Type Shall Be The Same As The Preformed Joint Seal Selected.

Basis of Payment: The Accepted Quantities Will Be Paid For In Linear Feet At The Contract Unit Price Along The Length Of The Bridge Deck On Each Side Of The Centerline Joint. It Is The Contractor's Responsibility To Ensure That The Proper Depth Is Selected Based On The Manufacturer's Recomendations.

907-823-A001 PREFORMED JOINT SEAL, TYPE I
907-823-A002 PREFORMED JOINT SEAL, TYPE II
907-823-A003 PREFORMED JOINT SEAL, TYPE III

Description: Shall Include The Manufacturer's Required Joint Preparation Including Sandblasting Both Sides Of The Joint And Blowing The Joint Free Of Debris With Compressed Air And Placement Of The New Preformed Joint Seal


Basis Of Payment: The Accepted Quantities Will Be Paid For In Linear Feet At The Contract Unit Price Along The Length Of The Centerline Joint.

EPOXY MORTAR AND POLYMER CONCRETE NOTES:

Either Epoxy Mortar Or Polymer Concrete May Be Used. Guidelines For Selection Of Materials Can Be Found In Section 808 of the Specifications.


GENERAL NOTES:

1. Specifications: Mississippi Standard Specifications For Road And Bridge Construction, 2017.
2. No Change Of Plans Will Be Permitted Except By Written Approval Of The Director Of Structures, State Bridge Engineer. Minor Changes To Detail Of Design Or Construction Procedure May Be Authorized By The Bridge Engineer Provided Such Changes Will Not Be Cause For Contract Price Adjustment.
3. Work For Which No Pay Item Is Provided In The Proposal Will Not Be Paid For Directly And Shall Therefore Be Considered An Absorbed Item of Work.

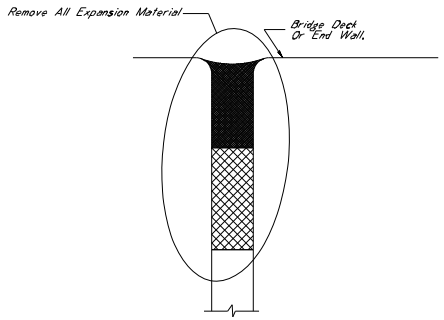


TYPICAL SECTION AT EXISTING JOINT

Showing Existing Expansion Material To Be Removed And Replaced With Preformed Joint Seal

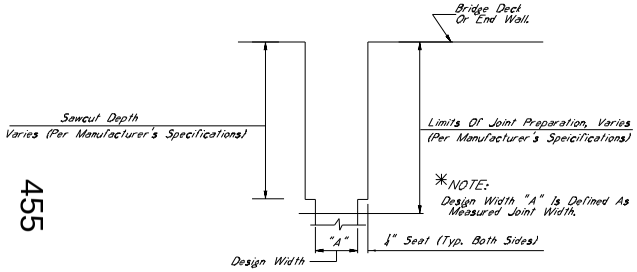


TYPICAL SECTION AT JOINT AFTER REMOVAL OF EXISTING SEAL AND SAWCUT

Showing Limits Of Joint Preparation For Application Of New Joint Seal Materials And Sawcut

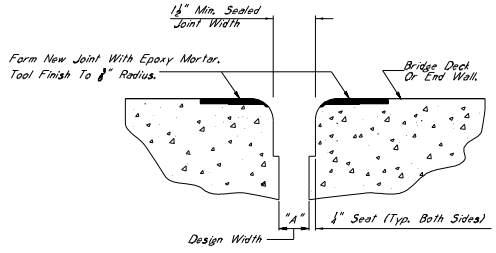

TYPICAL SECTION AT SAWCUT & JOINT REPAIR

Showing Area Where Repairs Are Made After Sawcut, With Epoxy Mortar Or Approved Equivalent

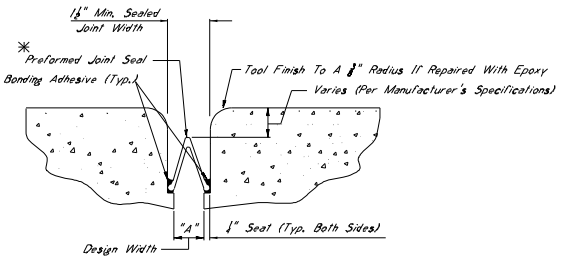

TYPICAL SECTION AT SAWCUT & SEALED JOINT

Showing Sealed Joint After Sawcut And Repair With Epoxy Mortar

✳NOTES:

1. The Preformed Joint Seal Shall Be One Of The Following, Installed According To The Manufacturer's Specifications:


   A. Silicoflex Joint Sealing System
   Manufactured By R.J. Watson, Inc. In Alden, NY
   www.rjwatson.com

   B. Wabo SPS Joint System
   Manufactured By Watson Bowman Acme Corporation In Amherst, NY
   www.wbacorp.com

   C. Silspec 555 Silicone Strip Seal
   Manufactured By SSI Commercial & Highway Construction Materials
   www.ssicm.com

2. For Estimating Purposes, The RJ Watson Silicoflex Joint Sealing System Was Selected. However, Should Another Supplier Be Chosen, It Is The Contractor's Responsibility To Ensure That The Manufacturer's Recommendations Are Followed For Joint Preparation, Installation Depths And Widths, Adhesive Setting Times, And Any Other Variances Between The Specifications Provided By The Manufacturers. A Manufacturer Representative Shall Be Present At The Time Joint Sealing Begins To Ensure That The Contractor Is Properly Schooled In Installation Of The Joint Material.

3. Joints Shall Be Sealed At Their Design Widths, Dimension "A", Which Is Defined As The Actual Width Of The Joint Opening. This Width Does Not Account For The ¼" Seat Required On Both Sides Of The Joint. Preformed Joint Seal, Type I, Shall Be Used For Design Widths Less Than 2". Preformed Joint Seal, Type II, Shall Be Used For Design Widths Greater Than or Equal To 2", With The Maximum Design Width Being 2½". Type III Shall Be Used For Design Width Greater Than 2½" With The Maximum Design Width Being 3½". In Cases Where Design Widths Are Greater Than 3½", Another Type Of Expansion Material Shall Be Required As Directed By The Director Of Structures, State Bridge Engineer. It Is The Contractor's Responsibility To Ensure That The Size Selected Is Appropriate For The Width Of The Joint.



✳NOTES:

For Jersey Shape Barriers, The Minimum Required Vertical Joint Seal Dimension Within The Barrier Is 3". For Post And Beam Barriers, The Minimum Required Vertical Joint Seal Dimension Within The Barrier is 6".

ELEVATION AT END OF SPAN

NOTES ON ASSOCIATED ITEMS OF WORK:

907-808-A002 JOINT REPAIR

Description: Shall Include The Work Necessary To Repair Joints In Preparation For The Placement Of New Expansion Material, As Designated In The Detail Drawings Provided. Epoxy Mortar Shall Also Be Included Under This Item Of Work. Removal Of Existing Silicone Sealed, Compression, And AC Sealed Joint Materials Will Not Be Paid For Directly And Shall Be Considered As Absorbed Under This Item Of Work. Removal Of Joint Materials And Any Trash And Debris (Including But Not Limited To Compacted Dirt, Vegetation and Trash) Located At Any Depth Within The Joint Shall Be Included Under This Item Of Work. All Other Requirements Shall Be In Accordance With The Applicable Provisions Of Section 808 Of The Specifications And Any Other Sections Specified Therein.

Basis Of Payment: The Accepted Quantities Will Be Paid For In Linear Feet At The Contract Unit Price Along The Length Of The Bridge Deck On Each Side Of The Centerline Joint.

907-808-A003 JOINT REPAIR WITHOUT EPOXY

Description: Shall Include The Work Necessary To Repair Joints In Preparation For The Placement Of New Expansion Material, As Designated In The Detail Drawings Provided. Removal Of Existing Silicone Sealed, Compression, And AC Sealed Joint Materials Will Not Be Paid For Directly And Shall Be Considered As Absorbed Under This Item Of Work. Removal Of Joint Materials And Any Trash And Debris (Including But Not Limited To Compacted Dirt, Vegetation And Trash) Located At Any Depth Within The Joint Shall Be Included Under This Item Of Work. All Other Requirements Shall Be In Accordance With The Applicable Provisions Of Section 808 Of The Specifications And Any Other Sections Specified Therein.

Basis Of Payment: The Accepted Quantities Will Be Paid For In Linear Feet At The Contract Unit Price Along The Length Of The Bridge Deck On Each Side Of The Centerline Joint.

907-823-B001 SAW CUT, TYPE I
907-823-B002 SAW CUT, TYPE II
907-823-B003 SAW CUT, TYPE III

Description: The Saw Cut Depth Shall Be Equivalent To The Installation Depth Required By The Manufacturer's Specifications. The Saw Cut Type Shall Be The Same As The Preformed Joint Seal Selected.

Basis of Payment: The Accepted Quantities Will Be Paid For In Linear Feet At The Contract Unit Price Along The Length Of The Bridge Deck On Each Side Of The Centerline Joint. It Is The Contractor's Responsibility To Ensure That The Proper Depth Is Selected Based On The Manufacturer's Recomendations.

907-823-A001 PREFORMED JOINT SEAL, TYPE I
907-823-A002 PREFORMED JOINT SEAL, TYPE II
907-823-A003 PREFORMED JOINT SEAL, TYPE III

Description: Shall Include The Manufacturer's Required Joint Preparation Including Sandblasting Both Sides Of The Joint And Blowing The Joint Free Of Debris With Compressed Air And Placement Of The New Preformed Joint Seal

Basis Of Payment: The Accepted Quantities Will Be Paid For In Linear Feet At The Contract Unit Price Along The Length Of The Centerline Joint.

EPOXY MORTAR AND POLYMER CONCRETE NOTES:

Either Epoxy Mortar Or Polymer Concrete May Be Used. Guidelines For Selection Of Materials Can Be Found In Section 808 of the Specifications.

GENERAL NOTES:


1. Specifications: Mississippi Standard Specifications For Road And Bridge Construction, 2017.
2. No Change Of Plans Will Be Permitted Except By Written Approval Of The Director Of Structures, State Bridge Engineer. Minor Changes To Detail Of Design Or Construction Procedure May Be Authorized By The Bridge Engineer Provided Such Changes Will Not Be Cause For Contract Price Adjustment.
3. Work For Which No Pay Item Is Provided In The Proposal Will Not Be Paid For Directly And Shall Therefore Be Considered An Absorbed Item of Work.

✳1" SAWCUT NOTES:

All 1" Sawcuts Shall Be Considered An Absorbed Item of Work. The Contractor Shall Verify Depth Of Reinforcing Steel Before Making Any Sawcuts. The Depth Of The Sawcut Shall Be No More Than The Depth Of The Reinforcing Steel. Any Damage To Reinforcing Steel Shall Be Repaired To The Satisfaction Of The Engineer At No Cost To The State.


✳CONCRETE REMOVAL BLOCKOUT NOTES

Removal Of The Concrete Blockout Area Shall Be Considered An Absorbed Item Of Work Under Pay Item 202-B169. The Contractor Shall Use A Hammer No Larger Than 30 LBs To Complete This Work.

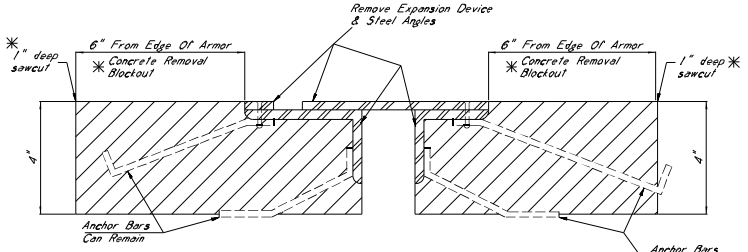


TYPICAL SECTION AT EXISTING JOINT

Showing Existing Expansion Device To Be Removed And Replaced With Preformed Joint Seal

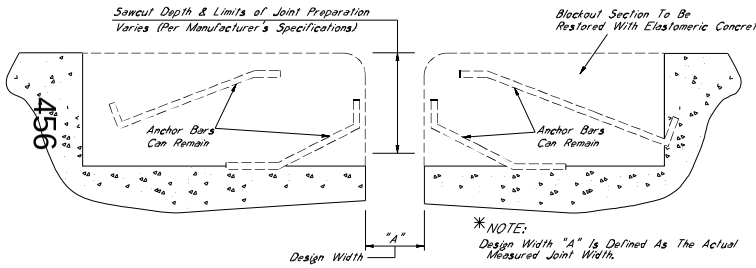


TYPICAL SECTION AT JOINT AFTER REMOVAL OF EXISTING SEAL

Showing Limits Of Joint Preparation For Application Of New Joint Seal Materials

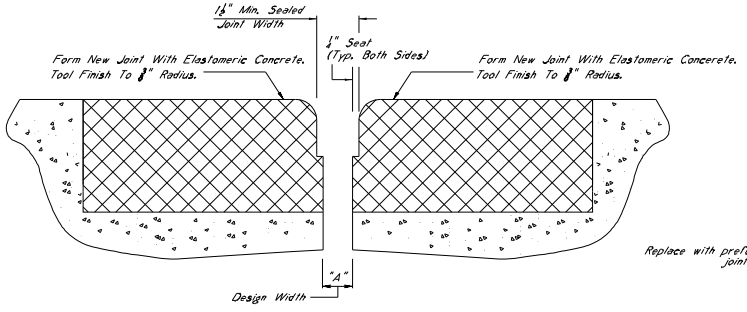

TYPICAL SECTION AT SAWCUT & JOINT REPAIR

Showing Area Where Repairs Are Made After Sawcut With Elastomeric Concrete



TYPICAL SECTION AT SAWCUT & SEALED JOINT

Showing Sealed Joint After Sawcut And Repair With Elastomeric Concrete

✳NOTES:

1. The Preformed Joint Seal Shall Be One Of The Following, Installed According To The Manufacturer's Specifications:


   A. Silicoflex Joint Sealing System
   Manufactured By R.J. Watson, Inc. In Alden, NY
   www.rjwatson.com

   B. Wabo SP5 Joint System
   Manufactured By Watson Bowman Acme Corporation In Amherst, NY
   www.wbacorp.com

   C. Silspec 555 Silicone Strip Seal
   Manufactured By SSI Commercial & Highway Construction Materials
   www.ssicm.com

2. For Estimating Purposes, The RJ Watson Silicoflex Joint Sealing System Was Selected. However, Should Another Supplier Be Chosen, It Is The Contractor's Responsibility To Ensure That The Manufacturer's Recommendations Are Followed For Joint Preparation, Installation Depths And Widths, Adhesive Setting Times, And Any Other Variances Between The Specifications Provided By The Manufacturers. A Manufacturer Representative Shall Be Present At The Time Joint Sealing Begins To Ensure That The Contractor Is Properly Schooled In Installation Of The Joint Material.

3. Joints Shall Be Sealed At Their Design Widths, Dimension "A", Which Is Defined As The Actual Width Of The Joint Opening. This Width Does Not Account For The ¼" Seat Required On Both Sides Of The Joint. Preformed Joint Seal, Type I, Shall Be Used For Design Widths Less Than 2". Preformed Joint Seal, Type II, Shall Be Used For Design Widths Greater Than or Equal To 2", With The Maximum Design Width Being 2½". Type III Shall Be Used For Design Width Greater Than 2½" With The Maximum Design Width Being 3½". In Cases Where Design Widths Are Greater Than 3½", Another Type Of Expansion Material Shall Be Required As Directed By The Director Of Structures, State Bridge Engineer. It Is The Contractor's Responsibility To Ensure That The Size Selected Is Appropriate For The Width Of The Joint.



✳NOTES:

For Jersey Shape Barriers, The Minimum Required Vertical Joint Seal Dimension Within The Barrier Is 3".
For Post And Beam Barriers, The Minimum Required Vertical Joint Seal Dimension Within The Barrier Is 6".

ELEVATION AT END OF SPAN

NOTES ON ASSOCIATED ITEMS OF WORK:

202-B169 REMOVAL OF EXISTING JOINT MATERIAL

Description: Shall Include The Removal Of Material Associated With Armor, Sliding Plate, And Neoprene Expansion Joints, As Designated In The Detail Drawings Provided. Removal of The Concrete Blockout Area Shall Be Absorbed Under This Item Of Work. Other Joint Types Shall Not Be Included Under This Item Of Work Unless Otherwise Directed By The Engineer. Removal of Joint Material And Any Trash And Debris (Including But Not Limited To Compacted Dirt, Vegetation And Trash) Located At Any Depth Within The Joint Shall Be Included Under This Item Of Work.

Basis Of Payment: Removal of Armor And Sliding Plate Joint Material Will Be Paid For In Linear Feet At The Contract Unit Price Along The Length Of The Bridge Deck On Each Side Of The Centerline Joint, While Removal Of Neoprene Joint Material Will Only Be Paid For As The Length Along The Centerline Of The Joint.

907-823-B001 SAW CUT, TYPE I
907-823-B002 SAW CUT, TYPE II
907-823-B003 SAW CUT, TYPE III

Description: The Saw Cut Depth Shall Be Equivalent To The Installation Depth Required By The Manufacturer's Specifications. The Saw Cut Type Shall Be The Same As The Preformed Joint Seal Selected.

Basis of Payment: The Accepted Quantities Will Be Paid For In Linear Feet At The Contract Unit Price Along The Length Of The Bridge Deck On Each Side Of The Centerline Joint.

907-823-A001 PREFORMED JOINT SEAL, TYPE I
907-823-A002 PREFORMED JOINT SEAL, TYPE II
907-823-A003 PREFORMED JOINT SEAL, TYPE III

Description: Shall Include The Manufacturer's Required Joint Preparation Including Sandblasting Both Sides Of The Joint And Blowing The Joint Free Of Debris With Compressed Air And Placement Of The New Preformed Joint Seal

Basis Of Payment: The Accepted Quantities Will Be Paid For In Linear Feet At The Contract Unit Price Along The Length Of The Centerline Joint.

ELASTOMERIC CONCRETE NOTES

907-824-PP007 BRIDGE REPAIR, ELASTOMERIC CONCRETE

Description: Elastomeric Concrete Shall Be One Of The Following Products, Installed According To The Manufacturer's Specifications:

A. Poly-Tron Elastomeric Concrete
Manufactured By R.J. Watson, Inc. In Alden, NY
www.rjwatson.com

B. WaboCrete II
Manufactured By Watson Bowman Acme Corporation In Amherst, NY
www.wbacorp.com

C. Delcrete Elastomeric Concrete
Manufactured By The D.S. Brown Company In North Baltimore, OH
www.dsbrown.com

Basis of Payment: The Accepted Quantities Will Be Paid For In Cubic Yards At The Contract Unit Price.

GENERAL NOTES:


1. Specifications: Mississippi Standard Specifications For Road And Bridge Construction, 2017.
2. No Change Of Plans Will Be Permitted Except By Written Approval Of The Director Of Structures, State Bridge Engineer. Minor Changes To Detail Of Design Or Construction Procedure May Be Authorized By The Bridge Engineer Provided Such Changes Will Not Be Cause For Contract Price Adjustment.
3. Work For Which No Pay Item Is Provided In The Proposal Will Not Be Paid For Directly And Shall Therefore Be Considered An Absorbed Item of Work.

✳1" SAWCUT NOTES:

All 1" Sawcuts Shall Be Considered An Absorbed Item of Work. The Contractor Shall Verify Depth Of Reinforcing Steel Before Making Any Sawcuts. The Depth Of The Sawcut Shall Be No More Than The Depth Of The Reinforcing Steel. Any Damage To Reinforcing Steel Shall Be Repaired To The Satisfaction Of The Engineer At No Cost To The State.


✳CONCRETE REMOVAL BLOCKOUT NOTES

Removal Of The Concrete Blockout Area Shall Be Considered An Absorbed Item Of Work Under Pay Item 202-B169. The Contractor Shall Use A Hammer No Larger Than 30 LBs To Complete This Work.

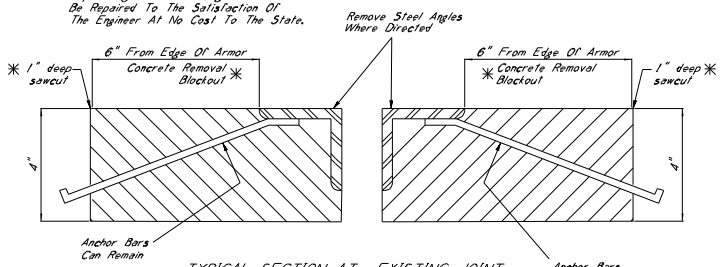

TYPICAL SECTION AT EXISTING JOINT

Showing Existing Expansion Device To Be Removed And Replaced With Preformed Joint Seal

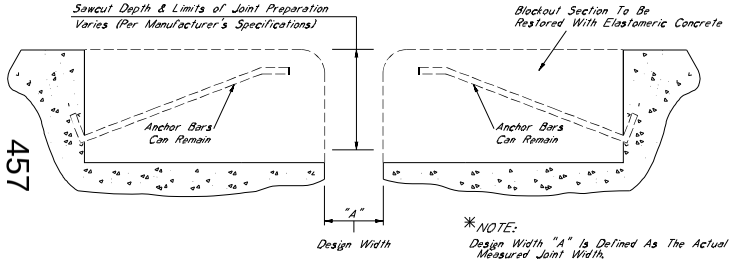


✳NOTE:

Design Width "A" Is Defined As The Actual Measured Joint Width.


TYPICAL SECTION AT JOINT AFTER REMOVAL OF EXISTING SEAL

Showing Limits Of Joint Preparation For Application Of New Joint Seal Materials

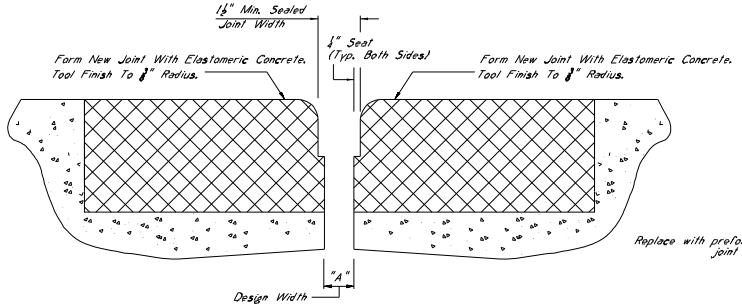

TYPICAL SECTION AT SAWCUT & JOINT REPAIR

Showing Area Where Repairs Are Made After Sawcut With Elastomeric Concrete

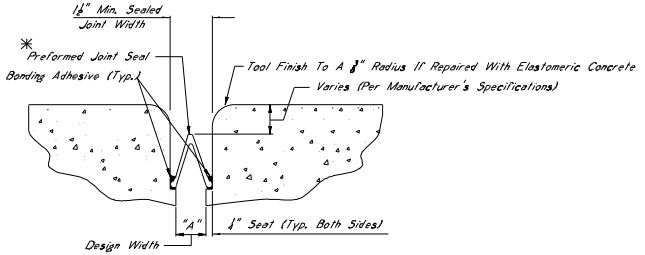

TYPICAL SECTION AT SAWCUT & SEALED JOINT

Showing Sealed Joint After Sawcut And Repair With Elastomeric Concrete

✳NOTES:

1. The Preformed Joint Seal Shall Be One Of The Following, Installed According To The Manufacturer's Specifications:


   A. Silicoflex Joint Sealing System
   Manufactured By R.J. Watson, Inc. In Alden, NY
   www.rjwatson.com

   B. Wabo SPS Joint System
   Manufactured By Watson Bowman Acme Corporation In Amherst, NY
   www.wbacorp.com

   C. Silspec SSS Silicone Strip Seal
   Manufactured By SSI Commercial & Highway Construction Materials
   www.ssicm.com

2. For Estimating Purposes, The R.J. Watson Silicoflex Joint Sealing System Was Selected. However, Should Another Supplier Be Chosen, It Is The Contractor's Responsibility To Ensure That The Manufacturer's Recommendations Are Followed For Joint Preparation, Installation Depths And Widths, Adhesive Setting Times, And Any Other Variances Between The Specifications Provided By The Manufacturers. A Manufacturer Representative Shall Be Present At The Time Joint Sealing Begins To Ensure That The Contractor Is Properly Schooled In Installation Of The Joint Material.

3. Joints Shall Be Sealed At Their Design Widths, Dimension "A", Which Is Defined As The Actual Width Of The Joint Opening. This Width Does Not Account For The ½" Seat Required On Both Sides Of The Joint. Preformed Joint Seal, Type I, Shall Be Used For Design Widths Less Than 2". Preformed Joint Seal, Type II, Shall Be Used For Design Widths Greater Than or Equal To 2", With The Maximum Design Width Being 2½". Type III Shall Be Used For Design Width Greater Than 2½", With The Maximum Design Width Being 3½". In Cases Where Design Widths Are Greater Than 3½", Another Type Of Expansion Material Shall Be Required As Directed By The Director Of Structures, State Bridge Engineer. It Is The Contractor's Responsibility To Ensure That The Size Selected Is Appropriate For The Width Of The Joint.



✳NOTES:

For Jersey Shape Barriers, The Minimum Required Vertical Joint Seal Dimension Within The Barrier Is 3".
For Post And Beam Barriers, The Minimum Required Vertical Joint Seal Dimension Within The Barrier is 6".

ELEVATION AT END OF SPAN

NOTES ON ASSOCIATED ITEMS OF WORK:

202-B169 REMOVAL OF EXISTING JOINT MATERIAL

Description: Shall Include The Removal Of Material Associated With Armor, Sliding Plate, And Neoprene Expansion Joints, As Designated In The Detail Drawings Provided. Removal of The Concrete Blockout Area Shall Be Absorbed Under This Item Of Work. Other Joint Types Shall Not Be Included Under This Item Of Work Unless Otherwise Directed By The Engineer. Removal of Joint Material And Any Trash And Debris (Including But Not Limited To Compacted Dirt, Vegetation And Trash) Located At Any Depth Within The Joint Shall Be Included Under This Item Of Work.

Basis Of Payment: Removal of Armor And Sliding Plate Joint Material Will Be Paid For In Linear Feet At The Contract Unit Price Along The Length Of The Bridge Deck On Each Side Of The Centerline Joint, While Removal Of Neoprene Joint Material Will Only Be Paid For As The Length Along The Centerline Of The Joint.

907-823-B001 SAW CUT, TYPE I
907-823-B002 SAW CUT, TYPE II
907-823-B003 SAW CUT, TYPE III

Description: The Saw Cut Depth Shall Be Equivalent To The Installation Depth Required By The Manufacturer's Specifications. The Saw Cut Type Shall Be The Same As The Preformed Joint Seal Selected.

Basis of Payment: The Accepted Quantities Will Be Paid For In Linear Feet At The Contract Unit Price Along The Length Of The Bridge Deck On Each Side Of The Centerline Joint.

907-823-A001 PREFORMED JOINT SEAL, TYPE I
907-823-A002 PREFORMED JOINT SEAL, TYPE II
907-823-A003 PREFORMED JOINT SEAL, TYPE III

Description: Shall Include The Manufacturer's Required Joint Preparation Including Sandblasting Both Sides Of The Joint And Blowing The Joint Free Of Debris With Compressed Air And Placement Of The New Preformed Joint Seal

Basis Of Payment: The Accepted Quantities Will Be Paid For In Linear Feet At The Contract Unit Price Along The Length Of The Centerline Joint.

ELASTOMERIC CONCRETE NOTES

907-824-PP007 BRIDGE REPAIR, ELASTOMERIC CONCRETE

Description: Elastomeric Concrete Shall Be One Of The Following Products, Installed According To The Manufacturer's Specifications:

A. Poly-Tron Elastomeric Concrete
Manufactured By R.J. Watson, Inc. In Alden, NY
www.rjwatson.com

B. WaboCrete II
Manufactured By Watson Bowman Acme Corporation In Amherst, NY
www.wbacorp.com

C. Delcrete Elastomeric Concrete
Manufactured By The D.S. Brown Company In North Baltimore, OH
www.dsbrown.com

Basis of Payment: The Accepted Quantities Will Be Paid For In Cubic Yards At The Contract Unit Price.

GENERAL NOTES:


1. Specifications: Mississippi Standard Specifications For Road And Bridge Construction, 2017.
2. No Change Of Plans Will Be Permitted Except By Written Approval Of The Director Of Structures, State Bridge Engineer. Minor Changes To Detail Of Design Or Construction Procedure May Be Authorized By The Bridge Engineer Provided Such Changes Will Not Be Cause For Contract Price Adjustment.
3. Work For Which No Pay Item Is Provided In The Proposal Will Not Be Paid For Directly And Shall Therefore Be Considered An Absorbed Item of Work.

✳1" SAWCUT NOTES:

All 1" Sawcuts Shall Be Considered An Absorbed Item of Work. The Contractor Shall Verify Depth Of Reinforcing Steel Before Making Any Sawcuts. The Depth Of The Sawcut Shall Be No More Than The Depth Of The Reinforcing Steel. Any Damage To Reinforcing Steel Shall Be Repaired To The Satisfaction Of The Engineer At No Cost To The State.


✳CONCRETE REMOVAL BLOCKOUT NOTES

Removal Of The Concrete Blockout Area Shall Be Considered An Absorbed Item Of Work Under Pay Item 202-B169. The Contractor Shall Use A Hammer No Larger Than 30 LBs To Complete This Work.

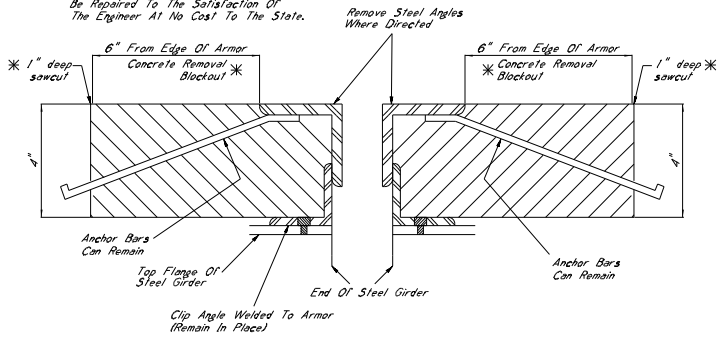

TYPICAL SECTION AT EXISTING JOINT

Showing Existing Expansion Device To Be Removed And Replaced With Preformed Joint Seal

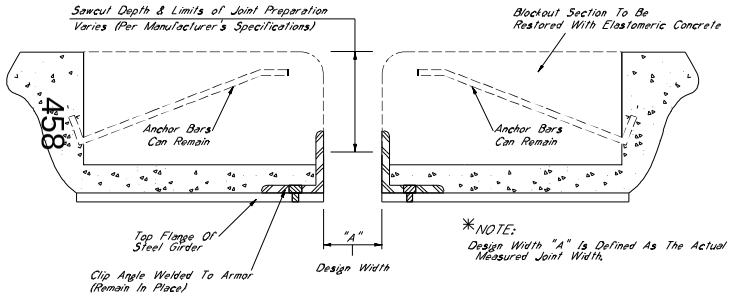


✳NOTE:

Design Width "A" Is Defined As The Actual Measured Joint Width.


TYPICAL SECTION AT JOINT AFTER REMOVAL OF EXISTING SEAL

Showing Limits Of Joint Preparation For Application Of New Joint Seal Materials

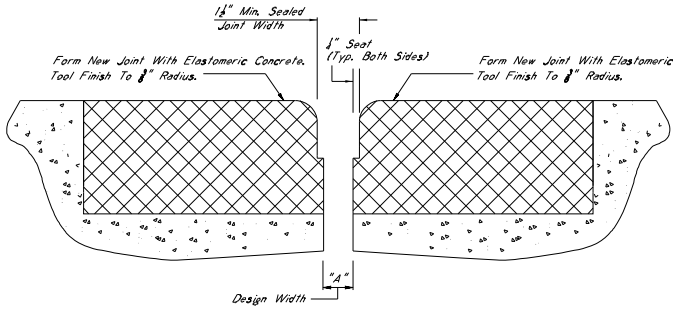

TYPICAL SECTION AT SAWCUT & JOINT REPAIR

Showing Area Where Repairs Are Made After Sawcut With Elastomeric Concrete

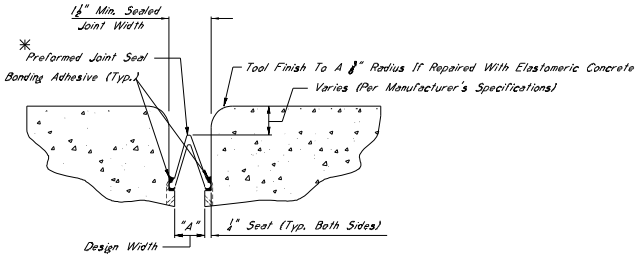

TYPICAL SECTION AT SAWCUT & SEALED JOINT

Showing Sealed Joint After Sawcut And Repair With Elastomeric Concrete

✳NOTES:

1. The Preformed Joint Seal Shall Be One Of The Following, Installed According To The Manufacturer's Specifications:


   A. Silicoflex Joint Sealing System
   Manufactured By R.J. Watson, Inc. In Alden, NY
   www.rjwatson.com

   B. Wabo SPS Joint System
   Manufactured By Watson Bowman Acme Corporation In Amherst, NY
   www.wbacorp.com

   C. Silspec 555 Silicone Strip Seal
   Manufactured By SSI Commercial & Highway Construction Materials
   www.ssicm.com

2. For Estimating Purposes, The RJ Watson Silicoflex Joint Sealing System Was Selected. However, Should Another Supplier Be Chosen, It Is The Contractor's Responsibility To Ensure That The Manufacturer's Recommendations Are Followed For Joint Preparation, Installation Depths And Widths, Adhesive Setting Times, And Any Other Variances Between The Specifications Provided By The Manufacturers. A Manufacturer Representative Shall Be Present At The Time Joint Sealing Begins To Ensure That The Contractor Is Properly Schooled In Installation Of The Joint Material.

3. Joints Shall Be Sealed At Their Design Widths, Dimension "A", Which Is Defined As The Actual Width Of The Joint Opening. This Width Does Not Account For The 1" Seat Required On Both Sides Of The Joint. Preformed Joint Seal, Type I, Shall Be Used For Design Widths Less Than 2". Preformed Joint Seal, Type II, Shall Be Used For Design Widths Greater Than or Equal To 2" With The Maximum Design Width Being 2½". Type III Shall Be Used For Design Width Greater Than 2½". With The Maximum Design Width Being 3½". In Cases Where Design Widths Are Greater Than 3½", Another Type Of Expansion Material Shall Be Required As Directed By The Director Of Structures, State Bridge Engineer. It Is The Contractor's Responsibility To Ensure That The Size Selected Is Appropriate For The Width Of The Joint.



✳NOTES:

For Jersey Shape Barriers, The Minimum Required Vertical Joint Seal Dimension Within The Barrier Is 3".
For Post And Beam Barriers, The Minimum Required Vertical Joint Seal Dimension Within The Barrier is 6".

ELEVATION AT END OF SPAN

NOTES ON ASSOCIATED ITEMS OF WORK:

202-B169 REMOVAL OF EXISTING JOINT MATERIAL

Description: Shall Include The Removal Of Material Associated With Armor, Sliding Plate, And Neoprene Expansion Joints, As Designated In The Detail Drawings Provided. Removal of The Concrete Blockout Area Shall Be Absorbed Under This Item Of Work. Other Joint Types Shall Not Be Included Under This Item Of Work Unless Otherwise Directed By The Engineer. Removal of Joint Material And Any Trash And Debris (Including But Not Limited To Compacted Dirt, Vegetation And Trash) Located At Any Depth Within The Joint Shall Be Included Under This Item Of Work.

Basis Of Payment: Removal of Armor And Sliding Plate Joint Material Will Be Paid For In Linear Feet At The Contract Unit Price Along The Length Of The Bridge Deck On Each Side Of The Centerline Joint, While Removal Of Neoprene Joint Material Will Only Be Paid For As The Length Along The Centerline Of The Joint.

907-823-B001 SAW CUT, TYPE I
907-823-B002 SAW CUT, TYPE II
907-823-B003 SAW CUT, TYPE III

Description: The Saw Cut Depth Shall Be Equivalent To The Installation Depth Required By The Manufacturer's Specifications. The Saw Cut Type Shall Be The Same As The Preformed Joint Seal Selected.

Basis of Payment: The Accepted Quantities Will Be Paid For In Linear Feet At The Contract Unit Price Along The Length Of The Bridge Deck On Each Side Of The Centerline Joint.

907-823-A001 PREFORMED JOINT SEAL, TYPE I
907-823-A002 PREFORMED JOINT SEAL, TYPE II
907-823-A003 PREFORMED JOINT SEAL, TYPE III

Description: Shall Include The Manufacturer's Required Joint Preparation Including Sandblasting Both Sides Of The Joint And Blowing The Joint Free Of Debris With Compressed Air And Placement Of The New Preformed Joint Seal

Basis Of Payment: The Accepted Quantities Will Be Paid For In Linear Feet At The Contract Unit Price Along The Length Of The Centerline Joint.

ELASTOMERIC CONCRETE NOTES

907-824-P0007 BRIDGE REPAIR, ELASTOMERIC CONCRETE

Description: Elastomeric Concrete Shall Be One Of The Following Products, Installed According To The Manufacturer's Specifications:

A. Poly-Tron Elastomeric Concrete
Manufactured By R.J. Watson, Inc. In Alden, NY
www.rjwatson.com

B. WaboCrete II
Manufactured By Watson Bowman Acme Corporation In Amherst, NY
www.wbacorp.com

C. Delcrete Elastomeric Concrete
Manufactured By The D.S. Brown Company In North Baltimore, OH
www.dsbrown.com

Basis of Payment: The Accepted Quantities Will Be Paid For In Cubic Yards At The Contract Unit Price.

GENERAL NOTES:


1. Specifications: Mississippi Standard Specifications For Road And Bridge Construction, 2017.
2. No Change Of Plans Will Be Permitted Except By Written Approval Of The Director Of Structures, State Bridge Engineer. Minor Changes To Detail Of Design Or Construction Procedure May Be Authorized By The Bridge Engineer Provided Such Changes Will Not Be Cause For Contract Price Adjustment.
3. Work For Which No Pay Item Is Provided In The Proposal Will Not Be Paid For Directly And Shall Therefore Be Considered An Absorbed Item of Work.

✳1" SAWCUT NOTES:

All 1" Sawcuts Shall Be Considered An Absorbed Item of Work. The Contractor Shall Verify Depth Of Reinforcing Steel Before Making Any Sawcuts. The Depth Of The Sawcut Shall Be No More Than The Depth Of The Reinforcing Steel. Any Damage To Reinforcing Steel Shall Be Repaired To The Satisfaction Of The Engineer At No Cost To The State.


✳CONCRETE REMOVAL BLOCKOUT NOTES

Removal Of The Concrete Blockout Area Shall Be Considered An Absorbed Item Of Work Under Pay Item 202-B169. The Contractor Shall Use A Hammer No Larger Than 30 LBs To Complete This Work.

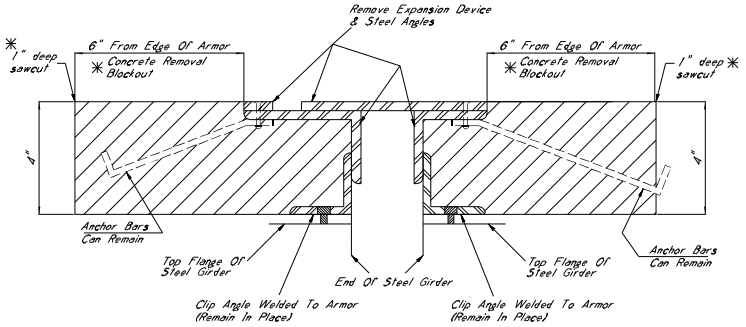


TYPICAL SECTION AT EXISTING JOINT

Showing Existing Expansion Device To Be Removed And Replaced With Preformed Joint Seal

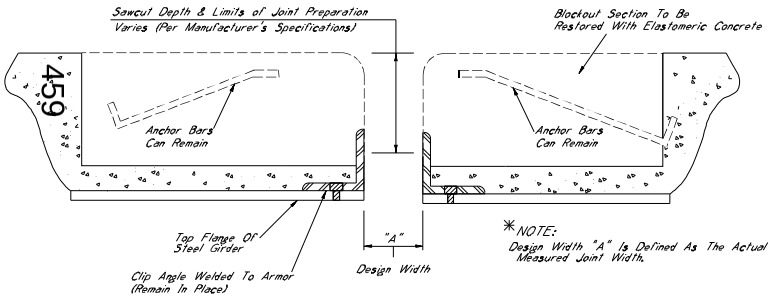


TYPICAL SECTION AT JOINT AFTER REMOVAL OF EXISTING SEAL

Showing Limits Of Joint Preparation For Application Of New Joint Seal Materials

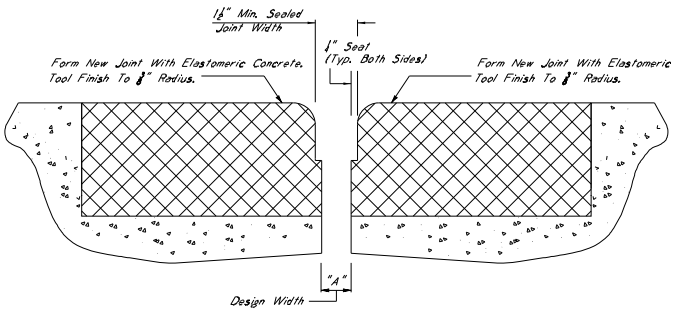

TYPICAL SECTION AT SAWCUT & JOINT REPAIR

Showing Area Where Repairs Are Made After Sawcut With Elastomeric Concrete

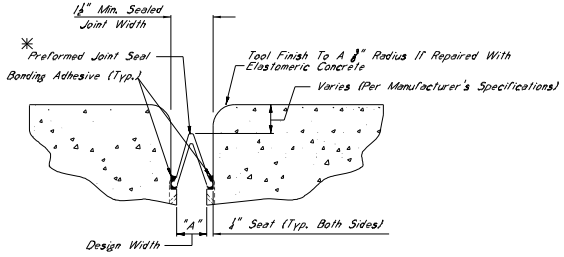

TYPICAL SECTION AT SAWCUT & SEALED JOINT

Showing Sealed Joint After Sawcut And Repair With Elastomeric Concrete

✳NOTES:

1. The Preformed Joint Seal Shall Be One Of The Following, Installed According To The Manufacturer's Specifications:


   A. Silicoflex Joint Sealing System
   Manufactured By R.J. Watson, Inc. In Alden, NY
   www.rjwatson.com

   B. Wabo SPS Joint System
   Manufactured By Watson Bowman Acme Corporation In Amherst, NY
   www.wbacorp.com

   C. Silspec 555 Silicone Strip Seal
   Manufactured By SSI Commercial & Highway Construction Materials
   www.ssicm.com

2. For Estimating Purposes, The RJ Watson Silicoflex Joint Sealing System Was Selected. However, Should Another Supplier Be Chosen, It Is The Contractor's Responsibility To Ensure That The Manufacturer's Recommendations Are Followed For Joint Preparation, Installation Depths And Widths, Adhesive Setting Times, And Any Other Variances Between The Specifications Provided By The Manufacturers. A Manufacturer Representative Shall Be Present At The Time Joint Sealing Begins To Ensure That The Contractor Is Properly Schooled In Installation Of The Joint Material.

3. Joints Shall Be Sealed At Their Design Widths, Dimension "A", Which Is Defined As The Actual Width Of The Joint Opening. This Width Does Not Account For The 1" Seal Required On Both Sides Of The Joint. Preformed Joint Seal Type I Shall Be Used For Design Widths Less Than 2". Preformed Joint Seal Type II Shall Be Used For Design Widths Greater Than or Equal To 2", With The Maximum Design Width Being 2". Type III Shall Be Used For Design Width Greater Than 2", With The Maximum Design Width Being 3". In Cases Where Design Widths Are Greater Than 3", Another Type Of Expansion Material Shall Be Required As Directed By The Director Of Structures, State Bridge Engineer. It Is The Contractor's Responsibility To Ensure That The Size Selected Is Appropriate For The Width Of The Joint.



✳NOTES:

For Jersey Shape Barriers, The Minimum Required Vertical Joint Seal Dimension Within The Barrier Is 3". For Post And Beam Barriers, The Minimum Required Vertical Joint Seal Dimension Within The Barrier is 6".

ELEVATION AT END OF SPAN

NOTES ON ASSOCIATED ITEMS OF WORK:

202-B169 REMOVAL OF EXISTING JOINT MATERIAL

Description: Shall Include The Removal Of Material Associated With Armor, Sliding Plate, And Neoprene Expansion Joints, As Designated In The Detail Drawings Provided. Removal of The Concrete Blockout Area Shall Be Absorbed Under This Item Of Work. Other Joint Types Shall Not Be Included Under This Item Of Work Unless Otherwise Directed By The Engineer. Removal of Joint Material And Any Trash And Debris (Including But Not Limited To Compacted Dirt, Vegetation And Trash) Located At Any Depth Within The Joint Shall Be Included Under This Item Of Work.

Basis Of Payment: Removal of Armor And Sliding Plate Joint Material Will Be Paid For In Linear Feet At The Contract Unit Price Along The Length Of The Bridge Deck On Each Side Of The Centerline Joint, While Removal Of Neoprene Joint Material Will Only Be Paid For As The Length Along The Centerline Of The Joint.

907-823-B001 SAW CUT, TYPE I
907-823-B002 SAW CUT, TYPE II
907-823-B003 SAW CUT, TYPE III

Description: The Saw Cut Depth Shall Be Equivalent To The Installation Depth Required By The Manufacturer's Specifications. The Saw Cut Type Shall Be The Same As The Preformed Joint Seal Selected.

Basis of Payment: The Accepted Quantities Will Be Paid For In Linear Feet At The Contract Unit Price Along The Length Of The Bridge Deck On Each Side Of The Centerline Joint.

907-823-A001 PREFORMED JOINT SEAL, TYPE I
907-823-A002 PREFORMED JOINT SEAL, TYPE II
907-823-A003 PREFORMED JOINT SEAL, TYPE III

Description: Shall Include The Manufacturer's Required Joint Preparation Including Sandblasting Both Sides Of The Joint And Blowing The Joint Free Of Debris With Compressed Air And Placement Of The New Preformed Joint Seal

Basis Of Payment: The Accepted Quantities Will Be Paid For In Linear Feet At The Contract Unit Price Along The Length Of The Centerline Joint.

ELASTOMERIC CONCRETE NOTES

907-824-PP007 BRIDGE REPAIR, ELASTOMERIC CONCRETE

Description: Elastomeric Concrete Shall Be One Of The Following Products, Installed According To The Manufacturer's Specifications:

A. Poly-Tron Elastomeric Concrete
Manufactured By R.J. Watson, Inc. In Alden, NY
www.rjwatson.com


B. WaboCrete II
Manufactured By Watson Bowman Acme Corporation In Amherst, NY
www.wbacorp.com

C. Delcrete Elastomeric Concrete
Manufactured By The D.S. Brown Company In North Baltimore, OH
www.dsbrown.com

Basis of Payment: The Accepted Quantities Will Be Paid For In Cubic Yards At The Contract Unit Price.


GENERAL NOTES:

1. Specifications: Mississippi Standard Specifications For Road And Bridge Construction, 2017.
2. No Change Of Plans Will Be Permitted Except By Written Approval Of The Director Of Structures, State Bridge Engineer. Minor Changes To Detail Of Design Or Construction Procedure May Be Authorized By The Bridge Engineer Provided Such Changes Will Not Be Cause For Contract Price Adjustment.
3. Work For Which No Pay Item Is Provided In The Proposal Will Not Be Paid For Directly And Shall Therefore Be Considered An Absorbed Item of Work.



TYPICAL SECTION AT EXISTING JOINT

Showing Existing Expansion Device To Be Removed And Replaced With Preformed Joint Seal

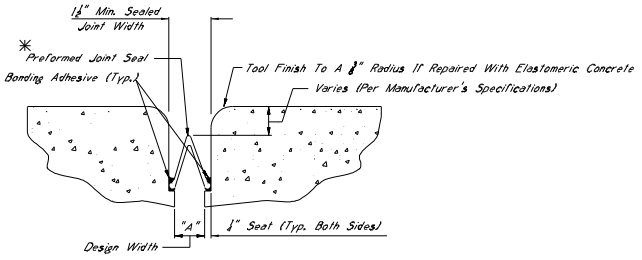

TYPICAL SECTION AT SAWCUT & SEALED JOINT

Showing Sealed Joint After Sawcut And Repair With Elastomeric Concrete

✳NOTES:

1. The Preformed Joint Seal Shall Be One Of The Following, Installed According To The Manufacturer's Specifications:


   A. Silicoflex Joint Sealing System
   Manufactured By R.J. Watson, Inc. In Alden, NY
   www.rjwatson.com

   B. Wabo SPS Joint System
   Manufactured By Watson Bowman Acme Corporation In Amherst, NY
   www.wbacorp.com

   C. Silspec 555 Silicone Strip Seal
   Manufactured By SSI Commercial & Highway Construction Materials
   www.ssicm.com

2. For Estimating Purposes, The RJ Watson Silicoflex Joint Sealing System Was Selected. However, Should Another Supplier Be Chosen, It Is The Contractor's Responsibility To Ensure That The Manufacturer's Recommendations Are Followed For Joint Preparation, Installation Depths And Widths, Adhesive Setting Times, And Any Other Variances Between The Specifications Provided By The Manufacturers. A Manufacturer Representative Shall Be Present At The Time Joint Sealing Begins To Ensure That The Contractor Is Properly Schooled In Installation Of The Joint Material.


3. Joints Shall Be Sealed At Their Design Widths, Dimension "A", Which Is Defined As The Actual Width Of The Joint Opening. This Width Does Not Account For The ½" Seat Required On Both Sides Of The Joint. Preformed Joint Seal, Type I, Shall Be Used For Design Widths Less Than 2". Preformed Joint Seal, Type II, Shall Be Used For Design Widths Greater Than or Equal To 2", With The Maximum Design Width Being 2". Type III Shall Be Used For Design Width Greater Than 2", With The Maximum Design Width Being 3". In Cases Where Design Widths Are Greater Than 3", Another Type Of Expansion Material Shall Be Required As Directed By The Director Of Structures, State Bridge Engineer. It Is The Contractor's Responsibility To Ensure That The Size Selected Is Appropriate For The Width Of The Joint.

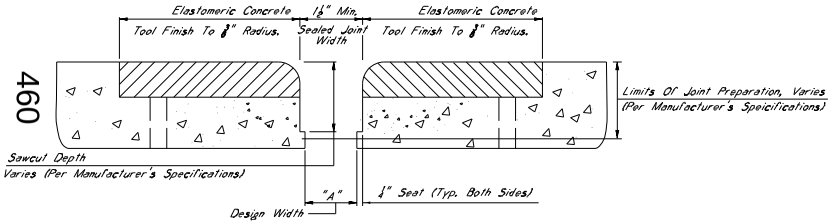

TYPICAL SECTION AT JOINT AFTER REMOVAL OF EXISTING SEAL

Showing Limits Of Joint Preparation For Application Of New Joint Seal Materials

✳NOTE:
Design Width "A" Is Defined As The Actual Measured Joint Width.



✳NOTES:
For Jersey Shape Barriers, The Minimum Required Vertical Joint Seal Dimension Within The Barrier Is 3".
For Post And Beam Barriers, The Minimum Required Vertical Joint Seal Dimension Within The Barrier is 6".

ELEVATION AT END OF SPAN

NOTES ON ASSOCIATED ITEMS OF WORK:

202-B169 REMOVAL OF EXISTING JOINT MATERIAL

Description: Shall Include The Removal Of Material Associated With Armor, Sliding Plate, And Neoprene Expansion Joints, As Designated In The Detail Drawings Provided. Other Joint Types Shall Not Be Included Under This Item Of Work Unless Otherwise Directed By The Engineer. Removal of Joint Material And Any Trash And Debris (Including But Not Limited To Compacted Dirt, Vegetation And Trash) Located At Any Depth Within The Joint Shall Be Included Under This Item Of Work.

Basis Of Payment: Removal of Armor And Sliding Plate Joint Material Will Be Paid For In Linear Feet At The Contract Unit Price Along The Length Of The Bridge Deck On Each Side Of The Centerline Joint, While Removal Of Neoprene Joint Material Will Only Be Paid For As The Length Along The Centerline Of The Joint.

907-823-B001 SAW CUT, TYPE I
907-823-B002 SAW CUT, TYPE II
907-823-B003 SAW CUT, TYPE III

Description: The Saw Cut Depth Shall Be Equivalent To The Installation Depth Required By The Manufacturer's Specifications. The Saw Cut Type Shall Be The Same As The Preformed Joint Seal Selected.

Basis of Payment: The Accepted Quantities Will Be Paid For In Linear Feet At The Contract Unit Price Along The Length Of The Bridge Deck On Each Side Of The Centerline Joint.

907-823-A001 PREFORMED JOINT SEAL, TYPE I
907-823-A002 PREFORMED JOINT SEAL, TYPE II
907-823-A003 PREFORMED JOINT SEAL, TYPE III

Description: Shall Include The Manufacturer's Required Joint Preparation Including Sandblasting Both Sides Of The Joint And Blowing The Joint Free Of Debris With Compressed Air And Placement Of The New Preformed Joint Seal

Basis Of Payment: The Accepted Quantities Will Be Paid For In Linear Feet At The Contract Unit Price Along The Length Of The Centerline Joint.

ELASTOMERIC CONCRETE NOTES

907-824-PP007 BRIDGE REPAIR, ELASTOMERIC CONCRETE

Description: Elastomeric Concrete Shall Be One Of The Following Products, Installed According To The Manufacturer's Specifications:

A. Poly-Tron Elastomeric Concrete
Manufactured By R.J. Watson, Inc. In Alden, NY
www.rjwatson.com


B. WaboCrete II
Manufactured By Watson Bowman Acme Corporation In Amherst, NY
www.wbacorp.com

C. Delcrete Elastomeric Concrete
Manufactured By The D.S. Brown Company In North Baltimore, OH
www.dsbrown.com

Basis of Payment: The Accepted Quantities Will Be Paid For In Cubic Yards At The Contract Unit Price.


GENERAL NOTES:

1. Specifications: Mississippi Standard Specifications For Road And Bridge Construction, 2017.
2. No Change Of Plans Will Be Permitted Except By Written Approval Of The Director Of Structures, State Bridge Engineer. Minor Changes To Detail Of Design Or Construction Procedure May Be Authorized By The Bridge Engineer Provided Such Changes Will Not Be Cause For Contract Price Adjustment.
3. Work For Which No Pay Item Is Provided In The Proposal Will Not Be Paid For Directly And Shall Therefore Be Considered An Absorbed Item of Work.

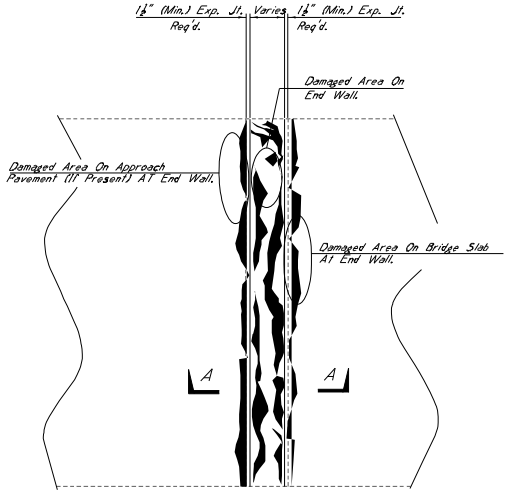


PLAN VIEW

Showing Existing Damaged Areas On And Around End Wall.

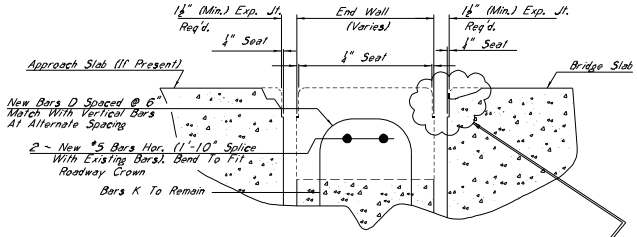

DETAIL "D"

Showing Repair Details Of End Wall, Reinforcing Steel, And Expansion Joint Formation.

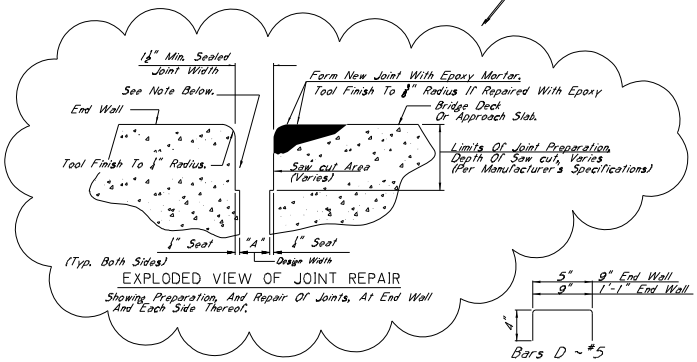


EXPLODED VIEW OF JOINT REPAIR

Showing Preparation, And Repair Of Joints, At End Wall And Each Side Thereof.


*NOTE:
Form Vertical Faces Of End Wall To Include ¼" Seat Such That The Preformed Joint Seal May Be Applied Per Manufacturer's Specification. See Detail "DP" On This Sheet.

*NOTE:
Design Width "A" Is Defined As The Actual Measured Joint Width.

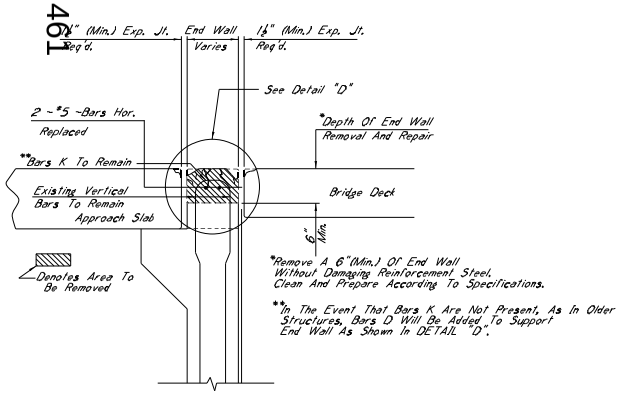

ELEVATION (SECTION A-A)

Showing Details Of Removal Of Damaged End Wall.

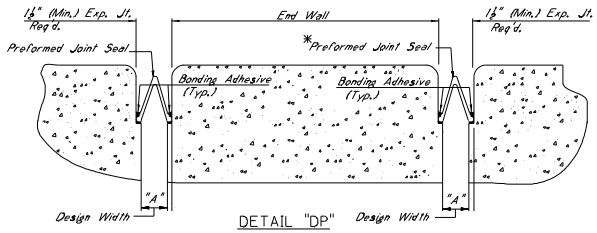

DETAIL "DP"

Showing Sealed Joint After Saw cut And Repair With Epoxy Mortar

*NOTES:

1. The Preformed Joint Seal Shall Be One Of The Following, Installed According To The Manufacturer's Specifications:

   A. Silicoflex Joint Sealing System
   Manufactured By R.J. Watson, Inc.
   www.rjwatson.com

   B. Wabo SPS Joint System
   Manufactured By Watson Bowman Acme Corporation
   www.wbacorp.com

   C. Silspec SSS Silicone Strip Seal
   Manufactured By SSI Commercial & Highway Construction Materials
   www.ssicm.com

2. For Estimating Purposes, The RJ Watson Silicoflex Joint Sealing System Was Selected. However, Should Another Supplier Be Chosen, It Is The Contractor's Responsibility To Ensure That The Manufacturer's Recommendations Are Followed For Joint Preparation, Installation Depths And Widths, Adhesive Setting Times, And Any Other Variances Between The Specifications Provided By The Manufacturers. A Manufacturer Representative Shall Be Present At The Time Joint Sealing Begins To Ensure That The Contractor Is Properly Schooled In Installation Of The Joint Material.

3. Joints Shall Be Sealed At Their Design Widths, Dimension "A", Which Is Defined As The Actual Width Of The Joint Opening. This Width Does Not Account For The Seal Required On Both Sides Of The Joint. Preformed Joint Strip Type I, Shall Be Used For Design Widths Less Than 2". Preformed Joint Seal, Type II, Shall Be Used For Design Widths Greater Than Or Equal To 2", With The Maximum Design Width Being 4". Type III Shall Be Used For Design Width Greater Than 4", With The Maximum Design Width Being 8". In Cases Where Design Widths Are Greater Than 8", Another Type Of Expansion Material Shall Be Required As Directed By The Director Of Structures, State Bridge Engineer. It Is The Contractor's Responsibility To Ensure That The Size Selected Is Appropriate For The Width Of The Joint.

NOTES ON ASSOCIATED ITEMS OF WORK:

907-824-PP008 BRIDGE REPAIR, ENDWALL REPAIR

Description: Shall Include The Work Necessary To Remove And Replace The Damaged Endwall, As Designated In The Detail Drawings Provided. Instead Of Limiting The Repair To The Damaged Section, The Specified Depth Of Endwall Shall Be Removed Along The Entire Width Of The Bridge Deck.

Basis of Payment: The Accepted Quantities Will Be Paid For In Linear Feet At The Contract Unit Price Along The Width Of The Bridge Deck.

Damage Caused To Other Elements Of The Structure Or Roadway While Completeing This Item Of Work Shall Be Repaired By The Contractor At No Cost To The Department.

Prior to Placing New Concrete, All Concrete Surfaces That Will Be In Contact With The New Concrete Shall Be Painted With An Approved Epoxy Binder Designed To Bond New Concrete To Old.

New Concrete Shall Be High Early Strength Bridge Concrete, As Follows:

The concrete mixture design shall be furnished by the Contractor for approval by the Materials Division. Mixture design parameters are as follows:

Required Strength:	2500 psi prior to releasing to traffic
Total Air Content:	3-6 %
Maximum Slump:	6 inches

Non-chloride based accelerator may be used if the ambient temperature is 50°F or less, but shall not be used if the ambient temperature is greater than 50°F.

Synthetic structural fibers shall be used. The Contractor shall select a manufacturer from MDOT's Approved Products List, and the manufacturer's recommendations shall be followed for the dosage rate.

Curing is to be continuous until 2500 psi is attained. Traffic is to be diverted from the repair area until this value is reached. The Contractor may use the Maturity Method per Section 907-804 to estimate the concrete compressive strength for the purposes of releasing the repair area to traffic. However, final acceptance of the in-place concrete shall be determined using eight concrete test cylinders, which shall be cured in a container next to the concrete placement. Two cylinders are to be tested at 3, 16, and 24 hour intervals. The two remaining cylinders shall be used to determine the 28-day compressive strength of the concrete.

The Removal Of Existing Expansion Material May Require Any Number Of The Pay Items Listed Below. Once The Expansion Device Is Identified, Refer To The Corresponding Joint Repair Detail Sheet For Additional Details On The Associated Items Of Work.

202-B169	REMOVAL OF EXISTING JOINT MATERIAL
907-808-A002	JOINT REPAIR
907-808-A003	JOINT REPAIR WITHOUT EPOXY
907-823-B001	SAW CUT, TYPE I
907-823-B002	SAW CUT, TYPE II
907-823-B003	SAW CUT, TYPE III
907-823-A001	PREFORMED JOINT SEAL, TYPE I
907-823-A002	PREFORMED JOINT SEAL, TYPE II
907-823-A003	PREFORMED JOINT SEAL, TYPE III

GENERAL NOTES:

1. Specifications: Mississippi Standard Specifications For Road And Bridge Construction, 2012.
2. No Change Of Plans Will Be Permitted Except By Written Approval Of The Director Of Structures, State Bridge Engineer. Minor Changes To Detail Of Design Or Construction Procedure May Be Authorized By The Bridge Engineer Provided Such Changes Will Not Be Cause For Contract Price Adjustment.
3. Work For Which No Pay Item Is Provided In The Proposal Will Not Be Paid For Directly And Shall Therefore Be Considered An Absorbed Item of Work.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-824-4 **CODE: (SP)**

DATE: **09/09/2025**

SUBJECT: **Routine Bridge Repair**

Section 907-824, Routine Bridge Repair, is hereby added to and made a part of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction as follows.

SECTION 907-824 – ROUTINE BRIDGE REPAIR

907-824.01--Description. This work shall consist of constructing and installing routine bridge repair items including General Epoxy Repair, Bi-directional or Uni-directional Fiber Reinforced Polymer (FRP) Wrap, Cap Cleaning, Bearing Replacements, Epoxy Injection, and Encapsulated Field Painting in accordance with the details on the plans, and the requirements set out herein.

Minor changes in detail of design or construction procedure may be authorized by the Director of Structures, State Bridge Engineer provided such changes will not be cause for contract price adjustment.

It shall be the responsibility of the Contractor to protect the existing structure from damage which might occur during construction. The Contractor shall replace or repair, as directed by the Engineer, any structures damaged by the Contractor during the life of the contract. No payment will be made for replacement or repair of damaged items.

All details are based on the dimensions shown on the original plans for the existing structure. The Contractor shall be responsible for adjusting the elements of the new construction to ensure a proper fit with the existing structure. The Contractor shall verify all dimensions of the existing structure prior to beginning work.

During construction, care shall be exercised to ensure that no debris falls into the crossing below the structure. All debris, including any material that has accumulated on the bridge deck or caps, shall become the property of the Contractor and shall be removed from the construction site and disposed of properly.

For additional information and details, see work related items below and on the standard drawings. At the Contractor's request, Bridge Division will provide a complete set of As-Built plans for the existing bridge.

907-824.02--Materials.

907-824.02.1--General Epoxy Repair. Materials for general epoxy repair shall be as follows or a material approved by the Director of Structures, State Bridge Engineer.

Epoxy Resin. Resin shall be selected from the MDOT Approved Products List and meet the requirements of ASTM C881, Type I, Grade 2, Class C.

Silica Sand. The materials shall be bagged general purpose cleaning sand.

Epoxy Mortar Mix. The epoxy mortar mix shall consist of part liquid epoxy and part clean dry sand mixed in the ratio recommended by the Manufacturer.

907-824.02.2--FRP Wrap. FRP wrap shall be one of the following products, or an approved equal, and shall be applied according to the Manufacturer's recommendations:

- "FRP Wrap" as manufactured by Fyfe Co. LLC, www.aegion.com/about/our-brands/fyfe
- "FRP Wrap" as manufactured by BASF Building Systems LLC, www.master-builders-solutions.basf.us
- "FRP Wrap" as manufactured by Sikawrap Inc. www.usa.sika.com
- "FRP Wrap" as manufactured by MAPEI Corp., www.mapei.com/us/en-us/

907-824.03--Construction Requirements.

907-824.03.1--General Epoxy Repair. Epoxy repair under this pay item is for general concrete spall repairs, and shall be bid such that the item may be increased, decreased or eliminated as directed by the Project Engineer. All epoxy repairs shall be performed in accordance with the details shown on the Drawings and in accordance with the notes herein. Repair concrete spalled areas on the bridge as directed by the Project Engineer and the locations listed in the plans using epoxy mortar. The Contractor shall determine the depth of reinforcement prior to any saw cutting. Spalled areas where pack rust has developed around or on reinforcement shall be blasted clean prior to repairing the spalled location. All areas of the bridge repaired with epoxy mortar shall be restored to the original dimensions as shown in the information plans, unless noted otherwise.

A Representative of the epoxy manufacturer must be present for sufficient time to ensure that the Contractor is properly schooled in the use of the epoxy material.

Prior to placement of the mortar mix, the prepared surface shall be lightly primed with neat epoxy.

Acetone alcohol may be used to clean and lubricate trowels.

Curing time shall be in accordance with the Manufacturer's recommendations.

907-824.03.2--FRP Wrap. After all spalled locations on the bent caps, beams or piling are repaired, the repair locations on all bent caps shall be wrapped with FRP wrap in accordance with the notes below and the drawings.

FRP wrap shall be applied to bent caps, beams or piling as designated in the plans. FRP wrap shall be either bi-directional or uni-directional.

The Contractor shall furnish all submittals indicating the materials, tools, equipment, transportation, necessary storage, labor, installation plan and supervision required for the application of the composite or polymer system to the Director of Structures, State Bridge Engineer through the Project Engineer prior to construction. Products shall be stored according the manufacturer's requirements and shall avoid contact with moisture, dust and chemical exposure. All FRP composite systems shall be proprietary systems consisting of all associated fiber reinforcement and polymer adhesives/resins. FRP composites consisting of fiber reinforcement and polymers provided by more than one manufacturer are not allowed. The FRP composite system shall utilize carbon fiber reinforcement as the primary fiber material (primary structural component). The FRP system shall be top coated with a coating approved by the FRP system supplier. The coating color shall be selected by the Project Engineer.

FRP wraps shall not be installed when the ambient temperature is below 40°F or above 130°F. In cold conditions, auxiliary heat may be applied to raise the ambient temperature to a suitable level. Clean heat sources shall be utilized for this purpose (e.g., electric or propane) that do not contaminate the substrate with carbonation.

FRP wraps shall not be installed when surface moisture is present on the substrate or when rainfall or condensation is anticipated in the work areas. If water leakage exists through cracks or concrete joints, water flow shall be stopped prior to FRP installation. Resins (including primers and fillers) shall be mixed according to the FRP system manufacturer's installation instructions. All resin components shall be at a proper temperature and mixed in the manufacturer's prescribed mix ratio until there is a uniform and complete mixing of components.

Resin components are often contrasting colors, so full mixing is achieved when color streaks are eliminated. Resins should be mixed for the Manufacturer's prescribed mixing time and visually inspected for uniformity of color. A representative of the FRP wrap manufacturer must be present for sufficient time to assure that the Contractor is properly schooled in the installation of FRP wrap. Prior to installation of FRP wraps, the Contractor shall repair concrete spall areas in accordance with general epoxy repair notes herein and the details in the plans. The fibrous reinforcement system shall have a minimum tensile force as shown in the plan details. The direction of the fiber wrap shall be in the direction shown on the Contract Plans.

In addition to the Manufacturer's requirements, the Contractor shall ensure the structural and durability of the reinforced fiber wrap system by meeting the following acceptance guidelines:

Small delaminations, less than two inches (2") each, are permissible as long as the delaminated area is less than 5% of the total laminate area and there are no more than 10 such delamination per 10 feet.

Large delaminations, greater than 25 inches, can affect the performance of the installed system and shall be repaired by selectively cutting away the affected sheet and applying an overlapping sheet patch of equivalent piles. Delaminations less than 25 inches may be repaired by ply replacement.

The Contractor shall submit an FRP repair procedure to the Project Engineer for review and approval by the Director of Structures, State Bridge Engineer. This must be performed prior to repairing and delaminated areas.

907-824.03.3--Cap Cleaning. The caps at every bent shall be cleaned to the satisfaction of the Project Engineer after all other work has been done. All large debris shall be removed by hand while other debris, including but not limited to dirt and rust, shall be removed by pressure washing the bent caps. The pressure washer shall be able to maintain 3,500 psi of pressure. Prior to construction, the Contractor shall submit a proposed containment plan to the Project Engineer for approval by the Director of Structures, State Bridge Engineer.

907-824.03.4--Bearing Replacements. All bearings should be removed and replaced according to Bearing Assembly Details. All structural steel shall conform to ASTM A709, Grade 50. All steel shall be new. Extreme care shall be exercised in removing the existing bearing plates that are welded to the anchor plates embedded in the prestressed beams. Existing anchor bolts shall be ground to ¼" below the concrete surface and grouted with epoxy mortar.

The bottom of the existing anchor plates shall be finished smooth to accommodate the new steel plates and painted with approved encapsulating paint. All pack rust and scale within the designated areas shall be removed by using small hand tools, mechanical process, or needle gun. All areas required to be painted containing grease films after the initial cleaning shall be cleaned with a biodegradable solvent. All debris removed from the existing structure shall become property of the Contractor and shall be disposed of properly. The Contractor shall provide technical data for the proposed encapsulating paint to be used on this project to the Project Engineer for approval by the Director of Structures, State Bridge Engineer. New paint shall be applied by hand, with either a brush or roller.

The new steel plates shall be cleaned and then painted with one shop coat of inorganic zinc, one field intermediate coat of acrylic latex, and one field top coat of acrylic latex per Section 814 of the Standard Specifications. Painting of new steel plates and existing anchor plates shall not be measured for separate pay and all costs shall be included in the price bid for Bearing Replacement.

Prior to any construction or fabrication, the Contractor shall comply with the submittal requirements listed in the bearing replacement details. The Contractor shall be responsible for adjusting the elements of the new construction to ensure a proper fit with the existing structure.

The Contractor shall provide adequate bracing and jacking arrangements as required to replace the existing bearings. The beam end shall only be raised to ¼" from its original position. Traffic shall be maintained on the bridge during the duration of the repair.

The Contractor shall employ the service of a Mississippi Registered Professional Engineer who is knowledgeable in the field of Bridge Design. A complete set of bracing and jacking arrangement plans along with design calculations shall be submitted to the Director of Structures, State Bridge Engineer through the Project Engineer for review prior to construction and shall bear the design Engineer's seal.

Jacks shall be coupled to a common manifold. Jacking point shall be under the bottom flange of the beam at the bent and no jacking points will be allowed under any diaphragm or bay. After the beam is raised into position, temporary blocking shall be provided to secure the beam in this position while work is being performed. Temporary blocking points shall be under the bottom flange of the beam at the bent and no temporary blocking will be allowed under any diaphragm or bay.

Any damage to the bridge resulting from uneven or improper jacking shall be repaired by the Contractor at no additional cost to the State.

907-824.03.5--Epoxy Injection. All cracks greater than 1/32" shall be injected with an approved epoxy resin adhesive of the gel type. Prior to injecting any cracks, the crack shall be cleaned with a high velocity filtered air jet.

A representative of the epoxy manufacturer shall be present for sufficient time to ensure that the Contractor is properly schooled in the use of the epoxy material. Epoxy resin adhesive shall be installed in strict accordance with the manufacturer recommendations. Curing time shall be in accordance with manufacturer's recommendations. After epoxy injection is complete, all injection ports shall be removed.

907-824.03.6--Encapsulating Field Painting. The Contractor should be aware that the existing paint on the steel structure may contain lead.

Prior to construction, the Contractor shall submit a Temporary Containment Plan for the removal of the existing paint and rust from the designated repair areas to the Project Engineer for approval by the Director of Structures, State Bridge Engineer. Also, the Contractor shall submit a Temporary Containment Plan for painting the designated repair areas.

All pack rust and scale within the designated areas shall be removed by using small hand tools, mechanical process, or needle gun. All areas required to be painted containing grease films after the initial cleaning shall be cleaned with a biodegradable solvent. Existing paint shall be roughened to ensure the new paint will adhere to the existing painted surface. All debris and paint removed from the existing structure shall become the property of the Contractor and shall be disposed of properly.

All exposed steel surfaces in the repair areas shall be painted with an encapsulating paint designed to encapsulate lead-based paints, and applied according to the manufacturer's recommendations. This will include but is not limited to: existing bearings, beams, and diaphragm assemblies, etc.

The Contractor shall provide technical data for the proposed encapsulating paint to be used on this project to the Project Engineer for approval by the Director of Structures, State Bridge Engineer.

New paint shall be applied by hand with brush or roller.

907-824.04--Method of Measurement. Epoxy Repair, completed in accordance with the plans and specifications, will be measured per square foot. All items of work related to epoxy repair shall be included in the square foot unit price.

FRP Wrap, Bi-directional and Uni-directional, completed in accordance with the plans and specifications, will be measured per linear foot or square foot.

Cap Cleaning, completed in accordance with the plans and specifications, will be measured per each.

Bearing Replacements, completed in accordance with the plans and specifications, will be measured per each.

Epoxy injection, complete in accordance with the plans and specifications, will be measured by the linear foot.

Encapsulating Field Painting, complete in accordance with the plans and specifications, will be measured by the square foot.

907-824.05--Basis of Payment. Epoxy Repair, measured as prescribed above, will be paid for at the contract unit price per square foot, which price shall be full compensation for materials, labor, equipment, and incidentals necessary to complete the work.

FRP Wrap, Bi-directional and Uni-directional, measured as prescribed above, will be paid for at the contract unit price per linear foot or square foot, which price shall be full compensation for all labor, materials, surface preparation, and incidentals associated with the installation of FRP wraps, including epoxy mortar repairs, necessary to complete the work.

Cap Cleaning, measured as prescribed above, will be paid for at the contract unit price per each, which price shall be full compensation for all materials, labor, equipment and incidentals necessary to complete the work.

Bearing Replacements, measured as prescribed above, will be paid for at the contract unit price per each, which price shall be full compensation for all materials, labor, equipment and incidentals necessary to complete the work.

Epoxy Injection, measured as prescribed above, will be paid for at the contract unit price per linear foot, which price shall be full compensation for all materials, labor, equipment and incidentals necessary to complete the work.

Encapsulating Field Painting, measured as prescribed above, will be paid for at the contract unit price per square foot, which price shall be full compensation for all materials, labor, equipment, cleaning, and incidentals necessary to complete the work.

Payment will made under:

907-824-A:	General Epoxy Repair	- per square foot
907-824-B:	FRP Wrap, *	- per linear foot or square foot
907-824-C:	Cap Cleaning	- per each
907-824-D:	Bearing Replacements **	- per each
907-824-E:	Epoxy Injection	- per linear foot
907-824-F:	Encapsulating Field Painting	- per square foot

* Indicate Bi-directional, Uni-directional, etc.

** Type of Bearing (Prestressed Concrete Girder, Concrete Box Girder or Steel Girder) may be specified.

S E C T I O N 9 0 5 - P R O P O S A L

Date _____

Mississippi Transportation Commission
Jackson, Mississippi

Sirs: The following proposal is made on behalf of _____
_____ of _____
_____
for constructing the following designated project(s) within the time(s) hereinafter specified.

The plans are composed of drawings and blue prints on file in the offices of the Mississippi Department of Transportation, Jackson, Mississippi.

The Specifications are the current Standard Specifications of the Mississippi Department of Transportation approved by the Federal Highway Administration, except where superseded or amended by the plans, Special Provisions and Notice(s) to Bidders attached hereto and made a part thereof.

I (We) certify that I (we) possess a copy of said Standard and any Supplemental Specifications.

Evidence of my (our) authority to submit the Proposal is hereby furnished. The proposal is made without collusion on the part of any person, firm or corporation. I (We) certify that I (we) have carefully examined the Plans, the Specifications, including the Special Provisions and Notice(s) to Bidders, herein, and have personally examined the site of the work. On the basis of the Specifications, Special Provisions, Notice(s) to Bidders, and Plans, I (we) propose to furnish all necessary machinery, tools, apparatus and other means of construction and do all the work and furnish all the materials in the manner specified. I (We) understand that the quantities mentioned herein are approximate only and are subject to either increase or decrease, and hereby propose to perform any increased or decreased quantities of work at the unit prices bid, in accordance with the above.

I (We) acknowledge that this proposal will be found irregular and/or non-responsive unless a certified check, cashier's check, or Proposal Guaranty Bond in the amount as required in the Advertisement (or, by law) is submitted electronically with the proposal or is delivered to the Contract Administration Engineer prior to the bid opening time specified in the advertisement.

INSTRUCTION TO BIDDERS: Alternate and Optional Items on Bid Schedule.

1. Two or more items entered opposite a single unit quantity WITHOUT DEFINITE DESIGNATION AS "ALTERNATE ITEMS" are considered as "OPTIONAL ITEMS". Bidders may or may not indicate on bids the Optional Item proposed to be furnished or performed WITHOUT PREJUDICE IN REGARD TO IRREGULARITY OF BIDS.
2. Items classified on the bid schedule as "ALTERNATE ITEMS" and/or "ALTERNATE TYPES OF CONSTRUCTION" must be preselected and indicated on bids. However, "Alternate Types of Construction" may include Optional Items to be treated as set out in Paragraph 1, above.
3. Optional items not preselected and indicated on the bid schedule MUST be designated in accordance with Subsection 102.06 prior to or at the time of execution of the contract.
4. Optional and Alternate items designated must be used throughout the project.

I (We) further propose to perform all "force account or extra work" that may be required of me (us) on the basis provided in the Specifications and to give such work my (our) personal attention in order to see that it is economically performed.

I (We) further propose to execute the attached contract agreement (Section 902) as soon as the work is awarded to me (us), and to begin and complete the work within the time limit(s) provided for in the Specifications and Advertisement. I (We) also propose to execute the attached contract bond (Section 903) in an amount not less than one hundred (100) percent of the total of my (our) part, but also to guarantee the excellence of both workmanship and materials until the work is finally accepted.

I (We) shall submit electronically with our proposal or deliver prior to the bid opening time a certified check, cashier's check or bid bond for **five percent (5%) of total bid** and hereby agree that in case of my (our) failure to execute the contract and furnish bond within Ten (10) days after notice of award, the amount of this check (bid bond) will be forfeited to the State of Mississippi as liquidated damages arising out of my (our) failure to execute the contract as proposed. It is understood that in case I am (we are) not awarded the work, the check will be returned as provided in the Specifications.

For Informational Purposes Only

SECTION 905 -- PROPOSAL (CONTINUED)

I (We) hereby certify by digital signature and electronic submission via Bid Express of the Section 905 proposal below, that all certifications, disclosures and affidavits incorporated herein are deemed to be duly executed in the aggregate, fully enforceable and binding upon delivery of the bid proposal. I (We) further acknowledge that this certification shall not extend to the bid bond or alternate security which must be separately executed for the benefit of the Commission. This signature does not cure deficiencies in any required certifications, disclosures and/or affidavits. I (We) also acknowledge the right of the Commission to require full and final execution on any certification, disclosure or affidavit contained in the proposal at the Commission's election upon award. Failure to so execute at the Commission's request within the time allowed in the Standard Specifications for execution of all contract documents will result in forfeiture of the bid bond or alternate security.

Respectfully Submitted,

DATE _____

_____
Contractor

BY _____
Signature

TITLE _____

ADDRESS _____

CITY, STATE, ZIP _____

PHONE _____

FAX _____

E-MAIL _____

(To be filled in if a corporation)

Our corporation is chartered under the Laws of the State of _____ and the names, titles and business addresses of the executives are as follows:

_____
President Address

_____
Secretary Address

_____
Treasurer Address

The following is my (our) itemized proposal.

For Informational Purposes Only

Pavement Restoration of US 49 from the Hinds County Line to the Yazoo County Line, and ITS Improvements on US 49 from Northside Drive to the Madison County Line, US 49 from the Hinds County Line to the Yazoo County Line, and US 49 from the Madison County Line to approximately 500 feet north of the Madison County Line, known as Federal Aid Project Nos. NH-0008-03(050) / 105530301 in Madison County, CRP-0008-03(050) / 105530302 in Madison County, CRP-0008-03(050) / 105530303 in Hinds County, and CRP-0008-03(050) / 105530304 in Yazoo County.

Line no.	Item Code	Adj Code	Quantity	Units	Description[Fixed Unit Price]
				Roadway Items	
0010	202-B006		792	Square Yard	Removal of Asphalt Paved Shoulders, All Depths
0020	202-B009		204	Square Yard	Removal of Asphalt Pavement, Failed Areas
0030	202-B069		1,225	Square Yard	Removal of Concrete Pavement w/ Variable Depth Overlay
0040	202-B158		2,160	Linear Feet	Removal of Guard Rail, Including Rails, Posts and Terminal Ends
0050	202-B168		17	Square Yard	Removal of Island Pavement, All Types
0060	202-B169		752	Linear Feet	Removal of Joint Material
0070	203-G001	(E)	33,024	Cubic Yard	Excess Excavation, FM, AH
0080	209-A005		78,113	Square Yard	Geotextile Stabilization, Type V, Non-Woven
0090	304-B003	(GT)	6,709	Ton	Granular Material, Class 5, Group C
0100	304-B004	(GT)	11,918	Ton	Granular Material, Class 5, Group D
0110	304-D002	(GT)	29,404	Ton	Granular Material, Crushed Stone
0120	305-B001	(GT)	20	Ton	Size I Stabilizer Aggregate, Coarse
0130	406-D001		357,405	Square Yard	Fine Milling of Bituminous Pavement, All Depths
0140	423-A001		36	Mile	Rumble Strips, Ground In
0150	503-C010		3,348	Linear Feet	Saw Cut, Full Depth
0160	603-RA002	(S)	32	Linear Feet	18" Pipe Removed and Relaid
0170	603-RB002	(S)	2	Each	18" End Section Removed and Relaid
0180	606-B003		1,660	Linear Feet	Guard Rail, Class A, Type 1, 'W' Beam, Metal Post
0190	606-D012		4	Each	Guard Rail, Bridge End Section, Type D Modified
0200	606-D023		6	Each	Guard Rail, Bridge End Section, Type I, Metal Post
0210	606-E005		10	Each	Guard Rail, Terminal End Section, Flared
0220	616-A001	(S)	17	Square Yard	Concrete Median and/or Island Pavement, 10-inch
0230	619-A1001		40	Mile	Temporary Traffic Stripe, Continuous White
0240	619-A2001		40	Mile	Temporary Traffic Stripe, Continuous Yellow
0250	619-A3001		40	Mile	Temporary Traffic Stripe, Skip White
0260	619-A5001		11,803	Linear Feet	Temporary Traffic Stripe, Detail
0270	619-A6001		72	Square Feet	Temporary Traffic Stripe, Legend
0280	619-A6002		1,234	Linear Feet	Temporary Traffic Stripe, Legend
0290	619-D1001		32	Square Feet	Standard Roadside Construction Signs, Less than 10 Square Feet
0300	619-D2001		600	Square Feet	Standard Roadside Construction Signs, 10 Square Feet or More
0310	619-D3001		15	Each	Remove and Reset Signs, All Sizes
0320	619-G4005		24	Linear Feet	Barricades, Type III, Single Faced
0330	620-A001		1	Lump Sum	Mobilization
0340	630-C001		30	Linear Feet	Square Tube Posts, 4.0 lb/ft

For Informational Purposes Only

Line no.	Item Code	Adj Code	Quantity	Units	Description[Fixed Unit Price]
0350	630-F002		136	Each	Delineators, Flexible Post Mounted, Crossover, Type I, Yellow
0360	630-F006		35	Each	Delineators, Guard Rail, White
0370	630-F007		35	Each	Delineators, Guard Rail, Yellow
0380	630-G004		10	Each	Type 3 Object Markers, OM-3R or OM-3L
0390	907-201-C001		369	Station	Random Clearing and Grubbing
0400	907-403-A003	(BA1)	6,796	Ton	12.5-mm, ST, Asphalt Pavement
0410	907-403-A006	(BA1)	11,893	Ton	19-mm, ST, Asphalt Pavement
0420	907-403-A013	(BA1)	31,844	Ton	9.5-mm, HT, Asphalt Pavement
0430	907-403-A015	(BA1)	10,561	Ton	9.5-mm, ST, Asphalt Pavement
0440	907-403-B001	(BA1)	1,695	Ton	12.5-mm, HT, Asphalt Pavement, Leveling
0450	907-407-A001	(A2)	51,600	Gallon	Asphalt for Tack Coat
0460	907-413-E001		21,811	Linear Feet	Sawing and Sealing Transverse Joints in Asphalt Pavement
0470	907-420-A001		500	Pounds	Undersealing
0480	907-601-B001	(S)	1	Cubic Yard	Class "B" Structural Concrete, Minor Structures
0490	907-618-A001		1	Lump Sum	Maintenance of Traffic
0500	907-626-A010		20	Mile	6" Thermoplastic Traffic Stripe, Skip White
0510	907-626-B006		20	Mile	6" Thermoplastic Traffic Stripe, Continuous White
0520	907-626-E005		20	Mile	6" Thermoplastic Traffic Stripe, Continuous Yellow
0530	907-626-G004		14,087	Linear Feet	Thermoplastic Detail Stripe, White
0540	907-626-G005		10,281	Linear Feet	Thermoplastic Detail Stripe, Yellow
0550	907-626-H009		338	Square Feet	Thermoplastic Legend, White
0560	907-626-H010		1,234	Linear Feet	Thermoplastic Legend, White
0570	907-627-J001		243	Each	Two-Way Clear Reflective High Performance Raised Markers
0580	907-627-K001		3,201	Each	Red-Clear Reflective High Performance Raised Markers
0590	907-627-L001		51	Each	Two-Way Yellow Reflective High Performance Raised Markers
0600	907-630-PP002		26	Square Feet	Roadside Directional Signs, Sheet Aluminum, 0.125" Thickness, Ground Mounted Roadside Directional Signs
0610	907-632-C001		3	Each	Modify Existing Traffic Signal Cabinet Assembly
0620	907-634-E001		3	Each	Camera Pole with Foundation, 50' Pole
0630	907-636-B053		340	Linear Feet	Electric Cable, Underground in Conduit, THHN, AWG #6, 3 Conductor
0640	907-637-A002		3	Each	Pullbox Enclosure, Type 2
0650	907-637-A004		45	Each	Pullbox Enclosure, Type 4
0660	907-637-A005		11	Each	Pullbox Enclosure, Type 5
0670	907-637-E001		340	Linear Feet	Traffic Signal Conduit, Structural Conduit, Type 1, 1 1/2"
0680	907-637-H001		49,760	Linear Feet	Traffic Signal Conduit Bank, Underground, Rolled Pipe, 2 @ 2"
0690	907-637-H002		390	Linear Feet	Traffic Signal Conduit Bank, Underground, Rolled Pipe, 2"
0700	907-637-K001		1,850	Linear Feet	Traffic Signal Conduit Bank, Aerial Supported, Type 1, 2 @ 2"

For Informational Purposes Only

Line no.	Item Code	Adj Code	Quantity	Units	Description[Fixed Unit Price]
0710	907-650-A002		7	Each	On Street Video Equipment, Fixed Type
0720	907-650-A003		3	Each	On Street Video Equipment, PTZ Type
0730	907-659-A001		1	Lump Sum	Traffic Management Center Modifications
0740	907-660-A002		3	Each	Equipment Cabinet, Type B
0750	907-661-A004		51,500	Linear Feet	Fiber Optic Cable, 72 SM
0760	907-661-A006		1,870	Linear Feet	Fiber Optic Cable, Aerial, 72 SM
0770	907-661-B002		410	Linear Feet	Fiber Optic Drop Cable, 12 SM
0780	907-663-A001		4	Each	Network Switch, Type A
0790	907-663-D001		500	Linear Feet	Category 6 Cable, Installed in Conduit
0800	907-808-A002	(S)	1,504	Linear Feet	Joint Repair
0810	907-823-A001		596	Linear Feet	Preformed Joint Seal, Type I
0820	907-823-A002		39	Linear Feet	Preformed Joint Seal, Type II
0830	907-823-A003		117	Linear Feet	Preformed Joint Seal, Type III
0840	907-823-B001		1,192	Linear Feet	Saw Cut, Type I
0850	907-823-B002		78	Linear Feet	Saw Cut, Type II
0860	907-823-B003		234	Linear Feet	Saw Cut, Type III
0870	907-824-A003		16	Square Feet	General Epoxy Repair

For Informational Purposes Only

CONDITIONS FOR COMBINATION BID

If a bidder elects to submit a combined bid for two or more of the contracts listed for this month's letting, the bidder must complete and execute these sheets of the proposal in each of the individual proposals to constitute a combination bid. In addition to this requirement, each individual contract shall be completed, executed and submitted in the usual specified manner.

Failure to execute this Combination Bid Proposal in each of the contracts combined will be just cause for each proposal to be received and evaluated as a separate bid.

It is understood that the Mississippi Transportation Commission not only reserves the right to reject any and all proposals, but also the right to award contracts upon the basis of lowest separate bids or combination bids most advantageous to the State.

It is further understood and agreed that the Combination Bid Proposal is for comparison of bids only and that each contract shall operate in every respect as a separate contract in accordance with its proposal and contract documents.

I (We) agree to complete each contract on or before its specified completion date.

* * * *

SECTION 905 - COMBINATION BID PROPOSAL (Continued)

Project Number	Pay Item Number	Unit	Unit Price Reduction	Total Item Reduction	Total Contract Reduction
1. _____	_____	_____	_____	_____	
2. _____	_____	_____	_____	_____	
3. _____	_____	_____	_____	_____	
4. _____	_____	_____	_____	_____	
5. _____	_____	_____	_____	_____	
6. _____	_____	_____	_____	_____	
7. _____	_____	_____	_____	_____	
8. _____	_____	_____	_____	_____	

For Informational Purposes Only

Project Number	Pay Item Number	Unit	Unit Price Reduction	Total Item Reduction	Total Contract Reduction
9. _____	_____ _____	_____ _____	_____ _____	_____ _____	
10. _____	_____ _____	_____ _____	_____ _____	_____ _____	

(c) If Combination C has been selected, then initial and complete ONE of the following.

_____ I (We) desire to be awarded work not to exceed a total monetary value of $ _____.

_____ I (We) desire to be awarded work not to exceed _____ number of contracts.

For Informational Purposes Only

Certification with regard to the Performance of Previous Contracts or Subcontracts subject to the Equal Opportunity Clause and the filing of Required Reports

The Bidder hereby certifies that he has ____, has not ____, participated in a previous contract or subcontract subject to the Equal Opportunity Clause, as required by Executive Orders 10925, 11114, or 11246, and that he has ____, has not ____, filed with the Joint Reporting Committee, the Director of the Office of Federal Contract Compliance, a Federal Government contracting or administering agency, or the former President's Committee on Equal Employment Opportunity, all reports due under the applicable filing requirements.

_____
(COMPANY)

DATE: _____

NOTE: The above certification is required by the Equal Employment Opportunity Regulations of the Secretary of Labor (41 CFR 60-1.7 (b) (1)), and must be submitted by bidders and proposed subcontractors only in connection with contracts and subcontracts which are subject to the Equal Opportunity Clause. Contracts and Subcontracts which are exempt from the Equal Opportunity Clause are set forth in 41 CFR 60-1.5. (Generally only contracts or subcontracts of $10,000 or under are exempt.)

Currently, Standard Form 100 (EEO-1) is the only report required by the Executive Orders or their implementing regulations.

Proposed prime Contractors and Subcontractors who have participated in a previous contract or subcontract subject to the Executive orders and have not filed the required reports should note that 41 CFR 60-1.7 (b) (1) prevents the award of contracts and subcontracts unless such Contractors submit a report covering the delinquent period or such other period specified by the Federal Highway Administration or by the Director, Office of Federal Contract Compliance, U. S. Department of Labor.

For Informational Purposes Only

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

CERTIFICATION

I,_____,
(Name of person signing bid)

individually, and in my capacity as_____ of
(Title of person signing bid)

_____do hereby certify under
(Name of Firm, partnership, or Corporation)

penalty of perjury under the laws of the United States and the State of Mississippi that_____

_____, Bidder
(Name of Firm, Partnership, or Corporation)

on Project No. **NH-0008-03(050)/ 105530301000, CRP-0008-03(050)/ 105530302000, CRP-0008-03 (050)/ 105530303000 & CRP-0008-03(050)/ 105530304000**

in **Madison, Hinds, Yazoo & Madison** County(ies), Mississippi, has not either

directly or indirectly entered into any agreement, participated in any collusion; or otherwise taken any action in restraint of free competitive bidding in connection with this contract; nor have any of its corporate officers or principal owners.

Except as noted hereafter, it is further certified that said legal entity and its corporate officers, principal owners, managers, auditors and others in a position of administering federal funds:

a) Are not presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from covered transactions by any Federal department or agency;

b) Have not within a three-year period preceding this proposal been convicted of or had a civil judgment rendered against them for commission of fraud or a criminal offense in connection with obtaining, attempting to obtain, or performing a public (Federal, State or local) transaction or contract under a public transaction; violation of Federal or State antitrust statutes or commission of embezzlement, theft, forgery, bribery, falsification or destruction of records, making false statements, or receiving stolen property;

c) Are not presently indicted for or otherwise criminally or civilly charged by a governmental entity (Federal, State or local) with commission of any of the offenses enumerated in (b) above; and

d) Have not within a three-year period preceding this application/ proposal had one or more public transactions (Federal, State or local) terminated for cause or default.

Do exceptions exist and are made a part thereof? Yes / No

Any exceptions shall address to whom it applies, initiating agency and dates of such action.

For Informational Purposes Only

Note: Exceptions will not necessarily result in denial of award but will be considered in determining bidder responsibility. Providing false information may result in criminal prosecution or administrative sanctions.

The bidder further certifies that the certification requirements contained in Section XI of Form FHWA 1273, will be or have been included in all subcontracts, material supply agreements, purchase orders, etc. except those procurement contracts for goods or services that are expected to be less than the Federal procurement small purchase threshold fixed at 10 U.S.C. 2304(g) and 41 U.S.C. 253(g) (currently $25,000) which are excluded from the certification requirements.

The bidder further certifies, to the best of his or her knowledge and belief, that:

1) No Federal appropriated funds have been paid or will be paid to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with the awarding of any Federal contract, the making of any Federal grant, the making of any Federal loan, the entering into of any cooperative agreement, and the extension, continuation, renewal, amendment, or modification of any Federal contract, grant, loan, or cooperative agreement.

2) If any funds other than Federal appropriated funds have been paid or will be paid to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with this contract, Standard Form-LLL, Disclosure Form to Report Lobbying, in accordance with its instructions will be completed and submitted.

The certification contained in (1) and (2) above is a material representation of fact upon which reliance is placed and a prerequisite imposed by Section 1352, Title 31, U.S. Code prior to entering into this contract. Failure to comply shall be subject to a civil penalty of not less than $10,000 and not more than $100,000. The bidder shall include the language of the certification in all subcontracts exceeding $100,000 and all subcontractors shall certify and disclose accordingly.

All of the foregoing is true and correct.

Executed on _____ _____

Signature

(01/2016 F)

For Information Purposes Only

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SAM.GOV Registration and Unique Entity ID

Bidders are advised that the Prime Contractor must register and maintain a current registration in the **System for Award Management** (http://sam.gov) at all times during the project. Upon registration, the Contractor will be assigned a SAM Unique Entity ID.

Bidders are advised that prior to the award of this contract, they MUST be registered in the System for Award Management.

I (We) acknowledge that this contract cannot be awarded if I (We) are not registered in the System for Award Management prior to the award of this contract. _____ (Yes / No)

I (We) have a SAM Unique Entity ID. _____ (Yes / No)

SAM Unique Entity ID: _____

Company Name: _____

Company e-mail address: _____

For Informational Purposes Only

SECTION 902

CONTRACT FOR _____
LOCATED IN THE COUNTY(IES) OF _____

STATE OF MISSISSIPPI
COUNTY OF HINDS

This Contract is entered into by and between the Mississippi Transportation Commission (the "Commission") and the undersigned contractor (the "Contractor"), as follows:

As consideration for this Contract, the Commission agrees to pay the Contractor the amount(s) set out in the Proposal attached hereto. Said payment will be made in the manner and at the time(s) specified in the Specifications and/or Special Provisions, if any. In exchange for said consideration, the Contractor hereby agrees to accept the prices stated in the Proposal as full compensation for the furnishing of all labor, materials and equipment, and the execution of the scope of work identified for this referenced Project as contemplated in this Contract, and as more fully outlined in the Contract Documents (the "Work"). The Contract Documents consist of the Advertisement, the Notice to Bidders, the Proposal, the Specifications, the Special Provisions, and the approved Plans, all of which are hereby made a part of this Contract and incorporated herein by reference.

The Contractor shall be responsible for all loss or damage arising out of, or in any way in connection with the Work, or from any unforeseen obstructions or difficulties that may be encountered in the prosecution of the Work, and for all risks of every description connected with the Work, with the exception of any items specifically excluded in the Contract Documents. The Contractor shall fully and faithfully complete the Work in a good and workmanlike manner, according to the Contract Documents and any Supplemental Agreements thereto.

The Contractor further agrees that the Work shall be done under the direct supervision of, and to the complete satisfaction of, the Executive Director of the Mississippi Department of Transportation, or his authorized representative(s), and, when federal funds are involved, subject to the inspection and approval of the Federal Highway Administration, or its agents, and/or the agents of any other state or federal agency whose funds are involved. Further, the Work shall be done in accordance with any applicable state and federal laws, and any such rules and regulations issued by the Commission and/or any relevant Federal Agency.

The Contractor agrees that all labor as outlined in the Contract Documents may be secured from a list furnished by the Manager of the Win Job Center nearest the project location, or any successor thereto.

It is agreed and understood that each and every provision of law and clause required by law to be inserted into this Contract shall be deemed to be inserted herein, and this Contract shall be read and enforced as though it were included herein. If through mere mistake or otherwise, any such provision is not inserted, then upon the application of either party hereto, the Contract shall be physically amended to make such insertion.

For Informational Purposes Only

The Contractor agrees that he has read each and every clause of the Contract Documents, and fully understands the meaning of same, and hereby acknowledges that he will comply with all terms, covenants and agreements therein.

Witness our signatures, this the _____ day of _____, 20___.

_____
Contractor

By: _____
Title: _____

_____
Signed and sealed in the presence of: (name and address of witness)

_____
_____

MISSISSIPPI TRANSPORTATION COMMISSION

_____
Executive Director

_____
Secretary to the Commission

Award authorized by the Mississippi Transportation Commission in session on the ____ day of _____, _____, Minute Book No._____, Page No. _____.

For Informational Purposes Only

SECTION 903
PERFORMANCE BOND

PERFORMANCE BOND FOR THE FOLLOWING CONTRACT:
Project No.: _____

For the construction of: _____

Contract date: _____ Contract Price: _____

FOR OWNER: MISSISSIPPI TRANSPORTATION COMMISSION, 401 N. WEST STREET, JACKSON, MISSISSIPPI 39201.

CONTRACTOR (full legal name, contact person, phone number and address):
_____
_____
_____
_____

SURETY (legal name, phone number, principal place of business and address ***for notice purposes***):
_____
_____
_____

Second Surety (if applicable):
_____
_____
_____

The Contractor and Surety, jointly and severally, bind themselves, their heirs, executors, administrators, successors and assigns, to the Owner for the performance of the Contract, which is incorporated herein by reference, and subject to the following terms:

1. If the Contractor fully and faithfully performs the Contract, the Surety and the Contractor shall have no obligation under this Bond.

2. The Surety's obligation under this Bond shall arise after:
   (a) the Owner first provides notice to the Contractor and the Surety that termination is imminent, pursuant to the current edition of the Mississippi Standard Specifications for Road and Bridge Construction, which is a part of the Contract; and
   (b) the Owner declares a Contractor Default, terminates the Contract, and notifies the Surety.

3. Within 20 calendar days as set forth in Section 108.08 of the current edition of the Mississippi Standard Specifications for Road and Bridge Construction, the Surety shall, after discussions with and consent from the Owner, and at the Surety's expense, elect to take one of the following actions:
   (a) Arrange for the Contractor, with the consent of the Owner, to perform and complete the Contract;
   (b) Undertake to perform and complete the Contract itself, through its agents or independent contractors;
   (c) Waive its right to perform and complete, arrange for completion, or obtain a new contractor, and after investigation, determine the amount for which it may be liable to the Owner (subject to the consent of the Owner) and as soon as practicable after the amount is determined, make payment to the Owner.

For Informational Purposes Only

4. If the Surety does not proceed, within a reasonable time frame, to enact and carry out the election made in Paragraph 3, then the Surety shall be deemed to be in default on this Bond, and the Owner shall be entitled to enforce any remedy available to it under the Contract and applicable law.

5. Subject to the commitment by the Owner to pay the Balance of the Contract Price, the Surety is obligated, without duplication, for
   (a) the responsibilities of the Contractor for correction of defective work and completion of the Contract;
   (b) additional legal, design professional and delay costs resulting from the Contractor's Default, and resulting from the actions or failure to act of the Surety under Paragraph 3; and
   (c) liquidated damages, or if no liquidated damages are specified in the Contract, actual damages caused by delayed performance or non-performance of the Contractor.

6. The Surety hereby waives notice of any change, including changes of time, to the Contract or to related subcontracts, purchase orders and other obligations.

7. The penal sum of the Bond shall be equal to the Contract Price; however, the penal sum may be increased or decreased as the result of any subsequent Supplemental Agreements and/or final contract quantities.

8. Notice to the Surety, the Owner or the Contractor shall be mailed or delivered to the address listed for notice purposes on the first page of this Bond.

CONTRACTOR AS PRINCIPAL
Company: _____

Signature: _____
Name: _____
Title: _____
Address: _____
_____

SURETY
Company: _____

Signature: _____ MS Insurance ID # _____
Name: _____
Title: _____
Address: _____
_____

SURETY (if applicable)
Company: _____

Signature: _____ MS Insurance ID # _____
Name: _____
Title: _____
Address: _____
_____

For Informational Purposes Only

SECTION 903
PAYMENT BOND

PAYMENT BOND FOR THE FOLLOWING CONTRACT:
Project No.: _____

For the construction of: _____

Contract date: _____ Contract Price: _____

FOR OWNER: MISSISSIPPI TRANSPORTATION COMMISSION, 401 N. WEST STREET, JACKSON, MISSISSIPPI 39201.

CONTRACTOR (full legal name, contact person, phone number and address):
_____
_____
_____

SURETY (legal name, phone number, principal place of business and address ***for notice purposes***):
_____
_____
_____
Second Surety (if applicable):
_____
_____
_____

The Contractor and Surety, jointly and severally, bind themselves, their heirs, executors, administrators, successors and assigns, to the Owner for payment of labor, materials and equipment furnished for use in the performance of the Contract, which is incorporated herein by reference, subject to the following terms:

1. If the Contractor promptly makes payment of all sums due to any and all subcontractors, sub-subcontractors, suppliers to the Contractor, suppliers to subcontractors and/or laborers who have performed work on the project site, and defends, indemnifies and holds harmless the Owner from claims, demands, liens or suits by any person or entity seeking payment for labor, materials or equipment furnished for use in the performance of the Contract, then the Surety and the Contractor shall have no obligation under this Bond.

2. The Owner shall provide notice to the Surety of any claims, demands, liens or suits against the Owner or the Owner's property that it receives from any person or entity ("Claimants") seeking payment for labor, materials or equipment furnished for use in the performance of the Contract.

3. Upon notice of any claims, demands, liens or suits provided by the Owner or Contractor or given to the Surety by a Claimant, the Surety shall promptly and at the Surety's expense, defend, indemnify and hold harmless the Owner against said claim, demand, lien or suit and shall take the following additional actions:
    (a) Send an answer to the Claimant, with a copy to the Owner, within sixty (60) days after receipt of the Claim, stating the amounts that are undisputed and the basis for challenging any amounts that are disputed; and
    (b) Pay or arrange for payment of any undisputed amounts.

For Informational Purposes Only

4. The Surety shall not be liable to the Owner, Claimants or others for obligations of the Contractor that are unrelated to the Contract. The Owner shall not be liable for the payment of any costs or expenses of any Claimant under this Bond and shall have no obligation under this Bond to make payments to, or give notice on behalf of, Claimants, or otherwise have any obligations to Claimants under this Bond.

5. The Surety hereby waives notice of any change, including changes of time, to the Contract or to related subcontracts, purchase orders and other obligations.

6. The penal sum of the Bond shall be equal to the Contract Price; however, the penal sum may be increased or decreased as the result of any subsequent Supplemental Agreements and/or final contract quantities.

CONTRACTOR AS PRINCIPAL
Company: _____

Signature: _____
Name: _____
Title: _____
Address: _____
_____

SURETY
Company: _____

Signature: _____ MS Insurance ID # _____
Name: _____
Title: _____
Address: _____
_____

SURETY (if applicable)
Company: _____

Signature: _____ MS Insurance ID # _____
Name: _____
Title: _____
Address: _____
_____

For Informational Purposes Only

BID BOND

KNOW ALL MEN BY THESE PRESENTS, that we_____
Contractor

_____
Address

_____
City, State ZIP

As principal, hereinafter called the Principal, and _____
Surety

a corporation duly organized under the laws of the state of _____

as Surety, hereinafter called the Surety, are held and firmly bound unto **State of Mississippi, Jackson, Mississippi**

As Obligee, hereinafter called Obligee, in the sum of **Five Per Cent (5%) of Amount Bid**

Dollars($_____)

for the payment of which sum will and truly to be made, the said Principal and said Surety, bind ourselves, our heirs, executors, administrators, successors and assigns, jointly and severally, firmly by these presents.

WHEREAS, the Principal has submitted a bid for **Pavement Restoration of US 49 from the Hinds County Line to the Yazoo County Line, and ITS Improvements on US 49 from Northside Drive to the Madison County Line, US 49 from the Hinds County Line to the Yazoo County Line, and US 49 from the Madison County Line to approximately 500 feet north of the Madison County Line, known as Federal Aid Project Nos. NH-0008-03(050) / 105530301 in Madison County, CRP-0008-03(050) / 105530302 in Madison County, CRP-0008-03(050) / 105530303 in Hinds County, and CRP-0008-03(050) / 105530304 in Yazoo County.**

NOW THEREFORE, the condition of this obligation is such that if the aforesaid Principal shall be awarded the contract, the said Principal will, within the time required, enter into a formal contract and give a good and sufficient bond to secure the performance of the terms and conditions of the contract, then this obligation to be void; otherwise the Principal and Surety will pay unto the Obligee the difference in money between the amount of the bid of the said Principal and the amount for which the Obligee legally contracts with another party to perform the work if the latter amount be in excess of the former, but in no event shall liability hereunder exceed the penal sum hereof.

Signed and sealed this _____day of _____, 20___

_____
(Principal) (Seal)

_____ By:_____
(Witness) (Name) (Title)

_____
(Surety) (Seal)

_____ By:_____
(Witness) (Attorney-in-Fact)

_____
(MS Agent)

_____
Mississippi Insurance ID Number