



SM No. CBWO1051410042

PROPOSAL AND CONTRACT DOCUMENTS

FOR THE CONSTRUCTION OF

22

Building Improvements at District 1 Shop Electrical Upgrades, known as State
Project No. BWO-1051-41(004) / 503808301 in Lee County.

Project Completion: 03/31/2027

(STATE DELEGATED)

NOTICE

**BIDDERS MUST COMPLETE AN ONLINE REQUEST
FOR PERMISSION TO BID THIS PROJECT.**

Electronic addendum updates will be posted on www.gomdot.com

SECTION 900

OF THE CURRENT 2017 STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION JACKSON, MISSISSIPPI

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 901 - ADVERTISEMENT

Electronic bids will be received by the Mississippi Transportation Commission at 10:00 o'clock A.M., Wednesday, May 27, 2026, from the Bid Express Service and shortly thereafter publicly read on the Sixth Floor for:

Building Improvements at District 1 Shop Electrical Upgrades, known as State Project No. BWO-1051-41(004) / 503808301 in Lee County.

The attention of bidders is directed to the predetermined minimum wage rate set by the U. S. Department of Labor under the Fair Labor Standards Act.

Plans and specifications are on file in the offices of the Mississippi Department of Transportation.

Contractors may request permission to bid online at <http://shop.mdot.ms.gov> at no cost. Upon approval, Contractors shall be eligible to submit a bid using Bid Express at <http://bidx.com>. Specimen proposals may be viewed and downloaded online at no cost at <http://mdot.ms.gov> or purchased online at <http://shop.mdot.ms.gov> at a cost of Ten Dollars (\$10.00) per proposal plus a small convenience fee. Cash or checks will not be accepted as payment.

Plans must be purchased online at [<https://shop.mdot.ms.gov>](https://shop.mdot.ms.gov). Costs of plans will be on a per sheet basis plus a small convenience fee. If you have any questions, you can contact the MDOT Plans Print Shop at (601) 359-7460, or e-mail at plans@mdot.state.ms.us. Plans will be shipped upon receipt of payment. Cash or checks will not be accepted as payment.


Bid bond, signed or countersigned by a Mississippi Agent or Qualified Nonresident Agent, with Power of Attorney attached, a Cashier's check or Certified Check for five (5%) percent of bid, payable to STATE OF MISSISSIPPI, must accompany each proposal.

The attention of bidders is directed to the provisions of Subsection 102.07 pertaining to irregular proposals and rejection of bids.

BRAD WHITE
EXECUTIVE DIRECTOR

DOCUMENT 00 01 07 SEAL PAGE

Mechanical
Pickering Firm, Inc.
6363 Poplar Avenue, Suite 300
Memphis, TN 38119
(901) 726-0810

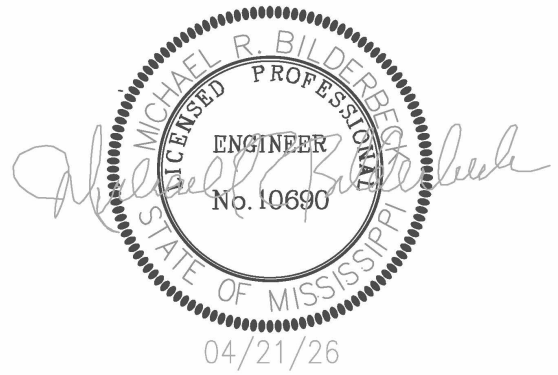

Electrical
Pickering Firm, Inc.
6363 Poplar Avenue, Suite 300
Memphis, TN 38119
(901) 726-0810

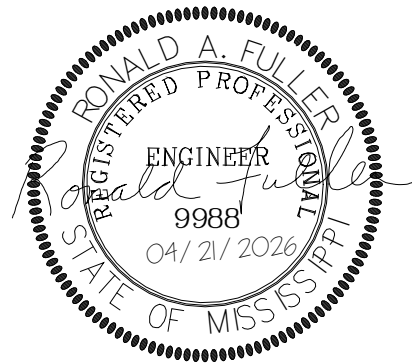


TABLE OF CONTENTS

PROJECT: District 1 Shop Electrical Upgrade
Lee County, Tupelo, Mississippi

PROJECT NUMBER: BWO-1051-41(004) 503808

DATE: 4/21/2026

DESCRIPTION A: This Work shall consist of all construction work necessary in constructing the District 1 Shop Electrical Upgrade, Lee County, Tupelo, Mississippi, in accordance with these Specifications and conforming to the Drawings.

These Specifications intend to provide the necessary items and instructions for a complete building, including all code compliance. Omission of items or instructions necessary or considered standard good practice for the proper installation and construction of the building shall not relieve the Contractor of furnishing and installing such items and conforming to the building codes having jurisdiction.

Division 00 Procurement and Contracting Requirements

Introductory Information

- Section 00 01 07 – Seal Page
- Section 00 01 10 – Table of Contents
- Section 00 01 15 – List of Drawing Sheets

Bidding Requirements

- Section 00 21 13 – Instructions to Bidders
- Section 00 22 13 – Supplementary Instructions to Bidders

Contracting Requirements

- Section 00 72 00 – General Conditions
- AIA Document A201™ - 2007 Amended
- Section 00 91 13 - Addenda

Division 01- General Requirements

- Section 01 10 00 – Summary
- Section 01 25 00 – Substitution Procedures
- Section 01 26 00 – Contract Modification Procedures
- Section 01 29 00 – Payment Procedures
- Section 01 31 00 – Project Management and Coordination
- Section 01 32 00 – Construction Progress Documentation
- Section 01 32 33 – Photographic Documentation
- Section 01 33 00 – Submittal Procedures
- Section 01 40 00 – Quality Requirements
- Section 01 42 00 – References
- Section 01 45 29 – Testing Laboratory Services – MDOT
- Section 01 50 00 – Temporary Facilities and Controls
- Section 01 60 00 – Product Requirements
- Section 01 73 00 – Execution
- Section 01 74 19 – Construction Waste Management and Disposal
- Section 01 77 00 – Closeout Procedures
- Section 01 78 23 – Operation and Maintenance Data
- Section 01 78 39 – Project Record Documents
- Section 01 79 00 – Demonstration and Training

Division 02 (Not Used)

Division 03 Concrete

- Section 03 10 00 – Concrete Forming and Accessories
- Section 03 20 00 – Concrete Reinforcing
- Section 03 30 00 – Cast-In-Place Concrete

Division 04 - 06 (Not Used)

Division 07 Thermal and Moisture Protections

- Section 07 92 00 – Joint Sealants

Division 08 – 22 (Not Used)

Division 23 Heating, Ventilating, and Air Conditioning

- Section 23 05 29 – Hangers and Supports for HVAC
- Section 23 05 48 - Vibration Isolation and Seismic Restraint of Mechanical and Electrical Systems
- Section 23 05 53 – Mechanical Identification for HVAC
- Section 23 11 23 - Natural Gas Piping and Specialties

Division 24 – 25 (Not Used)

Division 26 Electrical

- Section 26 04 02 - Underground Electrical Service
- Section 26 05 19 - Low-Voltage Electrical Power Conductors and Cables
- Section 26 05 26 – Grounding and Bonding for Electrical Systems
- Section 26 05 29 – Hangers and Supports for Electrical Systems
- Section 26 05 33.13 – Conduit for Electrical Systems
- Section 26 05 33.16 – Boxes for Electrical Systems
- Section 26 05 53 – Identification for Electrical Systems
- Section 26 05 73 – Power System Studies
- Section 26 24 16 – Panelboards
- Section 26 27 26 – Wiring Devices
- Section 26 28 13 – Fuses
- Section 26 28 16.13 – Enclosed Circuit Breakers
- Section 26 28 16.16 – Enclosed Switches
- Section 26 32 13 – Engine Generators
- Section 26 36 00 – Transfer Switches
- Section 26 51 00 – Interior Lighting
- Section 26 56 00 – Exterior Lighting

Division 27 – 49 (Not Used)

Division 50 MDOT Procurement and Contracting Forms

REVISIONS TO THE ABOVE WILL BE INDICATED ON THE SECOND SHEET
OF SECTION 905 AS ADDENDA)

END OF TABLE OF CONTENTS

DOCUMENT 00 01 15

LIST OF DRAWING SHEETS

1.01 LIST OF DRAWINGS

- A. List of Drawings: Drawings consist of the following Contract Drawings and other drawings of type indicated:

WORKING NUMBER	SHEET NUMBER	DESCRIPTION
---	1	TITLE SHEET
T-100	2	INDEX OF DRAWINGS
M-130	3	FLOOR PLAN
M-131	4	MEZZANINE PLAN
M-601	5	SCHEDULES
E-001	6	ELECTRICAL SYMBOLS, LEGEND, NOTES
E-120	7	POWER DEMO PLAN – FIRST FLOOR
E-121	8	POWER DEMO PLAN – SECOND FLOOR
E-122	9	LIGHTING DEMO PLAN – FIRST FLOOR
E-123	10	LIGHTING DEMO PLAN – SECOND FLOOR
E-130	11	ELECTRICAL POWER PLAN – FIRST FLOOR
E-131	12	ELECTRICAL POWER PLAN – ENLARGED FIRST FLOOR
E-132	13	ELECTRICAL POWER PLAN – SECOND FLOOR
E-140	14	ELECTRICAL LIGHTING PLAN – FIRST FLOOR
E-141	15	ELECTRICAL LIGHTING PLAN – SECOND FLOOR
E-142	16	ELECTRICAL DETAILS
E-601	17	ELECTRICAL SCHEDULES

END OF DOCUMENT

DOCUMENT 00 21 13

INSTRUCTIONS TO BIDDERS

PART 1 - GENERAL

1.1 QUESTIONS

- A. Questions Regarding Bidding: Bidders are advised that all questions that arise regarding the contract documents (proposal) or plans on this project shall be directed to the www.gomdot.com current letting webpage. Click on the call number for this project to open an email form to submit your question. Questions must be submitted by 8:00 a.m. on the day prior to the letting. Answers to questions will be posted by 6:00 p.m. on the day prior to the letting. Answers can be viewed by clicking on Q&A link under the Proposal Addenda column.
- B. It shall be the Bidders responsibility to familiarize themselves with the questions and answers that have been submitted on this project. Bidders are advised that by signing the contract documents for this project, they agree that the on-line Questions and Answers submitted on this project shall be added to and made part of the official contract.

1.2 BIDDER'S QUALIFICATIONS

- A. Prequalification of Bidders: Refer to Mississippi Standard Specifications for Road and Bridge Construction 2017 Edition Section 102 – Bidding Requirements and Conditions, Subsection 102.01 – Prequalification of Bidders.

1.3 NON-RESIDENT BIDDER

- A. Consideration of Proposals: Refer to Mississippi Standard Specifications for Road and Bridge Construction 2017 Edition Section 103 – Award and Execution of Contract, Subsection 103.01 – Consideration of Proposal.

1.4 CONDITIONS OF WORK

- A. Each Bidder must fully inform themselves of all conditions relating to the construction of the Project and employment of labor thereon. Failure to do so will not relieve a successful Bidder of obligations to furnish all material and labor necessary to carry out the provisions of the Contract. Insofar as possible, the Bidder must employ methods, or means, which will not cause interruption of, or interference with, the work of any other Bidder or Contractor.

1.5 EXAMINATION OF PROPOSAL AND SITE

- A. Examination of proposal and Site: Refer to Mississippi Standard Specifications for Road and Bridge Construction 2017 Edition Section 102 – Bidding Requirements and Conditions, Subsection 102.05 – Examination of Plans, Specifications, Special Provisions, Notice to Bidders and Site Work.
- B. There will be no Pre-Bid Meeting, but failure to visit the site prior to submitting a bid will in no way relieve the successful Bidder from furnishing materials or performing work required to complete Work in accordance with Drawings and Project Manual (Proposal).
- C. Schedule a Site Visit: Contact Mr. Johnny Shields – Maintenance Engineer, Tel. Office: 662-842-1122, no later than 3-19-2026.

1.6 LAWS AND REGULATIONS

- A. Laws and Regulations: Refer to Mississippi Standard Specifications for Road and Bridge Construction 2017 Edition Section 107 – Legal Relations and Responsibility to Public, Subsection 107.01 – Laws to be Observed.

1.7 BID DOCUMENT

- A. The amount for Bid Document (Proposal) is indicated in the advertisement for Bids. Selected plan rooms will be issued one set of documents without charge.

1.8 METHOD OF BIDDING

- A. Lump sum, single bids received on a general contract will include general, mechanical and electrical construction (including Pay Items) and work shown on Drawings or specified in the Project Manual (Proposal).

1.9 PROPOSAL FORMS

- A. Preparation of Proposal: Refer to Mississippi Standard Specifications for Road and Bridge Construction 2017 Edition Section 102 – Bidding Requirements and Conditions, Subsection 102.06 – Preparation of Proposal.

1.10 SUBSTITUTIONS

- A. No substitutions, qualifications or redefining of the Specification requirements are allowed to be marked on the Proposal Form, unless specifically required by the Bid Documents. Refer to Section 01 25 00 entitled Substitution Procedures which covers procedures after the award of Contract. .

1.11 ADDENDA

- A. Addenda to the Drawings or Project Manual issued before or during the time of bidding shall be included in the proposal and become a part of the Contract.
- B. If the Proposal, Section 905, does not contain acknowledgement of receipt and addition to the Proposal and Contract Documents of all addenda issued prior to opening of bids will be considered irregular and may be rejected.

1.12 BIDDER IDENTIFICATION

- A. Signature: The Proposal Form shall be signed, by any individual authorized to enter into a binding agreement for the Business making the bid proposal.
- B. Legal Address: The address appearing on the Proposal Form should be the same address exact as recorded at the Secretary of State <https://corp.sos.ms.gov/corp/portal/c/page/corpBusinessIdSearch/portal.aspx?#clear=1> which should be the same as you applied for at the Mississippi Board of Contractors <http://www.msdoc.us/>
- C. Certificate of Responsibility Number(s): The Certificate of Responsibility Number(s) appearing on the Proposal Form should be the same number appearing in the current Mississippi State Board of Contractors Roster.

1.13 BID SECURITY

- A. Proposal Guaranty: Refer to Mississippi Standard Specifications for Road and Bridge Construction 2017 Edition Section 102 – Bidding Requirements and Conditions, Subsection 102.08 – Proposal Guaranty with the exception that the first and second paragraphs in Subsection 102.08 on page 20 should be deleted and substitute:
 - 1. No proposal will be considered unless accompanied by certified check, cashier's check or bid bond, made payable to the State of Mississippi, in an amount of not less than five percent (5%) of the total amount of the proposal offered. The guaranty shall be evidence of good faith that, if awarded the contract, the bidder will execute the contract and give performance and payment contract bond(s) as stipulated in Subsection 103.05.1, 103.05.2, and as required by law.
 - 2. If a bid bond is offered as guaranty, the bond must be made by a Surety acceptable to the Executive Director and signed or countersigned by a Mississippi Agent or Qualified Nonresident Agent and the Bidder. Such bid bond shall also conform to the requirements and conditions stipulated in Subsection 103.05.2, applicable.

1.14 POWER OF ATTORNEY

- A. Power of Attorney: Refer to Mississippi Standard Specifications for Road and Bridge Construction 2017 Edition Section 103 – Award and Execution of Contract, Subsection 103.05 – Requirement of Contract Bond.

1.15 SUBMITTAL

- A. Delivery of Proposals: Refer to Mississippi Standard Specifications for Road and Bridge Construction 2017 Edition Section 102 – Bidding Requirements and Conditions, Article 102.09 – Delivery of Proposal.

1.16 MODIFICATION TO BID

- A. A Bidder may NOT MODIFY the bid prior to the scheduled closing time indicated in the Advertisement for Bids in the following manner:
 - 1. Notification on Envelope: A modification may NOT be written on the outside of the sealed envelope containing the bid.
 - 2. Facsimile: A facsimile (fax) will NOT be acceptable.

1.17 OPENING OF BIDS

- A. Public Opening of Proposal: Refer to Mississippi Standard Specifications for Road and Bridge Construction 2017 Edition Section 102 – Bidding Requirements and Conditions, Subsection 102.12 – Public Opening of Proposal.

1.18 IRREGULARITIES

- A. Irregular Proposals: Refer to Mississippi Standard Specifications for Road and Bridge Construction 2017 Edition Section 102 – Bidding Requirements and Conditions, Subsection 102.07 – Irregular Proposal. Proposals will be considered irregular and may be rejected for any of the following reasons:
1. If the proposal is on a form other than that furnished by the Department, or if the form is altered or any part thereof is detached except that is allowed.
 2. If there are unauthorized additions, conditions or alternate bids, or irregularities of any kind that may tend to make the proposal incomplete, indefinite, or ambiguous as to its meaning.
 3. If the bidder adds any provisions reserving the right to accept or reject an award, or to enter into a Contract pursuant to an award.
 4. If the proposal, Section 905, does not contain acknowledgement of receipt and addition to the proposal and contract documents of all addenda.
 5. Failure to execute required affidavits, certificates, etc., and furnish proposal guaranty.
 6. The Commission reserves the right, for any reason, to reject any or all proposals, to waive technicalities or irregularities, or to advertise for new proposals, and the decision of the Commission to reject any bid or proposal shall not be cause for any liability or damage against the Commission, the Department, or any of its officers or employees.

1.19 PROTEST

- A. Any protest must be delivered in writing to the Owner prior to the Award Date.

1.20 ERRORS

- A. Any claim of error and request for release from bid must be delivered in writing to the Owner within twenty-four (24) hours after the bid opening. The Bidder shall provide sufficient documentation with the written request clearly proving an error was made.

1.21 AWARD OF CONTRACT

- A. Award of Contract: Refer to Mississippi Standard Specifications for Road and Bridge Construction 2017 Edition Section 103 – Award and Execution of Contract, Subsection 103.02 – Award of Contract.
- B. Consideration of Proposal: Refer to Mississippi Standard Specifications for Road and Bridge Construction 2017 Edition Section 103 – Award and Execution of Contract, Subsection 103.01 – Consideration of Proposal.

1.22 FAILURE TO ENTER INTO A CONTRACT

- A. Failure to Execute Contract: Refer to Mississippi Standard Specifications for Road and Bridge Construction 2017 Edition Section 103 – Award and Execution of Contract, Subsection 103.08 – Failure to Execute Contract.

1.23 SECURITY FOR FAITHFUL PERFORMANCE

- A. Requirements of Contract Bonds: Refer to Mississippi Standard Specifications for Road and Bridge Construction 2017 Edition Section 103 – Award and Execution of Contract, Subsection 103.05 – Requirement of Contract Bond.

1.24 BIDDER'S CHECKLIST

A. Proposal Form:

1. Base Bid:
☐ Fill-in the amount of the base bid in numbers.
2. Alternates:
☐ Fill-in each alternates amount in numbers.
3. Certification Form (State Non-Collusion Certificate)
☐ Certification (regarding Non-Collusion, Debarment and Suspension, etc). Form has been executed in duplicate.
4. Acceptance:
☐ Proposal is signed by authorized person.
☐ Name of Business. - complete spelling of bidder's name and address – exact as recorded at the Secretary of State <https://corp.sos.ms.gov/corp/portal/c/page/corpBusinessIdSearch/portal.aspx?#clear=1> which should be the same as you applied for at the Mississippi Board of Contractors <http://www.msbec.us/>
☐ Legal address of the business listed above (at SOS and Contractor's Board).
☐ Correct Certificate of Responsibility Number(s) as it appears in the current Mississippi State Board of Contractors Roster.
5. Certificate of Responsibility Number(s):
☐ Base Bid is under \$50,000 and no number is required.
☐ Base Bid is under \$50,000 and the statement "bid does not exceed \$50,000" is on the outside of the sealed envelope.
☐ Base Bid is equal to or over \$50,000 and number is required.
☐ Joint Venture and *joint venture* number is required.
 Or
☐ Joint Venture participants' numbers are required.

B. Bid Security

1. Bid Bond:
☐ Included Bid Bond payable to the STATE OF MISSISSIPPI with Project number identified thereon,
 Or
☐ Included Certified Check payable to the STATE OF MISSISSIPPI with Project number identified thereon.
2. Power of Attorney:
☐ Included Power of Attorney.

C. Non-Resident Bidder

1. Preference Law:
☐ Attached a Copy of Non-Resident Bidder's Preference Law.
 Or
☐ Attached a Statement.

D. Subcontractors' Name

1. Subcontractor:
() List Mechanical, Plumbing, and/or Electrical Subcontractor regardless of cost.
* List name even for under \$50,000.
* Fire Protection Sprinkler Contractors do not have to be listed.
* If there is a separate HVAC/Plumbing Sub-Contractor, so notate as mentioned herein.
* If Mechanical, Plumbing, and/or Electrical Subcontractor is performed by the General Contractor, be sure the General has COR for said discipline.
* If there is no Mechanical, Plumbing, and/or Electrical Sub-Contractor listed, then use of Sub-Contractor to perform such scope will not be permitted.

E. Subcontractors' COR Number

1. Certificate of Responsibility
() List certificate of responsibility Number for all listed Sub-Contractors over \$50,000 as required by State Board of Contractors.
* If under \$50,000 – so notate on the COR line “under \$50,000” (or can still show COR Number)

END OF DOCUMENT

DOCUMENT 00 22 13

SUPPLEMENTARY INSTRUCTIONS TO BIDDERS

1.01 INSTRUCTIONS TO BIDDERS

- A. Instructions to Bidders for Project consist of the following:

1.02 WORK IN PROXIMITY OF HIGH VOLTAGE POWER LINES

- A. Contractor's Responsibility for Utility Property and Services: Refer to Mississippi Standard Specifications for Road and Bridge Construction 2017 Edition Section 107 – Legal Relations and Responsibility to Public, Subsection 107.18 – Contractor's Responsibility for Utility Property and services.

1.03 PLANT PEST QUARANTINE INFORMATION

- A. Quarantine Information: Refer to Mississippi Standard Specifications for Road and Bridge Construction 2017 Edition Section 107 – Legal Relations and Responsibility to Public, Subsection 107.22.7 – Quarantine Information.

1.04 PROMPT PAYMENT

- A. General: Refer to Mississippi Standard Specifications for Road and Bridge Construction 2017 Edition Section 108 – Prosecution and Progress, Subsection 108.01.1 – General.

1.05 ALTERATIONS IN BIDDING PROCESS

- A. Preparation of Proposal: Refer to Mississippi Standard Specifications for Road and Bridge Construction 2017 Edition Section 102 – Bidding Requirements and Conditions, Subsection 102.06 – Preparation of Proposal.

1.06 CONTRACT TIME

- A. It is anticipated that the Notice of Award will be issued by not later than June 9, 2026, and the date for Notice to Proceed and Beginning of Contract Time will be July 9, 2026.
- B. The calendar date for completion of this Contract shall be January 15, 2027, which date or extended date as provided in Article 8 - TIME shall be the end of contract time
- C. Construction Schedule: Refer to Mississippi Standard Specifications for Road and Bridge Construction 2017 Edition Section 108 – Prosecution and Progress (as amended).
- D. A Construction Schedule as described in Section 01 32 00-Construction Progress Documentation of these Specifications will be required for building construction.

1.07 SUBCONTRACTING

- A. The Bidder is specifically advised that any person, firm or other party to whom it proposes to award a subcontract must be acceptable to the Owner. The total allowable subcontract amount shall not exceed **sixty percent (60%) of the Contract Sum**, excluding the value of any "Specialty Items" listed below:

1. Specialty Items
 - a. Division 23 – Heating, Ventilating, and Air Conditioning
 - b. Division 26 – Electrical

END OF DOCUMENT

DOCUMENT 00 72 00

GENERAL CONDITIONS

1.01 DESCRIPTION.

- A. The American Institute of Architects AIA DOCUMENT A201-2007, "General Conditions of the Contract for Construction", 2007, Sixteenth Edition, Articles 1 through 15 inclusive, except as may be added to or modified herein, is hereby made a part of the Contract Documents. For brevity, AIA DOCUMENT A201-2007 is also referred to in the Contract documents as the "General Conditions".
- B. All persons intending to provide goods or services in connection with this Work are required to read and understand the referenced document prior to proceeding.

END OF DOCUMENT



AIA® Document A201® – 2007

General Conditions of the Contract for Construction

for the following PROJECT:

(Name and location or address)

DISTRICT 1 SHOP ELECTRICAL UPGRADE
LEE COUNTY, TUPELO, MISSISSIPPI
BWO-1051-41(004) 503808

THE OWNER:

(Name, legal status and address)

MISSISSIPPI TRANSPORTATION COMMISSION
P O BOX 1850
JACKSON, MISSISSIPPI 39215-1850

THE ARCHITECT:

(Name, legal status and address)

TABLE OF ARTICLES

- 1 GENERAL PROVISIONS
- 2 OWNER
- 3 CONTRACTOR
- 4 ARCHITECT
- 5 SUBCONTRACTORS
- 6 CONSTRUCTION BY OWNER OR BY SEPARATE CONTRACTORS
- 7 CHANGES IN THE WORK
- 8 TIME
- 9 PAYMENTS AND COMPLETION
- 10 PROTECTION OF PERSONS AND PROPERTY
- 11 INSURANCE AND BONDS
- 12 UNCOVERING AND CORRECTION OF WORK
- 13 MISCELLANEOUS PROVISIONS
- 14 TERMINATION OR SUSPENSION OF THE CONTRACT

ADDITIONS AND DELETIONS:

The author of this document has added information needed for its completion. The author may also have revised the text of the original AIA standard form. An *Additions and Deletions Report* that notes added information as well as revisions to the standard form text is available from the author and should be reviewed. A vertical line in the left margin of this document indicates where the author has added necessary information and where the author has added to or deleted from the original AIA text.

This document has important legal consequences. Consultation with an attorney is encouraged with respect to its completion or modification.

15 CLAIMS AND DISPUTES



Init.

/

AIA Document A201® – 2007. Copyright © 1911, 1915, 1918, 1925, 1937, 1951, 1958, 1961, 1963, 1966, 1970, 1976, 1987, 1997 and 2007 by The American Institute of Architects. All rights reserved. **The “American Institute of Architects,” “AIA,” the AIA Logo, “A201,” and “AIA Contract Documents” are registered trademarks and may not be used without permission.** This document was produced by AIA software at 09:29:51 ET on 01/17/2023 under Order No.3104237217 which expires on 07/19/2023, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail copyright@aia.org.

User Notes:

INDEX

(Topics and numbers in bold are section headings.)

Acceptance of Nonconforming Work

9.6.6, 9.9.3, 12.3

Acceptance of Work

9.6.6, 9.8.2, 9.9.3, 9.10.1, 9.10.3, 12.3

Access to Work

3.16, 6.2.1, 12.1

Accident Prevention

10

Acts and Omissions

3.2, 3.3.2, 3.12.8, 3.18, 4.2.3, 8.3.1, 9.5.1, 10.2.5,
10.2.8, 13.4.2, 13.7, 14.1, 15.2

Addenda

1.1.1, 3.11.1

Additional Costs, Claims for

3.7.4, 3.7.5, 6.1.1, 7.3.7.5, 10.3, 15.1.4

Additional Inspections and Testing

9.4.2, 9.8.3, 12.2.1, 13.5

Additional Insured

11.1.4

Additional Time, Claims for

3.2.4, 3.7.4, 3.7.5, 3.10.2, 8.3.2, 15.1.5

Administration of the Contract

3.1.3, 4.2, 9.4, 9.5

Advertisement or Invitation to Bid

1.1.1

Aesthetic Effect

4.2.13

Allowances

3.8, 7.3.8

All-risk Insurance

11.3.1, 11.3.1.1

Applications for Payment

4.2.5, 7.3.9, 9.2, 9.3, 9.4, 9.5.1, 9.6.3, 9.7, 9.10,
11.1.3

Approvals

2.1.1, 2.2.2, 2.4, 3.1.3, 3.10.2, 3.12.8, 3.12.9, 3.12.10,
4.2.7, 9.3.2, 13.5.1

Arbitration

8.3.1, 11.3.10, 13.1.1, 15.3.2, 15.4

ARCHITECT

4

Architect, Definition of

4.1.1

Architect, Extent of Authority

2.4.1, 3.12.7, 4.1, 4.2, 5.2, 6.3, 7.1.2, 7.3.7, 7.4, 9.2,
9.3.1, 9.4, 9.5, 9.6.3, 9.8, 9.10.1, 9.10.3, 12.1, 12.2.1,
13.5.1, 13.5.2, 14.2.2, 14.2.4, 15.1.3, 15.2.1

Architect, Limitations of Authority and

Responsibility

2.1.1, 3.12.4, 3.12.8, 3.12.10, 4.1.2, 4.2.1, 4.2.2,
4.2.3, 4.2.6, 4.2.7, 4.2.10, 4.2.12, 4.2.13, 5.2.1, 7.4,
9.4.2, 9.5.3, 9.6.4, 15.1.3, 15.2

Architect's Additional Services and Expenses

2.4.1, 11.3.1.1, 12.2.1, 13.5.2, 13.5.3, 14.2.4

Architect's Administration of the Contract

3.1.3, 4.2, 3.7.4, 15.2, 9.4.1, 9.5

Architect's Approvals

2.4.1, 3.1.3, 3.5, 3.10.2, 4.2.7

Architect's Authority to Reject Work

3.5, 4.2.6, 12.1.2, 12.2.1

Architect's Copyright

1.1.7, 1.5

Architect's Decisions

3.7.4, 4.2.6, 4.2.7, 4.2.11, 4.2.12, 4.2.13, 4.2.14, 6.3,
7.3.7, 7.3.9, 8.1.3, 8.3.1, 9.2, 9.4.1, 9.5, 9.8.4, 9.9.1,
13.5.2, 15.2, 15.3

Architect's Inspections

3.7.4, 4.2.2, 4.2.9, 9.4.2, 9.8.3, 9.9.2, 9.10.1, 13.5

Architect's Instructions

3.2.4, 3.3.1, 4.2.6, 4.2.7, 13.5.2

Architect's Interpretations

4.2.11, 4.2.12

Architect's Project Representative

4.2.10

Architect's Relationship with Contractor

1.1.2, 1.5, 3.1.3, 3.2.2, 3.2.3, 3.2.4, 3.3.1, 3.4.2, 3.5,
3.7.4, 3.7.5, 3.9.2, 3.9.3, 3.10, 3.11, 3.12, 3.16, 3.18,
4.1.2, 4.1.3, 4.2, 5.2, 6.2.2, 7, 8.3.1, 9.2, 9.3, 9.4, 9.5,
9.7, 9.8, 9.9, 10.2.6, 10.3, 11.3.7, 12, 13.4.2, 13.5,
15.2

Architect's Relationship with Subcontractors

1.1.2, 4.2.3, 4.2.4, 4.2.6, 9.6.3, 9.6.4, 11.3.7

Architect's Representations

9.4.2, 9.5.1, 9.10.1

Architect's Site Visits

3.7.4, 4.2.2, 4.2.9, 9.4.2, 9.5.1, 9.9.2, 9.10.1, 13.5

Asbestos

10.3.1

Attorneys' Fees

3.18.1, 9.10.2, 10.3.3

Award of Separate Contracts

6.1.1, 6.1.2

Award of Subcontracts and Other Contracts for Portions of the Work

5.2

Basic Definitions

1.1

Bidding Requirements

1.1.1, 5.2.1, 11.4.1

Binding Dispute Resolution

9.7, 11.3.9, 11.3.10, 13.1.1, 15.2.5, 15.2.6.1, 15.3.1,
15.3.2, 15.4.1

Boiler and Machinery Insurance

11.3.2

Bonds, Lien

7.3.7.4, 9.10.2, 9.10.3

Bonds, Performance, and Payment

7.3.7.4, 9.6.7, 9.10.3, 11.3.9, 11.4

Init.

Building Permit

3.7.1

Capitalization

1.3

Certificate of Substantial Completion

9.8.3, 9.8.4, 9.8.5

Certificates for Payment

4.2.1, 4.2.5, 4.2.9, 9.3.3, 9.4, 9.5, 9.6.1, 9.6.6, 9.7, 9.10.1, 9.10.3, 14.1.1.3, 14.2.4, 15.1.3

Certificates of Inspection, Testing or Approval

13.5.4

Certificates of Insurance

9.10.2, 11.1.3

Change Orders

1.1.1, 2.4.1, 3.4.2, 3.7.4, 3.8.2.3, 3.11.1, 3.12.8, 4.2.8, 5.2.3, 7.1.2, 7.1.3, 7.2, 7.3.2, 7.3.6, 7.3.9, 7.3.10, 8.3.1, 9.3.1.1, 9.10.3, 10.3.2, 11.3.1.2, 11.3.4, 11.3.9, 12.1.2, 15.1.3

Change Orders, Definition of

7.2.1

CHANGES IN THE WORK

2.2.1, 3.11, 4.2.8, 7, 7.2.1, 7.3.1, 7.4, 8.3.1, 9.3.1.1, 11.3.9

Claims, Definition of

15.1.1

CLAIMS AND DISPUTES

3.2.4, 6.1.1, 6.3, 7.3.9, 9.3.3, 9.10.4, 10.3.3, 15, 15.4

Claims and Timely Assertion of Claims

15.4.1

Claims for Additional Cost

3.2.4, 3.7.4, 6.1.1, 7.3.9, 10.3.2, 15.1.4

Claims for Additional Time

3.2.4, 3.7.4.6.1.1, 8.3.2, 10.3.2, 15.1.5

Concealed or Unknown Conditions, Claims for

3.7.4

Claims for Damages

3.2.4, 3.18, 6.1.1, 8.3.3, 9.5.1, 9.6.7, 10.3.3, 11.1.1, 11.3.5, 11.3.7, 14.1.3, 14.2.4, 15.1.6

Claims Subject to Arbitration

15.3.1, 15.4.1

Cleaning Up

3.15, 6.3

Commencement of the Work, Conditions Relating to

2.2.1, 3.2.2, 3.4.1, 3.7.1, 3.10.1, 3.12.6, 5.2.1, 5.2.3, 6.2.2, 8.1.2, 8.2.2, 8.3.1, 11.1, 11.3.1, 11.3.6, 11.4.1, 15.1.4

Commencement of the Work, Definition of

8.1.2

Communications Facilitating Contract

Administration

3.9.1, 4.2.4

Completion, Conditions Relating to

3.4.1, 3.11, 3.15, 4.2.2, 4.2.9, 8.2, 9.4.2, 9.8, 9.9.1, 9.10, 12.2, 13.7, 14.1.2

COMPLETION, PAYMENTS AND

9

Completion, Substantial

4.2.9, 8.1.1, 8.1.3, 8.2.3, 9.4.2, 9.8, 9.9.1, 9.10.3, 12.2, 13.7

Compliance with Laws

1.6.1, 3.2.3, 3.6, 3.7, 3.12.10, 3.13, 4.1.1, 9.6.4, 10.2.2, 11.1, 11.3, 13.1, 13.4, 13.5.1, 13.5.2, 13.6, 14.1.1, 14.2.1.3, 15.2.8, 15.4.2, 15.4.3

Concealed or Unknown Conditions

3.7.4, 4.2.8, 8.3.1, 10.3

Conditions of the Contract

1.1.1, 6.1.1, 6.1.4

Consent, Written

3.4.2, 3.7.4, 3.12.8, 3.14.2, 4.1.2, 9.3.2, 9.8.5, 9.9.1, 9.10.2, 9.10.3, 11.3.1, 13.2, 13.4.2, 15.4.4.2

Consolidation or Joinder

15.4.4

CONSTRUCTION BY OWNER OR BY SEPARATE CONTRACTORS

1.1.4, 6

Construction Change Directive, Definition of

7.3.1

Construction Change Directives

1.1.1, 3.4.2, 3.12.8, 4.2.8, 7.1.1, 7.1.2, 7.1.3, 7.3, 9.3.1.1

Construction Schedules, Contractor's

3.10, 3.12.1, 3.12.2, 6.1.3, 15.1.5.2

Contingent Assignment of Subcontracts

5.4, 14.2.2.2

Continuing Contract Performance

15.1.3

Contract, Definition of

1.1.2

CONTRACT, TERMINATION OR SUSPENSION OF THE

5.4.1.1, 11.3.9, 14

Contract Administration

3.1.3, 4, 9.4, 9.5

Contract Award and Execution, Conditions Relating to

3.7.1, 3.10, 5.2, 6.1, 11.1.3, 11.3.6, 11.4.1

Contract Documents, Copies Furnished and Use of

1.5.2, 2.2.5, 5.3

Contract Documents, Definition of

1.1.1

Contract Sum

3.7.4, 3.8, 5.2.3, 7.2, 7.3, 7.4, 9.1, 9.4.2, 9.5.1.4, 9.6.7, 9.7, 10.3.2, 11.3.1, 14.2.4, 14.3.2, 15.1.4, 15.2.5

Contract Sum, Definition of

9.1

Contract Time

3.7.4, 3.7.5, 3.10.2, 5.2.3, 7.2.1.3, 7.3.1, 7.3.5, 7.4, 8.1.1, 8.2.1, 8.3.1, 9.5.1, 9.7, 10.3.2, 12.1.1, 14.3.2, 15.1.5.1, 15.2.5

Contract Time, Definition of

8.1.1

CONTRACTOR

3

Contractor, Definition of	2.4.1, 3.2.4, 3.7.3, 3.8.2, 3.15.2, 5.4.2, 6.1.1, 6.2.3, 7.3.3.3, 7.3.7, 7.3.8, 7.3.9, 9.10.2, 10.3.2, 10.3.6, 11.3, 12.1.2, 12.2.1, 12.2.4, 13.5, 14
3.1, 6.1.2	
Contractor's Construction Schedules	Cutting and Patching
3.10, 3.12.1, 3.12.2, 6.1.3, 15.1.5.2	3.14, 6.2.5
Contractor's Employees	Damage to Construction of Owner or Separate Contractors
3.3.2, 3.4.3, 3.8.1, 3.9, 3.18.2, 4.2.3, 4.2.6, 10.2, 10.3, 11.1.1, 11.3.7, 14.1, 14.2.1.1	3.14.2, 6.2.4, 10.2.1.2, 10.2.5, 10.4, 11.1.1, 11.3, 12.2.4
Contractor's Liability Insurance	Damage to the Work
11.1	3.14.2, 9.9.1, 10.2.1.2, 10.2.5, 10.4.1, 11.3.1, 12.2.4
Contractor's Relationship with Separate Contractors and Owner's Forces	Damages, Claims for
3.12.5, 3.14.2, 4.2.4, 6, 11.3.7, 12.1.2, 12.2.4	3.2.4, 3.18, 6.1.1, 8.3.3, 9.5.1, 9.6.7, 10.3.3, 11.1.1, 11.3.5, 11.3.7, 14.1.3, 14.2.4, 15.1.6
Contractor's Relationship with Subcontractors	Damages for Delay
1.2.2, 3.3.2, 3.18.1, 3.18.2, 5, 9.6.2, 9.6.7, 9.10.2, 11.3.1.2, 11.3.7, 11.3.8	6.1.1, 8.3.3, 9.5.1.6, 9.7, 10.3.2
Contractor's Relationship with the Architect	Date of Commencement of the Work, Definition of
1.1.2, 1.5, 3.1.3, 3.2.2, 3.2.3, 3.2.4, 3.3.1, 3.4.2, 3.5, 3.7.4, 3.10, 3.11, 3.12, 3.16, 3.18, 4.1.3, 4.2, 5.2, 6.2.2, 7, 8.3.1, 9.2, 9.3, 9.4, 9.5, 9.7, 9.8, 9.9, 10.2.6, 10.3, 11.3.7, 12, 13.5, 15.1.2, 15.2.1	8.1.2
Contractor's Representations	Date of Substantial Completion, Definition of
3.2.1, 3.2.2, 3.5, 3.12.6, 6.2.2, 8.2.1, 9.3.3, 9.8.2	8.1.3
Contractor's Responsibility for Those Performing the Work	Day, Definition of
3.3.2, 3.18, 5.3.1, 6.1.3, 6.2, 9.5.1, 10.2.8	8.1.4
Contractor's Review of Contract Documents	Decisions of the Architect
3.2	3.7.4, 4.2.6, 4.2.7, 4.2.11, 4.2.12, 4.2.13, 15.2, 6.3, 7.3.7, 7.3.9, 8.1.3, 8.3.1, 9.2, 9.4, 9.5.1, 9.8.4, 9.9.1, 13.5.2, 14.2.2, 14.2.4, 15.1, 15.2
Contractor's Right to Stop the Work	Decisions to Withhold Certification
9.7	9.4.1, 9.5, 9.7, 14.1.1.3
Contractor's Right to Terminate the Contract	Defective or Nonconforming Work, Acceptance, Rejection and Correction of
14.1, 15.1.6	2.3.1, 2.4.1, 3.5, 4.2.6, 6.2.5, 9.5.1, 9.5.2, 9.6.6, 9.8.2, 9.9.3, 9.10.4, 12.2.1
Contractor's Submittals	Definitions
3.10, 3.11, 3.12.4, 4.2.7, 5.2.1, 5.2.3, 9.2, 9.3, 9.8.2, 9.8.3, 9.9.1, 9.10.2, 9.10.3, 11.1.3, 11.4.2	1.1, 2.1.1, 3.1.1, 3.5, 3.12.1, 3.12.2, 3.12.3, 4.1.1, 15.1.1, 5.1, 6.1.2, 7.2.1, 7.3.1, 8.1, 9.1, 9.8.1
Contractor's Superintendent	Delays and Extensions of Time
3.9, 10.2.6	3.2, 3.7.4, 5.2.3, 7.2.1, 7.3.1, 7.4, 8.3, 9.5.1, 9.7, 10.3.2, 10.4.1, 14.3.2, 15.1.5, 15.2.5
Contractor's Supervision and Construction Procedures	Disputes
1.2.2, 3.3, 3.4, 3.12.10, 4.2.2, 4.2.7, 6.1.3, 6.2.4, 7.1.3, 7.3.5, 7.3.7, 8.2, 10, 12, 14, 15.1.3	6.3, 7.3.9, 15.1, 15.2
Contractual Liability Insurance	Documents and Samples at the Site
11.1.1.8, 11.2	3.11
Coordination and Correlation	Drawings, Definition of
1.2, 3.2.1, 3.3.1, 3.10, 3.12.6, 6.1.3, 6.2.1	1.1.5
Copies Furnished of Drawings and Specifications	Drawings and Specifications, Use and Ownership of
1.5, 2.2.5, 3.11	3.11
Copyrights	Effective Date of Insurance
1.5, 3.17	8.2.2, 11.1.2
Correction of Work	Emergencies
2.3, 2.4, 3.7.3, 9.4.2, 9.8.2, 9.8.3, 9.9.1, 12.1.2, 12.2	10.4, 14.1.1.2, 15.1.4
Correlation and Intent of the Contract Documents	Employees, Contractor's
1.2	3.3.2, 3.4.3, 3.8.1, 3.9, 3.18.2, 4.2.3, 4.2.6, 10.2, 10.3.3, 11.1.1, 11.3.7, 14.1, 14.2.1.1
Cost, Definition of	Equipment, Labor, Materials or
7.3.7	1.1.3, 1.1.6, 3.4, 3.5, 3.8.2, 3.8.3, 3.12, 3.13.1, 3.15.1, 4.2.6, 4.2.7, 5.2.1, 6.2.1, 7.3.7, 9.3.2, 9.3.3, 9.5.1.3, 9.10.2, 10.2.1, 10.2.4, 14.2.1.1, 14.2.1.2
Costs	

Execution and Progress of the Work

1.1.3, 1.2.1, 1.2.2, 2.2.3, 2.2.5, 3.1, 3.3.1, 3.4.1, 3.5, 3.7.1, 3.10.1, 3.12, 3.14, 4.2, 6.2.2, 7.1.3, 7.3.5, 8.2, 9.5.1, 9.9.1, 10.2, 10.3, 12.2, 14.2, 14.3.1, 15.1.3

Extensions of Time

3.2.4, 3.7.4, 5.2.3, 7.2.1, 7.3, 7.4, 9.5.1, 9.7, 10.3.2, 10.4.1, 14.3, 15.1.5, 15.2.5

Failure of Payment

9.5.1.3, 9.7, 9.10.2, 13.6, 14.1.1.3, 14.2.1.2

Faulty Work

(See Defective or Nonconforming Work)

Final Completion and Final Payment

4.2.1, 4.2.9, 9.8.2, 9.10, 11.1.2, 11.1.3, 11.3.1, 11.3.5, 12.3.1, 14.2.4, 14.4.3

Financial Arrangements, Owner's

2.2.1, 13.2.2, 14.1.1.4

Fire and Extended Coverage Insurance

11.3.1.1

GENERAL PROVISIONS

1

Governing Law

13.1

Guarantees (See Warranty)

Hazardous Materials

10.2.4, 10.3

Identification of Subcontractors and Suppliers

5.2.1

Indemnification

3.17, 3.18, 9.10.2, 10.3.3, 10.3.5, 10.3.6, 11.3.1.2, 11.3.7

Information and Services Required of the Owner

2.1.2, 2.2, 3.2.2, 3.12.4, 3.12.10, 6.1.3, 6.1.4, 6.2.5, 9.6.1, 9.6.4, 9.9.2, 9.10.3, 10.3.3, 11.2, 11.4, 13.5.1, 13.5.2, 14.1.1.4, 14.1.4, 15.1.3

Initial Decision

15.2

Initial Decision Maker, Definition of

1.1.8

Initial Decision Maker, Decisions

14.2.2, 14.2.4, 15.2.1, 15.2.2, 15.2.3, 15.2.4, 15.2.5

Initial Decision Maker, Extent of Authority

14.2.2, 14.2.4, 15.1.3, 15.2.1, 15.2.2, 15.2.3, 15.2.4, 15.2.5

Injury or Damage to Person or Property

10.2.8, 10.4.1

Inspections

3.1.3, 3.3.3, 3.7.1, 4.2.2, 4.2.6, 4.2.9, 9.4.2, 9.8.3, 9.9.2, 9.10.1, 12.2.1, 13.5

Instructions to Bidders

1.1.1

Instructions to the Contractor

3.2.4, 3.3.1, 3.8.1, 5.2.1, 7, 8.2.2, 12, 13.5.2

Instruments of Service, Definition of

1.1.7

Insurance

3.18.1, 6.1.1, 7.3.7, 9.3.2, 9.8.4, 9.9.1, 9.10.2, 11

Insurance, Boiler and Machinery

11.3.2

Insurance, Contractor's Liability

11.1

Insurance, Effective Date of

8.2.2, 11.1.2

Insurance, Loss of Use

11.3.3

Insurance, Owner's Liability

11.2

Insurance, Property

10.2.5, 11.3

Insurance, Stored Materials

9.3.2

INSURANCE AND BONDS

11

Insurance Companies, Consent to Partial Occupancy

9.9.1

Intent of the Contract Documents

1.2.1, 4.2.7, 4.2.12, 4.2.13, 7.4

Interest

13.6

Interpretation

1.2.3, 1.4, 4.1.1, 5.1, 6.1.2, 15.1.1

Interpretations, Written

4.2.11, 4.2.12, 15.1.4

Judgment on Final Award

15.4.2

Labor and Materials, Equipment

1.1.3, 1.1.6, 3.4, 3.5, 3.8.2, 3.8.3, 3.12, 3.13, 3.15.1, 4.2.6, 4.2.7, 5.2.1, 6.2.1, 7.3.7, 9.3.2, 9.3.3, 9.5.1.3, 9.10.2, 10.2.1, 10.2.4, 14.2.1.1, 14.2.1.2

Labor Disputes

8.3.1

Laws and Regulations

1.5, 3.2.3, 3.6, 3.7, 3.12.10, 3.13.1, 4.1.1, 9.6.4, 9.9.1, 10.2.2, 11.1.1, 11.3, 13.1.1, 13.4, 13.5.1, 13.5.2, 13.6.1, 14, 15.2.8, 15.4

Liens

2.1.2, 9.3.3, 9.10.2, 9.10.4, 15.2.8

Limitations, Statutes of

12.2.5, 13.7, 15.4.1.1

Limitations of Liability

2.3.1, 3.2.2, 3.5, 3.12.10, 3.17, 3.18.1, 4.2.6, 4.2.7, 4.2.12, 6.2.2, 9.4.2, 9.6.4, 9.6.7, 10.2.5, 10.3.3, 11.1.2, 11.2, 11.3.7, 12.2.5, 13.4.2

Limitations of Time

2.1.2, 2.2, 2.4, 3.2.2, 3.10, 3.11, 3.12.5, 3.15.1, 4.2.7, 5.2, 5.3.1, 5.4.1, 6.2.4, 7.3, 7.4, 8.2, 9.2, 9.3.1, 9.3.3, 9.4.1, 9.5, 9.6, 9.7, 9.8, 9.9, 9.10, 11.1.3, 11.3.1.5, 11.3.6, 11.3.10, 12.2, 13.5, 13.7, 14, 15

Loss of Use Insurance

11.3.3

Material Suppliers

1.5, 3.12.1, 4.2.4, 4.2.6, 5.2.1, 9.3, 9.4.2, 9.6, 9.10.5

Materials, Hazardous

10.2.4, 10.3

Materials, Labor, Equipment and

Init.

1.1.3, 1.1.6, 1.5.1, 3.4.1, 3.5, 3.8.2, 3.8.3, 3.12, 3.13.1, 3.15.1, 4.2.6, 4.2.7, 5.2.1, 6.2.1, 7.3.7, 9.3.2, 9.3.3, 9.5.1.3, 9.10.2, 10.2.1.2, 10.2.4, 14.2.1.1, 14.2.1.2

Means, Methods, Techniques, Sequences and Procedures of Construction

3.3.1, 3.12.10, 4.2.2, 4.2.7, 9.4.2

Mechanic's Lien

2.1.2, 15.2.8

Mediation

8.3.1, 10.3.5, 10.3.6, 15.2.1, 15.2.5, 15.2.6, 15.3, 15.4.1

Minor Changes in the Work

1.1.1, 3.12.8, 4.2.8, 7.1, 7.4

MISCELLANEOUS PROVISIONS

13

Modifications, Definition of

1.1.1

Modifications to the Contract

1.1.1, 1.1.2, 3.11, 4.1.2, 4.2.1, 5.2.3, 7, 8.3.1, 9.7, 10.3.2, 11.3.1

Mutual Responsibility

6.2

Nonconforming Work, Acceptance of

9.6.6, 9.9.3, 12.3

Nonconforming Work, Rejection and Correction of

2.3.1, 2.4.1, 3.5, 4.2.6, 6.2.4, 9.5.1, 9.8.2, 9.9.3, 9.10.4, 12.2.1

Notice

2.2.1, 2.3.1, 2.4.1, 3.2.4, 3.3.1, 3.7.2, 3.12.9, 5.2.1, 9.7, 9.10, 10.2.2, 11.1.3, 12.2.2.1, 13.3, 13.5.1, 13.5.2, 14.1, 14.2, 15.2.8, 15.4.1

Notice, Written

2.3.1, 2.4.1, 3.3.1, 3.9.2, 3.12.9, 3.12.10, 5.2.1, 9.7, 9.10, 10.2.2, 10.3, 11.1.3, 11.3.6, 12.2.2.1, 13.3, 14, 15.2.8, 15.4.1

Notice of Claims

3.7.4, 10.2.8, 15.1.2, 15.4

Notice of Testing and Inspections

13.5.1, 13.5.2

Observations, Contractor's

3.2, 3.7.4

Occupancy

2.2.2, 9.6.6, 9.8, 11.3.1.5

Orders, Written

1.1.1, 2.3, 3.9.2, 7, 8.2.2, 11.3.9, 12.1, 12.2.2.1, 13.5.2, 14.3.1

OWNER

2

Owner, Definition of

2.1.1

Owner, Information and Services Required of the

2.1.2, 2.2, 3.2.2, 3.12.10, 6.1.3, 6.1.4, 6.2.5, 9.3.2, 9.6.1, 9.6.4, 9.9.2, 9.10.3, 10.3.3, 11.2, 11.3, 13.5.1, 13.5.2, 14.1.1.4, 14.1.4, 15.1.3

Owner's Authority

1.5, 2.1.1, 2.3.1, 2.4.1, 3.4.2, 3.8.1, 3.12.10, 3.14.2, 4.1.2, 4.1.3, 4.2.4, 4.2.9, 5.2.1, 5.2.4, 5.4.1, 6.1, 6.3, 7.2.1, 7.3.1, 8.2.2, 8.3.1, 9.3.1, 9.3.2, 9.5.1, 9.6.4, 9.9.1, 9.10.2, 10.3.2, 11.1.3, 11.3.3, 11.3.10, 12.2.2, 12.3.1, 13.2.2, 14.3, 14.4, 15.2.7

Owner's Financial Capability

2.2.1, 13.2.2, 14.1.1.4

Owner's Liability Insurance

11.2

Owner's Relationship with Subcontractors

1.1.2, 5.2, 5.3, 5.4, 9.6.4, 9.10.2, 14.2.2

Owner's Right to Carry Out the Work

2.4, 14.2.2

Owner's Right to Clean Up

6.3

Owner's Right to Perform Construction and to Award Separate Contracts

6.1

Owner's Right to Stop the Work

2.3

Owner's Right to Suspend the Work

14.3

Owner's Right to Terminate the Contract

14.2

Ownership and Use of Drawings, Specifications and Other Instruments of Service

1.1.1, 1.1.6, 1.1.7, 1.5, 2.2.5, 3.2.2, 3.11.1, 3.17, 4.2.12, 5.3.1

Partial Occupancy or Use

9.6.6, 9.9, 11.3.1.5

Patching, Cutting and

3.14, 6.2.5

Patents

3.17

Payment, Applications for

4.2.5, 7.3.9, 9.2, 9.3, 9.4, 9.5, 9.6.3, 9.7, 9.8.5, 9.10.1, 14.2.3, 14.2.4, 14.4.3

Payment, Certificates for

4.2.5, 4.2.9, 9.3.3, 9.4, 9.5, 9.6.1, 9.6.6, 9.7, 9.10.1, 9.10.3, 13.7, 14.1.1.3, 14.2.4

Payment, Failure of

9.5.1.3, 9.7, 9.10.2, 13.6, 14.1.1.3, 14.2.1.2

Payment, Final

4.2.1, 4.2.9, 9.8.2, 9.10, 11.1.2, 11.1.3, 11.4.1, 12.3.1, 13.7, 14.2.4, 14.4.3

Payment Bond, Performance Bond and

7.3.7.4, 9.6.7, 9.10.3, 11.4

Payments, Progress

9.3, 9.6, 9.8.5, 9.10.3, 13.6, 14.2.3, 15.1.3

PAYMENTS AND COMPLETION

9

Payments to Subcontractors

5.4.2, 9.5.1.3, 9.6.2, 9.6.3, 9.6.4, 9.6.7, 14.2.1.2

PCB

10.3.1

Performance Bond and Payment Bond

7.3.7.4, 9.6.7, 9.10.3, 11.4

Permits, Fees, Notices and Compliance with Laws
2.2.2, 3.7, 3.13, 7.3.7.4, 10.2.2

PERSONS AND PROPERTY, PROTECTION OF
10

Polychlorinated Biphenyl
10.3.1

Product Data, Definition of
3.12.2

Product Data and Samples, Shop Drawings
3.11, 3.12, 4.2.7

Progress and Completion
4.2.2, 8.2, 9.8, 9.9.1, 14.1.4, 15.1.3

Progress Payments
9.3, 9.6, 9.8.5, 9.10.3, 13.6, 14.2.3, 15.1.3

Project, Definition of
1.1.4

Project Representatives
4.2.10

Property Insurance
10.2.5, 11.3

PROTECTION OF PERSONS AND PROPERTY
10

Regulations and Laws
1.5, 3.2.3, 3.6, 3.7, 3.12.10, 3.13, 4.1.1, 9.6.4, 9.9.1,
10.2.2, 11.1, 11.4, 13.1, 13.4, 13.5.1, 13.5.2, 13.6, 14,
15.2.8, 15.4

Rejection of Work
3.5, 4.2.6, 12.2.1

Releases and Waivers of Liens
9.10.2

Representations
3.2.1, 3.5, 3.12.6, 6.2.2, 8.2.1, 9.3.3, 9.4.2, 9.5.1,
9.8.2, 9.10.1

Representatives
2.1.1, 3.1.1, 3.9, 4.1.1, 4.2.1, 4.2.2, 4.2.10, 5.1.1,
5.1.2, 13.2.1

Responsibility for Those Performing the Work
3.3.2, 3.18, 4.2.3, 5.3.1, 6.1.3, 6.2, 6.3, 9.5.1, 10

Retainage
9.3.1, 9.6.2, 9.8.5, 9.9.1, 9.10.2, 9.10.3

Review of Contract Documents and Field Conditions
by Contractor
3.2, 3.12.7, 6.1.3

Review of Contractor's Submittals by Owner and
Architect
3.10.1, 3.10.2, 3.11, 3.12, 4.2, 5.2, 6.1.3, 9.2, 9.8.2

Review of Shop Drawings, Product Data and
Samples by Contractor
3.12

Rights and Remedies
1.1.2, 2.3, 2.4, 3.5, 3.7.4, 3.15.2, 4.2.6, 5.3, 5.4, 6.1,
6.3, 7.3.1, 8.3, 9.5.1, 9.7, 10.2.5, 10.3, 12.2.2, 12.2.4,
13.4, 14, 15.4

Royalties, Patents and Copyrights
3.17

Rules and Notices for Arbitration
15.4.1

Safety of Persons and Property
10.2, 10.4

Safety Precautions and Programs
3.3.1, 4.2.2, 4.2.7, 5.3.1, 10.1, 10.2, 10.4

Samples, Definition of
3.12.3

Samples, Shop Drawings, Product Data and
3.11, 3.12, 4.2.7

Samples at the Site, Documents and
3.11

Schedule of Values
9.2, 9.3.1

Schedules, Construction
3.10, 3.12.1, 3.12.2, 6.1.3, 15.1.5.2

Separate Contracts and Contractors
1.1.4, 3.12.5, 3.14.2, 4.2.4, 4.2.7, 6, 8.3.1, 12.1.2

Shop Drawings, Definition of
3.12.1

Shop Drawings, Product Data and Samples
3.11, 3.12, 4.2.7

Site, Use of
3.13, 6.1.1, 6.2.1

Site Inspections
3.2.2, 3.3.3, 3.7.1, 3.7.4, 4.2, 9.4.2, 9.10.1, 13.5

Site Visits, Architect's
3.7.4, 4.2.2, 4.2.9, 9.4.2, 9.5.1, 9.9.2, 9.10.1, 13.5

Special Inspections and Testing
4.2.6, 12.2.1, 13.5

Specifications, Definition of
1.1.6

Specifications
1.1.1, 1.1.6, 1.2.2, 1.5, 3.11, 3.12.10, 3.17, 4.2.14

Statute of Limitations
13.7, 15.4.1.1

Stopping the Work
2.3, 9.7, 10.3, 14.1

Stored Materials
6.2.1, 9.3.2, 10.2.1.2, 10.2.4

Subcontractor, Definition of
5.1.1

SUBCONTRACTORS
5

Subcontractors, Work by
1.2.2, 3.3.2, 3.12.1, 4.2.3, 5.2.3, 5.3, 5.4, 9.3.1.2,
9.6.7

Subcontractual Relations
5.3, 5.4, 9.3.1.2, 9.6, 9.10, 10.2.1, 14.1, 14.2.1

Submittals
3.10, 3.11, 3.12, 4.2.7, 5.2.1, 5.2.3, 7.3.7, 9.2, 9.3,
9.8, 9.9.1, 9.10.2, 9.10.3, 11.1.3

Submittal Schedule
3.10.2, 3.12.5, 4.2.7

Subrogation, Waivers of
6.1.1, 11.3.7

Substantial Completion
4.2.9, 8.1.1, 8.1.3, 8.2.3, 9.4.2, 9.8, 9.9.1, 9.10.3,
12.2, 13.7

Substantial Completion, Definition of
9.8.1
Substitution of Subcontractors
5.2.3, 5.2.4
Substitution of Architect
4.1.3
Substitutions of Materials
3.4.2, 3.5, 7.3.8
Sub-subcontractor, Definition of
5.1.2
Subsurface Conditions
3.7.4
Successors and Assigns
13.2
Superintendent
3.9, 10.2.6
Supervision and Construction Procedures
1.2.2, 3.3, 3.4, 3.12.10, 4.2.2, 4.2.7, 6.1.3, 6.2.4,
7.1.3, 7.3.7, 8.2, 8.3.1, 9.4.2, 10, 12, 14, 15.1.3
Surety
5.4.1.2, 9.8.5, 9.10.2, 9.10.3, 14.2.2, 15.2.7
Surety, Consent of
9.10.2, 9.10.3
Surveys
2.2.3
Suspension by the Owner for Convenience
14.3
Suspension of the Work
5.4.2, 14.3
Suspension or Termination of the Contract
5.4.1.1, 14
Taxes
3.6, 3.8.2.1, 7.3.7.4
Termination by the Contractor
14.1, 15.1.6
Termination by the Owner for Cause
5.4.1.1, 14.2, 15.1.6
Termination by the Owner for Convenience
14.4
Termination of the Architect
4.1.3
Termination of the Contractor
14.2.2
TERMINATION OR SUSPENSION OF THE
CONTRACT
14
Tests and Inspections
3.1.3, 3.3.3, 4.2.2, 4.2.6, 4.2.9, 9.4.2, 9.8.3, 9.9.2,
9.10.1, 10.3.2, 11.4.1.1, 12.2.1, 13.5
TIME
8
Time, Delays and Extensions of
3.2.4, 3.7.4, 5.2.3, 7.2.1, 7.3.1, 7.4, 8.3, 9.5.1, 9.7,
10.3.2, 10.4.1, 14.3.2, 15.1.5, 15.2.5
Time Limits

2.1.2, 2.2, 2.4, 3.2.2, 3.10, 3.11, 3.12.5, 3.15.1, 4.2,
5.2, 5.3, 5.4, 6.2.4, 7.3, 7.4, 8.2, 9.2, 9.3.1, 9.3.3,
9.4.1, 9.5, 9.6, 9.7, 9.8, 9.9, 9.10, 11.1.3, 12.2, 13.5,
13.7, 14, 15.1.2, 15.4
Time Limits on Claims
3.7.4, 10.2.8, 13.7, 15.1.2
Title to Work
9.3.2, 9.3.3
Transmission of Data in Digital Form
1.6
UNCOVERING AND CORRECTION OF WORK
12
Uncovering of Work
12.1
Unforeseen Conditions, Concealed or Unknown
3.7.4, 8.3.1, 10.3
Unit Prices
7.3.3.2, 7.3.4
Use of Documents
1.1.1, 1.5, 2.2.5, 3.12.6, 5.3
Use of Site
3.13, 6.1.1, 6.2.1
Values, Schedule of
9.2, 9.3.1
Waiver of Claims by the Architect
13.4.2
Waiver of Claims by the Contractor
9.10.5, 13.4.2, 15.1.6
Waiver of Claims by the Owner
9.9.3, 9.10.3, 9.10.4, 12.2.2.1, 13.4.2, 14.2.4, 15.1.6
Waiver of Consequential Damages
14.2.4, 15.1.6
Waiver of Liens
9.10.2, 9.10.4
Waivers of Subrogation
6.1.1, 11.3.7
Warranty
3.5, 4.2.9, 9.3.3, 9.8.4, 9.9.1, 9.10.4, 12.2.2, 13.7
Weather Delays
15.1.5.2
Work, Definition of
1.1.3
Written Consent
1.5.2, 3.4.2, 3.7.4, 3.12.8, 3.14.2, 4.1.2, 9.3.2, 9.8.5,
9.9.1, 9.10.2, 9.10.3, 11.4.1, 13.2, 13.4.2, 15.4.4.2
Written Interpretations
4.2.11, 4.2.12
Written Notice
2.3, 2.4, 3.3.1, 3.9, 3.12.9, 3.12.10, 5.2.1, 8.2.2, 9.7,
9.10, 10.2.2, 10.3, 11.1.3, 12.2.2, 12.2.4, 13.3, 14,
15.4.1
Written Orders
1.1.1, 2.3, 3.9, 7, 8.2.2, 12.1, 12.2, 13.5.2, 14.3.1,
15.1.2

ARTICLE 1 GENERAL PROVISIONS

§ 1.1 BASIC DEFINITIONS

§ 1.1.1 THE CONTRACT DOCUMENTS

The Contract Documents are enumerated in the Agreement between the Owner and Contractor (hereinafter the Agreement) and consist of the Agreement, Conditions of the Contract (General, Supplementary and other Conditions), Drawings, Specifications, Addenda issued prior to execution of the Contract, other documents listed in the Agreement and Modifications issued after execution of the Contract. A Modification is (1) a written amendment to the Contract signed by both parties, (2) a Change Order, (3) a Construction Change Directive or (4) a written order for a minor change in the Work issued by the Architect. .

The Contract Documents include the Advertisement for Bids, Instructions to Bidders, Notice to Bidders, Proposal Form, sample forms and all portions of addenda issued prior to execution of the Contract.

§ 1.1.2 THE CONTRACT

The Contract Documents form the Contract for Construction. The Contract represents the entire and integrated agreement between the parties hereto and supersedes prior negotiations, representations or agreements, either written or oral. The Contract may be amended or modified only by a Modification. The Contract Documents shall not be construed to create a contractual relationship of any kind (1) between the Contractor and the Architect or the Architect's consultants, (2) between the Owner and a Subcontractor or a Sub-subcontractor, (3) between the Owner and the Architect or the Architect's consultants or (4) between any persons or entities other than the Owner and the Contractor. The Architect shall, however, be entitled to performance and enforcement of obligations under the Contract intended to facilitate performance of the Architect's duties.

§ 1.1.3 THE WORK

The term "Work" means the construction and services required by the Contract Documents, whether completed or partially completed, and includes all other labor, materials, equipment and services provided or to be provided by the Contractor to fulfill the Contractor's obligations. The Work may constitute the whole or a part of the Project.

§ 1.1.4 THE PROJECT

The Project is the total construction of which the Work performed under the Contract Documents may be the whole or a part and which may include construction by the Owner and by separate contractors.

§ 1.1.5 THE DRAWINGS

The Drawings are the graphic and pictorial portions of the Contract Documents showing the design, location and dimensions of the Work, generally including plans, elevations, sections, details, schedules and diagrams.

§ 1.1.6 THE SPECIFICATIONS

The Specifications are that portion of the Contract Documents consisting of the written requirements for materials, equipment, systems, standards and workmanship for the Work, and performance of related services.

§ 1.1.7 INSTRUMENTS OF SERVICE

Instruments of Service are representations, in any medium of expression now known or later developed, of the tangible and intangible creative work performed by the Architect and the Architect's consultants under their respective professional services agreements. Instruments of Service may include, without limitation, studies, surveys, models, sketches, drawings, specifications, and other similar materials. The Project Manual is a volume assembled for the Work which may include the bidding requirements, sample forms, Conditions of the Contract and Specifications

§ 1.1.8 INITIAL DECISION MAKER

The Initial Decision Maker is the person identified in the Agreement to render initial decisions on Claims in accordance with Section 15.2 and certify termination of the Agreement under Section 14.2.2.

§ 1.2 CORRELATION AND INTENT OF THE CONTRACT DOCUMENTS

§ 1.2.1 The intent of the Contract Documents is to include all items necessary for the proper execution and completion of the Work by the Contractor. The Contract Documents are complementary, and what is required by one shall be as binding as if required by all; performance by the Contractor shall be required only to the extent consistent with the Contract Documents and reasonably inferable from them as being necessary to produce the

indicated r In the event of a conflict between or among the Contract Documents, Contractor shall perform Work and obligations of the higher quality, larger quantity, greater expense, tighter schedule and more stringent requirements, unless otherwise directed in writing by the Owner.

§ 1.2.2 Organization of the Specifications into divisions, sections and articles, and arrangement of Drawings shall not control the Contractor in dividing the Work among Subcontractors or in establishing the extent of Work to be performed by any trade.

§ 1.2.3 Unless otherwise stated in the Contract Documents, words that have well-known technical or construction industry meanings are used in the Contract Documents in accordance with such recognized meanings.

§ 1.3 CAPITALIZATION

Terms capitalized in these General Conditions include those that are (1) specifically defined, (2) the titles of numbered articles or (3) the titles of other documents published by the American Institute of Architects.

§ 1.4 INTERPRETATION

In the interest of brevity the Contract Documents frequently omit modifying words such as “all” and “any” and articles such as “the” and “an,” but the fact that a modifier or an article is absent from one statement and appears in another is not intended to affect the interpretation of either statement.

§ 1.5 OWNERSHIP AND USE OF DRAWINGS, SPECIFICATIONS AND OTHER INSTRUMENTS OF SERVICE

§ 1.5.1 The Architect and the Architect’s consultants shall be deemed the authors and owners of their respective Instruments of Service, including the Drawings and Specifications, and will retain all common law, statutory and other reserved rights, including copyrights. The Contractor, Subcontractors, Sub-subcontractors, and material or equipment suppliers shall not own or claim a copyright in the Instruments of Service. Submittal or distribution to meet official regulatory requirements or for other purposes in connection with this Project is not to be construed as publication in derogation of the Architect’s or Architect’s consultants’ reserved rights. This Paragraph in no way supersedes the Owner’s document rights set forth in the “Engineering Services Contract” Agreement Between the Owner and the Professional.

§ 1.5.2 The Contractor, Subcontractors, Sub-subcontractors and material or equipment suppliers are authorized to use and reproduce the Instruments of Service provided to them solely and exclusively for execution of the Work. All copies made under this authorization shall bear the copyright notice, if any, shown on the Instruments of Service. The Contractor, Subcontractors, Sub-subcontractors, and material or equipment suppliers may not use the Instruments of Service on other projects or for additions to this Project outside the scope of the Work without the specific written consent of the Owner, Architect and the Architect’s consultants.

§ 1.6 TRANSMISSION OF DATA IN DIGITAL FORM

If the parties intend to transmit Instruments of Service or any other information or documentation in digital form, they shall endeavor to establish necessary protocols governing such transmissions, unless otherwise already provided in the Agreement or the Contract Documents.

§ 1.7 EXECUTION OF THE WORK

Sections of Division 01 General Requirements govern the execution of the Work of all Sections in Divisions 02-49 of the Specifications.

ARTICLE 2 OWNER

§ 2.1 GENERAL

§ 2.1.1 The Owner, as used in these Documents, refers to the Mississippi Transportation Commission, a body Corporate of the State of Mississippi, acting by and through the duly authorized Executive Director of the Mississippi Department of Transportation for the benefit of the Department for which the Work under this Contract is being performed. The Owner is the entity identified as such in the Agreement and is referred to throughout the Contract Documents as if singular in number. The Owner’s representative, who shall have express authority to bind the Owner with respect to all matters requiring the Owner’s approval or authorization, is the individual who signed the Construction Contract for the Owner. The term “Owner” means the Owner or the Owner’s authorized representative.

§ 2.1.2 The Owner shall furnish to the Contractor within fifteen days after receipt of a written request, information necessary and relevant for the Contractor to evaluate, give notice of or enforce mechanic's lien rights. Such information shall include a correct statement of the record legal title to the property on which the Project is located, usually referred to as the site, and the Owner's interest therein.

§ 2.2 INFORMATION AND SERVICES REQUIRED OF THE OWNER

§ 2.2.1 Prior to commencement of the Work, the Contractor may request in writing that the Owner provide reasonable evidence that the Owner has made financial arrangements to fulfill the Owner's obligations under the Contract. Thereafter, the Contractor may only request such evidence if (1) the Owner fails to make payments to the Contractor as the Contract Documents require; (2) a change in the Work materially changes the Contract Sum; or (3) the Contractor identifies in writing a reasonable concern regarding the Owner's ability to make payment when due. The Owner shall furnish such evidence as a condition precedent to commencement or continuation of the Work or the portion of the Work affected by a material change. After the Owner furnishes the evidence, the Owner shall not materially vary such financial arrangements without prior notice to the Contractor.

§ 2.2.2 Except for permits and fees that are the responsibility of the Contractor under the Contract Documents, including those required under Section 3.7.1, the Owner shall secure and pay for necessary approvals, easements, assessments and charges required for construction, use or occupancy of permanent structures or for permanent changes in existing facilities.

§ 2.2.3 The Owner shall furnish surveys describing physical characteristics, legal limitations and utility locations for the site of the Project, and a legal description of the site. The Contractor shall be entitled to rely on the accuracy of information furnished by the Owner but shall exercise proper precautions relating to the safe performance of the Work.

§ 2.2.4 The Owner shall furnish information or services required of the Owner by the Contract Documents with reasonable promptness. The Owner shall also furnish any other information or services under the Owner's control and relevant to the Contractor's performance of the Work with reasonable promptness after receiving the Contractor's written request for such information or services.

§ 2.2.5 After the Contract is executed by the Executive Director, the Contractor will receive free of charge two bound copies of the Project Manual (Proposal and Contract Documents) (one executed and one blank), and five full-scale copies of the Drawings and two half-scale copies. The Contractor shall have available on the Project Site at all times one copy each of the Contract Drawings and the Project Manual (Proposal).

§ 2.3 OWNER'S RIGHT TO STOP THE WORK

If the Contractor fails to correct Work that is not in accordance with the requirements of the Contract Documents as required by Section 12.2 or repeatedly fails to carry out Work in accordance with the Contract Documents, the Owner may issue a written order to the Contractor to stop the Work, or any portion thereof, until the cause for such order has been eliminated; however, the right of the Owner to stop the Work shall not give rise to a duty on the part of the Owner to exercise this right for the benefit of the Contractor or any other person or entity, except to the extent required by Section 6.1.3.

§ 2.4 OWNER'S RIGHT TO CARRY OUT THE WORK

If the Contractor defaults or neglects to carry out the Work in accordance with the Contract Documents and fails within a ten-day period after receipt of written notice from the Owner to commence and continue correction of such default or neglect with diligence and promptness, the Owner may, without prejudice to other remedies the Owner may have, correct such deficiencies. In such case an appropriate Change Order shall be issued deducting from payments then or thereafter due the Contractor the reasonable cost of correcting such deficiencies, including Owner's expenses and compensation for the Architect's additional services made necessary by such default, neglect or failure. Such action by the Owner and amounts charged to the Contractor are both subject to prior approval of the Architect. If payments then or thereafter due the Contractor are not sufficient to cover such amounts, the Contractor shall pay the difference to the Owner.

ARTICLE 3 CONTRACTOR

§ 3.1 GENERAL

§ 3.1.1 The Contractor is the person or entity identified as such in the Agreement and is referred to throughout the Contract Documents as if singular in number. The Contractor shall be lawfully licensed, if required in the jurisdiction where the Project is located. The Contractor shall designate in writing a representative who shall have express authority to bind the Contractor with respect to all matters under this Contract. The term “Contractor” means the Contractor or the Contractor’s authorized representative.

§ 3.1.2 The Contractor shall perform the Work in accordance with the Contract Documents.

§ 3.1.3 The Contractor shall not be relieved of obligations to perform the Work in accordance with the Contract Documents either by activities or duties of the Architect in the Architect’s administration of the Contract, or by tests, inspections or approvals required or performed by persons or entities other than the Contractor.

§ 3.2 REVIEW OF CONTRACT DOCUMENTS AND FIELD CONDITIONS BY CONTRACTOR

§ 3.2.1 Execution of the Contract by the Contractor is a representation that the Contractor has visited the site, become generally familiar with local conditions under which the Work is to be performed and correlated personal observations with requirements of the Contract Documents.

§ 3.2.2 Because the Contract Documents are complementary and any Work or material called for by either shall be provided as if called for by both, the Contractor shall, before starting each portion of the Work, carefully study and compare the various Contract Documents relative to that portion of the Work, as well as the information furnished by the Owner pursuant to Section 2.2.3, shall take field measurements of any existing conditions related to that portion of the Work, and shall observe any conditions at the site affecting it. These obligations are for the purpose of facilitating coordination and construction by the Contractor and are not for the purpose of discovering errors, omissions, or inconsistencies in the Contract Documents; however, the Contractor shall promptly report to the Architect any errors, inconsistencies or omissions discovered by or made known to the Contractor as a request for information in such form as the Architect may require. It is recognized that the Contractor’s review is made in the Contractor’s capacity as a contractor and not as a licensed design professional, unless otherwise specifically provided in the Contract Documents.

§ 3.2.3 The Contractor is not required to ascertain that the Contract Documents are in accordance with applicable laws, statutes, ordinances, codes, rules and regulations, or lawful orders of public authorities, but the Contractor shall promptly report to the Architect any nonconformity discovered by or made known to the Contractor as a request for information in such form as the Architect may require.

§ 3.2.4 If the Contractor believes that additional cost or time is involved because of clarifications or instructions the Architect issues in response to the Contractor’s notices or requests for information pursuant to Sections 3.2.2 or 3.2.3, the Contractor shall make Claims as provided in Article 15. If the Contractor fails to perform the obligations of Sections 3.2.2 or 3.2.3, the Contractor shall pay such costs and damages to the Owner as would have been avoided if the Contractor had performed such obligations. If the Contractor performs those obligations, the Contractor shall not be liable to the Owner or Architect for damages resulting from errors, inconsistencies or omissions in the Contract Documents, for differences between field measurements or conditions and the Contract Documents, or for nonconformities of the Contract Documents to applicable laws, statutes, ordinances, codes, rules and regulations, and lawful orders of public authorities.

§ 3.3 SUPERVISION AND CONSTRUCTION PROCEDURES

§ 3.3.1 The Contractor shall supervise and direct the Work, using the Contractor’s best skill and attention. The Contractor shall be solely responsible for, and have control over, construction means, methods, techniques, sequences and procedures and for coordinating all portions of the Work under the Contract, unless the Contract Documents give other specific instructions concerning these matters. If the Contract Documents give specific instructions concerning construction means, methods, techniques, sequences or procedures, the Contractor shall evaluate the jobsite safety thereof and, except as stated below, shall be fully and solely responsible for the jobsite safety of such means, methods, techniques, sequences or procedures. If the Contractor determines that such means, methods, techniques, sequences or procedures may not be safe, the Contractor shall give timely written notice to the Owner and Architect and shall not proceed with that portion of the Work without further written instructions from the Architect. If the Contractor is then instructed to proceed with the required means, methods, techniques,

sequences or procedures without acceptance of changes proposed by the Contractor, the Owner and Professional shall be responsible for any resulting loss or damage.

§ 3.3.2 The Contractor shall be responsible to the Owner for acts and omissions of the Contractor's employees, Subcontractors and their agents and employees, and other persons or entities performing portions of the Work for, or on behalf of, the Contractor or any of its Subcontractors.

§ 3.3.3 The Contractor shall be responsible for inspection of portions of Work already performed to determine that such portions are in proper condition to receive subsequent Work.

§ 3.4 LABOR AND MATERIALS

§ 3.4.1 Unless otherwise provided in the Contract Documents, the Contractor shall provide and pay for labor, materials, equipment, tools, construction equipment and machinery, water, heat, utilities, transportation, and other facilities and services necessary for proper execution and completion of the Work, whether temporary or permanent and whether or not incorporated or to be incorporated in the Work. The Owner will furnish utilities for construction (electricity and water). Contractor must use "as-is" or pay for any necessary modifications.

§ 3.4.2 Except in the case of minor changes in the Work authorized by the Architect in accordance with Sections 3.12.8 or 7.4, the Contractor may make substitutions only with the consent of the Owner, after evaluation by the Architect and in accordance with a Change Order or Construction Change Directive.

§ 3.4.3 The Contractor shall enforce strict discipline and good order among the Contractor's employees and other persons carrying out the Work. The Contractor shall not permit employment of unfit persons or persons not properly skilled in tasks assigned to them.

§ 3.4.4 All Work as described or required shall be executed in a neat, skillful manner, in accordance with the best-recognized trade practice. Only competent workmen (including the superintendent), who work and perform their duties satisfactorily shall be employed on the Project. When requested by the Project Engineer, the Contractor shall discharge and shall not re-employ on the Project, any person who commits trespass or who is, in the opinion of the Project Engineer, dangerous, disorderly, insubordinate, incompetent, or otherwise objectionable.

§ 3.4.5 All materials and each part or detail of the Work are subject to inspection by the Project Engineer. Work performed or materials used by the Contractor without supervision, inspection, or written approval by an authorized Department representative may be ordered removed and replaced, at Contractor's expense, if found to be defective or noncompliant with the Contract Documents. No Work shall be performed on Legal Holidays, Sundays or after 5:00 P.M. on week days without prior written approval from the Project Engineer.

§ 3.5 WARRANTY

The Contractor warrants to the Owner and Architect that materials and equipment furnished under the Contract will be of good quality and new unless the Contract Documents require or permit otherwise. The Contractor further warrants that the Work will conform to the requirements of the Contract Documents and will be free from defects, except for those inherent in the quality of the Work the Contract Documents require or permit. Work, materials, or equipment not conforming to these requirements may be considered defective. The Contractor's warranty excludes remedy for damage or defect caused by abuse, alterations to the Work not executed by the Contractor, improper or insufficient maintenance, improper operation, or normal wear and tear and normal usage. If required by the Architect, the Contractor shall furnish satisfactory evidence as to the kind and quality of materials and equipment.

§ 3.6 TAXES

The Contractor shall pay sales, consumer, use and similar taxes for the Work provided by the Contractor that are legally enacted when bids are received or negotiations concluded, whether or not yet effective or merely scheduled to go into effect.

§ 3.7 PERMITS, FEES, NOTICES AND COMPLIANCE WITH LAWS

§ 3.7.1 Unless otherwise provided in the Contract Documents, the Contractor shall secure and pay for the building permit as well as for other permits, fees, licenses, and inspections by government agencies necessary for proper

execution and completion of the Work that are customarily secured after execution of the Contract and legally required at the time bids are received or negotiations concluded.

§ 3.7.2 The Contractor shall comply with and give notices required by applicable laws, statutes, ordinances, codes, rules and regulations, and lawful orders of public authorities applicable to performance of the Work.

§ 3.7.3 If the Contractor performs Work knowing it to be contrary to applicable laws, statutes, ordinances, codes, rules and regulations, or lawful orders of public authorities, the Contractor shall assume appropriate responsibility for such Work and shall bear the costs attributable to correction.

§ 3.7.4 Concealed or Unknown Conditions. If the Contractor encounters conditions at the site that are (1) subsurface or otherwise concealed physical conditions that differ materially from those indicated in the Contract Documents or (2) unknown physical conditions of an unusual nature, that differ materially from those ordinarily found to exist and generally recognized as inherent in construction activities of the character provided for in the Contract Documents, the Contractor shall promptly provide notice to the Owner and the Architect before conditions are disturbed and in no event later than 21 days after first observance of the conditions. The Architect will promptly investigate such conditions and, if the Architect determines that they differ materially and cause an increase or decrease in the Contractor's cost of, or time required for, performance of any part of the Work, will recommend an equitable adjustment in the Contract Sum or Contract Time, or both. If the Architect determines that the conditions at the site are not materially different from those indicated in the Contract Documents and that no change in the terms of the Contract is justified, the Architect shall promptly notify the Owner and Contractor in writing, stating the reasons. If either party disputes the Architect's determination or recommendation, that party may proceed as provided in Article 15.

§ 3.7.5 If, in the course of the Work, the Contractor encounters human remains or recognizes the existence of burial markers, archaeological sites or wetlands not indicated in the Contract Documents, the Contractor shall immediately suspend any operations that would affect them and shall notify the Owner and Architect. Upon receipt of such notice, the Owner shall promptly take any action necessary to obtain governmental authorization required to resume the operations. The Contractor shall continue to suspend such operations until otherwise instructed by the Owner but shall continue with all other operations that do not affect those remains or features. Requests for adjustments in the Contract Sum and Contract Time arising from the existence of such remains or features may be made as provided in Article 15.

§ 3.8 ALLOWANCES

§ 3.8.1 The Contractor shall include in the Contract Sum all allowances stated in the Contract Documents. Items covered by allowances shall be supplied for such amounts and by such persons or entities as the Owner may direct, but the Contractor shall not be required to employ persons or entities to whom the Contractor has reasonable objection.

§ 3.8.2 Unless otherwise provided in the Contract Documents,

- .1 Allowances shall cover the cost to the Contractor of materials and equipment delivered at the site and all required taxes, less applicable trade discounts;
- .2 Contractor's costs for unloading and handling at the site, labor, installation costs, overhead, profit and other expenses contemplated for stated allowance amounts shall be included in the Contract Sum but not in the allowances; and
- .3 Whenever costs are more than or less than allowances, the Contract Sum shall be adjusted accordingly by Supplemental Agreement (Change Order). The amount of the Supplemental Agreement (Change Order) shall reflect (1) the difference between actual costs and the allowances under Section 3.8.2.1 and (2) changes in Contractor's costs under Section 3.8.2.2.

§ 3.8.3 Materials and equipment under an allowance shall be selected by the Owner with reasonable promptness.

§ 3.9 SUPERINTENDENT

§ 3.9.1 The Contractor shall employ a competent superintendent and necessary assistants who shall be in attendance at the Project site during performance of the Work. The superintendent shall represent the Contractor, and communications given to the superintendent shall be as binding as if given to the Contractor.

§ 3.9.2 The Contractor, as soon as practicable after award of the Contract, shall furnish in writing to the Owner through the Architect the name and qualifications of a proposed superintendent. The Architect may reply within 14 days to the Contractor in writing stating (1) whether the Owner or the Architect has reasonable objection to the proposed superintendent or (2) that the Architect requires additional time to review. Failure of the Architect to reply within the 14 day period shall constitute notice of no reasonable objection.

§ 3.9.3 The Contractor shall not employ a proposed superintendent to whom the Owner or Architect has made reasonable and timely objection. The Contractor shall not change the superintendent without the Owner's consent, which shall not unreasonably be withheld or delayed.

§ 3.10 CONTRACTOR'S CONSTRUCTION SCHEDULES

§ 3.10.1 The Contractor, promptly after being awarded the Contract, shall prepare and submit for the Owner's and Architect's information a Contractor's construction schedule for the Work. The schedule shall not exceed time limits current under the Contract Documents, shall be revised at appropriate intervals as required by the conditions of the Work and Project, shall be related to the entire Project to the extent required by the Contract Documents, and shall provide for expeditious and practicable execution of the Work.

§ 3.10.2 The Contractor shall prepare a submittal schedule, promptly after being awarded the Contract and thereafter as necessary to maintain a current submittal schedule, and shall submit the schedule(s) for the Architect's approval. The Architect's approval shall not unreasonably be delayed or withheld. The submittal schedule shall (1) be coordinated with the Contractor's construction schedule, and (2) allow the Architect reasonable time to review submittals. If the Contractor fails to submit a submittal schedule, the Contractor shall not be entitled to any increase in Contract Sum or extension of Contract Time based on the time required for review of submittals.

§ 3.10.3 The Contractor shall perform the Work in general accordance with the most recent schedules submitted to the Owner and Architect.

§ 3.11 DOCUMENTS AND SAMPLES AT THE SITE

The Contractor shall maintain at the site for the Owner one copy of the Drawings, Specifications, Addenda, Change Orders and other Modifications, in good order and marked currently to indicate field changes and selections made during construction, and one copy of approved Shop Drawings, Product Data, Samples and similar required submittals. These shall be available to the Architect and shall be delivered to the Architect for submittal to the Owner upon completion of the Work as a record of the Work as constructed.

§ 3.12 SHOP DRAWINGS, PRODUCT DATA AND SAMPLES

§ 3.12.1 Shop Drawings are drawings, diagrams, schedules and other data specially prepared for the Work by the Contractor or a Subcontractor, Sub-subcontractor, manufacturer, supplier or distributor to illustrate some portion of the Work.

§ 3.12.2 Product Data are illustrations, standard schedules, performance charts, instructions, brochures, diagrams and other information furnished by the Contractor to illustrate materials or equipment for some portion of the Work.

§ 3.12.3 Samples are physical examples that illustrate materials, equipment or workmanship and establish standards by which the Work will be judged.

§ 3.12.4 Shop Drawings, Product Data, Samples and similar submittals are not Contract Documents. Their purpose is to demonstrate the way by which the Contractor proposes to conform to the information given and the design concept expressed in the Contract Documents for those portions of the Work for which the Contract Documents require submittals. Review by the Architect is subject to the limitations of Section 4.2.7. Informational submittals upon which the Architect is not expected to take responsive action may be so identified in the Contract Documents. Submittals that are not required by the Contract Documents may be returned by the Architect without action.

§ 3.12.5 The Contractor shall review for compliance with the Contract Documents, approve and submit to the Architect Shop Drawings, Product Data, Samples and similar submittals required by the Contract Documents in accordance with the submittal schedule approved by the Architect or, in the absence of an approved submittal schedule, with reasonable promptness and in such sequence as to cause no delay in the Work or in the activities of the Owner or of separate contractors.

§ 3.12.6 By submitting Shop Drawings, Product Data, Samples and similar submittals, the Contractor represents to the Owner and Architect that the Contractor has (1) reviewed and approved them, (2) determined and verified materials, field measurements and field construction criteria related thereto, or will do so and (3) checked and coordinated the information contained within such submittals with the requirements of the Work and of the Contract Documents.

§ 3.12.7 The Contractor shall perform no portion of the Work for which the Contract Documents require submittal and review of Shop Drawings, Product Data, Samples or similar submittals until the respective submittal has been approved by the Architect.

§ 3.12.8 The Work shall be in accordance with approved submittals except that the Contractor shall not be relieved of responsibility for deviations from requirements of the Contract Documents by the Architect's approval of Shop Drawings, Product Data, Samples or similar submittals unless the Contractor has specifically informed the Architect in writing of such deviation at the time of submittal and (1) the Architect has given written approval to the specific deviation as a minor change in the Work, or (2) a Change Order or Construction Change Directive has been issued authorizing the deviation. The Contractor shall not be relieved of responsibility for errors or omissions in Shop Drawings, Product Data, Samples or similar submittals by the Architect's approval thereof.

§ 3.12.9 The Contractor shall direct specific attention, in writing or on resubmitted Shop Drawings, Product Data, Samples or similar submittals, to revisions other than those requested by the Architect on previous submittals. In the absence of such written notice, the Architect's approval of a resubmission shall not apply to such revisions.

§ 3.12.10 The Contractor shall not be required to provide professional services that constitute the practice of architecture or engineering unless such services are specifically required by the Contract Documents for a portion of the Work or unless the Contractor needs to provide such services in order to carry out the Contractor's responsibilities for construction means, methods, techniques, sequences and procedures. The Contractor shall not be required to provide professional services in violation of applicable law. If professional design services or certifications by a design professional related to systems, materials or equipment are specifically required of the Contractor by the Contract Documents, the Owner and the Architect will specify all performance and design criteria that such services must satisfy. The Contractor shall cause such services or certifications to be provided by a properly licensed design professional, whose signature and seal shall appear on all drawings, calculations, specifications, certifications, Shop Drawings and other submittals prepared by such professional. Shop Drawings and other submittals related to the Work designed or certified by such professional, if prepared by others, shall bear such professional's written approval when submitted to the Architect. The Owner and the Architect shall be entitled to rely upon the adequacy, accuracy and completeness of the services, certifications and approvals performed or provided by such design professionals, provided the Owner and Architect have specified to the Contractor all performance and design criteria that such services must satisfy. Pursuant to this Section 3.12.10, the Architect will review, approve or take other appropriate action on submittals only for the limited purpose of checking for conformance with information given and the design concept expressed in the Contract Documents. The Contractor shall not be responsible for the adequacy of the performance and design criteria specified in the Contract Documents.

§ 3.13 USE OF SITE

The Contractor shall confine operations at the site to areas permitted by applicable laws, statutes, ordinances, codes, rules and regulations, and lawful orders of public authorities and the Contract Documents and shall not unreasonably encumber the site with materials or equipment. The Contractor shall not allow tradesman, technicians and laborers to enter other portions of existing facilities except as predetermined and approved by the Project Engineer. Existing utilities shall not be interrupted unless pre-approved by the Project Engineer. Parking for construction vehicles shall be in areas designated by the Owner at the Pre-construction Conference.

§ 3.14 CUTTING AND PATCHING

§ 3.14.1 The Contractor shall be responsible for cutting, fitting or patching required to complete the Work or to make its parts fit together properly. All areas requiring cutting, fitting and patching shall be restored to the condition existing prior to the cutting, fitting and patching, unless otherwise required by the Contract Documents.

§ 3.14.2 The Contractor shall not damage or endanger a portion of the Work or fully or partially completed construction of the Owner or separate contractors by cutting, patching or otherwise altering such construction, or by excavation. The Contractor shall not cut or otherwise alter such construction by the Owner or a separate contractor except with written consent of the Owner and of such separate contractor; such consent shall not be unreasonably withheld. The Contractor shall not unreasonably withhold from the Owner or a separate contractor the Contractor's consent to cutting or otherwise altering the Work.

§ 3.15 CLEANING UP

§ 3.15.1 The Contractor shall keep the premises and surrounding area free from accumulation of waste materials or rubbish caused by operations under the Contract. At completion of the Work, the Contractor shall remove waste materials, rubbish, the Contractor's tools, construction equipment, machinery and surplus materials from and about the Project.

§ 3.15.2 If the Contractor fails to clean up as provided in the Contract Documents, the Owner may do so and Owner shall be entitled to reimbursement from the Contractor.

§ 3.16 ACCESS TO WORK

The Contractor shall provide the Owner and Architect access to the Work in preparation and progress wherever located.

§ 3.17 ROYALTIES, PATENTS AND COPYRIGHTS

The Contractor shall pay all royalties and license fees. The Contractor shall defend suits or claims for infringement of copyrights and patent rights and shall hold the Owner and Architect harmless from loss on account thereof, but shall not be responsible for such defense or loss when a particular design, process or product of a particular manufacturer or manufacturers is required by the Contract Documents, or where the copyright violations are contained in Drawings, Specifications or other documents prepared by the Owner or Architect. However, if the Contractor has reason to believe that the required design, process or product is an infringement of a copyright or a patent, the Contractor shall be responsible for such loss unless such information is promptly furnished to the Architect.

§ 3.18 INDEMNIFICATION

§ 3.18.1 To the fullest extent permitted by law the Contractor shall indemnify and hold harmless the Owner, Architect, Architect's consultants, and agents and employees of any of them from and against claims, damages, losses and expenses, including but not limited to attorneys' fees, arising out of or resulting from performance of the Work, provided that such claim, damage, loss or expense is attributable to bodily injury, sickness, disease or death, or to injury to or destruction of tangible property (other than the Work itself), but only to the extent caused by the negligent acts or omissions of the Contractor, a Subcontractor, anyone directly or indirectly employed by them or anyone for whose acts they may be liable, regardless of whether or not such claim, damage, loss or expense is caused in part by a party indemnified hereunder. Such obligation shall not be construed to negate, abridge, or reduce other rights or obligations of indemnity that would otherwise exist as to a party or person described in this Section 3.18. The Contractor agrees to defend, hold harmless and indemnify the Owner against all claims or demands caused by the Contractor's acts or omissions.

§ 3.18.2 In claims against any person or entity indemnified under this Section 3.18 by an employee of the Contractor, a Subcontractor, anyone directly or indirectly employed by them or anyone for whose acts they may be liable, the indemnification obligation under Section 3.18.1 shall not be limited by a limitation on amount or type of damages, compensation or benefits payable by or for the Contractor or a Subcontractor under workers' compensation acts, disability benefit acts or other employee benefit acts.

ARTICLE 4 ARCHITECT

§ 4.1 GENERAL

§ 4.1.1 The Owner shall retain an architect lawfully licensed to practice architecture or an entity lawfully practicing architecture in the jurisdiction where the Project is located. That person or entity is identified as the Architect in the Agreement and is referred to throughout the Contract Documents as if singular in number.

§ 4.1.2 Duties, responsibilities and limitations of authority of the Architect as set forth in the Contract Documents shall not be restricted, modified or extended without written consent of the Owner, Contractor and Architect. Consent shall not be unreasonably withheld.

§ 4.1.3 If the employment of the Architect is terminated, the Owner shall employ a successor architect as to whom the Contractor has no reasonable objection and whose status under the Contract Documents shall be that of the Architect.

§ 4.1.4 The term "Architect," "Engineer," "Professional", or "Consultant" as used in these Documents refers to the Professional firm who has been directed by the Owner to design, provide Construction Documents and Construction Administration for this Project. These Consultants are advisors to the Project Engineer and MDOT Architect.

§ 4.1.5 The term "Project Engineer" as used in these Documents refers to the Mississippi Department of Transportation Executive Director's authorized representative. The Project Engineer shall be the Initial Decision Maker referenced in Article 15. The term "MDOT Architect" is the representative for the MDOT Architectural Services Unit and is an advisor to the Project Engineer.

§ 4.2 ADMINISTRATION OF THE CONTRACT

§ 4.2.1 The Architect will provide assistance to the Project Engineer and MDOT Architect for administration of the Contract as described in the Contract Documents and will be the Project Engineer's representative during construction until the date the Project Engineer issues the final Certificate for Payment. The Architect will have authority to act on behalf of the Project Engineer only to the extent provided in the Contract Documents.

§ 4.2.2 The Architect will visit the site at intervals appropriate to the stage of construction, or as otherwise agreed with the Project Engineer, to become generally familiar with the progress and quality of the portion of the Work completed, and to determine in general if the Work observed is being performed in a manner indicating that the Work, when fully completed, will be in accordance with the Contract Documents. However, the Architect will not be required to make exhaustive or continuous on-site inspections to check the quality or quantity of the Work. The Architect will not have control over, charge of, or responsibility for, the construction means, methods, techniques, sequences or procedures, or for the safety precautions and programs in connection with the Work, since these are solely the Contractor's rights and responsibilities under the Contract Documents, except as provided in Section 3.3.1.

§ 4.2.3 On the basis of the site visits, the Architect will keep the Project Engineer reasonably informed about the progress and quality of the portion of the Work completed, and report to the Project Engineer (1) known deviations from the Contract Documents and from the most recent construction schedule submitted by the Contractor, and (2) defects and deficiencies observed in the Work. The Architect will not be responsible for the Contractor's failure to perform the Work in accordance with the requirements of the Contract Documents. The Architect will not have control over or charge of and will not be responsible for acts or omissions of the Contractor, Subcontractors, or their agents or employees, or any other persons or entities performing portions of the Work.

§ 4.2.4 COMMUNICATIONS FACILITATING CONTRACT ADMINISTRATION

Except as otherwise provided in the Contract Documents or when direct communications have been specially authorized, the Architect and Contractor shall endeavor to communicate with each other through the Project Engineer about matters arising out of or relating to the Contract. Communications by and with the Architect's consultants shall be through the Architect to the MDOT Architect and Project Engineer. Communications by and with Subcontractors and material suppliers shall be through the Contractor. Communications by and with separate contractors shall be through the Project Engineer.

§ 4.2.5 Based on the Architect's evaluations of the Contractor's Applications for Payment, the Architect will review and certify the amounts due the Contractor and the Project Engineer will prepare State Estimates for Payment in such amounts.

§ 4.2.6 The Architect shall advise the Project Engineer to reject Work that does not conform to the Contract Documents. Whenever the Architect considers it necessary or advisable, the Architect will advise the Project Engineer to require inspection or testing of the Work in accordance with Sections 13.5.2 and 13.5.3, whether or not such Work is fabricated, installed or completed. However, neither this recommendation of the Architect nor a decision made in good faith either to exercise or not to exercise such authority shall give rise to a duty or responsibility of the Architect to the Contractor, Subcontractors, material and equipment suppliers, their agents or employees, or other persons or entities performing portions of the Work.

§ 4.2.7 The Architect will review and approve, or take other appropriate action upon, the Contractor's submittals such as Shop Drawings, Product Data and Samples, but only for the limited purpose of checking for conformance with information given and the design concept expressed in the Contract Documents. The Architect's action will be taken in accordance with the submittal schedule approved by the Architect or, in the absence of an approved submittal schedule, with reasonable promptness while allowing sufficient time in the Architect's professional judgment to permit adequate review. Review of such submittals is not conducted for the purpose of determining the accuracy and completeness of other details such as dimensions and quantities, or for substantiating instructions for installation or performance of equipment or systems, all of which remain the responsibility of the Contractor as required by the Contract Documents. The Architect's review of the Contractor's submittals shall not relieve the Contractor of the obligations under Sections 3.3, 3.5 and 3.12. The Architect's review shall not constitute approval of safety precautions or, unless otherwise specifically stated by the Architect, of any construction means, methods, techniques, sequences or procedures. The Architect's approval of a specific item shall not indicate approval of an assembly of which the item is a component.

§ 4.2.8 The Project Engineer, with recommendations from the Architect, will prepare Supplemental Agreements (Change Orders) and Advanced Authority (Construction Change Directives), and may authorize minor changes in the Work as provided in Section 7.4. The Architect will investigate and make determinations and recommendations regarding concealed and unknown conditions as provided in Section 3.7.4.

§ 4.2.9 The Project Engineer, MDOT Architect, and Architect will conduct inspections to determine the date or dates of Completion; determine Final Acceptance; receive and forward to the Project Engineer, for review and records, written warranties and related documents required by the Contract and assembled by the Contractor pursuant to Section 9.10; and issue a final Certificate for Payment pursuant to Section 9.10.

§ 4.2.10 If the Project Engineer and Architect agree, the Architect will provide one or more project representatives to assist in carrying out the Architect's responsibilities at the site. The duties, responsibilities and limitations of authority of such project representatives shall be as set forth in an exhibit to be incorporated in the Contract Documents.

§ 4.2.11 The Architect will interpret and recommend matters concerning performance under, and requirements of, the Contract Documents on written request of either the Owner or Contractor. The Architect's response to such requests will be made in writing within any time limits agreed upon or otherwise with reasonable promptness.

§ 4.2.12 Interpretations and decisions of the Architect will be consistent with the intent of, and reasonably inferable from, the Contract Documents and will be in writing or in the form of drawings. When making such interpretations and decisions, the Architect will endeavor to secure faithful performance by both Owner and Contractor, will not show partiality to either and will not be liable for results of interpretations or decisions rendered in good faith.

§ 4.2.13 The Architect's decisions on matters relating to aesthetic effect will be final if consistent with the intent expressed in the Contract Documents.

§ 4.2.14 The Architect will review and respond to requests for information about the Contract Documents. The Architect's response to such requests will be made in writing within any time limits agreed upon or otherwise with reasonable promptness. If appropriate, the Architect will prepare and issue supplemental Drawings and Specifications in response to the requests for information.

ARTICLE 5 SUBCONTRACTORS

§ 5.1 DEFINITIONS

§ 5.1.1 A Subcontractor is a person or entity who has a direct contract with the Contractor to perform a portion of the Work at the site. The term “Subcontractor” is referred to throughout the Contract Documents as if singular in number and means a Subcontractor or an authorized representative of the Subcontractor. The term “Subcontractor” does not include a separate contractor or subcontractors of a separate contractor.

§ 5.1.2 A Sub-subcontractor is a person or entity who has a direct or indirect contract with a Subcontractor to perform a portion of the Work at the site. The term “Sub-subcontractor” is referred to throughout the Contract Documents as if singular in number and means a Sub-subcontractor or an authorized representative of the Sub-subcontractor.

§ 5.2 AWARD OF SUBCONTRACTS AND OTHER CONTRACTS FOR PORTIONS OF THE WORK

§ 5.2.1 Unless otherwise stated in the Contract Documents or the bidding requirements, the Contractor, as soon as practicable after award of the Contract, shall furnish in writing to the Owner through the Architect the names of persons or entities (including those who are to furnish materials or equipment fabricated to a special design) proposed for each principal portion of the Work. The Architect may reply within 14 days to the Contractor in writing stating (1) whether the Owner or the Architect has reasonable objection to any such proposed person or entity or (2) that the Architect requires additional time for review. Failure of the Owner or Architect to reply within the 14-day period shall constitute notice of no reasonable objection.

§ 5.2.2 The Contractor shall not contract with a proposed person or entity to whom the Owner or Architect has made reasonable and timely objection. The Contractor shall not be required to contract with anyone to whom the Contractor has made reasonable objection.

§ 5.2.3 If the Owner or Architect has reasonable objection to a person or entity proposed by the Contractor, the Contractor shall propose another to whom the Owner or Architect has no reasonable objection. If the proposed but rejected Subcontractor was reasonably capable of performing the Work, the Contract Sum and Contract Time shall be increased or decreased by the difference, if any, occasioned by such change, and an appropriate Change Order shall be issued before commencement of the substitute Subcontractor’s Work. However, no increase in the Contract Sum or Contract Time shall be allowed for such change unless the Contractor has acted promptly and responsively in submitting names as required.

§ 5.2.4 The Contractor shall not substitute a Subcontractor, person or entity previously selected if the Owner or Architect makes reasonable objection to such substitution.

§ 5.3 SUBCONTRACTUAL RELATIONS

By appropriate agreement, written where legally required for validity, the Contractor shall require each Subcontractor, to the extent of the Work to be performed by the Subcontractor, to be bound to the Contractor by terms of the Contract Documents, and to assume toward the Contractor all the obligations and responsibilities, including the responsibility for safety of the Subcontractor’s Work, which the Contractor, by these Documents, assumes toward the Owner and Architect. Each subcontract agreement shall preserve and protect the rights of the Owner and Architect under the Contract Documents with respect to the Work to be performed by the Subcontractor so that subcontracting thereof will not prejudice such rights, and shall allow to the Subcontractor, unless specifically provided otherwise in the subcontract agreement, the benefit of all rights, remedies and redress against the Contractor that the Contractor, by the Contract Documents, has against the Owner. Where appropriate, the Contractor shall require each Subcontractor to enter into similar agreements with Sub-subcontractors. The Contractor shall make available to each proposed Subcontractor, prior to the execution of the subcontract agreement, copies of the Contract Documents to which the Subcontractor will be bound, and, upon written request of the Subcontractor, identify to the Subcontractor terms and conditions of the proposed subcontract agreement that may be at variance with the Contract Documents. Subcontractors will similarly make copies of applicable portions of such documents available to their respective proposed Sub-subcontractors.

§ 5.4 CONTINGENT ASSIGNMENT OF SUBCONTRACTS

§ 5.4.1 Each subcontract agreement for a portion of the Work is assigned by the Contractor to the Owner, provided that

- .1 assignment is effective only after termination of the Contract by the Owner for cause pursuant to Section 14.2 and only for those subcontract agreements that the Owner accepts by notifying the Subcontractor and Contractor in writing; and
- .2 assignment is subject to the prior rights of the surety, if any, obligated under bond relating to the Contract.

When the Owner accepts the assignment of a subcontract agreement, the Owner assumes the Contractor's rights and obligations under the subcontract.

§ 5.4.2 Upon such assignment, if the Work has been suspended for more than 30 days, the Subcontractor's compensation shall be equitably adjusted for increases in cost resulting from the suspension.

§ 5.4.3 Upon such assignment to the Owner under this Section 5.4, the Owner may further assign the subcontract to a successor contractor or other entity. If the Owner assigns the subcontract to a successor contractor or other entity, the Owner shall nevertheless remain legally responsible for all of the successor contractor's obligations under the subcontract.

ARTICLE 6 CONSTRUCTION BY OWNER OR BY SEPARATE CONTRACTORS

§ 6.1 OWNER'S RIGHT TO PERFORM CONSTRUCTION AND TO AWARD SEPARATE CONTRACTS

§ 6.1.1 The Owner reserves the right to perform construction or operations related to the Project with the Owner's own forces and to award separate Contracts either in connection with other portions of the Project or other construction or operation on the site. In such event, the Contractor shall coordinate its activities with those of the Owner and of other Contractors so as to facilitate the general progress of all work being performed by all parties. Cooperation will be required in the arrangement for the storage of materials, and in the detailed execution of the work.

(Paragraph Deleted)

§ 6.1.3 The Owner shall provide for coordination of the activities of the separate contractors with the Work of the Contractor, who shall cooperate with them. The Contractor shall participate with other separate contractors and the Owner in reviewing their construction schedules. The Contractor shall make any revisions to the construction schedule deemed necessary after a joint review and mutual agreement. The construction schedules shall then constitute the schedules to be used by the Contractor, separate contractors and the Owner until subsequently revised.

(Paragraph Deleted)

§ 6.2 MUTUAL RESPONSIBILITY

§ 6.2.1 The Contractor shall afford the Owner and separate contractors reasonable opportunity for introduction and storage of their materials and equipment and performance of their activities, and shall connect and coordinate the Contractor's construction and operations with theirs as required by the Contract Documents.

§ 6.2.2 If part of the Contractor's Work depends for proper execution or results upon construction or operations by the Owner or a separate contractor, the Contractor shall, prior to proceeding with that portion of the Work, promptly report to the Architect apparent discrepancies or defects in such other construction that would render it unsuitable for such proper execution and results. Failure of the Contractor so to report shall constitute an acknowledgment that the Owner's or separate contractor's completed or partially completed construction is fit and proper to receive the Contractor's Work, except as to defects not then reasonably discoverable.

§ 6.2.3 The Contractor shall reimburse the Owner for costs the Owner incurs that are payable to a separate contractor because of the Contractor's delays, improperly timed activities or defective construction. The Owner shall be responsible to the Contractor for costs the Contractor incurs because of a separate contractor's delays, improperly timed activities, damage to the Work or defective construction.

§ 6.2.4 The Contractor shall promptly remedy damage the Contractor wrongfully causes to completed or partially completed construction or to property of the Owner or separate contractors as provided in Section 10.2.5.

§ 6.2.5 The Owner and each separate contractor shall have the same responsibilities for cutting and patching as are described for the Contractor in Section 3.14.

§ 6.3 OWNER'S RIGHT TO CLEAN UP

If a dispute arises among the Contractor, separate contractors and the Owner as to the responsibility under their respective contracts for maintaining the premises and surrounding area free from waste materials and rubbish, the Owner may clean up and the Architect will allocate the cost among those responsible.

ARTICLE 7 CHANGES IN THE WORK

§ 7.1 GENERAL

§ 7.1.1 Changes in the Work may be accomplished after execution of the Contract, and without invalidating the Contract, by Supplemental Agreement (Change Order), Advance Authority (Construction Change Directive) or order for a minor change in the Work, subject to the limitations stated in this Article 7 and elsewhere in the Contract Documents.

§ 7.1.2 A Supplemental Agreement (Change Order) shall be based upon agreement among the Owner, Contractor and Architect; a Construction Change Directive requires agreement by the Owner and Architect and may or may not be agreed to by the Contractor; an order for a minor change in the Work may be issued by the Project Engineer.

§ 7.1.3 Changes in the Work shall be performed under applicable provisions of the Contract Documents, and the Contractor shall proceed promptly, unless otherwise provided in the Supplemental Agreement (Change Order), Advance Authority (Construction Change Directive) or order for a minor change in the Work.

§ 7.2 SUPPLEMENTAL AGREEMENT (CHANGE ORDERS)

§ 7.2.1 A Change Order is a written instrument prepared by the Architect and signed by the Owner, Contractor and Architect stating their agreement upon all of the following:

- .1 The change in the Work;
- .2 The amount of the adjustment, if any, in the Contract Sum; and
- .3 The extent of the adjustment, if any, in the Contract Time.

§ 7.2.2 The maximum cost included in a Supplemental Agreement (Change Order) for profit and overhead is limited to twenty percent (20%) of the total of the actual cost for materials, labor and subcontracts. Profit and overhead include: all taxes, fees, permits, insurance, bond, job superintendent, job and home office expense. All Subcontractors shall comply passively without protest to the same requirements when participating in a Supplemental Agreement (Change Order).

§ 7.3 ADVANCE AUTHORITY (CONSTRUCTION CHANGE DIRECTIVES)

§ 7.3.1 Advance Authority (Construction Change Directive) is a written order prepared and signed by the Project Engineer, directing a change in the Work prior to agreement on adjustment, if any, in the Contract Sum or Contract Time, or both. The Project Engineer may by Advance Authority (Construction Change Directive), without invalidating the Contract, order changes in the Work within the general scope of the Contract consisting of additions, deletions or other revisions, the Contract Sum and Contract Time being adjusted accordingly.

§ 7.3.2 A Construction Change Directive shall be used as Advanced Authority on changes to the Work where agreement has been reached prior to preparation of Supplemental Agreement (Change Order).

§ 7.3.3 If the Construction Change Directive provides for an adjustment to the Contract Sum, the adjustment shall be based on one of the following methods:

- .1 Mutual acceptance of a lump sum properly itemized and supported by sufficient substantiating data to permit evaluation;
- .2 Unit prices stated in the Contract Documents or subsequently agreed upon;

- .3 Cost to be determined in a manner agreed upon by the parties and a mutually acceptable fixed or percentage fee; or
- .4 As provided in Section 7.3.7.

§ 7.3.4 If unit prices are stated in the Contract Documents or subsequently agreed upon, and if quantities originally contemplated are materially changed in a proposed Change Order or Construction Change Directive so that application of such unit prices to quantities of Work proposed will cause substantial inequity to the Owner or Contractor, the applicable unit prices shall be equitably adjusted.

§ 7.3.5 Upon receipt of a Construction Change Directive, the Contractor shall promptly proceed with the change in the Work involved and advise the Architect of the Contractor's agreement or disagreement with the method, if any, provided in the Construction Change Directive for determining the proposed adjustment in the Contract Sum or Contract Time.

§ 7.3.6 A Construction Change Directive signed by the Contractor indicates the Contractor's agreement therewith, including adjustment in Contract Sum and Contract Time or the method for determining them. Such agreement shall be effective immediately and shall be recorded as a Change Order.

§ 7.3.7 If the Contractor does not respond promptly or disagrees with the method for adjustment in the Contract Sum, the Architect shall determine the method and the adjustment on the basis of reasonable expenditures and savings of those performing the Work attributable to the change, including, in case of an increase in the Contract Sum, an amount for overhead and profit as set forth in the Agreement, or if no such amount is set forth in the Agreement, a reasonable amount. In such case, and also under Section 7.3.3.3, the Contractor shall keep and present, in such form as the Architect may prescribe, an itemized accounting together with appropriate supporting data. Unless otherwise provided in the Contract Documents, costs for the purposes of this Section 7.3.7 shall be limited to the following:

- .1 Costs of labor, including social security, old age and unemployment insurance, fringe benefits required by agreement or custom, and workers' compensation insurance;
- .2 Costs of materials, supplies and equipment, including cost of transportation, whether incorporated or consumed;
- .3 Rental costs of machinery and equipment, exclusive of hand tools, whether rented from the Contractor or others;
- .4 Costs of premiums for all bonds and insurance, permit fees, and sales, use or similar taxes related to the Work; and
- .5 Additional costs of supervision and field office personnel directly attributable to the change.

§ 7.3.8 The amount of credit to be allowed by the Contractor to the Owner for a deletion or change that results in a net decrease in the Contract Sum shall be actual net cost as confirmed by the Architect. When both additions and credits covering related Work or substitutions are involved in a change, the allowance for overhead and profit shall be figured on the basis of net increase, if any, with respect to that change.

§ 7.3.9 Pending final determination of the total cost of a Construction Change Directive to the Owner, the Contractor may request payment for Work completed under the Construction Change Directive in Applications for Payment. The Architect will make an interim determination for purposes of monthly certification for payment for those costs and certify for payment the amount that the Architect determines, in the Architect's professional judgment, to be reasonably justified. The Architect's interim determination of cost shall adjust the Contract Sum on the same basis as a Change Order, subject to the right of either party to disagree and assert a Claim in accordance with Article 15.

§ 7.3.10 When the Owner and Contractor agree with a determination made by the Architect concerning the adjustments in the Contract Sum and Contract Time, or otherwise reach agreement upon the adjustments, such agreement shall be effective immediately and the Project Engineer will prepare a Supplemental Agreement (Change Order). Supplemental Agreements (Change Orders) shall be issued for all or any part of an Advance Authority (Construction Change Directive).

§ 7.4 MINOR CHANGES IN THE WORK

The Architect has authority to order minor changes in the Work not involving adjustment in the Contract Sum or extension of the Contract Time and not inconsistent with the intent of the Contract Documents. Such changes will be effected by written order signed by the Architect and shall be binding on the Owner and Contractor.

ARTICLE 8 TIME

§ 8.1 DEFINITIONS

§ 8.1.1 Unless otherwise provided, Contract Time is the period of time, including authorized adjustments, allotted in the Contract Documents for Completion of the Work.

§ 8.1.2 The date of commencement of the Work is the date established in the Agreement.

§ 8.1.3 The date of Completion is the date certified by the Project Engineer and approved by the Owner in accordance with Section 9.8.

§ 8.1.4 The term “day” as used in the Contract Documents shall mean calendar day unless otherwise specifically defined.

§ 8.2 PROGRESS AND COMPLETION

§ 8.2.1 Time limits stated in the Contract Documents are of the essence of the Contract. By executing the Agreement the Contractor confirms that the Contract Time is a reasonable period for performing the Work.

§ 8.2.2 The Contractor shall not knowingly, except by agreement or instruction of the Owner in writing, prematurely commence operations on the site or elsewhere prior to the effective date of insurance required by Article 11 to be furnished by the Contractor and Owner. The date of commencement of the Work shall not be changed by the effective date of such insurance.

§ 8.2.3 The Contractor shall proceed expeditiously with adequate forces and shall achieve Substantial Completion within the Contract Time.

§ 8.3 DELAYS AND EXTENSIONS OF TIME

§ 8.3.1 If the Contractor is delayed at any time in the commencement or progress of the Work by any act of neglect of the Owner or Project Engineer, or by any employee or either, or by changes ordered in the Work, or by labor disputes, fire, unusual delay in deliveries, unavoidable casualties or any causes beyond the Contractor’s control, or by any other causes which the Project Engineer determines may justify the delay, then the Contract time may be extended by Change Order for such reasonable time as the Project Engineer may determine, subject to the Owner’s approval. The Contractor’s sole and exclusive right and remedy for delay by any cause whatsoever is an extension of the Contract Time but no increase in the Contract Sum. Any claim for loss or any delay occasioned by any separate Contractor, or Subcontractor, shall be settled between the Contractor and such other separate Contractor, or Subcontractors.

§ 8.3.2 No delay, interference, hindrance or disruption, from whatever source or cause, in the progress of the Contractor’s Work shall be a basis for an extension of time unless the delay, interference hindrance or disruption is (1) without the fault and not the responsibility of the Contractor, its subcontractors and suppliers and (2) directly affects the overall completion of the Work as reflected on the critical path of the updated Construction Schedule. The contractor expressly agrees that the Owner shall have the benefit of any float in the construction schedule and delay in construction activities which do not affect the overall completion of the work does not entitle the Contractor to any extension in the Contract Time.

§ 8.3.3 This Section 8.3 does not preclude recovery of damages for delay by either party under other provisions of the Contract Documents.

1. The weather experienced at the project site during the contract period must be found to be unusually severe, that is, more severe than the adverse weather anticipated for the project location during any given month.
2. The unusually severe weather must actually cause a delay in the completion of the project. The delay must be beyond the control and without the fault or negligence of the Contractor.

§ 8.3.5 The following schedule of monthly anticipated adverse weather delays is based on National Oceanic and Atmospheric Administration (NOAA) or similar data for the project location and will constitute the base line for monthly weather time evaluations. The Contractor’s activity durations for inclusion in the progress schedule must reflect these anticipated adverse weather delays in all weather dependent activities.

Init.

1. Adverse Weather Evaluation: The table below defines the monthly anticipated adverse weather in days for the project:

Adverse Weather Table

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
10	9	9	8	9	8	10	9	7	6	8	9

§ 8.3.6 Monthly anticipated adverse weather delay work days based on five (5) day work week.

§ 8.3.7 Upon acknowledgement of the Notice to Proceed (NTP) and continuing throughout the Contract, the Contractor shall record on the daily report, the occurrence of adverse weather and resultant impact to normally scheduled work. Actual adverse weather delay days must prevent work on the overall projects' critical activities for 50 percent or more of the Contractor's scheduled workday. The number of actual adverse weather days shall include days impacted by actually adverse weather (even if adverse weather occurred in previous month), be calculated chronologically from the first to the last day of each month and be recorded as full days. If the number of actual adverse weather delay days exceeds the number of days anticipated in paragraph 8.3.5 above, the Owner and the Architect will convert any qualifying delays to calendar days giving full consideration for equivalent fair weather work days, and issue a modification in accordance with the Contract.

ARTICLE 9 PAYMENTS AND COMPLETION

§ 9.1 CONTRACT SUM

The Contract Sum is stated in the Agreement and, including authorized adjustments, is the total amount payable by the Owner to the Contractor for performance of the Work under the Contract Documents.

§ 9.2 SCHEDULE OF VALUES

Where the Contract is based on a stipulated sum, the Contractor shall submit to the Architect, before the first Application for Payment, a schedule of values allocating the entire Contract Sum to the various portions of the Work and prepared in such form and supported by such data to substantiate its accuracy as the Architect may require. This schedule, unless objected to by the Architect, MDOT Architect, or Project Engineer, shall be used as a basis for reviewing the Contractor's Applications for Payment.

§ 9.3 APPLICATIONS FOR PAYMENT

§ 9.3.1 At least ten days before the date established for each progress payment, the Contractor shall submit to the Architect an itemized Application for Payment prepared in accordance with the schedule of values, if required under Section 9.2, for completed portions of the Work. Such application shall be notarized, if required, and supported by such data substantiating the Contractor's right to payment as the Owner or Architect may require, such as copies of requisitions from Subcontractors and material suppliers, and shall reflect retainage if provided for in the Contract Documents. The form of Application for Payment will be AIA Document G702, Application and Certification for Payment, supported by AIA Document G703, Continuation Sheet, or a computer generated form containing similar data.

§ 9.3.1.1 As provided in Section 7.3.9, such applications may include requests for payment on account of changes in the Work that have been properly authorized by Construction Change Directives, or by interim determinations of the Architect, but not yet included in Change Orders.

§ 9.3.1.2 Applications for Payment shall not include requests for payment for portions of the Work for which the Contractor does not intend to pay a Subcontractor or material supplier, unless such Work has been performed by others whom the Contractor intends to pay.

§ 9.3.1.3 The Owner will retain five percent (5%) until the Work is at least fifty percent (50%) complete, on schedule, and satisfactory in the Project Engineer's opinion, at which time fifty percent (50%) of the retainage held to date shall be returned to the Contractor for distribution to the appropriate Sub-Contractors and Suppliers. Future retainage shall be withheld at the rate of two and one half percent (2-1/2%) of the amount due the Contractor on account of progress payments.

§ 9.3.1.4 The Contractor must submit each month with this Application for Payment a separate letter stating that he is requesting an extension of time or that he had no need for an extension for that period of time. No payment on a monthly application will be made until the letter is received. Complete justification such as weather reports or other pertinent correspondence must be included for each day's request for extension. A Contractor's letter, or statement, will not be considered as adequate justification. The receipt of this request and data by the Owner will not be considered as Owner approval in any way.

§ 9.3.2 Unless otherwise provided in the Contract Documents, payments shall be made on account of materials and equipment delivered and suitably stored at the site for subsequent incorporation in the Work. If approved in advance by the Owner, payment may similarly be made for materials and equipment suitably stored off the site at a location agreed upon in writing. Payment for materials and equipment stored on or off the site shall be conditioned upon compliance by the Contractor with procedures satisfactory to the Owner to establish the Owner's title to such materials and equipment or otherwise protect the Owner's interest, and shall include the costs of applicable insurance, storage and transportation to the site for such materials and equipment stored off the site.

§ 9.3.2.1 Payment on materials stored at some location other than the building site, may be approved by the Project Engineer and the Owner after the Contractor has submitted the following items:

- .1 An acceptable Lease Agreement between the General Contractor and the owner of the land, or building, where the materials are located.
- .2 Consent of Surety, or other acceptable Bond, to cover the materials stored off-site.
- .3 All Perils Insurance coverage for the full value of the materials stored off-site.
- .4 A Bill of Sale from the Manufacturer to the General Contractor for the stored materials.
- .5 A complete list and inventory of materials manufactured, stored and delivered to the storage site and of materials removed from the storage site and delivered to the job site.
- .6 A review by the Project Engineer of the materials stored off-site prior to release of payment.
- .7 Guarantee no storage costs, additional delivery fees, or subsequent costs to the Owner.
- .8 List of stored items shall be sent to the Chief Engineer for his approval prior to payment of stored materials.

§ 9.3.2.2 Payment for materials stored at the building site, may be approved by the Project Engineer and the Owner after the Contractor has submitted the following items:

- .1 A Bill of Sale from the Manufacturer to the General Contractor for the stored materials.
- .2 List of stored items shall be sent to the Chief Engineer for his approval prior to payment of stored materials.

§ 9.3.3 The Contractor warrants that title to all Work covered by an Application for Payment will pass to the Owner no later than the time of payment. The Contractor further warrants that upon submittal of an Application for Payment all Work for which Certificates for Payment have been previously issued and payments received from the Owner shall, to the best of the Contractor's knowledge, information and belief, be free and clear of liens, claims, security interests or encumbrances in favor of the Contractor, Subcontractors, material suppliers, or other persons or entities making a claim by reason of having provided labor, materials and equipment relating to the Work.

§ 9.4 CERTIFICATES FOR PAYMENT

§ 9.4.1 The Architect will, within seven days after receipt of the Contractor's Application for Payment, either recommend acceptance or state what portions should be modified to the Project Engineer for such amount as the Architect determines is properly due, or notify the Contractor and Project Engineer in writing of the Architect's reasons for modifications in whole or in part as provided in Section 9.5.1.

§ 9.4.2 The recommendations for Payment will constitute a representation by the Architect to the Project Engineer, based on the Architect's evaluation of the Work and the data comprising the Application for Payment, that, to the best of the Architect's knowledge, information and belief, the Work has progressed to the point indicated and that the quality of the Work is in accordance with the Contract Documents. The foregoing representations are subject to an evaluation of the Work for conformance with the Contract Documents upon Date of Completion, to results of

subsequent tests and inspections, to correction of minor deviations from the Contract Documents prior to completion and to specific qualifications expressed by the Architect. The recommendations for Payment will further constitute a representation that the Contractor is entitled to payment in the amount recommended. However, the recommendations for Payment will not be a representation that the Architect has (1) made exhaustive or continuous on-site inspections to check the quality or quantity of the Work, (2) reviewed construction means, methods, techniques, sequences or procedures, (3) reviewed copies of requisitions received from Subcontractors and material suppliers and other data requested by the Owner to substantiate the Contractor's right to payment, or (4) made examination to ascertain how or for what purpose the Contractor has used money previously paid on account of the Contract Sum.

§ 9.5 DECISIONS TO WITHHOLD CERTIFICATION

§ 9.5.1 The Architect may recommend to withhold Payment in whole or in part, to the extent reasonably necessary to protect the Owner, if in the Architect's opinion the representations to the Owner required by Section 9.4.2 cannot be made. If the Architect is unable to recommend payment in the amount of the Application, the Architect will notify the Contractor and Owner as provided in Section 9.4.1. If the Contractor and Architect cannot agree on a revised amount, the Architect will promptly make recommendation for Payment for the amount for which the Architect is able to make such representations to the Owner. The Architect may also make recommendations to withhold Payment or, because of subsequently discovered evidence, may make recommendations to nullify the whole or a part of a Payment previously made, to such extent as may be necessary in the Architect's opinion to protect the Owner from loss for which the Contractor is responsible, including loss resulting from acts and omissions described in Section 3.3.2, because of

- .1 defective Work not remedied;
- .2 third party claims filed or reasonable evidence indicating probable filing of such claims unless security acceptable to the Owner is provided by the Contractor;
- .3 failure of the Contractor to make payments properly to Subcontractors or for labor, materials or equipment;
- .4 reasonable evidence that the Work cannot be completed for the unpaid balance of the Contract Sum;
- .5 damage to the Owner or a separate contractor;
- .6 reasonable evidence that the Work will not be completed within the Contract Time, and that the unpaid balance would not be adequate to cover actual or liquidated damages for the anticipated delay; or
- .7 repeated failure to carry out the Work in accordance with the Contract Documents.

§ 9.5.2 When the above reasons for recommendations to withhold Payment are removed, recommendations will be made for amounts previously withheld.

(Paragraph Deleted)

§ 9.6 PROGRESS PAYMENTS

§ 9.6.1 After the Architect has reviewed the Application for Payment and made recommendations to the Project Engineer, the Project Engineer shall make payment in the manner and within the time provided in the Contract Documents.

§ 9.6.2 The Contractor shall pay each Subcontractor no later than seven days after receipt of payment from the Owner the amount to which the Subcontractor is entitled, reflecting percentages actually retained from payments to the Contractor on account of the Subcontractor's portion of the Work. The Contractor shall, by appropriate agreement with each Subcontractor, require each Subcontractor to make payments to Sub-subcontractors in a similar manner.

§ 9.6.3 The Architect will, on request, furnish to a Subcontractor, if practicable, information regarding percentages of completion or amounts applied for by the Contractor and action taken thereon by the Architect and Owner on account of portions of the Work done by such Subcontractor.

§ 9.6.4 The Owner has the right to request written evidence from the Contractor that the Contractor has properly paid Subcontractors and material and equipment suppliers amounts paid by the Owner to the Contractor for subcontracted Work. If the Contractor fails to furnish such evidence within seven days, the Owner shall have the right to contact Subcontractors to ascertain whether they have been properly paid. Neither the Owner nor Architect shall have an obligation to pay or to see to the payment of money to a Subcontractor, except as may otherwise be required by law.

§ 9.6.5 Contractor payments to material and equipment suppliers shall be treated in a manner similar to that provided in Sections 9.6.2, 9.6.3 and 9.6.4.

§ 9.6.6 A Certificate for Payment, a progress payment, or partial or entire use or occupancy of the Project by the Owner shall not constitute acceptance of Work not in accordance with the Contract Documents.

§ 9.6.7 Unless the Contractor provides the Owner with a payment bond in the full penal sum of the Contract Sum, payments received by the Contractor for Work properly performed by Subcontractors and suppliers shall be held by the Contractor for those Subcontractors or suppliers who performed Work or furnished materials, or both, under contract with the Contractor for which payment was made by the Owner. Nothing contained herein shall require money to be placed in a separate account and not commingled with money of the Contractor, shall create any fiduciary liability or tort liability on the part of the Contractor for breach of trust or shall entitle any person or entity to an award of punitive damages against the Contractor for breach of the requirements of this provision.

§

9.6.8 The amount retained by the Contractor from each payment to each Subcontractor and material supplier will not exceed the percentage retained by the Owner from the Contractor

§ 9.7 FAILURE OF PAYMENT

The Contractor and the Owner shall be subject to the remedies as prescribed in Section 31-5-25 of the Mississippi Code 1972, Annotated.

9.8 SUBSTANTIAL COMPLETION

§ 9.8.1 Substantial Completion shall not be recognized under this Contract. The Project Engineer shall determine when the building or designated portion is complete to the point it can be used for its intended purpose. This date shall be the Date of Completion. All Warranties and Extended Warranties shall use this date as the starting date of Warranty Period.

§ 9.8.2 When the Contractor considers that the Work, or a portion thereof which the Owner agrees to accept separately, is substantially complete, the Contractor shall prepare and submit to the Architect a comprehensive list of items to be completed or corrected prior to final payment. Failure to include an item on such list does not alter the responsibility of the Contractor to complete all Work in accordance with the Contract Documents.

§ 9.8.3 Upon receipt of the Contractor's list, the Architect will make an inspection to determine whether the Work or designated portion thereof is substantially complete. If the Architect's inspection discloses any item, whether or not included on the Contractor's list, which is not sufficiently complete in accordance with the Contract Documents so that the Owner can occupy or utilize the Work or designated portion thereof for its intended use, the Contractor shall, before issuance of the Certificate of Substantial Completion, complete or correct such item upon notification by the Architect. In such case, the Contractor shall then submit a request for another inspection by the Architect to determine Substantial Completion.

§ 9.8.4 When the Work or designated portion thereof is substantially complete, the Architect will prepare a Certificate of Substantial Completion that shall establish the date of Substantial Completion, shall establish responsibilities of the Owner and Contractor for security, maintenance, heat, utilities, damage to the Work and insurance, and shall fix the time within which the Contractor shall finish all items on the list accompanying the Certificate. Warranties required by the Contract Documents shall commence on the date of Substantial Completion of the Work or designated portion thereof unless otherwise provided in the Certificate of Substantial Completion.

§ 9.8.5 The Certificate of Substantial Completion shall be submitted to the Owner and Contractor for their written acceptance of responsibilities assigned to them in such Certificate. Upon such acceptance and consent of surety, if any, the Owner shall make payment of retainage applying to such Work or designated portion thereof. Such payment shall be adjusted for Work that is incomplete or not in accordance with the requirements of the Contract Documents.

§ 9.9 PARTIAL OCCUPANCY OR USE

§ 9.9.1 The Owner may occupy or use any completed or partially completed portion of the Work at any stage when such portion is designated by separate agreement with the Contractor, provided such occupancy or use is consented to by the insurer as required under Section 11.3.1.5 and authorized by public authorities having jurisdiction over the Project. Such partial occupancy or use may commence whether or not the portion is substantially complete, provided the Owner and Contractor have accepted in writing the responsibilities assigned to each of them for payments, retainage, if any, security, maintenance, heat, utilities, damage to the Work and insurance, and have agreed in writing concerning the period for correction of the Work and commencement of warranties required by the Contract Documents. When the Contractor considers a portion substantially complete, the Contractor shall prepare and submit a list to the Architect as provided under Section 9.8.2. Consent of the Contractor to partial occupancy or use shall not be unreasonably withheld. The stage of the progress of the Work shall be determined by written agreement between the Owner and Contractor or, if no agreement is reached, by decision of the Architect.

§ 9.9.2 Immediately prior to such partial occupancy or use, the Owner, Contractor and Architect shall jointly inspect the area to be occupied or portion of the Work to be used in order to determine and record the condition of the Work.

§ 9.9.3 Unless otherwise agreed upon, partial occupancy or use of a portion or portions of the Work shall not constitute acceptance of Work not complying with the requirements of the Contract Documents.

§ 9.10 FINAL COMPLETION AND FINAL PAYMENT

§ 9.10.1 Upon receipt of the Contractor's written notice that the Work is ready for final inspection and acceptance and upon receipt of a final Application for Payment, the Architect will promptly make such inspection and, when the Architect finds the Work acceptable under the Contract Documents and the Contract fully performed, the Architect will promptly issue a final Certificate for Payment stating that to the best of the Architect's knowledge, information and belief, and on the basis of the Architect's on-site visits and inspections, the Work has been completed in accordance with terms and conditions of the Contract Documents and that the entire balance found to be due the Contractor and noted in the final Certificate is due and payable. The Architect's final Certificate for Payment will constitute a further representation that conditions listed in Section 9.10.2 as precedent to the Contractor's being entitled to final payment have been fulfilled.

§ 9.10.2 Neither final payment nor any remaining retained percentage shall become due until the Contractor submits to the Architect (1) an affidavit that payrolls, bills for materials and equipment, and other indebtedness connected with the Work for which the Owner or the Owner's property might be responsible or encumbered (less amounts withheld by Owner) have been paid or otherwise satisfied, (2) a certificate evidencing that insurance required by the Contract Documents to remain in force after final payment is currently in effect and will not be canceled or allowed to expire until at least 30 days' prior written notice has been given to the Owner, (3) a written statement that the Contractor knows of no substantial reason that the insurance will not be renewable to cover the period required by the Contract Documents, (4) consent of surety, if any, to final payment and (5), if required by the Owner, other data establishing payment or satisfaction of obligations, such as receipts, releases and waivers of liens, claims, security interests or encumbrances arising out of the Contract, to the extent and in such form as may be designated by the Owner. If a Subcontractor refuses to furnish a release or waiver required by the Owner, the Contractor may furnish a bond satisfactory to the Owner to indemnify the Owner against such lien. If such lien remains unsatisfied after payments are made, the Contractor shall refund to the Owner all money that the Owner may be compelled to pay in discharging such lien, including all costs and reasonable attorneys' fees.

§ 9.10.3 If, after Date of Completion of the Work, final completion thereof is materially delayed through no fault of the Contractor or by issuance of Change Orders affecting final completion, and the Architect so confirms, the Owner shall, upon application by the Contractor and agreement by the Architect, and without terminating the Contract, make payment of the balance due for that portion of the Work fully completed and accepted. If the remaining balance for Work not fully completed or corrected is less than retainage stipulated in the Contract Documents, and if bonds have been furnished, the written consent of surety to payment of the balance due for that portion of the Work fully completed and accepted shall be submitted by the Contractor to the Architect prior to agreement of such payment. Such payment shall be made under terms and conditions governing final payment, except that it shall not constitute a waiver of claims.

§ 9.10.4 The making of final payment shall constitute a waiver of Claims by the Owner except those arising from

- .1 liens, Claims, security interests or encumbrances arising out of the Contract and unsettled;
- .2 failure of the Work to comply with the requirements of the Contract Documents; or
- .3 terms of special warranties required by the Contract Documents.

§ 9.10.5 Acceptance of final payment by the Contractor, a Subcontractor or material supplier shall constitute a waiver of claims by that payee except those previously made in writing and identified by that payee as unsettled at the time of final Application for Payment.

§ 9.11 LIQUIDATED DAMAGES

§ 9.11.1 Time being of the essence and a matter of material consideration thereof, a reasonable estimate in advance is established to cover losses incurred by the Owner if the project is not substantially complete on the date set forth in the Contract Documents. The Contractor and his Surety will be liable for and will pay the Owner liquidated damages for each calendar day of delay until the work is substantially complete as follows:

For More Than	To and Including	Per Calendar D
\$0	\$100,000	\$150
100,000	500,000	360
500,000	1,000,000	540
1,000,000	5,000,000	830
5,000,000	10,000,000	1,200
10,000,000	20,000,000	1,800
20,000,000	-----	3,500

ARTICLE 10 PROTECTION OF PERSONS AND PROPERTY

§ 10.1 SAFETY PRECAUTIONS AND PROGRAMS

The Contractor shall be responsible for initiating, maintaining and supervising all safety precautions and programs in connection with the performance of the Contract.

§ 10.2 SAFETY OF PERSONS AND PROPERTY

§ 10.2.1 The Contractor shall take reasonable precautions for safety of, and shall provide reasonable protection to prevent damage, injury or loss to

- .1 employees on the Work and other persons who may be affected thereby;
- .2 the Work and materials and equipment to be incorporated therein, whether in storage on or off the site, under care, custody or control of the Contractor or the Contractor's Subcontractors or Sub-subcontractors; and
- .3 other property at the site or adjacent thereto, such as trees, shrubs, lawns, walks, pavements, roadways, structures and utilities not designated for removal, relocation or replacement in the course of construction.

§ 10.2.2 The Contractor shall comply with and give notices required by applicable laws, statutes, ordinances, codes, rules and regulations, and lawful orders of public authorities bearing on safety of persons or property or their protection from damage, injury or loss.

§ 10.2.3 The Contractor shall erect and maintain, as required by existing conditions and performance of the Contract, reasonable safeguards for safety and protection, including posting danger signs and other warnings against hazards, promulgating safety regulations and notifying owners and users of adjacent sites and utilities.

§ 10.2.4 When use or storage of explosives or other hazardous materials or equipment or unusual methods are necessary for execution of the Work, the Contractor shall exercise utmost care and carry on such activities under supervision of properly qualified personnel.

§ 10.2.5 The Contractor shall promptly remedy damage and loss (other than damage or loss insured under property insurance required by the Contract Documents) to property referred to in Sections 10.2.1.2 and 10.2.1.3 caused in whole or in part by the Contractor, a Subcontractor, a Sub-subcontractor, or anyone directly or indirectly employed by any of them, or by anyone for whose acts they may be liable and for which the Contractor is responsible under

Sections 10.2.1.2 and 10.2.1.3, except damage or loss attributable to acts or omissions of the Owner or anyone directly or indirectly employed by either of them, or by anyone for whose acts either of them may be liable, or the Project Engineer and not attributable to the fault or negligence of the Contractor. The foregoing obligations of the Contractor are in addition to the Contractor's obligations under Section 3.18.

§ 10.2.6 The Contractor shall designate a responsible member of the Contractor's organization at the site whose duty shall be the prevention of accidents. This person shall be the Contractor's superintendent unless otherwise designated by the Contractor in writing to the Owner and Architect.

§ 10.2.7 The Contractor shall not permit any part of the construction or site to be loaded so as to cause damage or create an unsafe condition.

§ 10.2.8 INJURY OR DAMAGE TO PERSON OR PROPERTY

If either party suffers injury or damage to person or property because of an act or omission of the other party, or of others for whose acts such party is legally responsible, written notice of such injury or damage, whether or not insured, shall be given to the other party within a reasonable time not exceeding 21 days after discovery. The notice shall provide sufficient detail to enable the other party to investigate the matter.

§ 10.3 HAZARDOUS MATERIALS

§ 10.3.1 The Contractor is responsible for compliance with any requirements included in the Contract Documents regarding hazardous materials. If the Contractor encounters a hazardous material or substance not addressed in the Contract Documents and if reasonable precautions will be inadequate to prevent foreseeable bodily injury or death to persons resulting from a material or substance, including but not limited to asbestos or polychlorinated biphenyl (PCB), encountered on the site by the Contractor, the Contractor shall, upon recognizing the condition, immediately stop Work in the affected area and report the condition to the Owner and Architect in writing.

(Paragraphs Deleted)

§ 10.4 EMERGENCIES

In an emergency affecting safety of persons or property, the Contractor shall act, at the Contractor's discretion, to prevent threatened damage, injury or loss. Additional compensation or extension of time claimed by the Contractor on account of an emergency shall be determined as provided in Article 15 and Article 7.

ARTICLE 11 INSURANCE AND BONDS

§ 11.1 CONTRACTOR'S LIABILITY INSURANCE

§ 11.1.1 The Contractor shall purchase from and maintain in a company or companies lawfully authorized to do business in the jurisdiction in which the Project is located such insurance as will protect the Contractor from claims set forth below which may arise out of or result from the Contractor's operations and completed operations under the Contract and for which the Contractor may be legally liable, whether such operations be by the Contractor or by a Subcontractor or by anyone directly or indirectly employed by any of them, or by anyone for whose acts any of them may be liable:

- .1 Claims under workers' compensation, disability benefit and other similar employee benefit acts that are applicable to the Work to be performed;
- .2 Claims for damages because of bodily injury, occupational sickness or disease, or death of the Contractor's employees;
- .3 Claims for damages because of bodily injury, sickness or disease, or death of any person other than the Contractor's employees;
- .4 Claims for damages insured by usual personal injury liability coverage;
- .5 Claims for damages, other than to the Work itself, because of injury to or destruction of tangible property, including loss of use resulting therefrom;
- .6 Claims for damages because of bodily injury, death of a person or property damage arising out of ownership, maintenance or use of a motor vehicle;

- .7 Claims for bodily injury or property damage arising out of completed operations; and
- .8 Claims involving contractual liability insurance applicable to the Contractor's obligations under Section 3.18.

§ 11.1.2 The insurance required by Section 11.1.1 shall be written for not less than limits of liability specified in the Contract Documents or required by law, whichever coverage is greater. Coverages, whether written on an occurrence or claims-made basis, shall be maintained without interruption from the date of commencement of the Work until the date of final payment and termination of any coverage required to be maintained after final payment, and, with respect to the Contractor's completed operations coverage, until the expiration of the period for correction of Work or for such other period for maintenance of completed operations coverage as specified in the Contract Documents.

§ 11.1.3 Certificates of insurance acceptable to the Owner shall be filed with the Owner prior to commencement of the Work and thereafter upon renewal or replacement of each required policy of insurance. These certificates and the insurance policies required by this Section 11.1 shall contain a provision that coverages afforded under the policies will not be canceled or allowed to expire until at least 30 days' prior written notice has been given to the Owner. An additional certificate evidencing continuation of liability coverage, including coverage for completed operations, shall be submitted with the final Application for Payment as required by Section 9.10.2 and thereafter upon renewal or replacement of such coverage until the expiration of the time required by Section 11.1.2. Information concerning reduction of coverage on account of revised limits or claims paid under the General Aggregate, or both, shall be furnished by the Contractor with reasonable promptness.

§ 11.1.4 The Contractor shall cause the commercial liability coverage required by the Contract Documents to include (1) the Owner, the Architect and the Architect's consultants as additional insureds for claims caused in whole or in part by the Contractor's negligent acts or omissions during the Contractor's operations; and (2) the Owner as an additional insured for claims caused in whole or in part by the Contractor's negligent acts or omissions during the Contractor's completed operations.

§ 11.1.5 The Contractor's limits of liability shall be written for not less than the following:

.1 GENERAL LIABILITY:

Commercial General Liability (Including XCU)		
General Aggregate	\$1,000,000.00	Aggregate
Products & Completed Operations	1,000,000.00	Aggregate
Personal & Advertising Injury	500,000.00	Per Occurrence
Bodily Injury & Property Damage	1,000,000.00	Per Occurrence
Fire Damage Liability	50,000.00	Per Fire
Medical Expense	5,000.00	Per Person

.2 OWNERS & CONTRACTORS PROTECTIVE LIABILITY:

Bodily Injury & Property Damage	\$1,000,000.00	Aggregate
Bodily Injury & Property Damage	500,000.00	Per Occurrence

.3 AUTOMOBILE LIABILITY

Owned, Non-owned & Hired Vehicle	\$500,000.00	Per Occurrence
Contractor Insurance Option Number 1: Bodily Injury & Property Damage (Combined Single Limit)		
Contractor Insurance Option Number 2: Bodily Injury	250,000.00	Per Person
Bodily Injury	500,000.00	Per Accident
Property Damage	100,000.00	Per Occurrence

.4 EXCESS LIABILITY:

(Umbrella on projects over \$500,000) Bodily Injury & Property Damage (Combined Single Limit)	\$1,000,000.00	Aggregate
---	----------------	-----------

.5 WORKERS' COMPENSATION:

(As required by Statute)

EMPLOYERS' LIABILITY		
Accident	\$100,000.00	Per Occurrence
Disease	500,000.00	Policy Limit
Disease	100,000.00	Per Employee

.6 PROPERTY INSURANCE:

Builder's Risk Or	Equal to Value of Work
Installation Floater	Equal to Value of Work

§ 11.1.6 Furnish one (1) copy of the Standard Construction Contract Certificate of Insurance Form for each copy of the Standard Form of Agreement Between Owner and Contractor specifically setting forth evidence of all coverage required by Subparagraphs 11.1.1, 11.1.2 and 11.1.3. Furnish to the Owner copies of any endorsements that are subsequently issued amending limits of coverage.

§ 11.1.7 If the coverages are provided on a claims-made basis, the policy date or retroactive date shall predate the Contract: the termination date, or the policy, or applicable extended reporting period shall be no earlier than the termination date of coverages required to be maintained after final payment.

§ 11.2 OWNER'S LIABILITY INSURANCE

The Contractor shall purchase and maintain such insurance as will protect the Owner from his contingent liability to others for damages because of bodily injury, including death, and property damage, which may arise from operations under this Contract and other liability for damages which the Contractor is required to insure under any provision of this Contract. Certificate of this insurance will be filed with the Owner and will be the same limits set forth in 11.1.5.

§ 11.3 PROPERTY INSURANCE

§ 11.3.1 The Contractor shall purchase and maintain, in a company or companies lawfully authorized to do business in the jurisdiction in which the Project is located, property insurance written on a builder's risk "all-risk" or equivalent policy form in the amount of the initial Contract Sum, plus value of subsequent Contract Modifications and cost of materials supplied or installed by others, comprising total value for the entire Project at the site on a replacement cost basis without optional deductibles. Such property insurance shall be maintained, unless otherwise provided in the Contract Documents or otherwise agreed in writing by all persons and entities who are beneficiaries of such insurance, until final payment has been made as provided in Section 9.10 or until no person or entity other than the Owner has an insurable interest in the property required by this Section 11.3 to be covered, whichever is later. This insurance shall include interests of the Owner, the Contractor, Subcontractors and Sub-subcontractors in the Project.

§ 11.3.1.1 Property insurance shall be on an "all-risk" or equivalent policy form and shall include, without limitation, insurance against the perils of fire (with extended coverage) and physical loss or damage including, without duplication of coverage, theft, vandalism, malicious mischief, collapse, earthquake, flood, windstorm, falsework, testing and startup, temporary buildings and debris removal including demolition occasioned by enforcement of any applicable legal requirements, and shall cover reasonable compensation for Architect's and Contractor's services and expenses required as a result of such insured loss.

(Paragraph Deleted)

§ 11.3.1.3 If the property insurance requires deductibles, the Contractor shall pay costs not covered because of such deductibles.

§ 11.3.1.4 This property insurance shall cover portions of the Work stored off the site, and also portions of the Work in transit.

§ 11.3.1.5 Partial occupancy or use in accordance with Section 9.9 shall not commence until the insurance company or companies providing property insurance have consented to such partial occupancy or use by endorsement or otherwise. The Owner and the Contractor shall take reasonable steps to obtain consent of the insurance company or companies and shall, without mutual written consent, take no action with respect to partial occupancy or use that would cause cancellation, lapse or reduction of insurance.

(Paragraphs Deleted)

§ 11.3.7 WAIVERS OF SUBROGATION

The Owner and Contractor waive all rights against (1) each other and any of their subcontractors, sub-subcontractors, agents and employees, each of the other, and (2) the Architect, Architect's consultants, separate contractors described in Article 6, if any, and any of their subcontractors, sub-subcontractors, agents and employees, for damages caused by fire or other causes of loss to the extent covered by property insurance obtained pursuant to this Section 11.3 or other property insurance applicable to the Work, except such rights as they have to proceeds of such insurance held by the Owner as fiduciary. The Owner or Contractor, as appropriate, shall require of the Architect, Architect's consultants, separate contractors described in Article 6, if any, and the subcontractors, sub-subcontractors, agents and employees of any of them, by appropriate agreements, written where legally required for validity, similar waivers each in favor of other parties enumerated herein. The policies shall provide such waivers of subrogation by endorsement or otherwise. A waiver of subrogation shall be effective as to a person or entity even though that person or entity would otherwise have a duty of indemnification, contractual or otherwise, did not pay the insurance premium directly or indirectly, and whether or not the person or entity had an insurable interest in the property damaged.

§ 11.3.8 A loss insured under the Owner's property insurance shall be adjusted by the Owner as fiduciary and made payable to the Owner as fiduciary for the insureds, as their interests may appear, subject to requirements of any applicable mortgagee clause and of Section 11.3.10. The Contractor shall pay Subcontractors their just shares of insurance proceeds received by the Contractor, and by appropriate agreements, written where legally required for validity, shall require Subcontractors to make payments to their Sub-subcontractors in similar manner.

§ 11.3.9 If required in writing by a party in interest, the Owner as fiduciary shall, upon occurrence of an insured loss, give bond for proper performance of the Owner's duties. The cost of required bonds shall be charged against proceeds received as fiduciary. The Owner shall deposit in a separate account proceeds so received, which the Owner shall distribute in accordance with such agreement as the parties in interest may reach, or as determined in accordance with the method of binding dispute resolution selected in the Agreement between the Owner and Contractor. If after such loss no other special agreement is made and unless the Owner terminates the Contract for convenience, replacement of damaged property shall be performed by the Contractor after notification of a Change in the Work in accordance with Article 7.

§ 11.3.10 The Owner as fiduciary shall have power to adjust and settle a loss with insurers unless one of the parties in interest shall object in writing within five (5) days after occurrence of loss

§ 11.4 PERFORMANCE BOND AND PAYMENT BOND

§ 11.4.1 The Owner shall have the right to require the Contractor to furnish bonds covering faithful performance of the Contract and payment of obligations arising thereunder as stipulated in bidding requirements or specifically required in the Contract Documents on the date of execution of the Contract.

§ 11.4.2 Upon the request of any person or entity appearing to be a potential beneficiary of bonds covering payment of obligations arising under the Contract, the Contractor shall promptly furnish a copy of the bonds or shall authorize a copy to be furnished.

ARTICLE 12 UNCOVERING AND CORRECTION OF WORK

§ 12.1 UNCOVERING OF WORK

§ 12.1.1 If a portion of the Work is covered contrary to the Architect's request or to requirements specifically expressed in the Contract Documents, it must, if requested in writing by the Architect, be uncovered for the Architect's examination and be replaced at the Contractor's expense without change in the Contract Time.

§ 12.1.2 If a portion of the Work has been covered that the Architect has not specifically requested to examine prior to its being covered, the Architect may request to see such Work and it shall be uncovered by the Contractor. If such Work is in accordance with the Contract Documents, costs of uncovering and replacement shall, by appropriate Change Order, be at the Owner's expense. If such Work is not in accordance with the Contract Documents, such costs and the cost of correction shall be at the Contractor's expense unless the condition was caused by the Owner or a separate contractor in which event the Owner shall be responsible for payment of such costs.

§ 12.2 CORRECTION OF WORK

§ 12.2.1 BEFORE OR AFTER DATE OF COMPLETION

The Contractor shall promptly correct Work rejected by the Architect or failing to conform to the requirements of the Contract Documents, whether discovered before or after Substantial Completion and whether or not fabricated, installed or completed. Costs of correcting such rejected Work, including additional testing and inspections, the cost of uncovering and replacement, and compensation for the Architect's services and expenses made necessary thereby, shall be at the Contractor's expense.

§ 12.2.2 AFTER DATE OF COMPLETION

§ 12.2.2.1 In addition to the Contractor's obligations under Section 3.5, if, within one year after the date of Completion of the Work or designated portion thereof or after the date for commencement of warranties established under Section 9.9.1, or by terms of an applicable special warranty required by the Contract Documents, any of the Work is found to be not in accordance with the requirements of the Contract Documents, the Contractor shall correct it promptly after receipt of written notice from the Owner to do so unless the Owner has previously given the Contractor a written acceptance of such condition. The Owner shall give such notice promptly after discovery of the condition. During the one-year period for correction of Work, if the Owner fails to notify the Contractor and give the Contractor an opportunity to make the correction, the Owner waives the rights to require correction by the Contractor and to make a claim for breach of warranty. If the Contractor fails to correct nonconforming Work within a reasonable time during that period after receipt of notice from the Owner or Architect, the Owner may correct it in accordance with Section 2.4.

§ 12.2.2.2 The one-year period for correction of Work shall be extended with respect to portions of Work first performed after Date of Completion by the period of time between Date of Completion and the actual completion of that portion of the Work.

§ 12.2.2.3 The one-year period for correction of Work shall not be extended by corrective Work performed by the Contractor pursuant to this Section 12.2.

§ 12.2.3 The Contractor shall remove from the site portions of the Work that are not in accordance with the requirements of the Contract Documents and are neither corrected by the Contractor nor accepted by the Owner.

§ 12.2.4 The Contractor shall bear the cost of correcting destroyed or damaged construction, whether completed or partially completed, of the Owner or separate contractors caused by the Contractor's correction or removal of Work that is not in accordance with the requirements of the Contract Documents.

§ 12.2.5 Nothing contained in this Section 12.2 shall be construed to establish a period of limitation with respect to other obligations the Contractor has under the Contract Documents. Establishment of the one-year period for correction of Work as described in Section 12.2.2 relates only to the specific obligation of the Contractor to correct the Work, and has no relationship to the time within which the obligation to comply with the Contract Documents may be sought to be enforced, nor to the time within which proceedings may be commenced to establish the Contractor's liability with respect to the Contractor's obligations other than specifically to correct the Work.

§ 12.3 ACCEPTANCE OF NONCONFORMING WORK

If the Owner prefers to accept Work that is not in accordance with the requirements of the Contract Documents, the Owner may do so instead of requiring its removal and correction, in which case the Contract Sum will be reduced as appropriate and equitable. Such adjustment shall be effected whether or not final payment has been made.

ARTICLE 13 MISCELLANEOUS PROVISIONS

§ 13.1 GOVERNING LAW

The Contract shall be governed by the laws of the State of Mississippi except that, if the parties have selected arbitration as the method of binding dispute resolution, the Federal Arbitration Act shall govern Section 15.4.

§ 13.2 SUCCESSORS AND ASSIGNS

§ 13.2.1 The Owner and Contractor respectively bind themselves, their partners, successors, assigns and legal representatives to covenants, agreements and obligations contained in the Contract Documents. Except as provided in Section 13.2.2, neither party to the Contract shall assign the Contract as a whole without written consent of the other. If either party attempts to make such an assignment without such consent, that party shall nevertheless remain legally responsible for all obligations under the Contract.

§ 13.2.2 The Owner may, without consent of the Contractor, assign the Contract to a lender providing construction financing for the Project, if the lender assumes the Owner's rights and obligations under the Contract Documents. The Contractor shall execute all consents reasonably required to facilitate such assignment.

§ 13.3 WRITTEN NOTICE

Written notice shall be deemed to have been duly served if delivered in person to the individual, to a member of the firm or entity, or to an officer of the corporation for which it was intended; or if delivered at, or sent by registered or certified mail or by courier service providing proof of delivery to, the last business address known to the party giving notice.

§ 13.4 RIGHTS AND REMEDIES

§ 13.4.1 Duties and obligations imposed by the Contract Documents and rights and remedies available thereunder shall be in addition to and not a limitation of duties, obligations, rights and remedies otherwise imposed or available by law.

§ 13.4.2 No action or failure to act by the Owner, Architect or Contractor shall constitute a waiver of a right or duty afforded them under the Contract, nor shall such action or failure to act constitute approval of or acquiescence in a breach there under, except as may be specifically agreed in writing.

§ 13.5 TESTS AND INSPECTIONS

§ 13.5.1 Tests, inspections and approvals of portions of the Work shall be made as required by the Contract Documents and by applicable laws, statutes, ordinances, codes, rules and regulations or lawful orders of public authorities. Unless otherwise provided, the Contractor shall make arrangements for such tests, inspections and approvals with an independent testing laboratory or entity acceptable to the Owner, or with the appropriate public authority, and shall bear all related costs of tests, inspections and approvals. The Contractor shall give the Architect timely notice of when and where tests and inspections are to be made so that the Architect may be present for such procedures. The Owner shall bear costs of (1) tests, inspections or approvals that do not become requirements until after bids are received or negotiations concluded, and (2) tests, inspections or approvals where building codes or applicable laws or regulations prohibit the Owner from delegating their cost to the Contractor.

§ 13.5.2 If the Architect, Owner or public authorities having jurisdiction determine that portions of the Work require additional testing, inspection or approval not included under Section 13.5.1, the Architect will, upon written authorization from the Owner, instruct the Contractor to make arrangements for such additional testing, inspection

or approval by an entity acceptable to the Owner, and the Contractor shall give timely notice to the Architect of when and where tests and inspections are to be made so that the Architect may be present for such procedures. Such costs, except as provided in Section 13.5.3, shall be at the Owner's expense.

§ 13.5.3 If such procedures for testing, inspection or approval under Sections 13.5.1 and 13.5.2 reveal failure of the portions of the Work to comply with requirements established by the Contract Documents, all costs made necessary by such failure including those of repeated procedures and compensation for the Architect's services and expenses shall be at the Contractor's expense.

§ 13.5.4 Required certificates of testing, inspection or approval shall, unless otherwise required by the Contract Documents, be secured by the Contractor and promptly delivered to the Architect.

§ 13.5.5 If the Architect is to observe tests, inspections or approvals required by the Contract Documents, the Architect will do so promptly and, where practicable, at the normal place of testing.

§ 13.5.6 Tests or inspections conducted pursuant to the Contract Documents shall be made promptly to avoid unreasonable delay in the Work.

§ 13.6 INTEREST

Payments due and unpaid under the Contract Documents shall bear interest from the date payment is due at such rate as the parties may agree upon in writing or, in the absence thereof, at the legal rate prevailing from time to time at the place where the Project is located.

§ 13.7 TIME LIMITS ON CLAIMS

The Owner and Contractor shall commence all claims and causes of action, whether in contract, tort, breach of warranty or otherwise, against the other arising out of or related to the Contract in accordance with the requirements of the final dispute resolution method selected in the Agreement within the time period specified by applicable law, but in any case not more than 10 years after the date of Substantial Completion of the Work. The Owner and Contractor waive all claims and causes of action not commenced in accordance with this Section 13.7.

ARTICLE 14 TERMINATION OR SUSPENSION OF THE CONTRACT

§ 14.1 TERMINATION BY THE CONTRACTOR

§ 14.1.1 The Contractor may terminate the Contract if the Work is stopped for a period of 30 consecutive days through no act or fault of the Contractor or a Subcontractor, Sub-subcontractor or their agents or employees or any other persons or entities performing portions of the Work under direct or indirect contract with the Contractor, for any of the following reasons:

- .1** Issuance of an order of a court or other public authority having jurisdiction that requires all Work to be stopped;
- .2** An act of government, such as a declaration of national emergency that requires all Work to be stopped;
- .3** Because the Architect has not issued a Certificate for Payment and has not notified the Contractor of the reason for withholding certification as provided in Section 9.4.1, or because the Owner has not made payment on a Certificate for Payment within the time stated in the Contract Documents; or
- .4** The Owner has failed to furnish to the Contractor promptly, upon the Contractor's request, reasonable evidence as required by Section 2.2.1.

§ 14.1.2 The Contractor may terminate the Contract if, through no act or fault of the Contractor or a Subcontractor, Sub-subcontractor or their agents or employees or any other persons or entities performing portions of the Work under direct or indirect contract with the Contractor, repeated suspensions, delays or interruptions of the entire Work by the Owner as described in Section 14.3 constitute in the aggregate more than 100 percent of the total number of days scheduled for completion, or 120 days in any 365-day period, whichever is less.

§ 14.1.3 If one of the reasons described in Section 14.1.1 or 14.1.2 exists, the Contractor may, upon seven days' written notice to the Owner and Architect, terminate the Contract and recover from the Owner payment for Work executed, including reasonable overhead and profit, costs incurred by reason of such termination, and damages.

§ 14.1.4 If the Work is stopped for a period of 60 consecutive days through no act or fault of the Contractor or a Subcontractor or their agents or employees or any other persons performing portions of the Work under contract with the Contractor because the Owner has repeatedly failed to fulfill the Owner's obligations under the Contract Documents with respect to matters important to the progress of the Work, the Contractor may, upon seven additional days' written notice to the Owner and the Architect, terminate the Contract and recover from the Owner as provided in Section 14.1.3.

§ 14.2 TERMINATION BY THE OWNER FOR CAUSE

§ 14.2.1 The Owner may terminate the Contract if the Contractor

- .1 repeatedly refuses or fails to supply enough properly skilled workers or proper materials;
- .2 fails to make payment to Subcontractors for materials or labor in accordance with the respective agreements between the Contractor and the Subcontractors;
- .3 repeatedly disregards applicable laws, statutes, ordinances, codes, rules and regulations, or lawful orders of a public authority; or
- .4 otherwise is guilty of substantial breach of a provision of the Contract Documents.

§ 14.2.2 When any of the above reasons exist, the Owner, upon certification by the Initial Decision Maker that sufficient cause exists to justify such action, may without prejudice to any other rights or remedies of the Owner and after giving the Contractor and the Contractor's surety, if any, seven days' written notice, terminate employment of the Contractor and may, subject to any prior rights of the surety:

- .1 Exclude the Contractor from the site and take possession of all materials, equipment, tools, and construction equipment and machinery thereon owned by the Contractor;
- .2 Accept assignment of subcontracts pursuant to Section 5.4; and
- .3 Finish the Work by whatever reasonable method the Owner may deem expedient. Upon written request of the Contractor, the Owner shall furnish to the Contractor a detailed accounting of the costs incurred by the Owner in finishing the Work.

§ 14.2.3 When the Owner terminates the Contract for one of the reasons stated in Section 14.2.1, the Contractor shall not be entitled to receive further payment until the Work is finished.

§ 14.2.4 If the unpaid balance of the Contract Sum exceeds costs of finishing the Work, including compensation for the Architect's services and expenses made necessary thereby, and other damages incurred by the Owner and not expressly waived, such excess shall be paid to the Contractor. If such costs and damages exceed the unpaid balance, the Contractor shall pay the difference to the Owner. The amount to be paid to the Contractor or Owner, as the case may be, shall be certified by the Initial Decision Maker, upon application, and this obligation for payment shall survive termination of the Contract.

§ 14.3 SUSPENSION BY THE OWNER FOR CONVENIENCE

§ 14.3.1 The Owner may, without cause, order the Contractor in writing to suspend, delay or interrupt the Work in whole or in part for such period of time as the Owner may determine.

§ 14.3.2 The Contract Time shall be adjusted for increases in the time caused by suspension, delay or interruption as described in Section 14.3.1. No adjustment shall be made to the extent

- .1 that performance is, was or would have been so suspended, delayed or interrupted by another cause for which the Contractor is responsible; or
- .2 that an equitable adjustment is made or denied under another provision of the Contract.

§ 14.4 TERMINATION BY THE OWNER FOR CONVENIENCE

§ 14.4.1 The Owner may, at any time, terminate the Contract for the Owner's convenience and without cause.

§ 14.4.2 Upon receipt of written notice from the Owner of such termination for the Owner's convenience, the Contractor shall

- .1 cease operations as directed by the Owner in the notice;
 - .2 take actions necessary, or that the Owner may direct, for the protection and preservation of the Work;
- and

- .3 except for Work directed to be performed prior to the effective date of termination stated in the notice, terminate all existing subcontracts and purchase orders and enter into no further subcontracts and purchase orders.

§ 14.4.3 In case of such termination for the Owner's convenience, the Contractor shall be entitled to receive payment for Work executed, and costs incurred by reason of such termination, along with reasonable overhead and profit on the Work not executed.

ARTICLE 15 CLAIMS AND DISPUTES

§ 15.1 CLAIMS

§ 15.1.1 DEFINITION

A Claim is a demand or assertion by one of the parties seeking, as a matter of right, payment of money, or other relief with respect to the terms of the Contract. The term "Claim" also includes other disputes and matters in question between the Owner and Contractor arising out of or relating to the Contract. The responsibility to substantiate Claims shall rest with the party making the Claim.

§ 15.1.2 NOTICE OF CLAIMS

Claims by either the Owner or Contractor must be initiated by written notice to the other party and to the Initial Decision Maker with a copy sent to the Architect, if the Architect is not serving as the Initial Decision Maker. Claims by either party must be initiated within 21 days after occurrence of the event giving rise to such Claim or within 21 days after the claimant first recognizes the condition giving rise to the Claim, whichever is later.

§ 15.1.3 CONTINUING CONTRACT PERFORMANCE

Pending final resolution of a Claim, except as otherwise agreed in writing or as provided in Section 9.7 and Article 14, the Contractor shall proceed diligently with performance of the Contract and the Owner shall continue to make payments in accordance with the Contract Documents. The Architect will prepare Change Orders and issue Certificates for Payment in accordance with the decisions of the Initial Decision Maker.

§ 15.1.4 CLAIMS FOR ADDITIONAL COST

If the Contractor wishes to make a Claim for an increase in the Contract Sum, written notice as provided herein shall be given before proceeding to execute the Work. Prior notice is not required for Claims relating to an emergency endangering life or property arising under Section 10.4.

§ 15.1.5 CLAIMS FOR ADDITIONAL TIME

§ 15.1.5.1 If the Contractor wishes to make a Claim for an increase in the Contract Time, written notice as provided herein shall be given. The Contractor's Claim shall include an estimate of cost and of probable effect of delay on progress of the Work. In the case of a continuing delay, only one Claim is necessary.

.1 The Contractor shall anticipate delays in the progress of the Work, due to adverse weather, during the stipulated Contract Time in the amount of days published in recognized official data. If documented evidence (from recognized official data) indicates weather delays in excess of this amount, then the Contractor may be granted an Extension of Time for each Work Day, in excess of the normal days, in which the weather prevented work on the Project Site for fifty (50) percent or more of the Contractor's "Normal Work Day", but only if such prevented work was critical to the timely completion of the project.

- .2** Contractor's "Normal Work Day" shall be defined on the basis of a five (5) Day Work Week. Example: If the "normal" (regular) schedule is a five (5) Day Work Week, meaning Monday through Friday, then a rain on Sunday (since not a scheduled Work Day) will not necessarily delay the Work of the Project. However, site conditions, as a result of the rain, could partially or fully prevent scheduled outside work on Monday (and thereafter) thereby making the Contractor eligible to apply for a Weather Delay Extension of Time on the basis of the conditions stated in the paragraph above.

§ 15.1.5.4 The Contractor shall not be entitled to a separate increase in the Contract Time for each one of the causes of delay which may have concurrent or interrelated affects on the progress of the Work, or for concurrent delays due to the fault of the Contractor

§ 15.1.6 CLAIMS FOR CONSEQUENTIAL DAMAGES

The Contractor and Owner waive Claims against each other for consequential damages arising out of or relating to this Contract. This mutual waiver includes

- .1 damages incurred by the Owner for rental expenses, for losses of use, income, profit, financing, business and reputation, and for loss of management or employee productivity or of the services of such persons; and
- .2 damages incurred by the Contractor for principal office expenses including the compensation of personnel stationed there, for losses of financing, business and reputation, and for loss of profit except anticipated profit arising directly from the Work.

This mutual waiver is applicable, without limitation, to all consequential damages due to either party's termination in accordance with Article 14. Nothing contained in this Section 15.1.6 shall be deemed to preclude an award of liquidated damages, when applicable, in accordance with the requirements of the Contract Documents.

§ 15.2 INITIAL DECISION

§ 15.2.1 Claims, excluding those arising under Sections 10.3, 10.4, 11.3.9, and 11.3.10, shall be referred to the Initial Decision Maker for initial decision. The Project Engineer will serve as the Initial Decision Maker. Except for those Claims excluded by this Section 15.2.1, an initial decision shall be required as a condition precedent to mediation of any Claim arising prior to the date final payment is due, unless 30 days have passed after the Claim has been referred to the Initial Decision Maker with no decision having been rendered. Unless the Initial Decision Maker and all affected parties agree, the Initial Decision Maker will not decide disputes between the Contractor and persons or entities other than the Owner.

§ 15.2.2 The Initial Decision Maker will review Claims and within ten days of the receipt of a Claim take one or more of the following actions: (1) request additional supporting data from the claimant or a response with supporting data from the other party, (2) reject the Claim in whole or in part, (3) approve the Claim, (4) suggest a compromise, or (5) advise the parties that the Initial Decision Maker is unable to resolve the Claim if the Initial Decision Maker lacks sufficient information to evaluate the merits of the Claim or if the Initial Decision Maker concludes that, in the Initial Decision Maker's sole discretion, it would be inappropriate for the Initial Decision Maker to resolve the Claim.

§ 15.2.3 In evaluating Claims, the Initial Decision Maker may, but shall not be obligated to, consult with or seek information from either party or from persons with special knowledge or expertise who may assist the Initial Decision Maker in rendering a decision. The Initial Decision Maker may request the Owner to authorize retention of such persons at the Owner's expense.

§ 15.2.4 If the Initial Decision Maker requests a party to provide a response to a Claim or to furnish additional supporting data, such party shall respond, within ten days after receipt of such request, and shall either (1) provide a response on the requested supporting data, (2) advise the Initial Decision Maker when the response or supporting data will be furnished or (3) advise the Initial Decision Maker that no supporting data will be furnished. Upon receipt of the response or supporting data, if any, the Initial Decision Maker will either reject or approve the Claim in whole or in part.

§ 15.2.5 The Initial Decision Maker will render an initial decision approving or rejecting the Claim, or indicating that the Initial Decision Maker is unable to resolve the Claim. This initial decision shall (1) be in writing; (2) state the reasons therefor; and (3) notify the parties and the Architect, if the Architect is not serving as the Initial Decision Maker, of any change in the Contract Sum or Contract Time or both. The initial decision shall be final and binding on the parties but subject to mediation and, if the parties fail to resolve their dispute through mediation, to binding dispute resolution.

§ 15.2.6 Either party may file for mediation of an initial decision at any time, subject to the terms of Section 15.2.6.1.

§ 15.2.6.1 Either party may, within 30 days from the date of an initial decision, demand in writing that the other party file for mediation within 60 days of the initial decision. If such a demand is made and the party receiving the demand fails to file for mediation within the time required, then both parties waive their rights to mediate or pursue binding dispute resolution proceedings with respect to the initial decision.

§ 15.2.7 In the event of a Claim against the Contractor, the Owner may, but is not obligated to, notify the surety, if any, of the nature and amount of the Claim. If the Claim relates to a possibility of a Contractor's default, the Owner may, but is not obligated to, notify the surety and request the surety's assistance in resolving the controversy.

§ 15.2.8 If a Claim relates to or is the subject of a mechanic's lien, the party asserting such Claim may proceed in accordance with applicable law to comply with the lien notice or filing deadlines.

§ 15.5 ARBITRATION PROCEDURES FOR THE MISSISSIPPI TRANSPORTATION COMMISSION

All matters of dispute arising out of any agreement with the Mississippi Transportation Commission for planning, design, engineering, construction, erection, repair, or alteration of any building, structure, fixture, road, highway, utility or any part thereof, or any agreement with the Mississippi Transportation Commission for architectural, engineering, surveying, planning, and related professional services which provides for mediation or arbitration, shall comply with the following course for resolution. No arbitration hearing shall be granted on any claim in excess of One Hundred Thousand Dollars (\$100,000.00).

§ 15.5.1 **CONDITIONS PRECEDENT TO ARBITRATION** The aggrieved party must first notify opposing party in writing in detail of the matter(s) in dispute, the amount involved and the remedy sought. Such writing shall include copies of any documents, writings, plans, or other matter pertinent to the resolution of the dispute. The Chief Engineer of the Mississippi Department of Transportation, or his authorized representative, and a principal of the opposing party shall be the proper parties for

such notice and shall be active parties in any subsequent dispute resolution.

(Paragraph Deleted)

§ 15.5.2 **REQUESTS FOR ARBITRATION:** Within thirty (30) days of a claim being rejected in writing by the Project Engineer, either party may request arbitration. Notices for requests for arbitration shall be made in writing to the Chief Engineer of the Mississippi Department of Transportation, P. O. Box 1850, Jackson, Mississippi 39215-1850. Such notice shall set forth in detail the matter(s) in dispute, the amount involved, and the remedy sought. A copy of the request shall be mailed to the opposite party. The party requesting arbitration must deposit the sum of two hundred dollars (\$200.00) with its request as a deposit against costs incurred by the arbitrators. Each party will be notified in writing in any manner provided by law of certified mail not less than twenty (20) days before the hearing of the date, time and place for the hearing. Appearance at the hearing waives a party's right to notice.

§ 15.5.3 **SELECTION OF ARBITRATORS:** Upon request for arbitration, a panel of three (3) arbitrators shall be chosen. The Chief Engineer of the Mississippi Department of Transportation shall appoint one (1) member. One (1) member shall be appointed by the Executive Director of a professional or trade association that represents interests similar to that of the non-state party. The first two shall appoint the third member.

§ 15.5.4 **HEARINGS:** All hearings shall be open to the public. All hearings will be held in Jackson, Mississippi, unless the parties mutually agree to another location. The hearings shall be conducted as prescribed by **Mississippi Code 1972, Annotated**, Sections 11-15-113, 11-15-115, and 11-15-117. A full and complete record of all proceedings shall be taken by a certified court reporter. The scheduling and cost of retaining the court reporter shall be the responsibility of the party requesting arbitration. The costs of transcription of the record shall be the responsibility of the party requesting such transcript. No arbitration hearing shall be held without a certified court reporter. Deliberations of the arbitrators shall not be part of the record.

§ 15.5.5 **AWARDS:** Awards shall be made in

writing and signed by the arbitrators joining in the award. A copy of the award shall be delivered to the parties by certified mail.

Init.

§

15.5.6 FEES AND EXPENSES: Reasonable fees and expenses, excluding counsel fees, incurred in the conduct of the arbitrations shall be at the discretion of the Arbitrator except each party shall bear its own attorney's fees and costs of expert witnesses.

§ 15.5.7 MODIFICATIONS, CONFIRMATIONS, AND APPEALS: All modifications, confirmations and appeals shall be as prescribed by **Mississippi Code 1972, Annotated**, Section 11-15-123 et seq. All awards shall be reduced to judgment and satisfied in the same manner other judgments against the State are satisfied.

§ 15.5.8 SECRETARY FOR THE ARBITRATORS: All notices, requests, or other correspondence intended for the arbitrators shall be sent to the Chief Engineer, Mississippi Department of Transportation, P. O. Box 1850, Jackson, Mississippi 39215-1850.

DOCUMENT 00 91 13

ADDENDA

1.1 NOTICE TO BIDDERS

- A. Addenda issued on this Project will become part of the Standard Form of the Agreement Between the Owner and the Contractor.
- B. Addenda will be indicated on the second sheet of Section 905 (end of the Proposal/Project Manual) as addenda.

END OF DOCUMENT

SECTION 01 10 00

SUMMARY

PART 1 - GENERAL

1.01 WORK COVERED BY CONTRACT DOCUMENTS

- A. Work covered by the Contract Documents shall be provided by one (1) General Contractor as one (1) Contract to improve the Mississippi Department of Transportation site in constructing the District 1 Shop Electrical Upgrade, Lee County, Tupelo, Mississippi.

- B. Time of Completion: The completion of this Work is to be on or before the time indicated on the Owner and Contractor Agreement.

- C. Contractor's Duties:
 - 1. Except as specifically noted, provide and pay for:
 - a. Labor, materials, equipment.
 - b. Tools, construction equipment, and machinery.
 - c. Other facilities and services necessary for proper execution and completion of the Work.
 - 2. Utilities: Coordinate with local utility companies for installation and pay for all costs incurred thereby.
 - 3. Pay legally required sales, consumer, use, payroll, privilege and other taxes.
 - 4. Secure and pay for, as necessary for proper execution and completion of Work, and as applicable at time of receipt of bids:
 - a. Permits.
 - b. Government Fees.
 - c. Licenses.
 - 5. Give required notices
 - 6. Comply with codes, ordinances, rules, regulations, orders and other legal requirements of public authorities that bear on performance of Work.
 - 7. Promptly submit written notice to Project Engineer of observed variance of Contract Documents from legal requirements. Appropriate modifications to Contract Documents will adjust necessary changes. Assume responsibility for Work known to be contrary to such requirements, without notice.
 - 8. Enforce strict discipline and good order among employees. Do not employ on Work, unfit persons or persons not skilled in assigned task.
 - 9. Schedule of Values: Submit 8 copies to the MDOT Architectural Services Unit a Schedule of Values as described in Section 01 29 00 of these Specifications. This submittal will be recorded as submittal number one for this Project. When this submittal is approved, a copy will be transmitted to Construction Administration to be used to review and compare to amounts submitted on the CAD-720 form. Other copies will be kept by Architectural Services Unit and distributed to Project Engineer, MDOT Consultants, and Contractor.
 - 10. Sub-Contractor List: Submit 8 copies of a list, acceptable to the MDOT, of all subcontractors to be used on the Project within seven (7) days after written notice of Contract award by the MDOT. The list shall include the Firm's name, contact person, street address, e-mail address, telephone and fax numbers. Submit original to Contract Administration Division Form CAD-720 – REQUEST FOR PERMISSION TO SUBCONTRACT for each subcontractor before they are allowed to perform any Work. Contract Administration Division will provide copies of approved subcontractors to Project Engineer and Architectural Services.
 - 11. Coordination: The Contractor is responsible for the coordination of the total Project. All subcontractors will cooperate with the Contractor so as to facilitate the general progress of the Work. Each trade shall afford all other trades

every reasonable opportunity for the installation of their Work. Refer to Section 01 31 00– Project Management & Coordination.

1.02 CONTRACTOR'S USE OF PREMISES

- A. Confine operations at the site to areas permitted by:
 - 1. Law
 - 2. Ordinances
 - 3. Permits
 - 4. Contract Documents
 - 5. Owner
- B. Do not unreasonably encumber site with materials or equipment.
- C. Do not load structure with weight that will endanger structure.
- D. Assume full responsibility for protection and safekeeping of products stored on premises.
- E. Move stored products which interfere with operations of MDOT or other Contractors
- F. Obtain and pay for use of additional storage of work areas needed for operations.
- G. Limit use of site for work and storage to the area indicated on the Drawings.

1.03 ACCESS TO SITE

- A. General: Contractor shall have limited use of Project site for construction operations as indicated on Drawings by the Contract limits and as indicated by requirements of this Section.
- B. Use of Site: Limit use of Project site to areas within the Contract limits indicated. Do not disturb portions of Project site beyond areas in which the Work is indicated.
 - 1. Driveways, Walkways and Entrances: Keep driveways and entrances serving premises clear and available to Owner, Owner's employees, and emergency vehicles at all times. Do not use these areas for parking or storage of materials.
 - a. Schedule deliveries to minimize use of driveways and entrances by construction operations.
 - b. Schedule deliveries to minimize space and time requirements for storage of materials and equipment on-site.

1.04 COORDINATION WITH OCCUPANTS

- A. Partial Owner Occupancy: Owner will occupy the premises during entire construction period, with the exception of areas under construction. Cooperate with Owner during construction operations to minimize conflicts and facilitate Owner usage. Perform the Work so as not to interfere with Owner's operations. Maintain existing exits unless otherwise indicated.
 - 1. Maintain access to existing walkways, and other adjacent occupied or used facilities. Do not close or obstruct walkways, or other occupied or used facilities without written permission from Owner and authorities having jurisdiction.

2. Provide not less than 72 hours' notice to Owner of activities that will affect Owner's operations.
 3. The Contractor will be allowed one (1) seven-day period, in which the building will be completely vacated, to allow for final connections and swap-over to new services.
- B. Owner Limited Occupancy of Completed Areas of Construction: Owner reserves the right to occupy and to place and install equipment in completed portions of the Work, prior to Final Completion of the Work, provided such occupancy does not interfere with completion of the Work. Such placement of equipment and limited occupancy shall not constitute acceptance of the total Work.
1. Before limited Owner occupancy, mechanical and electrical systems shall be fully operational, and required tests and inspections shall be successfully completed. On occupancy, Owner will operate and maintain mechanical and electrical systems serving occupied portions of Work.
 2. On occupancy, Owner will assume responsibility for maintenance and custodial service for occupied portions of Work.
- 1.05 WORK RESTRICTIONS
- A. Work Restrictions, General: Comply with restrictions on construction operations.
1. Comply with limitations on use of public streets and with other requirements of authorities having jurisdiction.
 2. 50% of shop bays must remain operational, and Owner must be granted full access throughout duration of the project.
- B. On-Site Work Hours: Work will be allowed 24 hours per day, 7 days a week, unless directed otherwise by Project Engineer.
1. Building will be occupied from 6:00 a.m. – 5:00 p.m., Monday – Thursday
 2. Building will be unoccupied all day on Fridays
- C. Existing Utility Interruptions: Do not interrupt utilities serving facilities occupied by Owner or others unless permitted under the following conditions and then only after providing temporary utility services according to requirements indicated:
1. Notify Project Engineer not less than two days in advance of proposed utility interruptions.
 3. Obtain Project Engineer's written permission before proceeding with utility interruptions.
- D. Noise, Vibration, and Odors: Coordinate operations that may result in high levels of noise and vibration, odors, or other disruption to Owner occupancy with Owner.
1. Notify Project Engineer not less than two days in advance of proposed disruptive operations.
 2. Obtain Project Engineer's written permission before proceeding with disruptive operations.
- E. Nonsmoking Building: Smoking is not permitted within the building or within 25 feet of entrances, operable windows, or outdoor-air intakes.

1.06 SPECIFICATION AND DRAWING CONVENTIONS

- A. Specification Format: The Specifications are organized into Groups, Subgroups, Divisions and Sections using CSI/CSC's "MasterFormat" 2004 Edition numbering system.
- B. Specification Content: The Specifications use certain conventions for the style of language and the intended meaning of certain terms, words, and phrases when used in particular situations. These conventions are as follows:
 - 1. Abbreviated Language: Language used in the Specifications and other Contract Documents is abbreviated. Words and meanings shall be interpreted as appropriate. Words implied, but not stated, shall be inferred as the sense requires. Singular words shall be interpreted as plural, and plural words shall be interpreted as singular where applicable as the context of the Contract Documents indicates.
 - 2. Imperative mood and streamlined language are generally used in the Specifications. The words "shall," "shall be," or "shall comply with," depending on the context, are implied where a colon (:) is used within a sentence or phrase.
 - 3. Specification requirements are to be performed by Contractor unless specifically stated otherwise.
- C. Division 01 General Requirements: Requirements of Sections in Division 01 apply to the Work of all Sections in the Specifications.
- D. Drawing Coordination: Requirements for materials and products identified on Drawings are described in detail in the Specifications. One or more of the following are used on Drawings to identify materials and products:
 - 1. Terminology: Materials and products are identified by the typical generic terms used in the individual Specifications Sections.
 - 2. Abbreviations: Materials and products are identified by abbreviations published as part of the U.S. National CAD Standard and scheduled on Drawings.
 - 3. Keynoting: Materials and products are identified by reference keynotes referencing Specification Section numbers found in this Project Manual.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION

SECTION 01 25 00

SUBSTITUTION PROCEDURES

PART 1 - GENERAL

1.01 SUMMARY

- A. Section includes administrative and procedural requirements for substitutions.
- B. Related Requirements:
 - 1. Section 01 33 00 "Submittal Procedures" for submittal requirements.
 - 2. Section 01 60 00 "Product Requirements" for requirements for submitting comparable product submittals for products by listed manufacturers.

1.02 ACTION SUBMITTALS

- A. The MDOT Architect and his Consultants WILL NOT consider requests for substitutions during bidding. ONLY ONE REQUEST per product will be allowed.
- B. Substitution Requests: Within 60 days after Notice to proceed, submit four copies of each request for consideration. Identify product or fabrication or installation method to be replaced. Include Specification Section number and title and Drawing numbers and titles.
 - 1. Substitution Request Form: Use facsimile of form provided in Project Manual.
 - 2. Documentation: Show compliance with requirements for substitutions and the following, as applicable:
 - a. Statement indicating why specified product or fabrication or installation cannot be provided, if applicable.
 - b. Coordination information, including a list of changes or revisions needed to other parts of the Work and to construction performed by Owner and separate contractors, that will be necessary to accommodate proposed substitution.
 - c. Detailed comparison of significant qualities of proposed substitution with those of the Work specified. Include annotated copy of applicable Specification Section. Significant qualities may include attributes such as performance, weight, size, durability, visual effect, sustainable design characteristics, warranties, and specific features and requirements indicated. Indicate deviations, if any, from the Work specified.
 - d. Product Data, including drawings and descriptions of products and fabrication and installation procedures.
 - e. Samples, where applicable or requested.
 - f. Certificates and qualification data, where applicable or requested.
 - g. List of similar installations for completed projects with project names and addresses and names and addresses of architects and owners.
 - h. Material test reports from a qualified testing agency indicating and interpreting test results for compliance with requirements indicated.
 - i. Research reports evidencing compliance with building code in effect for Project, from ICC-ES (International Code Council Evaluation Service).
 - j. Detailed comparison of Contractor's construction schedule using proposed substitution with products specified for the Work, including effect on the overall Contract Time. If specified product or method of construction cannot be provided within the Contract Time, include letter from manufacturer, on manufacturer's letterhead, stating date of receipt of purchase order, lack of availability, or delays in delivery.

- k. Cost information, including a proposal of change, if any, in the Contract Sum.
- l. Contractor's certification that proposed substitution complies with requirements in the Contract Documents except as indicated in substitution request, is compatible with related materials, and is appropriate for applications indicated.
- m. Contractor's waiver of rights to additional payment or time that may subsequently become necessary because of failure of proposed substitution to produce indicated results.
- 3. MDOT Architect's Action: If necessary, MDOT Architect will request additional information or documentation for evaluation within ten days of receipt of a request for substitution. MDOT Architect will notify Contractor through Project Engineer of acceptance or rejection of proposed substitution within 15 days of receipt of request, or ten days of receipt of additional information or documentation, whichever is later.
 - a. Forms of Acceptance: Change Order, Construction Change Directive, or Architect's Supplemental Instructions for minor changes in the Work.
 - b. Use product specified if MDOT Architect does not issue a decision on use of a proposed substitution within time allocated.

1.03 QUALITY ASSURANCE

- A. Compatibility of Substitutions: Investigate and document compatibility of proposed substitution with related products and materials. Engage a qualified testing agency to perform compatibility tests recommended by manufacturers.

PART 2 - PRODUCTS

2.01 SUBSTITUTIONS

- A. Substitutions for Cause: Submit requests for substitution immediately on discovery of need for change, but not later than 15 days prior to time required for preparation and review of related submittals. ONLY ONE REQUEST per product will be allowed.
- 1. Conditions: Architect will consider Contractor's request for substitution when the following conditions are satisfied:
 - a. Requested substitution is consistent with the Contract Documents and will produce indicated results.
 - b. Contractor has personally investigated proposed product or method, compared the product specified with the proposed substitution, and determined that it is equal or superior in all respects to that specified.
 - c. Cost data is complete and includes all related costs under his Contract.
 - d. Contractor waives all claims for additional costs related to substitution that consequently becomes apparent.
 - e. Requested substitution will not adversely affect Contractor's construction schedule.
 - f. Requested substitution has received necessary approvals of authorities having jurisdiction.
 - g. Requested substitution is compatible with other portions of the Work.
 - h. Requested substitution has been coordinated with other portions of the Work.
 - i. Requested substitution provides specified warranty.

- B. Substitutions for Convenience: Architect will consider requests for substitution if received within 30 days after the Notice to Proceed. ONLY ONE REQUEST per product will be allowed.
1. Conditions: Architect will consider Contractor's request for substitution when the following conditions are satisfied:
- a. Requested substitution offers Owner a substantial advantage in cost, time, energy conservation, or other considerations, after deducting additional responsibilities Owner must assume. Owner's additional responsibilities may include compensation to MDOT Architect's Consultants for redesign and evaluation services, increased cost of other construction by Owner, and similar considerations.
 - b. Contractor has personally investigated proposed product or method, compared the product specified with the proposed substitution, and determined that it is equal or superior in all respects to that specified.
 - c. Cost data is complete and includes all related costs under his Contract.
 - d. Contractor waives all claims for additional costs related to substitution that consequently becomes apparent.
 - e. Requested substitution does not require extensive revisions to the Contract Documents.
 - f. Requested substitution is consistent with the Contract Documents and will produce indicated results.
 - g. Requested substitution will not adversely affect Contractor's construction schedule.
 - h. Requested substitution has received necessary approvals of authorities having jurisdiction.
 - i. Requested substitution is compatible with other portions of the Work.
 - j. Requested substitution has been coordinated with other portions of the Work.
 - k. Requested substitution provides specified warranty.

PART 3 - EXECUTION

3.01 SUBSTITUTION FORMS

- A. Product Substitution Request Form and Contractor's Statement of Conformance are listed on following pages.

PRODUCT SUBSTITUTION REQUEST FORM

PROJECT: _____ PROJECT NO. _____

OWNER: _____

CONTRACTOR: _____

ARCHITECT: _____

CONTRACTOR'S REQUEST, WITH SUPPORTING DATA

1. Section of the Specifications to which this request applies:

☐ Product data for specified item and proposed substitution is attached (description of product, reference standards, performance and test data).

☐ Sample is attached

2. Itemized comparison of proposed substitution with product specified.

ORIGINAL PRODUCT

SUBSTITUTION

Name, brand _____

Catalog No. _____

Manufacturer _____

Significant variations: _____

Reason for Substitution:

3. Proposed change in Contract Sum:

Credit to Owner: \$ _____

Additional Cost to Owner: \$ _____

4. Effect of the proposed substitution on the Work:

Contract Time: _____

CONTRACTORS STATEMENT OF CONFORMANCE OF PROPOSED
SUBSTITUTION TO CONTRACT REQUIREMENTS

I / We have investigated the proposed substitution. I / We

1. Believe that it is equal or superior in all respects to originally specified product, except as stated in 2. above;
2. Will provide same warranty as required in Contract Documents;
3. Have included all cost data and cost implications of proposed substitution; including, if required, costs to other contractors, and redesign and special inspection costs caused by use of proposed substitution;
4. Will coordinate incorporation of proposed substitution in the Work;
5. Will modify other parts of the Work as may be needed, to make all parts of the Work complete and functioning;
6. Have verified that use of this substitution conforms to all applicable codes.
7. Waive future claims for added cost to Owner caused by proposed substitution.

CONTRACTOR _____ DATE: _____
Signature

MDOT ARCHITECT'S REVIEW AND ACTION

- ___ Accepted
- ___ Not Accepted
- ___ Provide more information in the following categories and resubmit _____
- ___ Sign Contractor's Statement of Conformance and resubmit
- ___ Proposed substitution is accepted, with the following conditions:

Change Order (Supplemental Agreements) will make the following changes:

(Add to) (Deduct from) Contract Sum: \$ _____

(Add to) (Deduct from) Contract Time: _____ days

ARCHITECT: _____ DATE _____

OWNER: _____ DATE _____

___ Accepted ___ Not accepted

END OF SECTION

SECTION 01 26 00

CONTRACT MODIFICATION PROCEDURES

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes administrative and procedural requirements for handling and processing Contract modifications (Supplemental Agreements) by the Project Engineer and the Contractor.

1.2 CHANGE ORDER (SUPPLEMENTAL AGREEMENT) PROCEDURES

- A. Change Proposed by the Project Engineer: The Project Engineer may issue a Proposal Request to the Contractor which includes a detailed description of a proposed change with supplementary or revised Drawings and Specifications and a change in Contract Time for executing the change. The Contractor shall prepare and submit an estimate within 10 days.
- B. Change Proposed by the Contractor: The Contractor may propose a change by submitting a request for change to the Project Engineer, describing the proposed change and its full effect on the Work, with a statement describing the reason for the change, and the effect on the Contract Sum and Contract Time with full documentation and a statement describing the effect on Work by separate or other Contractors. Document requested substitutions in accordance with Section 01 25 00 Substitution Procedures and Section 01 60 00 Product Requirements.
- C. Contractor's Documentation:
 - 1. Maintain detailed records of Work completed on a time and material basis. Provide full information required for evaluation of proposed changes, and substantiate costs of changes in the Work.
 - 2. Document each quotation for a change in cost or time with sufficient data allowing evaluation of the quotation.
 - 3. On request, provide additional data to support computations:
 - a. Quantities of products, labor, and equipment.
 - b. Taxes, insurance and bonds.
 - c. Overhead and profit.
 - d. Justification for change in Contract Time.
 - e. Credit for deletions from Contract, similarly documented.
 - 4. Support each claim for additional costs, and for work completed on a time and material basis, with additional information:
 - a. Origin and date of claim.
 - b. Dates and time work was performed and by whom.
 - c. Time records and wage rates paid.
 - d. Invoices and receipts for products, equipment, and subcontracts, similarly documented.
- D. Construction Change Directive: The Project Engineer may issue a document, approved by the Owner, instructing the Contractor to proceed with a change in the Work, for subsequent inclusion in a Change Order (Supplemental Agreement). The document will describe changes in the Work, and will designate method of determining any change in the Contract Sum or Contract Time. The change in Work will be promptly executed.

- E. Format: The Project Engineer will prepare 5 originals of the Change Order (Supplemental Agreement) using the Mississippi Department of Transportation's Change Order (Supplemental Agreement) Form.
- F. Types of Change Orders (Supplemental Agreements):
 - 1. Stipulated Sum Change Orders: Based on Proposal Request and Contractor's fixed price quotation, or Contractor's request for a Change Order (Supplemental Agreement) as approved by the Project Engineer and the MDOT Architect.
 - 2. Unit Price Change Order: For pre-determined unit prices and quantities, the Change Order (Supplemental Agreement) will be executed on a fixed unit price basis. For unit costs or quantities of units of work, which are not pre-determined, execute Work under a Construction Change Directive. Changes in Contract Sum or Contract Time will be computed as specified for Time and Material Change Order (Supplemental Agreement).
 - 3. Time and Material Change Order (Supplemental Agreement): Submit itemized account and supporting data after completion of change, within time limits indicated in the Standard Form of Agreement Between the Owner and the Contractor. The Project Engineer will determine the change allowable in Contract Sum and Contract Time as provided in the Contract Documents. The Contractor shall maintain detailed records of Work accomplished on Time and Material basis and shall provide full information required for evaluation of proposed changes, and to substantiate costs for changes in the Work.
- G. Execution of Change Order (Supplemental Agreement): The Project Engineer will issue Change Orders (Supplemental Agreements) for signatures of parties as provided in the Standard Form of Agreement Between the Owner and the Contractor. Final execution of all Change Orders (Supplemental Agreements) requires approval by the Owner.
- H. Correlation of Contractor Submittals: The Contractor shall promptly revise Schedule of Values and the Application for Payment forms to record each authorized Change Order (Supplemental Agreement) as a separate line item and adjust the Contract Sum. Promptly revise progress schedules to reflect any change in Contract Time, revise sub-schedules to adjust time for other items of Work affected by the change and resubmit. Promptly enter changes in Project Record Documents.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION

SECTION 01 29 00

PAYMENT PROCEDURES

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes administrative and procedural requirements necessary to prepare and process Applications for Payment.
- B. Related Requirements:
 - 1. Section 01 26 00 "Contract Modification Procedures" for administrative procedures for handling changes to the Contract.
 - 2. Section 01 32 00 "Construction Progress Documentation" for administrative requirements governing the preparation and submittal of the Contractor's construction schedule.

1.2 SCHEDULE OF VALUES

- A. Scope: Submit electronic pdf copy of the Schedule of Values to the MDOT Architect, with a copy to the Project Engineer, at least 10 days prior to submitting first Application for Payment. Upon Project Engineer's request, support the values given with data substantiating their correctness. Payment for materials stored on site will be limited to those listed in Schedule of Unit Material Values (refer to Article 9 of the General Conditions, AIA Document A201™-2007 Amended for requirements). Use Schedule of Values only as basis for contractor's Application for Payment
- B. This copy of the Schedule of Values will be reviewed as Submittal No.1. A copy of this submittal will be reviewed by the MDOT Architect and Consultants. One copy will be retained by MDOT Architectural Services Unit, one by Structural Consultant, Civil Consultant, and Mechanical / Electrical Consultants, one sent to Contract Administration for use in reviewing requests for Permission to Sub-Contract (CAD-720 Form), one sent to the Project Engineer, and one returned to the Contractor.
- C. Form of Submittal: Submit typewritten Schedule of Values on AIA Document G703-1992, using Table of Contents of this Specification as basis for format for listing costs of Work for Sections under Divisions 02 - 49. Identify each line item with number and title as listed in Table of Contents of this Specification.
- D. Preparing Schedule of Values:
 - 1. Itemize separate line item costs for each of the following general cost items: Performance and Payment Bonds, field supervision and layout, temporary facilities and controls, and closeout documents.
 - 2. Itemize separate line item cost for Work required by each Section of this specification. Breakdown installed cost with overhead and profit.
 - 3. Each line item, which has installed value of more than \$20,000, break down costs to list major products for operations under each item; rounding figures to nearest dollar. Make sum of total costs of all items listed in schedule equal to total Contract Sum.

E. Preparing Schedule of Unit Material Values:

1. Submit separate schedule of unit prices for materials to be stored on which progress payments will be made. Make form of submittal parallel to Schedule of Values with each line item identified same as line item in Schedule of Values. Include in unit prices only: Cost of material, delivery and unloading site, and sales tax.
2. Make sure unit prices (if required) multiplied by quantities equal material cost of that item in Schedule of Values.

F. Review and Re-submittal: After Project Engineer / MDOT Architect's review, if requested, revise and resubmit schedule in same manner

1.3 METHOD FOR PAYMENT

- A. The method of measurement and payment shall conform to the applicable provisions of Article 9 of the AIA Document A201-2007 General Conditions of the Contract for Construction.

1.4 APPLICATIONS FOR PAYMENT

A. Format:

1. Applications for Payments will be prepared on AIA forms G702-Application and Certificate for payment and G703-Continuation Sheet; or, a computer generated form containing similar data may be used.

B. Preparation of Application:

1. Present required information in type written form.
2. Execute certification by signature of authorized officer.
3. Use data from approved Schedule of Values. Provide dollar value in each column for each line item for portion of Work performed and for stored products.
4. List each authorized Change Order (Supplemental Agreement) as an extension on continuation sheet, listing Change Order (Supplemental Agreement) number and dollar amount as for an original Item of Work.
5. Prepare Application for Final Payment as specified in Section 01 77 00-Closeout Procedures.

C. Submittal Procedures:

1. Submit electronic pdf copy of each Application for Payment to the Project Engineer and to the MDOT Architect.
2. Submit an updated construction schedule with each Application for Payment as described in Section 01 32 00-Construction Progress Documentation.
3. Submit request for payment at intervals agreed upon by the Project Engineer, Owner, and Contractor.
4. Submit requests to the Project Engineer at agreed upon times, or as may be directed otherwise.

D. Substantiating Data:

1. Submit data justifying dollar amounts in question when such information is needed.
2. Provide one copy of the data with a cover letter for each submittal.
3. Indicate the Application number, date and line item number and description.

1.5 STATEMENTS AND PAYROLLS

- A. The submission by the Contractor of the actual weekly payrolls showing all employees, hours worked, hourly rates, overtime hours, etc., or copies thereof, is not required to be turned in. However, each Contractor and Subcontractor shall preserve weekly payroll records for a period of three years from the date of Contract completion. All Contractor personnel working at the project site will be paid unconditionally and not less often than once a week without subsequent deduction or rebate on any account, except such payroll deductions as are permitted by regulations, the full amounts of wages and bona fide fringe benefits due at time of payment.
- B. The payroll records shall contain the name, with an individually identifying number for each employee, classification, rate of pay, daily and weekly number of hours worked, itemized deductions and actual wages paid to each employee.
- C. Upon request, the Contractor will make payroll records available at the project site for inspection by the Department Compliance Officer or authorized representative and will permit such officer or representative to interview employees on the job during working hours.
- D. The Contractor and Subcontractors shall submit Form CAD-880, "Weekly Summary of Wage Rates", each week to the Project Engineer. The forms may be obtained from the Contract Compliance Officer, Contract Administration Division, Mississippi Department of Transportation, Jackson, Mississippi. Custom forms, approved by Contract Administration Division, may be used in lieu of CAD forms.
- E. The Contractor shall make all efforts necessary to submit this information to the Project Engineer in a timely manner. The Engineer will have the authority to suspend the work wholly or in part and to withhold payments because of the Contractor's failure to submit the required information. Submission of forms and payrolls shall be current through the first week of the estimate period in order for the Project Engineer to process an estimate.

1.6 BASIS OF PAYMENT

A. This Work will be paid for by Contract Sum for the construction in District One. The Work includes District 1 Shop Electrical Upgrade, Lee County, Tupelo, Mississippi. The Contract Sum shall be full compensation for all work, for furnishing all materials, and all other Work and effort of whatever nature in the construction of the buildings, installation of underground and other equipment, and final clean-up of the area. It shall also be complete compensation for all equipment, tools, labor, and incidentals necessary to complete the Work.

B. Payment will be made under:

1. Description A:
MDOT Project No. BWO-1051-41(004) 503808
District 1 Shop Electrical Upgrade,
Lee County, Tupelo, Mississippi

lump sum

TOTAL PROJECT CONTRACT SUM

LUMP SUM

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION

SECTION 01 31 00

PROJECT MANAGEMENT AND COORDINATION

PART 1 - GENERAL

1.1 SUMMARY

- A. Scope: Section includes administrative provisions for coordinating construction operations on Project including, but not limited to, the following:
 - 1. Project Management.
 - 2. Requests for Information (RFIs).
 - 3. Project meetings.
- B. Project Coordinator: The General Contractor shall designate one individual as Project Coordinator (Superintendent), as referred to in the General Conditions. Prior to beginning Work his name, qualifications and address shall be submitted, in writing, to the MDOT Executive Director with copies to the Construction Engineer, Contract Administration Engineer, District Engineer, Project Engineer and MDOT Architect. Upon approval, he will remain until the Project is completed and cannot be removed during construction without just cause and without the written consent of the Project Engineer.
- C. Related Requirements:
 - 1. Section 01 73 00 "Execution" for procedures for coordinating general installation and field-engineering services, including establishment of benchmarks and control points.

1.2 INFORMATIONAL SUBMITTALS

- A. Key Personnel List: Within 15 days of starting construction operations, submit a list of key personnel assignments, including superintendent and other personnel in attendance at Project site.
 - 1. Identify individuals and their duties and responsibilities; list addresses and telephone numbers, including home and office telephone numbers.
 - 2. Provide names, addresses, and telephone numbers of individuals assigned as standbys in the absence of individuals assigned to Project
- B. Subcontract List: Prepare a written summary identifying individuals or firms proposed for each portion of the Work, including those who are to furnish products or equipment fabricated to a special design. Use CSI Form 1.5A. Include the following information in tabular form:
 - 1. Name, address, and telephone number of entity performing subcontract or supplying products.
 - 2. Number and title of related Specification Section(s) covered by subcontract.
 - 3. Drawing number and detail references, as appropriate, covered by subcontract.

1.3 DUTIES OF PROJECT COORDINATOR (SUPERINTENDENT)

- A. General: Coordinate construction operations included in different Sections of the Specifications to ensure efficient and orderly installation of each part of the Work. Coordinate construction operations, included in different Sections that depend on each other for proper installation, connection, and operation.
 - 1. Coordination: Coordinate the work of all subcontractors and material suppliers.
 - 2. Supervision: Supervise the activities of every phase of Work taking place on the project.
 - 3. Contractor's Daily Job Diary: Submit copy of daily job diary to Project Engineer and MDOT Architect each Monday for previous week.
 - 4. Electrical: Take special care to coordinate and supervise the Work of electrical and other subcontractors.
 - 5. Communication: Establish lines of authority and communication at the job site.
 - 6. Location: The Project Coordinator (Superintendent) must be present on the job site at all times while work is in progress. Superintendent shall advise Project Engineer of an intended absence from the work and designate a person to be in charge of the Work during such absence.
 - 7. Permits: Assist in obtaining building and special permits required for construction.
- B. Interpretations of Contract Documents:
 - 1. Consultation: Consult with Project Engineer to obtain interpretations.
 - 2. Assistance: Assist in resolution of questions.
 - 3. Transmissions: Transmit written interpretations to concerned parties.
- C. Cessation of Work: Stop all Work not in accordance with the requirements of the Contract Documents.
- D. Division 01: Coordinate and assist in the preparation of all requirements of Division 01 and specifically as follows:
 - 1. Enforce safety requirements.
 - 2. Schedule of Value: Assist in preparation and be knowledgeable of each entry in the Schedule of Values.
 - 3. Cutting and Patching: Supervise and control all cutting and patching of other trades work.
 - 4. Project Meetings: Schedule with Project Engineer's approval and attend all project meetings.
 - 5. Construction Schedules: Prepare and submit all construction schedules. Supervise Work to monitor compliance with schedules.
 - 6. Shop Drawings, Product Data and Samples: Administer the processing of all submittals required by the Project Manual.
 - 7. Testing: Coordinate all required testing.
 - 8. Temporary Facilities and Controls: Allocate, maintain and monitor all temporary facilities.
 - 9. Substitutions: Administer the processing of all substitutions.
 - 10. Cleaning: Direct and execute a continuing (daily) cleaning program throughout construction, requiring each trade to dispose of their debris.
 - 11. Project Closeout: Collect and present all closeout documents to the Project Engineer.
 - 12. Project Record Documents: Maintain up-to-date Project Record Documents.

- E. Changes: Recommend and assist in the preparation of requests to the Project Engineer for any changes in the Contract.
- F. Application for Payment: Assist in the preparation and be knowledgeable of each entry in the Application and Certificate for Payment.

1.4 COORDINATION AND PROJECT CONDITIONS

- A. Coordinate scheduling, submittals, and Work of the various sections of the Project Manual to ensure efficient and orderly sequence of installation of interdependent construction elements, with provisions for accommodating items installed later.
- B. Verify utility requirements and characteristics of operating equipment are compatible with building utilities. Coordinate work of various sections having interdependent responsibilities for installing, connecting to, and placing in service, such equipment.
- C. Coordinate space requirements, supports, and installation of Mechanical and Electrical Work that are indicated diagrammatically on Drawings. Follow routing shown for pipes, ducts, and conduit, as closely as practicable; place runs parallel with lines of building. Utilize spaces efficiently to maximize accessibility for other installations, for maintenance, and for repairs.
- D. Coordinate completion and clean-up of Work of separate sections in preparation for Substantial Completion and for portions of Work designated for Owner's partial occupancy, if required.
- E. After Owner occupancy of premises, coordinate access to site for correction of defective Work and Work not in accordance with Contract Documents, to minimize disruption of Owner's activities.

1.5 SUBCONTRACTOR'S DUTIES

- A. The Subcontractor is responsible to coordinate and supervise his employees in the Work accomplished under his part of the Contract.
- B. Schedules: Conduct Work to assure compliance with construction schedules.
- C. Suppliers: Transmit all instructions to his material suppliers.
- D. Cooperation: Cooperate with the Project Coordinator and other subcontractors.

1.6 REQUESTS FOR INFORMATION (RFIs)

- A. General: Immediately on discovery of the need for additional information or interpretation of the Contract Documents, Contractor shall prepare and submit an RFI in the form specified.
 - 1. MDOT Architect will return RFIs submitted to MDOT Architect by other entities controlled by Contractor with no response.
 - 2. Coordinate and submit RFIs in a prompt manner so as to avoid delays in Contractor's work or work of subcontractors.
- B. Content of the RFI: Include a detailed, legible description of item needing information or interpretation and the following:

1. Project name.
 2. Project number.
 3. Date.
 4. Name of Contractor.
 5. Name of Architect
 6. RFI number, numbered sequentially.
 7. RFI subject.
 8. Specification Section number and title and related paragraphs, as appropriate.
 9. Drawing number and detail references, as appropriate.
 10. Field dimensions and conditions, as appropriate.
 11. Contractor's suggested resolution. If Contractor's solution(s) impacts the Contract Time or the Contract Sum, Contractor shall state impact in the RFI.
 12. Contractor's signature.
 13. Attachments: Include sketches, descriptions, measurements, photos, Product Data, Shop Drawings, coordination drawings, and other information necessary to fully describe items needing interpretation.
 14. RFI Forms: CSI Form 13.2A. Identify each page of attachments with the RFI number and sequential page number.
- C. MDOT Architect's Action: MDOT Architect will review each RFI, determine action required, and respond. Allow seven working days for Architect's response for each RFI. RFIs received by MDOT Architect after 1:00 p.m. will be considered as received the following working day.
1. The following RFIs will be returned without action:
 - a. Requests for approval of submittals.
 - b. Requests for approval of substitutions.
 - c. Requests for coordination information already indicated in the Contract Documents.
 - d. Requests for adjustments in the Contract Time or the Contract Sum.
 - e. Requests for interpretation of Architect's actions on submittals.
 - f. Incomplete RFIs or inaccurately prepared RFIs.
 2. MDOT Architect's action may include a request for additional information, in which case MDOT Architect's time for response will date from time of receipt of additional information.
 3. MDOT Architect's action on RFIs that may result in a change to the Contract Time or the Contract Sum may be eligible for Contractor to submit Change Proposal according to Section 01 26 00 "Contract Modification Procedures."
 - a. If Contractor believes the RFI response warrants change in the Contract Time or the Contract Sum, notify MDOT Architect in writing within 7 days of receipt of the RFI response.
- D. On receipt of MDOT Architect's action, update the RFI log and immediately distribute the RFI response to affected parties. Review response and notify Architect within seven days if Contractor disagrees with response.
- E. RFI Log: Prepare, maintain, and submit a tabular log of RFIs organized by the RFI number. Submit log the first week of each month. Use CSI Log Form 13.2B. Include the following:
1. Project name.
 2. Name and address of Contractor.
 3. Name and address of Architect.
 4. RFI number including RFIs that were dropped and not submitted.
 5. RFI description.

6. Date the RFI was submitted.
 7. Date MDOT Architect's response was received.
- F. On receipt of MDOT Architect's action, update the RFI log and immediately distribute the RFI response to affected parties. Review response and notify MDOT Architect within seven days if Contractor disagrees with response.
1. Identification of related Minor Change in the Work, Construction Change Directive, and Proposal Request, as appropriate.
 2. Identification of related Field Order, Work Change Directive, and Proposal Request, as appropriate.
- 1.7 PROJECT MEETINGS
- A. General: Schedule and conduct meetings and conferences at Project site unless otherwise indicated. Project Meetings shall be held for the following reasons:
1. Establish an understanding of what is expected from everyone involved.
 2. Enable an orderly Project review during the progress of the Work.
 3. Provide for systematic discussion of problems and effect remedies and clarifications.
 4. Coordination of the Work.
 5. Review installation procedures and schedules.
- B. Scheduling and Administration: The Project Engineer shall schedule and preside over all meetings throughout the progress of the Work. Duties include the following:
1. Review, modify / approve minutes of the previous meeting.
 2. Discuss items that have been done the previous month and anticipated work to be done within the next month.
 3. Review Contractor's Pay Request and resolve questions or conflicts with Construction Documents.
- C. Scheduling and Administration: The Contractor shall attend and administer all meetings throughout the progress of the Work. Duties include the following:
1. Preparation of agenda for meetings.
 2. Distribution of agenda and written notice 7 days in advance of date for each regularly scheduled meeting.
 3. Make physical arrangements for meetings.
 4. Record the minutes which shall include list of all participants and all significant proceedings and, in particular, all decisions, agreements, clarifications, and other data related to Project cost, time, and modifications.
 5. Distribute copies of minutes within 7 calendar days to all parties affected by decisions made at the meeting.
 6. Follow-up unresolved matters discussed at meetings and promptly effect final resolution, especially for work in progress. Advise all affected parties of result and include report of activities in next scheduled meeting.
- D. Scheduling and Administration: Representatives of Contractor's, Subcontractor's, and Supplier's attending the meetings shall be qualified and authorized to act on behalf of the entity each represents.
- E. Scheduling and Administration: Consultants may attend meetings to ascertain work is expedited consistent with Contract Documents and construction schedules.

- F. Preconstruction Conference: The Project Engineer, with the assistance of the MDOT Architect, will preside over and administer this meeting.
1. Schedule: Schedule Pre-Construction Meeting within 10 days after Notice to Proceed.
 2. Location: A central site, convenient for all parties, designated by the Project Engineer and the MDOT Architect.
 3. Agenda: Discuss items of significance that could affect progress, including the following:
 - a. Distribute and discuss tentative construction schedule prepared by Contractor.
 - b. Phasing.
 - c. Critical work sequencing and long-lead items.
 - d. Designation of key personnel and their duties.
 - e. Procedures for processing field decisions and Change Orders.
 - f. Procedures for RFIs.
 - g. Procedures for testing and inspecting.
 - h. Procedures for processing Applications for Payment.
 - i. Distribution of the Contract Documents.
 - j. Submittal procedures.
 - k. Preparation of record documents.
 - l. Use of the premises.
 - m. Work restrictions.
 - n. Working hours.
 - o. Owner's occupancy requirements.
 - p. Responsibility for temporary facilities and controls.
 - q. Procedures for moisture and mold control.
 - r. Procedures for disruptions and shutdowns.
 - s. Construction waste management and recycling.
 - t. Parking availability.
 - u. Office, work, and material storage areas.
 - v. Equipment deliveries and priorities.
 - w. First aid.
 - x. Security.
 - y. Progress cleaning.
 4. Minutes: Record and distribute meeting minutes.
- G. Preinstallation Conferences: Conduct a preinstallation conference at Project site before each construction activity that requires coordination with other construction.
1. Attendees: Installer and representatives of manufacturers and fabricators involved in or affected by the installation and its coordination or integration with other materials and installations that have preceded or will follow, shall attend the meeting. Advise Project Engineer and MDOT Architect of scheduled meeting dates.
 2. Agenda: Review progress of other construction activities and preparations for the particular activity under consideration, including requirements for the following:
 - a. Contract Documents.
 - b. Options.
 - c. Related RFIs.

- d. Related Change Orders.
- e. Purchases.
- f. Deliveries.
- g. Submittals.
- h. Review of mockups.
- i. Possible conflicts.
- j. Compatibility problems.
- k. Time schedules.
- l. Weather limitations.
- m. Manufacturer's written instructions.
- n. Warranty requirements.
- o. Compatibility of materials.
- p. Acceptability of substrates.
- q. Temporary facilities and controls.
- r. Space and access limitations.
- s. Regulations of authorities having jurisdiction.
- t. Testing and inspecting requirements.
- u. Installation procedures.
- v. Coordination with other work.
- w. Required performance results.
- x. Protection of adjacent work.
- y. Protection of construction and personnel.
- 3. Record significant conference discussions, agreements, and disagreements, including required corrective measures and actions.
- 4. Reporting: Distribute minutes of the meeting to each party present and to other parties requiring information.
- 5. Do not proceed with installation if the conference cannot be successfully concluded. Initiate whatever actions are necessary to resolve impediments to performance of the Work and reconvene the conference at earliest feasible date.

H. Progress Meetings:

- 1. Schedule: Progress Meetings will be scheduled monthly. The Project Engineer will cancel the meeting with at least 48 hours notice if a meeting is not necessary for any particular month.
- 2. Place of Progress Meetings: Contractor's Field Office except as otherwise agreed.
- 3. Attendance: Attending shall be the Project Engineer or his representative and MDOT representatives associated with the Project, the MDOT Architect or his representative (if requested by the District) and his Consultants, the General Contractor, and all Subcontractors as pertinent to the agenda.
- 4. Agenda: Review and correct or approve minutes of previous progress meeting. Review other items of significance that could affect progress. Include topics for discussion as appropriate to status of Project.
 - a. Contractor's Construction Schedule: Review progress since the last meeting. Determine whether each activity is on time, ahead of schedule, or behind schedule, in relation to Contractor's construction schedule. Determine how construction behind schedule will be expedited; secure commitments from parties involved to do so. Discuss whether schedule revisions are required to ensure that current and subsequent activities will be completed within the Contract Time.
 - 1) Review schedule for next period.
 - b. Review present and future needs of each entity present, including the following:
 - 1) Interface requirements.

- 2) Sequence of operations.
 - 3) Status of submittals.
 - 4) Deliveries.
 - 5) Off-site fabrication.
 - 6) Access.
 - 7) Site utilization.
 - 8) Temporary facilities and controls.
 - 9) Progress cleaning.
 - 10) Quality and work standards.
 - 11) Status of correction of deficient items.
 - 12) Field observations.
 - 13) Status of RFIs.
 - 14) Status of proposal requests.
 - 15) Pending changes.
 - 16) Status of Change Orders.
 - 17) Pending claims and disputes.
 - 18) Documentation of information for payment requests.
5. Minutes: Record and distribute the meeting minutes to each party present and to parties requiring information.
- a. Schedule Updating: Revise Contractor's construction schedule after each progress meeting where revisions to the schedule have been made or recognized. Issue revised schedule concurrently with the report of each meeting.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION

SECTION 01 32 00

CONSTRUCTION PROGRESS DOCUMENTATION

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes administrative and procedural requirements for documenting the progress of construction during performance of the Work, including the following:
 - 1. Contractor's construction schedule.
 - 2. Construction schedule updating reports.
 - 3. Site condition reports.

1.2 SUBMITTALS

- A. Contractor's Construction Schedule: Initial schedule, of size required to display entire schedule for entire construction period.
 - 1. Submit initial schedules to the Project Engineer / MDOT Architect within 15 days after date of Notice to Proceed.
 - 2. Submit to the Project Engineer / MDOT Architect, periodically updated schedules accurately depicting progress to first day of each month.
 - 3. Submit 2 copies, one to be retained by the Project Engineer and the other forwarded to the MDOT Architect.
- B. Construction Schedule Updating Reports: Submit with Applications for Payment.
- C. Site Condition Reports: Submit at time of discovery of differing conditions.

1.3 COORDINATION

- A. Coordinate Contractor's construction schedule with the schedule of values, submittal schedule, progress reports, payment requests, and other required schedules and reports.

PART 2 - PRODUCTS

2.1 CONTRACTOR'S CONSTRUCTION SCHEDULE

- A. Form of Schedules: Prepare in form of horizontal bar chart. The following is a minimum requirement and other type schedules are acceptable with Project Engineer's approval.
 - 1. Provide separate horizontal bar column for each trade or operation.
 - 2. Order: Table of Contents of Specifications.
 - a. Identify each column by major Specification section number.
 - 3. Horizontal Time Scale: Identify first work day of each week.
 - 4. Scale and Spacing: To allow space for updating.
- B. Content of Schedules:
 - 1. Provide complete sequence of construction by activity.

2. Indicate dates for beginning and completion of each stage of construction.
 3. Identify Work of logically grouped activities.
 4. Show projected percentage of completion for each item of Work as of first day of each month.
- C. Schedule Updating: Concurrent with making revisions to schedule, prepare tabulated reports showing the following:
1. Identification of activities that have changed.
 2. Changes in early and late start dates.
 3. Changes in early and late finish dates.
 4. Changes in activity durations in workdays.
 5. Changes in the Contract Time.
- D. If the Contractor is required to produce two revised construction schedules because of lack of progress in the Work, the Owner will notify the Contractor's surety.
- 2.2 REPORTS
- A. Site Condition Reports: Immediately on discovery of a difference between site conditions and the Contract Documents, prepare and submit a detailed report. Submit with a Request for Information. Include a detailed description of the differing conditions, together with recommendations for changing the Contract Documents.

PART 3 - EXECUTION

3.1 CONTRACTOR'S CONSTRUCTION SCHEDULE

- A. Contractor's Construction Schedule Updating: At monthly intervals, update schedule to reflect actual construction progress and activities. Issue schedule one week before each regularly scheduled progress meeting.
- B. Distribution: Distribute copies of approved schedule to Project Engineer, MDOT Architect, testing and inspecting agencies, and other parties identified by Contractor with a need-to-know schedule responsibility.
- .

END OF SECTION

SECTION 01 32 33 PHOTOGRAPHIC DOCUMENTATION

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes administrative and procedural requirements for the following:

1. Periodic construction photographs.

1.2 INFORMATIONAL SUBMITTALS

- A. Key Plan: Submit key plan of Project site and building with notation of vantage points marked for location and direction of each photograph. Indicate elevation or story of construction. Include same information as corresponding photographic documentation.
- B. Digital Photographs: Submit (e-mail) image files on a weekly basis.
1. Digital Camera: Minimum sensor resolution of 8 megapixels.
 2. Format: Minimum 3200 by 2400 pixels, in unaltered original files, with same aspect ratio as the sensor, uncropped, date and time stamped, in folder named by date of photograph, accompanied by key plan file.
 3. Identification: Provide the following information with each image description in file metadata tag:
 - a. Name of Project.
 - b. Date photograph was taken.
 - c. Description of vantage point, indicating location, direction (by compass point), and elevation of construction.

PART 2 - PRODUCTS

2.1 PHOTOGRAPHIC MEDIA

- A. Digital Images: Provide images in JPG format, produced by a digital camera with minimum sensor size of 8 megapixels, and at an image resolution of not less than 3200 by 2400 pixels.

PART 3 - EXECUTION

3.1 CONSTRUCTION PHOTOGRAPHS

- A. General: Take photographs using the maximum range of depth of field, and that are in focus, to clearly show the Work. Photographs with blurry or out-of-focus areas will not be accepted.
- B. Digital Images: Submit digital images exactly as originally recorded in the digital camera, without alteration, manipulation, editing, or modifications using image-editing software.
- C. Periodic Construction Photographs: Take photographs for each day that any substantial construction activity occurs at the job site. The purpose of the photographs is to document the installation of the work and verify that the work is being installed properly.
- D. Construction Photographs: The Project Engineer / MDOT Architect may direct the Contractor to take certain photographs during his job site observation or at any time as directed.

END OF SECTION

SECTION 01 33 00

SUBMITTAL PROCEDURES

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes requirements for the submittal schedule and administrative and procedural requirements for submitting Shop Drawings, Product Data, Samples, and other submittals.
- B. Scope: Submit to the MDOT Architectural Services Unit shop drawings, product data, and samples required by Specification Sections. Faxed submittals WILL NOT be accepted. DO NOT submit Material Safety Data Sheets for approval.
- C. Related Requirements: Section 01 25 00 – Substitution Procedures and Section 01 60 00 – Product Requirements, for requirements concerning products that will be acceptable on this Project

1.2 ACTION SUBMITTALS

- A. Submittal Schedule: Submit a schedule of submittals, arranged in chronological order by dates required by construction schedule. Include time required for review, ordering, manufacturing, fabrication, and delivery when establishing dates. Include additional time required for making corrections or revisions to submittals noted by MDOT Architect and additional time for handling and reviewing submittals required by those corrections.

1.3 SUBMITTAL ADMINISTRATIVE REQUIREMENTS

- A. Architect's Digital Data Files: Electronic copies of digital data files of the Contract Drawings will not be provided by Architect for Contractor's use in preparing submittals.
- B. Coordination: Coordinate preparation and processing of submittals with performance of construction activities.
 - 1. Coordinate each submittal with fabrication, purchasing, testing, delivery, other submittals, and related activities that require sequential activity.
 - 2. MDOT Architect reserves the right to withhold action on a submittal requiring coordination with other submittals until related submittals are received.
- C. Processing Time: Allow time for submittal review, including time for resubmittals, Time for review shall commence on MDOT Architect's receipt of submittal. No extension of the Contract Time will be authorized because of failure to transmit submittals enough in advance of the Work to permit processing, including resubmittals.
 - 1. Initial Review: Allow 15 days for initial review of each submittal. Allow additional time if coordination with subsequent submittals is required. MDOT Architect will advise Contractor when a submittal being processed must be delayed for coordination.
 - 2. Partial submittals are NOT ACCEPTABLE, will be considered non-responsive, and will be returned without review.
 - 3. Resubmittal Review: Allow 15 days for review of each resubmittal.

- D. Paper Submittals: Place a permanent label or title block on each submittal item for identification. Paper Submittals are required for sheets larger than 11 by 17 inches.
1. Indicate name of firm or entity that prepared each submittal on label or title block.
 2. Provide a space approximately 3 by 4 inches on label or beside title block to record Contractor's review and approval markings and action taken by MDOT Architect.
 3. Include the following information for processing and recording action taken:
 - a. Project name.
 - b. Date.
 - c. Name of Contractor.
 - d. Name of subcontractor.
 - e. Name of supplier.
 - f. Name of manufacturer.
 - g. Submittal number or other unique identifier, including revision identifier.
 - 1) Submittal number shall use Specification Section number followed by a decimal point and then a sequential number (e.g., 061000.01). Resubmittals shall include an alphabetic suffix after another decimal point (e.g., 061000.01.A).
 - h. Number and title of appropriate Specification Section.
 - i. Drawing number and detail references, as appropriate.
 - j. Location(s) where product is to be installed, as appropriate.
 - k. Other necessary identification.
 4. Transmittal for Paper Submittals: Accompany submittals with transmittal letter, containing data, project title and number; Contractor's name and address; the number of each Shop Drawings, product data and samples submitted; notification of deviations from Contract Documents; and other pertinent data. Submittals shall be sent to MDOT Architect for review or distribution to Consultants, with copy of Transmittal Letter sent to Project Engineer. MDOT Architect will return without review submittals received from sources other than Contractor.
 - a. Transmittal Form for Paper Submittals: Use AIA Document G810 or CSI Form 12.1A.
 - b. Transmittal Form for Paper Submittals: Provide locations on form for the following information:
 - 1) Project name.
 - 2) Date.
 - 3) Destination (To:).
 - 4) Source (From:).
 - 5) Name of Contractor.
 - 6) Name of firm or entity that prepared submittal.
 - 7) Names of subcontractor, manufacturer, and supplier.
 - 8) Category and type of submittal.
 - 9) Specification Section number and title.
 - 10) Specification paragraph number or drawing designation and generic name for each of multiple items.
 - 11) Drawing number and detail references, as appropriate.
 - 12) Transmittal number, numbered consecutively.
 - 13) Submittal and transmittal distribution record.
 - 14) Remarks.
 - 15) Signature of transmitter.
 - 16) Contractor's stamp, initialed or signed, certifying the review of submittal, verification of field measurements, and compliance with Contract Documents PRIOR to submitting to the MDOT Architectural Services Unit.

- E. Electronic Submittals: Electronic pdf submittals are required for pages smaller than 11 by 17 inches. Identify and incorporate information in each electronic submittal file as follows:
 - 1. Assemble complete submittal package into a single indexed file incorporating submittal requirements of a single Specification Section and transmittal form with links enabling navigation to each item.
 - 2. Name file with submittal number or other unique identifier, including revision identifier.
 - a. File name shall use project identifier and Specification Section number followed by a decimal point and then a sequential number (e.g., LNHS-061000.01). Re-submittals shall include an alphabetic suffix after another decimal point (e.g., LNHS-061000.01.A).
 - 3. Provide means for insertion to permanently record Contractor's review and approval markings and action taken by MDOT Architect.
 - 4. Transmittal Form for Electronic Submittals: Use electronic form acceptable to Project Engineer and MDOT Architect, containing the same information as shown for paper submittals.
 - 5. Metadata: Include the following information as keywords in the electronic submittal file metadata:
 - a. Project name.
 - b. Number and title of appropriate Specification Section.
 - c. Manufacturer name.
 - d. Product name.
- F. Options: Identify options requiring selection by MDOT Architect.
- G. Deviations: Identify deviations from the Contract Documents on submittals.
- H. Re-submittals: Make re-submittals in same form and number of copies as initial submittal.
 - 1. Note date and content of previous submittal.
 - 2. Note date and content of revision in label or title block and clearly indicate extent of revision.
 - 3. Resubmit submittals until they are marked with approval notation from MDOT Architect's action stamp.
- I. Distribution of Submittals after Review:
 - 1. Distribute copies of Shop Drawings and product data which carry MDOT Architect's / Consultant's stamp to: Project Engineer's File, Architectural Services Unit File, Architect's File (as required) / Electrical / Mechanical / Structural Engineer's File (as required), Materials' File (if concrete), Contractor's File, Job Site File, and Subcontractor, Supplier and/or Fabricator as necessary.
 - 2. Distribute samples / color charts as directed. The Project Engineer, MDOT Architect and Consultant (as required) shall retain one of each.
- J. Use for Construction: Retain complete copies of submittals on Project site. Use only final action submittals that are marked with approval notation from MDOT Architect's action stamp.

- K. After an item has been accepted, no change in brand, make, manufacturer's catalog number, or characteristics will be considered unless:
1. Satisfactory written evidence is presented to and approved by the Project Engineer, that manufacturer cannot make scheduled delivery of accepted item, or;
 2. Item delivered has been rejected and substitution of a suitable item is an urgent necessity, or;
 3. Other conditions became apparent which indicates acceptance of such substitute item to be in the best interest of the Owner.

PART 2 - PRODUCTS

2.1 SUBMITTAL PROCEDURES

A. General Submittal Procedure Requirements:

1. Submit electronic submittals for 8 1/2 by 11 inches and 11 by 17 inches submittals only) via email as pdf electronic files.
 - a. MDOT Architect will return annotated file. Annotate and retain one copy of file as an electronic Project record document file.
2. Action Submittals: Submit eight paper (required for all submittals over 11 by 17 inches in size) copies of each submittal with additional number of copies, if required, by Contractor for distribution. MDOT Architect will return four copies, unless indicated otherwise.
3. Informational Submittals: Submit three paper copies or one electronic pdf copy of each submittal unless otherwise indicated. MDOT Architect will not return copies.
4. Certificates and Certifications Submittals: Provide a statement that includes signature of entity responsible for preparing certification. Certificates and certifications shall be signed by an officer or other individual authorized to sign documents on behalf of that entity.

B. Product Data: Collect information into a single submittal for each element of construction and type of product or equipment.

1. If information must be specially prepared for submittal because standard published data are not suitable for use, submit as Shop Drawings, not as Product Data.
2. Mark each copy of each submittal to show which products and options are applicable.
3. Include the following information, as applicable:
 - a. Manufacturer's catalog cuts.
 - b. Manufacturer's product specifications.
 - c. Standard color charts.
 - d. Statement of compliance with specified referenced standards.
 - e. Testing by recognized testing agency.
 - f. Application of testing agency labels and seals.
 - g. Notation of coordination requirements.
 - h. Availability and delivery time information.
4. For equipment, include the following in addition to the above, as applicable:
 - a. Wiring diagrams showing factory-installed wiring.
 - b. Printed performance curves.

- c. Operational range diagrams.
 - d. Clearances required to other construction, if not indicated on accompanying Shop Drawings.
 - 5. Submit Product Data concurrent with Samples.
 - 6. Submit Product Data in electronic pdf file.
- C. Shop Drawings: Prepare Project-specific information, drawn accurately to scale. Do not base Shop Drawings on reproductions of the Contract Documents or standard printed data.
- 1. Preparation: Fully illustrate requirements in the Contract Documents. Include the following information, as applicable:
 - a. Identification of products.
 - b. Schedules.
 - c. Compliance with specified standards.
 - d. Notation of coordination requirements.
 - e. Notation of dimensions (required) established by field measurement.
 - f. Relationship and attachment to adjoining construction clearly indicated.
 - g. Seal and signature of professional engineer if specified.
 - 2. Sheet Size: Except for templates, patterns, and similar full-size drawings, submit Shop Drawings on sheets at least 11 by 17 inches, but no larger than 24 by 36 inches.
 - 3. Submit Shop Drawings in the following format:
 - a. Submit eight paper copies of each submittal with additional number of copies, if required, by Contractor for distribution. MDOT Architect will return four copies, unless indicated otherwise
- D. Samples: Submit Samples for review of kind, color, pattern, and texture for a check of these characteristics with other elements and for a comparison of these characteristics between submittal and actual component as delivered and installed.
- 1. Transmit Samples that contain multiple, related components such as accessories together in one submittal package.
 - 2. Identification: Attach label on unexposed side of Samples.
 - 3. Disposition: Maintain sets of approved Samples at Project site, available for quality-control comparisons throughout the course of construction activity. Sample sets may be used to determine final acceptance of construction associated with each set.
 - a. Samples that may be incorporated into the Work are indicated in individual Specification Sections. Such Samples must be in an undamaged condition at time of use.
 - b. Samples not incorporated into the Work, or otherwise designated as Owner's property, are the property of Contractor.
 - 4. Samples for Initial Selection: Submit manufacturer's color charts consisting of units or sections of units showing the full range of colors, textures, and patterns available.
 - a. Number of Samples: Submit two full set(s) of available choices where color, pattern, texture, or similar characteristics are required to be selected from manufacturer's product line. MDOT Architect will return one sample with options selected.
 - b. If a specified product color is discontinued, Contractor shall notify Project Engineer promptly to determine if it affects other color selections.

5. Samples for Verification: Submit full-size units or Samples of size indicated, prepared from same material to be used for the Work, cured and finished in manner specified, and physically identical with material or product proposed for use, and that show full range of color and texture variations expected. Samples include, but are not limited to, the following: partial sections of manufactured or fabricated components; small cuts or containers of materials; complete units of repetitively used materials; swatches showing color, texture, and pattern; color range sets; and components used for independent testing and inspection.
 - a. Number of Samples: Submit four sets of Samples. Project Engineer and MDOT Architect will retain two Sample sets; remainder will be returned. Mark up and retain one returned Sample set as a project record sample.
- E. Field Samples and Mock-Ups: Erect on Project Site at location acceptable to Project Engineer.
1. Construct each sample or mock-up complete, including Work of all trades required in the finished Work. Field Samples are used to determine standards in materials, color, texture, workmanship, and overall appearance.
 2. Work shall not be allowed using these materials until the mock-up is approved.
 3. The mock-up shall not be destroyed, until after the Work it represents is finished, without permission of the Project Engineer. This mock-up shall be used as a standard to compare to the Work it represents for color, craftsmanship, overall appearance, and how the different materials make up the whole system.
- F. Product Schedule: As required in individual Specification Sections, prepare a written summary indicating types of products required for the Work and their intended location.
- G. Qualification Data: Prepare written information that demonstrates capabilities and experience of firm or person. Include lists of completed projects with project names and addresses, contact information of architects and owners, and other information specified.
- H. Welding Certificates: Prepare written certification that welding procedures and personnel comply with requirements in the Contract Documents. Submit record of Welding Procedure Specification and Procedure Qualification Record on AWS forms. Include names of firms and personnel certified.
- I. Installer Certificates: Submit written statements on manufacturer's letterhead certifying that Installer complies with requirements in the Contract Documents and, where required, is authorized by manufacturer for this specific Project.
- J. Manufacturer Certificates: Submit written statements on manufacturer's letterhead certifying that manufacturer complies with requirements in the Contract Documents. Include evidence of manufacturing experience where required.
- K. Product Certificates: Submit written statements on manufacturer's letterhead certifying that product complies with requirements in the Contract Documents.
- L. Material Certificates: Submit written statements on manufacturer's letterhead certifying that material complies with requirements in the Contract Documents.
- M. Material Test Reports: Submit reports written by a qualified testing agency, on testing agency's standard form, indicating and interpreting test results of material for compliance with requirements in the Contract Documents.

- N. Product Test Reports: Submit written reports indicating that current product produced by manufacturer complies with requirements in the Contract Documents. Base reports on evaluation of tests performed by manufacturer and witnessed by a qualified testing agency, or on comprehensive tests performed by a qualified testing agency.
- O. Research Reports: Submit written evidence, from a model code organization acceptable to authorities having jurisdiction, that product complies with building code in effect for Project.
- P. Field Test Reports: Submit written reports indicating and interpreting results of field tests performed either during installation of product or after product is installed in its final location, for compliance with requirements in the Contract Documents.

2.2 DELEGATED-DESIGN SERVICES

- A. Performance and Design Criteria: Where professional design services or certifications by a design professional are specifically required of Contractor by the Contract Documents, provide products and systems complying with specific performance and design criteria indicated.
 - 1. If criteria indicated are not sufficient to perform services or certification required, submit a written request for additional information to MDOT Architect.
- B. Delegated-Design Services Certification: In addition to Shop Drawings, Product Data, and other required submittals, submit digitally signed PDF electronic file (optional) and eight paper copies of certificate, signed and sealed by the responsible design professional, for each product and system specifically assigned to Contractor to be designed or certified by a design professional.
 - 1. Indicate that products and systems comply with performance and design criteria in the Contract Documents. Include list of codes, loads, and other factors used in performing these services.

PART 3 - EXECUTION

3.1 CONTRACTOR'S REVIEW

- A. Action and Informational Submittals: Review each submittal and check for coordination with other Work of the Contract and for compliance with the Contract Documents. Note corrections and field dimensions. Mark with approval stamp before submitting to MDOT Architectural Services Unit.
- B. Approval Stamp: Stamp each submittal with a uniform, approval stamp. Include Project name and location, submittal number, Specification Section title and number, name of reviewer, date of Contractor's approval, and statement certifying that submittal has been reviewed, checked, and approved for compliance with the Contract Documents.
- C. Notify the Project Engineer in writing at the time of submission, of deviations in submittals from requirements of Contract Documents.
- D. Contractor's responsibility for deviations in submittals from requirements of Contract Documents is not relieved by review of submittals unless written acceptance of specific deviations is given.

- E. Contractor's responsibility for errors and omissions in submittals is not relieved by MDOT Architect's / Consultant's review of submittals.
- F. Do not order materials or begin Work requiring submittals until the return of submittals bearing MDOT Architect / Consultant's stamp and initials indicating review.

3.2 MDOT ARCHITECT'S / CONSULTANTS' ACTION

- A. General: MDOT Architect will not review submittals that do not bear Contractor's approval stamp and will return them without action.
- B. Action Submittals: MDOT Architect / Consultants will review with reasonable promptness, each submittal for design concept of Project and information given in Contract Documents, make marks to indicate corrections or revisions required, and return submittals to the Architectural Services Unit, which will retain one copy and forward one copy to the Project Engineer, one copy to the Materials Engineer (if concrete), and one (or the remainder (if paper submittal) to the Contractor. MDOT Architect / Consultants will stamp each submittal with an action stamp and will mark appropriately to indicate action. Consultants will retain one copy of reviewed submittals.
- C. Informational Submittals: MDOT Architect will review each submittal and will not return it, or will return it if it does not comply with requirements. MDOT Architect will forward each submittal to appropriate party.
- D. Incomplete submittals are unacceptable, will be considered nonresponsive, and will be returned for resubmittal without review.
- E. Submittals not required by the Contract Documents may not be reviewed and may be discarded.

END OF SECTION

SECTION 01 40 00

QUALITY REQUIREMENTS

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes administrative and procedural requirements for quality assurance and quality control.
- B. Testing and inspecting services are required to verify compliance with requirements specified or indicated. These services do not relieve Contractor of responsibility for compliance with the Contract Document requirements.
 - 1. Specified tests, inspections, and related actions do not limit Contractor's other quality-assurance and -control procedures that facilitate compliance with the Contract Document requirements.
 - 2. Requirements for Contractor to provide quality-assurance and -control services required by MDOT Architect, Owner, or authorities having jurisdiction are not limited by provisions of this Section.
 - 3. Specific test and inspection requirements are not specified in this Section.
- C. The Contractor shall provide and pay for all other required inspection, sampling and testing.

1.2 DEFINITIONS

- A. Quality-Assurance Services: Activities, actions, and procedures performed before and during execution of the Work to guard against defects and deficiencies and substantiate that proposed construction will comply with requirements.
- B. Quality-Control Services: Tests, inspections, procedures, and related actions during and after execution of the Work to evaluate that actual products incorporated into the Work and completed construction comply with requirements. Services do not include contract enforcement activities performed by Project Engineer or MDOT Architect.
- C. Mockups: Full-size physical assemblies that are constructed on-site. Mockups are constructed to verify selections made under Sample submittals; to demonstrate aesthetic effects and, where indicated, qualities of materials and execution; to review coordination, testing, or operation; to show interface between dissimilar materials; and to demonstrate compliance with specified installation tolerances. Mockups are not Samples. Unless otherwise indicated, approved mockups establish the standard by which the Work will be judged.
 - 1. Laboratory Mockups: Full-size physical assemblies constructed at testing facility to verify performance characteristics.
- D. Preconstruction Testing: Tests and inspections performed specifically for Project before products and materials are incorporated into the Work, to verify performance or compliance with specified criteria.
- E. Product Testing: Tests and inspections that are performed by an NRTL, an NVLAP, or a testing agency qualified to conduct product testing and acceptable to authorities

having jurisdiction, to establish product performance and compliance with specified requirements.

- F. Source Quality-Control Testing: Tests and inspections that are performed at the source, e.g., plant, mill, factory, or shop.
- G. Field Quality-Control Testing: Tests and inspections that are performed on-site for installation of the Work and for completed Work.
- H. Testing Agency: An entity engaged to perform specific tests, inspections, or both. Testing laboratory shall mean the same as testing agency.
- I. Installer/Applicator/Erector: Contractor or another entity engaged by Contractor as an employee, Subcontractor, or Sub-subcontractor, to perform a particular construction operation, including installation, erection, application, and similar operations.
 - 1. Use of trade-specific terminology in referring to a trade or entity does not require that certain construction activities be performed by accredited or unionized individuals, or that requirements specified apply exclusively to specific trade(s).
- J. Experienced: When used with an entity or individual, "experienced" means having successfully completed a minimum of five previous projects similar in nature, size, and extent to this Project; being familiar with special requirements indicated; and having complied with requirements of authorities having jurisdiction.

1.3 CONFLICTING REQUIREMENTS

- A. Referenced Standards: If compliance with two or more standards is specified and the standards establish different or conflicting requirements for minimum quantities or quality levels, comply with the most stringent requirement. Refer conflicting requirements that are different, but apparently equal, to Project Engineer for a decision before proceeding.
- B. Minimum Quantity or Quality Levels: The quantity or quality level shown or specified shall be the minimum provided or performed. The actual installation may comply exactly with the minimum quantity or quality specified, or it may exceed the minimum within reasonable limits. To comply with these requirements, indicated numeric values are minimum or maximum, as appropriate, for the context of requirements. Refer uncertainties to Project Engineer for a decision before proceeding.

1.4 INFORMATIONAL SUBMITTALS

- A. Contractor's Statement of Responsibility: When required by authorities having jurisdiction, submit copy of written statement of responsibility sent to authorities having jurisdiction before starting work.
- B. Testing Agency Qualifications: For testing agencies specified in "Quality Assurance" Article to demonstrate their capabilities and experience. Include proof of qualifications in the form of a recent report on the inspection of the testing agency by a recognized authority.

1.5 REPORTS AND DOCUMENTS

- A. Test and Inspection Reports: Prepare and submit certified written reports specified in other Sections. Materials will be inspected and sampled in accordance with current

Mississippi Department of Transportation SOP pertaining to inspecting and sampling. Distribute copies of reports of inspections and tests to Project Engineer and one copy to the MDOT Architect. Include the following:

1. Date of issue.
 2. Project title and number.
 3. Name, address, and telephone number of testing agency.
 4. Dates and locations of samples and tests or inspections.
 5. Names of individuals making tests and inspections.
 6. Description of the Work and test and inspection method.
 7. Identification of product and Specification Section.
 8. Complete test or inspection data.
 9. Test and inspection results and an interpretation of test results.
 10. Record of temperature and weather conditions at time of sample taking and testing and inspecting.
 11. Comments or professional opinion on whether tested or inspected Work complies with the Contract Document requirements.
 12. Name and signature of laboratory inspector.
 13. Recommendations on retesting and reinspecting.
- B. Manufacturer's Field Reports: Prepare written information documenting tests and inspections specified in other Sections. Include the following:
1. Name, address, and telephone number of representative making report.
 2. Statement on condition of substrates and their acceptability for installation of product.
 3. Summary of installation procedures being followed, whether they comply with requirements and, if not, what corrective action was taken.
 4. Results of operational and other tests and a statement of whether observed performance complies with requirements.
 5. Other required items indicated in individual Specification Sections.
- C. Permits, Licenses, and Certificates: For Owner's records, submit copies of permits, licenses, certifications, inspection reports, releases, jurisdictional settlements, notices, receipts for fee payments, judgments, correspondence, records, and similar documents, established for compliance with standards and regulations bearing on performance of the Work.

1.6 QUALITY ASSURANCE

- A. General: Qualifications paragraphs in this article establish the minimum qualification levels required; individual Specification Sections specify additional requirements.
- B. Manufacturer Qualifications: A firm experienced in manufacturing products or systems similar to those indicated for this Project and with a record of successful in-service performance, as well as sufficient production capacity to produce required units.
- C. Fabricator Qualifications: A firm experienced in producing products similar to those indicated for this Project and with a record of successful in-service performance, as well as sufficient production capacity to produce required units.
- D. Installer Qualifications: A firm or individual experienced in installing, erecting, or assembling work similar in material, design, and extent to that indicated for this Project,

whose work has resulted in construction with a record of successful in-service performance.

- E. Professional Engineer Qualifications: A professional engineer who is legally qualified to practice in jurisdiction where Project is located and who is experienced in providing engineering services of the kind indicated. Engineering services are defined as those performed for installations of the system, assembly, or product that are similar in material, design, and extent to those indicated for this Project.
- F. Specialists: Certain Specification Sections require that specific construction activities shall be performed by entities who are recognized experts in those operations. Specialists shall satisfy qualification requirements indicated and shall be engaged for the activities indicated.
 - 1. Requirements of authorities having jurisdiction shall supersede requirements for specialists.
- G. Testing Agency Qualifications: An NRTL, an NVLAP, or an independent agency with the experience and capability to conduct testing and inspecting indicated, as documented according to ASTM E 329 and with additional qualifications specified in individual Sections; and, where required by authorities having jurisdiction, that is acceptable to authorities.
 - 1. NRTL: A nationally recognized testing laboratory according to 29 CFR 1910.7.
 - 2. NVLAP: A testing agency accredited according to NIST's National Voluntary Laboratory Accreditation Program.
- H. Manufacturer's Representative Qualifications: An authorized representative of manufacturer who is trained and approved by manufacturer to observe and inspect installation of manufacturer's products that are similar in material, design, and extent to those indicated for this Project.
- I. Preconstruction Testing: Where testing agency is indicated to perform preconstruction testing for compliance with specified requirements for performance and test methods, comply with the following:
 - 1. Contractor responsibilities include the following:
 - a. Provide test specimens representative of proposed products and construction.
 - b. Submit specimens in a timely manner with sufficient time for testing and analyzing results to prevent delaying the Work.
 - c. Build laboratory mockups at testing facility using personnel, products, and methods of construction indicated for the completed Work.
 - d. When testing is complete, remove test specimens, assemblies, and mockups do not reuse products on Project, unless indicated otherwise in other Sections.
 - 2. Testing Agency Responsibilities: Submit a certified written report of each test, inspection, and similar quality-assurance service to Project Engineer, MDOT Architect, with copy to Contractor. Interpret tests and inspections and state in each report whether tested and inspected work complies with or deviates from the Contract Documents.

- J. Mockups: Before installing portions of the Work requiring mockups, build mockups for each form of construction and finish required to comply with the following requirements, using materials indicated for the completed Work:
 - 1. Build mockups in location and of size indicated or, if not indicated, as directed by Project Engineer.
 - 2. Notify Project Engineer and MDOT Architect three days in advance of dates and times when mockups will be constructed.
 - 3. Demonstrate the proposed range of aesthetic effects and workmanship.
 - 4. Obtain Project Engineer's and MDOT Architect's approval of mockups before starting work, fabrication, or construction.
 - a. Allow ten days for initial review and each re-review of each mockup.
 - 5. Maintain mockups during construction in an undisturbed condition as a standard for judging the completed Work.
 - 6. Demolish and remove mockups when directed unless otherwise indicated.
- K. Laboratory Mockups: Comply with requirements of preconstruction testing and those specified in individual Specification Sections.
- L. Tolerances:
 - 1. Walls: Finished wall surfaces shall be plumb and shall have a maximum variation of 1/8 inch in 8 feet when a straightedge is laid on the surface in any direction, and no measurable variation in any 2-foot direction.
 - 2. Ceilings: Finished ceiling surfaces shall present true, level, and plane surfaces, with a maximum variation of 1/8 inch in 8 feet when a straightedge and water level are laid on the surface in any direction and no measurable variation in any 2-foot direction.
 - 3. Concrete Floors: Tolerances for concrete floors and pavement are specified in Division 03.
 - 4. Wood and Plywood Subfloors: Subfloor surfaces shall be level and shall have a maximum variation of plus or minus 1/8 inch in 10 feet. An additional tolerance of plus 1/4 inch per 2 feet of unsupported span will be allowed for camber.
 - 5. Finished Floors: Level to within plus or minus 1/8 inch in 10 feet for hardwood and resilient floor coverings.
- M. Protection of Wood:
 - 1. Provide protection of all wood materials and products, whether or not installed, including erected and installed wood framing and sheathing, from water and moisture of any kind until completion and acceptance of the project.
 - 2. Keep informed of weather conditions and forecasts, and when there is a likelihood of rain, shall protect installed and exposed framing and sheathing and stored lumber exposed to the elements with suitable water-repellent coverings, such as canvas tarpaulins and polyethylene sheeting.
 - 3. Millwork and trim, paneling, cabinets, shelving, and products manufactured from wood shall be kept under cover and dry at the shop until time for delivery. Such materials shall not be delivered to the site until the building is roofed, and exterior walls are sheathed and protected with building paper as a minimum, the doors and windows are installed and glazed, and there is ample interior storage space for such materials and products. Delivery shall not occur during periods of rain, heavy dew, or fog.

4. Wood materials or products which become wet from rain, dew, fog, or other source may be considered to have moisture damage and may be rejected, requiring replacement by the Contractor with new, dry materials or products at no increase in the Contract Price. Excepted materials: installed exterior wood siding, exterior wood trim, exterior wood doors, and exterior wood windows, after specified treatments, such as exterior wood stain or paint, have been applied.
- N. Grout Fill: In applications where the grout installation may be subjected to moisture, the manufacturer shall submit a letter stating that the entire grout matrix does not contain any of the following:
1. Added gypsum.
 2. Plaster-of-Paris
 3. Sulfur trioxide levels in a portland cement component exceeding ASTM C 150's published limits.
- 1.7 QUALITY CONTROL
- A. Owner Responsibilities: Where quality-control services are indicated as Owner's responsibility, Owner will engage a qualified testing agency to perform these services.
1. Owner will furnish Contractor with names, addresses, and telephone numbers of testing agencies engaged and a description of types of testing and inspecting they are engaged to perform.
 2. Costs for retesting and reinspecting construction that replaces or is necessitated by work that failed to comply with the Contract Documents will be charged to Contractor.
- B. Contractor Responsibilities: Tests and inspections not explicitly assigned to Owner are Contractor's responsibility. Perform additional quality-control activities required to verify that the Work complies with requirements, whether specified or not.
1. Where services are indicated as Contractor's responsibility, engage a qualified testing agency to perform these quality-control services.
 - a. Contractor shall not employ same entity engaged by Owner, unless agreed to in writing by Owner.
 2. Notify testing agencies at least 48 hours in advance of time when Work that requires testing or inspecting will be performed.
 3. Where quality-control services are indicated as Contractor's responsibility, submit a certified written report, in duplicate, of each quality-control service.
 4. Testing and inspecting requested by Contractor and not required by the Contract Documents are Contractor's responsibility.
 5. Submit additional copies of each written report directly to authorities having jurisdiction, when they so direct.
- C. Manufacturer's Field Services: Where indicated, engage a manufacturer's representative to observe and inspect the Work. Manufacturer's representative's services include examination of substrates and conditions, verification of materials, inspection of completed portions of the Work, and submittal of written reports. The manufacturer shall inspect and approve the application or installation work at no additional cost to Contractor or the Owner.

1. The Contractor shall make all necessary arrangements with the manufacturer of the products to be installed to provide onsite consultation and inspection services to assure the correct application or installation of the product, system, or assembly.
 2. The manufacturer's authorized representative shall be present at the time any phase of this work is started.
 3. The manufacturer's authorized representative shall inspect and approve all surfaces over which, or upon which the manufacturer's product will be applied or installed.
 4. The manufacturer's representative shall make periodic visits to the site as the work proceeds as necessary for consultation and for expediting the work in the most practical manner.
- D. Retesting/Reinspecting: Regardless of whether original tests or inspections were Contractor's responsibility, provide quality-control services, including retesting and reinspecting, for construction that replaced Work that failed to comply with the Contract Documents.
- E. Testing Agency Responsibilities: Cooperate with Project Engineer and Contractor in performance of duties. Provide qualified personnel to perform required tests and inspections.
1. Notify Project Engineer, MDOT Architect and Contractor promptly of irregularities or deficiencies observed in the Work during performance of its services.
 2. Determine the location from which test samples will be taken and in which in-situ tests are conducted.
 3. Conduct and interpret tests and inspections and state in each report whether tested and inspected work complies with or deviates from requirements.
 4. Submit a certified written report, in duplicate, of each test, inspection, and similar quality-control service through Contractor.
 5. Do not release, revoke, alter, or increase the Contract Document requirements or approve or accept any portion of the Work.
 6. Do not perform any duties of Contractor.
- F. Associated Services: Cooperate with agencies performing required tests, inspections, and similar quality-control services, and provide reasonable auxiliary services as requested. Notify agency sufficiently in advance of operations to permit assignment of personnel. Provide the following:
1. Access to the Work.
 2. Incidental labor and facilities necessary to facilitate tests and inspections.
 3. Adequate quantities of representative samples of materials that require testing and inspecting. Assist agency in obtaining samples.
 4. Facilities for storage and field curing of test samples.
 5. Delivery of samples to testing agencies.
 6. Preliminary design mix proposed for use for material mixes that require control by testing agency.
 7. Security and protection for samples and for testing and inspecting equipment at Project site.
- G. Coordination: Coordinate sequence of activities to accommodate required quality-assurance and -control services with a minimum of delay and to avoid necessity of removing and replacing construction to accommodate testing and inspecting.
1. Schedule times for tests, inspections, obtaining samples, and similar activities.

1.8 SPECIAL TESTS AND INSPECTIONS

- A. Special Tests and Inspections: Engage a qualified testing agency / special inspector to conduct special tests and inspections required by authorities having jurisdiction as the responsibility of Owner and as follows:
- B. Special Tests and Inspections: Conducted by a qualified testing agency / special inspector as required by authorities having jurisdiction, as indicated in individual Specification Sections and as follows:
 - 1. Verifying that manufacturer maintains detailed fabrication and quality-control procedures and reviews the completeness and adequacy of those procedures to perform the Work.
 - 2. Notifying Project Engineer, MDOT Architect and Contractor promptly of irregularities and deficiencies observed in the Work during performance of its services.
 - 3. Submitting a certified written report of each test, inspection, and similar quality-control service to Project Engineer, MDOT Architect with copy to Contractor and to authorities having jurisdiction.
 - 4. Submitting a final report of special tests and inspections at Substantial Completion, which includes a list of unresolved deficiencies.
 - 5. Interpreting tests and inspections and stating in each report whether tested and inspected work complies with or deviates from the Contract Documents.
 - 6. Retesting and reinspecting corrected work.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION

3.1 TEST AND INSPECTION LOG

- A. Test and Inspection Log: Prepare a record of tests and inspections. Include the following:
 - 1. Date test or inspection was conducted.
 - 2. Description of the Work tested or inspected.
 - 3. Date test or inspection results were transmitted to Architect.
 - 4. Identification of testing agency or special inspector conducting test or inspection.
- B. Maintain log at Project site. Post changes and revisions as they occur. Provide access to test and inspection log for Project Engineer, MDOT Architect's reference during normal working hours.

3.2 REPAIR AND PROTECTION

- A. General: On completion of testing, inspecting, sample taking, and similar services, repair damaged construction and restore substrates and finishes.
 - 1. Provide materials and comply with installation requirements specified in other Specification Sections or matching existing substrates and finishes. Restore patched areas and extend restoration into adjoining areas with durable seams that are as invisible as possible. Comply with the Contract Document requirements for cutting and patching in Section 01 73 00 "Execution."

- B. Protect construction exposed by or for quality-control service activities.
- C. Repair and protection are Contractor's responsibility, regardless of the assignment of responsibility for quality-control services.

END OF SECTION

SECTION 01 42 00

REFERENCES

PART 1 - GENERAL

1.1 DEFINITIONS

- A. General: Basic Contract definitions are included in the Conditions of the Contract.
- B. "Reviewed": When used to convey MDOT Architect's action on Contractor's submittals, applications, and requests, "reviewed" is limited to MDOT Architect's duties and responsibilities as stated in the Conditions of the Contract.
- C. "Directed": A command or instruction by Project Engineer/MDOT Architect. Other terms including "requested," "authorized," "selected," "required," and "permitted" have the same meaning as "directed."
- D. "Indicated": Requirements expressed by graphic representations or in written form on Drawings, in Specifications, and in other Contract Documents. Other terms including "shown," "noted," "scheduled," and "specified" have the same meaning as "indicated."
- E. "Regulations": Laws, ordinances, statutes, and lawful orders issued by authorities having jurisdiction, and rules, conventions, and agreements within the construction industry that control performance of the Work.
- F. "Furnish": Supply and deliver to Project site, ready for unloading, unpacking, assembly, installation, and similar operations.
- G. "Install": Operations at Project site including unloading, temporarily storing, unpacking, assembling, erecting, placing, anchoring, applying, working to dimension, finishing, curing, protecting, cleaning, and similar operations.
- H. "Provide": Furnish and install, complete and ready for the intended use.
- I. "Installer": An installer is Contractor or another entity engaged by Contractor, as an employee, subcontractor, or contractor of lower tier, to perform a particular construction operation, including installation, erection, application, and similar operations.
- J. "Experienced": The term "experienced," when used with the term "installer," means having successfully completed a minimum of five previous projects similar in size and scope to this Project; being familiar with the special requirements indicated; and having complied with requirements of authorities having jurisdiction.
 - 1. Using a term such as "carpentry" does not imply that accredited or unionized individuals of a corresponding generic name, such as "carpenter", must perform certain construction activities. It also does not imply that requirements specified apply exclusively to tradespeople of the corresponding generic name.
- K. "Project Site": Space available for performing construction activities. The extent of Project site is shown on Drawings and may or may not be identical with the description of the land on which Project is to be built.

1.2 INDUSTRY STANDARDS

A. Identification and Purpose:

1. Identification: Throughout the Contract Documents are references to nationally known and recognized Codes, Reference Standards, Reference Specifications, and similar documents that are published by Regulatory Agencies, Trade and Manufacturing Associations and Societies, Testing Agencies and others. References also include certain Project Documents or designated portions.
2. Purpose: All named and otherwise identified "Reference Standards" are "by reference" hereby incorporated into these Specifications as though fully written and hereby serve to establish specific requirements and pertinent characteristics for materials and workmanship as well as methods for testing / reporting on compliance thereto.

B. Procedures and Responsibilities:

1. Compliance with Laws and Codes of governmental agencies having jurisdiction shall be mandatory and take precedence over the requirements of all other Reference Standards. For products or workmanship specified by Associations, Trade, or Federal Standards, comply with the requirements of the standard, except when supplemented instructions indicate a more rigid standard and / or define more precise requirements.
 - a. Should specified reference standards conflict with regulatory requirements or the Contract Documents, request Project Engineer's / MDOT Architect's clarification before proceeding.
2. The Contractor (including any and all Parties furnishing and / or installing any portion of The Work) shall be familiar with the indicated codes and standards. It shall be the Contractor's responsibility to verify the detailed requirements of the specifically named codes and standards and to verify (and provide written certification, when required) that the items procured for use in this Work (and their installation, as applicable) meet or exceed the specified requirements.
3. The contractual relationship of the Parties to the Contract shall not be altered from the requirements of the Contract Documents by mention or inference otherwise in any reference document.

C. Publication Dates: Comply with standards in effect as of date of the Contract Documents unless otherwise indicated or when earlier editions are specifically required by Codes.

D. Copies of Standards: Each entity engaged in construction on Project should be familiar with industry standards applicable to its construction activity. Copies of applicable standards are not bound with the Contract Documents.

1. Where copies of standards are needed to perform a required construction activity, obtain copies directly from publication source.

1.3 ABBREVIATIONS AND ACRONYMS

- A. Industry Organizations: Where abbreviations and acronyms are used in Specifications or other Contract Documents, they shall mean the recognized name of the entities indicated in the following list. Abbreviations and acronyms not included in this list shall mean the recognized name of the entities indicated in Gale's "Encyclopedia of Associations: National Organizations of the U.S." or in Columbia Books' "National Trade & Professional Associations of the United States." The information in this list is subject to change and is believed to be accurate as of the date of the Contract Documents

AABC	Associated Air Balance Council; www.aabc.com .
AAMA	American Architectural Manufacturers Association; www.aamanet.org .
AASHTO	American Association of State Highway and Transportation Officials www.transportation.org .
ACI	American Concrete Institute (Formerly: ACI International); www.concrete.org
ACPA	American Concrete Pipe Association; www.concrete-pipe.org .
AEIC	Association of Edison Illuminating Companies, Inc. (The); www.aeic.org .
AGA	American Gas Association; www.aga.org .
AHAM	Association of Home Appliance Manufacturers; www.aham.org .
AHRI	Air-Conditioning, Heating, and Refrigeration Institute (The); www.ahrinet.org .
AI	Asphalt Institute; www.asphaltinstitute.org .
AIA	American Institute of Architects (The); www.aia.org .
AISC	American Institute of Steel Construction; www.aisc.org .
AISI	American Iron and Steel Institute; www.steel.org .
AMCA	Air Movement and Control Association International, Inc.; www.amca.org .
ANSI	American National Standards Institute; www.ansi.org .
AOSA	Association of Official Seed Analysts, Inc.; www.aosaseed.com .
APA	APA - The Engineered Wood Association; www.apawood.org .
APA	Architectural Precast Association; www.archprecast.org .
API	American Petroleum Institute; www.api.org .
ARI	Air-Conditioning & Refrigeration Institute (See AHRI)
ARI	American Refrigeration Institute (See AHRI)
ASCE	American Society of Civil Engineers; www.asce.org .
ASCE/SEI	American Society of Civil Engineers / Structural Engineering Institute (See ASCE)
ASHRAE	American Society of Heating, Refrigerating and Air-Conditioning Engineers; www.ashrae.org .
ASME	ASME International (American Society of Mechanical Engineers); www.asme.org .
ASSE	American Society of Sanitary Engineering; www.asse.org .
ASTM	ASTM International (American Society for Testing and Materials International); www.astm.org .
AWI	Architectural Woodwork Institute; www.awinet.org .
AWPA	American Wood Protection Association (Formerly: American Wood-Preservers' Association); www.awpa.com .
AWS	American Welding Society; www.aws.org .
AWWA	American Water Works Association; www.awwa.org .
BHMA	Builders Hardware Manufacturers Association; www.buildershardware.com .
CFSEI	Cold-Formed Steel Engineers Institute; www.cfsei.org .
CGA	Compressed Gas Association; www.cganet.com .
CIMA	Cellulose Insulation Manufacturers Association; www.cellulose.org .
CISCA	Ceilings & Interior Systems Construction Association; www.cisca.org .
CRI	Carpet and Rug Institute (The); www.carpet-rug.org .
CRRC	Cool Roof Rating Council; www.coolroofs.org

CRSI	Concrete Reinforcing Steel Institute; www.crsi.org .
CSA	CSA International (Formerly: IAS - International Approval Services); www.csa-international.org
CSI	Construction Specifications Institute (The); www.csinet.org .
DASMA	Door and Access Systems Manufacturers Association; www.dasma.com .
DHI	Door and Hardware Institute; www.dhi.org .
ECA	Electronic Components Association; (See ECIA).
FM Approvals	FM Approvals LLC; www.fmglobal.com .
FM Global	FM Global (Formerly: FMG - FM Global); www.fmglobal.com .
GA	Gypsum Association; www.gypsum.org .
GANA	Glass Association of North America; www.glasswebsite.com .
HMMA	Hollow Metal Manufacturers Association (See NAAMM)
HPVA	Hardwood Plywood & Veneer Association; www.hpva.org .
ICBO	International Conference of Building Officials (See ICC)
ICC	International Code Council; www.iccsafe.org .
ICRI	International Concrete Repair Institute, Inc.; www.icri.org .
IES	Illuminating Engineering Society (Formerly: Illuminating Engineering Society of North America); www.ies.org .
IGMA	Insulating Glass Manufacturers Alliance; www.igmaonline.org .
IGSHPA	International Ground Source Heat Pump Association; www.igshpa.okstate.edu .
ISO	International Organization for Standardization; www.iso.org .
LPI	Lightning Protection Institute; www.lightning.org .
MBMA	Metal Building Manufacturers Association; www.mbma.com .
MCA	Metal Construction Association; www.metalconstruction.org .
MFMA	Metal Framing Manufacturers Association, Inc.; www.metalframingmfg.org .
MIA	Marble Institute of America; www.marble-institute.com .
MMPA	Moulding & Millwork Producers Association (Formerly: Wood Moulding & Millwork Producers Association); www.wmmpa.com .
MPI	Master Painters Institute; www.paintinfo.com .
NAIMA	North American Insulation Manufacturers Association; www.naima.org .
NCMA	National Concrete Masonry Association; www.ncma.org .
NEBB	National Environmental Balancing Bureau; www.nebb.org .
NECA	National Electrical Contractors Association; www.necanet.org .
NEMA	National Electrical Manufacturers Association; www.nema.org .
NETA	InterNational Electrical Testing Association; www.netaworld.org .
NFPA	NFPA (National Fire Protection Association); www.nfpa.org .
NFRC	National Fenestration Rating Council; www.nfrc.org .
NHLA	National Hardwood Lumber Association; www.nhla.com .
NLGA	National Lumber Grades Authority; www.nlga.org .
NSPE	National Society of Professional Engineers; www.nspe.org .
NSSGA	National Stone, Sand & Gravel Association; www.nssga.org .
NTMA	National Terrazzo & Mosaic Association, Inc. (The); www.ntma.com .
PDI	Plumbing & Drainage Institute; www.pdionline.org .
RFCI	Resilient Floor Covering Institute; www.rfci.com
SDI	Steel Deck Institute; www.sdi.org .
SDI	Steel Door Institute; www.steeldoor.org .
SEI/ASCE	Structural Engineering Institute/American Society of Civil Engineers (See ASCE)
SJI	Steel Joist Institute; www.steeljoist.org .
SMACNA	Sheet Metal and Air Conditioning Contractors' National Association; www.smacna.org .

SPIB	Southern Pine Inspection Bureau; www.spib.org .
SRCC	Solar Rating and Certification Corporation; www.solar-rating.org .
SSINA	Specialty Steel Industry of North America; www.ssina.com .
SSPC	SSPC: The Society for Protective Coatings; www.sspc.org .
SWPA	Submersible Wastewater Pump Association; www.swpa.org .
TIA	Telecommunications Industry Association (Formerly: TIA/EIA – Telecommunications Industry Association/Electronic Industries Alliance); www.tiaonline.org .
TMS	The Masonry Society; www.masonrysociety.org .
TPI	Truss Plate Institute; www.tpinst.org .
TPI	Turfgrass Producers International; www.turfgrasssod.org .
UL	Underwriters Laboratories Inc.; http://www.ul.com .
WCMA	Window Covering Manufacturers Association; www.wcmanet.org .
WDMA	Window & Door Manufacturers Association; www.wdma.com .
WWPA	Western Wood Products Association; www.wwpa.org .

- B. Code Agencies: Where abbreviations and acronyms are used in Specifications or other Contract Documents, they shall mean the recognized name of the entities in the following list.

DIN	Deutsches Institut fur Normung e.V.; www.din.de .
IAPMO	International Association of Plumbing and Mechanical Officials; www.iapmo.org .
ICC	International Code Council; www.iccsafe.org .
ICC-ES	ICC Evaluation Service, LLC; www.icc-es.org .

- C. Federal Government Agencies: Where abbreviations and acronyms are used in Specifications or other Contract Documents, they shall mean the recognized name of the entities in the following list.

COE	Army Corps of Engineers; www.usace.army.mil ;
CPSC	Consumer Product Safety Commission; www.cpsc.gov .
DOC	Department of Commerce
	National Institute of Standards and Technology; www.nist.gov .
DOE	Department of Energy; www.energy.gov .
EPA	Environmental Protection Agency; www.epa.gov .
FG	Federal Government Publications; www.gpo.gov/fdsys .
GSA	General Services Administration; www.gsa.gov .
HUD	Department of Housing and Urban Development; www.hud.gov .
LBL	Lawrence Berkeley National Laboratory
	Environmental Energy Technologies Division; www.eetd.lbl.gov .
OSHA	Occupational Safety & Health Administration; www.osha.gov .
TRB	Transportation Research Board;
	National Cooperative Highway Research Program; www.trb.org .
USDA	Department of Agriculture;
	Agriculture Research Service; U.S. Salinity Laboratory; www.ars.usda.gov .
USDA	Department of Agriculture;
	Rural Utilities Service; www.usda.gov .

- D. Standards and Regulations: Where abbreviations and acronyms are used in Specifications or other Contract Documents, they shall mean the recognized name of the standards and regulations in the following list.

CFR	Code of Federal Regulations; ; Available from Government Printing Office; www.gpo.gov/fdsys .
DOD	Department of Defense; Military Specifications and Standards Available from Department of Defense Single Stock Point; www.quicksearch.dla.mil .
FED-STD	Federal Standard (See FS)
FS	Federal Specification; Available from DLA Document Services; www.quicksearch.dla.mil . Available from Defense Standardization Program; www.dsp.dla.mil Available from General Services Administration; www.gsa.gov . Available from National Institute of Building Sciences/Whole Building Design Guide; www.wbdg.org/ccb .
MILSPEC	Military Specification and Standards (See DOD)
USAB	United States Access Board; www.access-board.gov .
USATBCB	U.S. Architectural & Transportation Barriers Compliance Board (See USAB)

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION

SECTION 01 45 29

TESTING AND INSPECTION SERVICES - MDOT

PART 1 - GENERAL

1.01 SUMMARY

- A. Scope: The Contractor shall use testing laboratory services of the Mississippi Department of Transportation for all testing required in this Section. These services will be provided to the Contractor by the MDOT at no charge. Use of said services shall in no way relieve the Contractor of his obligation to perform Work in accordance with the Contract.
- B. Inspection, Sampling and Testing are required for:
 - 1. Section 03 10 00, Concrete Forming.
 - 2. Section 03 20 00, Concrete Reinforcing.
 - 3. Section 03 30 00, Cast-In-Place Concrete.

1.02 LABORATORY'S DUTIES

- A. Materials will be inspected and sampled in accordance with current Mississippi Department of Transportation SOP pertaining to inspecting and sampling.
- B. Prepare reports of inspections and tests including:
 - 1. Date issued.
 - 2. Project title and number.
 - 3. Testing laboratory, name and address.
 - 4. Name and signature of inspector.
 - 5. Date of inspection or sampling.
 - 6. Record of temperature and weather.
 - 7. Date of test.
 - 8. Identification of product and Specification Section.
 - 9. Location of project.
 - 10. Type inspection or test.
 - 11. Observations regarding compliance with Contract Documents requirements.
- C. Distribute copies of reports of inspections and tests to Project Engineer and one copy to the MDOT Architect.

1.03 CONTRACTOR'S RESPONSIBILITIES

- A. Cooperate with laboratory personnel to provide to laboratory in required quantities preliminary representative samples of materials to be tested.
- B. When required, furnish copies of mill test reports. Furnish to laboratory, casual labor to obtain and handle samples at the site and to facilitate inspections and tests.
- C. Provide facilities for laboratory's exclusive use for storage and curing of test samples.
- D. Notify laboratory in advance of operations to allow for assignment of personnel and scheduling of tests.

1.04 MATERIAL CERTIFICATIONS AND CERTIFIED TEST REPORTS

A. All certifications shall meet the following requirements:

1. Have letterhead of the manufacturer, producer, supplier, or fabricator.
2. Include the project number.
3. Itemized list of materials covered by the certification.
4. Contain a material conformance statement, which certifies that the materials conform to the specific specification requirements.
5. Certification for all steel and steel wire products must also include a certified statement by the manufacturer that all of the manufacturing processes are of domestic origin.
6. Signature of a responsible company official.

B. All certified test reports shall meet the following requirements:

1. Have letterhead of the manufacturer, producer, supplier, or fabricator
2. Include name and description of material, lot, batch, or heat number, etc., as applicable.
3. Show results of each required test, and state that the test was run according to the test method specified.
4. Test method specified statement by the manufacturer that all of the manufacturing processes are of domestic origin.
5. Signature of a responsible laboratory official.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION

SECTION 01 50 00

TEMPORARY FACILITIES AND CONTROLS

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes requirements for temporary utilities, support facilities, and security and protection facilities.
- B. Related Requirements: Section 01 10 00 "Summary" for work restrictions and limitations on utility interruptions.

1.2 USE CHARGES

- A. General: Installation and removal of temporary facilities shall be included in the Contract Sum unless otherwise indicated. Allow other entities to use temporary services and facilities without cost, including, but not limited to, Project Engineer, occupants of Project, testing agencies, and authorities having jurisdiction.
- B. Water and Sewer Service from Existing System: Water from Owner's existing water system is available for use without metering and without payment of use charges. Provide connections and extensions of services as required for construction operations.
- C. Electric Power Service from Existing System: Electric power from Owner's existing system is available for use without metering and without payment of use charges. Provide connections and extensions of services as required for construction operations.

1.3 INFORMATIONAL SUBMITTALS

- A. Site Plan: Show temporary facilities, utility hookups, staging areas, and parking areas for construction personnel.
- B. Erosion- and Sedimentation-Control Plan: Show compliance with requirements of EPA Construction General Permit or authorities having jurisdiction, whichever is more stringent.
- C. Fire-Safety Program: Show compliance with requirements of NFPA 241 and authorities having jurisdiction. Indicate Contractor personnel responsible for management of fire prevention program.

1.4 QUALITY ASSURANCE

- A. Electric Service: Comply with NECA, NEMA, and UL standards and regulations for temporary electric service. Install service to comply with NFPA 70.
- B. Tests and Inspections: Arrange for authorities having jurisdiction to test and inspect each temporary utility before use. Obtain required certifications and permits.
- C. Accessible Temporary Egress: Comply with applicable provisions in the U.S. Architectural & Transportation Barriers Compliance Board's ADA-ABA Accessibility Guidelines and ICC/ANSI A117.

1.5 PROJECT CONDITIONS

- A. Temporary Use of Permanent Facilities: Engage Installer of each permanent service to assume responsibility for operation, maintenance, and protection of each permanent service during its use as a construction facility before Owner's acceptance, regardless of previously assigned responsibilities.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Portable Chain-Link Fencing: Minimum 2-inch, 0.148-inch- thick, galvanized-steel, chain-link fabric fencing; minimum 6 feet high with galvanized-steel pipe posts; minimum 2-3/8-inch-OD line posts and 2-7/8-inch-OD corner and pull posts, with 1-5/8-inch-OD top and bottom rails. Provide concrete bases for supporting posts.

2.2 TEMPORARY FACILITIES

- A. Field Offices: The Contractor is not required to furnish a field office, but shall provide at the job site duplicates of all correspondence, shop drawings, plans, specifications, samples, etc. required to administer the Project. These duplicates will be permanently kept as reference and shall not be used in the field. Contractor shall provide the Project Engineer and the MDOT Architect with job site and emergency telephone numbers.
- B. Storage and Fabrication Sheds: It shall be the Contractor's option to provide watertight storage facilities for storage of cement, lime, and / or other materials subject to water damage. If storage facilities are used, it shall be of sufficient size to hold all materials required for logically grouped activities on the site at one time, and shall have floors raised at least 6 inches above the ground on heavy joists or sleepers. Fully enclosed trailer is allowed, but location must be coordinated with Project Engineer.

2.3 EQUIPMENT

- A. Fire Extinguishers: Portable, UL rated; with class and extinguishing agent as required by locations and classes of fire exposures.
- B. HVAC Equipment: Unless Owner authorizes use of permanent HVAC system, provide vented, self-contained, liquid-propane-gas or fuel-oil heaters with individual space thermostatic control.
 - 1. Use of gasoline-burning space heaters, open-flame heaters, or salamander-type heating units is prohibited.
 - 2. Heating Units: Listed and labeled for type of fuel being consumed, by a qualified testing agency acceptable to authorities having jurisdiction, and marked for intended location and application.
 - 3. Permanent HVAC System: If Owner authorizes use of permanent HVAC system for temporary use during construction, provide filter with MERV of 8 at each return-air grille in system and remove at end of construction and clean HVAC system as required in Section 01 77 00 "Closeout Procedures".

PART 3 - EXECUTION

3.1 INSTALLATION, GENERAL

- A. Locate facilities where they will serve Project adequately and result in minimum interference with performance of the Work. Relocate and modify facilities as required by progress of the Work.
 - 1. Locate facilities to limit site disturbance as specified in Section 01 10 00 "Summary."
- B. Provide each facility ready for use when needed to avoid delay. Do not remove until facilities are no longer needed or are replaced by authorized use of completed permanent facilities.
- C. Powder Actuated Tools: The use of powder actuated tools shall be prohibited from use during all phases of the construction, unless explicitly approved in writing, prior to construction, by the Project Engineer.

3.2 TEMPORARY UTILITY INSTALLATION

- A. General: Install temporary service or connect to existing service.
 - 1. Arrange with utility company, Owner, and existing users for time when service can be interrupted, if necessary, to make connections for temporary services.
- B. Sewers and Drainage: Provide temporary utilities to remove effluent lawfully.
 - 1. Connect temporary sewers to system indicated as directed by authorities having jurisdiction.
- C. Water Service: Install water service and distribution piping in sizes and pressures adequate for construction.
- D. Water Service: Connect to Owner's existing water service facilities. Clean and maintain water service facilities in a condition acceptable to Owner. At Substantial Completion, restore these facilities to condition existing before initial use.
- E. Sanitary Facilities: Provide temporary toilets, wash facilities, and drinking water for use of construction personnel. Comply with requirements of authorities having jurisdiction for type, number, location, operation, and maintenance of fixtures and facilities.
 - 1. Toilets: Use of Owner's existing toilet facilities may be permitted, if acceptable with the Project Engineer, and as long as facilities are cleaned and maintained in a condition acceptable to Owner. At Final Completion, restore these facilities to condition existing before initial use.
- F. Heating and Cooling: Provide temporary heating and cooling required by construction activities for curing or drying of completed installations or for protecting installed construction from adverse effects of low temperatures or high humidity. Select equipment that will not have a harmful effect on completed installations or elements being installed.

- G. Ventilation and Humidity Control: Provide temporary ventilation required by construction activities for curing or drying of completed installations or for protecting installed construction from adverse effects of high humidity. Select equipment that will not have a harmful effect on completed installations or elements being installed. Coordinate ventilation requirements to produce ambient condition required and minimize energy consumption.
- H. Electric Power Service: Provide electric power service and distribution system of sufficient size, capacity, and power characteristics required for construction operations.
 - 1. Install electric power service overhead unless otherwise indicated.
 - 2. Connect temporary service to Owner's existing power source, as directed by Owner.
- I. Lighting: Provide temporary lighting with local switching that provides adequate illumination for construction operations, observations, inspections, and traffic conditions.
 - 1. Install and operate temporary lighting that fulfills security and protection requirements without operating entire system.
- J. Telephone Service: Provide superintendent with cellular telephone or portable two-way radio for use when away from field office.

3.3 SUPPORT FACILITIES INSTALLATION

- A. General: Comply with the following:
 - 1. Provide construction for temporary offices, shops, and sheds located within construction area or within 30 feet of building lines that is noncombustible according to ASTM E 136. Comply with NFPA 241.
 - 2. Maintain support facilities until Project Engineer schedules Final Completion inspection. Remove before Final Completion. Personnel remaining after Final Completion will be permitted to use permanent facilities, under conditions acceptable to Owner.
- B. Traffic Controls: Comply with requirements of authorities having jurisdiction.
 - 1. Protect existing site improvements to remain including curbs, pavement, and utilities.
 - 2. Maintain access for fire-fighting equipment and access to fire hydrants.
 - 3. The drive is to remain open at all times. A flagman will be required to control traffic when construction vehicles are present.
- C. Parking: Use designated areas of Owner's existing parking areas for construction personnel.
- D. Dewatering Facilities and Drains: Comply with requirements of authorities having jurisdiction. Maintain Project site, excavations, and construction free of water.
 - 1. Dispose of rainwater in a lawful manner that will not result in flooding Project or adjoining properties or endanger permanent Work or temporary facilities.
 - 2. Remove snow and ice as required to minimize accumulations.
- E. Project Signs: Unauthorized signs are not permitted.

- F. Waste Disposal Facilities: Comply with requirements specified in Section 01 74 19 "Construction Waste Management and Disposal."
- G. Lifts and Hoists: Provide facilities necessary for hoisting materials and personnel.
 - 1. Truck cranes and similar devices used for hoisting materials are considered "tools and equipment" and not temporary facilities.

3.4 SECURITY AND PROTECTION FACILITIES INSTALLATION

- A. Protection of Existing Facilities: Protect existing vegetation, equipment, structures, utilities, and other improvements at Project site and on adjacent properties, except those indicated to be removed or altered. Repair damage to existing facilities.
- B. Environmental Protection: Provide protection, operate temporary facilities, and conduct construction as required to comply with environmental regulations and that minimize possible air, waterway, and subsoil contamination or pollution or other undesirable effects.
- C. Environmental Protection Procedures: Designate one person, the Construction Superintendent or other, to enforce strict discipline on activities related to generation of wastes, pollution of air/water/soil, generation of noise, and similar harmful or deleterious effects which might violate regulations or reasonably irritate persons at or in vicinity of Project Site.
- D. Temporary Erosion and Sedimentation Control: Provide measures to prevent soil erosion and discharge of soil-bearing water runoff and airborne dust to undisturbed areas and to adjacent properties and walkways, according to requirements of 2003 EPA Construction General Permit or authorities having jurisdiction, whichever is more stringent.
- E. Storm water Control: Comply with requirements of authorities having jurisdiction. Provide barriers in and around excavations and subgrade construction to prevent flooding by runoff of storm water from heavy rains.
 - 1. Provide pumps as required to keep the excavation free from standing water and shall slope the excavation to prevent water from running toward existing buildings at all times.
- F. Tree and Plant Protection: Install temporary fencing located as indicated or outside the drip line of trees to protect vegetation from damage from construction operations. Protect tree root systems from damage, flooding, and erosion.
- G. Pest Control: Engage pest-control service to recommend practices to minimize attraction and harboring of rodents, roaches, and other pests and to perform extermination and control procedures at regular intervals so Project will be free of pests and their residues at Substantial Completion. Perform control operations lawfully, using environmentally safe materials.
- H. Security Enclosure and Lockup: Install temporary enclosure around partially completed areas of construction. Provide lockable entrances to prevent unauthorized entrance, vandalism, theft, and similar violations of security. Lock entrances at end of each work day.

- I. Barricades, Warning Signs, and Lights: Comply with requirements of authorities having jurisdiction for erecting structurally adequate barricades, including warning signs and lighting.
 - J. Temporary Egress: Maintain temporary egress from existing occupied facilities as indicated and as required by authorities having jurisdiction.
 - K. Temporary Enclosures: Provide temporary enclosures for protection of construction, in progress and completed, from exposure, foul weather, other construction operations, and similar activities. Provide temporary weathertight enclosure for building exterior.
 - 1. Where heating or cooling is needed and permanent enclosure is not complete, insulate temporary enclosures.
 - L. Temporary Partitions: Provide floor-to-ceiling dustproof partitions to limit dust and dirt migration and to separate areas occupied by Owner from fumes and noise.
 - 1. Construct dustproof partitions with gypsum wallboard with joints taped on occupied side, and fire-retardant-treated plywood on construction operations side.
 - 2. Where fire-resistance-rated temporary partitions are indicated or are required by authorities having jurisdiction, construct partitions according to the rated assemblies.
 - 3. Insulate partitions to control noise transmission to occupied areas.
 - 4. Seal joints and perimeter. Equip partitions with gasketed dustproof doors and security locks where openings are required.
 - 5. Protect air-handling equipment.
 - 6. Provide walk-off mats at each entrance through temporary partition.
 - M. Temporary Fire Protection: Install and maintain temporary fire-protection facilities of types needed to protect against reasonably predictable and controllable fire losses. Comply with NFPA 241; manage fire prevention program.
 - 1. Prohibit smoking in construction areas.
 - 2. Supervise welding operations, combustion-type temporary heating units, and similar sources of fire ignition according to requirements of authorities having jurisdiction.
 - 3. Develop and supervise an overall fire-prevention and -protection program for personnel at Project site. Review needs with local fire department and establish procedures to be followed. Instruct personnel in methods and procedures. Post warnings and information.
- 3.5 MOISTURE AND MOLD CONTROL
- A. Contractor's Moisture Protection Plan: Avoid trapping water in finished work. Document visible signs of mold that may appear during construction.
 - B. Exposed Construction Phase: Before installation of weather barriers, when materials are subject to wetting and exposure and to airborne mold spores, protect materials from water damage and keep porous and organic materials from coming into prolonged contact with concrete.

- C. Partially Enclosed Construction Phase: After installation of weather barriers but before full enclosure and conditioning of building, when installed materials are still subject to infiltration of moisture and ambient mold spores, protect as follows:
 - 1. Do not load or install drywall or other porous materials or components, or items with high organic content, into partially enclosed building.
 - 2. Keep interior spaces reasonably clean and protected from water damage.
 - 3. Discard or replace water-damaged and wet material.
 - 4. Discard, replace, or clean stored or installed material that begins to grow mold.
 - 5. Perform work in a sequence that allows any wet materials adequate time to dry before enclosing the material in drywall or other interior finishes.
- D. Controlled Construction Phase of Construction: After completing and sealing of the building enclosure but prior to the full operation of permanent HVAC systems, maintain as follows:
 - 1. Control moisture and humidity inside building by maintaining effective dry-in conditions.
 - 2. Remove materials that cannot be completely restored to their manufactured moisture level within 72 hours.

3.6 OPERATION, TERMINATION, AND REMOVAL

- A. Supervision: Enforce strict discipline in use of temporary facilities. To minimize waste and abuse, limit availability of temporary facilities to essential and intended uses.
- B. Burning of Trash: No burning of trash or debris shall be done on Owner's property. All such materials shall be removed from the site and disposed of in accordance with local laws and ordinances.
- C. Maintenance: Maintain facilities in good operating condition until removal.
 - 1. Maintain operation of temporary enclosures, heating, cooling, humidity control, ventilation, and similar facilities on a 24-hour basis where required to achieve indicated results and to avoid possibility of damage.
- D. Temporary Facility Changeover: Do not change over from using temporary security and protection facilities to permanent facilities until Date of Completion.
- E. Conduct of workers: Workmen, who, because of improper conduct or persistent violation of Owner's requirements, become objectionable, shall be removed at the Owner's request. Inform all workmen of Owner's requirements.

- F. Termination and Removal: Remove each temporary facility when need for its service has ended, when it has been replaced by authorized use of a permanent facility, or no later than Final Completion. Complete or, if necessary, restore permanent construction that may have been delayed because of interference with temporary facility. Repair damaged Work, clean exposed surfaces, and replace construction that cannot be satisfactorily repaired.
1. Materials and facilities that constitute temporary facilities are property of Contractor.
 2. At Final Completion, repair, renovate, and clean permanent facilities used during construction period. Comply with final cleaning requirements specified in Section 01 77 00 "Closeout Procedures."

END OF SECTION

SECTION 01 60 00

PRODUCT REQUIREMENTS

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes administrative and procedural requirements for selection of products for use in Project; product delivery, storage, and handling; manufacturers' standard warranties on products; special warranties; and comparable products.
- B. Related Requirements: Section 01 25 00 "Substitution Procedures" for requests for substitutions.

1.2 DEFINITIONS

- A. Products: Items obtained for incorporating into the Work, whether purchased for Project or taken from previously purchased stock. The term "product" includes the terms "material," "equipment," "system," and terms of similar intent.
 - 1. Named Products: Items identified by manufacturer's product name, including make or model number or other designation shown or listed in manufacturer's published product literature that is current as of date of the Contract Documents.
 - 2. New Products: Items that have not previously been incorporated into another project or facility. Products salvaged or recycled from other projects are not considered new products.
 - 3. Comparable Product: Product that is demonstrated and approved through submittal process to have the indicated qualities related to type, function, dimension, in-service performance, physical properties, appearance, and other characteristics that equal or exceed those of specified product.
- B. Basis-of-Design Product Specification: A specification in which a specific manufacturer's product is named and accompanied by the words "basis-of-design product," including make or model number or other designation, to establish the significant qualities related to type, function, dimension, in-service performance, physical properties, appearance, and other characteristics for purposes of evaluating comparable products of additional manufacturers named in the specification.

1.3 ACTION SUBMITTALS

- A. Comparable Product Requests: Submit request for consideration of each comparable product. Identify product or fabrication or installation method to be replaced. Include Specification Section number and title and Drawing numbers and titles.
 - 1. MDOT Architect's Action: If necessary, MDOT Architect will request additional information or documentation for evaluation within one week of receipt of a comparable product request. MDOT Architect will notify Contractor of approval or rejection of proposed comparable product request within 15 days of receipt of request, or ten days of receipt of additional information or documentation, whichever is later.
 - a. Form of Approval: As specified in Section 01 33 00 "Submittal Procedures."
 - b. Use product specified if Architect does not issue a decision on use of a comparable product request within time allocated.

- B. Basis-of-Design Product Specification Submittal: Comply with requirements in Section 01 33 00 "Submittal Procedures." Show compliance with requirements.

1.4 QUALITY ASSURANCE

- A. Compatibility of Options: If Contractor is given option of selecting between two or more products for use on Project, select product compatible with products previously selected, even if previously selected products were also options.

1.5 PRODUCT DELIVERY, STORAGE, AND HANDLING

- A. Deliver, store, and handle products using means and methods that will prevent damage, deterioration, and loss, including theft and vandalism. Comply with manufacturer's written instructions.

- B. Delivery and Handling:

1. Schedule delivery to minimize long-term storage at Project site and to prevent overcrowding of construction spaces.
2. Coordinate delivery with installation time to ensure minimum holding time for items that are flammable, hazardous, easily damaged, or sensitive to deterioration, theft, and other losses.
3. Deliver products to Project site in an undamaged condition in manufacturer's original sealed container or other packaging system, complete with labels and instructions for handling, storing, unpacking, protecting, and installing.
4. Inspect products on delivery to determine compliance with the Contract Documents and to determine that products are undamaged and properly protected.

- C. Storage:

1. Store products to allow for inspection and measurement of quantity or counting of units.
2. Store materials in a manner that will not endanger Project structure.
3. Store products that are subject to damage by the elements, under cover in a weathertight enclosure above ground, with ventilation adequate to prevent condensation.
4. Protect foam plastic from exposure to sunlight, except to extent necessary for period of installation and concealment.
5. Comply with product manufacturer's written instructions for temperature, humidity, ventilation, and weather-protection requirements for storage.
6. Protect stored products from damage and liquids from freezing.

1.6 PRODUCT WARRANTIES

- A. Warranties specified in other Sections shall be in addition to, and run concurrent with, other warranties required by the Contract Documents. Manufacturer's disclaimers and limitations on product warranties do not relieve Contractor of obligations under requirements of the Contract Documents.
 1. Manufacturer's Warranty: Written warranty furnished by individual manufacturer for a particular product and specifically endorsed by manufacturer to Owner.
 2. Special Warranty: Written warranty required by the Contract Documents to provide specific rights for Owner.

- B. Special Warranties: Prepare a written document that contains appropriate terms and identification, ready for execution.
 - 1. Manufacturer's Standard Form: Modified to include Project-specific information and properly executed.
 - 2. Specified Form: When specified forms are included with the Specifications, prepare a written document using indicated form properly executed.
 - 3. Refer to other Sections for specific content requirements and particular requirements for submitting special warranties.
- C. Submittal Time: Comply with requirements in Section 01 77 00 "Closeout Procedures."

PART 2 - PRODUCTS

2.1 PRODUCT SELECTION PROCEDURES

- A. General Product Requirements: Provide products that comply with the Contract Documents, are undamaged and, unless otherwise indicated, are new at time of installation.
 - 1. Provide products complete with accessories, trim, finish, fasteners, and other items needed for a complete installation and indicated use and effect.
 - 2. Standard Products: If available, and unless custom products or nonstandard options are specified, provide standard products of types that have been produced and used successfully in similar situations on other projects.
 - 3. Owner reserves the right to limit selection to products with warranties not in conflict with requirements of the Contract Documents.
 - 4. Where products are accompanied by the term "as selected," MDOT Architect will make selection.
 - 5. Descriptive, performance, and reference standard requirements in the Specifications establish salient characteristics of products.
- B. Product Selection Procedures:
 - 1. Products specified only by reference standards, select any product meeting standards by any manufacturer.
 - 2. Products specified by naming several (minimum of three) products or manufacturers, select any product and manufacturer named. Contractor must submit request, as required for substitution, for any product not specifically named and GIVE REASONS for not using product specified. Substitutions WILL NOT be granted unless reasons are considered justified.
 - 3. Products specified by naming one or more products, but indicating the option of selecting equivalent products by stating "or approved equal" after specified product, Contractor must submit request, as required for substitution, for any product not specifically named.
 - 4. Products specified by naming only one product and manufacturer, an equivalent product will always be accepted if it is equal in all respects (size, shape, texture, color, etc.). The Contractor must submit a request for substitution as set forth in this section.
 - 5. Products specified by naming only one product and manufacturer and stating no substitutions will be accepted, there is no option and no substitutions will be allowed.

- C. Visual Matching Specification: Where Specifications require "match Architect's sample", provide a product that complies with requirements and matches Architect's sample. Architect's decision will be final on whether a proposed product matches.
 - 1. If no product available within specified category matches and complies with other specified requirements, comply with requirements in Section 01 25 00 "Substitution Procedures" for proposal of product.
- D. Visual Selection Specification: Where Specifications include the phrase "as selected by Architect from manufacturer's full range" or similar phrase, select a product that complies with requirements. Architect will select color, gloss, pattern, density, or texture from manufacturer's product line that includes both standard and premium items.

2.2 COMPARABLE PRODUCTS

- A. Conditions for Consideration: Architect will consider Contractor's request for comparable product when the following conditions are satisfied. If the following conditions are not satisfied, Architect may return requests without action, except to record noncompliance with these requirements:
 - 1. Evidence that the proposed product does not require revisions to the Contract Documents, that it is consistent with the Contract Documents and will produce the indicated results, and that it is compatible with other portions of the Work.
 - 2. Detailed comparison of significant qualities of proposed product with those named in the Specifications. Significant qualities include attributes such as performance, weight, size, durability, visual effect, and specific features and requirements indicated.
 - 3. Evidence that proposed product provides specified warranty.
 - 4. List of similar installations for completed projects with project names and addresses and names and addresses of architects and owners, if requested.
 - 5. Samples, if requested.

PART 3 - EXECUTION (Not Used)

END OF SECTION

SECTION 01 73 00

EXECUTION

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes general administrative and procedural requirements governing execution of the Work including, but not limited to, the following:
 - 1. Construction layout.
 - 2. Field engineering and surveying.
 - 3. Installation of the Work.
 - 4. Cutting and patching.
 - 5. Progress cleaning.
 - 6. Starting and adjusting.
 - 7. Protection of installed construction.
 - 8. Correction of the Work.
- B. Related Requirements:
 - 1. Section 01 10 00 "Summary" for limits on use of Project site.
 - 2. Section 01 77 00 "Closeout Procedures" for submitting final property survey with Project Record Documents, recording of Owner-accepted deviations from indicated lines and levels, and final cleaning.

1.2 INFORMATIONAL SUBMITTALS

- A. Certificates: Submit certificate signed by land surveyor or professional engineer certifying that location and elevation of improvements comply with requirements.
- B. Certified Surveys: Submit three copies signed by land surveyor or professional engineer.

1.3 QUALITY ASSURANCE

- A. Land Surveyor Qualifications: A professional land surveyor who is legally qualified to practice in jurisdiction where Project is located and who is experienced in providing land-surveying services of the kind indicated.
- B. Cutting and Patching: Comply with requirements for and limitations on cutting and patching of construction elements.
 - 1. Structural Elements: When cutting and patching structural elements, notify Project Engineer of locations and details of cutting and await directions from Project Engineer before proceeding. Shore, brace, and support structural element during cutting and patching. Do not cut and patch structural elements in a manner that could change their load-carrying capacity or increase deflection
 - 2. Operational Elements: Do not cut and patch operating elements and related components in a manner that results in reducing their capacity to perform as intended or that results in increased maintenance or decreased operational life or safety.

3. Other Construction Elements: Do not cut and patch other construction elements or components in a manner that could change their load-carrying capacity, that results in reducing their capacity to perform as intended, or that results in increased maintenance or decreased operational life or safety
4. Visual Elements: Do not cut and patch construction in a manner that results in visual evidence of cutting and patching. Do not cut and patch exposed construction in a manner that would, in MDOT Architect's opinion, reduce the building's aesthetic qualities. Remove and replace construction that has been cut and patched in a visually unsatisfactory manner.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. In-Place Materials: Use materials for patching identical to in-place materials. For exposed surfaces, use materials that visually match in-place adjacent surfaces to the fullest extent possible.
 1. If identical materials are unavailable or cannot be used, use materials that, when installed, will provide a match acceptable to MDOT Architect for the visual and functional performance of in-place materials. Use materials that are not considered hazardous.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Existing Conditions: The existence and location of underground and other utilities and construction indicated as existing are not guaranteed. Before beginning site work, investigate and verify the existence and location of underground utilities, mechanical and electrical systems, and other construction affecting the Work.
 1. Before construction, verify the location and invert elevation at points of connection of sanitary sewer, storm sewer, and water-service piping; underground electrical services, and other utilities.
 2. Furnish location data for work related to Project that must be performed by public utilities serving Project site.
- B. Examination and Acceptance of Conditions: Before proceeding with each component of the Work, examine substrates, areas, and conditions, with Installer or Applicator present where indicated, for compliance with requirements for installation tolerances and other conditions affecting performance. Record observations.
 1. Examine roughing-in for mechanical and electrical systems to verify actual locations of connections before equipment and fixture installation.
 2. Examine walls, floors, and roofs for suitable conditions where products and systems are to be installed.
 3. Verify compatibility with and suitability of substrates, including compatibility with existing finishes or primers.
- C. Proceed with installation only after unsatisfactory conditions have been corrected. Proceeding with the Work indicates acceptance of surfaces and conditions.

3.2 PREPARATION

- A. Existing Utility Information: Furnish information to local utility and the Project Engineer that is necessary to adjust, move, or relocate existing utility structures, utility poles, lines, services, or other utility appurtenances located in or affected by construction. Coordinate with authorities having jurisdiction.
- B. Field Measurements: Take field measurements as required to fit the Work properly. Recheck measurements before installing each product. Where portions of the Work are indicated to fit to other construction, verify dimensions of other construction by field measurements before fabrication. Coordinate fabrication schedule with construction progress to avoid delaying the Work.
- C. Space Requirements: Verify space requirements and dimensions of items shown diagrammatically on Drawings.
- D. Review of Contract Documents and Field Conditions: Immediately on discovery of the need for clarification of the Contract Documents caused by differing field conditions outside the control of Contractor, submit a request for information to Architect according to requirements in Section 01 31 00 "Project Management and Coordination."

3.3 CONSTRUCTION LAYOUT

- A. Verification: Before proceeding to lay out the Work, verify layout information shown on Drawings, in relation to the property survey and existing benchmarks. If discrepancies are discovered, notify Project Engineer and MDOT Architect promptly.
- B. General: Engage a land surveyor or professional engineer to lay out the Work using accepted surveying practices.
 - 1. Establish benchmarks and control points to set lines and levels at each story of construction and elsewhere as needed to locate each element of Project.
 - 2. Establish limits on use of Project site.
 - 3. Establish dimensions within tolerances indicated. Do not scale Drawings to obtain required dimensions.
 - 4. Inform installers of lines and levels to which they must comply.
 - 5. Check the location, level and plumb, of every major element as the Work progresses.
 - 6. Notify Project Engineer and MDOT Architect when deviations from required lines and levels exceed allowable tolerances.
 - 7. Close site surveys with an error of closure equal to or less than the standard established by authorities having jurisdiction.
- C. Site Improvements: Locate and lay out site improvements, including pavements, grading, fill and topsoil placement, utility slopes, and rim and invert elevations.
- D. Building Lines and Levels: Locate and lay out control lines and levels for structures, building foundations, column grids, and floor levels, including those required for mechanical and electrical work. Transfer survey markings and elevations for use with control lines and levels. Level foundations and piers from two or more locations.
- E. Record Log: Maintain a log of layout control work. Record deviations from required lines and levels. Include beginning and ending dates and times of surveys, weather conditions, name and duty of each survey party member, and types of instruments and

tapes used. Make the log available for reference by Project Engineer and MDOT Architect.

3.4 FIELD ENGINEERING

- A. Reference Points: Locate existing permanent benchmarks, control points, and similar reference points before beginning the Work. Preserve and protect permanent benchmarks and control points during construction operations.
- B. Benchmarks: Establish and maintain a minimum of two permanent benchmarks on Project site, referenced to data established by survey control points. Comply with authorities having jurisdiction for type and size of benchmark.
 - 1. Record benchmark locations, with horizontal and vertical data, on Project Record Documents.

3.5 INSTALLATION

- A. General: Locate the Work and components of the Work accurately, in correct alignment and elevation, as indicated.
 - 1. Make vertical work plumb and make horizontal work level.
 - 2. Where space is limited, install components to maximize space available for maintenance and ease of removal for replacement.
 - 3. Conceal pipes, ducts, and wiring in finished areas unless otherwise indicated.
- B. Comply with manufacturer's written instructions and recommendations for installing products in applications indicated.
- C. Install products at the time and under conditions that will ensure the best possible results. Maintain conditions required for product performance until Final Completion.
- D. Conduct construction operations so no part of the Work is subjected to damaging operations or loading in excess of that expected during normal conditions of occupancy.
- E. Sequence the Work and allow adequate clearances to accommodate movement of construction items on site and placement in permanent locations.
- F. Tools and Equipment: Do not use tools or equipment that produce harmful noise levels.
- G. Templates: Obtain and distribute to the parties involved templates for work specified to be factory prepared and field installed. Check Shop Drawings of other work to confirm that adequate provisions are made for locating and installing products to comply with indicated requirements.
- H. Attachment: Provide blocking and attachment plates and anchors and fasteners of adequate size and number to securely anchor each component in place, accurately located and aligned with other portions of the Work. Where size and type of attachments are not indicated, verify size and type required for load conditions.
 - 1. Mounting Heights: Where mounting heights are not indicated, mount components at heights directed by Project Engineer. Mounting heights shall comply with ADA and OSHA requirements.
 - 2. Allow for building movement, including thermal expansion and contraction.

3. Coordinate installation of anchorages. Furnish setting drawings, templates, and directions for installing anchorages, including sleeves, concrete inserts, anchor bolts, and items with integral anchors, that are to be embedded in concrete or masonry. Deliver such items to Project site in time for installation.
- I. Joints: Make joints of uniform width. Where joint locations in exposed work are not indicated, arrange joints for the best visual effect. Fit exposed connections together to form hairline joints.
 - J. Hazardous Materials: Use products, cleaners, and installation materials that are not considered hazardous.
- 3.6 CUTTING AND PATCHING
- A. Cutting and Patching, General: Employ skilled workers to perform cutting and patching. Proceed with cutting and patching at the earliest feasible time, and complete without delay.
 1. Cut in-place construction to provide for installation of other components or performance of other construction, and subsequently patch as required to restore surfaces to their original condition.
 - B. Temporary Support: Provide temporary support of work to be cut.
 - C. Protection: Protect in-place construction during cutting and patching to prevent damage. Provide protection from adverse weather conditions for portions of Project that might be exposed during cutting and patching operations.
 - D. Adjacent Occupied Areas: Avoid interference with use of adjoining areas or interruption of free passage to adjoining areas.
 - E. Existing Utility Services and Mechanical/Electrical Systems: Where existing services/systems are required to be removed, relocated, or abandoned, bypass such services/systems before cutting to prevent interruption to occupied areas.
 - F. Cutting: Cut in-place construction by sawing, drilling, breaking, chipping, grinding, and similar operations, including excavation, using methods least likely to damage elements retained or adjoining construction. If possible, review proposed procedures with original Installer; comply with original Installer's written recommendations.
 1. In general, use hand or small power tools designed for sawing and grinding, not hammering and chopping. Cut holes and slots neatly to minimum size required, and with minimum disturbance of adjacent surfaces. Temporarily cover openings when not in use.
 2. Finished Surfaces: Cut or drill from the exposed or finished side into concealed surfaces.
 3. Concrete and Masonry: Cut using a cutting machine, such as an abrasive saw or a diamond-core drill.
 4. Excavating and Backfilling: Comply with requirements in applicable Sections where required by cutting and patching operations.
 5. Mechanical and Electrical Services: Cut off pipe or conduit in walls or partitions to be removed. Cap, valve, or plug and seal remaining portion of pipe or conduit to prevent entrance of moisture or other foreign matter after cutting.
 6. Proceed with patching after construction operations requiring cutting are complete.

- G. Patching: Patch construction by filling, repairing, refinishing, closing up, and similar operations following performance of other work. Patch with durable seams that are as invisible as practicable. Provide materials and comply with installation requirements specified in other Sections, where applicable.
1. Inspection: Where feasible, test and inspect patched areas after completion to demonstrate physical integrity of installation.
 2. Exposed Finishes: Restore exposed finishes of patched areas and extend finish restoration into retained adjoining construction in a manner that will minimize evidence of patching and refinishing.
 3. Floors and Walls: Where walls or partitions that are removed extend one finished area into another, patch and repair floor and wall surfaces in the new space. Provide an even surface of uniform finish, color, texture, and appearance. Remove in-place floor and wall coverings and replace with new materials, if necessary, to achieve uniform color and appearance.
 4. Ceilings: Patch, repair, or rehang in-place ceilings as necessary to provide an even-plane surface of uniform appearance.
 5. Exterior Building Enclosure: Patch components in a manner that restores enclosure to a weathertight condition and ensures thermal and moisture integrity of building enclosure.
- H. Cleaning: Clean areas and spaces where cutting and patching are performed. Remove paint, mortar, oils, putty, and similar materials from adjacent finished surfaces.

3.7 PROGRESS CLEANING

- A. General: Clean Project site and work areas daily, including common areas. Enforce requirements strictly. Dispose of materials lawfully.
1. Comply with requirements in NFPA 241 for removal of combustible waste materials and debris.
 2. Do not hold waste materials more than seven days during normal weather or three days if the temperature is expected to rise above 80 deg F.
 3. Containerize hazardous and unsanitary waste materials separately from other waste. Mark containers appropriately and dispose of legally, according to regulations.
- B. Site: Maintain Project site free of waste materials and debris.
- C. Work Areas: Clean areas where work is in progress to the level of cleanliness necessary for proper execution of the Work.
1. Remove liquid spills promptly.
 2. Where dust would impair proper execution of the Work, broom-clean or vacuum the entire work area, as appropriate.
- D. Installed Work: Keep installed work clean. Clean installed surfaces according to written instructions of manufacturer or fabricator of product installed, using only cleaning materials specifically recommended. If specific cleaning materials are not recommended, use cleaning materials that are not hazardous to health or property and that will not damage exposed surfaces.
- E. Concealed Spaces: Remove debris from concealed spaces before enclosing the space.

- F. Exposed Surfaces in Finished Areas: Clean exposed surfaces and protect as necessary to ensure freedom from damage and deterioration at time of Final Completion.
- G. Waste Disposal: Do not bury or burn waste materials on-site. Do not wash waste materials down sewers or into waterways.
- H. During handling and installation, clean and protect construction in progress and adjoining materials already in place. Apply protective covering where required to ensure protection from damage or deterioration at Date of Completion.
- I. Clean and provide maintenance on completed construction as frequently as necessary through the remainder of the construction period. Adjust and lubricate operable components to ensure operability without damaging effects.
- J. Limiting Exposures: Supervise construction operations to assure that no part of the construction, completed or in progress, is subject to harmful, dangerous, damaging, or otherwise deleterious exposure during the construction period.

3.8 STARTING AND ADJUSTING

- A. Start equipment and operating components to confirm proper operation. Remove malfunctioning units, replace with new units, and retest.
- B. Adjust equipment for proper operation. Adjust operating components for proper operation without binding.
- C. Test each piece of equipment to verify proper operation. Test and adjust controls and safeties. Replace damaged and malfunctioning controls and equipment.
- D. Manufacturer's Field Service: Comply with qualification requirements in Section 01 40 00 "Quality Requirements"

3.9 PROTECTION OF INSTALLED CONSTRUCTION

- A. Provide final protection and maintain conditions that ensure installed Work is without damage or deterioration at time of Date of Completion.
- B. Comply with manufacturer's written instructions for temperature and relative humidity.

END OF SECTION

SECTION 01 74 19

CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes administrative and procedural requirements for the following:

- 1. Recycling nonhazardous construction waste.
- 2. Disposing of nonhazardous construction waste.

1.2 FINITIONS

- A. Construction Waste: Building and site improvement materials and other solid waste resulting from construction, remodeling, renovation, or repair operations. Construction waste includes packaging.
- B. Disposal: Removal off-site of construction waste and subsequent sale, recycling, reuse, or deposit in landfill or incinerator acceptable to authorities having jurisdiction.

1.3 ACTION SUBMITTALS

- A. Waste Management Plan: Submit plan within 15 days of date established for the Notice to Proceed.

1.4 INFORMATIONAL SUBMITTALS

- A. Landfill and Incinerator Disposal Records: Indicate receipt and acceptance of waste by landfills and incinerator facilities licensed to accept them. Include manifests, weight tickets, receipts, and invoices.

1.5 QUALITY ASSURANCE

- A. Waste Management Conference: Conduct conference at Project site to comply with requirements in Section 01 31 00 "Project Management and Coordination."

1.6 WASTE MANAGEMENT PLAN

- A. General: Develop a waste management plan according to ASTM E 1609 and requirements in this Section. Plan shall consist of waste identification, waste reduction work plan.
- B. Waste Reduction Work Plan: List each type of waste and whether it will be salvaged, recycled, or disposed of in landfill or incinerator. Include points of waste generation, total quantity of each type of waste, quantity for each means of recovery, and handling and transportation procedures.
 - 1. Recycled Materials: Include list of local receivers and processors and type of recycled materials each will accept. Include names, addresses, and telephone numbers.
 - 2. Disposed Materials: Indicate how and where materials will be disposed of. Include name, address, and telephone number of each landfill and incinerator facility.

3. Handling and Transportation Procedures: Include method that will be used for separating recyclable waste including sizes of containers, container labeling, and designated location where materials separation will be performed.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION

3.1 PLAN IMPLEMENTATION

- A. General: Implement approved waste management plan. Provide handling, containers, storage, signage, transportation, and other items as required to implement waste management plan during the entire duration of the Contract.
- B. Waste Management Coordinator: Engage a waste management coordinator to be responsible for implementing, monitoring, and reporting status of waste management work plan. Coordinator shall be present at Project site full time for duration of Project.
- C. Training: Train workers, subcontractors, and suppliers on proper waste management procedures, as appropriate for the Work occurring at Project site.
 1. Distribute waste management plan to everyone concerned within five days of submittal return.
 2. Distribute waste management plan to entities when they first begin work on-site. Review plan procedures and locations established for salvage, recycling, and disposal.
- D. Site Access and Temporary Controls: Conduct waste management operations to ensure minimum interference with roads, streets, walks, walkways, and other adjacent occupied and used facilities.
 1. Designate and label specific areas on Project site necessary for separating materials that are to be salvaged, recycled, reused, donated, and sold.
 2. Comply with Section 01 50 00 "Temporary Facilities and Controls" for controlling dust and dirt, environmental protection, and noise control.

3.2 RECYCLING DEMOLITION AND CONSTRUCTION WASTE, GENERAL

- A. General: Recycle paper and beverage containers used by on-site workers.
- B. Procedures: Separate recyclable waste from other waste materials, trash, and debris. Separate recyclable waste by type at Project site to the maximum extent practical according to approved construction waste management plan.
 1. Provide appropriately marked containers or bins for controlling recyclable waste until they are removed from Project site. Include list of acceptable and unacceptable materials at each container and bin.
 - a. Inspect containers and bins for contamination and remove contaminated materials if found.
 2. Stockpile processed materials on-site without intermixing with other materials. Place, grade, and shape stockpiles to drain surface water. Cover to prevent windblown dust.

3. Stockpile materials away from construction area. Do not store within drip line of remaining trees.
4. Store components off the ground and protect from the weather.
5. Remove recyclable waste from Owner's property and transport to recycling receiver or processor.

3.3 RECYCLING CONSTRUCTION WASTE

A. Packaging:

1. Cardboard and Boxes: Break down packaging into flat sheets. Bundle and store in a dry location.
2. Polystyrene Packaging: Separate and bag materials.
3. Pallets: As much as possible, require deliveries using pallets to remove pallets from Project site. For pallets that remain on-site, break down pallets into component wood pieces and comply with requirements for recycling wood.
4. Crates: Break down crates into component wood pieces and comply with requirements for recycling wood.

B. Wood Materials:

1. Clean Cut-Offs of Lumber: Grind or chip into small pieces.
2. Clean Sawdust: Bag sawdust that does not contain painted or treated wood.

C. Gypsum Board: Stack large clean pieces on wood pallets or in container and store in a dry location.

1. Clean Gypsum Board: Grind scraps of clean gypsum board using small mobile chipper or hammer mill. Screen out paper after grinding.

3.4 DISPOSAL OF WASTE

A. General: Except for items or materials to be salvaged, recycled, or otherwise reused, remove waste materials from Project site and legally dispose of them in a landfill or incinerator acceptable to authorities having jurisdiction.

1. Except as otherwise specified, do not allow waste materials that are to be disposed of accumulate on-site.
2. Remove and transport debris in a manner that will prevent spillage on adjacent surfaces and areas.

B. Burning: Do not burn waste materials.

C. Disposal: Remove waste materials from Owner's property and legally dispose of them.

END OF SECTION

SECTION 01 77 00

CLOSEOUT PROCEDURES

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes administrative and procedural requirements for contract closeout, including, but not limited to, the following:
 - 1. Final completion procedures.
 - 2. Warranties.
 - 3. Final cleaning.
 - 4. Repair of the Work.
- B. Related Requirements:
 - 1. Section 01 32 33 "Photographic Documentation" for submitting final completion construction photographic documentation.
 - 2. Section 01 78 23 "Operation and Maintenance Data" for operation and maintenance manual requirements.
 - 3. Section 01 78 39 "Project Record Documents" for submitting record Drawings, record Specifications, and record Product Data.
 - 4. Section 01 79 00 "Demonstration and Training" for requirements for instructing Owner's personnel.

1.2 FINAL INSPECTIONS

- A. Engineer and Architect's Inspection: The Contractor shall make written request for a Final Inspection to the Project Engineer and MDOT Architect. Notice is to be given 10 calendar days prior to this inspection. At the day of inspection, the Contractor shall have in hand 6 copies of the HVAC Test and Balance Report, Reference Specification Sections in Division 23 and 6 copies of a list prepared by the Contractor of deficiencies, which will be edited by the Project Engineer, MDOT Architect and Consultants. A copy of these composite lists will be given to the Contractor for correcting the Work. Within 15 calendar days after this revised list is received, the Contractor shall make all corrections of the items listed. If, in the Project Engineer and MDOT Architect's judgment, the Project is not ready for an Inspection, the Project Engineer may schedule another inspection.
- B. Owner's Inspection: After the Project Engineer and MDOT Architect have determined the Project to be Complete and all punch list items have been corrected, an Owner's Inspection will be scheduled. The Contractor shall submit a letter that states all items have been corrected and submit required closeout Documents. The Owners may add to the punch list items; if it is determined that corrective work still needs to be done. Within 15 calendar days after this revised list is received, the Contractor shall make all corrections of the items listed.

- C. Correction of Work before Final Payment: Contractor shall promptly remove from the Owner's premises, all materials condemned for failure to conform to the Contract, whether incorporated in Work or not, and Contractor shall, at his own expense, replace such condemned materials with those conforming to the requirements of the Contract. Failure to remedy such defects after 10 days written notice will allow the Owner to make good such defects and such costs shall be deducted from the balance due the Contractor or charged to the Contractor in the event no payment is due.
- D. Should additional inspections by the MDOT Architect's Consultants of the Work be required due to failure of the Contractor to remedy defects listed, the Project Engineer may deduct the expense of additional Consultants inspections from the Contract Sum in the Owner / Contractor Agreement. The additional expense will be based on the rate shown for services in the Consultants' Architect or Engineering Services Contract.

1.3 FINAL ACCEPTANCE

- A. The Mississippi Department of Transportation does not recognize the term "Substantial Completion". The Project Engineer shall determine when the building is complete to the point it can be used for its intended purpose and occupied. This date shall be the Date of Completion.
- B. Final Payment shall not be made until items covered in Closeout Procedures are satisfied. This date shall be the Date of Final Acceptance.

1.4 SUBMITTAL OF PROJECT WARRANTIES

- A. Time of Submittal: All Warranties and Extended Warranties shall use this Date of Completion as the starting date of Warranty Period.
- B. Organize warranty documents into an orderly sequence based on the table of contents of the Project Manual.
 - 1. Bind warranties and bonds in heavy-duty, three-ring, vinyl-covered, loose-leaf binders, thickness as necessary to accommodate contents, and sized to receive 8-1/2-by-11-inch paper.
 - 2. Provide heavy paper dividers with plastic-covered tabs for each separate warranty. Mark tab to identify the product or installation. Provide a typed description of the product or installation, including the name of the product and the name, address, and telephone number of Installer.
 - 3. Identify each binder on the front and spine with the typed or printed title "WARRANTIES," Project name, and name of Contractor.
 - 4. Warranty Electronic File: Scan warranties and bonds and assemble complete warranty and bond submittal package into a single indexed electronic PDF file with links enabling navigation to each item. Provide bookmarked table of contents at beginning of document.
- C. Provide additional copies of each warranty to include in operation and maintenance manuals.

1.5 CLOSEOUT DOCUMENTS

- A. Unless otherwise notified, the Contractor shall submit to the Owner through the Project Engineer to the MDOT Architect 2 copies the following before final payment is made:
1. Request for Final Payment: AIA Document G702, current edition, completed in full or a computer generated form having similar data.
 2. Contractor's Affidavit of Payment of Debts and Claims: AIA Document G706, current edition, completed in full.
 3. Release of Liens and Certification that all Bills Have Been Paid: AIA Document G706A, current edition, completed in full or a sworn statement and affidavit from the Contractor to the Owner stating that all bills for this project have been paid and that the Owner is released from any and all claims and / or damages.
 4. Consent of Surety Company to Final Payment: AIA Document G707, current edition, completed in full by the Bonding Company.
 5. Power of Attorney: Closeout Documents should be accompanied by an appropriate Power of Attorney.
 6. Guarantee of Work: Sworn statement that all Work is asbestos free and guaranteed against defects in materials and workmanship for one year from Date of Completion, except where specified for longer periods.
 - a. Word the guaranty as follows: "We hereby guarantee all Work performed by us on the above captioned Project to be free from asbestos and defective materials. We also guarantee workmanship for a period of one (1) year or such longer period of time as may be called for in the Contract Documents for such portions of the Work".
 - b. All guarantees and warranties shall be obtained in the Owner's name.
 - c. Within the guaranty period, if repairs or changes are requested in connection with guaranteed Work which, in the opinion of the Owner, is rendered necessary as a result of the use of materials, equipment, or workmanship which are inferior, defective, or not in accordance with the terms of the Contract, the Contractor shall promptly, upon receipt of notice from and without expense to the Owner, place in satisfactory condition in every particular, all such guaranteed Work, correct all defects wherein and make good all damages to the building, site, equipment or contents thereof which, in the opinion of the Owner, is the result of the use of materials, equipment, or workmanship which are inferior, defective or not in accordance with the terms of the Contract; and make good any Work or materials or the equipment and contents of said buildings or site disturbed in fulfilling any such guaranty.
 - d. If, after notice, the Contractor fails to proceed promptly to comply with the terms of the guaranty, the Owner may have the defects corrected and the Contractor and his sureties shall be liable for all expense incurred.
 - e. All special guaranties applicable to definite parts of the Work stipulated in the Project Manual or other papers forming part of the Contract shall be subject to the terms of this paragraph during the first year of the life of such special guaranty.
 7. Project Record Documents: Furnish all other record documents as set forth in Section 01 78 39 - Project Record Documents.
 - a. Provide all certificates, warranties, guarantees, bonds, or documents as called for in the individual Sections of the Project Manual. The Contractor is responsible for examining the Project Manual for these requirements.

8. Additional Documents Specified Within the Project Manual:
 - a. General Provide all Operational and Maintenance documents as called for in the individual Sections of the Project Manual. The Contractor is responsible for examining the Project Manual for these requirements.
 - b. Maintenance Stock: Deliver to Owner all required additional maintenance materials as required in the various Sections of the Specifications.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Cleaning Agents: Use cleaning materials and agents recommended by manufacturer or fabricator of the surface to be cleaned. Do not use cleaning agents that are potentially hazardous to health or property or that might damage finished surfaces.

PART 3 - EXECUTION

3.1 FINAL CLEANING

- A. General: Perform final cleaning. Conduct cleaning and waste-removal operations to comply with local laws and ordinances and Federal and local environmental and antipollution regulations.
- B. Cleaning: Employ experienced workers or professional cleaners for final cleaning. Clean each surface or unit to condition expected in an average commercial building cleaning and maintenance program. Comply with manufacturer's written instructions.
 1. Complete the following cleaning operations before requesting Engineer and Architect final inspection.
 - a. Clean Project site, yard, and grounds, in areas disturbed by construction activities, including landscape development areas, of rubbish, waste material, litter, and other foreign substances.
 - b. Sweep paved areas broom clean. Remove petrochemical spills, stains, and other foreign deposits.
 - c. Rake grounds that are neither planted nor paved to a smooth, even-textured surface.
 - d. Remove tools, construction equipment, machinery, and surplus material from Project site.
 - e. Remove snow and ice to provide safe access to building.
 - f. Clean exposed exterior and interior hard-surfaced finishes to a dirt-free condition, free of stains, films, and similar foreign substances. Avoid disturbing natural weathering of exterior surfaces. Restore reflective surfaces to their original condition.
 - g. Remove debris and surface dust from limited access spaces, including roofs, plenums, shafts, trenches, equipment vaults, manholes, attics, and similar spaces.
 - h. Sweep concrete floors broom clean in unoccupied spaces.
 - i. Vacuum carpet and similar soft surfaces, removing debris and excess nap; clean according to manufacturer's recommendations if visible soil or stains remain.

- j. Clean transparent materials, including mirrors and glass in doors and windows. Remove glazing compounds and other noticeable, vision-obscuring materials. Replace chipped or broken glass and other damaged transparent materials. Polish mirrors and glass, taking care not to scratch surfaces.
 - k. Remove labels that are not permanent.
 - l. Wipe surfaces of mechanical and electrical equipment, and similar equipment. Remove excess lubrication, paint and mortar droppings, and other foreign substances.
 - m. Clean plumbing fixtures to a sanitary condition, free of stains, including stains resulting from water exposure.
 - n. Replace disposable air filters and clean permanent air filters. Clean exposed surfaces of diffusers, registers, and grills.
 - o. Clean light fixtures, lamps, globes, and reflectors to function with full efficiency.
 - p. Leave Project clean and ready for occupancy.
- C. Pest Control: Comply with pest control requirements in Section 01 50 00 "Temporary Facilities and Controls." Prepare written report.

3.2 REPAIR OF THE WORK

- A. Complete repair and restoration operations before requesting Final Inspection.
- B. Repair or remove and replace defective construction. Repairing includes replacing defective parts, refinishing damaged surfaces, touching up with matching materials, and properly adjusting operating equipment. Where damaged or worn items cannot be repaired or restored, provide replacements. Remove and replace operating components that cannot be repaired. Restore damaged construction and permanent facilities used during construction to specified condition.
 - 1. Remove and replace chipped, scratched, and broken glass, reflective surfaces, and other damaged transparent materials.
 - 2. Touch up and otherwise repair and restore marred or exposed finishes and surfaces. Replace finishes and surfaces that already show evidence of repair or restoration.
 - a. Do not paint over "UL" and other required labels and identification, including mechanical and electrical nameplates. Remove paint applied to required labels and identification.
 - 3. Replace parts subject to operating conditions during construction that may impede operation or reduce longevity.
 - 4. Replace burned-out bulbs, bulbs noticeably dimmed by hours of use, and defective and noisy starters in fluorescent and mercury vapor fixtures to comply with requirements for new fixtures.

END OF SECTION

SECTION 01 78 23

OPERATION AND MAINTENANCE DATA

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes administrative and procedural requirements for preparing operation and maintenance manuals, including the following:
 - 1. Operation and maintenance documentation directory.
 - 2. Emergency manuals.
 - 3. Operation manuals for systems, subsystems, and equipment.
 - 4. Product maintenance manuals.
 - 5. Systems and equipment maintenance manuals.

1.2 CLOSEOUT SUBMITTALS

- A. Manual Content: Operations and maintenance manual content is specified in individual Specification Sections to be reviewed at the time of Section submittals. Submit reviewed manual content formatted and organized as required by this Section.
 - 1. MDOT Architect will comment on whether content of operations and maintenance submittals are acceptable.
 - 2. Where applicable, clarify and update reviewed manual content to correspond to revisions and field conditions.
- B. Format: Submit operations and maintenance manuals in the following format:
 - 1. PDF electronic file. Assemble each manual into a composite electronically indexed file. Submit on digital media acceptable to MDOT Architect.
 - a. Name each indexed document file in composite electronic index with applicable item name. Include a complete electronically linked operation and maintenance directory.
 - b. Enable inserted reviewer comments on draft submittals.
 - 2. Three paper copies. Include a complete operation and maintenance directory. Enclose title pages and directories in clear plastic sleeves. MDOT Architect will return one copy.
- C. Manual Submittal: Submit each manual in final form prior to requesting Final Inspection and at least 15 days before commencing demonstration and training. MDOT Architect will return one copy with comments.
 - 1. Correct or revise each manual to comply with MDOT Architect's comments. Submit two copies of each corrected manual within 15 days of receipt of MDOT Architect's comments and prior to commencing demonstration and training.

PART 2 - PRODUCTS

2.1 REQUIREMENTS FOR EMERGENCY, OPERATION, AND MAINTENANCE MANUALS

- A. Directory: Prepare a single, comprehensive directory of emergency, operation, and maintenance data and materials, listing items and their location to facilitate ready access to desired information.
- B. Organization: Unless otherwise indicated, organize each manual into a separate section for each system and subsystem, and a separate section for each piece of equipment not part of a system. Each manual shall contain the following materials, in the order listed:
 - 1. Title page.
 - 2. Table of contents.
 - 3. Manual contents.
- C. Title Page: Enclose title page in transparent plastic sleeve. Include the following information:
 - 1. Subject matter included in manual.
 - 2. Name and address of Project.
 - 3. Name and address of Owner.
 - 4. Date of submittal.
 - 5. Name and contact information for Contractor.
 - 6. Names and contact information for major consultants to the Architect that designed the systems contained in the manuals.
 - 7. Cross-reference to related systems in other operation and maintenance manuals.
- D. Table of Contents: List each product included in manual, identified by product name, indexed to the content of the volume, and cross-referenced to Specification Section number in Project Manual. If operation or maintenance documentation requires more than one volume to accommodate data, include comprehensive table of contents for all volumes in each volume of the set.
- E. Manual Contents: Organize into sets of manageable size. Arrange contents alphabetically by system, subsystem, and equipment. If possible, assemble instructions for subsystems, equipment, and components of one system into a single binder.
- F. Manuals, Electronic Files: Submit manuals in the form of a multiple file composite electronic PDF file for each manual type required.
 - 1. Electronic Files: Use electronic files prepared by manufacturer where available. Where scanning of paper documents is required, configure scanned file for minimum readable file size.
 - 2. File Names and Bookmarks: Enable bookmarking of individual documents based on file names. Name document files to correspond to system, subsystem, and equipment names used in manual directory and table of contents. Group documents for each system and subsystem into individual composite bookmarked files, then create composite manual, so that resulting bookmarks reflect the system, subsystem, and equipment names in a readily navigated file tree. Configure electronic manual to display bookmark panel on opening file.

G. Manuals, Paper Copy: Submit manuals in the form of hard copy, bound and labeled volumes.

1. Binders: Heavy-duty, three-ring, vinyl-covered, loose-leaf binders, in thickness necessary to accommodate contents, sized to hold 8-1/2-by-11-inch paper; with clear plastic sleeve on spine to hold label describing contents and with pockets inside covers to hold folded oversize sheets.
 - a. Identify each binder on front and spine, with printed title "OPERATION AND MAINTENANCE MANUAL," Project title or name, and subject matter of contents, and indicate Specification Section number(s) on bottom of spine. Indicate volume number for multiple-volume sets.
2. Dividers: Heavy-paper dividers with plastic-covered tabs for each section of the manual. Mark each tab to indicate contents. Include typed list of products and major components of equipment included in the section on each divider, cross-referenced to Specification Section number and title of Project Manual.
3. Protective Plastic Sleeves: Transparent plastic sleeves designed to enclose diagnostic software storage media for computerized electronic equipment.
4. Drawings: Attach reinforced, punched binder tabs on drawings and bind with text.
 - a. If oversize drawings are necessary, fold drawings to same size as text pages and use as foldouts.
 - b. If drawings are too large to be used as foldouts, fold and place drawings in labeled envelopes and bind envelopes in rear of manual. At appropriate locations in manual, insert typewritten pages indicating drawing titles, descriptions of contents, and drawing locations.

2.2 EMERGENCY MANUALS

- A. Content: Organize manual into a separate section for each of the following:
1. Type of emergency.
 2. Emergency instructions.
 3. Emergency procedures.
- B. Type of Emergency: Where applicable for each type of emergency indicated below, include instructions and procedures for each system, subsystem, piece of equipment, and component:
1. Fire.
 2. Flood.
 3. Gas leak.
 4. Water leak.
 5. Power failure.
 6. Water outage.
 7. System, subsystem, or equipment failure.
 8. Chemical release or spill.
- C. Emergency Instructions: Describe and explain warnings, trouble indications, error messages, and similar codes and signals. Include responsibilities of Owner's operating personnel for notification of Installer, supplier, and manufacturer to maintain warranties.
- D. Emergency Procedures: Include the following, as applicable:

1. Instructions on stopping.
2. Shutdown instructions for each type of emergency.
3. Operating instructions for conditions outside normal operating limits.
4. Required sequences for electric or electronic systems.
5. Special operating instructions and procedures.

2.3 OPERATION MANUALS

A. Content: In addition to requirements in this Section, include operation data required in individual Specification Sections and the following information:

1. System, subsystem, and equipment descriptions. Use designations for systems and equipment indicated on Contract Documents.
2. Performance and design criteria if Contractor is delegated design responsibility.
3. Operating standards.
4. Operating procedures.
5. Operating logs.
6. Wiring diagrams.
7. Control diagrams.
8. Piped system diagrams.
9. Precautions against improper use.
10. License requirements including inspection and renewal dates.

B. Descriptions: Include the following:

1. Product name and model number. Use designations for products indicated on Contract Documents.
2. Manufacturer's name.
3. Equipment identification with serial number of each component.
4. Equipment function.
5. Operating characteristics.
6. Limiting conditions.
7. Performance curves.
8. Engineering data and tests.
9. Complete nomenclature and number of replacement parts.

C. Operating Procedures: Include the following, as applicable:

1. Startup procedures.
2. Equipment or system break-in procedures.
3. Routine and normal operating instructions.
4. Regulation and control procedures.
5. Instructions on stopping.
6. Normal shutdown instructions.
7. Seasonal and weekend operating instructions.
8. Required sequences for electric or electronic systems.
9. Special operating instructions and procedures.

D. Systems and Equipment Controls: Describe the sequence of operation, and diagram controls as installed.

E. Piped Systems: Diagram piping as installed, and identify color-coding where required for identification.

2.4 PRODUCT MAINTENANCE MANUALS

- A. Content: Organize manual into a separate section for each product, material, and finish. Include source information, product information, maintenance procedures, repair materials and sources, and warranties and bonds, as described below.
- B. Source Information: List each product included in manual, identified by product name and arranged to match manual's table of contents. For each product, list name, address, and telephone number of Installer or supplier and maintenance service agent, and cross-reference Specification Section number and title in Project Manual.
- C. Product Information: Include the following, as applicable:
 - 1. Product name and model number.
 - 2. Manufacturer's name.
 - 3. Color, pattern, and texture.
 - 4. Material and chemical composition.
 - 5. Reordering information for specially manufactured products.
- D. Maintenance Procedures: Include manufacturer's written recommendations and the following:
 - 1. Inspection procedures.
 - 2. Types of cleaning agents to be used and methods of cleaning.
 - 3. List of cleaning agents and methods of cleaning detrimental to product.
 - 4. Schedule for routine cleaning and maintenance.
 - 5. Repair instructions.
- E. Repair Materials and Sources: Include lists of materials and local sources of materials and related services.
- F. Warranties and Bonds: Include copies of warranties and bonds and lists of circumstances and conditions that would affect validity of warranties or bonds. Include procedures to follow and required notifications for warranty claims.

2.5 SYSTEMS AND EQUIPMENT MAINTENANCE MANUALS

- A. Content: For each system, subsystem, and piece of equipment not part of a system, include source information, manufacturers' maintenance documentation, maintenance procedures, maintenance and service schedules, spare parts list and source information, maintenance service contracts, and warranty and bond information, as described below.
- B. Source Information: List each system, subsystem, and piece of equipment included in manual, identified by product name and arranged to match manual's table of contents. For each product, list name, address, and telephone number of Installer or supplier and maintenance service agent, and cross-reference Specification Section number and title in Project Manual.

- C. **Manufacturers' Maintenance Documentation:** Manufacturers' maintenance documentation including the following information for each component part or piece of equipment:
 - 1. Standard maintenance instructions and bulletins.
 - 2. Drawings, diagrams, and instructions required for maintenance, including disassembly and component removal, replacement, and assembly.
 - 3. Identification and nomenclature of parts and components.
 - 4. List of items recommended to be stocked as spare parts.
- D. **Maintenance Procedures:** Include the following information and items that detail essential maintenance procedures:
 - 1. Test and inspection instructions.
 - 2. Troubleshooting guide.
 - 3. Precautions against improper maintenance.
 - 4. Disassembly; component removal, repair, and replacement; and reassembly instructions.
 - 5. Aligning, adjusting, and checking instructions.
 - 6. Demonstration and training video recording, if available.
- E. **Maintenance and Service Schedules:** Include service and lubrication requirements, list of required lubricants for equipment, and separate schedules for preventive and routine maintenance and service with standard time allotment.
 - 1. **Schedule Maintenance and Service:** Tabulate actions for daily, weekly, monthly, quarterly, semiannual, and annual frequencies.
 - 2. **Maintenance and Service Record:** Include manufacturers' forms for recording maintenance.
- F. **Spare Parts List and Source Information:** Include lists of replacement and repair parts, with parts identified and cross-referenced to manufacturers' maintenance documentation and local sources of maintenance materials and related services.
- G. **Maintenance Service Contracts:** Include copies of maintenance agreements with name and telephone number of service agent.
- H. **Warranties and Bonds:** Include copies of warranties and bonds and lists of circumstances and conditions that would affect validity of warranties or bonds.

PART 3 - EXECUTION

3.1 MANUAL PREPARATION

- A. **Emergency Manual:** Assemble a complete set of emergency information indicating procedures for use by emergency personnel and by Owner's operating personnel for types of emergencies indicated.
- B. **Product Maintenance Manual:** Assemble a complete set of maintenance data indicating care and maintenance of each product, material, and finish incorporated into the Work.
- C. **Operation and Maintenance Manuals:** Assemble a complete set of operation and maintenance data indicating operation and maintenance of each system, subsystem, and piece of equipment not part of a system.

1. Engage a factory-authorized service representative to assemble and prepare information for each system, subsystem, and piece of equipment not part of a system.
 2. Prepare a separate manual for each system and subsystem, in the form of an instructional manual for use by Owner's operating personnel.
- D. Manufacturers' Data: Where manuals contain manufacturers' standard printed data, include only sheets pertinent to product or component installed. Mark each sheet to identify each product or component incorporated into the Work. If data include more than one item in a tabular format, identify each item using appropriate references from the Contract Documents. Identify data applicable to the Work and delete references to information not applicable.
- E. Drawings: Prepare drawings supplementing manufacturers' printed data to illustrate the relationship of component parts of equipment and systems and to illustrate control sequence and flow diagrams. Coordinate these drawings with information contained in record Drawings to ensure correct illustration of completed installation.
1. Do not use original project record documents as part of operation and maintenance manuals.
 2. Comply with requirements of newly prepared Record Drawings in Division 01 Section 01 78 39 "Project Record Documents."
- F. Comply with Section 01 77 00 "Closeout Procedures" for schedule for submitting operation and maintenance documentation.

END OF SECTION

SECTION 01 78 39

PROJECT RECORD DOCUMENTS

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes administrative and procedural requirements for project record documents, including the following:
 - 1. Record Drawings.
 - 2. Record Project Manual (Proposal)
 - 3. Record Product Data.
- B. Related Requirements:
 - 1. Section 01 78 23 "Operation and Maintenance Data" for operation and maintenance manual requirements.

1.2 CLOSEOUT SUBMITTALS

- A. Record Drawings: Comply with the following:
 - 1. Number of Copies: Submit copies of record Drawings as follows:
 - a. Submittal:
 - 1) Submit PDF electronic files of scanned record prints and two set(s) of marked-up record prints.
 - 2) Print each drawing, whether or not changes and additional information were recorded.
- B. Record Project Manual (Proposal): Submit two paper copies and one annotated PDF electronic files of Project Manual (Proposal), including addenda and contract modifications.
- C. Record Product Data: Submit two paper copies and one annotated PDF electronic files and directories of each submittal.

PART 2 - PRODUCTS

2.1 RECORD DRAWINGS

- A. Record Prints: Maintain two sets of marked-up paper copies of the Contract Drawings (half-size) and Shop Drawings, incorporating new and revised Drawings as modifications are issued.
 - 1. Preparation: Mark record prints to show the actual installation where installation varies from that shown originally. Require individual or entity who obtained record data, whether individual or entity is Installer, subcontractor, or similar entity, to provide information for preparation of corresponding marked-up record prints.
 - a. Give particular attention to information on concealed elements that would be difficult to identify or measure and record later.

- b. Record data as soon as possible after obtaining it.
 - c. Record and check the markup before enclosing concealed installations.
 - 2. Mark the Contract Drawings and Shop Drawings completely and accurately. Use personnel proficient at recording graphic information in production of marked-up record prints.
 - 3. Mark record sets with erasable, red-colored pencil. Use other colors to distinguish between changes for different categories of the Work at same location.
 - 4. Note Construction Change Directive numbers, alternate numbers, Change Order (Supplemental Agreements) numbers, and similar identification, where applicable.
 - B. Record Digital Data Files: Immediately before inspection for Final Completion review marked-up record prints with Project Engineer and MDOT Architect. When authorized, prepare a full set of corrected digital data files of the Contract Drawings, as follows:
 - 1. Format: Annotated PDF electronic file.
 - 2. Incorporate changes and additional information previously marked on record prints. Delete, redraw, and add details and notations where applicable.
 - 3. Refer instances of uncertainty to Project Engineer and MDOT Architect for resolution.
 - C. Format: Identify and date each record Drawing; include the designation "PROJECT RECORD DRAWING" in a prominent location.
 - 1. Record Prints: Organize record prints and newly prepared record Drawings into manageable sets. Bind each set with durable paper cover sheets. Include identification on cover sheets.
 - 2. Format: Annotated PDF electronic file.
 - 3. Record Digital Data Files: Organize digital data information into separate electronic files that correspond to each sheet of the Contract Drawings. Name each file with the sheet identification. Include identification in each digital data file.
 - 4. Identification: As follows:
 - a. Project name.
 - b. Date.
 - c. Designation "PROJECT RECORD DRAWINGS."
 - d. Name of Consulting Architect (if applicable).
 - e. Name of Contractor.
- 2.2 RECORD PROJECT MANUAL (PROPOSAL)
- A. Preparation: Mark Project Manual (Proposal) to indicate the actual product installation where installation varies from that indicated in the Technical Specifications, addenda, and contract modifications.
 - 1. Give particular attention to information on concealed products and installations that cannot be readily identified and recorded later.
 - 2. Mark copy with the proprietary name and model number of products, materials, and equipment furnished, including substitutions and product options selected.
 - 3. Record the name of manufacturer, supplier, Installer, and other information necessary to provide a record of selections made.
 - 4. Note related Change Orders (Supplemental Agreements), record Product Data, and record Drawings where applicable.

- B. Format: Submit record Project Manual (Proposal) as scanned PDF electronic file(s) of marked-up paper copy of Project Manual (Proposal).

2.3 RECORD PRODUCT DATA

- A. Preparation: Mark Product Data to indicate the actual product installation where installation varies substantially from that indicated in Product Data submittal.
 - 1. Give particular attention to information on concealed products and installations that cannot be readily identified and recorded later.
 - 2. Include significant changes in the product delivered to Project site and changes in manufacturer's written instructions for installation.
 - 3. Note related Change Orders (Supplemental Agreements), record Specifications, and record Drawings where applicable.
- B. Format: Submit record Product Data as scanned PDF electronic file(s) of marked-up paper copy of Product Data.

PART 3 - EXECUTION

3.1 RECORDING AND MAINTENANCE

- A. Recording: Maintain one copy of each submittal during the construction period for project record document purposes. Post changes and revisions to project record documents as they occur; do not wait until end of Project.
- B. Maintenance of Record Documents and Samples: Store record documents and Samples in the field office apart from the Contract Documents used for construction. Do not use project record documents for construction purposes. Maintain record documents in good order and in a clean, dry, legible condition, protected from deterioration and loss. Provide access to project record documents for Project Engineer's and MDOT Architect's reference during normal working hours.
- C. The information, except Contract Drawings, shall be arranged and labeled by corresponding Specification Section, neatly bound in three ring binders, indexed, and all shop drawings readable without being removed or unstapled.
- D. The name and address of each subcontractor and material supplier shall be listed in front of each binder along with the Project Manual (Proposal).
- E. Sufficient information, such as as-built control drawings for air handling system and variable drive controls, shall be furnished to allow qualified personnel to service equipment.

END OF SECTION

SECTION 01 79 00

DEMONSTRATION AND TRAINING

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes administrative and procedural requirements for instructing Owner's personnel, including the following:
 - 1. Demonstration of operation of systems, subsystems, and equipment.
 - 2. Training in operation and maintenance of systems, subsystems, and equipment.
 - 3. Demonstration and training video recordings.

1.2 INFORMATIONAL SUBMITTALS

- A. Instruction Program: Submit outline of instructional program for demonstration and training, including a list of training modules and a schedule of proposed dates, times, length of instruction time, and instructors' names for each training module. Include learning objective and outline for each training module.
 - 1. Indicate proposed training modules using manufacturer-produced demonstration and training video recordings for systems, equipment, and products in lieu of video recording of live instructional module.

1.3 CLOSEOUT SUBMITTALS

- A. Demonstration and Training Video Recordings: Submit two copies within seven days of end of each training module.
 - 1. At completion of training, submit complete training manual(s) for Owner's use prepared and bound in format matching operation and maintenance manuals.

1.4 QUALITY ASSURANCE

- A. Facilitator Qualifications: A firm or individual experienced in training or educating maintenance personnel in a training program similar in content and extent to that indicated for this Project, and whose work has resulted in training or education with a record of successful learning performance.
- B. Instructor Qualifications: A factory-authorized service representative, complying with requirements in Section 01 40 00 "Quality Requirements," experienced in operation and maintenance procedures and training.
- C. Preinstruction Conference: Conduct conference at Project site to comply with requirements in Section 01 31 00 "Project Management and Coordination." Review methods and procedures related to demonstration and training.

1.5 COORDINATION

- A. Coordinate instruction schedule with Owner's operations. Adjust schedule as required to minimize disrupting Owner's operations and to ensure availability of Owner's personnel.
- B. Coordinate content of training modules with content of approved emergency, operation, and maintenance manuals. Do not submit instruction program until operation and maintenance data has been reviewed and approved by Architect.

PART 2 - PRODUCTS

2.1 INSTRUCTION PROGRAM

- A. Program Structure: Develop an instruction program that includes individual training modules for each system and for equipment not part of a system, as required by individual Specification Sections.
- B. Training Modules: Develop a learning objective and teaching outline for each module. Include a description of specific skills and knowledge that participant is expected to master. For each module, include instruction for the following as applicable to the system, equipment, or component:
 - 1. Basis of System Design, Operational Requirements, and Criteria: Include the following:
 - a. System, subsystem, and equipment descriptions.
 - b. Performance and design criteria if Contractor is delegated design responsibility.
 - c. Operating standards.
 - d. Regulatory requirements.
 - e. Equipment function.
 - f. Operating characteristics.
 - g. Limiting conditions.
 - h. Performance curves.
 - 2. Documentation: Review the following items in detail:
 - a. Emergency manuals.
 - b. Operations manuals.
 - c. Maintenance manuals.
 - d. Project record documents.
 - e. Identification systems.
 - f. Warranties and bonds.
 - g. Maintenance service agreements and similar continuing commitments.
 - 3. Emergencies: Include the following, as applicable:
 - a. Instructions on meaning of warnings, trouble indications, and error messages.
 - b. Instructions on stopping.
 - c. Shutdown instructions for each type of emergency.
 - d. Operating instructions for conditions outside of normal operating limits.
 - e. Sequences for electric or electronic systems.
 - f. Special operating instructions and procedures.
 - 4. Operations: Include the following, as applicable:
 - a. Startup procedures.
 - b. Equipment or system break-in procedures.

- c. Routine and normal operating instructions.
- d. Regulation and control procedures.
- e. Control sequences.
- f. Safety procedures.
- g. Instructions on stopping.
- h. Normal shutdown instructions.
- i. Operating procedures for emergencies.
- j. Operating procedures for system, subsystem, or equipment failure.
- k. Seasonal and weekend operating instructions.
- l. Required sequences for electric or electronic systems.
- m. Special operating instructions and procedures.
- 5. Adjustments: Include the following:
 - a. Alignments.
 - b. Checking adjustments.
 - c. Noise and vibration adjustments.
 - d. Economy and efficiency adjustments.
- 6. Troubleshooting: Include the following:
 - a. Diagnostic instructions.
 - b. Test and inspection procedures.
- 7. Maintenance: Include the following:
 - a. Inspection procedures.
 - b. Types of cleaning agents to be used and methods of cleaning.
 - c. List of cleaning agents and methods of cleaning detrimental to product.
 - d. Procedures for routine cleaning
 - e. Procedures for preventive maintenance.
 - f. Procedures for routine maintenance.
 - g. Instruction on use of special tools.
- 8. Repairs: Include the following:
 - a. Diagnosis instructions.
 - b. Repair instructions.
 - c. Disassembly; component removal, repair, and replacement; and reassembly instructions.
 - d. Instructions for identifying parts and components.
 - e. Review of spare parts needed for operation and maintenance.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Assemble educational materials necessary for instruction, including documentation and training module. Assemble training modules into a training manual organized in coordination with requirements in Section 01 78 23 "Operation and Maintenance Data."

3.2 INSTRUCTION

- A. Facilitator: Engage a qualified facilitator to prepare instruction program and training modules, to coordinate instructors, and to coordinate between Contractor and Owner for number of participants, instruction times, and location.
- B. Engage qualified instructors to instruct Owner's personnel to adjust, operate, and maintain systems, subsystems, and equipment not part of a system.

1. Owner will furnish Contractor with names and positions of participants.
 - C. Scheduling: Provide instruction at mutually agreed on times. For equipment that requires seasonal operation, provide similar instruction at start of each season.
 1. Schedule training with Owner, through Project Engineer, with at least seven days' advance notice.
 - D. Training Location and Reference Material: Conduct training on-site in the completed and fully operational facility using the actual equipment in-place. Conduct training using final operation and maintenance data submittals.
 - E. Evaluation: At conclusion of each training module, assess and document each participant's mastery of module by use of a demonstration performance-based test.
- 3.3 DEMONSTRATION AND TRAINING VIDEO RECORDINGS
- A. General: Engage a qualified commercial videographer to record demonstration and training video recordings. Record each training module separately. Include classroom instructions and demonstrations, board diagrams, and other visual aids, but not student practice.
 1. At beginning of each training module, record each chart containing learning objective and lesson outline.
 - B. Video Recording Format: Provide high-quality color video recordings with menu navigation in format acceptable to Project Engineer and MDOT Architect.
 - C. Narration: Describe scenes on video recording by dubbing audio narration off-site after video recording is recorded. Include description of items being viewed.
 - D. Preproduced Video Recordings: Provide video recordings used as a component of training modules in same format as recordings of live training.

END OF SECTION

SECTION 03 10 00

CONCRETE FORMING AND ACCESSORIES

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes all concrete formwork and other related items necessary to complete project indicated by Contract Documents unless specifically excluded.
- B. Related Sections:
 - 1. Section 03 20 00 – Concrete Reinforcing.
 - 2. Section 03 30 00 – Cast-in-Place Concrete.

1.2 PROJECT CONDITIONS

- A. Examine the substrate over which concrete forms are installed and advise the Project Engineer of conditions detrimental to the installation of concrete formwork. Do not proceed until unsatisfactory conditions have been corrected.

PART 2 - PRODUCTS

2.01 MATERIALS

- A. Wood Forms: 3/4-inch-thick exterior grade plywood on studs and joists.
- B. Form Ties: Standard snap ties, 1-1/2 inch break-back.
- C. Form Oil: Oil must not affect bonding of finishes on exposed concrete. Approved non-staining type as follows:
 - 1. Dayton Superior: Clean Strip™ J1EF
 - 2. Nox-Crete Products Group: Nox-Crete Form Coating EB
 - 3. SEI Form Release: Gcc-100.

PART 3 - EXECUTION

3.1 FORMWORK

- A. Forms shall be properly aligned, adequately braced and mortar tight to produce concrete shapes required by Drawings.
 - 1. Align forms so that the actual surface does not vary from true surface more than 1/8 inch.
 - 2. The surface shall be clean, undamaged, and free of offsets and irregularities at joints.
 - 3. Adequately brace and frame to retain true shapes under vibration and placing strains without leaks, bowing, or deflection.
- B. Construct formwork so concrete members and structures are of size, shape, alignment, elevation, and position indicated, within tolerance limits of ACI 117.

- C. Studs, girts, and walls shall not be less than 2 by 4's, S4S, construction of standard grade Douglas fir, or equal, selected for straightness.
 - 1. Walls shall consist of at least two 2 by 4's.
 - 2. Studs shall not be spaced more than 16 inches, girts not more than 24 inches and ties not more than 27 inches, on center.
- D. Lightly oil wood forms prior to placing reinforcing, and with oil not permitted on the reinforcing. Where oil form is used, remove excess before pouring concrete.
- E. Unless indicated otherwise, chamfer exterior corners and edges of permanently exposed concrete.
- F. Comply with recommendations of "Recommended Practice for Concrete Form work" ACI 347 unless indicated otherwise.

3.2 INSERTS AND FASTENING DEVICES FOR OTHER WORK

- A. Provide for installation of inserts, hangers, metal ties, anchors, bolts, dowels, nailing strips, grounds and other fastening devices required for attachment of other Work
- B. Locate partitions for other trades prior to pouring concrete in order that conduits, sleeves and inserts required by others will be installed in the proper locations.
- C. Do not install sleeves in any concrete beams or piers except upon approval of the Project Engineer.
- D. Do not install aluminum conduits in concrete.

3.3 VAPOR RETARDERS

- A. Sheet Vapor Retarders: Place, protect, and repair sheet vapor retarder according to ASTM E 1643 and manufacturer's written instructions.
 - 1. Lap joints 6 inches and seal with manufacturer's recommended tape.

3.4 FORM REMOVAL

- A. Grade beam and column forms may be removed 24 hours after a pour is completed.
- B. Floor slab wood forms may be removed 10 days after pour, providing compressive strength has reached a minimum of 2500 psi based on job cast cylinders.

END OF SECTION

SECTION 03 20 00

CONCRETE REINFORCING

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes all concrete reinforcing and the related items necessary to complete the Project indicated by the Contract Documents unless specifically excluded.
- B. Related Sections:
 - 1. Section 03 10 00 – Concrete Forming and Accessories.
 - 2. Section 03 30 00 – Cast-in-Place Concrete.

1.2 SUBMITTALS

- A. Submit reinforcing steel shop drawings and materials list prior to placement for MDOT Architect's approval.
 - 1. Shop drawings shall include complete DIMENSIONED placing plans including control joint locations, order lists, bar sizes, lengths, materials, grades, bar schedules, stirrup spacing, bent bar diagrams, bar arrangement, location of splices, lengths of lap splices bend diagrams, and DETAILS SHOWING DIMENSIONS WITH CLEARANCES.
 - 2. Submittals not including this requirement will be considered as an incomplete submittal and will be returned to Contractor for re-submittal.
- B. Furnish mill certificates for steel bar reinforcement, to the Project Engineer certifying that each shipment meets specifications. The fabricator will furnish certificates with bar lists to designate location of shipment and the time steel is delivered to the project.

1.3 QUALITY ASSURANCE

- A. Reinforcing bars shall conform to ASTM A 615 "Deformed Billet-Steel Bars for Concrete".
- B. Mesh reinforcement shall conform to ASTM A 185 "Welded Steel Wire Fabric for Concrete Reinforcement".
- C. Accessories shall conform to American Concrete Institute ACI 301 "Specifications for Structural Concrete for Buildings".
- D. Placement shall be in accordance with approved shop drawings and ACI 318 "Standard Building Code Requirements for Reinforced Concrete".
- E. Comply with ACI 315 "Manual of Standard Practice of Detailing Reinforced Concrete Structures".

1.4 DELIVERY, STORAGE, AND HANDLING

- A. Reinforcing bar steel and mesh shall be handled, shipped and stored in a manner that will prevent distortion or other damage.
- B. Materials shall be stored in a manner to prevent excessive rusting and fouling with dirt, grease, or other bond-breaking coatings.

1.5 PROJECT CONDITIONS

- A. Examine the substrate over which concrete forms are installed and advise the Project Engineer of conditions detrimental to the installation of concrete formwork. Do not proceed until unsatisfactory conditions have been corrected.
- B. Coordinate placement of concrete reinforcing with installation of concrete formwork, vapor barriers, concrete inserts, conduit and all other items occurring in the area.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Steel Bar Reinforcement: Bar reinforcement shall conform to ASTM A 615, grade 60 of domestic manufacture. Bars shall be new; free from rust, scale, oil, or other coatings that will prevent bond.
- B. Welded Steel Wire Fabric: Fabric shall conform to ASTM A 185, new, free from rust and other coatings that will prevent bond.
- C. Accessories: Metal accessories as required shall support reinforcing bars and comply with ACI 315. Chairs and bolsters for use in exposed concrete shall have plastic coated or stainless steel legs or shall be plastic.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Fabricate and place reinforcement in accordance with the latest requirements of the American Concrete Institute and the approved shop drawings. Fabrication shall not proceed until MDOT Architect's approval is obtained.
- B. Reinforcing for one day's pour shall be completely placed and an inspection made by the Project Engineer / MDOT Architect prior to starting the pour.
- C. Concrete Protection for Reinforcement: Minimum coverage shall be as follows unless shown otherwise on drawings:

1. Footings (bottom of steel)	3 inches clear
2. Slabs	1-1/2 inches clear top and 3/4 inch clear bottom
3. Beams	1-1/2 inch clear to stirrups
4. Walls	2-1/2 inches clear
5. Columns	2 inches clear to verticals

- D. Steel Dowels for successive work shall be wired in correct position before placing concrete. The "sticking" of dowels after placing concrete will not be permitted.
- E. Lap all bars 24 bar diameters at corners, splices and intersections.
- F. Interrupt Reinforcing steel at control joints in floor slabs.
- G. Do not weld reinforcing steel unless specifically approved by the Project Engineer.

END OF SECTION

SECTION 03 30 00

CAST-IN-PLACE CONCRETE

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes cast-in-place concrete, including formwork, reinforcement, concrete materials, mixture design, placement procedures, finishes, and other related items necessary to complete Project indicated by Contract Documents unless specifically excluded
- B. Related Sections:
 - 1. Section 03 10 00 - Concrete Forming and Accessories.
 - 2. Section 03 20 00 - Concrete Reinforcing.

1.2 SUBMITTALS

- A. Submit concrete mix design, concrete compression test reports and product data and manufacturer's installation instructions for concrete curing compound.

1.3 TESTING LABORATORY SERVICES

- A. The Owner will provide testing as specified in Section 01 45 29.

1.4 QUALITY ASSURANCE

- A. Concrete work shall conform to all requirements of ACI 301, Specifications for Structural Concrete for Buildings and ACI 318 Building Code Requirements for Reinforced Concrete, latest editions, except as modified by supplemental requirements herein.
- B. Mix Design: Concrete mix design proportioning shall be by a certified MDOT Class III technician and submitted to the Project Engineer prior to placing concrete. Mix proportions shall meet the requirements of the 804.02.10 Section of the MDOT's Standard Specifications, 2017 Edition, except concrete requiring a trowel finish shall not be air entrained and shall meet the compressive strength requirements for Class B concrete. Concrete shall be sampled according to ASTM C 172 and compression test cylinders made and cured according to ASTM C 31. Control of mixes is to be maintained at the Ready-Mix Plant and on the job site. Adjustments of the mix proportions shall meet the requirements of Section 804.02.10.4 of MDOT's Standard Specifications, 2017 Edition.

- C. The Owner will mold and cure compression test cylinders (two cylinders per set) from concrete at the job site from the first placement of each mix design placed each day and additionally for each 75 cubic yards, or fraction thereof, of each mix design placed in a single day. In addition to sampling concrete in accordance with ASTM C 172, the Owner will follow the sampling requirements Paragraph 6.1.2 in the latest edition of the Department's *Concrete Field Manual*.
 - 1. Cylinders will be tested in accordance with ASTM C 39. The Owner will mold one set of cylinders for ensuring the concrete meets the minimum 28-day acceptance requirements.
 - 2. The Owner will mold three sets of cylinders for form removal in accordance with Subsection 907-804.03.15. Forms may be removed when the compressive strength of the field cured cylinders reaches 2000 psi.
 - 3. In addition to determining the slump, temperature, and total air content of the concrete used for molding the test cylinders, the Owner will determine the yield of each mix design during the first placement of each mix design.
 - 4. Copies of all test reports shall be furnished to the ready mixed concrete producer and as directed by the Project Engineer.

1.5 COORDINATION

- A. Verify that all pipes under grade have been installed and tested before being covered. Check and verify materials and locations of inserts, anchors, and items required by other trades before pouring concrete. Concerned subcontractors shall be notified of date of pour in sufficient time to allow for completion of their work.
- B. The Contractor shall notify the Project Engineer upon completing formwork and all reinforcing steel for the next intended pour, and shall not commence pouring operation until all forms and reinforcing steel are approved by the Project Engineer.
- C. Project Engineer shall have free access to all materials used, and the required samples are to be furnished by the Contractor, as directed.
- D. Inspection and written approval from the floor-covering subcontractor is required for slab finish receiving floor covering.

PART 2 - PRODUCTS

2.1 CONCRETE, GENERAL

- A. All concrete, unless otherwise specifically approved in writing by the Project Engineer, shall be transit-mixed in accordance with ASTM C94. Control of concrete shall be under supervision of testing laboratory as described in Section 01 45 29.
- B. All concrete, unless noted otherwise, shall be Class B.
- C. Maximum slump for normal weight concrete shall be 4 inches. Sump may be increased to 8 inches with an approved water reducer.

2.2 CONCRETE MATERIALS

- A. Portland Cement: ASTM C-150, Type I.
- B. Water: From an approved source.

- C. Structural Concrete Aggregate: Coarse aggregate size number 57 or 67 shall be used and shall meet the requirements of MDOT Standard Specifications, 2017 Edition.
- D. Admixtures: Admixtures shall be from the MDOT Approved List. Non-uniform addition of mixtures that result in erratic setting of the concrete will cause rejection of the concrete with subsequent removal from the structure at the concrete producer's expense.

2.3 RELATED MATERIALS

- A. Preformed Expansion Joint Fillers: Provide pre-molded, asphalt impregnated board in widths and thickness required by conditions (1/2-inch minimum). Joint fillers shall conform to ASTM D994, D1751 or D1752.
- B. Curing Compound: MasterKure CC 180 WB, manufactured by BASF / Master Builders, Cure Hard J14, manufactured by Dayton Superior Corp. Cure & Seal 100E, manufactured by Nox-Crete, Inc., or approved equal. Compound shall not interfere with bonding or floor finish.
- C. Non-Shrink Grout: Shall be one part Portland cement to 2-1/2 parts of fine aggregate or Cement grout ASTM C 387 Dry Package mixtures similar and equal to Masterflow 713 Plus, manufactured by BASF / Master Builders; Five Star Grout, U.S. Grout Company or approved equal.

2.4 CONCRETE MIXES

- A. Ready-Mixed Concrete: Ready-mix concrete shall be mixed and delivered in accordance with requirements of ASTM C 94. Uniformly and accurately control proportions of material weight. Slump tolerances given in ASTM C 94 apply. Calcium chloride shall not be used.
- B. Failure of concrete to meet the specified requirements may result in rejection with subsequent removal and replacement or re-testing (including coring, load test, etc.) at the supplier's expense.
 - 1. Concrete exhibiting adverse reaction as a result of the presence of deleterious substances shall be removed and replaced or repaired in a manner completely satisfactory to the Project Engineer.
 - 2. All cost of such corrective action, including all necessary testing, shall be borne by the concrete producer.
- C. The Contractor may request adjustment to concrete mix design when characteristics of materials, job conditions, weather, test results, or circumstances warrant, at no additional cost to the Owner and as approved by the Project Engineer. Laboratory test data for revised mix designs and strength results must be submitted to and approved before using in the Work.

PART 3 - EXECUTION

3.1 CONCRETE PLACEMENT

- A. Concrete shall be placed so as to avoid segregation of materials and to prevent cold joints by avoiding re-handling, by keeping pours generally level, and by adequate vibration. Placing is not to be started during rain or snow, and if placing is underway

when such conditions occur, continue operations only long enough to provide a suitable construction joint.

- B. During hot weather or periods of low humidity combined with a definite breeze, rapid loss of moisture shall be discouraged by thorough wetting of forms and by using a fine fog spray when finishing. At these times particular attention shall be given to providing an adequate number of finishers to expedite this operation. During cold weather fresh concrete shall be protected from freezing.
- C. Prior to placing, forms shall be cleaned free of foreign material and shall be washed down with water. Placing shall be a continuous operation between planned construction joints with fresh cement mixed only with plastic concrete already in place. Avoid cold joints.
- D. Vibration shall be thorough, using vibrators small enough to work within reinforcing. The vibrator shall be inserted at many points about 24 inches apart. Avoid over-vibration and transporting concrete in form by vibration. A spare vibrator, which will operate, shall be kept on the job during all placing operations.

3.2 CONSTRUCTION JOINTS

- A. Locate construction joints and provide shear keys as directed by the Project Engineer / MDOT Architect. Allow concrete to set for 24 hours before an adjoining pour is started. Slabs across the joint shall be level and the surface shall be level and shall not be feathered. Before proceeding with the following pour at a joint, thoroughly clean the joint, remove all loose material, and brush in a thick cement slurry.

3.3 CURING

- A. Keep all concrete moist for 5 days after placing by covering with concrete curing paper, by leaving forms in place or by using curing compound. All combined with regular wetting as necessary.

3.4 PATCHING

- A. Honeycombed and defective concrete shall be removed and replaced, or repaired, as directed by the Project Engineer. Form tie holes and minor areas, as determined by the Project Engineer, shall be repaired as follows:
 - 1. Completed patch shall be indistinguishable from surrounding surfaces in color and texture.
 - 2. Patching mixture, using same cement sand as used in concrete shall consist of 1 part cement to 2-parts sand, with just enough mixing water to permit placing. Premix mixture, allow standing at least 30 minutes before using, stirring with trowel during this period.
 - 3. Remove material to sound concrete, dampen surface and brush thick 1 to 1 cement sand bond coat into surface.
 - 4. When bond coat begins to lose water sheen, thoroughly pack patching mixture in place, leaving it somewhat higher than adjacent surface. Embed pieces of gravel by hand into patch.

3.5 FINISHES FOR FLATWORK

- A. Trowel finish floor surfaces scheduled as concrete finish walking surfaces, or floor surfaces scheduled to receive floor covering. Trowel finished surfaces shall be true planes within 1/8 inch in 10 feet as determined by a 10 foot straightedge placed anywhere on the slab in any direction.
- B. Smooth trowel finish after the surface is screeded and floated. Start troweling when all water has disappeared from the surface to first level the surface, then start final troweling when concrete has set where it no longer shows indentation from finger pressure. Trowel to a hard, smooth surface free of marks. Dusting of cement or cement and sand will not be permitted.
- C. Interior floors, with concrete finish scheduled, shall receive an application of hardener compound applied according to manufacturer's published instructions. Concrete surfaces to receive ceramic floor tile or brick shall receive float finish.
- D. Exterior walks and ramps shall have smooth trowel and fine broom finish.
- E. Exterior sign base shall have a Class 2, Rubbed Finish as follows:
 - 1. After removal of forms, the Class 1 finish shall be completed and the rubbing of concrete shall be started as soon as its condition will permit. Immediately before starting this work, the concrete shall be kept thoroughly saturated with water for at least three hours.
 - 2. Surface shall be rubbed with a medium course carborundum stone using a small amount of mortar on its face. The mortar shall be composed of cement and sand mixed in the proportions used in the concrete being finished. Rubbing shall be continued until all form marks, projections, and irregularities have been removed, all voids filled, and a uniform surface has been obtained.
 - 3. The final finish shall be obtained by rubbing with a fine carborundum stone and water. This rubbing shall continue until the entire surface is a smooth texture and uniform color.
 - 4. After the final rubbing is completed and the surface has dried, it shall be rubbed with burlap to remove loose powder and objectionable marks.

3.6 FINISHES FOR GRADE BEAMS

- A. Exposed grade beam faces shall have a smooth form finish obtained by using selected form facing plywood, arranged orderly and symmetrically with a minimum of seams.
 - 1. Repair and patch defective areas with all fins or other projections completely removed and smoothed. Provide grout cleaned finish consisting of 1 part Portland cement to 1-1/2 parts fine sand by column, and mix with water to the consistency of thick paint.
 - 2. Blend standard Portland cement and white Portland cement, amounts determined by trial patches, so that the final color of dry grout will closely match adjacent concrete surfaces.
- B. Thoroughly wet concrete surfaces and apply grout immediately to coat surfaces and fill small holes. Remove excess grout by scraping and rubbing with clean burlap. Keep damp by fog spray for at least 36 hours after rubbing.

END OF SECTION

SECTION 07 92 00

JOINT SEALANTS

PART 1 - GENERAL

1.01 SECTION INCLUDES

- A. Preparation of substrate surfaces to receive materials.
- B. Sealant and joint backing (backer rod) materials and installation in the following general locations (even though not shown on the Drawings):
 - 1. Exterior and interior wall joints, including control / expansion joints and abutting like or similar materials (in walls, ceilings, and roof construction) that have spaces between in excess of 3/16 inch (except where less restrictive tolerances are indicated or where the condition is specifically the responsibility of others).
 - 2. Abutting dissimilar materials, exterior and interior.
 - 3. Interior acoustical joints in vertical surfaces and horizontal nontraffic surfaces.
 - 4. Exterior and interior wall openings (including at perimeter doors, exterior thresholds, windows, louvers, and penetrations required by piping, ducts, and other service and equipment).
 - 5. Joints in pavement and walks.
 - 6. Other locations, not included above but specifically required by manufacturers of installed materials / products (except that sealing materials for glazing are under provision of other Section.)
- C. Accessories: Including, but not limited to, primer, cleaner, backer rod, bond breaker, and masking tape.

1.02 RELATED SECTIONS

- A. Section 01 33 00 – Submittal Procedures.

1.03 DEFINITIONS

- A. Whenever the words "caulk" or "seal" occur, they shall be interpreted to mean "effectively seal the indicated joint with a material to render it air and watertight." "Caulk" shall indicate the use of the interior materials specified hereinafter and "Seal" shall indicate the use of the exterior materials.

1.04 PRECONSTRUCTION TESTING

- A. Preconstruction Field-Adhesion Testing: Before installing sealants, field test their adhesion to Project joint substrates. Test joint sealants according to Method A, Field-Applied Sealant Joint Hand Pull Tab, in Appendix X1 in ASTM C 1193 or Method A, Tail Procedure, in ASTM C 1521.

1.05 WORK OF OTHER SECTIONS

- A. Caulking and sealing may be performed as Work of other Sections when specified. However, all Work shall conform to the requirements of this Section.

1.06 ACTION SUBMITTALS

- A. Product Data: Submit manufacturer's product data and installation instructions for each type of sealant required. Product data shall include chemical characteristics, limitations, and color availability.
- B. Samples: For each kind and color of joint sealant required.
- C. Joint-Sealant Schedule: Include the following information:
 - 1. Joint-sealant application, joint location, and designation.
 - 2. Joint-sealant manufacturer and product name.
 - 3. Joint-sealant formulation.
 - 4. Joint-sealant color.

1.07 INFORMATIONAL SUBMITTALS

- A. Manufacturer's Certificate.
- B. Applicator's experience documentation.
- C. Product test reports.
- D. Preconstruction field-adhesion test reports.
- E. Field-adhesion test reports.
- F. Warranties.

1.08 QUALITY ASSURANCE

- A. Testing Agency Qualifications: Qualified according to ASTM C 1021 to conduct the testing indicated.
- B. Manufacturer's Certificate: Provide manufacturer's letter of certification that products meet or exceed specified requirements and are appropriate for uses indicated.
- C. Applicator: Company specializing in the work of this Section with minimum 3 years documented satisfactory experience.
- D. Preinstallation Conference: Conduct conference at Project site.

1.09 DELIVERY, STORAGE AND HANDLING

- A. Deliver caulking and sealant material to the site in original unopened packages with manufacturer's labels, instructions and product identification and lot numbers intact and legible.
- B. Store materials under cover, protected from inclement weather and adverse temperature extremes, in original containers or unopened packages, in accordance with manufacturer's instructions.

1.10 WARRANTY

- A. Special Installer's Warranty: Manufacturer's standard form in which Installer agrees to repair or replace joint sealants that do not comply with performance and other requirements specified in this Section within specified warranty period.
 - 1. Warranty Period: Two years from Date of Completion as determined by MDOT.
- B. Special Manufacturer's Warranty: Manufacturer's standard form in which joint-sealant manufacturer agrees to furnish joint sealants to repair or replace those that do not comply with performance and other requirements specified in this Section within specified warranty period.
 - 1. Warranty Period: Five years from Date of Completion as determined by MDOT.

PART 2 - PRODUCTS

2.01 ACCEPTABLE MANUFACTURERS

- A. Drawings and Specifications are based on products manufactured by Pecora Corporation, 165 Wambold Road, Harleysville, PA 19438. Tel: (800) 523-6688.
- B. Equivalent products by the following manufacturers are acceptable:
 - 1. Dow Corning Corporation, Midland, MI. Tel: (800) 331-6451.
 - 2. GE Silicones, Waterford, NY. Tel: (518) 233-2639.
 - 3. Master Builders Solutions, Shakopee, MN. Tel: (800) 243-6739.
 - 4. Tremco, Inc., Beachwood, OH. Tel: (800) 321-7906.
- C. Substitution requests WILL NOT be considered PRIOR to Contract Award. Substitutions that fully meet or exceed the specified requirements may be considered under provisions of Section 01 25 00- Substitution Procedures and Section 01 60 00- Product Requirements. .

2.02 MATERIALS, GENERAL

- A. VOC Content of Interior Sealants: Sealants and sealant primers used inside the weatherproofing system shall comply with the following limits for VOC content when calculated according to 40 CFR 59, Subpart D (EPA Method 24):
 - 1. Architectural Sealants: 250 g/L.
 - 2. Sealant Primers for Nonporous Substrates: 250 g/L.
 - 3. Sealant Primers for Porous Substrates: 775 g/L.
- B. Liquid-Applied Joint Sealants: Comply with ASTM C 920 and other requirements indicated for each liquid-applied joint sealant specified, including those referencing ASTM C 920 classifications for type, grade, class, and uses related to exposure and joint substrates.
 - 1. Suitability for Immersion in Liquids. Where sealants are indicated for Use I for joints that will be continuously immersed in liquids, provide products that have undergone testing according to ASTM C 1247. Liquid used for testing sealants is deionized water, unless otherwise indicated.

- C. Stain-Test-Response Characteristics: Where sealants are specified to be nonstaining to porous substrates, provide products that have undergone testing according to ASTM C 1248 and have not stained porous joint substrates indicated for Project.
- D. Suitability for Contact with Food: Where sealants are indicated for joints that will come in repeated contact with food, provide products that comply with 21 CFR 177.2600.

2.03 SILICONE JOINT SEALANTS

- A. Silicone Joint Sealant: ASTM C 920.

2.04 URETHANE JOINT SEALANTS

- A. Urethane Joint Sealant: ASTM C 920.

2.05 LATEX JOINT SEALANTS

- A. Latex Joint Sealant: Acrylic latex or siliconized acrylic latex, ASTM C 834, Type OP, Grade NF.

2.06 PREFORMED JOINT SEALANTS

- A. Preformed Foam Joint Sealant: Manufacturer's standard preformed, precompressed, open-cell foam sealant manufactured from urethane foam with minimum density of 10 lb/cu. ft. and impregnated with a nondrying, water-repellent agent. Factory produce in precompressed sizes in roll or stick form to fit joint widths indicated; coated on one side with a pressure-sensitive adhesive and covered with protective wrapping.

2.07 ACOUSTICAL JOINT SEALANTS

- A. Acoustical Joint Sealant: Manufacturer's standard nonsag, paintable, nonstaining latex sealant complying with ASTM C 834. Product effectively reduces airborne sound transmission through perimeter joints and openings in building construction as demonstrated by testing representative assemblies according to ASTM E 90.

2.08 JOINT SEALANT BACKING

- A. Cylindrical Sealant Backings: ASTM C 1330, Type C (closed-cell material with a surface skin), Type O (open-cell material), Type B (bicellular material with a surface skin), or any of the preceding types, as approved in writing by joint-sealant manufacturer for joint application indicated, and of size and density to control sealant depth and otherwise contribute to producing optimum sealant performance.
- B. Bond-Breaker Tape: Polyethylene tape or other plastic tape recommended by sealant manufacturer.

2.09 MISCELLANEOUS MATERIALS

- A. Primer: Material recommended by joint-sealant manufacturer where required for adhesion of sealant to joint substrates indicated, as determined from preconstruction joint-sealant-substrate tests and field tests.
- B. Cleaners for Nonporous Surfaces: Chemical cleaners acceptable to manufacturers of sealants and sealant backing materials.

- C. Masking Tape: Nonstaining, nonabsorbent material compatible with joint sealants and surfaces adjacent to joints.

PART 3 - EXECUTION

3.01 PREPARATION

- A. Surface Cleaning of Joints: Clean out joints immediately before installing joint sealants to comply with joint-sealant manufacturer's written instructions.
 - 1. Remove laitance and form-release agents from concrete.
 - 2. Clean nonporous joint substrate surfaces with chemical cleaners or other means that do not stain, harm substrates, or leave residues capable of interfering with adhesion of joint sealants.
- B. Joint Priming: Prime joint substrates where recommended by joint-sealant manufacturer or as indicated by preconstruction joint-sealant-substrate tests or prior experience. Apply primer to comply with joint-sealant manufacturer's written instructions. Confine primers to areas of joint-sealant bond; do not allow spillage or migration onto adjoining surfaces.
- C. Masking Tape: Use masking tape where required to prevent contact of sealant or primer with adjoining surfaces that otherwise would be permanently stained or damaged by such contact or by cleaning methods required to remove sealant smears. Remove tape immediately after tooling without disturbing joint seal.

3.02 INSTALLATION

- A. Sealant Installation Standard: Comply with recommendations in ASTM C 1193 for use of joint sealants as applicable to materials, applications, and conditions indicated.
- B. Install sealant backings of kind indicated to support sealants during application and at position required to produce cross-sectional shapes and depths of installed sealants relative to joint widths that allow optimum sealant movement capability.
 - 1. Do not leave gaps between ends of sealant backings.
 - 2. Do not stretch, twist, puncture, or tear sealant backings.
 - 3. Remove absorbent sealant backings that have become wet before sealant application and replace them with dry materials.
- C. Install bond-breaker tape behind sealants where sealant backings are not used between sealants and backs of joints.
- D. Install sealants using proven techniques that comply with the following and at the same time backings are installed:
 - 1. Place sealants so they directly contact and fully wet joint substrates.
 - 2. Completely fill recesses in each joint configuration.
 - 3. Produce uniform, cross-sectional shapes and depths relative to joint widths that allow optimum sealant movement capability.

- E. Tooling of Nonsag Sealants: Immediately after sealant application and before skinning or curing begins, tool sealants according to requirements specified in subparagraphs below to form smooth, uniform beads of configuration indicated; to eliminate air pockets; and to ensure contact and adhesion of sealant with sides of joint.
 - 1. Remove excess sealant from surfaces adjacent to joints.
 - 2. Use tooling agents that are approved in writing by sealant manufacturer and that do not discolor sealants or adjacent surfaces.
 - 3. Provide concave joint profile per Figure 8A in ASTM C 1193, unless otherwise indicated.
- F. Acoustical Sealant Installation: Comply with ASTM C 919 and with manufacturer's written recommendations.
- G. Clean off excess sealant or sealant smears adjacent to joints as the Work progresses by methods and with cleaning materials approved in writing by manufacturers of joint sealants and of products in which joints occur.

3.03 FIELD QUALITY CONTROL

- A. Field-Adhesion Testing: Field test joint-sealant adhesion to joint substrates as follows:
 - 1. Extent of Testing: Test completed and cured sealant joints as follows:
 - a. Perform 5 tests for the first 500 feet of joint length for each kind of sealant and joint substrate.
 - b. Perform 1 test for each 1000 feet of joint length thereafter or 1 test per each floor per elevation.
 - 2. Test Method: Test joint sealants according to Method A, Field-Applied Sealant Joint Hand Pull Tab, in Appendix X1 in ASTM C 1193 or Method A, Tail Procedure, in ASTM C 1521.
- B. Evaluation of Field-Adhesion Test Results: Sealants not evidencing adhesive failure from testing or noncompliance with other indicated requirements will be considered satisfactory. Remove sealants that fail to adhere to joint substrates during testing or to comply with other requirements. Retest failed applications until test results prove sealants comply with indicated requirements.

3.04 CURE AND PROTECTION

- A. Cure sealant and caulking compounds in compliance with manufacturer's instructions and recommendations, to obtain high early bond strength, internal cohesive strength and surface durability.
- B. Sealant Supplier / Applicator shall advise Contractor of procedures required for cure and protection of joint sealers during construction period, so that they will be without deterioration or damage (other than normal wear and weathering) at Time of Completion.

3.05 JOINT-SEALANT SCHEDULE

- A. Type 1: Use for interior locations, sealing around windows, doors, louvers, drywall and other locations to be painted and where joints are less than 1/8 inch with none to slight movement anticipated: Pecora AC-20 + Silicone (Acrylic Latex Caulking Compound).
- B. Type 2: Use for sealing nonporous interior surfaces where conditions of high humidity and temperature extremes exist, including at and in conjunction with toilet fixtures, counters, vanities, thresholds and joints in tile finishes: Pecora 898NST (Silicone Sanitary Sealant).
- C. Type 3: Use for horizontal floor and pavement joints: Pecora Urexpan NR-200 (two-part, self-leveling, traffic-bearing, polyurethane sealant).
- D. Type 4: Use for exterior sealing at door, louver, and window frames: Pecora 890NST (one-part Architectural Silicone Sealant). Color(s) to be selected by the Project Engineer / MDOT Architect from manufacturer's full range of standard Architectural colors.
- E. Type 5: Use for Interior acoustical joints in vertical surfaces and horizontal nontraffic surfaces. Pecora AC – 20 FTR.

END OF SECTION

SECTION 23 05 29 HANGERS AND SUPPORTS FOR HVAC

PART 1 - GENERAL – NOT USED

PART 2 - PRODUCTS

2.1 PIPE HANGERS AND SUPPORTS

- A. Manufacturer: Anvil International.
- B. Other Acceptable Manufacturers:
 - 1. Cooper B-Line.
- C. Hydronic and Steam Piping, Refrigerant Piping, Plumbing Piping – Water and Plumbing Piping - DWV:
 - 1. Conform to ASME B31.5, B31.9, ASME B31.2, ASTM F708, MSS SP58, MSS SP69 and MSS SP89.
 - 2. Hangers for Pipe Sizes 3/4 to 1-1/2 Inch: Malleable iron, adjustable swivel, split ring.
 - 3. Hangers for Cold Pipe Sizes 2 Inches and Over: Carbon steel, adjustable, clevis.
 - 4. Wall Support for Pipe Sizes to 3 Inches: Cast iron hook.
 - 5. Wall Support for Pipe Sizes 4 Inches and Over: Welded steel bracket and wrought steel clamp.
 - 6. Vertical Support: Steel riser clamp.
 - 7. Floor Support for Cold Pipe: Cast iron adjustable pipe saddle, lock nut, nipple, floor flange, and concrete pier or steel support.

2.2 ACCESSORIES

- A. Hanger Rods: Mild steel threaded both ends, threaded one end, or continuous threaded.

2.3 INSERTS

- A. Manufacturer: Anvil International; Product: Fig. 117.
- B. Other Acceptable Manufacturers:
 - 1. Cooper B-Line.
- C. Inserts: Malleable iron expansion shields in drilled holes.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install in accordance with manufacturer's instructions.

3.2 INSERTS

- A. Expansion shields in drilled holes may be used provided they do not exceed 500 lbs. per anchor.

3.3 PIPE HANGERS AND SUPPORTS

- A. Support horizontal piping as scheduled.
- B. Install hangers to provide minimum 1/2 inch space between finished covering and adjacent work.
- C. Place hangers within 18 inches of each horizontal elbow or 4" (or larger valve).
- D. Use hangers with 1-1/2 inch minimum vertical adjustment.
- E. Design hangers for pipe movement without disengagement of supported pipe.

3.4 HANGER SPACING AND ROD SIZE FOR HYDRONIC, STEAM AND PLUMBING PIPING

PIPE SIZE (Inches)	MAX. HANGER SPACING (Feet)	HANGER ROD DIAMETER (inches)
1/2 to 1-1/4	6.5	3/8
1-1/2 to 2	10	3/8
2-1/2 to 3	10	1/2

END OF SECTION

SECTION 23 05 48 VIBRATION ISOLATION AND SEISMIC RESTRAINT OF MECHANICAL AND ELECTRICAL SYSTEMS

PART 1 GENERAL

1.1 DESCRIPTION

A. Intent

1. All isolation and seismic restraint materials shall be of the same manufacturer and shall be certified by the manufacturer.
3. It is the intent of the seismic portion of this specification to keep all mechanical and electrical building system components in place during a seismic event.
4. All such systems must be installed in strict accordance with seismic codes, component manufacturer's and building construction standards. Whenever a conflict occurs between the manufacturer's or construction standards, the most stringent shall apply.
5. This specification is considered to be minimum requirements for seismic consideration and is not intended as a substitute for legislated, more stringent, national, state or local construction requirements (i.e. California Title 24, California OSHPD, Canadian Building Codes, or other requirements).
6. Any variance or non-compliance with these specification requirements shall be corrected by the contractor in an approved manner.
7. Seismic restraints shall be designed in accordance with seismic force levels as detailed in Section 1.03.

B. The work in this section includes, but is not limited to the following:

1. Seismic restraints for non-isolated equipment.
2. Certification of seismic restraint designs and installation supervision.
3. New and existing equipment referred to below is typical.

HVLS Fans	Conduits	Panelboards	Suspended Light Fixtures
Generator	Natural Gas Pipe installed in this Work		
Relocated and existing suspended Gas Radiant heaters			

C. Definitions

1. Positive Attachment:
 - a. A positive attachment is defined as a cast-in anchor, a drill-in wedge anchor, a double sided beam clamp loaded perpendicular to a beam, or a welded or bolted connection to structure. Single sided "C" type beam clamps for support rods of overhead piping, ductwork, or any other equipment are not acceptable on this project as seismic anchor points.
2. Transverse Bracing:
 - a. Restraint(s) applied to limit motion perpendicular to the centerline of the pipe, duct or conduit.
3. Longitudinal Bracing:
 - a. Restraint(s) applied to limit motion parallel to the centerline of the pipe, duct or conduit.

1.2 SUBMITTAL DATA REQUIREMENTS

A. The manufacturer of vibration isolation and seismic restraints shall provide submittals for products as follows:

1. Descriptive Data:
 - a. Catalog cuts or data sheets on vibration isolators and specific restraints detailing

- compliance with the specification.
 - b. Detailed schedules of flexible and rigidly mounted equipment, showing seismic restraints by referencing numbered descriptive drawings.
 - 2. Shop Drawings:
 - a. Provide all details of suspension and support for ceiling hung equipment.
 - b. Where walls, floors, slabs or supplementary steel work are used for seismic restraint locations, details of acceptable attachment methods for conduit and pipe must be included and approved before the condition is accepted for installation. Restraint manufacturers' submittals must include spacing, static loads and seismic loads at all attachment and support points.
 - c. Provide specific details of seismic restraints and anchors; include number, size and locations for each piece of equipment.
 - 3. Seismic Certification and Analysis:
 - a. Seismic restraint calculations must be provided for all connections of equipment to the structure. Calculations must be stamped by a professional engineer registered in the State of Mississippi. Testing and calculations must include both shear and tensile loads as well as one test or analysis at 45E to the weakest mode.
 - b. All restraining devices shall have a preapproval number from California OSHPD or some other recognized government agency showing maximum restraint ratings. Preapprovals based on independent testing are preferred to preapprovals based on calculations. Where preapproved devices are not available, submittals based on independent testing are preferred.
 - c. Analysis must indicate calculated dead loads, static seismic loads and capacity of materials utilized for connections to equipment and structure. Analysis must detail anchoring methods, bolt diameter, embedment and/or welded length. All seismic restraint devices shall be designed to accept, without failure, the forces acting through the equipment center of gravity. Overturning moments may exceed forces at ground level.
 - 4. Provide certification letter from design engineer that the seismic restraint installation is in compliance with the design.
- 1.3 CODE AND STANDARDS REQUIREMENTS
 - A. Typical Applicable Codes and Standards: 2024 IBC
 - B. Seismic, Risk Category II, Seismic Design Category D, $S_s=.311g$, $S_{ds}=.0.322g$, $S_{d1}=.0.227g$.
- 1.4 MANUFACTURER'S RESPONSIBILITY
 - A. Manufacturer of seismic control equipment shall have the following responsibilities:
 - 1. Determine seismic restraint sizes and locations.
 - 2. Provide seismic restraints as scheduled or specified.
 - 3. Provide calculations and materials if required for restraint of un-isolated equipment.
 - 4. Provide installation instructions, drawings and trained field supervision to insure proper installation and performance.
- 1.5 RELATED WORK
 - A. Housekeeping Pads
 - 1. Housekeeping pad reinforcement and pad attachment to the structure details and design shall be prepared by the restraint vendor.
 - 2. Housekeeping pads shall be coordinated with restraint vendor and sized to provide a minimum edge distance of ten (10) bolt diameters all around the outermost anchor bolt to allow development of full drill-in wedge anchor ratings. If cast-in anchors are to be used, the housekeeping pads shall be sized to accommodate the ACI requirements for bolt coverage and embedment.

- B. Supplementary Support Steel
 - 1. Contractor shall supply supplementary support steel for all equipment, piping, etc. as required or specified.
- C. Attachments
 - 1. Contractor shall supply restraint attachment devices in accordance with the requirements of the seismic control vendor's calculations.

PART 2 PRODUCTS

2.1 INTENT

- A. All seismic restraints described in this section shall be the product of a single manufacturer. Mason Industry's products are the basis of these specifications; products of other manufacturers are acceptable provided their systems strictly comply with the specification. Submittals and certification sheets shall be in accordance with section 1.02.
- B. For the purposes of this project, failure is defined as the discontinuance of any attachment point between equipment or structure, vertical permanent deformation greater than 1/8" and/or horizontal permanent deformation greater than 1/4".

PART 3 EXECUTION

3.1 GENERAL

- A. All seismic restraint systems must be installed in strict accordance with the manufacturers written instructions and all certified submittal data.
- B. Installation of seismic restraints must not cause any change of position of equipment, piping or duct work resulting in stresses or misalignment.
- C. The contractor shall not install any equipment, piping or conduit which makes rigid connections with the building unless isolation is not specified. "Building" includes, but is not limited to, slabs, beams, columns, studs and walls. Coordinate work with other trades to avoid rigid contact with the building.
- D. Cable restraints shall be installed slightly slack to avoid short circuiting the isolated suspended equipment, piping or conduit.
- E. Cable assemblies are installed taut on non-isolated systems. Seismic solid braces may be used in place of cables on rigidly attached systems only.
- F. Provide wall seals where piping passes through walls, floors or ceilings,

3.2 PIPING

- A. Seismic Restraint of Piping
 - 1. Seismically restrain gas piping installed in the Work that is 1-1/4" I.D. and larger.
 - 2. Transverse piping restraints shall be at 40' maximum spacing for all pipe sizes, except where lesser spacing is required to limit anchorage loads.
 - 3. Longitudinal restraints shall be at 80' maximum spacing for all pipe sizes, except where lesser spacing is required to limit anchorage loads.
 - 4. Transverse restraint for one pipe section may also act as a longitudinal restraint for a pipe section of the same size connected perpendicular to it if the restraint is installed within 24" of the elbow or TEE or combined stresses are within allowable limits at longer distances.
 - 5. Hold down clamps must be used to attach pipe to all trapeze members before applying restraints in a manner similar to clevis supports.
 - 6. Branch lines may not be used to restrain main lines.

3.3 GENERATOR

- A. Seismic Restraint of Generator
 - 1. Provide restrained spring isolators for unit

3.4 SUSPENDED LIGHTS AND HVAC EQUIPMENT

- A. Seismic Restraint of Piping
 - 1. Seismically restrain suspended lights and HVAC equipment
 - 2. Provide cable restraints as required

3.5 SEISMIC RESTRAINT EXCLUSIONS

- A. Piping
 - 1. All gas piping less than 1" inside diameter.
 - 2. All piping suspended by individual hangers 12" (300mm) or less as measured from the top of the pipe to the bottom of the support where the hanger is attached. However, if the 12" limit is exceeded by any hanger in the run, seismic bracing is required for the run.
 - a. The 12" exemption applies for trapeze supported systems if the top of each item supported by the trapeze qualifies.

END OF SECTION

SECTION 23 05 53 MECHANICAL IDENTIFICATION FOR HVAC

PART 1 GENERAL – NOT USED

PART 2 PRODUCTS

2.1 PIPE MARKERS

- A. Manufacturer: Seton; Product: Setmark Series.
- B. Other Acceptable Manufacturers:
 - 1. Brady: Product: Snap-on Series, or equal
- C. Color: Conform to ASME A13.1.
- D. Description: Plastic Pipe Markers, factory fabricated, flexible, semi- rigid plastic, preformed to fit around pipe or pipe covering; minimum information indicating flow direction arrow and identification of fluid being conveyed.

PART 3 EXECUTION

3.1 PREPARATION

- A. Degrease and clean surfaces to receive adhesive for identification materials.

3.2 INSTALLATION

- A. Install plastic pipe markers in accordance with manufacturer's instructions.
- B. Identify piping, concealed or exposed, with plastic pipe markers. Identify service, flow direction, and pressure. Install in clear view and align with axis of piping. Locate identification not to exceed 20 feet on straight runs including risers and drops, adjacent to each valve and Tee, at each side of penetration of structure or enclosure, and at each obstruction.

3.3 TABLES

- A. Pipe identification bands shall be installed on piping at each shut-off valve, each piece of equipment, each branch take-off, and identify at not less than one (1) point each piping run visible in each room. Pipe bands shall be installed on systems indicated below.

TABLE I - BAND AND LETTER SIZE

PIPE OR PIPE COVERING DIAMETER (inches)	WIDTH OF BAND (inches)	LETTER & NUMBER SIZE (inches)
3/4 to 1-1/4	8	1/2

1-1/2 to 2

8

3/4

2-1/2 to 6

12

1-1/4

TABLE II - BAND COLORING

PIPE	BAND COLOR	LETTERING	LETTERING COLOR
Natural Gas	Yellow	NATURAL GAS	Black

END OF SECTION

SECTION 23 11 23

NATURAL GAS PIPING AND SPECIALTIES

PART 1 GENERAL

1.1 REGULATORY REQUIREMENTS

- A. Perform Work in accordance with 2024 International Fuel Gas Code.
- B. Provide certificate of compliance from authority having jurisdiction indicating approval of installation of gas piping system.

1.2 DELIVERY, STORAGE, AND HANDLING

- A. Accept valves on site in shipping containers with labelling in place. Inspect for damage.
- B. Provide temporary protective coating on cast iron and steel valves.
- C. Provide temporary end caps and closures on piping and fittings. Maintain in place until installation.
- D. Protect piping systems from entry of foreign materials by temporary covers, completing sections of the work, and isolating parts of completed system.

PART 2 PRODUCTS

2.1 NATURAL GAS PIPING

- A. 2 inches and smaller: Schedule 40 black steel pipe with 150 lb. black malleable iron fittings. 2-1/2 inches and larger: Schedule 40 black steel pipe, welded construction with Schedule 40 butt-weld or 2000 PSI forged steel socket weld fittings.

2.2 FLANGES, UNIONS, AND COUPLINGS

- A. Pipe Size 2 Inches and Under:
 - 1. Ferrous pipe: 150 psig malleable iron threaded unions.
- B. Pipe Size Over 2 Inches:
 - 1. Ferrous pipe: 150 psig forged steel slip-on flanges; 1/16 inch thick preformed neoprene gaskets.
- C. Dielectric Connections: Union with galvanized or plated steel threaded end, copper solder end, water impervious isolation barrier. Where dissimilar metals are connected at a flanged joint, an insulating/isolating gasket and bolt set shall be used.

2.3 BALL VALVES

- A. Manufacturer: Watts; Product: B-6800-SS.

B. Other Acceptable Manufacturers:

1. Jamesbury; Product: 21-1136.
2. Other equal product

C. Up to and including 2 Inches: Bronze, full port, three-piece body, stainless steel ball, teflon seats and stuffing box ring, lever handle and threaded ends.

2.4 PLUG VALVES

A. Manufacturer: Walworth; Product: 1797F/1718F.

B. Other Acceptable Manufacturers:

1. Rockwell; Product: 143.
2. Other equal product

C. Over 2 Inches: 175 PSI W.P. iron body, flanged ends, lubricated plug cock. In equipment rooms, provide handle.

PART 3 EXECUTION

3.1 PREPARATION

- A. Ream pipe and tube ends. Remove burrs. Bevel plain end ferrous pipe.
- B. Remove scale and dirt, on inside and outside, before assembly.
- C. Prepare piping connections to equipment with flanges or unions.

3.2 INSTALLATION

- A. Install in accordance with manufacturer's instructions.
- B. Provide non-conducting dielectric connections wherever jointing dissimilar metals.
- C. Route piping in orderly manner and maintain gradient.
- D. Install piping to conserve building space and not interfere with use of space.
- E. Install piping to allow for expansion and contraction without stressing pipe, joints, or connected equipment.
- F. Provide clearance for installation of insulation and access to valves and fittings.
- G. Where pipe support members are welded to structural building framing, scrape, brush clean, and apply one coat of zinc rich primer to welding.
- H. Prepare pipe, fittings, supports, and accessories not prefinished, ready for finish painting.
- I. Install valves with stems upright or horizontal, not inverted.

3.3 APPLICATION

- A. Install unions downstream of valves and at equipment or apparatus connections.
- B. Install ball valves for shut-off and to isolate equipment, part of systems, or vertical risers.
- C. Provide plug valves in natural gas systems for shut-off service.

3.4 ESCUTCHEONS AND PLATES

- A. Chromium plated escutcheons shall be provided for all bare piping and for all insulated piping where piping passes through walls and/or ceilings in finished locations. Plates shall be chrome plated spun brass of plain pattern and set tight on the pipe and to the building surface. Split type escutcheon plates are not acceptable.
- B. Cast iron escutcheon plates shall be provided where pipes are exposed in unfinished locations of the building and run through walls and/or ceilings. Cast iron escutcheons shall also be installed on hanger rods where required to cover openings in concrete at the hanger rod.

END OF SECTION

SECTION 26 04 02

UNDERGROUND ELECTRICAL SERVICE

PART 1 GENERAL

1.1 WORK INCLUDED

- A. The work required under this Section includes all work necessary to provide a complete electrical service.

PART 2 PRODUCTS

2.1 GENERAL SERVICE AND METERING:

- A. The Electric Utility Company will:
1. Furnish and install pole-mounted service transformers.
 2. Furnish meter socket for installation by the contractor.
 3. Furnish and install the meter.
 4. Furnish and install all meter wiring and connections in conduit provided by the contractor.
 5. Furnish and install high voltage (primary) service cable, from line side of service transformer to their electrical distribution system.
 6. Make primary and secondary cable connections to the service transformer.
 7. Reconnect all existing services to the new service transformers.
- B. DIVISION 26 shall:
1. Furnish and install low voltage underground secondary building service from building service equipment to and up the service pole.
 2. Leave free line ends on building service conductors as directed by Electric Utility Company.
 3. Install the utility furnished meter socket at a location as directed by the Utility.
 4. Furnish and install conduit for metering.
 5. Make arrangements with Electric Utility Company for their service and metering work, PAY ALL CHARGES THEREFORE, AND INCLUDE COST THEREOF IN CONTRACT PRICE.
 6. Coordinate work of DIVISION 26 with that of Electric Utility Company. Utility contact is Al Jones 662-871-8351 al.jones@tupeloms.gov.

PART 3 EXECUTION (NOT USED)

END OF SECTION

SECTION 26 05 19

LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Single conductor building wire.
- E. Manufactured wiring systems.
- F. Wiring connectors.
- G. Electrical tape.
- H. Heat shrink tubing.
- I. Oxide inhibiting compound.
- J. Wire pulling lubricant.
- K. Cable ties.
- L. Firestop sleeves.

1.2 REFERENCE STANDARDS

- A. ASTM B3 - Standard Specification for Soft or Annealed Copper Wire; 2013 (Reapproved 2018).
- B. ASTM B8 - Standard Specification for Concentric-Lay-Stranded Copper Conductors, Hard, Medium-Hard, or Soft; 2011 (Reapproved 2017).
- C. ASTM B33 - Standard Specification for Tin-Coated Soft or Annealed Copper Wire for Electrical Purposes; 2010, with Editorial Revision (2020).
- D. ASTM B787/B787M - Standard Specification for 19 Wire Combination Unilay-Stranded Copper Conductors for Subsequent Insulation; 2004 (Reapproved 2020).
- E. ASTM B800 - Standard Specification for 8000 Series Aluminum Alloy Wire for Electrical Purposes - Annealed and Intermediate Tempers; 2005 (Reapproved 2021).
- F. ASTM B801 - Standard Specification for Concentric-Lay-Stranded Conductors of 8000 Series Aluminum Alloy Wire for Subsequent Covering of Insulation; 2018.
- G. ASTM D3005 - Standard Specification for Low-Temperature Resistant Vinyl Chloride Plastic Pressure-Sensitive Electrical Insulating Tape; 2017.
- H. ASTM D4388 - Standard Specification for Nonmetallic Semi-Conducting and Electrically Insulating Rubber Tapes; 2013.
- I. FS A-A-59544 - Cable and Wire, Electrical (Power, Fixed Installation); Federal Specification; 2008a (Validated 2019).
- J. NECA 1 - Standard for Good Workmanship in Electrical Construction; 2015.
- K. NECA 104 - Recommended Practice for Installing Aluminum Building Wire and Cable; 2012.
- L. NECA 120 - Standard for Installing Armored Cable (AC) and Metal-Clad Cable (MC); 2012.
- M. NEMA WC 70 - Power Cables Rated 2000 Volts or Less for the Distribution of Electrical Energy; 2009.
- N. NETA ATS - Acceptance Testing Specifications for Electrical Power Equipment and Systems; 2017.
- O. NFPA 70 - National Electrical Code; Most Recent Edition Adopted by Authority Having Jurisdiction, Including All Applicable Amendments and Supplements.
- P. NFPA 79 - Electrical Standard for Industrial Machinery; 2018.
- Q. UL 44 - Thermoset-Insulated Wires and Cables; Current Edition, Including All Revisions.
- R. UL 83 - Thermoplastic-Insulated Wires and Cables; Current Edition, Including All Revisions.

- S. UL 183 - Manufactured Wiring Systems; Current Edition, Including All Revisions.
- T. UL 486A-486B - Wire Connectors; Current Edition, Including All Revisions.
- U. UL 486C - Splicing Wire Connectors; Current Edition, Including All Revisions.
- V. UL 486D - Sealed Wire Connector Systems; Current Edition, Including All Revisions.
- W. UL 510 - Polyvinyl Chloride, Polyethylene, and Rubber Insulating Tape; Current Edition, Including All Revisions.

1.3 ADMINISTRATIVE REQUIREMENTS

- A. Coordination:
 - 1. Coordinate sizes of raceways, boxes, and equipment enclosures installed under other sections with the actual conductors to be installed, including adjustments for conductor sizes increased for voltage drop.
 - 2. Coordinate with electrical equipment installed under other sections to provide terminations suitable for use with the conductors to be installed.
 - 3. Notify Architect of any conflicts with or deviations from Contract Documents. Obtain direction before proceeding with work.

1.4 SUBMITTALS

- A. See Section 01 33 00 – Submittal Procedures for submittal procedures.
- B. Product Data: Provide manufacturer's standard catalog pages and data sheets for conductors and cables, including detailed information on materials, construction, ratings, listings, and available sizes, configurations, and stranding.
- C. Sustainable Design Documentation: Submit manufacturer's product data on conductor and cable showing compliance with specified lead content requirements.
- D. Design Data: Indicate voltage drop and ampacity calculations for aluminum conductors substituted for copper conductors. Include proposed modifications to raceways, boxes, wiring gutters, enclosures, etc. to accommodate substituted conductors.
- E. Field Quality Control Test Reports.
- F. Manufacturer's Installation Instructions: Indicate application conditions and limitations of use stipulated by product testing agency. Include instructions for storage, handling, protection, examination, preparation, and installation of product.
- G. Project Record Documents: Record actual installed circuiting arrangements. Record actual routing for underground circuits.
- H. Maintenance Materials: Furnish the following for Owner's use in maintenance of project.
 - 1. See Section 01 60 00 - Product Requirements, for additional provisions.
 - 2. Extra Manufactured Wiring Systems Cable Assemblies: One of each configuration, 6 feet length.

1.5 QUALITY ASSURANCE

- A. Comply with requirements of NFPA 70.
- B. Maintain at the project site a copy of each referenced document that prescribes execution requirements.
- C. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum three years documented experience.
- D. Product Listing Organization Qualifications: An organization recognized by OSHA as a Nationally Recognized Testing Laboratory (NRTL) and acceptable to authorities having jurisdiction.

1.6 DELIVERY, STORAGE, AND HANDLING

- A. Receive, inspect, handle, and store conductors and cables in accordance with manufacturer's instructions.

1.7 FIELD CONDITIONS

- A. Do not install or otherwise handle thermoplastic-insulated conductors at temperatures lower than 14 degrees F, unless otherwise permitted by manufacturer's instructions. When installation below this temperature is unavoidable, notify Architect and obtain direction before proceeding with work.

PART 2 PRODUCTS

2.1 CONDUCTOR AND CABLE APPLICATIONS

- A. Do not use conductors and cables for applications other than as permitted by NFPA 70 and product listing.
- B. Provide single conductor building wire installed in suitable raceway unless otherwise indicated, permitted, or required.
- C. Nonmetallic-sheathed cable is not permitted.
- D. Underground feeder and branch-circuit cable is not permitted.
- E. Service entrance cable is not permitted.
- F. Armored cable is not permitted.
- G. Metal-clad cable is permitted.
- H. Manufactured wiring systems are permitted only as follows:
 - 1. Where not otherwise restricted, may be used:
 - a. For branch circuits where concealed above accessible ceilings for lighting, and in open ceiling areas for lighting.
 - 1) Exception: Provide single conductor building wire in raceway for circuit homerun from distribution box to panelboard.
 - b. For general purpose, non-essential electrical systems when provided with additional insulated grounding conductor for redundant grounding.
 - 2. In addition to other applicable restrictions, may not be used:
 - a. Unless approved by Owner.
 - b. Where not approved for use by the authority having jurisdiction.
 - c. Where exposed to damage.
 - d. For damp, wet, or corrosive locations.
 - e. For isolated ground circuits, unless provided with an additional isolated/insulated grounding conductor.

2.2 CONDUCTOR AND CABLE GENERAL REQUIREMENTS

- A. Provide products that comply with requirements of NFPA 70.
- B. Provide products listed, classified, and labeled as suitable for the purpose intended.
- C. Provide conductors and cables with lead content less than 300 parts per million.
- D. Provide new conductors and cables manufactured not more than one year prior to installation.
- E. Unless specifically indicated to be excluded, provide all required conduit, boxes, wiring, connectors, etc. as required for a complete operating system.
- F. Comply with NEMA WC 70.
- G. Comply with FS A-A-59544 where applicable.
- H. Thermoplastic-Insulated Conductors and Cables: Listed and labeled as complying with UL 83.
- I. Thermoset-Insulated Conductors and Cables: Listed and labeled as complying with UL 44.
- J. Conductors for Grounding and Bonding: Also comply with Section 26 05 26.
- K. Conductors and Cables Installed Exposed in Spaces Used for Environmental Air (only where specifically permitted): Plenum rated, listed and labeled as suitable for use in return air plenums.

- L. Conductor Material:
 - 1. Copper conductors and aluminum conductors are acceptable for this project. Conductor sizes indicated are based on copper.
 - 2. Copper Conductors: Soft drawn annealed, 98 percent conductivity, uncoated copper conductors complying with ASTM B3, ASTM B8, or ASTM B787/B787M unless otherwise indicated.
 - 3. Tinned Copper Conductors: Comply with ASTM B33.
 - 4. Aluminum Conductors 8000 Series, aluminum alloy, annealed and intermediate tempers.
- M. Minimum Conductor Size:
 - 1. Branch Circuits: 12 AWG.
 - 2. Control Circuits: 14 AWG.
- N. Where conductor size is not indicated, size to comply with NFPA 70 but not less than applicable minimum size requirements specified.
- O. Conductor Color Coding:
 - 1. Color code conductors to match existing. Maintain consistent color coding throughout project.
 - 2. Color Coding Method: Integrally colored insulation.
 - a. Conductors size 4 AWG and larger may have black insulation color coded using vinyl color coding electrical tape.
 - b. For modifications or additions to existing wiring systems, comply with existing color code when existing code complies with NFPA 70 and is approved by the authority having jurisdiction.
 - c. For control circuits, comply with manufacturer's recommended color code.

2.3 SINGLE CONDUCTOR BUILDING WIRE

- A. Manufacturers:
 - 1. Copper or Aluminum Building Wire:
 - a. Cerro Wire LLC: www.cerrowire.com.
 - b. Encore Wire Corporation: www.encorewire.com.
 - c. General Cable Technologies Corporation; www.generalcable.com.
 - d. Service Wire Co: www.servicewire.com.
 - e. Southwire Company: www.southwire.com.
 - f. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Description: Single conductor insulated wire.
- C. Conductor Stranding:
 - 1. Feeders and Branch Circuits:
 - a. Size 10 AWG and Smaller: Solid.
 - b. Size 8 AWG and Larger: Stranded.
 - 2. Control Circuits: Stranded.
- D. Insulation Voltage Rating: 600 V.
- E. Insulation:
 - 1. Building Wire: Type THHN/THWN or THHN/THWN-2, except as indicated below.
 - a. Installed Underground: Type XHHW-2.

2.4 MANUFACTURED WIRING SYSTEMS

- A. Manufacturers:
 - 1. AFC Cable Systems Inc: www.afcweb.com
 - 2. D&P Custom Lights & Wiring Systems, Inc: www.dandpcustomlights.com
 - 3. RELOC Wiring Solutions, a brand of Acuity Brands, Inc: www.relocwiring.com
 - 4. Wiremold, a brand of Legrand North America, Inc: www.legrand.us

- 5. Substitutions: See Section 01 60 00 - Product Requirements.
 - B. Description: Manufactured wiring assemblies complying with NFPA 70 Article 604, and listed and labeled as complying with UL 183.
 - C. Provide components necessary to transition between manufactured wiring system and other wiring methods.
 - D. Branch Circuit Cables:
 - 1. Conductor Stranding (Size 10 AWG and Smaller): Solid.
 - 2. Insulation Voltage Rating: 600 V.
 - 3. Insulation: Type THHN.
 - 4. Provide dedicated neutral conductor for each phase conductor where indicated or required.
 - 5. Grounding: Full-size integral equipment grounding conductor.
 - a. Provide additional isolated/insulated grounding conductor where indicated or required.
 - 6. Armor: Steel, interlocked tape.
 - E. Connectors: Keyed and color-coded to prevent interconnection of different voltages.
- 2.8 WIRING CONNECTORS
- A. Description: Wiring connectors appropriate for the application, suitable for use with the conductors to be connected, and listed as complying with UL 486A-486B or UL 486C as applicable.
 - B. Connectors for Grounding and Bonding: Comply with Section 26 05 26.
 - C. Wiring Connectors for Splices and Taps:
 - 1. Copper Conductors Size 8 AWG and Smaller: Use twist-on insulated spring connectors.
 - 2. Copper Conductors Size 6 AWG and Larger: Use mechanical connectors or compression connectors.
 - D. Wiring Connectors for Terminations:
 - 1. Provide terminal lugs for connecting conductors to equipment furnished with terminations designed for terminal lugs.
 - 2. Provide compression adapters for connecting conductors to equipment furnished with mechanical lugs when only compression connectors are specified.
 - 3. Where over-sized conductors are larger than the equipment terminations can accommodate, provide connectors suitable for reducing to appropriate size, but not less than required for the rating of the overcurrent protective device.
 - 4. Provide motor pigtail connectors for connecting motor leads in order to facilitate disconnection.
 - 5. Conductors Size 8 AWG and Larger: Use mechanical connectors or compression connectors where connectors are required.
 - 6. Stranded Conductors Size 10 AWG and Smaller: Use crimped terminals for connections to terminal screws.
 - 7. Conductors for Control Circuits: Use crimped terminals for all connections.
 - E. Do not use insulation-piercing or insulation-displacement connectors designed for use with conductors without stripping insulation.
 - F. Do not use push-in wire connectors as a substitute for twist-on insulated spring connectors.
 - G. Twist-on Insulated Spring Connectors: Rated 600 V, 221 degrees F for standard applications and 302 degrees F for high temperature applications; pre-filled with sealant and listed as complying with UL 486D for damp and wet locations.
 - 1. Manufacturers:
 - a. 3M: www.3m.com
 - b. Ideal Industries, Inc: www.idealindustries.com

- c. NSI Industries LLC: www.nsiindustries.com
 - d. Substitutions: See Section 01 60 00 - Product Requirements.
- H. Mechanical Connectors: Provide bolted type or set-screw type.
- 1. Manufacturers:
 - a. Burndy LLC; www.burndy.com
 - b. IlSCO: www.ilSCO.com
 - c. Thomas & Betts Corporation: www.tnb.com
 - d. Substitutions: See Section 01 60 00 - Product Requirements.
- I. Compression Connectors: Provide circumferential type or hex type crimp configuration.
- 1. Manufacturers:
 - a. Burndy LLC; www.burndy.com
 - b. IlSCO: www.ilSCO.com
 - c. Thomas & Betts Corporation: www.tnb.com
 - d. Substitutions: See Section 01 60 00 - Product Requirements.
- J. Crimped Terminals: Nylon-insulated, with insulation grip and terminal configuration suitable for connection to be made.
- 1. Manufacturers:
 - a. Burndy LLC; www.burndy.com
 - b. IlSCO: www.ilSCO.com
 - c. Thomas & Betts Corporation: www.tnb.com
 - d. Substitutions: See Section 01 60 00 - Product Requirements.

2.9 ACCESSORIES

- A. Electrical Tape:
- 1. Manufacturers:
 - a. 3M: www.3m.com
 - b. Plymouth Rubber Europa: www.plymouthrubber.com
 - c. Substitutions: See Section 01 60 00 - Product Requirements.
 - 2. Vinyl Color Coding Electrical Tape: Integrally colored to match color code indicated; listed as complying with UL 510; minimum thickness of 7 mil; resistant to abrasion, corrosion, and sunlight; suitable for continuous temperature environment up to 221 degrees F.
 - 3. Vinyl Insulating Electrical Tape: Complying with ASTM D3005 and listed as complying with UL 510; minimum thickness of 7 mil; resistant to abrasion, corrosion, and sunlight; conformable for application down to 0 degrees F and suitable for continuous temperature environment up to 221 degrees F.
 - 4. Rubber Splicing Electrical Tape: Ethylene Propylene Rubber (EPR) tape, complying with ASTM D4388; minimum thickness of 30 mil; suitable for continuous temperature environment up to 194 degrees F and short-term 266 degrees F overload service.
 - 5. Electrical Filler Tape: Rubber-based insulating moldable putty, minimum thickness of 125 mil; suitable for continuous temperature environment up to 176 degrees F.
 - 6. Moisture Sealing Electrical Tape: Insulating mastic compound laminated to flexible, all-weather vinyl backing; minimum thickness of 90 mil.
- B. Heat Shrink Tubing: Heavy-wall, split-resistant, with factory-applied adhesive; rated 600 V; suitable for direct burial applications; listed as complying with UL 486D.
- 1. Manufacturers:
 - a. 3M: www.3m.com.
 - b. Burndy LLC; www.burndy.com
 - c. Thomas & Betts Corporation: www.tnb.com
- C. Oxide Inhibiting Compound: Listed; suitable for use with the conductors or cables to be installed.

1. Manufacturers:
 - a. Burndy LLC; www.burndy.com
 - b. Ideal Industries, Inc: www.idealindustries.com
 - c. IlSCO: www.ilSCO.com
- D. Wire Pulling Lubricant: Listed; suitable for use with the conductors or cables to be installed and suitable for use at the installation temperature.
 1. Manufacturers:
 - a. 3M: www.3m.com
 - b. American Polywater Corporation: www.polywater.com
 - c. Ideal Industries, Inc: www.idealindustries.com
- E. Cable Ties: Material and tensile strength rating suitable for application.
 1. Manufacturers:
 - a. Burndy LLC; www.burndy.com/#sle.
- F. Sealing Systems for Roof Penetrations: Premanufactured components and accessories as required to preserve integrity of roofing system and maintain roof warranty; suitable for cables and roofing system to be installed; designed to accommodate existing penetrations where applicable.
 1. Products:
 - a. Menzies Metal Products; Electrical Roof Stack and Cap: www.menzies-metal.com
 - b. Menzies Metal Products; Electrical Retro Box: www.menzies-metal.com
- G. Firestop Sleeves: Listed; provide as required to preserve fire resistance rating of building elements.
 1. Products:
 - a. HoldRite, a brand of Reliance Worldwide Corporation; HydroFlame Pro Series/HydroFlame Custom Built: www.holdrite.com

PART 3 EXECUTION

3.1 EXAMINATION

- A. Verify that interior of building has been protected from weather.
- B. Verify that work likely to damage wire and cable has been completed.
- C. Verify that raceways, boxes, and equipment enclosures are installed and are properly sized to accommodate conductors and cables in accordance with NFPA 70.
- D. Verify that field measurements are as indicated.
- E. Verify that conditions are satisfactory for installation prior to starting work.

3.2 PREPARATION

- A. Clean raceways thoroughly to remove foreign materials before installing conductors and cables.

3.3 INSTALLATION

- A. Circuiting Requirements:
 1. Unless dimensioned, circuit routing indicated is diagrammatic.
 2. When circuit destination is indicated without specific routing, determine exact routing required.
 3. Arrange circuiting to minimize splices.
 4. Include circuit lengths required to install connected devices within 10 ft of location indicated.
 5. Maintain separation of Class 1, Class 2, and Class 3 remote-control, signaling, and power-limited circuits in accordance with NFPA 70.
 6. Maintain separation of wiring for emergency systems in accordance with NFPA 70.

7. Circuiting Adjustments: Unless otherwise indicated, when branch circuits are indicated as separate, combining up to 3 circuits together in a single raceway is permitted.
 8. Common Neutrals: Unless otherwise indicated, sharing of neutral/grounded conductors among up to three single phase branch circuits of different phases installed in the same raceway is not permitted. Provide dedicated neutral/grounded conductor for each individual branch circuit.
- B. Install products in accordance with manufacturer's instructions.
- C. Perform work in accordance with NECA 1 (general workmanship).
- D. Installation in Raceway:
1. Tape ends of conductors and cables to prevent infiltration of moisture and other contaminants.
 2. Pull all conductors and cables together into raceway at same time.
 3. Do not damage conductors and cables or exceed manufacturer's recommended maximum pulling tension and sidewall pressure.
 4. Use suitable wire pulling lubricant where necessary, except when lubricant is not recommended by the manufacturer.
- E. Exposed Cable Installation (only where specifically permitted):
1. Route cables parallel or perpendicular to building structural members and surfaces.
 2. Protect cables from physical damage.
- F. Paralleled Conductors: Install conductors of the same length and terminate in the same manner.
- G. Secure and support conductors and cables in accordance with NFPA 70 using suitable supports and methods approved by the authority having jurisdiction. Provide independent support from building structure. Do not provide support from raceways, piping, ductwork, or other systems.
1. Installation Above Suspended Ceilings: Do not provide support from ceiling support system. Do not provide support from ceiling grid or allow conductors and cables to lay on ceiling tiles.
 2. Installation in Vertical Raceways: Provide supports where vertical rise exceeds permissible limits.
- H. Terminate cables using suitable fittings.
1. Metal-Clad Cable (Type MC):
 - a. Use listed fittings with separate anti-short bushings.
 - b. Cut cable armor only using specialized tools to prevent damaging conductors or insulation. Do not use hacksaw or wire cutters to cut armor.
 - c. Do not use direct-bearing set-screw type fittings for cables with aluminum armor.
- I. Install conductors with a minimum of 12 inches of slack at each outlet.
- J. Where conductors are installed in enclosures for future termination by others, provide a minimum of 5 feet of slack.
- K. Neatly train and bundle conductors inside boxes, wireways, panelboards and other equipment enclosures.
- L. Group or otherwise identify neutral/grounded conductors with associated ungrounded conductors inside enclosures in accordance with NFPA 70.
- M. Make wiring connections using specified wiring connectors.
1. Make splices and taps only in accessible boxes. Do not pull splices into raceways or make splices in conduit bodies or wiring gutters.
 2. Remove appropriate amount of conductor insulation for making connections without cutting, nicking or damaging conductors.

3. Do not remove conductor strands to facilitate insertion into connector.
 4. Clean contact surfaces on conductors and connectors to suitable remove corrosion, oxides, and other contaminates. Do not use wire brush on plated connector surfaces.
 5. Mechanical Connectors: Secure connections according to manufacturer's recommended torque settings.
 6. Compression Connectors: Secure connections using manufacturer's recommended tools and dies.
- N. Insulate splices and taps that are made with uninsulated connectors using methods suitable for the application, with insulation and mechanical strength at least equivalent to unspliced conductors.
1. Dry Locations: Use insulating covers specifically designed for the connectors, electrical tape, or heat shrink tubing.
 - a. For taped connections, first apply adequate amount of rubber splicing electrical tape or electrical filler tape, followed by outer covering of vinyl insulating electrical tape.
 - b. For taped connections likely to require re-entering, including motor leads, first apply varnished cambric electrical tape, followed by adequate amount of rubber splicing electrical tape, followed by outer covering of vinyl insulating electrical tape.
 2. Damp Locations: Use insulating covers specifically designed for the connectors, electrical tape, or heat shrink tubing.
 - a. For connections with insulating covers, apply outer covering of moisture sealing electrical tape.
 - b. For taped connections, follow same procedure as for dry locations but apply outer covering of moisture sealing electrical tape.
 3. Wet Locations: Use heat shrink tubing.
- O. Insulate ends of spare conductors using vinyl insulating electrical tape.
- P. Field-Applied Color Coding: Where vinyl color coding electrical tape is used in lieu of integrally colored insulation as permitted in Part 2 under "Color Coding", apply half overlapping turns of tape at each termination and at each location conductors are accessible.
- Q. Identify conductors and cables in accordance with Section 26 05 53.
- R. Install firestopping to preserve fire resistance rating of partitions and other elements.
- S. Unless specifically indicated to be excluded, provide final connections to all equipment and devices, including those furnished by others, as required for a complete operating system.
- 3.4 FIELD QUALITY CONTROL
- A. See Section 01 40 00 - Quality Requirements, for additional requirements.
 - B. Inspect and test in accordance with NETA ATS, except Section 4.
 - C. Perform inspections and tests listed in NETA ATS, Section 7.3.2. The insulation resistance test is required for all conductors. The resistance test for parallel conductors listed as optional is not required.
 1. Disconnect surge protective devices (SPDs) prior to performing any high potential testing. Replace SPDs damaged by performing high potential testing with SPDs connected.
 - D. Correct deficiencies and replace damaged or defective conductors and cables.

END OF SECTION

SECTION 26 05 26

GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Grounding and bonding requirements.
- B. Conductors for grounding and bonding.
- C. Connectors for grounding and bonding.
- D. Ground bars.
- E. Ground rod electrodes.

1.2 REFERENCE STANDARDS

- A. IEEE 81 - IEEE Guide for Measuring Earth Resistivity, Ground Impedance, and Earth Surface Potentials of a Grounding System.
- B. NECA 1 - Standard for Good Workmanship in Electrical Construction.
- C. NEMA GR 1 - Grounding Rod Electrodes and Grounding Rod Electrode Couplings.
- D. NETA ATS - Acceptance Testing Specifications for Electrical Power Equipment and Systems.
- E. NFPA 70 - National Electrical Code; Most Recent Edition Adopted by Authority Having Jurisdiction, Including All Applicable Amendments and Supplements.
- F. UL 467 - Grounding and Bonding Equipment; Current Edition, Including All Revisions.

1.3 ADMINISTRATIVE REQUIREMENTS

- A. Coordination:
 - 1. Verify exact locations of underground metal water service pipe entrances to building.
 - 2. Coordinate the work with other trades to provide steel reinforcement complying with specified requirements for concrete-encased electrode.
 - 3. Notify Architect of any conflicts with or deviations from Contract Documents. Obtain direction before proceeding with work.
- B. Sequencing:
 - 1. Do not install ground rod electrodes until final backfill and compaction is complete.

1.4 SUBMITTALS

- A. See Section 01 33 00 – Submittal Procedures for submittal procedures.
- B. Product Data: Provide manufacturer's standard catalog pages and data sheets for grounding and bonding system components.
- C. Manufacturer's Instructions: Indicate application conditions and limitations of use stipulated by product testing agency. Include instructions for storage, handling, protection, examination, preparation, and installation of product.
- D. Field quality control test reports.
- E. Project Record Documents: Record actual locations of grounding electrode system components and connections.

1.5 QUALITY ASSURANCE

- A. Comply with requirements of NFPA 70.
- B. Maintain at the project site a copy of each referenced document that prescribes execution requirements.
- C. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum three years documented experience.

- D. Product Listing Organization Qualifications: An organization recognized by OSHA as a Nationally Recognized Testing Laboratory (NRTL) and acceptable to authorities having jurisdiction.

1.6 DELIVERY, STORAGE, AND HANDLING

- A. Receive, inspect, handle, and store products in accordance with manufacturer's instructions.

PART 2 PRODUCTS

2.1 GROUNDING AND BONDING REQUIREMENTS

- A. Do not use products for applications other than as permitted by NFPA 70 and product listing.
- B. Unless specifically indicated to be excluded, provide all required components, conductors, connectors, conduit, boxes, fittings, supports, accessories, etc. as necessary for a complete grounding and bonding system.
- C. Where conductor size is not indicated, size to comply with NFPA 70 but not less than applicable minimum size requirements specified.
- D. Grounding System Resistance:
 - 1. Achieve specified grounding system resistance under normally dry conditions unless otherwise approved by Architect. Precipitation within the previous 48 hours does not constitute normally dry conditions.
 - 2. Grounding Electrode System: Not greater than 5 ohms to ground, when tested according to IEEE 81 using "fall-of-potential" method.
 - 3. Between Grounding Electrode System and Major Electrical Equipment Frames, System Neutral, and Derived Neutral Points: Not greater than 0.5 ohms, when tested using "point-to-point" methods.
- E. Grounding Electrode System:
 - 1. Provide connection to required and supplemental grounding electrodes indicated to form grounding electrode system.
 - a. Provide continuous grounding electrode conductors without splice or joint.
 - b. Install grounding electrode conductors in raceway where exposed to physical damage. Bond grounding electrode conductor to metallic raceways at each end with bonding jumper.
 - 2. Metal Underground Water Pipe(s):
 - a. Provide connection to underground metal domestic and fire protection (where present) water service pipe(s) that are in direct contact with earth for at least 10 feet at an accessible location not more than 5 feet from the point of entrance to the building.
 - b. Provide bonding jumper(s) around insulating joints/pipes as required to make pipe electrically continuous.
 - c. Provide bonding jumper around water meter of sufficient length to permit removal of meter without disconnecting jumper.
 - 3. Ground Rod Electrode(s):
 - a. Provide three electrodes in an equilateral triangle configuration unless otherwise indicated or required.
 - b. Space electrodes not less than 10 feet from each other and any other ground electrode.
 - c. Where location is not indicated, locate electrode(s) at least 5 feet outside building perimeter foundation as near as possible to electrical service entrance; where possible, locate in softscape (uncovered) area.
 - d. Provide ground enhancement material around electrode where indicated.
 - e. Provide ground access well for each electrode.
 - 4. Provide additional ground electrode(s) as required to achieve specified grounding electrode system resistance.
- F. Service-Supplied System Grounding:

1. For each service disconnect, provide grounding electrode conductor to connect neutral (grounded) service conductor to grounding electrode system. Unless otherwise indicated, make connection at neutral (grounded) bus in service disconnect enclosure.
 2. For each service disconnect, provide main bonding jumper to connect neutral (grounded) bus to equipment ground bus where not factory-installed. Do not make any other connections between neutral (grounded) conductors and ground on load side of service disconnect.
- G. Bonding and Equipment Grounding:
1. Provide bonding for equipment grounding conductors, equipment ground busses, metallic equipment enclosures, metallic raceways and boxes, device grounding terminals, and other normally non-current-carrying conductive materials enclosing electrical conductors/equipment or likely to become energized as indicated and in accordance with NFPA 70.
 2. Provide insulated equipment grounding conductor in each feeder and branch circuit raceway. Do not use raceways as sole equipment grounding conductor.
 3. Where circuit conductor sizes are increased for voltage drop, increase size of equipment grounding conductor proportionally in accordance with NFPA 70.
 4. Unless otherwise indicated, connect wiring device grounding terminal to branch circuit equipment grounding conductor and to outlet box with bonding jumper.
 5. Terminate branch circuit equipment grounding conductors on solidly bonded equipment ground bus only. Do not terminate on neutral (grounded) or isolated/insulated ground bus.
 6. Provide bonding jumper across expansion or expansion/deflection fittings provided to accommodate conduit movement.
 7. Provide bonding for interior metal piping systems in accordance with NFPA 70. This includes, but is not limited to:
 - a. Metal water piping where not already effectively bonded to metal underground water pipe used as grounding electrode.
 - b. Metal gas piping.
 - c. Metal process piping.
 8. Provide bonding for interior metal air ducts.
 9. Provide bonding for metal building frame.
 10. Provide bonding for metal siding not effectively bonded through attachment to metal building frame.

2.2 GROUNDING AND BONDING COMPONENTS

- A. General Requirements:
1. Provide products listed, classified, and labeled as suitable for the purpose intended.
 2. Provide products listed and labeled as complying with UL 467 where applicable.
- B. Conductors for Grounding and Bonding, in Addition to Requirements of Section 26 05 26:
1. Use insulated copper conductors unless otherwise indicated.
 - a. Exceptions:
 - 1) Use bare copper conductors where installed underground in direct contact with earth.
 2. Factory Pre-fabricated Bonding Jumpers: Furnished with factory-installed ferrules; size braided cables to provide equivalent gauge of specified conductors.
- C. Connectors for Grounding and Bonding:
1. Description: Connectors appropriate for the application and suitable for the conductors and items to be connected; listed and labeled as complying with UL 467.
 2. Unless otherwise indicated, use exothermic welded connections for underground, concealed and other inaccessible connections.
 3. Unless otherwise indicated, use mechanical connectors, compression connectors, or exothermic welded connections for accessible connections.
 - a. Exceptions:
 - 1) Use exothermic welded connections for connections to metal building frame.

4. Manufacturers - Mechanical and Compression Connectors:
 - a. Advanced Lightning Technology (ALT); www.altfab.com
 - b. Burndy LLC; www.burndy.com
 - c. Harger Lightning & Grounding; www.harger.com
 - d. Thomas & Betts Corporation; www.tnb.com
 - f. Substitutions: See Section 01 60 00 - Product Requirements.
5. Manufacturers - Exothermic Welded Connections:
 - a. Burndy LLC; www.burndy.com
 - b. Cadweld, a brand of Erico International Corporation; www.erico.com
 - c. thermOWeld, subsidiary of Continental Industries; division of Burndy LLC; www.thermoweld.com
 - d. Substitutions: See Section 01 60 00 - Product Requirements.
- D. Ground Rod Electrodes:
 1. Comply with NEMA GR 1.
 2. Material: Copper-bonded (copper-clad) steel.
 3. Size: 3/4 inch diameter by 10 feet length, unless otherwise indicated.
 4. Where rod lengths of greater than 10 feet are indicated or otherwise required, sectionalized ground rods may be used.
 5. Manufacturers:
 - a. Advanced Lightning Technology (ALT); www.altfab.com
 - b. Erico International Corporation; www.erico.com
 - c. Galvan Industries, Inc; www.galvanelectrical.com
 - d. Harger Lightning & Grounding; www.harger.com
 - e. Substitutions: See Section 01 60 00 - Product Requirements.
- E. Oxide Inhibiting Compound: Comply with Section 26 05 19.

PART 3 EXECUTION

3.1 EXAMINATION

- A. Verify that work likely to damage grounding and bonding system components has been completed.
- B. Verify that field measurements are as indicated.
- C. Verify that conditions are satisfactory for installation prior to starting work.

3.2 INSTALLATION

- A. Install products in accordance with manufacturer's instructions.
- B. Perform work in accordance with NECA 1 (general workmanship).
- C. Ground Rod Electrodes: Unless otherwise indicated, install ground rod electrodes vertically. Where encountered rock prohibits vertical installation, install at 45 degree angle or bury horizontally in trench at least 30 inches deep in accordance with NFPA 70 or provide ground plates.
 1. Outdoor Installations: Unless otherwise indicated, install with top of rod 6 inches below finished grade.
 2. Indoor Installations: Unless otherwise indicated, install with 4 inches of top of rod exposed.
- D. Make grounding and bonding connections using specified connectors.
 1. Remove appropriate amount of conductor insulation for making connections without cutting, nicking or damaging conductors. Do not remove conductor strands to facilitate insertion into connector.
 2. Remove nonconductive paint, enamel, or similar coating at threads, contact points, and contact surfaces.
 3. Exothermic Welds: Make connections using molds and weld material suitable for the items to be connected in accordance with manufacturer's recommendations.

- 4. Mechanical Connectors: Secure connections according to manufacturer's recommended torque settings.
- 5. Compression Connectors: Secure connections using manufacturer's recommended tools and dies.
- E. Identify grounding and bonding system components in accordance with Section 26 05 53.

3.3 FIELD QUALITY CONTROL

- A. See Section 01 40 00 - Quality Requirements, for additional requirements.
- B. Inspect and test in accordance with NETA ATS except Section 4.
- C. Perform inspections and tests listed in NETA ATS, Section 7.13.
- D. Perform ground electrode resistance tests under normally dry conditions. Precipitation within the previous 48 hours does not constitute normally dry conditions.
- E. Investigate and correct deficiencies where measured ground resistances do not comply with specified requirements.
- F. Submit detailed reports indicating inspection and testing results and corrective actions taken.

END OF SECTION

SECTION 26 05 29

HANGERS AND SUPPORTS FOR ELECTRICAL SYSTEMS

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Support and attachment components for equipment, conduit, cable, boxes, and other electrical work.

1.2 REFERENCE STANDARDS

- A. ASTM A123/A123M - Standard Specification for Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products.
- B. ASTM A153/A153M - Standard Specification for Zinc Coating (Hot-Dip) on Iron and Steel Hardware.
- C. ASTM B633 - Standard Specification for Electrodeposited Coatings of Zinc on Iron and Steel.
- D. MFMA-4 - Metal Framing Standards Publication; Metal Framing Manufacturers Association.
- E. NFPA 70 - National Electrical Code; National Fire Protection Association; Most Recent Edition Adopted by Authority Having Jurisdiction, Including All Applicable Amendments and Supplements.

1.3 SUBMITTALS

- A. See Section 01 33 00 - Administrative Requirements, for submittal procedures.
- B. Product Data: Provide manufacturer's catalog data for fastening systems.
- C. Manufacturer's Instructions: Indicate application conditions and limitations of use stipulated by product testing agency. Include instructions for storage, handling, protection, examination, preparation, and installation of product.

1.4 QUALITY ASSURANCE

- A. Comply with NFPA 70.
- B. Comply with applicable building code.

PART 2 PRODUCTS

2.1 SUPPORT AND ATTACHMENT COMPONENTS

- A. General Requirements:
 - 1. Provide all required hangers, supports, anchors, fasteners, fittings, accessories, and hardware as necessary for the complete installation of electrical work.
 - 2. Provide products listed, classified, and labeled by Underwriter's Laboratories Inc. (UL) or testing firm acceptable to authority having jurisdiction as suitable for the purpose indicated, where applicable.
 - 3. Where support and attachment component types and sizes are not indicated, select in accordance with manufacturer's application criteria as required for the load to be supported with a minimum safety factor of 2. Include consideration for vibration, equipment operation, and shock loads where applicable.
 - 4. Do not use products for applications other than as permitted by NFPA 70 and product listing.

- 5. Steel Components: Use corrosion resistant materials suitable for the environment where installed.
 - a. Zinc-Plated Steel: Electroplated in accordance with ASTM B633.
 - b. Galvanized Steel: Hot-dip galvanized after fabrication in accordance with ASTM A123/A123M or ASTM A153/A153M.
- B. Conduit and Cable Supports: Straps, clamps, etc. suitable for the conduit or cable to be supported.
 - 1. Conduit Straps: One-hole or two-hole type; steel or malleable iron.
 - 2. Conduit Clamps: Bolted type unless otherwise indicated.
- C. Box Supports: Hangers, brackets, etc. suitable for the boxes to be supported.
- D. Metal Channel (Strut) Framing Systems: Factory-fabricated continuous-slot metal channel (strut) and associated fittings, accessories, and hardware required for field-assembly of supports.
 - 1. Comply with MFMA-4.
- E. Hanger Rods: Threaded zinc-plated steel unless otherwise indicated.
- F. Anchors and Fasteners:
 - 1. Unless otherwise indicated and where not otherwise restricted, use the anchor and fastener types indicated for the specified applications.

2.2 MANUFACTURERS

- A. Thomas & Betts Corporation: www.tnb.com.
- B. Threaded Rod Company: www.threadedrod.com.
- C. Substitutions: See Section 01 60 00 - Product Requirements.

2.3 MATERIALS

- A. Hangers, Supports, Anchors, and Fasteners - General: Corrosion-resistant materials of size and type adequate to carry the loads of equipment and conduit, including weight of wire in conduit.
- B. Supports: Fabricated of structural steel or formed steel members; galvanized.
- C. Anchors and Fasteners:
 - 1. Do not use spring clips.
 - 2. Obtain permission from Architect before using powder-actuated anchors.
 - 3. Concrete Structural Elements: Use precast inserts, expansion anchors, powder-actuated anchors, or preset inserts.
 - 4. Steel Structural Elements: Use beam clamps, steel ramset fasteners, or welded fasteners.
 - 5. Concrete Surfaces: Use self-drilling anchors or expansion anchors.
 - 6. Hollow Masonry, Plaster, and Gypsum Board Partitions: Use toggle bolts or hollow wall fasteners.
 - 7. Solid Masonry Walls: Use expansion anchors or preset inserts.
 - 8. Sheet Metal: Use sheet metal screws.
 - 9. Wood Elements: Use wood screws.

PART 3 EXECUTION

3.1 EXAMINATION

- A. Verify that conditions are satisfactory for installation prior to starting work.

3.2 INSTALLATION

- A. Perform work in accordance with NECA 1 (general workmanship).

B. Connections and Terminations

1. Use approved zinc-rich paint on field-cut portions of galvanized steel products prior to assembly.

END OF SECTION

SECTION 26 05 33.13

CONDUIT FOR ELECTRICAL SYSTEMS

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Galvanized steel rigid metal conduit (RMC).
- B. Flexible metal conduit (FMC).
- C. Liquidtight flexible metal conduit (LFMC).
- D. Electrical metallic tubing (EMT).
- E. Rigid polyvinyl chloride (PVC) conduit.
- F. Conduit fittings.
- G. Accessories.

1.2 REFERENCE STANDARDS

- A. ANSI C80.1 - American National Standard for Electrical Rigid Steel Conduit (ERSC).
- B. ANSI C80.3 - American National Standard for Electrical Metallic Tubing -- Steel (EMT-S).
- C. NECA 1 - Standard for Good Workmanship in Electrical Construction.
- D. NECA 101 - Standard for Installing Steel Conduits (Rigid, IMC, EMT).
- E. NEMA FB 1 - Fittings, Cast Metal Boxes, and Conduit Bodies for Conduit, Electrical Metallic Tubing, and Cable.
- F. NEMA TC 2 - Electrical Polyvinyl Chloride (PVC) Conduit.
- G. NEMA TC 3 - Polyvinyl Chloride (PVC) Fittings for Use with Rigid PVC Conduit and Tubing.
- H. NEMA TC 13 - Electrical Nonmetallic Tubing (ENT).
- I. NFPA 70 - National Electrical Code; Most Recent Edition Adopted by Authority Having Jurisdiction, Including All Applicable Amendments and Supplements.
- J. UL 1 - Flexible Metal Conduit; Current Edition, Including All Revisions.
- K. UL 6 - Electrical Rigid Metal Conduit-Steel; Current Edition, Including All Revisions.
- L. UL 360 - Liquid-Tight Flexible Steel Conduit; Current Edition, Including All Revisions.
- M. UL 514B - Conduit, Tubing, and Cable Fittings; Current Edition, Including All Revisions.
- N. UL 651 - Schedule 40, 80, Type EB and A Rigid PVC Conduit and Fittings; Current Edition, Including All Revisions.
- O. UL 797 - Electrical Metallic Tubing-Steel; Current Edition, Including All Revisions.

1.3 ADMINISTRATIVE REQUIREMENTS

- A. Coordination:
 - 1. Coordinate minimum sizes of conduits with the actual conductors to be installed, including adjustments for conductor sizes increased for voltage drop.
 - 2. Coordinate the arrangement of conduits with structural members, ductwork, piping, equipment and other potential conflicts installed under other sections or by others.
 - 3. Verify exact conduit termination locations required for boxes, enclosures, and equipment installed under other sections or by others.
 - 4. Coordinate the work with other trades to provide roof penetrations that preserve the integrity of the roofing system and do not void the roof warranty.
 - 5. Notify Architect of any conflicts with or deviations from Contract Documents. Obtain direction before proceeding with work.
- B. Sequencing:

1. Do not begin installation of conductors and cables until installation of conduit is complete between outlet, junction and splicing points.

1.4 SUBMITTALS

- A. See Section 01 33 00 – Submittal Procedures for submittal procedures.
- B. Product Data: Provide manufacturer's standard catalog pages and data sheets for conduits and fittings.
- C. Project Record Documents: Record actual routing for conduits installed underground and under slabs.

1.5 QUALITY ASSURANCE

- A. Comply with requirements of NFPA 70.
- B. Maintain at the project site a copy of each referenced document that prescribes execution requirements.
- C. Product Listing Organization Qualifications: An organization recognized by OSHA as a Nationally Recognized Testing Laboratory (NRTL) and acceptable to authorities having jurisdiction.

1.6 DELIVERY, STORAGE, AND HANDLING

- A. Receive, inspect, handle, and store conduit and fittings in accordance with manufacturer's instructions.

PART 2 PRODUCTS

2.1 CONDUIT APPLICATIONS

- A. Do not use conduit and associated fittings for applications other than as permitted by NFPA 70 and product listing.
- B. Unless otherwise indicated and where not otherwise restricted, use the conduit types indicated for the specified applications. Where more than one listed application applies, comply with the most restrictive requirements. Where conduit type for a particular application is not specified, use galvanized steel rigid metal conduit.
- C. Underground:
 1. Under Slab on Grade: Rigid PVC conduit.
 2. Exterior, Direct-Buried: Rigid PVC conduit.
 3. Exterior, Embedded Within Concrete: Rigid PVC conduit.
 4. Where rigid polyvinyl (PVC) conduit is provided, transition to galvanized steel rigid metal conduit where emerging from underground.
 5. Where rigid polyvinyl (PVC) conduit larger than 2 inch trade size is provided, use galvanized steel rigid metal conduit elbows for bends.
 6. Where steel conduit emerges from concrete into soil, use corrosion protection tape to provide supplementary corrosion protection for a minimum of 4 inches (100 mm) on either side of where conduit emerges or use PVC-schedule 80 conduit.
- D. Concealed Within Masonry Walls: Use galvanized steel rigid metal conduit or electrical metallic tubing (EMT).
- E. Concealed Within Hollow Stud Walls: Electrical metallic tubing (EMT).
- F. Concealed Above Accessible Ceilings: Electrical metallic tubing (EMT).
- G. Interior, Damp or Wet Locations: Use galvanized steel rigid metal conduit.
- H. Exposed, Interior, Not Subject to Physical Damage: Use galvanized steel rigid metal conduit or electrical metallic tubing (EMT).
- I. Exposed, Interior, Subject to Physical Damage: Use galvanized steel rigid metal conduit.
 1. Locations subject to physical damage include, but are not limited to:
 - a. Where exposed below 8 feet, except within electrical and communication rooms or closets.

- J. Exposed, Exterior: Use galvanized steel rigid metal conduit.
- K. Concealed, Exterior, Not Embedded in Concrete or in Contact With Earth: Use galvanized steel rigid metal conduit.
- L. Connections to Luminaires Above Accessible Ceilings: Use flexible metal conduit.
 - 1. Maximum Length: 6 feet.
- M. Connections to Vibrating Equipment:
 - 1. Dry Locations: Use flexible metal conduit.
 - 2. Damp, Wet, or Corrosive Locations: Use liquidtight flexible metal conduit.
 - 3. Maximum Length: 6 feet unless otherwise indicated.
 - 4. Vibrating equipment includes, but is not limited to:
 - a. Motors.
- N. Fished in Existing Walls, Where Necessary: Use flexible metal conduit.

2.2 CONDUIT REQUIREMENTS

- A. Electrical Service Conduits: Also comply with Section 26 04 02.
- B. Fittings for Grounding and Bonding: Also comply with Section 26 05 26.
- C. Provide all conduit, fittings, supports, and accessories required for a complete raceway system.
- D. Provide products listed, classified, and labeled as suitable for the purpose intended.
- E. Minimum Conduit Size, Unless Otherwise Indicated:
 - 1. Branch Circuits: 1/2 inch trade size.
 - 2. Branch Circuit Homeruns: 3/4 inch trade size.
 - 3. Control Circuits: 1/2 inch trade size.
 - 4. Flexible Connections to Luminaires: 3/8 inch trade size.
 - 5. Underground, Interior: 3/4 inch trade size.
 - 6. Underground, Exterior: 1 inch trade size.
- F. Where conduit size is not indicated, size to comply with NFPA 70 but not less than applicable minimum size requirements specified.

2.3 GALVANIZED STEEL RIGID METAL CONDUIT (RMC)

- A. Manufacturers:
 - 1. Allied Tube & Conduit, a division of Atkore International: www.alliedeg.com
 - 2. Nucor Tubular Products: www.nucortubular.com
 - 3. Western Tube, a division of Zekelman Industries: www.westerntube.com
 - 4. Wheatland Tube, a division of Zekelman Industries: www.wheatland.com
 - 5. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Description: NFPA 70, Type RMC galvanized steel rigid metal conduit complying with ANSI C80.1 and listed and labeled as complying with UL 6.
- C. Fittings:
 - 1. Manufacturers:
 - a. Bridgeport Fittings Inc: www.bptfittings.com/#sle.
 - b. O-Z/Gedney, a brand of Emerson Electric Co: www.emerson.com/#sle.
 - c. Thomas & Betts Corporation: www.tnb.com/#sle.
 - d. Substitutions: See Section 01 60 00 - Product Requirements.
 - 2. Non-Hazardous Locations: Use fittings complying with NEMA FB 1 and listed and labeled as complying with UL 514B.
 - 3. Material: Use steel or malleable iron.
 - a. Do not use die cast zinc fittings.
 - 4. Connectors and Couplings: Use threaded type fittings only. Threadless set screw and compression (gland) type fittings are not permitted.

2.4 FLEXIBLE METAL CONDUIT (FMC)

- A. Manufacturers:
 - 1. AFC Cable Systems, Inc; www.afcweb.com
 - 2. Electri-Flex Company; www.electriflex.com
 - 3. International Metal Hose; www.metalhose.com
 - 4. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Description: NFPA 70, Type FMC standard wall steel flexible metal conduit listed and labeled as complying with UL 1, and listed for use in classified firestop systems to be used.
- C. Fittings:
 - 1. Manufacturers:
 - a. Bridgeport Fittings Inc: www.bptfittings.com
 - b. O-Z/Gedney, a brand of Emerson Electric Co: www.emerson.com
 - c. Thomas & Betts Corporation: www.tnb.com
 - d. Substitutions: See Section 01 60 00 - Product Requirements.
 - 2. Description: Fittings complying with NEMA FB 1 and listed and labeled as complying with UL 514B.
 - 3. Material: Use steel or malleable iron.
 - a. Do not use die cast zinc fittings.

2.5 LIQUIDTIGHT FLEXIBLE METAL CONDUIT (LFMC)

- A. Manufacturers:
 - 1. AFC Cable Systems, Inc; www.afcweb.com
 - 2. Electri-Flex Company; www.electriflex.com
 - 3. International Metal Hose; www.metalhose.com
 - 4. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Description: NFPA 70, Type LFMC polyvinyl chloride (PVC) jacketed steel flexible metal conduit listed and labeled as complying with UL 360.
- C. Fittings:
 - 1. Manufacturers:
 - a. Bridgeport Fittings Inc: www.bptfittings.com
 - b. O-Z/Gedney, a brand of Emerson Electric Co: www.emerson.com
 - c. Thomas & Betts Corporation: www.tnb.com
 - d. Substitutions: See Section 01 60 00 - Product Requirements.
 - 2. Description: Fittings complying with NEMA FB 1 and listed and labeled as complying with UL 514B.
 - 3. Material: Use steel or malleable iron.
 - a. Do not use die cast zinc fittings.

2.6 ELECTRICAL METALLIC TUBING (EMT)

- A. Manufacturers:
 - 1. Allied Tube & Conduit, a division of Atkore International: www.alliedeg.com
 - 2. Nucor Tubular Products: www.nucortubular
 - 3. Western Tube, a division of Zekelman Industries: www.westerntube.com
 - 4. Wheatland Tube, a division of Zekelman Industries: www.wheatland.com
 - 5. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Description: NFPA 70, Type EMT steel electrical metallic tubing complying with ANSI C80.3 and listed and labeled as complying with UL 797.
- C. Fittings:
 - 1. Manufacturers:
 - a. Bridgeport Fittings Inc: www.bptfittings.com
 - b. O-Z/Gedney, a brand of Emerson Electric Co: www.emerson.com

- c. Thomas & Betts Corporation: www.tnb.com
- d. Substitutions: See Section 01 60 00 - Product Requirements.
- 2. Description: Fittings complying with NEMA FB 1 and listed and labeled as complying with UL 514B.
- 3. Material: Use steel or malleable iron.
 - a. Do not use die cast zinc fittings.
- 4. Connectors and Couplings: Use compression (gland) or set-screw type.
 - a. Do not use indenter type connectors and couplings.
- 5. Damp or Wet Locations (where permitted): Use fittings listed for use in wet locations.
- 6. Embedded Within Concrete (where permitted): Use fittings listed as concrete-tight.
Fittings that require taping to be concrete-tight are acceptable.

2.6 RIGID POLYVINYL CHLORIDE (PVC) CONDUIT

- A. Manufacturers:
 - 1. Cantex Inc: www.cantexinc.com
 - 2. Carlon, a brand of Thomas & Betts Corporation: www.carlon.com
 - 3. JM Eagle: www.jmeagle.com
 - 4. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Description: NFPA 70, Type PVC rigid polyvinyl chloride conduit complying with NEMA TC 2 and listed and labeled as complying with UL 651; Schedule 40 unless otherwise indicated, Schedule 80 where subject to physical damage; rated for use with conductors rated 90 degrees C.
- C. Fittings:
 - 1. Manufacturer: Same as manufacturer of conduit to be connected.
 - 2. Description: Fittings complying with NEMA TC 3 and listed and labeled as complying with UL 651; material to match conduit.

2.7 ACCESSORIES

- A. Corrosion Protection Tape: PVC-based, minimum thickness of 20 mil.
- B. Conduit Joint Compound: Corrosion-resistant, electrically conductive; suitable for use with the conduit to be installed.
- C. Solvent Cement for PVC Conduit and Fittings: As recommended by manufacturer of conduit and fittings to be installed.
- D. Pull Strings: Use nylon cord with average breaking strength of not less than 200 pound-force.
- E. Sealing Compound for Sealing Fittings: Listed for use with the particular fittings to be installed.
- F. Modular Seals for Conduit Penetrations: Rated for minimum of 40 psig; Suitable for the conduits to be installed.
- G. Flashing Panels for Exterior Wall Penetrations: Premanufactured components and accessories as required to preserve integrity of building envelope; suitable for conduits and facade materials to be installed.
 - 1. Manufacturers:
 - a. Quickflash Weatherproofing Products, Inc: www.quickflashproducts.com
- H. Firestop Sleeves: Listed; provide as required to preserve fire resistance rating of building elements.
 - 1. Products:
 - HoldRite, a brand of Reliance Worldwide Corporation; HydroFlame Pro Series/HydroFlame Custom Built: www.holdrite.com
 - a. Substitutions: See Section 01 60 00 - Product Requirements.
- I. Bore Spacers: Nonmetallic; designed for maintaining conduit/duct spacing for installation within casing; furnished with roller wheels to facilitate installation, openings to facilitate grout flow, and holes for stabilization cable; suitable for the casing and conduit/duct arrangement to be installed.

1. Products:
 - a. Advance Products & Systems, LLC; Bore Spacers: www.apsonline.com

PART 3 EXECUTION

3.1 EXAMINATION

- A. Verify that field measurements are as indicated.
- B. Verify that mounting surfaces are ready to receive conduits.
- C. Verify that conditions are satisfactory for installation prior to starting work.

3.2 INSTALLATION

- A. Install products in accordance with manufacturer's instructions.
- B. Perform work in accordance with NECA 1 (general workmanship).
- C. Install galvanized steel rigid metal conduit (RMC) in accordance with NECA 101.
- D. Install rigid polyvinyl chloride (PVC) conduit in accordance with NECA 111.
- E. Conduit Routing:
 1. Unless dimensioned, conduit routing indicated is diagrammatic.
 2. When conduit destination is indicated without specific routing, determine exact routing required.
 3. Conceal all conduits unless specifically indicated to be exposed.
 4. Conduits in the following areas may be exposed, unless otherwise indicated:
 - a. Electrical rooms.
 - b. Mechanical equipment rooms.
 - c. Within joists in areas with no ceiling.
 5. Unless otherwise approved, do not route conduits exposed:
 - a. Across floors.
 - b. Across roofs.
 - c. Across top of parapet walls.
 - d. Across building exterior surfaces.
 6. Conduits installed underground or under floors may be routed in the shortest possible manner unless otherwise indicated. Route all other conduits parallel or perpendicular to building structure and surfaces, following surface contours where practical.
 7. Arrange conduit to maintain adequate headroom, clearances, and access.
 8. Arrange conduit to provide no more than the equivalent of four 90 degree bends between pull points.
 9. Arrange conduit to provide no more than 150 feet between pull points.
 10. Route conduits above water and drain piping where possible.
 11. Arrange conduit to prevent moisture traps. Provide drain fittings at low points and at sealing fittings where moisture may collect.
 12. Maintain minimum clearance of 6 inches between conduits and piping for other systems
 13. Maintain minimum clearance of 12 inches between conduits and hot surfaces. This includes, but is not limited to:
 - a. Heaters.
 - b. Hot water piping.
 - c. Flues.
 14. Group parallel conduits in the same area together on a common rack.
- G. Conduit Support:
 1. Secure and support conduits in accordance with NFPA 70 and Section 23 05 48 using suitable supports and methods approved by the authority having jurisdiction.
 2. Provide required vibration isolation and/or seismic controls in accordance with Section 23 05 48.
 3. Provide independent support from building structure. Do not provide support from piping, ductwork, or other systems.

4. Installation Above Suspended Ceilings: Do not provide support from ceiling support system. Do not provide support from ceiling grid or allow conduits to lay on ceiling tiles.
 5. Use conduit strap to support single surface-mounted conduit.
 - a. Use clamp back spacer with conduit strap for damp and wet locations to provide space between conduit and mounting surface.
 6. Use metal channel (strut) with accessory conduit clamps to support multiple parallel surface-mounted conduits.
 7. Use conduit clamp to support single conduit from beam clamp or threaded rod.
 8. Use trapeze hangers assembled from threaded rods and metal channel (strut) with accessory conduit clamps to support multiple parallel suspended conduits.
 9. Use of spring steel conduit clips for support of conduits is not permitted.
 10. Use of wire for support of conduits is not permitted.
 - a. For securing conduits to studs in hollow stud walls.
 - b. For suspending conduits supported by spring steel conduit clips (only where specifically indicated or permitted).
 11. Where conduit support intervals specified in NFPA 70 and NECA standards differ, comply with the most stringent requirements.
- H. Connections and Terminations:
1. Use approved zinc-rich paint or conduit joint compound on field-cut threads of galvanized steel conduits prior to making connections.
 2. Where two threaded conduits must be joined and neither can be rotated, use three-piece couplings or split couplings. Do not use running threads.
 3. Use suitable adapters where required to transition from one type of conduit to another.
 4. Provide drip loops for liquidtight flexible conduit connections to prevent drainage of liquid into connectors.
 5. Terminate threaded conduits in boxes and enclosures using threaded hubs or double lock nuts for dry locations and raintight hubs for wet locations.
 6. Where spare conduits stub up through concrete floors and are not terminated in a box or enclosure, provide threaded couplings equipped with threaded plugs set flush with finished floor.
 7. Provide insulating bushings or insulated throats at all conduit terminations to protect conductors.
 8. Secure joints and connections to provide maximum mechanical strength and electrical continuity.
- I. Penetrations:
1. Do not penetrate or otherwise notch or cut structural members, including footings and grade beams, without approval of Structural Engineer.
 2. Make penetrations perpendicular to surfaces unless otherwise indicated.
 3. Provide sleeves for penetrations as indicated or as required to facilitate installation. Set sleeves flush with exposed surfaces unless otherwise indicated or required.
 4. Conceal bends for conduit risers emerging above ground.
 5. Seal interior of conduits entering the building from underground at first accessible point to prevent entry of moisture and gases.
 6. Provide suitable modular seal where conduits penetrate exterior wall below grade.
 7. Where conduits penetrate waterproof membrane, seal as required to maintain integrity of membrane.
 8. Provide metal escutcheon plates for conduit penetrations exposed to public view.
- J. Underground Installation:
1. Minimum Cover, Unless Otherwise Indicated or Required:
 - a. Underground, Exterior: 24 inches.
 - b. Under Slab on Grade: 12 inches to bottom of slab.
 2. Provide underground warning tape in accordance with Section 26 05 53 along entire conduit length for service entrance where not concrete-encased.

- K. Conduit Movement Provisions: Where conduits are subject to movement, provide expansion and expansion/deflection fittings to prevent damage to enclosed conductors or connected equipment. This includes, but is not limited to:
 - 1. Where conduits cross structural joints intended for expansion, contraction, or deflection.
 - 2. Where calculated in accordance with NFPA 70 for rigid polyvinyl chloride (PVC) conduit installed above ground to compensate for thermal expansion and contraction.
 - 3. Where conduits are subject to earth movement by settlement or frost.
 - L. Condensation Prevention: Where conduits cross barriers between areas of potential substantial temperature differential, provide sealing fitting or approved sealing compound at an accessible point near the penetration to prevent condensation. This includes, but is not limited to:
 - 1. Where conduits pass from outdoors into conditioned interior spaces.
 - 2. Where conduits pass from unconditioned interior spaces into conditioned interior spaces.
 - 3. Where conduits penetrate coolers or freezers.
 - M. Provide pull string in all empty conduits and in conduits where conductors and cables are to be installed by others. Leave minimum slack of 12 inches at each end.
 - N. Provide grounding and bonding in accordance with Section 26 05 26.
 - O. Identify conduits in accordance with Section 26 05 53.
- 3.3 FIELD QUALITY CONTROL
- A. See Section 01 40 00 - Quality Requirements, for additional requirements.
 - B. Repair cuts and abrasions in galvanized finishes using zinc-rich paint recommended by manufacturer. Replace components that exhibit signs of corrosion.
 - C. Where coating of PVC-coated galvanized steel rigid metal conduit (RMC) contains cuts or abrasions, repair in accordance with manufacturer's instructions.
 - D. Correct deficiencies and replace damaged or defective conduits.
- 3.4 CLEANING
- A. Clean interior of conduits to remove moisture and foreign matter.
- 3.5 PROTECTION
- A. Immediately after installation of conduit, use suitable manufactured plugs to provide protection from entry of moisture and foreign material and do not remove until ready for installation of conductors.

END OF SECTION

SECTION 26 05 33.16

BOXES FOR ELECTRICAL SYSTEMS

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Outlet and device boxes up to 100 cubic inches, including those used as junction and pull boxes.
- B. Cabinets and enclosures, including junction and pull boxes larger than 100 cubic inches.
- C. Boxes and enclosures for integrated power, data, and audio/video.
- D. Floor boxes.
- E. Accessories.

1.2 REFERENCE STANDARDS

- A. NECA 1 - Standard for Good Workmanship in Electrical Construction; 2015.
- B. NECA 130 - Standard for Installing and Maintaining Wiring Devices; 2010.
- C. NEMA FB 1 - Fittings, Cast Metal Boxes, and Conduit Bodies for Conduit, Electrical Metallic Tubing, and Cable; 2014.
- D. NEMA OS 1 - Sheet-Steel Outlet Boxes, Device Boxes, Covers, and Box Supports; 2013.
- E. NEMA OS 2 - Nonmetallic Outlet Boxes, Device Boxes, Covers and Box Supports; 2013 (R2020).
- F. NEMA 250 - Enclosures for Electrical Equipment (1000 Volts Maximum); 2020.
- G. NFPA 70 - National Electrical Code; Most Recent Edition Adopted by Authority Having Jurisdiction, Including All Applicable Amendments and Supplements.
- H. SCTE 77 - Specification for Underground Enclosure Integrity; 2017.
- I. UL 50 - Enclosures for Electrical Equipment, Non-Environmental Considerations; Current Edition, Including All Revisions.
- J. UL 50E - Enclosures for Electrical Equipment, Environmental Considerations; Current Edition, Including All Revisions.
- K. UL 508A - Industrial Control Panels; Current Edition, Including All Revisions.
- L. UL 514A - Metallic Outlet Boxes; Current Edition, Including All Revisions.
- M. UL 514C - Nonmetallic Outlet Boxes, Flush-Device Boxes, and Covers; Current Edition, Including All Revisions.

1.3 ADMINISTRATIVE REQUIREMENTS

- A. Coordination:
 - 1. Coordinate the work with other trades to avoid placement of ductwork, piping, equipment, or other potential obstructions within the dedicated equipment spaces and working clearances for electrical equipment required by NFPA 70.
 - 2. Coordinate arrangement of electrical equipment with the dimensions and clearance requirements of the actual equipment to be installed.
 - 3. Coordinate minimum sizes of boxes with the actual installed arrangement of conductors, clamps, support fittings, and devices, calculated according to NFPA 70.
 - 4. Coordinate minimum sizes of pull boxes with the actual installed arrangement of connected conduits, calculated according to NFPA 70.
 - 5. Coordinate the placement of boxes with millwork, furniture, devices, equipment, etc. installed under other sections or by others.
 - 6. Coordinate the work with other trades to preserve insulation integrity.
 - 7. Coordinate the work with other trades to provide walls suitable for installation of flush-mounted boxes where indicated.

8. Notify Architect of any conflicts with or deviations from Contract Documents. Obtain direction before proceeding with work.

1.4 SUBMITTALS

- A. See Section 01 33 00 – Submittal Procedures for submittal procedures.
- B. Product Data: Provide manufacturer's standard catalog pages and data sheets for cabinets and enclosures and floor boxes.
- C. Manufacturer's Installation Instructions: Indicate application conditions and limitations of use stipulated by product testing agency. Include instructions for storage, handling, protection, examination, preparation, and installation of product.
- D. Project Record Documents: Record actual locations for outlet and device boxes, pull boxes, cabinets and enclosures, floor boxes, and underground boxes/enclosures.
- E. Maintenance Materials: Furnish the following for Owner's use in maintenance of project.
 1. See Section 01 60 00 - Product Requirements, for additional provisions.

1.5 QUALITY ASSURANCE

- A. Comply with requirements of NFPA 70.
- B. Maintain at the project site a copy of each referenced document that prescribes execution requirements.
- C. Product Listing Organization Qualifications: An organization recognized by OSHA as a Nationally Recognized Testing Laboratory (NRTL) and acceptable to authorities having jurisdiction.

1.6 DELIVERY, STORAGE, AND HANDLING

- A. Receive, inspect, handle, and store products in accordance with manufacturer's instructions.

PART 2 PRODUCTS

2.1 BOXES

- A. General Requirements:
 1. Do not use boxes and associated accessories for applications other than as permitted by NFPA 70 and product listing.
 2. Provide all boxes, fittings, supports, and accessories required for a complete raceway system and to accommodate devices and equipment to be installed.
 3. Provide products listed, classified, and labeled as suitable for the purpose intended.
 4. Where box size is not indicated, size to comply with NFPA 70 but not less than applicable minimum size requirements specified.
 5. Provide grounding terminals within boxes where equipment grounding conductors terminate.
- B. Outlet and Device Boxes Up to 100 cubic inches, Including Those Used as Junction and Pull Boxes:
 1. Use sheet-steel boxes for dry locations unless otherwise indicated or required.
 2. Use cast iron boxes or cast aluminum boxes for damp or wet locations unless otherwise indicated or required; furnish with compatible weatherproof gasketed covers.
 3. Use cast iron boxes or cast aluminum boxes where exposed galvanized steel rigid metal conduit is used.
 4. Use nonmetallic boxes where exposed rigid PVC conduit is used.
 5. Use suitable concrete type boxes where flush-mounted in concrete.
 6. Use suitable masonry type boxes where flush-mounted in masonry walls.
 7. Use raised covers suitable for the type of wall construction and device configuration where required.
 8. Do not use "through-wall" boxes designed for access from both sides of wall.
 9. Sheet-Steel Boxes: Comply with NEMA OS 1, and list and label as complying with UL 514A.

10. Cast Metal Boxes: Comply with NEMA FB 1, and list and label as complying with UL 514A; furnish with threaded hubs.
 11. Nonmetallic Boxes: Comply with NEMA OS 2, and list and label as complying with UL 514C.
 12. Boxes for Supporting Luminaires and Ceiling Fans: Listed as suitable for the type and weight of load to be supported; furnished with fixture stud to accommodate mounting of luminaire where required.
 13. Boxes for Ganged Devices: Use multigang boxes of single-piece construction. Do not use field-connected gangable boxes unless specifically indicated or permitted.
 14. Minimum Box Size, Unless Otherwise Indicated:
 - a. Wiring Devices (Other Than Communications Systems Outlets): 4 inch square by 1-1/2 inch deep (100 by 38 mm) trade size.
 - b. Communications Systems Outlets: 4 inch square by 2-1/8 inch deep trade size.
 - c. Ceiling Outlets: 4 inch octagonal or square by 1-1/2 inch deep trade size.
 15. Wall Plates: Comply with Section 26 27 26.
 16. Manufacturers:
 - a. Cooper Crouse-Hinds, a division of Eaton Corporation; www.cooperindustries.com
 - b. Hubbell Incorporated; Bell Products; www.hubbell-rtb.com
 - c. Hubbell Incorporated; RACO Products; www.hubbell-rtb.com
 - d. O-Z/Gedney, a brand of Emerson Electric Co; www.emerson.com
 - e. Thomas & Betts Corporation; www.tnb.com
 - f. Substitutions: See Section 01 60 00 - Product Requirements.
- C. Cabinets and Enclosures, Including Junction and Pull Boxes Larger Than 100 cubic inches
1. Comply with NEMA 250, and list and label as complying with UL 50 and UL 50E, or UL 508A.
 2. NEMA 250 Environment Type, Unless Otherwise Indicated:
 - a. Indoor Clean, Dry Locations: Type 1, painted steel.
 - b. Outdoor Locations: Type 3R, painted steel.
 3. Junction and Pull Boxes Larger Than 100 cubic inches:
 - a. Provide screw-cover or hinged-cover enclosures unless otherwise indicated.
 - b. Boxes 6 square feet and Larger: Provide sectionalized screw-cover or hinged-cover enclosures.
 4. Finish for Painted Steel Enclosures: Manufacturer's standard grey unless otherwise indicated.
 5. Manufacturers:
 - a. Cooper B-Line, a division of Eaton Corporation; www.cooperindustries.com
 - b. Hoffman, a brand of Pentair Technical Products; www.hoffmanonline.com
 - c. Hubbell Incorporated; Wiegmann Products; www.hubbell-wiegmann.com
 - d. Substitutions: See Section 01 60 00 - Product Requirements.
- D. Boxes and Enclosures for Integrated Power, Data, and Audio/Video: Size and configuration as indicated or as required with partitions to separate services; field-connected gangable boxes may be used.
1. Manufacturers:
 - a. Hubbell Incorporated; www.hubbell.com
 - b. Substitutions: See Section 01 60 00 - Product Requirements.
- E. Floor Boxes:
1. Description: Floor boxes compatible with floor box service fittings provided in accordance with Section 26 27 26; with partitions to separate multiple services; furnished with all components, adapters, and trims required for complete installation.
 2. Use cast iron floor boxes within slab on grade.
 3. Metallic Floor Boxes: Fully adjustable (with integral means for leveling adjustment prior to and after concrete pour).
 4. Manufacturer: Same as manufacturer of floor box service fittings.

F. Inground Pull and Junction Boxes:

1. All inground junction and pull boxes shall be Quazite Composolite style "PG" or as approved service box with solid sides and an open bottom and a cover designed for a load of 8000 lbs and a logo which reads "ELECTRIC". The cover shall be secured with stainless steel hexhead bolts. All metal covers shall be bonded to the grounding conductor with a #8 CU THWN, stranded, conductor. This #8 conductor shall be long enough to allow the cover to be set to the side of the box without removing the #8 grounding conductor. NO Lexan or plastic type boxes will be allowed. Provide a concrete collar around the box. The sizes for junction and pull boxes shall be as indicated on the drawings. The boxes shall be installed per the manufacturer's instructions.

2.2 ACCESSORIES

- A. Flashing Panels for Exterior Wall Penetrations: Premanufactured components and accessories as required to preserve integrity of building envelope; suitable for boxes and facade materials to be installed.
 1. Manufacturers:
 - a. Quickflash Weatherproofing Products, Inc: www.quickflashproducts.com
 - b. Substitutions: See Section 01 60 00 - Product Requirements.

PART 3 EXECUTION

3.1 EXAMINATION

- A. Verify that field measurements are as indicated.
- B. Verify that mounting surfaces are ready to receive boxes.
- C. Verify that conditions are satisfactory for installation prior to starting work.

3.2 INSTALLATION

- A. Install products in accordance with manufacturer's instructions.
- B. Install boxes in accordance with NECA 1 (general workmanship) and, where applicable, NECA 130, including mounting heights specified in those standards where mounting heights are not indicated.
- C. Arrange equipment to provide minimum clearances in accordance with manufacturer's instructions and NFPA 70.
- D. Unless otherwise indicated, provide separate boxes for line voltage and low voltage systems.
- E. Flush-mount boxes in finished areas unless specifically indicated to be surface-mounted.
- F. Unless otherwise indicated, boxes may be surface-mounted where exposed conduits are indicated or permitted.
- G. Box Locations:
 1. Locate boxes to be accessible. Provide access panels in accordance with Section as required where approved by the Architect.
 2. Unless dimensioned, box locations indicated are approximate.
 3. Locate boxes as required for devices installed under other sections or by others.
 - a. Switches, Receptacles, and Other Wiring Devices: Comply with Section 26 27 26.
 4. Locate boxes so that wall plates do not span different building finishes.
 5. Locate boxes so that wall plates do not cross masonry joints.
 6. Unless otherwise indicated, where multiple outlet boxes are installed at the same location at different mounting heights, install along a common vertical center line.
 7. Do not install flush-mounted boxes on opposite sides of walls back-to-back. Provide minimum 6 inches horizontal separation unless otherwise indicated.
 8. Fire Resistance Rated Walls: Install flush-mounted boxes such that the required fire resistance will not be reduced.

- a. Do not install flush-mounted boxes on opposite sides of walls back-to-back; provide minimum 24 inches separation where wall is constructed with individual noncommunicating stud cavities or protect both boxes with listed putty pads.
 - b. Do not install flush-mounted boxes with area larger than 16 square inches or such that the total aggregate area of openings exceeds 100 square inches for any 100 square feet of wall area.
- 9. Locate junction and pull boxes as indicated, as required to facilitate installation of conductors, and to limit conduit length and/or number of bends between pulling points in accordance with Section 26 05 33.13.
- 10. Locate junction and pull boxes in the following areas, unless otherwise indicated or approved by the Architect:
 - a. Concealed above accessible suspended ceilings.
 - b. Within joists in areas with no ceiling.
 - c. Electrical rooms.
 - d. Mechanical equipment rooms.
- H. Box Supports:
 - 1. Secure and support boxes in accordance with NFPA 70 and Section 26 05 29 using suitable supports and methods approved by the authority having jurisdiction.
 - 2. Provide required seismic controls in accordance with Section 23 05 48.
 - 3. Provide independent support from building structure except for cast metal boxes (other than boxes used for fixture support) supported by threaded conduit connections in accordance with NFPA 70. Do not provide support from piping, ductwork, or other systems.
 - 4. Installation Above Suspended Ceilings: Do not provide support from ceiling grid or ceiling support system.
 - 5. Use far-side support to secure flush-mounted boxes supported from single stud in hollow stud walls. Repair or replace supports for boxes that permit excessive movement.
- I. Install boxes plumb and level.
- J. Flush-Mounted Boxes:
 - 1. Install boxes in noncombustible materials such as concrete, tile, gypsum, plaster, etc. so that front edge of box or associated raised cover is not set back from finished surface more than 1/4 inch or does not project beyond finished surface.
 - 2. Install boxes in combustible materials such as wood so that front edge of box or associated raised cover is flush with finished surface.
 - 3. Repair rough openings around boxes in noncombustible materials such as concrete, tile, gypsum, plaster, etc. so that there are no gaps or open spaces greater than 1/8 inch at the edge of the box.
- K. Install boxes as required to preserve insulation integrity.
- L. Metallic Floor Boxes: Install box level at the proper elevation to be flush with finished floor.
- M. Install permanent barrier between ganged wiring devices when voltage between adjacent devices exceeds 300 V.
- N. Install firestopping to preserve fire resistance rating of partitions and other elements.
- O. Close unused box openings.
- P. Install blank wall plates on junction boxes and on outlet boxes with no devices or equipment installed or designated for future use.
- Q. Provide grounding and bonding in accordance with Section 26 05 26.
- R. Identify boxes in accordance with Section 26 05 53.
- 3.3 CLEANING
 - A. Clean interior of boxes to remove dirt, debris, plaster and other foreign material.

3.4 PROTECTION

- A. Immediately after installation, protect boxes from entry of moisture and foreign material until ready for installation of conductors.

END OF SECTION

SECTION 26 05 53

IDENTIFICATION FOR ELECTRICAL SYSTEMS

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Electrical identification requirements.
- B. Identification nameplates and labels.
- C. Wire and cable markers.
- D. Voltage markers.
- E. Underground warning tape.
- F. Floor marking tape.
- G. Warning signs and labels.

1.2 REFERENCE STANDARDS

- A. ANSI Z535.2 - American National Standard for Environmental and Facility Safety Signs; 2011.
- B. ANSI Z535.4 - American National Standard for Product Safety Signs and Labels; 2011.
- C. NFPA 70 - National Electrical Code; Most Recent Edition Adopted by Authority Having Jurisdiction, Including All Applicable Amendments and Supplements.
- D. NFPA 70E - Standard for Electrical Safety in the Workplace; 2021.
- E. UL 969 - Marking and Labeling Systems; Current Edition, Including All Revisions.

1.3 ADMINISTRATIVE REQUIREMENTS

- A. Coordination:
 - 1. Verify final designations for equipment, systems, and components to be identified prior to fabrication of identification products.
- B. Sequencing:
 - 1. Do not conceal items to be identified, in locations such as above suspended ceilings, until identification products have been installed.
 - 2. Do not install identification products until final surface finishes and painting are complete.

1.4 SUBMITTALS

- A. See Section 01 33 00 – Submittal Procedures for submittal procedures.
- B. Product Data: Provide manufacturer's standard catalog pages and data sheets for each product.
- C. Manufacturer's Instructions: Indicate application conditions and limitations of use stipulated by product testing agency. Include instructions for storage, handling, protection, examination, preparation and installation of product.

1.5 QUALITY ASSURANCE

- A. Comply with requirements of NFPA 70.

1.6 FIELD CONDITIONS

- A. Do not install adhesive products when ambient temperature is lower than recommended by manufacturer.

PART 2 PRODUCTS

2.1 IDENTIFICATION REQUIREMENTS

- A. Identification for Equipment:
 - 1. Use identification nameplate to identify each piece of electrical distribution and control equipment and associated sections, compartments, and components.
 - a. Panelboards:

- 1) Identify ampere rating.
- 2) Identify voltage and phase.
- 3) Identify power source and circuit number. Include location when not within sight of equipment.
- 4) Identify main overcurrent protective device. Use identification label for panelboards with a door. For power distribution panelboards without a door, use identification nameplate.
- 5) Use typewritten circuit directory to identify load(s) served for panelboards with a door. Identify spares and spaces using pencil.
- 6) For power panelboards without a door, use identification nameplate to identify load(s) served for each branch device. Do not identify spares and spaces.
- b. Enclosed switches, circuit breakers, and motor controllers:
 - 1) Identify voltage and phase.
 - 2) Identify power source and circuit number. Include location when not within sight of equipment.
 - 3) Identify load(s) served. Include location when not within sight of equipment.
- c. Enclosed Contactors:
 - 1) Identify ampere rating.
 - 2) Identify voltage and phase.
 - 3) Identify configuration, e.g., E.O.E.H. (electrically operated, electrically held) or E.O.M.H. (electrically operated, mechanically held).
 - 4) Identify coil voltage.
 - 5) Identify load(s) and associated circuits controlled. Include location.
2. Service Equipment:
 - a. Use identification nameplate to identify each service disconnecting means.
3. Use voltage marker to identify highest voltage present for each piece of electrical equipment.
4. Use identification nameplate to identify equipment utilizing series ratings, where permitted, in accordance with NFPA 70.
5. Use identification nameplate to identify disconnect location for equipment with remote disconnecting means.
6. Use identification label or handwritten text using indelible marker on inside of door at each fused switch to identify required NEMA fuse class and size.
7. Use identification label to identify overcurrent protective devices for branch circuits serving fire alarm circuits. Identify with text "FIRE ALARM CIRCUIT".
8. Use field-painted floor markings, floor marking tape, or warning labels to identify required equipment working clearances where indicated or where required by the authority having jurisdiction.
 - a. Field-Painted Floor Markings: Alternating black and white stripes, 3 inches wide.
9. Available Fault Current Documentation: Use identification label to identify the available fault current and date calculations were performed at locations requiring documentation by NFPA 70, including but not limited to the following.
 - a. Service equipment.
10. Arc Flash Hazard Warning Labels: Comply with Section 26 05 73.
- C. Identification for Conductors and Cables:
 1. Color Coding for Power Conductors 600 V and Less: Comply with Section 26 05 19.
 2. Use identification nameplate or identification label to identify color code for ungrounded and grounded power conductors inside door or enclosure at each piece of feeder or branch-circuit distribution equipment when premises has feeders or branch circuits served by more than one nominal voltage system.
 3. Use wire and cable markers to identify circuit number or other designation indicated for power, control, and instrumentation conductors and cables at the following locations:
 - a. At each source and load connection.
 - b. Within boxes when more than one circuit is present.

- c. Within equipment enclosures when conductors and cables enter or leave the enclosure.
- 4. Use wire and cable markers to identify connected grounding electrode system components for grounding electrode conductors.
- 5. Use underground warning tape to identify direct buried cables.
- D. Identification for Raceways:
 - 1. Use voltage markers to identify highest voltage present for accessible feeder conduits at maximum intervals of 20 feet.
 - 2. Use voltage markers or color-coded bands to identify systems other than normal power system for accessible conduits at maximum intervals of 20 feet.
 - a. Color-Coded Bands: Use field-painting or vinyl color coding electrical tape to mark bands 3 inches wide.
 - 1) Color Code:
 - (a) Fire Alarm System: Red.
 - (b) Emergency System: Blue.
 - 2) Vinyl Color Coding Electrical Tape: Comply with Section 26 05 19.
 - 3. Use identification labels, handwritten text using indelible marker, or plastic marker tags to identify spare conduits at each end. Identify purpose and termination location.
 - 4. Use underground warning tape to identify underground raceways.
- E. Identification for Boxes:
 - 1. Use voltage markers to identify highest voltage present.
 - 2. Use voltage markers or color coded boxes to identify systems other than normal power system.
 - a. For exposed boxes in public areas, do not color code.
 - 3. Use identification labels or handwritten text using indelible marker to identify circuits enclosed.
 - a. For exposed boxes in public areas, use only identification labels.
- F. Identification for Devices:
 - 1. Wiring Device and Wallplate Finishes: Comply with Section 26 27 26.
 - 2. Factory Pre-Marked Wallplates: Comply with Section 26 27 26.
 - 3. Use identification label to identify fire alarm system devices.
 - a. For devices concealed above suspended ceilings, provide additional identification on ceiling tile below device location.
 - 4. Use identification label or engraved wallplate to identify serving branch circuit for all receptacles.
 - a. For receptacles in public areas or in areas as directed by Architect, provide identification on inside surface of wallplate.
 - 5. Use identification label or engraved wallplate to identify load controlled for wall-mounted control devices controlling loads that are not visible from the control location and for multiple wall-mounted control devices installed at one location.
 - 6. Use identification label to identify receptacles protected by upstream GFI protection, where permitted.

2.2 IDENTIFICATION NAMEPLATES AND LABELS

- A. Identification Nameplates:
 - 1. Manufacturers:
 - a. Brimar Industries, Inc: www.brimar.com
 - b. Kolbi Pipe Marker Co; www.kolbipipemarkers.com
 - c. Seton Identification Products; www.seton.com
 - d. Substitutions: See Section 01 60 00 - Product Requirements.
 - 2. Materials:
 - a. Indoor Clean, Dry Locations: Use plastic nameplates.
 - b. Outdoor Locations: Use aluminum nameplates suitable for exterior use.

3. Plastic Nameplates: Two-layer or three-layer laminated acrylic or electrically non-conductive phenolic with beveled edges; minimum thickness of 1/16 inch; engraved text.
 - a. Exception: Provide minimum thickness of 1/8 inch when any dimension is greater than 4 inches.
 4. Stainless Steel Nameplates: Minimum thickness of 1/32 inch; engraved or laser-etched text.
 5. Mounting Holes for Mechanical Fasteners: Two, centered on sides for sizes up to 1 inch high; Four, located at corners for larger sizes.
- B. Identification Labels:
1. Manufacturers:
 - a. Brady Corporation; www.bradyid.com
 - b. Brother International Corporation: www.brother-usa.com
 - c. Panduit Corp: www.panduit.com
 - d. Substitutions: See Section 01 60 00 - Product Requirements.
 2. Materials: Use self-adhesive laminated plastic labels; UV, chemical, water, heat, and abrasion resistant.
 - a. Use only for indoor locations.
 3. Text: Use factory pre-printed or machine-printed text. Do not use handwritten text unless otherwise indicated.
- C. Format for Equipment Identification:
1. Minimum Size: 1 inch by 2.5 inches.
 2. Legend:
 - a. System designation where applicable:
 - 1) Fire Alarm System: Identify with text "FIRE ALARM".
 - b. Equipment designation or other approved description.
 - c. Other information as indicated.
 3. Text: All capitalized unless otherwise indicated.
 4. Minimum Text Height:
 - a. System Designation: 1 inch
 - b. Equipment Designation: 1/2 inch
 - c. Other Information: 1/4 inch
 - d. Exception: Provide minimum text height of 1 inch for equipment located more than 10 feet above floor or working platform.
 5. Color:
 - a. Normal Power System: White text on black background.
 - b. Fire Alarm System: White text on red background.
- D. Format for General Information and Operating Instructions:
1. Minimum Size: 1 inch by 2.5 inches
 2. Legend: Include information or instructions indicated or as required for proper and safe operation and maintenance.
 3. Text: All capitalized unless otherwise indicated.
 4. Minimum Text Height: 1/4 inch
 5. Color: Black text on white background unless otherwise indicated.
 - a. Exceptions:
 - 1) Provide white text on red background for general information or operational instructions for fire alarm systems.
- E. Format for Receptacle Identification:
1. Minimum Size: 3/8 inch by 1.5 inches
 2. Legend: Power source and circuit number or other designation indicated.
 - a. Include voltage and phase for other than 120 V, single phase circuits.
 3. Text: All capitalized unless otherwise indicated.
 4. Minimum Text Height: 3/16 inch

5. Color: Black text on clear background.
- F. Format for Control Device Identification:
 1. Minimum Size: 3/8 inch by 1.5 inches
 2. Legend: Load controlled or other designation indicated.
 3. Text: All capitalized unless otherwise indicated.
 4. Minimum Text Height: 3/16 inch
 5. Color: Black text on clear background.
- G. Format for Fire Alarm Device Identification:
 1. Minimum Size: 3/8 inch by 1.5 inches
 2. Legend: Designation indicated and device zone or address.
 3. Text: All capitalized unless otherwise indicated.
 4. Minimum Text Height: 3/16 inch.
 5. Color: Red text on white background.

2.3 WIRE AND CABLE MARKERS

- A. Manufacturers:
 1. Brady Corporation; www.bradyid.com
 2. HellermannTyton; www.hellermannntyton.com
 3. Panduit Corp; www.panduit.com
 4. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Markers for Conductors and Cables: Use wrap-around self-adhesive vinyl cloth, wrap-around self-adhesive vinyl self-laminating, heat-shrink sleeve, plastic sleeve, plastic clip-on, or vinyl split sleeve type markers suitable for the conductor or cable to be identified.
- C. Markers for Conductor and Cable Bundles: Use plastic marker tags secured by nylon cable ties.
- D. Legend: Power source and circuit number or other designation indicated.
- E. Text: Use factory pre-printed or machine-printed text, all capitalized unless otherwise indicated.
 1. Do not use handwritten text.
- F. Minimum Text Height: 1/8 inch.
- G. Color: Black text on white background unless otherwise indicated.

2.4 VOLTAGE MARKERS

- A. Manufacturers:
 1. Brady Corporation; www.bradyid.com
 2. Brimar Industries, Inc; www.brimar.com
 3. Seton Identification Products; www.seton.com
 4. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Markers for Conduits: Use factory pre-printed self-adhesive vinyl, self-adhesive vinyl cloth, or vinyl snap-around type markers.
- C. Markers for Boxes and Equipment Enclosures: Use factory pre-printed self-adhesive vinyl or self-adhesive vinyl cloth type markers.
- D. Minimum Size:
 1. Markers for Equipment: 1 1/8 by 4 1/2 inches
 2. Markers for Conduits: As recommended by manufacturer for conduit size to be identified.
 3. Markers for Pull Boxes: 1 1/8 by 4 1/2 inches
 4. Markers for Junction Boxes: 1/2 by 2 1/4 inches
- E. Legend:
 1. Markers for Voltage Identification: Highest voltage present.
 2. Markers for System Identification:
 - a. Other Systems: Type of service.

- F. Color: Black text on orange background unless otherwise indicated.

2.5 UNDERGROUND WARNING TAPE

- A. Manufacturers:
 - 1. Brady Corporation; www.bradyid.com
 - 2. Brimar Industries, Inc: www.brimar.com
 - 3. Seton Identification Products; www.seton.com
 - 4. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Materials: Use non-detectable type polyethylene tape suitable for direct burial, unless otherwise indicated.
 - 1. Exception: Use foil-backed detectable type tape where required by serving utility or where directed by Owner.
- C. Non-detectable Type Tape: 6 inches wide, with minimum thickness of 4 mil
- D. Foil-backed Detectable Type Tape: 3 inches wide, with minimum thickness of 5 mil, unless otherwise required for proper detection.
- E. Legend: Type of service, continuously repeated over full length of tape.
- F. Color:
 - 1. Tape for Buried Power Lines: Black text on red background.
 - 2. Tape for Buried Communication, Alarm, and Signal Lines: Black text on orange background.

2.6 FLOOR MARKING TAPE

- A. Manufacturers:
 - 1. Brady Corporation; www.bradyid.com
 - 2. Brimar Industries, Inc: www.brimar.com
 - 3. Insite Solutions, LLC; www.stop-painting.com
 - 4. Seton Identification Products; www.seton.com
 - 5. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Floor Marking Tape for Equipment Working Clearance Identification: Self-adhesive vinyl or polyester tape with overlamine, 3 inches (76 mm) wide, with alternating black and white stripes.

2.7 WARNING SIGNS AND LABELS

- A. Manufacturers:
 - 1. Brimar Industries, Inc: www.brimar.com
 - 2. Clarion Safety Systems, LLC; www.clarionsafety.com
 - 3. Insite Solutions, LLC; www.stop-painting.com
 - 4. Seton Identification Products; www.seton.com
 - 5. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Comply with ANSI Z535.2 or ANSI Z535.4 as applicable.
- C. Warning Signs:
 - 1. Materials:
 - a. Indoor Dry, Clean Locations: Use factory pre-printed rigid plastic or self-adhesive vinyl signs.
 - b. Outdoor Locations: Use factory pre-printed rigid aluminum signs.
 - 2. Rigid Signs: Provide four mounting holes at corners for mechanical fasteners.
 - 3. Minimum Size: 7 by 10 inches unless otherwise indicated.
- D. Warning Labels:
 - 1. Materials: Use factory pre-printed or machine-printed self-adhesive polyester or self-adhesive vinyl labels; UV, chemical, water, heat, and abrasion resistant; produced using materials recognized to UL 969.
 - a. Do not use labels designed to be completed using handwritten text.

2. Machine-Printed Labels: Use thermal transfer process printing machines and accessories recommended by label manufacturer.
3. Minimum Size: 2 by 4 inches unless otherwise indicated.

PART 3 EXECUTION

3.1 PREPARATION

- A. Clean surfaces to receive adhesive products according to manufacturer's instructions.

3.2 INSTALLATION

- A. Install products in accordance with manufacturer's instructions.
- B. Install identification products to be plainly visible for examination, adjustment, servicing, and maintenance. Unless otherwise indicated, locate products as follows:
 1. Surface-Mounted Equipment: Enclosure front.
 2. Flush-Mounted Equipment: Inside of equipment door.
 3. Free-Standing Equipment: Enclosure front; also enclosure rear for equipment with rear access.
 4. Elevated Equipment: Legible from the floor or working platform.
 5. Branch Devices: Adjacent to device.
 6. Interior Components: Legible from the point of access.
 7. Conduits: Legible from the floor.
 8. Boxes: Outside face of cover.
 9. Conductors and Cables: Legible from the point of access.
 10. Devices: Outside face of cover.
- C. Install identification products centered, level, and parallel with lines of item being identified.
- D. Secure nameplates to exterior surfaces of enclosures using stainless steel screws and to interior surfaces using self-adhesive backing or epoxy cement.
 1. Do not use adhesives on exterior surfaces except where substrate cannot be penetrated.
- E. Install self-adhesive labels and markers to achieve maximum adhesion, with no bubbles or wrinkles and edges properly sealed.
- F. Install underground warning tape above buried lines with one tape per trench at 3 inches below finished grade.
- G. Secure rigid signs using stainless steel screws.
- H. Mark all handwritten text, where permitted, to be neat and legible.

3.3 FIELD QUALITY CONTROL

- A. See Section 01 40 00 - Quality Requirements, for additional requirements.
- B. Replace self-adhesive labels and markers that exhibit bubbles, wrinkles, curling or other signs of improper adhesion.

END OF SECTION

SECTION 26 05 73

POWER SYSTEM STUDIES

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Short-circuit study.
- B. Protective device coordination study.
- C. Arc flash and shock risk assessment.
 - 1. Includes arc flash hazard warning labels.
- D. Criteria for the selection and adjustment of equipment and associated protective devices not specified in this section, as determined by studies to be performed.

1.2 REFERENCE STANDARDS

- A. ANSI Z535.4 - American National Standard for Product Safety Signs and Labels; 2011.
- B. IEEE 141 - IEEE Recommended Practice for Electrical Power Distribution for Industrial Plants; 1993 (Reaffirmed 1999).
- C. IEEE 242 - IEEE Recommended Practice for Protection and Coordination of Industrial and Commercial Power Systems; 2001, with Errata (2003).
- D. IEEE 399 - IEEE Recommended Practice for Industrial and Commercial Power Systems Analysis; 1997.
- E. IEEE 551 - IEEE Recommended Practice for Calculating Short-Circuit Currents in Industrial and Commercial Power Systems; 2006.
- F. IEEE 1584 - IEEE Guide for Performing Arc-Flash Hazard Calculations; 2018, with Errata (2019).
- G. NEMA MG 1 - Motors and Generators; 2018.
- H. NETA ATS - Acceptance Testing Specifications for Electrical Power Equipment and Systems; 2017.
- I. NFPA 70 - National Electrical Code; Most Recent Edition Adopted by Authority Having Jurisdiction, Including All Applicable Amendments and Supplements.
- J. NFPA 70E - Standard for Electrical Safety in the Workplace; 2021.

1.3 ADMINISTRATIVE REQUIREMENTS

- A. Coordination:
 - 1. Utility Installations: Coordinate with the utility to obtain data necessary for completion of studies.
 - 2. Coordinate the work to provide equipment and associated protective devices complying with criteria for selection and adjustment, as determined by studies to be performed.
 - 3. Notify Architect of any conflicts with or deviations from Contract Documents. Obtain direction before proceeding with work.
- B. Sequencing:
 - 1. Submit study reports prior to or concurrent with product submittals.
 - 2. Do not order equipment until matching study reports and product submittals have both been evaluated by the Engineer.
 - 3. Verify naming convention for equipment identification prior to creation of final drawings, reports, and arc flash hazard warning labels (where applicable).

1.4 SUBMITTALS

- A. See Section 01 33 00 – Submittal Procedures for submittal procedures.
- B. Study preparer's qualifications.

- C. Study reports, stamped or sealed and signed by study preparer.
- D. Product Data: In addition to submittal requirements specified in other sections, include manufacturer's standard catalog pages and data sheets for equipment and protective devices indicating information relevant to studies.
 - 1. Include characteristic time-current trip curves for protective devices.
 - 2. Include impedance data for conductors.
 - 3. Clearly indicate whether proposed short circuit current ratings are fully rated.
- E. Arc Flash Hazard Warning Label Samples: One of each type and legend specified.
- F. Site-specific arc flash hazard warning labels.
- G. Certification that field adjustable protective devices have been set in accordance with requirements of studies.
- H. Project Record Documents: Revise studies as required to reflect as-built conditions.
 - 1. Include hard copies with operation and maintenance data submittals.
 - 2. Include computer software files used to prepare studies with file name(s) cross-referenced to specific pieces of equipment and systems.

1.5 POWER SYSTEM STUDIES

- A. Scope of Studies:
 - 1. Perform analysis of new electrical distribution system as indicated on drawings.
 - 2. Except where study descriptions below indicate exclusions, analyze system at each bus from primary protective devices of utility source down to each piece of equipment involved, including parts of system affecting calculations being performed (e.g. fault current contribution from motors).
 - 3. Include in analysis alternate sources and operating modes (including known future configurations) to determine worst case conditions.
 - a. Known Operating Modes:
 - 1) Utility as source.
 - 2) Maintenance settings.
- B. General Study Requirements:
 - 1. Comply with NFPA 70 and 70 E.
 - 2. Perform studies utilizing computer software complying with specified requirements; manual calculations are not permitted.
- C. Data Collection:
 - 1. Compile information on project-specific characteristics of actual installed equipment, protective devices, feeders, etc. as necessary to develop single-line diagram of electrical distribution system and associated input data for use in system modeling.
 - a. Utility Source Data: Include primary voltage, maximum and minimum three-phase and line-to-ground fault currents, impedance, X/R ratio, and primary protective device information.
 - 1) Obtain up-to-date information from Utility Company.
 - 2) Utility Company: See Section 26 04 02 for Utility Company contact information.
 - b. Motors: Include manufacturer/model, type (e.g. induction, synchronous), horsepower rating, voltage rating, full load amps, and locked rotor current or NEMA MG 1 code letter designation.
 - c. Protective Devices:
 - 1) Circuit Breakers: Include manufacturer/model, type (e.g. thermal magnetic, electronic trip), frame size, trip rating, voltage rating, interrupting rating, available field-adjustable trip response settings, and features (e.g. zone selective interlocking).
 - d. Conductors: Include feeder size, material (e.g. copper, aluminum), insulation type, voltage rating, number per phase, raceway type, and actual length.
- D. Short-Circuit Study:

1. Comply with IEEE 551 and applicable portions of IEEE 141, IEEE 242, and IEEE 399.
 2. For purposes of determining equipment short circuit current ratings, consider conditions that may result in maximum available fault current, including but not limited to:
 - a. Maximum utility fault currents.
 - b. Maximum motor contribution.
 - c. Known operating modes (e.g. utility as source).
 3. For each bus location, calculate the maximum available three-phase bolted symmetrical and asymmetrical fault currents. For grounded systems, also calculate the maximum available line-to-ground bolted fault currents.
- E. Protective Device Coordination Study:
1. Comply with applicable portions of IEEE 242 and IEEE 399.
 2. Analyze alternate scenarios considering known operating modes (e.g. utility as source).
 3. Analyze protective devices and associated settings for suitable margins between time-current curves to achieve coordination while providing adequate protection for equipment and conductors.
- F. Arc Flash and Shock Risk Assessment:
1. Comply with NFPA 70E.
 2. Perform incident energy and arc flash boundary calculations in accordance with IEEE 1584 (as referenced in NFPA 70E Annex D), where applicable.
 - a. Where reasonable, study preparer may assume a maximum clearing time of two seconds in accordance with IEEE 1584, provided that the conditions are such that a worker's egress from an arc flash event would not be inhibited.
 - b. For single-phase systems, study preparer to perform calculations assuming three-phase system in accordance with IEEE 1584 using single phase bolted fault current, yielding conservative results.
 3. For equipment with main devices mounted in separate compartmentalized sections, perform calculations on both the line and load side of the main device.
 4. Analyze alternate scenarios considering conditions that may result in maximum incident energy, including but not limited to:
 - a. Maximum and minimum utility fault currents.
 - b. Maximum and minimum motor contribution.
 - c. Known operating modes (e.g. utility as source).
- G. Study Reports:
1. General Requirements:
 - a. Identify date of study and study preparer.
 - b. Identify study methodology and software product(s) used.
 - c. Identify scope of studies, assumptions made, implications of possible alternate scenarios, and any exclusions from studies.
 - d. Identify base used for per unit values.
 - e. Include single-line diagram and associated input data used for studies; identify buses on single-line diagram as referenced in reports, and indicate bus voltage.
 - f. Include conclusions and recommendations.
 2. Short-Circuit Study:
 - a. For each scenario, identify at each bus location:
 - 1) Calculated maximum available symmetrical and asymmetrical fault currents (both three-phase and line-to-ground where applicable).
 - 2) Fault point X/R ratio.
 - 3) Associated equipment short circuit current ratings.
 - b. Identify locations where the available fault current exceeds the equipment short circuit current rating, along with recommendations.
 3. Protective Device Coordination Study:
 - a. For each scenario, include time-current coordination curves plotted on log-log scale graphs.

- b. For each graph include (where applicable):
 - 1) Partial single-line diagram identifying the portion of the system illustrated.
 - 2) Protective Devices: Time-current curves with applicable tolerance bands for each protective device in series back to the source, plotted up to the maximum available fault current at the associated bus.
 - 3) Conductors: Damage curves.
- c. For each protective device, identify fixed and adjustable characteristics with available ranges and recommended settings.
 - 1) Circuit Breakers: Include long time pickup and delay, short time pickup and delay, and instantaneous pickup.
- d. Identify cases where either full selective coordination or adequate protection is not achieved, along with recommendations.
- 4. Arc Flash and Shock Risk Assessment:
 - a. For the worst case for each scenario, identify at each bus location:
 - 1) Calculated incident energy and associated working distance.
 - 2) Calculated arc flash boundary.
 - 3) Bolted fault current.
 - 4) Arcing fault current.
 - 5) Clearing time.
 - 6) Arc gap distance.
 - b. For purposes of producing arc flash hazard warning labels, summarize the maximum incident energy and associated data reflecting the worst case condition of all scenarios at each bus location.
 - c. Include recommendations for reducing the incident energy at locations where the calculated maximum incident energy exceeds 8 calories per sq cm.

1.6 QUALITY ASSURANCE

- A. Study Preparer Qualifications: Professional electrical engineer licensed in the State in which the Project is located and with minimum five years experience in the preparation of studies of similar type and complexity using specified computer software.
 - 1. Study preparer shall be employed by the manufacturer of the electrical distribution equipment.
- B. Computer Software for Study Preparation: Use the latest edition of commercially available software utilizing specified methodologies.
 - 1. Products:
 - a. EasyPower LLC: www.easypower.com
 - b. ETAP/Operation Technology, Inc: www.etap.com
 - c. Power Analytics Corporation: www.poweranalytics.com
 - d. SKM Systems Analysis, Inc: www.skm.com

PART 2 PRODUCTS

2.1 ARC FLASH HAZARD WARNING LABELS

- A. Provide warning labels complying with ANSI Z535.4 to identify arc flash hazards for each work location analyzed by the arc flash and shock risk assessment.
 - 1. Materials: Comply with Section 26 05 53.
 - 2. Minimum Size: 4 by 6 inches
 - 3. Legend: Provide custom legend in accordance with NFPA 70E based on equipment-specific data as determined by arc flash and shock risk assessment.
 - a. Include orange header that reads "WARNING" unless otherwise indicated.
 - b. Include the text "Arc Flash and Shock Hazard; Appropriate PPE Required" or approved equivalent.
 - c. Include the following information:
 - 1) Arc flash boundary.
 - 2) Available incident energy and corresponding working distance.

- 3) Site-specific PPE (personnel protective equipment) requirements.
- 4) Nominal system voltage.
- 5) Limited approach boundary.
- 6) Restricted approach boundary.
- 7) Equipment identification.
- 8) Date calculations were performed.

PART 3 EXECUTION

3.1 INSTALLATION

- A. Install arc flash warning labels in accordance with Section 26 05 53.

3.2 FIELD QUALITY CONTROL

- A. See Section 01 40 00 - Quality Requirements, for additional requirements.
- B. Adjust equipment and protective devices for compliance with studies and recommended settings.
- C. Notify Architect of any conflicts with or deviations from studies. Obtain direction before proceeding.
- D. Submit detailed reports indicating inspection and testing results, and final adjusted settings.

3.3 CLOSEOUT ACTIVITIES

- A. See Section 01 77 00 - Closeout Procedures, for closeout submittals.
- B. See Section 01 79 00 - Demonstration and Training, for additional requirements.
- C. Training: Include as part of the base bid training for Owner's personnel on electrical safety pertaining to arc flash and shock hazards.
 1. Use site-specific arc flash and shock risk assessment report as training reference, supplemented with additional training materials as required.
 2. Location: At project site.

END OF SECTION

SECTION 26 24 16

PANELBOARDS

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Power distribution panelboards.
- B. Lighting and appliance panelboards.
- C. Overcurrent protective devices for panelboards.

1.2 REFERENCE STANDARDS

- A. FS W-C-375 - Circuit Breakers, Molded Case; Branch Circuit and Service.
- B. NECA 1 - Standard for Good Workmanship in Electrical Construction.
- C. NECA 407 - Standard for Installing and Maintaining Panelboards.
- D. NEMA 250 - Enclosures for Electrical Equipment (1000 Volts Maximum).
- E. NEMA ICS 2 - Industrial Control and Systems Controllers, Contactors and Overload Relays Rated 600 Volts.
- F. NEMA KS 1 - Heavy Duty Enclosed and Dead-Front Switches (600 Volts Maximum).
- G. NEMA PB 1 - Panelboards.
- H. NEMA PB 1.1 - General Instructions for Proper Installation, Operation and Maintenance of Panelboards Rated 600 Volts or Less.
- I. NETA ATS - Acceptance Testing Specifications for Electrical Power Equipment and Systems.
- J. NFPA 70 - National Electrical Code; Most Recent Edition Adopted by Authority Having Jurisdiction, Including All Applicable Amendments and Supplements.
- K. UL 50 - Enclosures for Electrical Equipment, Non-Environmental Considerations; Current Edition, Including All Revisions.
- L. UL 50E - Enclosures for Electrical Equipment, Environmental Considerations; Current Edition, Including All Revisions.
- M. UL 67 - Panelboards; Current Edition, Including All Revisions.
- N. UL 98 - Enclosed and Dead-Front Switches; Current Edition, Including All Revisions.
- O. UL 489 - Molded-Case Circuit Breakers, Molded-Case Switches and Circuit Breaker Enclosures; Current Edition, Including All Revisions.
- P. UL 869A - Reference Standard for Service Equipment; Current Edition, Including All Revisions.
- Q. UL 943 - Ground-Fault Circuit-Interrupters; Current Edition, Including All Revisions.
- R. UL 1053 - Ground-Fault Sensing and Relaying Equipment; Current Edition, Including All Revisions.
- S. UL 1699 - Arc-Fault Circuit-Interrupters; Current Edition, Including All Revisions.

1.3 ADMINISTRATIVE REQUIREMENTS

- A. Coordination:
 - 1. Coordinate the work with other trades to avoid placement of ductwork, piping, equipment, or other potential obstructions within the dedicated equipment spaces and working clearances for electrical equipment required by NFPA 70.
 - 2. Coordinate arrangement of electrical equipment with the dimensions and clearance requirements of the actual equipment to be installed.
 - 3. Coordinate the work with other trades to provide walls suitable for installation of flush-mounted panelboards where indicated.
 - 4. Verify with manufacturer that conductor terminations are suitable for use with the conductors to be installed.

5. Notify Engineer of any conflicts with or deviations from Contract Documents. Obtain direction before proceeding with work.

1.4 SUBMITTALS

- A. See Section 01 33 00 – Submittal Procedures for submittal procedures.
- B. Product Data: Provide manufacturer's standard catalog pages and data sheets for panelboards, enclosures, overcurrent protective devices, and other installed components and accessories.
 1. Include characteristic trip curves for each type and rating of overcurrent protective device upon request.
- C. Shop Drawings: Indicate outline and support point dimensions, voltage, main bus ampacity, overcurrent protective device arrangement and sizes, short circuit current ratings, conduit entry locations, conductor terminal information, and installed features and accessories.
 1. Include dimensioned plan and elevation views of panelboards and adjacent equipment with all required clearances indicated.
 2. Include wiring diagrams showing all factory and field connections.
 3. Clearly indicate short circuit current ratings are fully rated.
 4. Identify mounting conditions required for equipment seismic qualification.
- D. Manufacturer's equipment seismic qualification certification.
- E. Source Quality Control Test Reports: Include reports for tests designated in NEMA PB 1 as routine tests.
- F. Field Quality Control Test Reports.
- G. Manufacturer's Installation Instructions: Indicate application conditions and limitations of use stipulated by product testing agency. Include instructions for storage, handling, protection, examination, preparation, and installation of product.
- H. Project Record Documents: Record actual installed locations of panelboards and actual installed circuiting arrangements.
- I. Maintenance Data: Include information on replacement parts and recommended maintenance procedures and intervals.
- J. Maintenance Materials: Furnish the following for Owner's use in maintenance of project.
 1. See Section 01 60 00 - Product Requirements, for additional provisions.
 2. Panelboard Keys: Two of each different key.

1.5 QUALITY ASSURANCE

- A. Comply with requirements of NFPA 70.
- B. Maintain at the project site a copy of each referenced document that prescribes execution requirements.
- C. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum three years documented experience.
- D. Product Listing Organization Qualifications: An organization recognized by OSHA as a Nationally Recognized Testing Laboratory (NRTL) and acceptable to authorities having jurisdiction.

1.6 DELIVERY, STORAGE, AND HANDLING

- A. Receive, inspect, handle, and store panelboards in accordance with manufacturer's instructions and NECA 407.
- B. Store in a clean, dry space. Maintain factory wrapping or provide an additional heavy canvas or heavy plastic cover to protect units from dirt, water, construction debris, and traffic.
- C. Handle carefully in accordance with manufacturer's written instructions to avoid damage to panelboard internal components, enclosure, and finish.

1.7 FIELD CONDITIONS

- A. Maintain ambient temperature within the following limits during and after installation of panelboards:
 - 1. Panelboards Containing Circuit Breakers: Between 23 degrees F and 104 degrees F

PART 2 PRODUCTS

2.1 MANUFACTURERS

- A. ABB/GE; www.electrification.us.abb.com
- B. Eaton Corporation; www.eaton.com
- C. Schneider Electric; Square D Products; www.schneider-electric.us
- D. Siemens Industry, Inc; www.usa.siemens.com
- E. Substitutions: See Section 01 60 00 - Product Requirements.
- F. Source Limitations: Furnish panelboards and associated components produced by the same manufacturer as the other electrical distribution equipment used for this project and obtained from a single supplier.

2.2 PANELBOARDS - GENERAL REQUIREMENTS

- A. Provide products listed, classified, and labeled as suitable for the purpose intended.
- B. Unless otherwise indicated, provide products suitable for continuous operation under the following service conditions:
 - 1. Altitude: Less than 6,600 feet
 - 2. Ambient Temperature:
 - a. Panelboards Containing Circuit Breakers: Between 23 degrees F and 104 degrees F.
- C. Short Circuit Current Rating:
 - 1. Provide panelboards with listed short circuit current rating not less than the available fault current at the installed location as indicated on the drawings.
- D. Panelboards Used for Service Entrance: Listed and labeled as suitable for use as service equipment according to UL 869A.
- E. Mains: Configure for top or bottom incoming feed as indicated or as required for the installation.
- F. Branch Overcurrent Protective Devices: Replaceable without disturbing adjacent devices.
- G. Bussing: Sized in accordance with UL 67 temperature rise requirements.
 - 1. Provide fully rated neutral bus unless otherwise indicated, with a suitable lug for each feeder or branch circuit requiring a neutral connection.
 - 2. Provide 200 percent rated neutral bus and lugs where indicated, where oversized neutral conductors are provided, or where panelboards are fed from K-rated transformers.
 - 3. Provide solidly bonded equipment ground bus in each panelboard, with a suitable lug for each feeder and branch circuit equipment grounding conductor.
 - 4. Provide separate isolated/insulated ground bus where indicated or where isolated grounding conductors are provided.
- H. Conductor Terminations: Suitable for use with the conductors to be installed.
- I. Enclosures: Comply with NEMA 250, and list and label as complying with UL 50 and UL 50E.
 - 1. Environment Type per NEMA 250: Unless otherwise indicated, as specified for the following installation locations:
 - a. Indoor Clean, Dry Locations: Type 1.
 - b. Outdoor Locations: Type 3R.
 - 2. Boxes: Galvanized steel unless otherwise indicated.
 - a. Provide wiring gutters sized to accommodate the conductors to be installed.
 - b. Increase gutter space as required where sub-feed lugs, feed-through lugs, gutter taps, or oversized lugs are provided.

- c. Provide removable end walls for NEMA Type 1 enclosures.
 - d. Provide painted steel boxes for surface-mounted panelboards where indicated, finish to match fronts.
 - 3. Fronts:
 - a. Fronts for Surface-Mounted Enclosures: Same dimensions as boxes.
 - b. Fronts for Flush-Mounted Enclosures: Overlap boxes on all sides to conceal rough opening.
 - c. Finish for Painted Steel Fronts: Manufacturer's standard grey unless otherwise indicated.
 - 4. Lockable Doors: All locks keyed alike unless otherwise indicated.
 - J. Future Provisions: Prepare all unused spaces for future installation of devices including bussing, connectors, mounting hardware and all other required provisions.
 - K. Multi-Section Panelboards: Provide enclosures of the same height, with feed-through lugs or sub-feed lugs and feeders as indicated or as required to interconnect sections.
 - L. Load centers are not acceptable.
 - M. Provide the following features and accessories where indicated or where required to complete installation:
 - 1. Feed-through lugs.
 - 2. Sub-feed lugs.
- 2.3 POWER DISTRIBUTION PANELBOARDS
- A. Description: Panelboards complying with NEMA PB 1, power and feeder distribution type, circuit breaker type, and listed and labeled as complying with UL 67; ratings, configurations and features as indicated on the drawings.
 - B. Conductor Terminations:
 - 1. Main and Neutral Lug Material: Aluminum, suitable for terminating aluminum or copper conductors.
 - 2. Main and Neutral Lug Type: Mechanical.
 - C. Bussing:
 - 1. Phase and Neutral Bus Material: Aluminum.
 - 2. Ground Bus Material: Aluminum.
 - D. Circuit Breakers:
 - 1. Provide bolt-on type or plug-in type secured with locking mechanical restraints.
 - 2. Provide thermal magnetic circuit breakers unless otherwise indicated.
 - 3. Provide electronic trip circuit breakers where indicated.
 - E. Enclosures:
 - 1. Provide surface-mounted enclosures unless otherwise indicated.
 - 2. Fronts: Provide trims to cover access to load terminals, wiring gutters, and other live parts, with exposed access to overcurrent protective device handles.
- 2.4 LIGHTING AND APPLIANCE PANELBOARDS
- A. Description: Panelboards complying with NEMA PB 1, lighting and appliance branch circuit type, circuit breaker type, and listed and labeled as complying with UL 67; ratings, configurations and features as indicated on the drawings.
 - B. Conductor Terminations:
 - 1. Main and Neutral Lug Material: Aluminum, suitable for terminating aluminum or copper conductors.
 - 2. Main and Neutral Lug Type: Mechanical.
 - C. Bussing:
 - 1. Phase Bus Connections: Arranged for sequential phasing of overcurrent protective devices.
 - 2. Phase and Neutral Bus Material: Aluminum.

3. Ground Bus Material: Aluminum.
- D. Circuit Breakers: Thermal magnetic bolt-on type unless otherwise indicated.
- E. Enclosures:
 1. Provide surface-mounted or flush-mounted enclosures as indicated.
 2. Fronts: Provide lockable hinged door with concealed hinges for access to overcurrent protective device handles without exposing live parts.
 3. Provide clear plastic circuit directory holder mounted on inside of door.

2.5 OVERCURRENT PROTECTIVE DEVICES

- A. Molded Case Circuit Breakers:
 1. Description: Quick-make, quick-break, over center toggle, trip-free, trip-indicating circuit breakers listed and labeled as complying with UL 489, and complying with FS W-C-375 where applicable; ratings, configurations, and features as indicated on the drawings.
 2. Interrupting Capacity:
 - a. Provide circuit breakers with interrupting capacity as required to provide the short circuit current rating indicated, but not less than:
 - 1) 10,000 rms symmetrical amperes at 240 VAC or 208 VAC.
 - b. Fully Rated Systems: Provide circuit breakers with interrupting capacity not less than the short circuit current rating indicated.
 3. Conductor Terminations:
 - a. Provide mechanical lugs unless otherwise indicated.
 - b. Provide compression lugs where indicated.
 - c. Lug Material: Aluminum, suitable for terminating aluminum or copper conductors.
 4. Thermal Magnetic Circuit Breakers: For each pole, furnish thermal inverse time tripping element for overload protection and magnetic instantaneous tripping element for short circuit protection.
 - a. Provide field-adjustable magnetic instantaneous trip setting for circuit breaker frame sizes 225 amperes and larger.
 - b. Provide interchangeable trip units where indicated.
 5. Multi-Pole Circuit Breakers: Furnish with common trip for all poles.
 6. Provide the following circuit breaker types where indicated:
 - a. Ground Fault Circuit Interrupter (GFCI) Circuit Breakers: Listed as complying with UL 943, class A for protection of personnel.
 - b. Ground Fault Equipment Protection Circuit Breakers: Designed to trip at 30 mA for protection of equipment.
 - c. Arc-Fault Circuit Interrupter (AFCI) Circuit Breakers: Combination type listed as complying with UL 1699.
 - d. 100 Percent Rated Circuit Breakers: Listed for application within the panelboard where installed at 100 percent of the continuous current rating.
 - e. Current Limiting Circuit Breakers: Without using fusible elements, designed to limit the let-through energy to a value less than the energy of a one-half cycle wave of the symmetrical prospective current when operating within its current limiting range.
 7. Provide listed switching duty rated circuit breakers with SWD marking for all branch circuits serving lighting.
 8. Do not use tandem circuit breakers.
 9. Do not use handle ties in lieu of multi-pole circuit breakers.
 10. Provide multi-pole circuit breakers for multi-wire branch circuits as required by NFPA 70.
 11. Provide the following features and accessories where indicated or where required to complete installation:
 - a. Shunt Trip: Provide coil voltage as required for connection to indicated trip actuator.
 - b. Handle Pad-Lock Provision: For locking circuit breaker handle in OFF position.
 - c. Auxiliary Switch: SPDT switch suitable for connection to system indicated for indicating when circuit breaker has tripped or been turned off.

- d. Undervoltage Release: For tripping circuit breaker upon predetermined drop in coil voltage with field-adjustable time delay to prevent nuisance tripping.
- e. Alarm Switch: SPDT switch suitable for connection to system indicated for indicating when circuit breaker has tripped.

2.6 SOURCE QUALITY CONTROL

- A. See Section 01 40 00 - Quality Requirements, for additional requirements.
- B. Factory test panelboards according to NEMA PB 1.

PART 3 EXECUTION

3.1 EXAMINATION

- A. Verify that field measurements are as indicated.
- B. Verify that the ratings and configurations of the panelboards and associated components are consistent with the indicated requirements.
- C. Verify that mounting surfaces are ready to receive panelboards.
- D. Verify that conditions are satisfactory for installation prior to starting work.

3.2 INSTALLATION

- A. Perform work in accordance with NECA 1 (general workmanship).
- B. Install products in accordance with manufacturer's instructions.
- C. Install panelboards in accordance with NECA 407 and NEMA PB 1.1.
- D. Arrange equipment to provide minimum clearances in accordance with manufacturer's instructions and NFPA 70.
- E. Provide required support and attachment in accordance with Section 26 05 29.
- F. Install panelboards plumb.
- G. Install flush-mounted panelboards so that trims fit completely flush to wall with no gaps and rough opening completely covered.
- H. Mount panelboards such that the highest position of any operating handle for circuit breakers or switches does not exceed 79 inches above the floor or working platform.
- I. Provide minimum of six spare 1 inch trade size conduits out of each flush-mounted panelboard stubbed into accessible space above ceiling and below floor.
- J. Provide grounding and bonding in accordance with Section 26 05 26.
 - 1. Terminate branch circuit equipment grounding conductors on solidly bonded equipment ground bus only. Do not terminate on isolated/insulated ground bus.
 - 2. Terminate branch circuit isolated grounding conductors on isolated/insulated ground bus only. Do not terminate on solidly bonded equipment ground bus.
- K. Install all field-installed branch devices, components, and accessories.
- L. Where accessories are not self-powered, provide control power source as indicated or as required to complete installation.
- M. Multi-Wire Branch Circuits: Group grounded and ungrounded conductors together in the panelboard as required by NFPA 70.
- N. Set field-adjustable circuit breaker tripping function settings as indicated.
- O. Set field-adjustable ground fault protection pickup and time delay settings as indicated.
- P. Provide filler plates to cover unused spaces in panelboards.
- Q. Provide circuit breaker lock-on devices to prevent unauthorized personnel from de-energizing essential loads where indicated. Also provide for the following:
 - 1. Emergency and night lighting circuits.
 - 2. Fire detection and alarm circuits.
 - 3. Communications equipment circuits.

- 4. Intrusion detection and access control system circuits.
- 5. Video surveillance system circuits.
- R. Identify panelboards and provide arc flash labels in accordance with Section 26 05 53 and 26 05 73.

3.3 FIELD QUALITY CONTROL

- A. See Section 01 40 00 - Quality Requirements, for additional requirements.
- B. Inspect and test in accordance with NETA ATS, except Section 4.
- C. Molded Case Circuit Breakers: Perform inspections and tests listed in NETA ATS, Section 7.6.1.1 for all main circuit breakers and circuit breakers larger than _____ amperes. Tests listed as optional are not required.
- D. Test GFCI circuit breakers to verify proper operation.
- E. Test AFCI circuit breakers to verify proper operation.
- F. Test shunt trips to verify proper operation.
- G. Procure services of a qualified manufacturer's representative to observe installation and assist in inspection, testing, and adjusting. Include manufacturer's reports with field quality control submittals.
- H. Correct deficiencies and replace damaged or defective panelboards or associated components.

3.4 ADJUSTING

- A. Adjust tightness of mechanical and electrical connections to manufacturer's recommended torque settings.
- B. Adjust alignment of panelboard fronts.
- C. Load Balancing: For each panelboard, rearrange circuits such that the difference between each measured steady state phase load does not exceed 20 percent and adjust circuit directories accordingly. Maintain proper phasing for multi-wire branch circuits.

3.5 CLEANING

- A. Clean dirt and debris from panelboard enclosures and components according to manufacturer's instructions.
- B. Repair scratched or marred exterior surfaces to match original factory finish.

END OF SECTION

SECTION 26 27 26

WIRING DEVICES

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Wall switches.
- B. Receptacles.
- C. Wall plates.
- D. Floor box service fittings.

1.2 REFERENCE STANDARDS

- A. FS W-C-596 - Connector, Electrical, Power, General Specification for.
- B. FS W-S-896 - Switches, Toggle (Toggle and Lock), Flush-mounted (General Specification).
- C. NECA 1 - Standard for Good Workmanship in Electrical Construction.
- D. NECA 130 - Standard for Installing and Maintaining Wiring Devices.
- E. NEMA WD 1 - General Color Requirements for Wiring Devices.
- F. NEMA WD 6 - Wiring Devices - Dimensional Specifications.
- G. NFPA 70 - National Electrical Code; Most Recent Edition Adopted by Authority Having Jurisdiction, Including All Applicable Amendments and Supplements.
- H. UL 20 - General-Use Snap Switches; Current Edition, Including All Revisions.
- I. UL 498 - Attachment Plugs and Receptacles; Current Edition, Including All Revisions.
- J. UL 514D - Cover Plates for Flush-Mounted Wiring Devices; Current Edition, Including All Revisions.
- K. UL 943 - Ground-Fault Circuit-Interrupters; Current Edition, Including All Revisions.
- L. UL 1310 - Class 2 Power Units; Current Edition, Including All Revisions.
- M. UL 1472 - Solid-State Dimming Controls; Current Edition, Including All Revisions.

1.3 ADMINISTRATIVE REQUIREMENTS

- A. Coordination:
 - 1. Coordinate the placement of outlet boxes with millwork, furniture, equipment, etc. installed under other sections or by others.
 - 2. Coordinate wiring device ratings and configurations with the electrical requirements of actual equipment to be installed.
 - 3. Coordinate the placement of outlet boxes for wall switches with actual installed door swings.
 - 4. Coordinate the installation and preparation of uneven surfaces, such as split face block, to provide suitable surface for installation of wiring devices.
 - 5. Notify Architect of any conflicts or deviations from Contract Documents to obtain direction prior to proceeding with work.
- B. Sequencing:
 - 1. Do not install wiring devices until final surface finishes and painting are complete.

1.4 SUBMITTALS

- A. See Section 01 33 00 – Submittal Procedures for submittal procedures.
- B. Product Data: Provide manufacturer's catalog information showing dimensions, colors, and configurations.
 - 1. Wall Dimmers: Include derating information for ganged multiple devices.
- C. Field Quality Control Test Reports.

- D. Manufacturer's Installation Instructions: Indicate application conditions and limitations of use stipulated by product testing agency. Include instructions for storage, handling, protection, examination, preparation, and installation of product.
- E. Operation and Maintenance Data:
 - 1. Wall Dimmers: Include information on operation and setting of presets.
 - 2. GFCI Receptacles: Include information on status indicators.
- F. Project Record Documents: Record actual installed locations of wiring devices.

1.5 QUALITY ASSURANCE

- A. Comply with requirements of NFPA 70.
- B. Maintain at the project site a copy of each referenced document that prescribes execution requirements.
- C. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum three years documented experience.
- D. Products: Listed, classified, and labeled as suitable for the purpose intended.
- E. Product Listing Organization Qualifications: An organization recognized by OSHA as a Nationally Recognized Testing Laboratory (NRTL) and acceptable to authorities having jurisdiction.

1.6 DELIVERY, STORAGE, AND PROTECTION

- A. Store in a clean, dry space in original manufacturer's packaging until ready for installation.

PART 2 PRODUCTS

2.1 WIRING DEVICE APPLICATIONS

- A. Provide wiring devices suitable for intended use and with ratings adequate for load served.
- B. For single receptacles installed on an individual branch circuit, provide receptacle with ampere rating not less than that of the branch circuit.
- C. Provide weather resistant GFCI receptacles with specified weatherproof covers for receptacles installed outdoors or in damp or wet locations.
- D. Provide GFCI protection for receptacles installed within 6 feet of sinks.
- E. Provide GFCI protection for receptacles installed in kitchens.
- F. Provide GFCI protection for receptacles serving electric drinking fountains.
- G. Unless noted otherwise, do not use combination switch/receptacle devices.
- H. For flush floor service fittings, use tile rings for installations in tile floors.
- I. For flush floor service fittings, use carpet flanges for installations in carpeted floors.
- J. Provide controlled receptacles where indicated.
- K. Provide hospital grade receptacles where indicated.
- L. Provide tamper resistant receptacles where indicated.

2.2 WIRING DEVICE FINISHES

- A. Provide wiring device finishes as described below unless otherwise indicated.
- B. Wiring Devices, Unless Otherwise Indicated: White with stainless steel wall plate.
- C. Wiring Devices Installed in Finished Spaces: White with stainless steel wall plate.
- D. Wiring Devices Installed in Unfinished Spaces: Gray with galvanized steel wall plate.
- E. Wiring Devices Installed in Wet or Damp Locations: White with specified weatherproof cover.
- F. Wiring Devices Installed: White with stainless steel wall plate.
- G. Flush Floor Box Service Fittings: Gray wiring devices with brass cover and ring/flange.

2.3 WALL SWITCHES

- A. Manufacturers:
 - 1. Hubbell Incorporated; www.hubbell.com
 - 2. Leviton Manufacturing Company, Inc; www.leviton.com
 - 3. Pass & Seymour, a brand of Legrand North America, Inc; www.legrand.us
 - 4. Substitutions: See Section 01 60 00 - Product Requirements.
- B. Wall Switches - General Requirements: AC only, quiet operating, general-use snap switches with silver alloy contacts, complying with NEMA WD 1 and NEMA WD 6, and listed as complying with UL 20 and where applicable, FS W-S-896; types as indicated on the drawings.
 - 1. Wiring Provisions: Terminal screws for side wiring and screw actuated binding clamp for back wiring with separate ground terminal screw.
- C. Standard Wall Switches: Industrial specification grade, 20 A, 120/277 V with standard toggle type switch actuator and maintained contacts; single pole single throw, double pole single throw, three way, or four way as indicated on the drawings.

2.4 RECEPTACLES

- A. Manufacturers:
 - 1. Hubbell Incorporated; www.hubbell.com
 - 2. Leviton Manufacturing Company, Inc; www.leviton.com
 - 3. Pass & Seymour, a brand of Legrand North America, Inc; www.legrand.us
 - 4. Substitutions: See Section 01 60 00 - Product Requirements.
 - 5. Source Limitations: Where wall controls are furnished as part of lighting control system, provide accessory matching receptacles and wallplates by the same manufacturer in locations indicated.
- B. Receptacles - General Requirements: Self-grounding, complying with NEMA WD 1 and NEMA WD 6, and listed as complying with UL 498, and where applicable, FS W-C-596; types as indicated on the drawings.
 - 1. Wiring Provisions: Terminal screws for side wiring or screw actuated binding clamp for back wiring with separate ground terminal screw.
 - 2. NEMA configurations specified are according to NEMA WD 6.
- C. Convenience Receptacles:
 - 1. Standard Convenience Receptacles: Industrial specification grade, 20A, 125V, NEMA 5-20R; single or duplex as indicated on the drawings.
 - 2. Automatically Controlled Convenience Receptacles: Industrial specification grade, 20A, 125V, NEMA 5-20R; controlled receptacle marking on device face per NFPA 70; single or duplex as indicated on the drawings.
 - 3. Tamper Resistant Convenience Receptacles: Industrial specification hospital grade, 20A, 125V, NEMA 5-20R, duplex as indicated on the drawings.
- D. GFCI Receptacles:
 - 1. GFCI Receptacles - General Requirements: Self-testing, with feed-through protection and light to indicate ground fault tripped condition and loss of protection; listed as complying with UL 943, class A.
 - a. Provide test and reset buttons of same color as device.
 - 2. Standard GFCI Receptacles: Industrial specification grade, duplex, 20A, 125V, NEMA 5-20R, rectangular decorator style.
 - 3. Weather Resistant GFCI Receptacles: Industrial specification grade, duplex, 20A, 125V, NEMA 5-20R, rectangular decorator style, listed and labeled as weather resistant type complying with UL 498 Supplement SE suitable for installation in damp or wet locations.
 - 4. Tamper Resistant GFCI Receptacles: Industrial specification hospital grade, 20A, 125V, NEMA 5-2R, duplex as indicated on the drawings.

2.5 WALL PLATES

- A. Manufacturers:

1. Hubbell Incorporated; www.hubbell-wiring.com
 2. Leviton Manufacturing Company, Inc; www.leviton.com
 3. Lutron Electronics Company, Inc; www.lutron.com
 4. Pass & Seymour, a brand of Legrand North America, Inc; www.legrand.us
 5. Substitutions: See Section 01 60 00 - Product Requirements.
 6. Source Limitations: Where wall controls are furnished as part of lighting control system, provide accessory matching receptacles and wallplates by the same manufacturer in locations indicated.
- B. Wall Plates: Comply with UL 514D.
1. Configuration: One piece cover as required for quantity and types of corresponding wiring devices.
 2. Size: Standard.
 3. Screws: Metal with slotted heads finished to match wall plate finish.
- C. Stainless Steel Wall Plates: Brushed satin finish, Type 302 stainless steel.
- D. Weatherproof Covers: Gasketed, cast aluminum, with hinged lockable cover and corrosion-resistant screws; listed as suitable for use in wet locations while in use with attachment plugs connected and identified as extra-duty type.
- 2.6 FLOOR BOX SERVICE FITTINGS
- A. Manufacturers:
1. Hubbell Incorporated; www.hubbell.com
 2. Thomas & Betts Corporation; www.tnb.com
 3. Wiremold, a brand of Legrand North America, Inc; www.legrand.us
- B. Description: Service fittings compatible with floor boxes provided under Section 26 05 33.16 with components, adapters, and trims required for complete installation.
- C. Flush Floor Service Fittings:
1. Dual Service Flush Combination Outlets:
 - a. Cover: Rectangular, brass with lift doors, carpet flange
 - b. Body: Deep 3-7/16 inches, adjustable. Cast iron, 2 gang with 1" conduit provisions.
 - c. Configuration:
 - 1) Power: One standard convenience duplex receptacle.
 - 2) Communications.
 - 3) Voice and Data Jacks: Plate for Owner provided data and A/V devices.
 2. Accessories:
 - a. Carpet Flanges: Finish to match covers; configuration as required to accommodate specified covers.

PART 3 EXECUTION

3.1 EXAMINATION

- A. Verify that field measurements are as indicated.
- B. Verify that outlet boxes are installed in proper locations and at proper mounting heights and are properly sized to accommodate devices and conductors in accordance with NFPA 70.
- C. Verify that wall openings are neatly cut and will be completely covered by wall plates.
- D. Verify that final surface finishes are complete, including painting.
- E. Verify that floor boxes are adjusted properly.
- F. Verify that branch circuit wiring installation is completed, tested, and ready for connection to wiring devices.
- G. Verify that conditions are satisfactory for installation prior to starting work.

3.2 PREPARATION

- A. Provide extension rings to bring outlet boxes flush with finished surface.
- B. Clean dirt, debris, plaster, and other foreign materials from outlet boxes.

3.3 INSTALLATION

- A. Perform work in accordance with NECA 1 (general workmanship) and, where applicable, NECA 130, including mounting heights specified in those standards unless otherwise indicated.
- B. Coordinate locations of outlet boxes provided under Section 26 05 33.16 as required for installation of wiring devices provided under this section.
 - 1. Mounting Heights: Unless otherwise indicated, as follows:
 - a. Wall Switches: 48 inches above finished floor.
 - b. Receptacles: 18 inches above finished floor or 6 inches above counter.
 - 2. Orient outlet boxes for vertical installation of wiring devices unless otherwise indicated.
 - 3. Where multiple receptacles, wall switches, or wall dimmers are installed at the same location and at the same mounting height, gang devices together under a common wall plate.
 - 4. Locate wall switches on strike side of door with edge of wall plate 3 inches from edge of door frame. Where locations are indicated otherwise, notify Architect to obtain direction prior to proceeding with work.
 - 5. Locate receptacles for electric drinking fountains concealed behind drinking fountain according to manufacturer's instructions.
- C. Install wiring devices in accordance with manufacturer's instructions.
- D. Install permanent barrier between ganged wiring devices when voltage between adjacent devices exceeds 300 V.
- E. Where required, connect wiring devices using pigtails not less than 6 inches long. Do not connect more than one conductor to wiring device terminals.
- F. Connect wiring devices by wrapping conductor clockwise 3/4 turn around screw terminal and tightening to proper torque specified by the manufacturer. Where present, do not use push-in pressure terminals that do not rely on screw-actuated binding.
- G. Unless otherwise indicated, connect wiring device grounding terminal to branch circuit equipment grounding conductor and to outlet box with bonding jumper.
- H. Provide GFCI receptacles with integral GFCI protection at each location indicated. Do not use feed-through wiring to protect downstream devices.
- I. Where split-wired duplex receptacles are indicated, remove tabs connecting top and bottom receptacles.
- J. Install wiring devices plumb and level with mounting yoke held rigidly in place.
- K. Install wall switches with OFF position down.
- L. Do not share neutral conductor on branch circuits utilizing wall dimmers.
- M. Install vertically mounted receptacles with grounding pole on top and horizontally mounted receptacles with grounding pole on left.
- N. Install wall plates to fit completely flush to wall with no gaps and rough opening completely covered without strain on wall plate. Repair or reinstall improperly installed outlet boxes or improperly sized rough openings. Do not use oversized wall plates in lieu of meeting this requirement.
- O. Install blank wall plates on junction boxes and on outlet boxes with no wiring devices installed or designated for future use.
- P. Identify wiring devices in accordance with Section 26 05 53.

3.4 FIELD QUALITY CONTROL

- A. See Section 01 40 00 - Quality Requirements, for additional requirements.

- B. Inspect each wiring device for damage and defects.
- C. Operate each wall switch, wall dimmer, and fan speed controller with circuit energized to verify proper operation.
- D. Test each receptacle to verify operation and proper polarity.
- E. Test each GFCI receptacle for proper tripping operation according to manufacturer's instructions.
- F. Correct wiring deficiencies and replace damaged or defective wiring devices.

3.5 ADJUSTING

- A. Adjust devices and wall plates to be flush and level.
- B. Adjust presets for wall dimmers according to manufacturer's instructions as directed by Architect.

3.6 CLEANING

- A. Clean exposed surfaces to remove dirt, paint, or other foreign material and restore to match original factory finish.

END OF SECTION

SECTION 26 28 13 FUSES

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Fuses.
- B. Spare fuse cabinet.

1.2 REFERENCE STANDARDS

- A. NEMA FU 1 - Low Voltage Cartridge Fuses.
- B. NFPA 70 - National Electrical Code; Most Recent Edition Adopted by Authority Having Jurisdiction, Including All Applicable Amendments and Supplements.
- C. UL 248-1 - Low-Voltage Fuses - Part 1: General Requirements; Current Edition, Including All Revisions.
- D. UL 248-4 - Low-Voltage Fuses - Part 4: Class CC Fuses; Current Edition, Including All Revisions.
- E. UL 248-8 - Low-Voltage Fuses - Part 8: Class J Fuses; Current Edition, Including All Revisions.
- F. UL 248-10 - Low-Voltage Fuses - Part 10: Class L Fuses; Current Edition, Including All Revisions.
- G. UL 248-12 - Low-Voltage Fuses - Part 12: Class R Fuses; Current Edition, Including All Revisions.
- H. UL 248-15 - Low-Voltage Fuses - Part 15: Class T Fuses; Current Edition, Including All Revisions.

1.3 ADMINISTRATIVE REQUIREMENTS

- A. Coordination:
 - 1. Coordinate fuse clips furnished in equipment provided under other sections for compatibility with indicated fuses.
 - a. Fusible Enclosed Switches: See Section 26 28 16.16.
 - 2. Coordinate fuse requirements according to manufacturer's recommendations and nameplate data for actual equipment to be installed.
 - 3. Notify Architect of any conflicts with or deviations from Contract Documents. Obtain direction before proceeding with work.

1.4 SUBMITTALS

- A. See Section 01 33 00 – Submittal Procedures for submittal procedures.
- B. Product Data: Provide manufacturer's standard data sheets including voltage and current ratings, interrupting ratings, time-current curves, and current limitation curves.
 - 1. Spare Fuse Cabinet: Include dimensions.
- C. Maintenance Materials: Furnish the following for Owner's use in maintenance of project.
 - 1. See Section 01 60 00 - Product Requirements, for additional provisions.
 - 2. Extra Fuses: One set(s) of three for each type and size installed.
 - 3. Fuse Pullers: One set(s) compatible with each type and size installed.

1.5 QUALITY ASSURANCE

- A. Comply with requirements of NFPA 70.
- B. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum three years documented experience.
- C. Product Listing Organization Qualifications: An organization recognized by OSHA as a Nationally Recognized Testing Laboratory (NRTL) and acceptable to authorities having jurisdiction.

PART 2 PRODUCTS

2.1 MANUFACTURERS

- A. Bussmann, a division of Eaton Corporation; www.cooperindustries.com
- B. Littelfuse, Inc; www.littelfuse.com
- C. Substitutions: See Section 01 60 00 - Product Requirements.

2.2 APPLICATIONS

- A. Service Entrance:
 - 1. Fusible Switches up to 600 Amperes: Class RK1, time-delay.
 - 2. Fusible Switches Larger Than 600 Amperes: Class L, time-delay.
- B. Feeders:
 - 1. Fusible Switches up to 600 Amperes: Class RK1, time-delay.
 - 2. Fusible Switches Larger Than 600 Amperes: Class L, time-delay.
- C. General Purpose Branch Circuits: Class RK1, time-delay.
- D. Individual Motor Branch Circuits: Class RK1, time-delay.
- E. In-Line Protection for Pole-Mounted Luminaires: Class CC, time-delay.

2.3 FUSES

- A. Provide products listed, classified, and labeled as suitable for the purpose intended.
- B. Unless specifically indicated to be excluded, provide fuses for all fusible equipment as required for a complete operating system.
- C. Provide fuses of the same type, rating, and manufacturer within the same switch.
- D. Comply with UL 248-1.
- E. Unless otherwise indicated, provide cartridge type fuses complying with NEMA FU 1, Class and ratings as indicated.
- F. Voltage Rating: Suitable for circuit voltage.
- G. Class R Fuses: Comply with UL 248-12.
 - 1. Class RK1, Time-Delay Fuses:
- H. Class L Fuses: Comply with UL 248-10.
 - 1. Class L, Time-Delay Fuses:
- I. Selectivity: Where the requirement for selectivity is indicated, furnish products as required to achieve selective coordination.
- J. Provide the following accessories where indicated or where required to complete installation:
 - 1. Fuseholders: Compatible with indicated fuses.
 - 2. Fuse Reducers: For adapting indicated fuses to permit installation in switch designed for fuses with larger ampere ratings.

PART 3 EXECUTION

3.1 EXAMINATION

- A. Verify that fuse ratings are consistent with circuit voltage and manufacturer's recommendations and nameplate data for equipment.
- B. Verify that mounting surfaces are ready to receive spare fuse cabinet.
- C. Verify that conditions are satisfactory for installation prior to starting work.

3.2 INSTALLATION

- A. Do not install fuses until circuits are ready to be energized.
- B. Install fuses with label oriented such that manufacturer, type, and size are easily read.
- C. Install spare fuse cabinet where indicated.

END OF SECTION

SECTION 26 28 16.13

ENCLOSED CIRCUIT BREAKERS

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Enclosed circuit breakers.

1.2 REFERENCE STANDARDS

- A. FS W-C-375 - Circuit Breakers, Molded Case; Branch Circuit and Service.
- B. NECA 1 - Standard for Good Workmanship in Electrical Construction.
- C. NEMA 250 - Enclosures for Electrical Equipment (1000 Volts Maximum).
- D. NETA ATS - Acceptance Testing Specifications for Electrical Power Equipment and Systems.
- E. NFPA 70 - National Electrical Code; Most Recent Edition Adopted by Authority Having Jurisdiction, Including All Applicable Amendments and Supplements.
- F. UL 50 - Enclosures for Electrical Equipment, Non-Environmental Considerations; Current Edition, Including All Revisions.
- G. UL 50E - Enclosures for Electrical Equipment, Environmental Considerations; Current Edition, Including All Revisions.
- H. UL 489 - Molded-Case Circuit Breakers, Molded-Case Switches and Circuit Breaker Enclosures; Current Edition, Including All Revisions.
- I. UL 869A - Reference Standard for Service Equipment; Current Edition, Including All Revisions.

1.3 ADMINISTRATIVE REQUIREMENTS

- A. Coordination:
 - 1. Coordinate work with other trades. Avoid placement of ductwork, piping, equipment, or other potential obstructions within dedicated equipment spaces and within working clearances for electrical equipment required by NFPA 70.
 - 2. Coordinate arrangement of electrical equipment with the dimensions and clearance requirements of the actual equipment to be installed.
 - 3. Coordinate the work with other trades to provide walls suitable for installation of flush-mounted enclosed circuit breakers where indicated.
 - 4. Verify with manufacturer that conductor terminations are suitable for use with the conductors to be installed.
 - 5. Notify Architect of any conflicts with or deviations from Contract Documents. Obtain direction before proceeding with work.

1.4 SUBMITTALS

- A. See Section 01 33 00 – Submittal Procedures for submittal procedures.
- B. Product Data: Provide manufacturer's standard catalog pages and data sheets for circuit breakers, enclosures, and other installed components and accessories.
 - 1. Include characteristic trip curves for each type and rating of circuit breaker upon request.
- C. Shop Drawings: Indicate outline and support point dimensions, voltage and current ratings, short circuit current ratings, conduit entry locations, conductor terminal information, and installed features and accessories.
- D. Manufacturer's equipment seismic qualification certification.
- E. Manufacturer's Installation Instructions: Indicate application conditions and limitations of use stipulated by product testing agency. Include instructions for storage, handling, protection, examination, preparation, installation, and starting of product.
- F. Project Record Documents: Record actual installed locations of enclosed circuit breakers.

- G. Maintenance Data: Include information on replacement parts and recommended maintenance procedures and intervals.

1.5 QUALITY ASSURANCE

- A. Comply with requirements of NFPA 70.
- B. Maintain at the project site a copy of each referenced document that prescribes execution requirements.
- C. Product Listing Organization Qualifications: An organization recognized by OSHA as a Nationally Recognized Testing Laboratory (NRTL) and acceptable to authorities having jurisdiction.

1.6 DELIVERY, STORAGE, AND HANDLING

- A. Store in a clean, dry space. Maintain factory wrapping or provide an additional heavy canvas or heavy plastic cover to protect units from dirt, water, construction debris, and traffic.
- B. Handle carefully in accordance with manufacturer's written instructions to avoid damage to enclosed circuit breaker internal components, enclosure, and finish.

1.7 FIELD CONDITIONS

- A. Maintain ambient temperature between 23 degrees F and 104 degrees F during and after installation of enclosed circuit breakers.

PART 2 PRODUCTS

2.1 MANUFACTURERS

- A. ABB/GE; www.electrification.us.abb.com
- B. Eaton Corporation; www.eaton.com
- C. Schneider Electric; Square D Products; www.schneider-electric.us
- D. Siemens Industry, Inc; www.usa.siemens.com
- E. Source Limitations: Furnish enclosed circuit breakers and associated components produced by the same manufacturer as the other electrical distribution equipment used for this project and obtained from a single supplier.

2.2 ENCLOSED CIRCUIT BREAKERS

- A. Description: Units consisting of molded case circuit breakers individually mounted in enclosures.
- B. Provide products listed, classified, and labeled as suitable for the purpose intended.
- C. Seismic Qualification: Provide enclosed circuit breakers and associated components suitable for application under the seismic design criteria specified in Section 23 05 48 where required. Include certification of compliance with submittals.
- D. Unless otherwise indicated, provide products suitable for continuous operation under the following service conditions:
 - 1. Altitude: Less than 6,600 feet.
 - 2. Ambient Temperature: Between 23 degrees F and 104 degrees F.
- E. Short Circuit Current Rating:
 - 1. Provide enclosed circuit breakers with listed short circuit current rating not less than the available fault current at the installed location indicated on the drawings.
- F. Enclosed Circuit Breakers Used for Service Entrance: Listed and labeled as suitable for use as service equipment according to UL 869A.
- G. Conductor Terminations: Suitable for use with the conductors to be installed.
- H. Provide thermal magnetic circuit breakers unless otherwise indicated.
- I. Provide insulated, groundable fully rated solid neutral assembly where a neutral connection is required, with a suitable lug for terminating each neutral conductor.

- J. Provide solidly bonded equipment ground bus in each enclosed circuit breaker, with a suitable lug for terminating each equipment grounding conductor.
- K. Enclosures: Comply with NEMA 250, and list and label as complying with UL 50 and UL 50E.
 - 1. Environment Type per NEMA 250: Unless otherwise indicated, as specified for the following installation locations:
 - a. Indoor Clean, Dry Locations: Type 1.
 - b. Outdoor Locations: Type 3R.
 - 2. Finish for Painted Steel Enclosures: Manufacturer's standard, factory applied grey unless otherwise indicated.
 - 3. Provide surface-mounted enclosures unless otherwise indicated.
- L. Provide externally operable handle with means for locking in the OFF position.

2.3 MOLDED CASE CIRCUIT BREAKERS

- A. Description: Quick-make, quick-break, over center toggle, trip-free, trip-indicating circuit breakers listed and labeled as complying with UL 489, and complying with FS W-C-375 where applicable; ratings, configurations, and features as indicated on the drawings.
- B. Interrupting Capacity:
 - 1. Provide circuit breakers with interrupting capacity as required to provide the short circuit current rating indicated, but not less than:
 - a. 10,000 rms symmetrical amperes at 240 VAC or 208 VAC.
 - 2. Fully Rated Systems: Provide circuit breakers with interrupting capacity not less than the short circuit current rating indicated.
- C. Conductor Terminations:
 - 1. Provide mechanical lugs unless otherwise indicated.
 - 2. Provide compression lugs where indicated.
 - 3. Lug Material: Aluminum, suitable for terminating aluminum or copper conductors.
- D. Thermal Magnetic Circuit Breakers: For each pole, furnish thermal inverse time tripping element for overload protection and magnetic instantaneous tripping element for short circuit protection.
 - 1. Provide field-adjustable magnetic instantaneous trip setting for circuit breaker frame sizes 225 amperes and larger.
 - 2. Provide interchangeable trip units where indicated.
- E. Multi-Pole Circuit Breakers: Furnish with common trip for all poles.

PART 3 EXECUTION

3.1 EXAMINATION

- A. Verify that field measurements are as indicated.
- B. Verify that the ratings of the enclosed circuit breakers are consistent with the indicated requirements.
- C. Verify that mounting surfaces are ready to receive enclosed circuit breakers.
- D. Verify that conditions are satisfactory for installation prior to starting work.

3.2 INSTALLATION

- A. Install products in accordance with manufacturer's instructions.
- B. Perform work in accordance with NECA 1 (general workmanship).
- C. Arrange equipment to provide minimum clearances in accordance with manufacturer's instructions and NFPA 70.
- D. Provide required support and attachment in accordance with Section 26 05 29.
- E. Provide required seismic controls in accordance with Section 23 05 48.
- F. Install enclosed circuit breakers plumb.

- G. Except where indicated to be mounted adjacent to the equipment they supply, mount enclosed circuit breakers such that the highest position of the operating handle does not exceed 79 inches (2000 mm) above the floor or working platform.
- H. Provide grounding and bonding in accordance with Section 26 05 26.
- I. Set field-adjustable circuit breaker tripping function settings as required. See section 26 05 73.
- J. Identify enclosed circuit breakers in accordance with Section 26 05 53.

3.3 FIELD QUALITY CONTROL

- A. See Section 01 40 00 - Quality Requirements, for additional requirements.
- B. Inspect and test in accordance with manufacturer's instructions and NETA ATS, except Section 4.
- C. Perform inspections and tests listed in NETA ATS, Section 7.6.1.1 for circuit breakers used for service entrance. Tests listed as optional are not required.
- D. Correct deficiencies and replace damaged or defective enclosed circuit breakers.

3.4 ADJUSTING

- A. Adjust tightness of mechanical and electrical connections to manufacturer's recommended torque settings.

3.5 CLEANING

- A. Clean dirt and debris from circuit breaker enclosures and components according to manufacturer's instructions.
- B. Repair scratched or marred exterior surfaces to match original factory finish.

END OF SECTION

SECTION 26 28 16.16

ENCLOSED SWITCHES

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Enclosed safety switches.

1.2 REFERENCE STANDARDS

- A. NECA 1 - Standard for Good Workmanship in Electrical Construction.
- B. NEMA 250 - Enclosures for Electrical Equipment (1000 Volts Maximum).
- C. NEMA KS 1 - Heavy Duty Enclosed and Dead-Front Switches (600 Volts Maximum).
- D. NETA ATS - Acceptance Testing Specifications for Electrical Power Equipment and Systems.
- E. NFPA 70 - National Electrical Code; Most Recent Edition Adopted by Authority Having Jurisdiction, Including All Applicable Amendments and Supplements.
- F. UL 50 - Enclosures for Electrical Equipment, Non-Environmental Considerations; Current Edition, Including All Revisions.
- G. UL 50E - Enclosures for Electrical Equipment, Environmental Considerations; Current Edition, Including All Revisions.
- H. UL 98 - Enclosed and Dead-Front Switches; Current Edition, Including All Revisions.
- I. UL 869A - Reference Standard for Service Equipment; Current Edition, Including All Revisions.

1.3 ADMINISTRATIVE REQUIREMENTS

- A. Coordination:
 - 1. Coordinate the work with other trades. Avoid placement of ductwork, piping, equipment, or other potential obstructions within the dedicated equipment spaces and within working clearances for electrical equipment required by NFPA 70.
 - 2. Coordinate arrangement of electrical equipment with the dimensions and clearance requirements of the actual equipment to be installed.
 - 3. Verify with manufacturer that conductor terminations are suitable for use with the conductors to be installed.
 - 4. Notify Architect of any conflicts with or deviations from Contract Documents. Obtain direction before proceeding with work.

1.4 SUBMITTALS

- A. See Section 01 33 00 – Submittal Procedures for submittal procedures.
- B. Product Data: Provide manufacturer's standard catalog pages and data sheets for enclosed switches and other installed components and accessories.
- C. Shop Drawings: Indicate outline and support point dimensions, voltage and current ratings, short circuit current ratings, conduit entry locations, conductor terminal information, and installed features and accessories.
- D. Manufacturer's equipment seismic qualification certification.
- E. Field Quality Control Test Reports.
- F. Manufacturer's Installation Instructions: Indicate application conditions and limitations of use stipulated by product testing agency. Include instructions for storage, handling, protection, examination, preparation, installation, and starting of product.
- G. Project Record Documents: Record actual locations of enclosed switches.
- H. Maintenance Data: Include information on replacement parts and recommended maintenance procedures and intervals.

1.5 QUALITY ASSURANCE

- A. Comply with requirements of NFPA 70.
- B. Maintain at the project site a copy of each referenced document that prescribes execution requirements.
- C. Product Listing Organization Qualifications: An organization recognized by OSHA as a Nationally Recognized Testing Laboratory (NRTL) and acceptable to authorities having jurisdiction.

1.6 DELIVERY, STORAGE, AND HANDLING

- A. Store in a clean, dry space. Maintain factory wrapping or provide an additional heavy canvas or heavy plastic cover to protect units from dirt, water, construction debris, and traffic.
- B. Handle carefully in accordance with manufacturer's written instructions to avoid damage to enclosed switch internal components, enclosure, and finish.

1.7 FIELD CONDITIONS

- A. Maintain ambient temperature between -22 degrees F and 104 degrees F during and after installation of enclosed switches.

PART 2 PRODUCTS

2.1 MANUFACTURERS

- A. ABB/GE; www.electrification.us.abb.com
- B. Eaton Corporation; www.eaton.com
- C. Schneider Electric; Square D Products; www.schneider-electric.us
- D. Siemens Industry, Inc; www.usa.siemens.com
- E. Source Limitations: Furnish enclosed switches and associated components produced by the same manufacturer as the other electrical distribution equipment used for this project and obtained from a single supplier.

2.2 ENCLOSED SAFETY SWITCHES

- A. Description: Quick-make, quick-break enclosed safety switches listed and labeled as complying with UL 98; heavy duty; ratings, configurations, and features as indicated on the drawings.
- B. Provide products listed, classified, and labeled as suitable for the purpose intended.
- C. Seismic Qualification: Provide enclosed safety switches suitable for application under the seismic design criteria specified in Section 23 05 48 where required. Include certification of compliance with submittals.
- D. Unless otherwise indicated, provide products suitable for continuous operation under the following service conditions:
 - 1. Altitude: Less than 6,600 feet.
 - 2. Ambient Temperature: Between -22 degrees F and 104 degrees F.
- E. Horsepower Rating: Suitable for connected load.
- F. Voltage Rating: Suitable for circuit voltage.
- G. Short Circuit Current Rating:
 - 1. Provide enclosed safety switches, when protected by supply side overcurrent protective devices to be installed, with listed short circuit current rating not less than the available fault current at the installed location as indicated on the drawings.
- H. Provide with switch blade contact position that is visible when the cover is open.
- I. Conductor Terminations: Suitable for use with the conductors to be installed.
- J. Provide insulated, groundable fully rated solid neutral assembly where a neutral connection is required, with a suitable lug for terminating each neutral conductor.

- K. Provide solidly bonded equipment ground bus in each enclosed safety switch, with a suitable lug for terminating each equipment grounding conductor.
- L. Enclosures: Comply with NEMA 250, and list and label as complying with UL 50 and UL 50E.
 - 1. Environment Type per NEMA 250: Unless otherwise indicated, as specified for the following installation locations:
 - a. Indoor Clean, Dry Locations: Type 1.
 - b. Outdoor Locations: Type 3R.
 - 2. Finish for Painted Steel Enclosures: Manufacturer's standard, factory applied grey unless otherwise indicated.
- M. Provide safety interlock to prevent opening the cover with the switch in the ON position with capability of overriding interlock for testing purposes.
- N. Heavy Duty Switches:
 - 1. Comply with NEMA KS 1.
 - 2. Conductor Terminations:
 - a. Provide mechanical lugs unless otherwise indicated.
 - b. Provide compression lugs where indicated.
 - c. Lug Material: Aluminum, suitable for terminating aluminum or copper conductors.
 - 3. Provide externally operable handle with means for locking in the OFF position, capable of accepting three padlocks.
 - a. Provide means for locking handle in the ON position where indicated.
- O. Provide the following features and accessories where indicated or where required to complete installation:
 - 1. Hubs: As required for environment type; sized to accept conduits to be installed.

PART 3 EXECUTION

3.1 EXAMINATION

- A. Verify that field measurements are as indicated.
- B. Verify that the ratings of the enclosed switches are consistent with the indicated requirements.
- C. Verify that mounting surfaces are ready to receive enclosed safety switches.
- D. Verify that conditions are satisfactory for installation prior to starting work.

3.2 INSTALLATION

- A. Install products in accordance with manufacturer's instructions.
- B. Perform work in accordance with NECA 1 (general workmanship).
- C. Arrange equipment to provide minimum clearances in accordance with manufacturer's instructions and NFPA 70.
- D. Provide required support and attachment in accordance with Section 26 05 29.
- E. Provide required seismic controls in accordance with Section 23 05 48.
- F. Install enclosed switches plumb.
- G. Except where indicated to be mounted adjacent to the equipment they supply, mount enclosed switches such that the highest position of the operating handle does not exceed 79 inches (2000 mm) above the floor or working platform.
- H. Provide grounding and bonding in accordance with Section 26 05 26.
- I. Identify enclosed switches in accordance with Section 26 05 53.

3.3 FIELD QUALITY CONTROL

- A. See Section 01 40 00 - Quality Requirements, for additional requirements.
- B. Inspect and test in accordance with NETA ATS, except Section 4.
- C. Perform inspections and tests listed in NETA ATS, Section 7.5.1.1.

- D. Correct deficiencies and replace damaged or defective enclosed safety switches or associated components.

3.4 ADJUSTING

- A. Adjust tightness of mechanical and electrical connections to manufacturer's recommended torque settings.

3.5 CLEANING

- A. Clean dirt and debris from switch enclosures and components according to manufacturer's instructions.
- B. Repair scratched or marred exterior surfaces to match original factory finish.

END OF SECTION

SECTION 26 32 13

ENGINE GENERATORS

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Packaged engine generator system and associated components and accessories:
 - 1. Engine and engine accessory equipment.
 - 2. Alternator (generator).
 - 3. Generator set control system.
 - 4. Generator set enclosure.

1.2 REFERENCE STANDARDS

- A. ASTM D975 - Standard Specification for Diesel Fuel.
- B. NECA 1 - Standard for Good Workmanship in Electrical Construction.
- C. NECA/EGSA 404 - Standard for Installing Generator Sets.
- D. NEMA MG 1 - Motors and Generators.
- E. NFPA 30 - Flammable and Combustible Liquids Code.
- F. NFPA 37 - Standard for the Installation and Use of Stationary Combustion Engines and Gas Turbines.
- G. NFPA 70 - National Electrical Code; Most Recent Edition Adopted by Authority Having Jurisdiction, Including All Applicable Amendments and Supplements.
- H. NFPA 110 - Standard for Emergency and Standby Power Systems.
- I. UL 142 - Steel Aboveground Tanks for Flammable and Combustible Liquids; Current Edition, Including All Revisions.
- J. UL 1236 - Battery Chargers for Charging Engine-Starter Batteries; Current Edition, Including All Revisions.
- K. UL 2085 - Protected Aboveground Tanks for Flammable and Combustible Liquids; Current Edition, Including All Revisions.
- L. UL 2200 - Stationary Engine Generator Assemblies; Current Edition, Including All Revisions.

1.3 ADMINISTRATIVE REQUIREMENTS

- A. Coordination:
 - 1. Coordinate compatibility of generator sets to be installed with work provided under other sections or by others.
 - a. Transfer Switches: See Section 26 36 00.
 - 2. Coordinate the work with other trades to avoid placement of ductwork, piping, equipment or other potential obstructions within the spaces dedicated for engine generator system.
 - 3. Coordinate arrangement of equipment with the dimensions and clearance requirements of the actual equipment to be installed.
 - 4. Coordinate the work to provide electrical circuits suitable for the power requirements of the actual auxiliary equipment and accessories to be installed.
 - 5. Notify Architect of any conflicts with or deviations from Contract Documents. Obtain direction before proceeding with work.
- B. Preinstallation Meeting: Convene one week before starting work of this section; require attendance of all affected installers.

1.4 SUBMITTALS

- A. See Section 01 33 00 – Submittal Procedures for submittal procedures.
- B. Product Data: Provide manufacturer's standard catalog pages and data sheets for each product, including ratings, configurations, dimensions, finishes, weights, service condition

requirements, and installed features. Include alternator starting capabilities, engine fuel consumption rates, and cooling, combustion air, and exhaust requirements.

1. Include generator set sound level test data.
 2. Include characteristic trip curves for overcurrent protective devices upon request.
 3. Include alternator thermal damage curve upon request.
- C. Shop Drawings: Include dimensioned plan views and sections indicating locations of system components, required clearances, and field connection locations. Include system interconnection schematic diagrams showing all factory and field connections.
1. Identify mounting conditions required for equipment seismic qualification.
- D. Manufacturer's equipment seismic qualification certification.
- E. Derating Calculations: Indicate ratings adjusted for applicable service conditions.
- F. Fuel Storage Tank Calculations: Indicate maximum running time for generator set configuration provided.
- G. Specimen Warranty: Submit sample of manufacturer's warranty.
- H. Evidence of qualifications for installer.
- I. Evidence of qualifications for maintenance contractor (if different entity from installer).
- J. Manufacturer's Installation Instructions: Indicate application conditions and limitations of use stipulated by product testing agency. Include instructions for storage, handling, protection, examination, preparation, installation, and operation of product.
- K. Manufacturer's factory emissions certification.
- L. Manufacturer's certification that products meet or exceed specified requirements.
- M. Source quality control test reports.
- N. Provide NFPA 110 required documentation from manufacturer where requested by authorities having jurisdiction, including but not limited to:
1. Certified prototype tests.
 2. Torsional vibration compatibility certification.
 3. NFPA 110 compliance certification.
 4. Certified rated load test at rated power factor.
- O. Manufacturer's detailed field testing procedures.
- P. Field quality control test reports.
- Q. Operation and Maintenance Data: Include detailed information on system operation, equipment programming and setup, replacement parts, and recommended maintenance procedures and intervals.
1. Include contact information for entity that will be providing contract maintenance and trouble call-back service.
- R. Executed Warranty: Submit documentation of final executed warranty completed in Owner's name and registered with manufacturer.
- S. Maintenance contracts.
- T. Project Record Documents: Record actual locations of system components, installed circuiting arrangements and routing, and final equipment settings.
- U. Maintenance Materials: Furnish the following for Owner's use in maintenance of project.
1. See Section 01 60 00 - Product Requirements, for additional provisions.
 2. Extra Fuses: One of each type and size.
 3. Extra Filter Elements: One of each type, including fuel, oil and air.

1.5 QUALITY ASSURANCE

- A. Comply with the following:
1. NFPA 70 (National Electrical Code).

2. NFPA 110 (Standard for Emergency and Standby Power Systems); meet requirements for Level 2 system.
 3. NFPA 37 (Standard for the Installation and Use of Stationary Combustion Engines and Gas Turbines).
 4. NFPA 30 (Flammable and Combustible Liquids Code).
 - B. Maintain at the project site a copy of each referenced document that prescribes execution requirements.
 - C. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum three years documented experience.
 1. Authorized service facilities located within 200 miles of project site.
 - D. Installer Qualifications: Company specializing in performing the work of this section with minimum three years documented experience with engine generator systems of similar size, type, and complexity; manufacturer's authorized installer.
 - E. Maintenance Contractor Qualifications: Same entity as installer or different entity with specified qualifications.
 1. Contract maintenance office located within 200 miles of project site.
 - F. Product Listing Organization Qualifications: An organization recognized by OSHA as a Nationally Recognized Testing Laboratory (NRTL) and acceptable to authorities having jurisdiction.
- 1.6 DELIVERY, STORAGE, AND HANDLING
- A. Receive, inspect, handle, and store generator sets in accordance with manufacturer's instructions and NECA/EGSA 404.
 - B. Store in a clean, dry space. Maintain factory wrapping or provide an additional heavy canvas or heavy plastic cover to protect units from dirt, water, construction debris, and traffic.
 - C. Handle carefully in accordance with manufacturer's instructions to avoid damage to generator set components, enclosure, and finish.
- 1.7 FIELD CONDITIONS
- A. Maintain field conditions within manufacturer's required service conditions during and after installation.
- 1.8 WARRANTY
- A. See Section 01 77 00 - Closeout Procedures, for additional warranty requirements.
 - B. Provide minimum one year manufacturer warranty covering repair or replacement due to defective materials or workmanship.

PART 2 PRODUCTS

2.1 MANUFACTURERS

- A. Packaged Engine Generator Set - Basis of Design: Kohler indicated under product description below.
- B. Packaged Engine Generator Set - Other Acceptable Manufacturers:
 1. Caterpillar Inc; www.cat.com
 2. Cummins Power Generation Inc; www.cumminspower.com
 3. Generac Power Systems; www.generac.com/industrial
 4. Kohler Co; www.kohlerpower.com
- C. Substitutions: See Section 01 60 00 - Product Requirements.
- D. Products other than basis of design are subject to compliance with specified requirements and prior approval of Engineer. By using products other than basis of design, Contractor accepts responsibility for costs associated with any necessary modifications to related work, including any design fees.

- E. Source Limitations: Furnish engine generator sets and associated components and accessories produced by a single manufacturer and obtained from a single supplier.

2.2 PACKAGED ENGINE GENERATOR SYSTEM

- A. Provide new engine generator system consisting of all required equipment, sensors, conduit, boxes, wiring, piping, supports, accessories, system programming, etc. as necessary for a complete operating system that provides the functional intent indicated.
- B. Provide products listed, classified, and labeled as suitable for the purpose intended.
- C. System Description:
 - 1. Application: Emergency/standby.
 - 2. Configuration: Single packaged engine generator set operated independently (not in parallel).
- D. Packaged Engine Generator Set:
 - 1. Type: Diesel (compression ignition).
 - 2. Power Rating: As indicated on the drawings.
 - 3. Voltage: As indicated on drawings.
 - 4. Main Line Circuit Breaker:
 - a. Type: Thermal magnetic.
 - b. Trip Rating: Select according to generator set rating.
 - c. Features:
 - 1) Shunt trip.
 - 2) Auxiliary contacts.
- E. Generator Set General Requirements:
 - 1. Prototype tested in accordance with NFPA 110 for Level 2 systems.
 - 2. Factory-assembled, with components mounted on suitable base.
 - 3. List and label engine generator assembly as complying with UL 2200.
 - 4. Power Factor: Unless otherwise indicated, specified power ratings are at 0.8 power factor for three phase voltages and 1.0 power factor for single phase voltages.
 - 5. Provide suitable guards to protect personnel from accidental contact with rotating parts, hot piping, and other potential sources of injury.
 - 6. Main Line Circuit Breakers: Provide factory-installed line side connections with suitable lugs for load side connections.
- F. Seismic Qualification: Provide engine generator assemblies and associated components suitable for application under the seismic design criteria specified in Section 23 05 48 where required. Include certification of compliance with submittals.
- G. Service Conditions: Provide engine generator system and associated components suitable for operation under the service conditions at the installed location.
- H. Starting and Load Acceptance Requirements:
 - 1. Cranking Method: Cycle cranking complying with NFPA 110 (15 second crank period, followed by 15 second rest period, with cranking limiter time-out after 3 cycles), unless otherwise required.
 - 2. Cranking Limiter Time-Out: If generator set fails to start after specified cranking period, indicate overcrank alarm condition and lock-out generator set from further cranking until manually reset.
 - 3. Start Time: Capable of starting and achieving conditions necessary for load acceptance within 10 seconds (NFPA 110, Type 10).
 - 4. Maximum Load Step: Supports 100 percent of rated load in one step.
 - a. Maximum Voltage Deviation with Load Step: 30 percent.
 - b. Maximum Frequency Deviation with Load Step: 30 percent.
- I. Exhaust Emissions Requirements:
 - 1. Comply with federal (EPA), state, and local regulations applicable at the time of commissioning; include factory emissions certification with submittals.

2. Do not make modifications affecting generator set factory emissions certification without approval of manufacturer and Engineer. Where such modifications are made, provide field emissions testing as necessary for certification.
- J. Sound Level Requirements:
 1. Do not exceed 75 dBA when measured at 23 feet from generator set in free field (no sound barriers) while operating at full load; include manufacturer's sound data with submittals.

2.3 ENGINE AND ENGINE ACCESSORY EQUIPMENT

- A. Provide engine with adequate horsepower to achieve specified power output at rated speed, accounting for alternator efficiency and parasitic loads.
- B. Engine Fuel System - Diesel (Compression Ignition):
 1. Fuel Source: Diesel, ASTM D975 No. 2-D or approved cold weather diesel blends.
 2. Fuel Storage: Sub-base fuel tank.
 3. Engine Fuel Supply: Provide engine-driven, positive displacement fuel pump with replaceable fuel filter(s), water separator, check valve to secure prime, manual fuel priming pump, and relief-bypass valve. Provide fuel cooler where recommended by manufacturer.
 4. Engine Fuel Connections: Provide suitable, approved flexible fuel lines for coupling engine to fuel source.
 5. Sub-Base Fuel Tank:
 - a. Provide sub-base mounted, double-wall fuel tank with secondary containment; listed and labeled as complying with UL 142.
 - b. Tank Capacity: Size for minimum of 48 hours of continuous engine generator operation at 100 percent rated load.
 - c. Features:
 - 1) Direct reading fuel level gauge.
 - 2) Normal atmospheric vent.
 - 3) Emergency pressure relief vent.
 - 4) Fuel fill opening with lockable cap.
 - 5) Dedicated electrical conduit stub-up area.
 - 6) Low fuel level switch.
 - 7) Leak detection switch; located within secondary containment interstitial space for detection of primary tank fuel leak.
- C. Engine Starting System:
 1. System Type: Electric, with DC solenoid-activated starting motor(s).
 2. Battery(s):
 - a. Battery Type: Lead-acid.
 - b. Battery Capacity: Size according to manufacturer's recommendations for achieving starting and load acceptance requirements under worst case ambient temperature; capable of providing cranking through two complete periods of cranking limiter time-outs without recharging.
 - c. Provide battery rack, cables, and connectors suitable for the supplied battery(s); size battery cables according to manufacturer's recommendations for cable length to be installed.
 3. Battery-Charging Alternator: Engine-driven, with integral solid-state voltage regulation.
 4. Battery Charger:
 - a. Provide dual rate battery charger with automatic float and equalize charging modes and minimum rating of 10 amps; suitable for maintaining the supplied battery(s) at full charge without manual intervention.
 - b. Capable of returning supplied battery(s) from fully discharged to fully charged condition within 24 hours, as required by NFPA 110 for Level 2 applications while carrying normal loads.
 - c. Recognized as complying with UL 1236.

- d. Furnished with integral overcurrent protection; current limited to protect charger during engine cranking; reverse polarity protection.
 - e. Provide integral DC output ammeter and voltmeter with five percent accuracy.
 - f. Provide alarm output contacts as necessary for alarm indications.
 - 5. Battery Heater: Provide thermostatically controlled battery heater to improve starting under cold ambient conditions.
 - D. Engine Speed Control System (Governor):
 - 1. Single Engine Generator Sets (Not Operated in Parallel): Provide electronic isochronous governor for controlling engine speed/alternator frequency.
 - 2. Frequency Regulation, Electronic Isochronous Governors: No change in frequency from no load to full load; plus/minus 0.25 percent at steady state.
 - E. Engine Lubrication System:
 - 1. System Type: Full pressure, with engine-driven, positive displacement lubrication oil pump, replaceable full-flow oil filter(s), and dip-stick for oil level indication. Provide oil cooler where recommended by manufacturer.
 - 2. Oil Heater: Provide thermostatically controlled oil heater to improve starting under cold ambient conditions.
 - F. Engine Cooling System:
 - 1. System Type: Closed-loop, liquid-cooled, with unit-mounted radiator/fan and engine-driven coolant pump; suitable for providing adequate cooling while operating at full load under worst case ambient temperature.
 - 2. Fan Guard: Provide suitable guard to protect personnel from accidental contact with fan.
 - 3. Coolant Heater: Provide thermostatically controlled coolant heater to improve starting under cold ambient conditions; size according to manufacturer's recommendations for achieving starting and load acceptance requirements under worst case ambient temperature.
 - G. Engine Air Intake and Exhaust System:
 - 1. Air Intake Filtration: Provide engine-mounted, replaceable, dry element filter.
 - 2. Engine Exhaust Connection: Provide suitable, approved flexible connector for coupling engine to exhaust system.
 - 3. Exhaust Silencer: Provide critical grade or better exhaust silencer with sound attenuation not less than basis of design; select according to manufacturer's recommendations to meet sound performance requirements, where specified.
- 2.4 ALTERNATOR (GENERATOR)
- A. Alternator: 4-pole, 1800 rpm (60 Hz output) revolving field, synchronous generator complying with NEMA MG 1; connected to engine with flexible coupling; voltage output configuration as indicated, with reconnectable leads for 3 phase alternators.
 - B. Exciter:
 - 1. Exciter Type: Brushless; provide permanent magnet generator (PMG) excitation system; self-excited (shunt) systems are not permitted.
 - 2. PMG Excitation Short-Circuit Current Support: Capable of sustaining 300 percent of rated output current for 10 seconds.
 - 3. Voltage Regulation (with PMG excitation): Plus/minus 0.5 percent for any constant load from no load to full load.
 - C. Temperature Rise: Comply with UL 2200.
 - D. Insulation System: NEMA MG 1, Class H; suitable for alternator temperature rise.
 - E. Enclosure: NEMA MG 1, drip-proof.
 - F. Total Harmonic Distortion: Not greater than five percent.
 - G. Alternator Heater: Provide strip heater to prevent moisture condensation on alternator windings.

2.5 GENERATOR SET CONTROL SYSTEM

- A. Provide microprocessor-based control system for automatic control, monitoring, and protection of generator set. Include sensors, wiring, and connections necessary for functions/indications specified.
- B. Control Panel:
 1. Control Panel Mounting: Unit-mounted unless otherwise indicated; vibration isolated.
 2. Generator Set Control Functions:
 - a. Automatic Mode: Initiates generator set start/shutdown upon receiving corresponding signal from remote device (e.g. automatic transfer switch).
 - b. Manual Mode: Initiates generator set start/shutdown upon direction from operator.
 - c. Reset Mode: Clears all faults, allowing generator set restart after a shutdown.
 - d. Emergency Stop: Immediately shuts down generator set (without time delay) and prevents automatic restarting until manually reset.
 - e. Cycle Cranking: Programmable crank time, rest time, and number of cycles.
 - f. Time Delay: Programmable for shutdown (engine cooldown) and start (engine warmup).
 - g. Voltage Adjustment: Adjustable through range of plus/minus 5 percent.
 3. Generator Set Status Indications:
 - a. Voltage (Volts AC): Line-to-line, line-to-neutral for each phase.
 - b. Current (Amps): For each phase.
 - c. Frequency (Hz).
 - d. Real power (W/kW).
 - e. Reactive power (VAR/kVAR).
 - f. Apparent power (VA/kVA).
 - g. Power factor.
 - h. Duty Level: Actual load as percentage of rated power.
 - i. Engine speed (RPM).
 - j. Battery voltage (Volts DC).
 - k. Engine oil pressure.
 - l. Engine coolant temperature.
 - m. Engine run time.
 - n. Generator powering load (position signal from transfer switch).
 4. Generator Set Protection and Warning/Shutdown Indications:
 - a. Comply with NFPA 110; configurable for NFPA 110 Level 2 systems including but not limited to the following protections/indications:
 - 1) Overcrank (shutdown).
 - 2) Low coolant temperature (warning).
 - 3) High coolant temperature (warning).
 - 4) High coolant temperature (shutdown).
 - 5) Low oil pressure (warning).
 - 6) Low oil pressure (shutdown).
 - 7) Overspeed (shutdown).
 - 8) Low fuel level (warning).
 - 9) Low coolant level (warning/shutdown).
 - 10) Generator control not in automatic mode (warning).
 - 11) High battery voltage (warning).
 - 12) Low cranking voltage (warning).
 - 13) Low battery voltage (warning).
 - 14) Battery charger failure (warning).
 - b. In addition to NFPA 110 requirements, provide the following protections/indications:
 - 1) High AC voltage (shutdown).
 - 2) Low AC voltage (shutdown).
 - 3) High frequency (shutdown).

- 4) Low frequency (shutdown).
 - 5) Overcurrent (shutdown).
 - 6) Fuel tank leak (warning), where applicable.
 - c. Provide contacts for local and remote common alarm.
 - d. Provide lamp test function that illuminates all indicator lamps.
 5. Other Control Panel Features:
 - a. Event log.
 - b. Communications Capability: Compatible with system indicated. Provide all accessories necessary for proper interface.
 - c. Remote monitoring capability via PC.
 - C. Remote Annunciator:
 1. Remote Annunciator Mounting: Wall-mounted; Provide flush-mounted annunciator for finished areas and surface-mounted annunciator for non-finished areas unless otherwise indicated.
 2. Generator Set Status Indications:
 - a. Generator powering load (via position signal from transfer switch).
 - b. Communication functional.
 3. Generator Set Warning/Shutdown Indications:
 - a. Comply with NFPA 110; configurable for NFPA 110 Level 2 systems including but not limited to the following indications:
 - 1) Overcrank (shutdown).
 - 2) Low coolant temperature (warning).
 - 3) High coolant temperature (warning).
 - 4) High coolant temperature (shutdown).
 - 5) Low oil pressure (warning).
 - 6) Low oil pressure (shutdown).
 - 7) Overspeed (shutdown).
 - 8) Low fuel level (warning).
 - 9) Low coolant level (warning/shutdown).
 - 10) Generator control not in automatic mode (warning).
 - 11) High battery voltage (warning).
 - 12) Low cranking voltage (warning).
 - 13) Low battery voltage (warning).
 - 14) Battery charger failure (warning).
 - b. Provide audible alarm with silence function.
 - c. Provide lamp test function that illuminates all indicator lamps.
 - D. Remote Emergency Stop: Provide approved red, mushroom style remote emergency stop button where indicated or required by authorities having jurisdiction.
- 2.6 GENERATOR SET ENCLOSURE
- A. Enclosure Type: Level 2 weather protective.
 - B. Enclosure Material: Steel or aluminum.
 - C. Hardware Material: Stainless steel.
 - D. Color: Manufacturer's standard.
 - E. Access Doors: Lockable, with all locks keyed alike.
 - F. Openings: Designed to prevent bird/rodent entry.
 - G. External Drains: Extend oil and coolant drain lines to exterior of enclosure for maintenance service.
 - H. Sound Attenuating Enclosures: Line enclosure with non-hydroscopic, self-extinguishing sound-attenuating material.

- I. Exhaust Silencers: Where exhaust silencers are mounted within enclosure in main engine compartment, insulate silencer to minimize heat dissipation as necessary for operation at rated load under worst case ambient temperature.

2.7 SOURCE QUALITY CONTROL

- A. See Section 01 40 00 - Quality Requirements, for additional requirements.
- B. Perform production tests on generator sets at factory to verify operation and performance characteristics prior to shipment. Include certified test report with submittals.
- C. Generator Set production testing to include, at a minimum:
 - 1. Operation at rated load and rated power factor.
 - 2. Single step load pick-up.
 - 3. Transient and steady state voltage and frequency performance.
 - 4. Operation of safety shutdowns.
- D. Diesel Fuel Storage Tanks: Perform pressurized leak test prior to shipment.

PART 3 EXECUTION

3.1 EXAMINATION

- A. Verify that field measurements are as indicated.
- B. Verify that the ratings and configurations of generator sets and auxiliary equipment are consistent with the indicated requirements.
- C. Verify that rough-ins for field connections are in the proper locations.
- D. Verify that mounting surfaces are ready to receive equipment.
- E. Verify that conditions are satisfactory for installation prior to starting work.

3.2 INSTALLATION

- A. Perform work in accordance with NECA 1 (general workmanship).
- B. Install products in accordance with manufacturer's instructions.
- C. Install generator sets and associated accessories in accordance with NECA/EGSA 404.
- D. Arrange equipment to provide minimum clearances and required maintenance access.
- E. Provide required support and attachment in accordance with Section 26 05 29.
- F. See Section 23 05 48 for vibration isolation/seismic controls.
- G. Use manufacturer's recommended oil and coolant, suitable for the worst case ambient temperatures.
- H. Provide grounding and bonding in accordance with Section 26 05 26.
- I. Identify system wiring and components in accordance with Section 26 05 53.

3.3 FIELD QUALITY CONTROL

- A. See Section 01 40 00 - Quality Requirements, for additional requirements.
- B. Provide services of a manufacturer's authorized representative to prepare and start systems and perform inspection and testing. Include manufacturer's detailed testing procedures and field reports with submittals.
- C. Notify Owner and Architect at least two weeks prior to scheduled inspections and tests.
- D. Notify authorities having jurisdiction and comply with their requirements for scheduling inspections and tests and for observation by their personnel.
- E. Provide all equipment, tools, and supplies required to accomplish inspection and testing, including load bank and fuel.
- F. Preliminary inspection and testing to include, at a minimum:
 - 1. Inspect each system component for damage and defects.

2. Verify tightness of mechanical and electrical connections are according to manufacturer's recommended torque settings.
 3. Check for proper oil and coolant levels.
 - G. Prepare and start system in accordance with manufacturer's instructions.
 - H. Perform acceptance test in accordance with NFPA 110.
 - I. Inspection and testing to include, at a minimum:
 1. Verify compliance with starting and load acceptance requirements.
 2. Verify voltage and frequency; make required adjustments as necessary.
 3. Verify phase sequence.
 4. Verify control system operation, including safety shutdowns.
 5. Verify operation of auxiliary equipment and accessories (e.g. battery charger, heaters, etc.).
 6. Perform load tests in accordance with NFPA 110 (1.5 hour building load test followed by 2 hour full load test).
 - J. Provide field emissions testing where necessary for certification.
 - K. Sound Level Tests: Measure sound levels for compliance with specified requirements. Identify and report ambient noise conditions.
 - L. Correct defective work, adjust for proper operation, and retest until entire system complies with Contract Documents.
 - M. Submit detailed reports indicating inspection and testing results and corrective actions taken.
- 3.4 CLEANING
- A. Clean exposed surfaces to remove dirt, paint, or other foreign material and restore to match original factory finish.
- 3.5 CLOSEOUT ACTIVITIES
- A. See Section 01 77 00 - Closeout Procedures, for closeout submittals.
 - B. See Section 01 79 00 - Demonstration and Training, for additional requirements.
 - C. Demonstration: Demonstrate proper operation of system to Owner, and correct deficiencies or make adjustments as directed.
 - D. Training: Train Owner's personnel on operation, adjustment, and maintenance of system.
 1. Use operation and maintenance manual as training reference, supplemented with additional training materials as required.
 2. Provide minimum of four hours of training.
 3. Instructor: Manufacturer's authorized representative.
 4. Location: At project site.
 - E. After successful acceptance test and just prior to Substantial Completion, replace air, oil, and fuel filters and fill fuel storage tank.
- 3.6 PROTECTION
- A. Protect installed engine generator system from subsequent construction operations.
- 3.7 MAINTENANCE
- A. See Section 01 70 00 - Execution and Closeout Requirements, for additional requirements relating to maintenance service.
 - B. Provide to Owner a proposal for a separate maintenance contract for the service and maintenance of engine generator system for two years from date of Substantial Completion; Include a complete description of preventive maintenance, systematic examination, adjustment, inspection, and testing, with a detailed schedule.

- C. Maintain an on-site log listing the date and time of each inspection and call-back visit, the condition of the system, nature of the trouble, correction performed, and parts replaced.

END OF SECTION

SECTION 26 36 00

TRANSFER SWITCHES

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Transfer switches for low-voltage (600 V and less) applications and associated accessories:
 - 1. Automatic transfer switches.

1.2 REFERENCE STANDARDS

- A. NECA 1 - Standard for Good Workmanship in Electrical Construction.
- B. NEMA 250 - Enclosures for Electrical Equipment (1000 Volts Maximum).
- C. NEMA ICS 10 Part 1 - Industrial Control and Systems Part 1: Electromechanical AC Transfer Switch Equipment.
- D. NETA ATS - Acceptance Testing Specifications for Electrical Power Equipment and Systems.
- E. NFPA 70 - National Electrical Code; Most Recent Edition Adopted by Authority Having Jurisdiction, Including All Applicable Amendments and Supplements.
- F. NFPA 110 - Standard for Emergency and Standby Power Systems.
- G. UL 869A - Reference Standard for Service Equipment; Current Edition, Including All Revisions.
- H. UL 1008 - Transfer Switch Equipment; Current Edition, Including All Revisions.

1.3 ADMINISTRATIVE REQUIREMENTS

- A. Coordination:
 - 1. Coordinate compatibility of transfer switches to be installed with work provided under other sections or by others.
 - a. Engine Generators: See Section 26 32 13.
 - 2. Coordinate the work with other trades to avoid placement of ductwork, piping, equipment, or other potential obstructions within the dedicated equipment spaces and working clearances required by NFPA 70.
 - 3. Coordinate arrangement of equipment with the dimensions and clearance requirements of the actual equipment to be installed.
 - 4. Coordinate the work with placement of supports, anchors, etc. required for mounting.
 - 5. Notify Architect of any conflicts with or deviations from Contract Documents. Obtain direction before proceeding with work.

1.4 SUBMITTALS

- A. See Section 01 33 00 – Submittal Procedures for submittal procedures.
- B. Product Data: Provide manufacturer's standard catalog pages and data sheets for each product, including ratings, configurations, dimensions, finishes, weights, service condition requirements, and installed features.
 - 1. Where applicable, include characteristic trip curves for overcurrent protective devices upon request.
- C. Shop Drawings: Include dimensioned plan views and sections indicating locations of system components, required clearances, and field connection locations. Include system interconnection schematic diagrams showing all factory and field connections.
 - 1. Clearly indicate whether proposed short circuit current ratings are based on testing with specific overcurrent protective devices or time durations; indicate short-time ratings where applicable.
 - 2. Identify mounting conditions required for equipment seismic qualification.
- D. Manufacturer's equipment seismic qualification certification.
- E. Specimen Warranty: Submit sample of manufacturer's warranty.

- F. Manufacturer's Installation Instructions: Indicate application conditions and limitations of use stipulated by product testing agency. Include instructions for storage, handling, protection, examination, preparation, installation, and operation of product.
- G. Manufacturer's certification that products meet or exceed specified requirements.
- H. Source quality control test reports.
- I. Manufacturer's detailed field testing procedures.
- J. Field quality control test reports.
- K. Operation and Maintenance Data: Include detailed information on system operation, equipment programming and setup, replacement parts, and recommended maintenance procedures and intervals.
- L. Executed Warranty: Submit documentation of final executed warranty completed in Owner's name and registered with manufacturer.
- M. Project Record Documents: Record actual locations of system components, installed circuiting arrangements and routing, and final equipment settings.
- N. Maintenance Materials: Furnish the following for Owner's use in maintenance of project.
 - 1. See Section 01 60 00 - Product Requirements, for additional provisions.

1.5 QUALITY ASSURANCE

- A. Comply with the following:
 - 1. NFPA 70 (National Electrical Code).
 - 2. NFPA 110 (Standard for Emergency and Standby Power Systems); meet requirements for system Level specified in Section 26 32 13.
- B. Maintain at the project site a copy of each referenced document that prescribes execution requirements.
- C. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum three years documented experience.
 - 1. Authorized service facilities located within 200 miles of project site.
- D. Product Listing Organization Qualifications: An organization recognized by OSHA as a Nationally Recognized Testing Laboratory (NRTL) and acceptable to authorities having jurisdiction.

1.6 DELIVERY, STORAGE, AND HANDLING

- A. Receive, inspect, handle, and store transfer switches in accordance with manufacturer's instructions.
- B. Store in a clean, dry space. Maintain factory wrapping or provide an additional heavy canvas or heavy plastic cover to protect units from dirt, water, construction debris, and traffic.
- C. Handle carefully in accordance with manufacturer's instructions to avoid damage to transfer switch components, enclosure, and finish.

1.7 FIELD CONDITIONS

- A. Maintain field conditions within manufacturer's required service conditions during and after installation.

1.8 WARRANTY

- A. See Section 01 77 00 - Closeout Procedures, for additional warranty requirements.

PART 2 PRODUCTS

2.1 MANUFACTURERS

- A. Transfer Switches -
 - 1. ABB/GE; www.electrification.us.abb.com
 - 2. ASCO Power Technologies; www.ascopower.com
 - 3. Eaton Corporation: www.eaton.com

4. Thompson Power Systems: www.thomsonps.com
 5. Generac Power Systems; www.generac.com
 6. Same as manufacturer of engine generator(s) used for this project.
- B. Substitutions: See Section 01 60 00 - Product Requirements.
- C. Products other than basis of design are subject to compliance with specified requirements and prior approval of Engineer. By using products other than basis of design, Contractor accepts responsibility for costs associated with any necessary modifications to related work, including any design fees.
- D. Source Limitations: Furnish transfer switches and accessories produced by a single manufacturer and obtained from a single supplier.

2.2 TRANSFER SWITCHES

- A. Provide complete power transfer system consisting of all required equipment, conduit, boxes, wiring, supports, accessories, system programming, etc. as necessary for a complete operating system that provides the functional intent indicated.
- B. Provide products listed, classified, and labeled as suitable for the purpose intended.
- C. Applications:
 1. Utilize open transition transfer unless otherwise indicated or required.
 2. For transfer of highly inductive loads (e.g. large motors and transformers), utilize open transition transfer with delayed transition transfer.
 3. Neutral Switching (Single Phase, Three Wire and Three Phase, Four Wire Systems):
 - a. Unless otherwise indicated or required, provide switched neutral.
- D. Construction Type: "Contactor type" (open contact).
- E. Automatic Transfer Switch:
 1. Basis of Design: Eaton.
 2. Transfer Switch Type: Contractor Type.
 3. Transition Configuration: Open.
 4. Voltage: As indicated on the drawings.
 5. Ampere Rating: As indicated on the drawings.
 6. Neutral Configuration: Solid neutral switched.
 7. Load Served: As indicated on the drawings.
 8. Primary Source: As indicated on the drawings.
 9. Alternate Source: As indicated on the drawings.
- F. Comply with NEMA ICS 10 Part 1, and list and label as complying with UL 1008 for the classification of the intended application (e.g. emergency, optional standby).
- G. Load Classification: Classified for total system load (any combination of motor, LED lighting and miscellaneous equipment).
- H. Switching Methods:
 1. Open Transition:
 - a. Provide break-before-make transfer without a neutral position that is not connected to either source, and with interlocks to prevent simultaneous connection of the load to both sources.
 2. Delayed Transition: Live source to live source.
 - a. Provide break-before-make transfer with programmable time delay in a neutral position not connected to either source, and with interlocks to prevent simultaneous connection of the load to both sources.
 5. Obtain control power for transfer operation from line side of source to which the load is to be transferred.
- I. Seismic Qualification: Provide transfer switches and associated components suitable for application under the seismic design criteria specified in Section 23 05 48 where required. Include certification of compliance with submittals.

- J. Service Conditions: Provide transfer switches suitable for continuous operation at indicated ratings under the service conditions at the installed location.
- K. Enclosures:
 - 1. Environment Type per NEMA 250: Unless otherwise indicated, as specified for the following installation locations:
 - a. Indoor Clean, Dry Locations: Type 1 or Type 12.
 - 2. Finish: Manufacturer's standard unless otherwise indicated.
- L. Short Circuit Current Rating:
 - 1. Withstand and Closing Rating: Provide transfer switches, when protected by the supply side overcurrent protective devices to be installed, with listed withstand and closing rating not less than the available fault current at the installed location as indicated on the drawings.
 - 2. Short Time Rating: Where the requirement for selectivity is indicated, provide transfer switches with short time ratings suitable for the maximum short time delay setting of the supply side overcurrent protective device.
- M. Automatic Transfer Switches:
 - 1. Description: Transfer switches with automatically initiated transfer between sources; electrically operated and mechanically held.
 - 2. Control Functions:
 - a. Automatic mode.
 - b. Test Mode: Simulates failure of primary/normal source.
 - c. Voltage and Frequency Sensing:
 - 1) Undervoltage sensing for each phase of primary/normal source; adjustable dropout/pickup settings.
 - 2) Undervoltage sensing for alternate/emergency source; adjustable dropout/pickup settings.
 - 3) Underfrequency sensing for alternate/emergency source; adjustable dropout/pickup settings.
 - d. Outputs:
 - 1) Contacts for engine start/shutdown (except where direct generator communication interface is provided).
 - 2) Auxiliary contacts; one set(s) for each switch position.
 - 3) Signal before transfer (load disconnect) contacts; for selective load disconnection prior to transfer.
 - e. Adjustable Time Delays:
 - 1) Engine generator start time delay; delays engine start signal to override momentary primary/normal source failures.
 - 2) Transfer to alternate/emergency source time delay.
 - 3) Retransfer to primary/normal source time delay.
 - 4) Signal before transfer (load disconnect) contact time delay.
 - 5) Engine generator cooldown time delay; delays engine shutdown following retransfer to primary/normal source to permit generator to run unloaded for cooldown period.
 - f. In-Phase Monitor (Open Transition Transfer Switches): Monitors phase angle difference between sources for initiating in-phase transfer.
 - g. Engine Exerciser: Provides programmable scheduled exercising of engine generator selectable with or without transfer to load; provides memory retention during power outage.
 - 3. Status Indications:
 - a. Connected to alternate/emergency source.
 - b. Connected to primary/normal source.
 - c. Alternate/emergency source available.
 - d. Primary/normal source available.

4. Other Features:
 - a. Event log.
 - b. Communications Capability: Compatible with system indicated. Provide all accessories necessary for proper interface.
 - c. Remote monitoring capability via PC.
 5. Automatic Sequence of Operations:
 - a. Upon failure of primary/normal source for a programmable time period (engine generator start time delay), initiate starting of engine generator where applicable.
 - b. Where applicable, initiate signal before transfer (load disconnect) contacts at programmable time before transfer.
 - c. When alternate/emergency source is available, transfer load to alternate/emergency source after programmable time delay.
 - d. When primary/normal source has been restored, retransfer to primary/normal source after a programmable time delay. Bypass time delay if alternate/emergency source fails and primary/normal source is available.
 - e. Initiate shutdown of engine generator after programmable engine cooldown time delay.
- N. Remote Annunciators:
1. Remote Annunciator Mounting: Wall-mounted; Provide flush-mounted annunciator for finished areas and surface-mounted annunciator for non-finished areas unless otherwise indicated.
 2. Transfer Switch Status Indications:
 - a. Connected to alternate/emergency source.
 - b. Connected to primary/normal source.
 - c. Alternate/emergency source available.
 - d. Primary/normal source available.
- O. Interface with Other Work:
1. Interface with engine generators as specified in Section 26 32 13.
- 2.3 SOURCE QUALITY CONTROL
- A. See Section 01 40 00 - Quality Requirements, for additional requirements.
- PART 3 EXECUTION
- 3.1 EXAMINATION
- A. Verify that field measurements are as indicated.
 - B. Verify that the ratings and configurations of transfer switches are consistent with the indicated requirements.
 - C. Verify that rough-ins for field connections are in the proper locations.
 - D. Verify that mounting surfaces are ready to receive transfer switches.
 - E. Verify that conditions are satisfactory for installation prior to starting work.
- 3.2 INSTALLATION
- A. Perform work in accordance with NECA 1 (general workmanship).
 - B. Install products in accordance with manufacturer's instructions.
 - C. Arrange equipment to provide minimum clearances and required maintenance access.
 - D. Provide required support and attachment in accordance with Section 26 05 29.
 - E. Provide required seismic controls in accordance with Section 23 05 48.
 - F. Install transfer switches plumb and level.
 - G. Provide grounding and bonding in accordance with Section 26 05 26.
 - H. Identify transfer switches and associated system wiring in accordance with Section 26 05 53.

3.3 FIELD QUALITY CONTROL

- A. See Section 01 40 00 - Quality Requirements, for additional requirements.
- B. Provide services of a manufacturer's authorized representative to observe installation and assist in inspection and testing. Include manufacturer's detailed testing procedures and field reports with submittals.
- C. Prepare and start system in accordance with manufacturer's instructions.
- D. Automatic Transfer Switches:
 - 1. Inspect and test in accordance with NETA ATS, except Section 4.
 - 2. Perform inspections and tests listed in NETA ATS, Section 7.22.3. The insulation-resistance tests listed as optional are not required.
- E. Provide additional inspection and testing as required for completion of associated engine generator testing as specified in Section 26 32 13.
- F. Correct defective work, adjust for proper operation, and retest until entire system complies with Contract Documents.
- G. Submit detailed reports indicating inspection and testing results and corrective actions taken.

3.4 CLEANING

- A. Clean exposed surfaces to remove dirt, paint, or other foreign material and restore to match original factory finish.

3.5 CLOSEOUT ACTIVITIES

- A. See Section 01 78 00 - Closeout Submittals, for closeout submittals.
- B. See Section 01 79 00 - Demonstration and Training, for additional requirements.
- C. Demonstration: Demonstrate proper operation of transfer switches to Owner, and correct deficiencies or make adjustments as directed.
- D. Training: Train Owner's personnel on operation, adjustment, and maintenance of transfer switches.
 - 1. Use operation and maintenance manual as training reference, supplemented with additional training materials as required.
 - 2. Provide minimum of two hours of training.
 - 3. Instructor: Manufacturer's authorized representative.
 - 4. Location: At project site.
- E. Coordinate with related generator demonstration and training as specified in Section 26 32 13.

3.6 PROTECTION

- A. Protect installed transfer switches from subsequent construction operations.

3.7 MAINTENANCE

- A. See Section 01 70 00 - Execution and Closeout Requirements, for additional requirements relating to maintenance service.
- B. Maintain an on-site log listing the date and time of each inspection and call-back visit, the condition of the system, nature of the trouble, correction performed, and parts replaced.

END OF SECTION

SECTION 26 51 00

INTERIOR LIGHTING

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Interior luminaires.
- B. Emergency lighting units.
- C. Exit signs.
- D. LED drivers.
- E. Accessories.

1.2 REFERENCE STANDARDS

- A. 47 CFR 15 - Radio Frequency Devices; current edition.
- B. IEC 60529 - Degrees of Protection Provided by Enclosures (IP Code).
- C. IEEE C62.41.2 - IEEE Recommended Practice on Characterization of Surges in Low-Voltage (1000 V and less) AC Power Circuits.
- D. IES LM-63 - IESNA Standard File Format for Electronic Transfer of Photometric Data and Related Information.
- E. IES LM-79 - Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products.
- F. IES LM-80 - Approved Method: Measuring Luminous Flux and Color Maintenance of LED Packages, Arrays, and Modules.
- G. NECA 1 - Standard for Good Workmanship in Electrical Construction.
- H. NECA/IESNA 500 - Standard for Installing Indoor Commercial Lighting Systems.
- I. NEMA 410 - Performance Testing for Lighting Controls and Switching Devices with Electronic Drivers and Discharge Ballasts.
- J. NEMA LE 4 - Recessed Luminaires, Ceiling Compatibility.
- K. NFPA 70 - National Electrical Code; Most Recent Edition Adopted by Authority Having Jurisdiction, Including All Applicable Amendments and Supplements.
- L. NFPA 101 - Life Safety Code; Most Recent Edition Adopted by Authority Having Jurisdiction, Including All Applicable Amendments and Supplements.
- M. UL 924 - Emergency Lighting and Power Equipment; Current Edition, Including All Revisions.
- N. UL 1598 - Luminaires; Current Edition, Including All Revisions.
- O. UL 8750 - Light Emitting Diode (LED) Equipment for Use in Lighting Products; Current Edition, Including All Revisions.

1.3 ADMINISTRATIVE REQUIREMENTS

- A. Coordination:
 - 1. Coordinate the installation of luminaires with mounting surfaces installed under other sections or by others. Coordinate the work with placement of supports, anchors, etc. required for mounting. Coordinate compatibility of luminaires and associated trims with mounting surfaces at installed locations.
 - 2. Coordinate the placement of luminaires with structural members, ductwork, piping, equipment, diffusers, fire suppression system components, and other potential conflicts installed under other sections or by others.
 - 3. Coordinate the placement of exit signs with furniture, equipment, signage or other potential obstructions to visibility installed under other sections or by others.

4. Notify Architect of any conflicts or deviations from Contract Documents to obtain direction prior to proceeding with work.

1.4 SUBMITTALS

- A. See Section 01 33 00 – Submittal Procedures for submittal procedures.
- B. Product Data: Provide manufacturer's standard catalog pages and data sheets including detailed information on luminaire construction, dimensions, ratings, finishes, mounting requirements, listings, service conditions, photometric performance, installed accessories, and ceiling compatibility; include model number nomenclature clearly marked with all proposed features.
 1. Provide electronic files of photometric data certified by a National Voluntary Laboratory Accreditation Program (NVLAP) lab or independent testing agency in IES LM-63 standard format upon request.
- C. Certificates for Dimming Drivers: Manufacturer's documentation of compatibility with dimming controls to be installed.
- D. Field quality control reports.
- E. Manufacturer's Installation Instructions: Indicate application conditions and limitations of use stipulated by product testing agency. Include instructions for storage, handling, protection, examination, preparation, and installation of product.

1.5 QUALITY ASSURANCE

- A. Comply with requirements of NFPA 70.
- B. Maintain at the project site a copy of each referenced document that prescribes execution requirements.
- C. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum three years documented experience.
- D. Product Listing Organization Qualifications: An organization recognized by OSHA as a Nationally Recognized Testing Laboratory (NRTL) and acceptable to authorities having jurisdiction.

1.6 DELIVERY, STORAGE, AND PROTECTION

- A. Receive, handle, and store products according to NECA/IESNA 500 (commercial lighting), NECA/IESNA 502 (industrial lighting), and manufacturer's written instructions.
- B. Keep products in original manufacturer's packaging and protect from damage until ready for installation.

1.7 FIELD CONDITIONS

- A. Maintain field conditions within manufacturer's required service conditions during and after installation.

1.8 WARRANTY

- A. See Section 01 77 00 - Closeout Procedures, for additional warranty requirements.
- B. Provide three year manufacturer warranty for LED luminaires, including drivers.
- C. Provide five year pro-rata warranty for batteries for emergency lighting units.
- D. Provide ten year pro-rata warranty for batteries for self-powered exit signs.

PART 2 PRODUCTS

2.1 LUMINAIRE TYPES

- A. Furnish products as indicated in luminaire schedule included on the drawings.
- B. Substitutions: See Section 01 60 00 - Product Requirements.

2.2 LUMINAIRES

- A. Manufacturers:
 - 1. Acuity Brands, Inc: www.acuitybrands.com
 - 2. Cooper Lighting, a division of Cooper Industries: www.cooperindustries.com
 - 3. Hubbell Lighting, Inc: www.hubbelllighting.com
- B. Provide products that comply with requirements of NFPA 70.
- C. Provide products that are listed and labeled as complying with UL 1598, where applicable.
- D. Provide products listed, classified, and labeled as suitable for the purpose intended.
- E. Provide products complying with Federal Energy Management Program (FEMP) requirements.
- F. Unless otherwise indicated, provide complete luminaires including lamp(s) and all sockets, ballasts, reflectors, lenses, housings and other components required to position, energize and protect the lamp and distribute the light.
- G. Unless specifically indicated to be excluded, provide all required conduit, boxes, wiring, connectors, hardware, supports, trims, accessories, etc. as necessary for a complete operating system.
- H. Provide products suitable to withstand normal handling, installation, and service without any damage, distortion, corrosion, fading, discoloring, etc.
- I. Recessed Luminaires:
 - 1. Ceiling Compatibility: Comply with NEMA LE 4.
- J. LED Luminaires:
 - 1. Components: UL 8750 recognized or listed as applicable.
 - 2. Tested in accordance with IES LM-79 and IES LM-80.
 - 3. LED Estimated Useful Life: Minimum of 50,000 hours at 70 percent lumen maintenance, calculated based on IES LM-80 test data.

2.3 EXIT SIGNS

- A. Description: Exit signs complying with NFPA 101 and applicable state and local codes, and listed and labeled as complying with UL 924.
 - 1. Number of Faces: Single- or double-face as indicated or as required for installed location.
 - 2. Directional Arrows: As indicated or as required for installed location.
- B. Exit Signs: Internally illuminated with LEDs unless otherwise indicated.
 - 1. Manufacturers:
 - a. Acuity Brands, Inc; www.acuitybrands.com
 - b. Cooper Lighting, a division of Cooper Industries; www.cooperindustries.com
 - c. Hubbell Lighting, Inc; www.hubbelllighting.com
 - 2. Self-Powered Exit Signs:
 - a. Operation: Upon interruption of normal power source or brownout condition exceeding 20 percent voltage drop from nominal, solid-state control automatically switches connected lamps to integral battery power for minimum of 90 minutes of rated emergency illumination, and automatically recharges battery upon restoration of normal power source.
 - b. Battery: Sealed, maintenance-free, nickel cadmium unless otherwise indicated.
 - c. Diagnostics: Provide power status indicator light and accessible integral test switch to manually activate emergency operation.
 - d. Provide low-voltage disconnect to prevent battery damage from deep discharge.
 - e. Self-Diagnostics: Provide units that self-monitor functionality and automatically perform testing required by NFPA 101 where indicated; provide indicator light(s) to report test and diagnostic status.

2.4 DRIVERS

- A. Manufacturers:
 - 1. Alloy LED; www.alloyled.com
 - 2. General Electric Company/GE Lighting; www.gelighting.com
 - 3. Lutron Electronics Company, Inc; www.lutron.com
 - 4. OSRAM Sylvania, Inc; www.osram.us/ds
 - 5. Philips Lighting North America Corporation; www.usa.lighting.philips.com
 - 6. Substitutions: See Section 01 60 00 - Product Requirements.
 - 7. Manufacturer Limitations: Where possible, for each type of luminaire provide drivers produced by a single manufacturer.
 - 8. Where a specific manufacturer or model is indicated elsewhere in the luminaire schedule or on the drawings, substitutions are not permitted unless explicitly indicated.
- B. Drivers - General Requirements:
 - 1. Minimum Efficiency/Efficacy: Provide drivers complying with all current applicable federal and state efficiency/efficacy standards.
 - 2. Drivers: Inrush currents not exceeding peak currents specified in NEMA 410.

2.5 ACCESSORIES

- A. Provide accessory plaster frames for luminaires recessed in plaster ceilings.

PART 3 EXECUTION

3.1 EXAMINATION

- A. Verify that field measurements are as indicated.
- B. Verify that outlet boxes are installed in proper locations and at proper mounting heights and are properly sized to accommodate conductors in accordance with NFPA 70.
- C. Verify that suitable support frames are installed where required.
- D. Verify that branch circuit wiring installation is completed, tested, and ready for connection to luminaires.
- E. Verify that conditions are satisfactory for installation prior to starting work.

3.2 PREPARATION

- A. Provide extension rings to bring outlet boxes flush with finished surface.
- B. Clean dirt, debris, plaster, and other foreign materials from outlet boxes.

3.3 INSTALLATION

- A. Coordinate locations of outlet boxes provided under Section 26 05 33.16 as required for installation of luminaires provided under this section.
- B. Perform work in accordance with NECA 1 (general workmanship).
- C. Install products in accordance with manufacturer's instructions.
- D. Install luminaires securely, in a neat and workmanlike manner, as specified in NECA 500 (commercial lighting) and NECA 502 (industrial lighting).
- E. Provide required support and attachment in accordance with Section 26 05 29.
- F. Provide required seismic controls in accordance with Section 23 05 48.
- G. Install luminaires plumb and square and aligned with building lines and with adjacent luminaires.
- H. Suspended Ceiling Mounted Luminaires:
 - 1. Do not use ceiling tiles to bear weight of luminaires.
 - 2. Do not use ceiling support system to bear weight of luminaires unless ceiling support system is certified as suitable to do so.
 - 3. Secure surface-mounted and recessed luminaires to ceiling support channels or framing members or to building structure.

4. Secure lay-in luminaires to ceiling support channels using listed safety clips at four corners.
 5. In addition to ceiling support wires, provide two galvanized steel safety wire(s), minimum 12 gauge, connected from opposing corners of each recessed luminaire to building structure.
 6. See appropriate Division 9 section where suspended grid ceiling is specified for additional requirements.
 - I. Recessed Luminaires:
 1. Install trims tight to mounting surface with no visible light leakage.
 2. Non-IC Rated Luminaires: Maintain required separation from insulation and combustible materials according to listing.
 - J. Wall-Mounted Luminaires: Unless otherwise indicated, specified mounting heights are to center of luminaire.
 - K. Install accessories furnished with each luminaire.
 - L. Bond products and metal accessories to branch circuit equipment grounding conductor.
 - M. Exit Signs:
 1. Unless otherwise indicated, connect unit to unswitched power from same circuit feeding normal lighting in same room or area. Bypass local switches, contactors, or other lighting controls.
 - N. Remote Drivers: Install in accessible location as indicated or as required to complete installation, using conductors per manufacturer's recommendations not exceeding manufacturer's recommended maximum conductor length to luminaire.
- 3.4 FIELD QUALITY CONTROL
- A. See Section 01 40 00 - Quality Requirements, for additional requirements.
 - B. Inspect each product for damage and defects.
 - C. Operate each luminaire after installation and connection to verify proper operation.
 - D. Test self-powered exit signs, emergency lighting units to verify proper operation upon loss of normal power supply.
 - E. Correct wiring deficiencies and repair or replace damaged or defective products. Repair or replace excessively noisy ballasts as determined by Architect.
- 3.5 ADJUSTING
- A. Aim and position adjustable emergency lighting unit lamps to achieve optimum illumination of egress path as required or as directed by Architect or authority having jurisdiction.
 - B. Exit Signs with Field-Selectable Directional Arrows: Set as indicated or as required to properly designate egress path as directed by Architect or authority having jurisdiction.
- 3.6 CLEANING
- A. Clean surfaces according to NECA 500 (commercial lighting), NECA 502 (industrial lighting), and manufacturer's instructions to remove dirt, fingerprints, paint, or other foreign material and restore finishes to match original factory finish.
- 3.7 CLOSEOUT ACTIVITIES
- A. See Section 01 77 00 - Closeout Procedures, for closeout submittals.
 - B. See Section 01 79 00 - Demonstration and Training, for additional requirements.
 - C. Demonstration: Demonstrate proper operation of luminaires to Architect, and correct deficiencies or make adjustments as directed.
 - D. Just prior to Substantial Completion, replace all lamps that have failed.
- 3.8 PROTECTION
- A. Protect installed luminaires from subsequent construction operations.

END OF SECTION

SECTION 26 56 00

EXTERIOR LIGHTING

PART 1 GENERAL

1.1 SECTION INCLUDES

- A. Exterior luminaires.
- B. Poles and accessories.
- C. Luminaire accessories.

1.2 REFERENCE STANDARDS

- A. 47 CFR 15 - Radio Frequency Devices; current edition.
- B. AASHTO LTS - Standard Specifications for Structural Supports for Highway Signs, Luminaires and Traffic Signal.
- C. IEC 60529 - Degrees of Protection Provided by Enclosures (IP Code).
- D. IEEE C2 - National Electrical Safety Code.
- E. NECA 1 - Standard for Good Workmanship in Electrical Construction.
- F. NECA/IESNA 501 - Standard for Installing Exterior Lighting Systems.
- G. NEMA 410 - Performance Testing for Lighting Controls and Switching Devices with Electronic Drivers and Discharge Ballasts.
- H. NFPA 70 - National Electrical Code; Most Recent Edition Adopted by Authority Having Jurisdiction, Including All Applicable Amendments and Supplements.
- I. UL 1598 - Luminaires; Current Edition, Including All Revisions.
- J. UL 8750 - Light Emitting Diode (LED) Equipment for Use in Lighting Products; Current Edition, Including All Revisions.

1.3 ADMINISTRATIVE REQUIREMENTS

- A. Coordination:
 - 1. Coordinate placement of poles and associated foundations with utilities, curbs, sidewalks, trees, walls, fences, striping, etc. installed under other sections or by others. Coordinate elevation to obtain specified foundation height.
 - 2. Notify Architect of any conflicts or deviations from Contract Documents to obtain direction prior to proceeding with work.

1.4 SUBMITTALS

- A. See Section 01 33 00 – Submittal Procedures for submittal procedures.
- B. Shop Drawings:
 - 1. Indicate dimensions and components for each luminaire that is not a standard product of the manufacturer.
 - 2. Provide photometric calculations where luminaires are proposed for substitution upon request.
 - 3. Provide structural calculations for each pole proposed for substitution.
- C. Product Data: Provide manufacturer's standard catalog pages and data sheets including detailed information on luminaire construction, dimensions, ratings, finishes, mounting requirements, listings, service conditions, photometric performance, weight, effective projected area (EPA), and installed accessories; include model number nomenclature clearly marked with all proposed features.
 - 1. LED Luminaires:
 - a. Include estimated useful life, calculated based on IES LM-80 test data.
 - b. Include IES LM-79 test report upon request.

2. Provide electronic files of photometric data certified by a National Voluntary Laboratory Accreditation Program (NVLAP) lab or independent testing agency in IES LM-63 standard format upon request.
 3. Poles: Include information on maximum supported effective projected area (EPA) and weight for the design wind speed.
 - D. Certificates for Poles and Accessories: Manufacturer's documentation that products are suitable for the luminaires to be installed and comply with designated structural design criteria.
 - E. Field Quality Control Reports.
 1. Include test report indicating measured illumination levels.
 - F. Manufacturer's Installation Instructions: Indicate application conditions and limitations of use stipulated by product testing agency. Include instructions for storage, handling, protection, examination, preparation, installation, and starting of product.
 - G. Operation and Maintenance Data: Instructions for each product including information on replacement parts.
 - H. Maintenance Materials: Furnish the following for Owner's use in maintenance of project.
 1. See Section 01 60 00 - Product Requirements, for additional provisions.
 - I. Project Record Documents: Record actual connections and locations of pole foundations, luminaires, and any pull or junction boxes.
- 1.5 QUALITY ASSURANCE
- A. Comply with requirements of NFPA 70.
 - B. Maintain at the project site a copy of each referenced document that prescribes execution requirements.
 - C. Manufacturer Qualifications: Company specializing in manufacturing the products specified in this section with minimum three years documented experience.
 - D. Product Listing Organization Qualifications: An organization recognized by OSHA as a Nationally Recognized Testing Laboratory (NRTL) and acceptable to authorities having jurisdiction.
- 1.6 DELIVERY, STORAGE, AND HANDLING
- A. Receive, handle, and store products according to NECA/IESNA 501 and manufacturer's written instructions.
 - B. Keep products in original manufacturer's packaging and protect from damage until ready for installation.
- 1.7 WARRANTY
- A. See Section 01 77 00 - Closeout Procedures, for additional warranty requirements.
 - B. Provide three year manufacturer warranty for all LED luminaires, including drivers.
 - C. Provide three year manufacturer warranty for LED retrofit luminaire conversion kits.

PART 2 PRODUCTS

2.1 LUMINAIRES

- A. Manufacturers:
 1. Acuity Brands, Inc; www.acuitybrands.com
 2. Cooper Lighting, a division of Cooper Industries; www.cooperindustries.com
 3. Hubbell Lighting, Inc; www.hubbelllighting.com
- B. Provide products that comply with requirements of NFPA 70.
- C. Provide products that are listed and labeled as complying with UL 1598, where applicable.
- D. Provide products listed, classified, and labeled as suitable for the purpose intended.
- E. Provide products complying with Federal Energy Management Program (FEMP) requirements.

- F. Unless otherwise indicated, provide complete luminaires including LED's, reflectors, lenses, housings and other components required to position, energize and protect the LED's and distribute the light.
- G. Unless specifically indicated to be excluded, provide all required conduit, boxes, wiring, connectors, hardware, poles, foundations, supports, trims, accessories, etc. as necessary for a complete operating system.
- H. Provide products suitable to withstand normal handling, installation, and service without any damage, distortion, corrosion, fading, discoloring, etc.
- I. Provide luminaires listed and labeled as suitable for wet locations unless otherwise indicated.
- J. Recessed Luminaires :
 - 1. Ceiling Compatibility: Comply with NEMA 4.
 - 2. Luminaires Recessed in Insulated Ceilings: Listed and labeled as IC rated, suitable for direct contact with insulation and combustible materials.
- K. LED Luminaires:
 - 1. Components: UL 8750 recognized or listed as applicable.
 - 2. Tested in accordance with IES LM-79 and IES LM-80.
 - 3. LED Estimated Useful Life: Minimum of 50,000 hours at 70 percent lumen maintenance, calculated based on IES LM-80 test data.
- L. Exposed Hardware: Stainless steel.

2.2 DRIVERS

- A. Manufacturers:
 - 1. General Electric Company/GE Lighting; www.gelighting.com
 - 2. OSRAM Sylvania, Inc; www.osram.us
 - 3. Philips Lighting North America Corporation; www.usa.lighting.philips.com
 - 4. Substitutions: See Section 01 60 00 - Product Requirements.
 - 5. Manufacturer Limitations: Where possible, for each type of luminaire provide drivers produced by a single manufacturer.
 - 6. Where a specific manufacturer or model is indicated elsewhere in the luminaire schedule or on the drawings, substitutions are not permitted unless explicitly indicated.
- B. Drivers - General Requirements:
 - 1. Minimum Efficiency/Efficacy: Provide drivers complying with all current applicable federal and state ballast efficiency/efficacy standards.
 - 2. Drivers: Inrush currents not exceeding peak currents specified in NEMA 410.
- C. Dimmable LED Drivers:
 - 1. Dimming Range: Continuous dimming from 100 percent to ten percent relative light output unless dimming capability to lower level is indicated, without flicker.
 - 2. Control Compatibility: Fully compatible with the dimming controls to be installed.

PART 3 EXECUTION

3.1 EXAMINATION

- A. Verify that field measurements are as indicated.
- B. Verify that branch circuit wiring installation is completed, tested, and ready for connection to luminaires.
- C. Verify that conditions are satisfactory for installation prior to starting work.

3.2 INSTALLATION

- A. Perform work in accordance with NECA 1 (general workmanship).
- B. Install products in accordance with manufacturer's instructions.
- C. Install luminaires in accordance with NECA/IESNA 501.
- D. Provide required seismic controls in accordance with Section 23 05 48.

- E. Install luminaires plumb and square.
- F. Recessed Luminaires:
 - 1. Install trims tight to mounting surface with no visible light leakage.
 - 2. Non-IC Rated Luminaires: Maintain required separation from insulation and combustible materials according to listing.
 - 3. Luminaires Recessed in Fire-Rated Ceilings: Install using accessories and firestopping materials to meet regulatory requirements for fire rating.
- G. Suspended Luminaires:
 - 1. Unless otherwise indicated, specified mounting heights are to bottom of luminaire.
 - 2. Install using the suspension method indicated, with support lengths and accessories as required for specified mounting height.
 - 3. Provide minimum of two supports for each luminaire equal to or exceeding 4 feet in length, with no more than 4 feet (1.2 m) between supports.
 - 4. Install canopies tight to mounting surface.
 - 5. Unless otherwise indicated, support pendants from swivel hangers.
- H. Wall-Mounted Luminaires: Unless otherwise indicated, specified mounting heights are to center of luminaire.
- I. Install accessories furnished with each luminaire.
- J. Bond products and metal accessories to branch circuit equipment grounding conductor.

3.3 FIELD QUALITY CONTROL

- A. See Section 01 40 00 - Quality Requirements, for additional requirements.
- B. Inspect each product for damage and defects.
- C. Operate each luminaire after installation and connection to verify proper operation.
- D. Correct wiring deficiencies and repair or replace damaged or defective products. Repair or replace excessively noisy ballasts as determined by Architect.
- E. Measure illumination levels at night with calibrated meters to verify compliance with performance requirements. Record test results in written report to be included with submittals.

3.4 ADJUSTING

- A. Aim and position adjustable luminaires to achieve desired illumination as indicated or as directed by Architect. Secure locking fittings in place.
- B. Luminaires with Field-Rotatable Optics: Position optics according to manufacturer's instructions to achieve lighting distribution as indicated or as directed by Architect.

3.5 CLEANING

- A. Clean surfaces according to NECA/IESNA 501 and manufacturer's instructions to remove dirt, fingerprints, paint, or other foreign material and restore finishes to match original factory finish.

3.6 CLOSEOUT ACTIVITIES

- A. See Section 01 77 00 - Closeout Procedures, for closeout submittals.
- B. See Section 01 79 00 - Demonstration and Training, for additional requirements.
- C. Demonstration: Demonstrate proper operation of luminaires to Architect, and correct deficiencies or make adjustments as directed.

3.7 PROTECTION

- A. Protect installed luminaires from subsequent construction operations.

END OF SECTION

SECTION 905 - PROPOSAL

Date _____

Mississippi Transportation Commission
Jackson, Mississippi

Sirs: The following proposal is made on behalf of _____
_____ of _____

for constructing the following designated project(s) within the time(s) hereinafter specified.

The plans are composed of drawings and blue prints on file in the offices of the Mississippi Department of Transportation, Jackson, Mississippi.

The Specifications are the current Standard Specifications of the Mississippi Department of Transportation approved by the Federal Highway Administration, except where superseded or amended by the plans, Special Provisions and Notice(s) to Bidders attached hereto and made a part thereof.

I (We) certify that I (we) possess a copy of said Standard and any Supplemental Specifications.

Evidence of my (our) authority to submit the Proposal is hereby furnished. The proposal is made without collusion on the part of any person, firm or corporation. I (We) certify that I (we) have carefully examined the Plans, the Specifications, including the Special Provisions and Notice(s) to Bidders, herein, and have personally examined the site of the work. On the basis of the Specifications, Special Provisions, Notice(s) to Bidders, and Plans, I (we) propose to furnish all necessary machinery, tools, apparatus and other means of construction and do all the work and furnish all the materials in the manner specified. I (We) understand that the quantities mentioned herein are approximate only and are subject to either increase or decrease, and hereby propose to perform any increased or decreased quantities of work at the unit prices bid, in accordance with the above.

I (We) acknowledge that this proposal will be found irregular and/or non-responsive unless a certified check, cashier's check, or Proposal Guaranty Bond in the amount as required in the Advertisement (or, by law) is submitted electronically with the proposal or is delivered to the Contract Administration Engineer prior to the bid opening time specified in the advertisement.

INSTRUCTION TO BIDDERS: Alternate and Optional Items on Bid Schedule.

1. Two or more items entered opposite a single unit quantity WITHOUT DEFINITE DESIGNATION AS "ALTERNATE ITEMS" are considered as "OPTIONAL ITEMS". Bidders may or may not indicate on bids the Optional Item proposed to be furnished or performed WITHOUT PREJUDICE IN REGARD TO IRREGULARITY OF BIDS.
2. Items classified on the bid schedule as "ALTERNATE ITEMS" and/or "ALTERNATE TYPES OF CONSTRUCTION" must be preselected and indicated on bids. However, "Alternate Types of Construction" may include Optional Items to be treated as set out in Paragraph 1, above.
3. Optional items not preselected and indicated on the bid schedule MUST be designated in accordance with Subsection 102.06 prior to or at the time of execution of the contract.
4. Optional and Alternate items designated must be used throughout the project.

I (We) further propose to perform all "force account or extra work" that may be required of me (us) on the basis provided in the Specifications and to give such work my (our) personal attention in order to see that it is economically performed.

I (We) further propose to execute the attached contract agreement (Section 902) as soon as the work is awarded to me (us), and to begin and complete the work within the time limit(s) provided for in the Specifications and Advertisement. I (We) also propose to execute the attached contract bond (Section 903) in an amount not less than one hundred (100) percent of the total of my (our) part, but also to guarantee the excellence of both workmanship and materials until the work is finally accepted.

I (We) shall submit electronically with our proposal or deliver prior to the bid opening time a certified check, cashier's check or bid bond for **five percent (5%) of total bid** and hereby agree that in case of my (our) failure to execute the contract and furnish bond within Ten (10) days after notice of award, the amount of this check (bid bond) will be forfeited to the State of Mississippi as liquidated damages arising out of my (our) failure to execute the contract as proposed. It is understood that in case I am (we are) not awarded the work, the check will be returned as provided in the Specifications.

SECTION 905 -- PROPOSAL (CONTINUED)

I (We) hereby certify by digital signature and electronic submission via Bid Express of the Section 905 proposal below, that all certifications, disclosures and affidavits incorporated herein are deemed to be duly executed in the aggregate, fully enforceable and binding upon delivery of the bid proposal. I (We) further acknowledge that this certification shall not extend to the bid bond or alternate security which must be separately executed for the benefit of the Commission. This signature does not cure deficiencies in any required certifications, disclosures and/or affidavits. I (We) also acknowledge the right of the Commission to require full and final execution on any certification, disclosure or affidavit contained in the proposal at the Commission's election upon award. Failure to so execute at the Commission's request within the time allowed in the Standard Specifications for execution of all contract documents will result in forfeiture of the bid bond or alternate security.

Respectfully Submitted,

DATE _____

Contractor

BY _____
Signature

TITLE _____

ADDRESS _____

CITY, STATE, ZIP _____

PHONE _____

FAX _____

E-MAIL _____

(To be filled in if a corporation)

Our corporation is chartered under the Laws of the State of _____ and the names, titles and business addresses of the executives are as follows:

President

Address

Secretary

Address

Treasurer

Address

The following is my (our) itemized proposal.

Building Improvements at District 1 Shop Electrical Upgrades, known as State Project No. BWO-1051-41(004) / 503808301 in Lee County.

Line no.	Item Code	Adj Code	Quantity	Units	Description[Fixed Unit Price]
				Roadway Items	
0010	1510-A001		1	Lump Sum	Renovate Shop Electrical Upgrades

SECTION 905 - COMBINATION BID PROPOSAL (Continued)

CONDITIONS FOR COMBINATION BID

If a bidder elects to submit a combined bid for two or more of the contracts listed for this month's letting, the bidder must complete and execute these sheets of the proposal in each of the individual proposals to constitute a combination bid. In addition to this requirement, each individual contract shall be completed, executed and submitted in the usual specified manner.

Failure to execute this Combination Bid Proposal in each of the contracts combined will be just cause for each proposal to be received and evaluated as a separate bid.

It is understood that the Mississippi Transportation Commission not only reserves the right to reject any and all proposals, but also the right to award contracts upon the basis of lowest separate bids or combination bids most advantageous to the State.

It is further understood and agreed that the Combination Bid Proposal is for comparison of bids only and that each contract shall operate in every respect as a separate contract in accordance with its proposal and contract documents.

I (We) agree to complete each contract on or before its specified completion date.

COMBINATION BID PROPOSAL

This proposal is tendered as one part of a Combination Bid Proposal utilizing option ____* of Subsection 102.11 on the following contracts:

* Option to be shown as either (a), (b), or (c).

	<u>Project No.</u>	<u>County</u>	<u>Project No.</u>	<u>County</u>
1.	_____	_____	6.	_____
2.	_____	_____	7.	_____
3.	_____	_____	8.	_____
4.	_____	_____	9.	_____
5.	_____	_____	10.	_____

(a) If Combination A has been selected, your Combination Bid is complete.

(b) If Combination B has been selected, then complete the following page.

SECTION 905 - COMBINATION BID PROPOSAL (Continued)

Project Number	Pay Item Number	Unit	Unit Price Reduction	Total Item Reduction	Total Contract Reduction
1. _____	_____ _____ _____	_____ _____ _____	_____ _____ _____	_____ _____ _____	_____
2. _____	_____ _____ _____	_____ _____ _____	_____ _____ _____	_____ _____ _____	_____
3. _____	_____ _____ _____	_____ _____ _____	_____ _____ _____	_____ _____ _____	_____
4. _____	_____ _____ _____	_____ _____ _____	_____ _____ _____	_____ _____ _____	_____
5. _____	_____ _____ _____	_____ _____ _____	_____ _____ _____	_____ _____ _____	_____
6. _____	_____ _____ _____	_____ _____ _____	_____ _____ _____	_____ _____ _____	_____
7. _____	_____ _____ _____	_____ _____ _____	_____ _____ _____	_____ _____ _____	_____
8. _____	_____ _____ _____	_____ _____ _____	_____ _____ _____	_____ _____ _____	_____

SECTION 905 - COMBINATION BID PROPOSAL (Continued)

Project Number	Pay Item Number	Unit	Unit Price Reduction	Total Item Reduction	Total Contract Reduction
9. _____ _____	_____ _____ _____	_____ _____ _____	_____ _____ _____	_____ _____ _____	_____
10. _____ _____	_____ _____ _____	_____ _____ _____	_____ _____ _____	_____ _____ _____	_____

(c) If Combination C has been selected, then initial and complete ONE of the following.

- _____ I (We) desire to be awarded work not to exceed a total monetary value of \$ _____.
- _____ I (We) desire to be awarded work not to exceed _____ number of contracts.

TO: EXECUTIVE DIRECTOR, MISSISSIPPI DEPARTMENT OF TRANSPORTATION
JACKSON, MISSISSIPPI

CERTIFICATE

If awarded this contract, I (we) contemplate that portions of the contract will be sublet. I (we) certify that those subcontracts which are equal to or in excess of fifty thousand dollars (\$50,000.00) will be in accordance with regulations promulgated and adopted by the Mississippi State Board of Contractors on September 8, 2011.

I (we) agree that this notification of intent DOES NOT constitute APPROVAL of the subcontracts.

_____ (Individual or Firm)	_____ (Address)
_____ (Individual or Firm)	_____ (Address)
_____ (Individual or Firm)	_____ (Address)
_____ (Individual or Firm)	_____ (Address)

NOTE: Failure to complete the above DOES NOT preclude subsequent subcontracts. Subsequent subcontracts, if any, equal to or in excess of fifty thousand dollars (\$50,000.00) will be in accordance with regulations promulgated and adopted by the Mississippi State Board of Contractors on September 8, 2011.

Contractor _____

MISSISSIPPI DEPARTMENT OF TRANSPORTATION
CERTIFICATION

I, _____,
(Name of person signing bid)

individually, and in my capacity as _____ of
(Title of person signing bid)

(Name of Firm, partnership, or Corporation)

do hereby certify under penalty of perjury under the laws of the United States and the State of Mississippi

that _____, Bidder
(Name of Firm, Partnership, or Corporation)

on Project No. **BWO-1051-41(004)/ 503808301000**

in **Lee** _____ County(ies), Mississippi, has not either directly or indirectly entered into any agreement, participated in any collusion; or otherwise taken any action in restraint of free competitive bidding in connection with this contract; nor have any of its corporate officers or principal owners.

Except as noted hereafter, it is further certified that said legal entity and its corporate officers, principal owners, managers, auditors and others in a position of administering federal funds are not currently under suspension, debarment, voluntary exclusion or determination of ineligibility; nor have a debarment pending; nor been suspended, debarred, voluntarily excluded or determined ineligible within the past three years by the Mississippi Transportation Commission, the State of Mississippi, any other State or a federal agency; nor been indicted, convicted or had a civil judgment rendered by a court of competent jurisdiction in any matter involving fraud or official misconduct within the past three years.

Do exceptions exist and are made a part thereof? Yes / No

Any exceptions shall address to whom it applies, initiating agency and dates of such action.

Note: Exceptions will not necessarily result in denial of award but will be considered in determining bidder responsibility. Providing false information may result in criminal prosecution or administrative sanctions.

All of the foregoing is true and correct.

(1/2016 S)

SECTION 902

CONTRACT FOR _____
LOCATED IN THE COUNTY(IES) OF _____

STATE OF MISSISSIPPI
COUNTY OF HINDS

This Contract is entered into by and between the Mississippi Transportation Commission (the "Commission") and the undersigned contractor (the "Contractor"), as follows:

As consideration for this Contract, the Commission agrees to pay the Contractor the amount(s) set out in the Proposal attached hereto. Said payment will be made in the manner and at the time(s) specified in the Specifications and/or Special Provisions, if any. In exchange for said consideration, the Contractor hereby agrees to accept the prices stated in the Proposal as full compensation for the furnishing of all labor, materials and equipment, and the execution of the scope of work identified for this referenced Project as contemplated in this Contract, and as more fully outlined in the Contract Documents (the "Work"). The Contract Documents consist of the Advertisement, the Notice to Bidders, the Proposal, the Specifications, the Special Provisions, and the approved Plans, all of which are hereby made a part of this Contract and incorporated herein by reference.

The Contractor shall be responsible for all loss or damage arising out of, or in any way in connection with the Work, or from any unforeseen obstructions or difficulties that may be encountered in the prosecution of the Work, and for all risks of every description connected with the Work, with the exception of any items specifically excluded in the Contract Documents. The Contractor shall fully and faithfully complete the Work in a good and workmanlike manner, according to the Contract Documents and any Supplemental Agreements thereto.

The Contractor further agrees that the Work shall be done under the direct supervision of, and to the complete satisfaction of, the Executive Director of the Mississippi Department of Transportation, or his authorized representative(s), and, when federal funds are involved, subject to the inspection and approval of the Federal Highway Administration, or its agents, and/or the agents of any other state or federal agency whose funds are involved. Further, the Work shall be done in accordance with any applicable state and federal laws, and any such rules and regulations issued by the Commission and/or any relevant Federal Agency.

The Contractor agrees that all labor as outlined in the Contract Documents may be secured from a list furnished by the Manager of the Win Job Center nearest the project location, or any successor thereto.

It is agreed and understood that each and every provision of law and clause required by law to be inserted into this Contract shall be deemed to be inserted herein, and this Contract shall be read and enforced as though it were included herein. If through mere mistake or otherwise, any such provision is not inserted, then upon the application of either party hereto, the Contract shall be physically amended to make such insertion.

The Contractor agrees that he has read each and every clause of the Contract Documents, and fully understands the meaning of same, and hereby acknowledges that he will comply with all terms, covenants and agreements therein.

Witness our signatures, this the ____ day of _____, 20__.

Contractor

By: _____
Title: _____

Signed and sealed in the presence of: (name and address of witness)

MISSISSIPPI TRANSPORTATION COMMISSION

Executive Director

Secretary to the Commission

Award authorized by the Mississippi Transportation Commission in session on the ____ day of _____, _____, Minute Book No. _____, Page No. _____.

**SECTION 903
PERFORMANCE BOND**

PERFORMANCE BOND FOR THE FOLLOWING CONTRACT:

Project No.: _____

For the construction of: _____

Contract date: _____ Contract Price: _____

FOR OWNER: MISSISSIPPI TRANSPORTATION COMMISSION, 401 N. WEST STREET, JACKSON, MISSISSIPPI 39201.

CONTRACTOR (full legal name, contact person, phone number and address):

SURETY (legal name, phone number, principal place of business and address for notice purposes):

Second Surety (if applicable):

The Contractor and Surety, jointly and severally, bind themselves, their heirs, executors, administrators, successors and assigns, to the Owner for the performance of the Contract, which is incorporated herein by reference, and subject to the following terms:

1. If the Contractor fully and faithfully performs the Contract, the Surety and the Contractor shall have no obligation under this Bond.
2. The Surety's obligation under this Bond shall arise after:
 - (a) the Owner first provides notice to the Contractor and the Surety that termination is imminent, pursuant to the current edition of the Mississippi Standard Specifications for Road and Bridge Construction, which is a part of the Contract; and
 - (b) the Owner declares a Contractor Default, terminates the Contract, and notifies the Surety.
3. Within 20 calendar days as set forth in Section 108.08 of the current edition of the Mississippi Standard Specifications for Road and Bridge Construction, the Surety shall, after discussions with and consent from the Owner, and at the Surety's expense, elect to take one of the following actions:
 - (a) Arrange for the Contractor, with the consent of the Owner, to perform and complete the Contract;
 - (b) Undertake to perform and complete the Contract itself, through its agents or independent contractors;
 - (c) Waive its right to perform and complete, arrange for completion, or obtain a new contractor, and after investigation, determine the amount for which it may be liable to the Owner (subject to the consent of the Owner) and as soon as practicable after the amount is determined, make payment to the Owner.

4. If the Surety does not proceed, within a reasonable time frame, to enact and carry out the election made in Paragraph 3, then the Surety shall be deemed to be in default on this Bond, and the Owner shall be entitled to enforce any remedy available to it under the Contract and applicable law.
5. Subject to the commitment by the Owner to pay the Balance of the Contract Price, the Surety is obligated, without duplication, for
 - (a) the responsibilities of the Contractor for correction of defective work and completion of the Contract;
 - (b) additional legal, design professional and delay costs resulting from the Contractor's Default, and resulting from the actions or failure to act of the Surety under Paragraph 3; and
 - (c) liquidated damages, or if no liquidated damages are specified in the Contract, actual damages caused by delayed performance or non-performance of the Contractor.
6. The Surety hereby waives notice of any change, including changes of time, to the Contract or to related subcontracts, purchase orders and other obligations.
7. The penal sum of the Bond shall be equal to the Contract Price; however, the penal sum may be increased or decreased as the result of any subsequent Supplemental Agreements and/or final contract quantities.
8. Notice to the Surety, the Owner or the Contractor shall be mailed or delivered to the address listed for notice purposes on the first page of this Bond.

CONTRACTOR AS PRINCIPAL

Company: _____

Signature: _____

Name: _____

Title: _____

Address: _____

SURETY

Company: _____

Signature: _____

MS Insurance ID # _____

Name: _____

Title: _____

Address: _____

SURETY (if applicable)

Company: _____

Signature: _____

MS Insurance ID # _____

Name: _____

Title: _____

Address: _____

**SECTION 903
PAYMENT BOND**

PAYMENT BOND FOR THE FOLLOWING CONTRACT:

Project No.: _____

For the construction of: _____

Contract date: _____ Contract Price: _____

**FOR OWNER: MISSISSIPPI TRANSPORTATION COMMISSION, 401 N. WEST STREET,
JACKSON, MISSISSIPPI 39201.**

CONTRACTOR (full legal name, contact person, phone number and address):

SURETY (legal name, phone number, principal place of business and address **for notice purposes**):

Second Surety (if applicable):

The Contractor and Surety, jointly and severally, bind themselves, their heirs, executors, administrators, successors and assigns, to the Owner for payment of labor, materials and equipment furnished for use in the performance of the Contract, which is incorporated herein by reference, subject to the following terms:

1. If the Contractor promptly makes payment of all sums due to any and all subcontractors, sub-subcontractors, suppliers to the Contractor, suppliers to subcontractors and/or laborers who have performed work on the project site, and defends, indemnifies and holds harmless the Owner from claims, demands, liens or suits by any person or entity seeking payment for labor, materials or equipment furnished for use in the performance of the Contract, then the Surety and the Contractor shall have no obligation under this Bond.
2. The Owner shall provide notice to the Surety of any claims, demands, liens or suits against the Owner or the Owner's property that it receives from any person or entity ("Claimants") seeking payment for labor, materials or equipment furnished for use in the performance of the Contract.
3. Upon notice of any claims, demands, liens or suits provided by the Owner or Contractor or given to the Surety by a Claimant, the Surety shall promptly and at the Surety's expense, defend, indemnify and hold harmless the Owner against said claim, demand, lien or suit and shall take the following additional actions:
 - (a) Send an answer to the Claimant, with a copy to the Owner, within sixty (60) days after receipt of the Claim, stating the amounts that are undisputed and the basis for challenging any amounts that are disputed; and
 - (b) Pay or arrange for payment of any undisputed amounts.

4. The Surety shall not be liable to the Owner, Claimants or others for obligations of the Contractor that are unrelated to the Contract. The Owner shall not be liable for the payment of any costs or expenses of any Claimant under this Bond and shall have no obligation under this Bond to make payments to, or give notice on behalf of, Claimants, or otherwise have any obligations to Claimants under this Bond.
5. The Surety hereby waives notice of any change, including changes of time, to the Contract or to related subcontracts, purchase orders and other obligations.
6. The penal sum of the Bond shall be equal to the Contract Price; however, the penal sum may be increased or decreased as the result of any subsequent Supplemental Agreements and/or final contract quantities.

CONTRACTOR AS PRINCIPAL

Company: _____

Signature: _____

Name: _____

Title: _____

Address: _____

SURETY

Company: _____

Signature: _____

Name: _____

Title: _____

Address: _____

MS Insurance ID # _____

SURETY (if applicable)

Company: _____

Signature: _____

Name: _____

Title: _____

Address: _____

MS Insurance ID # _____



BID BOND

KNOW ALL MEN BY THESE PRESENTS, that we _____
Contractor

Address

City, State ZIP

As principal, hereinafter called the Principal, and _____
Surety

a corporation duly organized under the laws of the state of _____

as Surety, hereinafter called the Surety, are held and firmly bound unto **State of Mississippi, Jackson, Mississippi**

As Obligee, hereinafter called Obligee, in the sum of **Five Per Cent (5%) of Amount Bid**

Dollars(\$ _____)

for the payment of which sum will and truly to be made, the said Principal and said Surety, bind ourselves, our heirs, executors, administrators, successors and assigns, jointly and severally, firmly by these presents.

WHEREAS, the Principal has submitted a bid for **Building Improvements at District 1 Shop Electrical Upgrades, known as State Project No. BWO-1051-41(004) / 503808301 in Lee County.**

NOW THEREFORE, the condition of this obligation is such that if the aforesaid Principal shall be awarded the contract, the said Principal will, within the time required, enter into a formal contract and give a good and sufficient bond to secure the performance of the terms and conditions of the contract, then this obligation to be void; otherwise the Principal and Surety will pay unto the Obligee the difference in money between the amount of the bid of the said Principal and the amount for which the Obligee legally contracts with another party to perform the work if the latter amount be in excess of the former, but in no event shall liability hereunder exceed the penal sum hereof.

Signed and sealed this _____ day of _____, 20__

(Principal) (Seal)

(Witness) (Name) By: _____ (Title)

(Surety) (Seal)

(Witness) (Attorney-in-Fact) By: _____

(MS Agent)

Mississippi Insurance ID Number