STATE	PROJECT NUMBER	SHEET NO.
MISSISSIPPI	MP-1025-48(013)	1

GENERAL INDEX

INCLUDED THIS PROJECT		BEGIN WITH SHEET
☒	ROADWAY	1
☐	PERMANENT SIGNS	1001
☐	TRAFFIC SIGNALS	2001
☐	ITS COMPONENTS	3001
☐	LIGHTING	4001
☐	(RESERVED)	5001
☒	ROADWAY STANDARD DWGS	6001
☐	BOX CULVERT STD. DRAWINGS (LRFD)	7001
☐	BOX CULVERT STD. DRAWINGS (STD. SPEC.)	7501
☐	BRIDGE	8001
☐	CROSS SECTIONS	9001

BRIDGE STRUCTURES REQ'D.
NONE

BOX BRIDGES REQ'D.
NONE

STATE OF MISSISSIPPI

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

PLAN AND PROFILE OF PROPOSED STATE HIGHWAY
STATE PROJECT NO. MP–1025–48(013)

SR 25 FROM US 45A TO US 45 FMS CON. NO. 307878/301000

MONROE CO

SCALES

PLAN		1 IN. = 100 FT.
PROFILE	HOR.	1 IN. = 100 FT.
	VERT.	1 IN. = 10 FT.
LAYOUT		1 IN. = FT.

E.O.P. 451+40

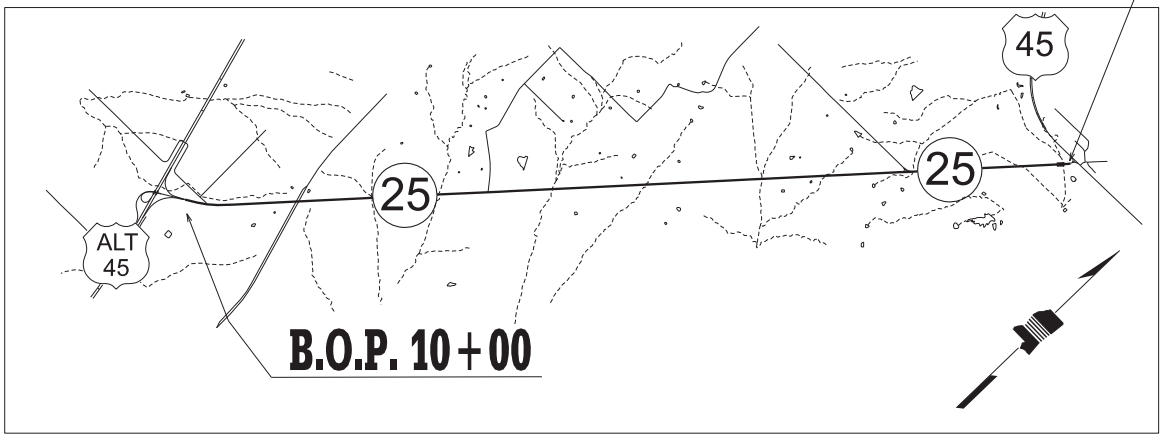

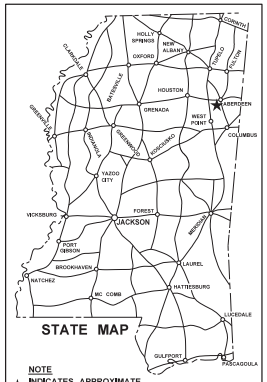

DESIGN CONTROL
_____ MPH = V (SPEED DESIGN)
ADT ( ) = _____ : ADT ( ) = _____
DHV = _____ ; D = _____% T = _____%

PERMITS ACQUIRED BY MDOT

WETLANDS AND WATERS PERMITS

	WATERS	WETLANDS
NATIONWIDE #14	N	N
NATIONWIDE (OTHER)*	N	N
GENERAL*	N	N
INDIVIDUAL (404)*	N	N

STORMWATER PERMIT N

Y	REQUIRED, CNOI SUBMITTED BY MDOT (DISTURBED AREA = 5 ACRES)
S	REQUIRED, SCNOI TO BE SUBMITTED BY CONTRACTOR (1 TO 4.99 ACRES)
N	NO STORMWATER PERMIT REQUIRED (<1 ACRE)

APPROVED BY: _____

CONVENTIONAL SYMBOLS

COUNTY LINE
TOWN CORPORATION LINE
SECTION LINE
EXISTING ROAD OR TRAVELED WAY
PROPOSED ROAD OR TRAVELED WAY
RAILROAD
SURVEY LINE
BRIDGES

EQUATIONS
NONE

EXCEPTIONS
NONE

LENGTH DATA

LENGTH OF ROADWAY	43763 FT.	8.289 MI.
LENGTH OF BRIDGES	377 FT.	.071 MI.
LENGTH OF PROJECT (NET)	44140 FT.	8.360 MI.
LENGTH OF EXCEPTIONS	0 FT.	0 MI.
LENGTH OF PROJECT (GROSS)	44140 FT.	8.360 MI.

P S & E DATE: 12-22-2023

APPROVED:

DEPUTY EXECUTIVE DIRECTOR / CHIEF ENGINEER

EXECUTIVE DIRECTOR

MDOT MISSISSIPPI DEPARTMENT OF TRANSPORTATION

BY	DATE	REVISIONS
JDJ		

TITLE
BRIDGE DIVISION
MISSISSIPPI DEPARTMENT OF TRANSPORTATION

MODDY 00.00ANPM TITLE.DGN

FMS CON: 307878/301000

STATE	PROJECT NO.
MISS.	MP-1025-48(013)

DESCRIPTION OF SHEET

DESCRIPTION OF SHEET		WKG. NO.	SH. NO.
TITLE SHEET (1)			1
DETAILED INDEX AND GENERAL NOTES (1)		DI-1	2
TYPICAL SECTION SHEET (2)			
TYPICAL MILLINGS AND OVERLAY SECTIONS OF MAINLINE		TS-1	3
TYPICAL MILLINGS AND OVERLAY SECTIONS OF MAINLINE		TS-2	4
QUANTITY SHEETS (3)			
SUMMARY OF QUANTITIES		SQ-1	5-6
ESTIMATED SIGNING QUANTITIES		EQ-1	7
DETAIL OF CONSTRUCTION SIGNING (1)		CS-1	8
STANDARD DRAWINGS - ROADWAY SHEETS (11)			
SIGN SUPPORT HARDWARE		TSS-1	9
SIGN SUPPORT HARDWARE INSTALLATION		TSS-2	10
EDGE LINE RAISED PAVEMENT MARKING PLACEMENT 2-LANE ROADWAYS		RPM-1	11
RUMBLE STRIPES 2-LANE HIGHWAYS (ASPH. LANES, 2-FT ASPH. SHLD)		RSw/RPM	12
PAVEMENT MARKING LEGEND DETAILS		PM-6	6056
TYPICAL PLACEMENT OF WARNING SIGNS AND PAVEMENT MARKINGS AT RAILROAD HIGHWAY GRADE CROSSINGS		PM-7	6057
2-WAY RETROREFLECTIVE RAISED PAYMENT MARKERS AT INTERSECTING ROADS (2-LANE)		PM-11	6061
STANDARD ROADSIDE SIGN ASSEMBLY AND INSTALLATION		SN-4	6306
TRAFFIC CONTROL PLAN WITH FLAGGER (ONE-LANE CLOSURE OF TWO-WAY TRAFFIC)		TCP-1	6351
TRAFFIC CONTROL PLAN MOBILE OPERATIONS MULTILANE ROADS AND TWO-LANE ROADS		TCP-9	6359
TEMPORARY STRIPING FOR TRAFFIC CONTROL 2-LANE AND 4-LANE DIVIDED HIGHWAYS		TCP-13	6363
TOTAL SHEETS = 19			

GENERAL NOTES:

1.) WHERE MILLING OF THE ROADWAY LANES IS REQUIRED, THE CONTRACTOR SHALL PROVIDE OUTLETS IN THE EXISTING SHOULDERS AT SUFFICIENT INTERVALS TO PREVENT POOLING OR STANDING WATER ON THE MILLED SURFACE.(ABSORBED ITEM)

2.) VEGETATIVE MATERIAL WILL BE REMOVED PRIOR TO PLACEMENT OF GRANULAR MATERIAL. COST TO BE ABSORBED IN OTHER ITEMS.

3.) NO GRANULAR MATERIAL SHALL BE PLACED DIRECTLY UPON THE FINISHED SURFACE COURSE.

4.) FLOURESCENT ORANGE SHEETING SHALL BE USED ON ALL CONSTRUCTION AND TRAFFIC CONTROL SIGNS EXCEPT FOR THOSE DESIGNATED ON THE PLANS TO BE BLACK LEGEND AND BORDER ON WHITE BACKGROUND.

5.) ALL TRAFFIC CONTROL DEVICES ON THIS PROJECT SHALL COMPLY WITH PART VI OF THE MUTCD (LATEST EDITION).

6.) ALL PLASTIC DRUMS SHALL HAVE A BALLASTING COLLAR MADE FROM RECYCLED TRUCK TIRES OR OTHER SUITABLE MATERIAL.

7.) THE CONTRACTOR SHALL BE RESPONSIBLE FOR PROTECTING EXISTING STRUCTURES SUCH AS, BUT NOT LIMITED TO, PIPES, INLETS, APRONS, AND BRIDGES FROM DAMAGE WHICH MIGHT OCCUR DURING CONSTRUCTION. THE CONTRACTOR SHALL REPLACE OR REPAIR, AS DIRECTED BY THE ENGINEER, ANY STRUCTURES DAMAGED DURING THE LIFE OF THE CONTRACT. NO PAYMENT WILL BE MADE FOR REPLACEMENT OR REPAIR OF DAMAGED ITEMS.

8.) BIDDERS ARE ADVISED THAT HARD COPIES OF ANY ADDENDA FOR THIS PROJECT WILL NO LONGER BE MAILED. ALL ADDENDA FOR THIS PROJECT WILL BE POSTED TO www.mdot.ms.gov UNDER THE PROPOSAL ADDENDA COLUMN. IT IS THE BIDDER'S RESPONSIBILTY TO CHECK AND SEE IF ANY ADDENDA HAVE BEEN POSTED FOR THIS PROJECT. PLEASE CONTACT CONTRACT ADMINISTRATION DIVISION AT 601-359-7700 FOR ANY QUESTIONS REGARDING ELECTRONIC ADDENDA.

9.) ERECTION DATES ARE TO BE LEGIBLY WRITTEN IN BOLD, BLACK MARKINGS ON THE BACK OF ALL PERMANENT SIGNS WITH A PERMANENT MARKING STICK THAT IS WATERPROOF, FADE RESISTANT, AND MARKS ON WET OR DRY SURFACES.

NOTE:

1. ALL EXISTING SIGNS WHICH ARE TO BE REMOVED AS A PART OF THIS PROJECT THAT ARE NOT IN CONFLICT WITH CONSTRUCTION SHALL REMAIN IN PLACE UNTIL NEW SIGNS ARE INSTALLED UNLESS NOTED OR DIRECTED OTHERWISE BY THE PROJECT ENGINEER. ROADWAY SIGNS THAT ARE IN CONFLICT WITH CONSTRUCTION SHALL BE REMOVED AND RELOCATED BY THE CONTRACTOR AS DIRECTED BY THE ENGINEER, THE COST OF WHICH SHALL BE ABSORBED IN OTHER ITEMS BID."
2. ALL POST, PIPE, AND I-BEAM LENGTHS IN THESE PLANS ARE ESTIMATES. POST LENGTHS FOR ALL SIGNS SHALL BE VERIFIED IN THE FIELD BY THE CONTRACTOR PRIOR TO FABRICATION.
3. ALL PERMANENT SIGNS SHALL CONFORM TO THE LATEST EDITION OF THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES.
4. ALL SIGN LOCATIONS SHALL BE APPROVED BY THE PROJECT ENGINEER PRIOR TO INSTALLATION.
5. ALL EXISTING SIGNS AND SUPPORTS REMOVED UNDER THIS PROJECT SHALL BECOME THE PROPERTY OF THE CONTRACTOR AND ARE NOT A SEPARATE PAY ITEM.

DISTRICT 1

PS & E PLANS-DATE 12/22/2023		
FMS CON. * 307878/301000		
REVISIONS		
DATE	SHEET NO.	BY

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

DETAILED INDEX

PROJ. NO.: MP-1025-48(013)
COUNTY: MONROE

WORKING NUMBER: DI-1
SHEET NUMBER: 2

FILE NAME:
DESIGN TEAM CHECKED DATE

PLAN REVIEW DIVISION
MISSISSIPPI DEPARTMENT OF TRANSPORTATION

MKODYY 08.00.00APH TITLE.DGN