

STATE	PROJECT NUMBER	SHEET NO.
MISSISSIPPI	BR-0051-02(023)	1

GENERAL INDEX

INCLUDED THIS PROJECT	BEGIN WITH SHEET
☒ ROADWAY	1
☒ PERMANENT SIGNS	1001
☐ TRAFFIC SIGNALS	2001
☐ ITS COMPONENTS	3001
☐ LIGHTING	4001
☐ (RESERVED)	5001
☐ ROADWAY STANDARD DWGS	6001
☐ BOX CULVERT STD. DRAWINGS (LRFD)	7001
☐ BOX CULVERT STD. DRAWINGS (STD. SPEC.)	7501
☐ BRIDGE	8001
☒ CROSS SECTIONS	9001

BRIDGE STRUCTURES REQ'D.

- Ⓐ BRIDGE NO. 45.6
STA. 381+18.92 TO 382+81.08
2@80'
LENGTH ALONG C 162'-2"
- Ⓑ BRIDGE NO. 46.2
STA. 408+45.92 TO 424+88.25
1@81'-1", 2@80', 2@120', 1@110', SKEW TRANSITIONS FROM 0° TO 30° RT FWD AT END OF 6TH SPAN
1@260', 1@410', 1@260', 1@121'-3"
LENGTH ALONG C 1,642'-4"
- Ⓒ BRIDGE NO. 47.0
STA. 454+93.92 TO STA. 456+56.08
4@40'
LENGTH ALONG C 162'-2"

CONVENTIONAL SYMBOLS

COUNTY LINE	-----
TOWN CORPORATION LINE	-----
SECTION LINE	-----
EXISTING ROAD OR TRAVELED WAY	-----
PROPOSED ROAD OR TRAVELED WAY	-----
RAILROAD	-----
SURVEY LINE	-----
BRIDGES	-----


STATE OF MISSISSIPPI

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

PLAN AND PROFILE OF PROPOSED
STATE HIGHWAY
FEDERAL AID PROJECT NO. BR-0051-02(023)

SR 32 BETWEEN WEBB AND CHARLESTON
REPLACE BRIDGES
(45.6, 46.2, 47.0)
TALLAHATCHIE COUNTY

FMS CON. NO. 102383/302000

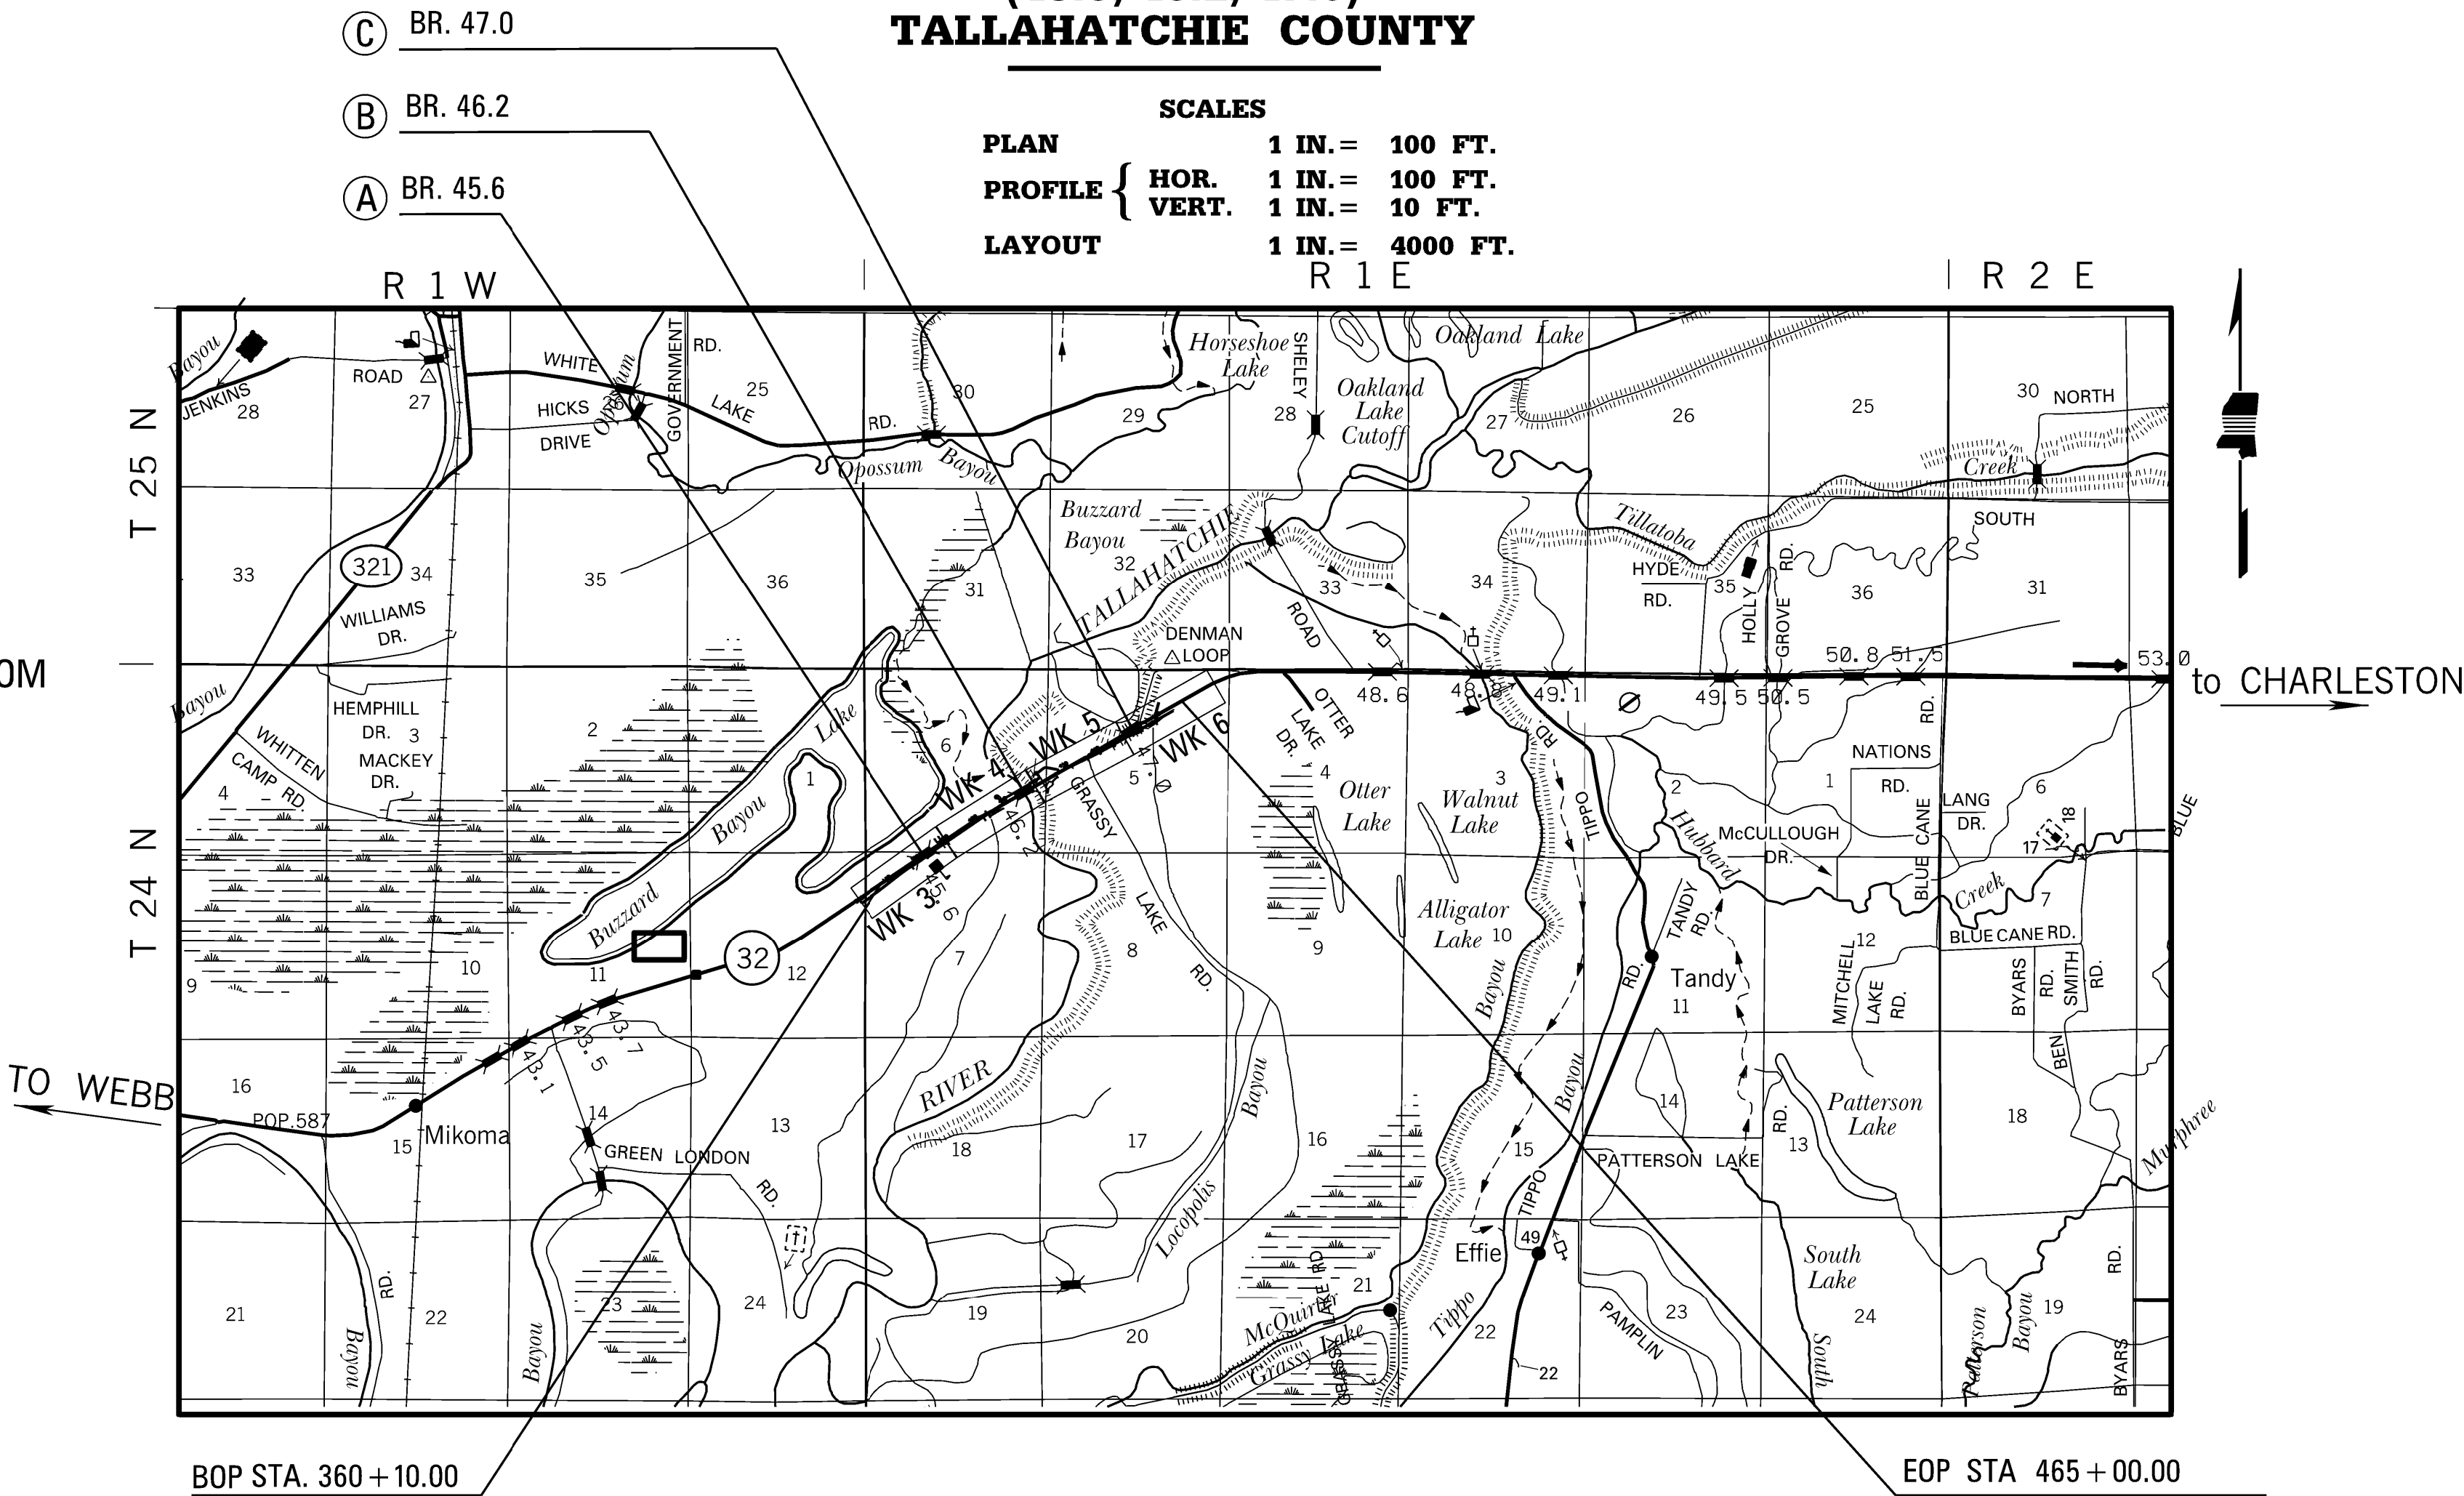

EQUATIONS


STA 444+24.399 BK = STA 444+13.329 AH (-11.070)

LENGTH DATA

LENGTH OF ROADWAY	10,478.930	FT.	1.985	MI.
LENGTH OF BRIDGES	1,966.670	FT.	0.372	MI.
LENGTH OF PROJECT (NET)	12,445.600	FT.	2.357	MI.
LENGTH OF EXCEPTIONS		FT.		MI.
LENGTH OF PROJECT (GROSS)	12,445.600	FT.	2.357	MI.

SCALES

PLAN	1 IN. = 100 FT.
PROFILE {	1 IN. = 100 FT.
HOR.	1 IN. = 10 FT.
VERT.	1 IN. = 4000 FT.
LAYOUT	1 IN. = 4000 FT.

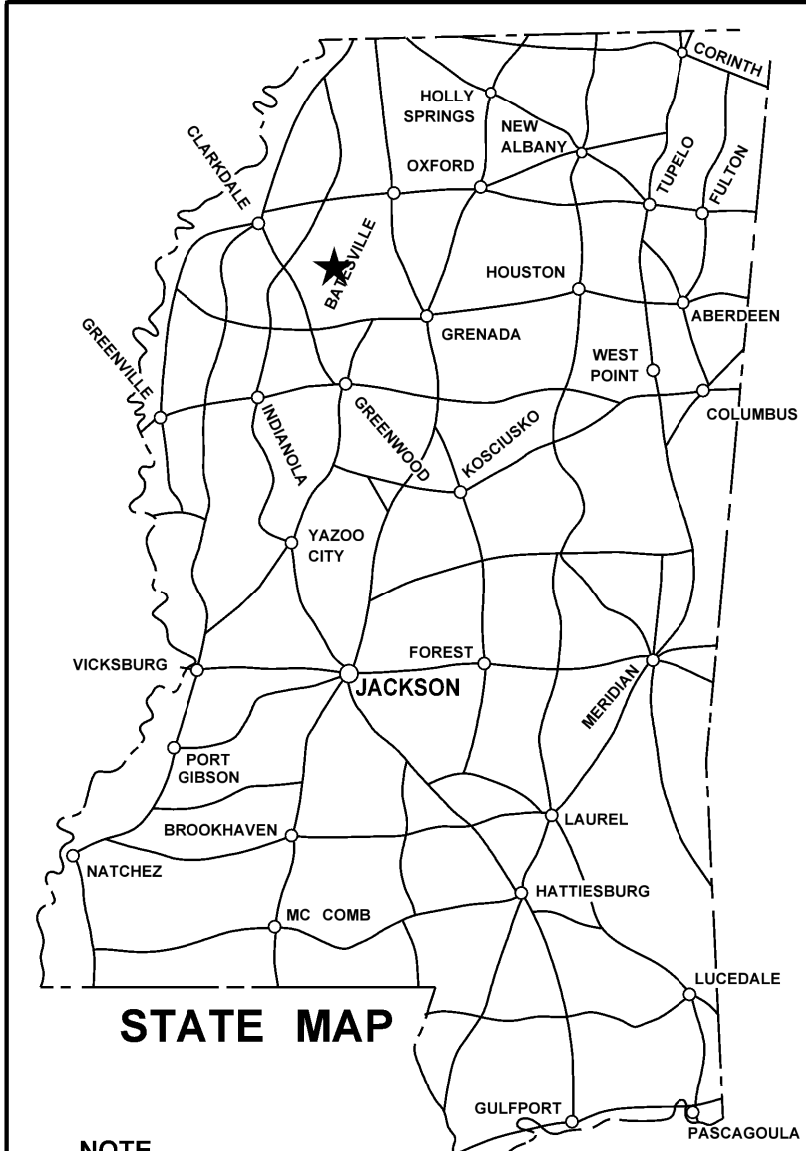

NOTE
★ INDICATES APPROXIMATE
LOCATION OF PROJECT.
LAT. 33°58.29'N LONG. 90°13.40'W
(APPROX. MIDDLE OF PROJECT)

DESIGN CONTROL (RURAL ARTERIAL)
65 MPH = V (SPEED DESIGN)

ADT (2018) = 1,300 ; ADT (2038) = 1,600
DHV = 180 ; D = 60 % T = 12 %

PERMITS ACQUIRED BY MDOT

WETLANDS AND WATERS PERMITS		
	WATERS	WETLANDS
NATIONWIDE #14	☐ N	☐ N
NATIONWIDE (OTHER)*	☐ Y	☐ Y
GENERAL*	☐ N	☐ N
INDIVIDUAL (404)*	☐ N	☐ N
STORMWATER PERMIT ☒ Y		
Y	REQUIRED, CNOI SUBMITTED BY MDOT (DISTURBED AREA > 5 ACRES)	
S	REQUIRED, SCNOI TO BE SUBMITTED BY CONTRACTOR (1 TO 4.99 ACRES)	
N	NO STORMWATER PERMIT REQUIRED (<1 ACRE)	
APPROVED BY: _____		



P S & E DATE: 11/06/2025

APPROVED: _____
DEPUTY EXECUTIVE DIRECTOR / CHIEF ENGINEER

EXECUTIVE DIRECTOR

REVISIONS	DATE

3/3/2026 3:00:45 PM DI - DGN
PLAN DIVISION
ROADWAY
MISSISSIPPI DEPARTMENT OF TRANSPORTATION

		STATE	PROJECT NO.		
		MISS.	BR-0051-02(023)		
DESCRIPTION OF SHEET	WKG. NO.	SH. NO.	DESCRIPTION OF SHEET	WKG. NO.	SH. NO.
TITLE SHEET (1)		1	FORM GRADES (1)		
DETAILED INDEX & GENERAL NOTES (4)			FORM GRADES - SUPERELEVATION CURVE 12 EXIT	FG-1	47
DETAILED INDEX	DI-1	2			
DETAILED INDEX	DI-2	3			
GENERAL NOTES	GN-1	4	DETAIL CONSTRUCTION SIGNS (1)		
GENERAL NOTES	GN-2	5	DETAIL CONSTRUCTION SIGNS - SR 32	DCS-1	48
TYPICAL SECTION SHEETS (4)			TRAFFIC CONTROL PLAN (13)		
TYPICAL SECTIONS - SR 32 - WIDENING AND OVERLAY/NEW CONSTRUCTION	TS-1	6	TRAFFIC CONTROL PLAN - PHASE 1	TC-1	49
TYPICAL SECTIONS - SR 32 - WIDENING & OVERLAY - NEW CONSTRUCITON - BOATRAMP & DRIVEWAY	TS-2	7	TRAFFIC CONTROL PLAN - PHASE 1A	TC-2	50
TYPICAL SECTIONS - SR 32 - CONSTRUCTION AND REMOVAL OF DETOUR ROAD	TS-3	8	TRAFFIC CONTROL PLAN - PHASE 1B	TC-3	51
TYPICAL SECTIONS - LOCAL ROAD - DENMAN LOOP	TS-4	9	TRAFFIC CONTROL PLAN - PHASE 1B	TC-4	52
			TRAFFIC CONTROL PLAN - PHASE 2	TC-5	53
			TRAFFIC CONTROL PLAN - PHASE 2	TC-6	54
			TRAFFIC CONTROL PLAN - PHASE 2	TC-7	55
			TRAFFIC CONTROL PLAN - PHASE 3	TC-8	56
			TRAFFIC CONTROL PLAN - PHASE 3	TC-9	57
			TRAFFIC CONTROL PLAN - PHASE 3	TC-10	58
			TRAFFIC CONTROL PLAN - CONNECTION AT BOP	TC-11	59
			TRAFFIC CONTROL PLAN - CONNECTION AT EOP	TC-12	60
			TRAFFIC CONTROL PLAN - DETOUR SITE	TC-13	61
SUMMARY OF QUANTITY SHEETS (3)					
SUMMARY OF QUANTITIES	SQ-1	10			
SUMMARY OF QUANTITIES	SQ-2	11			
SUMMARY OF QUANTITIES	SQ-3	12			
ESTIMATED QUANTITIES (13)			PAVEMENT MARKING DETAILS (2)		
ESTIMATED QUANTITIES - REMOVAL ITEMS	EQ-1	13	PAVEMENT MARKING DETAILS - SR 32	PMD-1	62
ESTIMATED QUANTITIES - GRASSING & SOLID SOD ITEMS	EQ-2	14	PAVEMENT MARKING DETAILS - SR 32	PMD-2	63
ESTIMATED QUANTITIES - EARTHWORK PHASE 1A & PHASE 1B	EQ-3	15			
ESTIMATED QUANTITIES - EARTHWORK PHASE 2 & PHASE 3	EQ-4	16			
ESTIMATED QUANTITIES - PERMANENT & TEMPORARY EROSION CONTROL ITEMS	EQ-5	17			
ESTIMATED QUANTITIES - PAVING ITEMS	EQ-6	18			
ESTIMATED QUANTITIES - GUARDRAIL & BRIDGE END PAVEMENT ITEMS	EQ-7	19	REMOVAL PLAN (2)		
ESTIMATED QUANTITIES - DRIVEWAYS ITEMS	EQ-8	20	REMOVAL PLAN - SR 32	RP-1	64
ESTIMATED QUANTITIES - DRAINAGE ITEMS	EQ-9	21	REMOVAL PLAN - SR 32	RP-2	65
ESTIMATED QUANTITIES - PAVEMENT MARKING ITEMS	EQ-10	22			
ESTIMATED QUANTITIES - TRAFFIC CONTROL ITEMS	EQ-11	23			
ESTIMATED QUANTITIES - PERMANENT SIGNS	EQ-12	24			
ESTIMATED QUANTITIES - TRAFFIC CONTROL SIGNS	EQ-13	25	SPECIAL DESIGN SHEETS (9)		
			RIGHT-OF-WAY COORDINATE SHEET - RIGHT-OF-WAY MARKERS	RWC-1	66
			RIGHT-OF-WAY COORDINATE SHEET - TEMPORARY EASEMENTS	RWC-2	67
			VEGETATION SCHEDULE	VS-1	68
			VEGETATION SCHEDULE - DETOUR	VS-2	69
			BRIDGE END PAVEMENT WITH RAIL, OVERLAY, AND SLEEPER SLAB (NEW CONSTRUCTION)	SDBE-1	70
			33.5" BRIDGE END PAVEMENT RAIL	SDBER-1	71
			TRAFFIC SIGN SUPPORTS 2" SQUARE POST	TSS-1	72
			TRAFFIC SIGN SUPPORTS 2.5" SQUARE POST	TSS-2	73
			MISCELLANEOUS DETAIL	MTSD-1	74
PLAN & PROFILE SHEETS (9)			PERMANENT SIGNING PLAN (1)	PSP-1	1001
PLAN & PROFILE SR 32	3	26	PERMANENT SIGNING PLAN - SR 32		
PLAN & PROFILE SR 32	4	27			
PLAN & PROFILE SR 32	5	28			
PLAN & PROFILE SR 32 - DRIVEWAY 428+00	5A	29			
PLAN & PROFILE SR 32 - BOATRAMP	5B	30			
PLAN & PROFILE SR 32 - LOCAL ROAD 440+86	5C	31			
PLAN & PROFILE SR 32	6	32			
PLAN & PROFILE SR 32 - DETOUR	6A	33			
PLAN & PROFILE SR 32 - LOCAL ROAD DENMAN	6B	34			
EROSION CONTROL SHEETS (12)					
EROSION CONTROL PLAN - SR 32	ECP-3	35			
EROSION CONTROL PLAN - RIPARIAN BUFFER - SR 32	ECP-RB-3	36			
EROSION CONTROL PLAN - SR 32	ECP-4	37			
EROSION CONTROL PLAN - RIPARIAN BUFFER - SR 32	ECP-RB-4	38			
EROSION CONTROL PLAN - SR 32	ECP-5	39			
EROSION CONTROL PLAN - SR 32 - BOATRAMP	ECP-5A	40			
EROSION CONTROL PLAN - SR 32 - DRIVEWAY 428+00	ECP-5B	41			
EROSION CONTROL PLAN - SR 32 - LOCAL ROAD 440+86	ECP-5C	42			
EROSION CONTROL PLAN - SR 32	ECP-6	43			
EROSION CONTROL PLAN - RIPARIAN BUFFER - SR 32	ECP-RB-6	44			
EROSION CONTROL PLAN - SR 32 - DETOUR	ECP-6A	45			
EROSION CONTROL PLAN - SR 32 - LOCAL ROAD DENMAN	ECP-6B	46			

MIRANDA N. NICHOLS

ENGINEER

21030

STATE OF MISSISSIPPI


ROADWAY

M

MENDROP

MENDROP ENGINEERING RESOURCES		
PS & E PLANS-DATE 03/05/26		
FMS CON. # 102406/302000		
REVISIONS		
DATE	SHEET NO.	BY
03/05/26	3,10,11,12,17,24,62	MN
	63,72,6051,6061	
	6064,6304-6306,6314,	
	6317,6318,6351,6356,	
	6358,6359,6362,6363,8	
	6366	

				BY	MISSISSIPPI DEPARTMENT OF TRANSPORTATION DETAILED INDEX	DEPARTMENT OF TRANSPORTATION MISSISSIPPI WORKING NUMBER DI-1
				REVISION		
			DATE	FILE NAME: DI.dgn	PROJ. NO.: BR-0051-02(023) COUNTY: TALLAHATCHIE	SHEET NUMBER 2
			DESIGN TEAM	MENDROP	CHECKED	DATE

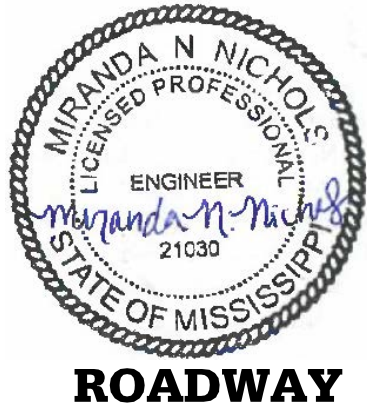

MENDROP ENGINEERING RESOURCES		
PS & E PLANS-DATE 03/05/26		
FMS CON. # 102406/302000		
REVISIONS		
DATE	SHEET NO.	BY
03/05/26	3,10,11,12,17,24,62	MN
	63,72,6051,6061	
	6064,6304-6306,6314,	
	6317,6318,6351,6356,	
	6358,6359,6362,6363,&	
	6366	

				BY	MISSISSIPPI DEPARTMENT OF TRANSPORTATION DETAILED INDEX
				REVISION	
				DATE	PROJ. NO.: BR-0051-02(023) COUNTY: TALLAHATCHIE
				DESIGN TEAM	FILE NAME: DI.dgn
				MENDROP	WORKING NUMBER DI-1
				CHECKED	SHEET NUMBER 2
				DATE	

3/2/2026 9:42:08 AM DI - DGN
ROADWAY
PLAN DIVISION
MISSISSIPPI DEPARTMENT OF TRANSPORTATION

STATE		PROJECT NO.	
MISS.		BR-0051-02(023)	
DESCRIPTION OF SHEET		WKG. NO.	SH. NO.
STANDARD DRAWINGS - ROADWAY SHEETS (68)			
CONCRETE ISLAND PAVEMENT DETAILS	CIP-1	6011	
PAVEMENT MARKING DETAILS FOR 2-LANE & 4-LANE DIVIDED ROADWAYS	PM-1	6051	
2-WAY RETROFLECTION RAISED PAVEMENT MARKINGS AT INTERSECTING ROADS (2-LANE)	PM-11	6061	⚠
RUMBLE STRIPES 2-LANES HIGHWAYS (ASPHALT LANES, 2-FT ASPHALT SHOULDERS)	RS-1	6064	
TYPICAL TEMPORARY EROSION / SEDIMENT CONTROL APPLICATIONS	ECD-1	6101	
DETAILS OF SEDIMENT BARRIER APPLICATIONS	ECD-2	6102	
DETAILS OF SILT FENCE INSTALLATION	ECD-3	6103	
DITCH CHECK STRUCTURES, TYPICAL APPLICATIONS AND DETAILS	ECD-4	6104	
TEMPORARY EROSION, SEDIMENT AND WATER POLLUTION CONTROL MEASURES, (SILT FENCE AND HAY BALE DITCH CHECKS)	ECD-5	6105	
DETAILS OF EROSION CONTROL WATTLE DITCH CHECK	ECD-6	6106	
DETAILS OF EROSION CONTROL SILT DIKE DITCH CHECK	ECD-7	6107	
ROCK DITCH CHECK	ECD-8	6108	
ROCK FILTER DAM	ECD-9	6109	
ROCK DITCH CHECK WITH SUMP EXCAVATION AND ROCK FILTER DAM	ECD-10	6110	
TYPICAL APPLICATIONS AND DETAILS FOR INLET CONSTRUCTION	ECD-11	6111	
INLET PROTECTION DETAILS FOR SEDIMENT CONTROL STONE ON GRADES AND SAGS	ECD-12	6112	
INLET PROTECTION DETAILS OF WATTLES	ECD-13	6113	
INLET PROTECTION DETAILS OF MANUFACTURED INLET PROTECTION DEVICE	ECD-14	6114	
INLET PROTECTION DETAILS OF SANDBAGS	ECD-15	6115	
STABILIZED CONSTRUCTION ENTRANCE	ECD-16	6116	
FLOATING TURBIDITY CURTAIN	ECD-20	6120	
DETAILS OF EROSION CONTROL SANDBAG DITCH CHECK	ECD-21	6121	
SEDIMENT RETENTION BARRIER	ECD-22	6122	
DETAILS OF TYPICAL DITCH TREATMENTS	DT-1	6123	
TYPICAL TEMPORARY EROSION CONTROL MEASURES (TYPE D SILT BASIN) (135 CU. YDS. CAPACITY PER ACRE OF DRAINAGE)	BAS-D	6129	
SUPER SILT FENCE	SSF-1	6130	
EROSION CONTROL BLANKET	ECB-1	6131	
GUARDRAIL: "W" BEAM (WOOD POSTS)	GR-1	6201	
GUARDRAIL: "W" BEAM (STEEL POSTS)	GR-1B	6203	
GUARDRAIL: BRIDGE END SECTION TYPE "I" (WOOD POSTS) (NEW CONSTRUCTION)	GR-2F	6210	
GUARDRAIL: BRIDGE END SECTION TYPE "I" (STEEL POSTS) (NEW CONSTRUCTION)	GR-2G	6211	
GUARDRAIL: TYPICAL INSTALLATION AT BRIDGE APPROACHES FOR 2-LANE, 2-WAY HIGHWAY	GR-4A	6215	
GUARDRAIL: RUB RAIL HARDWARE	GR-RR	6218	
GUARDRAIL (TEMPORARY): TYPICAL INSTALLATION AT DETOUR BRIDGE ENDS	TGR-1	6219	
GUARDRAIL: MISCELLANEOUS HARDWARE	GR-HW	6221	
STANDARD ROADSIDE SIGNS	SN-3A	6304	
STANDARD ROADSIDE SIGNS	SN-3B	6305	
STANDARD ROADSIDE SIGN ASSEMBLY AND INSTALLATION	SN-4	6306	
STANDARD ROADSIDE SIGN ASSEMBLY AND INSTALLATION	SN-4A	6307	
STANDARD ROADSIDE SIGN ASSEMBLY AND INSTALLATION	SN-4B	6308	
BREAKAWAY SIGN SUPPORTS	SN-6A	6311	
BREAKAWAY SIGN SUPPORTS	SN-6B	6312	
TYPICAL INSTALLATION AND DETAILS OF DELINEATORS AND DISTANCE REFERENCE SIGNS	SN-8	6314	
TYPICAL GUARDRAIL DELINEATION	SN-8C	6317	
SIGNING DETAILS FOR BRIDGE APPROACHES	SN-9	6318	
STANDARD DRAWINGS - ROADWAY SHEETS (CONTINUED)			
TRAFFIC CONTROL PLAN WITH FLAGGER (ONE-LANE CLOSURE OF TWO-WAY TRAFFIC)	TCP-1	6351	
SHORT DURATION CLOSING OF TWO-LANE TWO-WAY HIGHWAYS	TCP-6	6356	
HIGHWAY SIGN AND BARRICADE DETAILS FOR CONSTRUCTION PROJECTS	TCP-8	6358	
TRAFFIC CONTROL PLAN MOBILE OPERATIONS MULTILANE ROADS AND TWO-LANE ROADS	TCP-9	6359	
TRAFFIC CONTROL PLANS UNEVEN PAVEMENT DETAILS	TCP-12	6362	
TEMPORARY STRIPING FOR TRAFFIC CONTROL 2-LANE AND 4-LANE DIVIDED HIGHWAYS	TCP-13	6363	
LOCATION OF R16-3 SIGNS (SPEEDING FINES DOUBLED)	TCP-15	6365	
TRAFFIC CONTROL DETAILS - DRUM PLACEMENT AND SHOULDER CLOSURE	TCP-16	6366	
RIGHT-OF-WAY MARKER	RW-1	6401	
RURAL DRIVEWAYS	RD-1	6403	
TYPICAL GRADING TRANSITION BETWEEN CUTS AND FILLS	GT-1	6404	
GUIDE BANK (SPUR DIKE): EARTH	ED-1	6406	
SUPERELEVATION CASE 1 ROTATION ABOUT CENTERLINE	SE-2A	6408	
SUPERELEVATION RUNOFF CASE 1 ROTATION ABOUT CENTERLINE	SE-3A	6413	
MISCELLANEOUS DETAIL SHEET 1. STACKED PIPE JOINT 2. EXCAVATION AT GRADE POINTS	MDS-1	6425	
DETAILS OF PAVED FLUMES	PF-1	6426	
PIPE CULVERT INSTALLATION	PI-1	6501	
FLEXIBLE PIPE CULVERT INSTALLATION	PI-2	6502	
CONCRETE PIPE COLLAR	PC-1	6503	
TYPE I MEDIAN INLET (29" TO 51" PIPE)	MI-1A	6509	
FLARED END SECTION FOR CONCRETE PIPE	FE-1	6530	
DETAILS OF NORMAL UNDERDRAIN AND STORM DRAIN USED AS UNDERDRAIN	UD-1	6533	
NORMAL UNDERDRAIN TYPE II	UD-2	6534	
CROSS-SECTION SHEETS (43)			
SR 32 (23)			9001-9043
DETOUR (3)			
DRIVEWAY 428+00 (3)			
BOATRAMP (12)			
LOCAL ROAD 440+86 (1)			
LOCAL ROAD DENMAN (1)			
TOTAL SHEETS (EXCLUDING BRIDGE SHEETS) (186) (SEE SH 8001 FOR BRIDGE PLANS)			



MIN	BY	MISSISSIPPI DEPARTMENT OF TRANSPORTATION	
REV	DATE	DETAILED INDEX	
DESCRIPTION OF SHEET	REVISION	PROJ. NO.: BR-0051-02(023)	
		COUNTY: TALLAHATCHIE	
		FILE NAME: DI.dgn	
		DESIGN TEAM	MENDROP
		CHECKED	DATE
		WORKING NUMBER	
		DI-2	
		SHEET NUMBER	
		3	

STATE	PROJECT NO.
MISS.	BR-0051-02(023)

GENERAL NOTES

BRIDGES AND WALLS

(1) THE BRIDGE DECKS SHALL BE GROOVED AND ALL BRIDGE JOINTS SHALL BE SEALED PRIOR TO OPENING THE BRIDGES TO TRAFFIC.

(2) STORAGE OF FLAMMABLE MATERIALS WILL NOT BE ALLOWED UNDER ANY BRIDGE STRUCTURES WITHOUT WRITTEN APPROVAL FROM THE PROJECT ENGINEER. SEE NOTICE TO BIDDERS ENTITLED "MATERIAL STORAGE UNDER BRIDGES" FOR MORE INFORMATION.

DRAINAGE STRUCTURES

(3) ALL PIPE JOINTS ARE TO BE WRAPPED IN 24-INCH WIDE TYPE V GEOTEXTILE FABRIC. ALL PICKUP HOLES SHALL BE PLUGGED AND COVERED WITH TYPE V GEOTEXTILE FABRIC, THE COST OF WHICH SHALL BE ABSORBED IN OTHER ITEMS BID.

(4) THE COST OF ANY COLLARS REQUIRED TO CONNECT CONCRETE FLARED END SECTIONS TO NON-CONCRETE PIPE SECTIONS SHALL BE ABSORBED IN THE COST FOR NON-CONCRETE PIPE.

(5) CURB AND GUTTER VERTICAL DIMENSIONS SHOWN IN THE DETAIL DRAWINGS ARE FOR A CURB IN THE "CATCH" CONFIGURATION AND SHALL BE CONSIDERED TO BE MINIMUM DIMENSIONS. THE DIMENSIONS MAY BE MODIFIED AS NECESSARY FOR "SPILL" CURB AND GUTTER, BUT SHALL NOT BE LESS THAN THE MINIMUM SHOWN.

(6) THE COST FOR REMOVAL OF ALL HEADWALLS AND WINGWALLS (PIPES, BOX CULVERTS, BOX BRIDGES) SHALL BE ABSORBED IN OTHER ITEMS BID.

(7) THE CONTRACTOR SHALL BE RESPONSIBLE FOR PROTECTING EXISTING STRUCTURES SUCH AS, BUT NOT LIMITED TO, PIPES, INLETS, APRONS, AND BRIDGES FROM DAMAGE WHICH MIGHT OCCUR DURING CONSTRUCTION. THE CONTRACTOR SHALL REPLACE OR REPAIR, AS DIRECTED BY THE ENGINEER, ANY STRUCTURES DAMAGED DURING THE LIFE OF THE CONTRACT. NO PAYMENT WILL BE MADE FOR REPLACEMENT OR REPAIR OF DAMAGED ITEMS.

EARTHWORK

(8) A SOIL PROFILE HAS BEEN PREPARED FOR THIS PROJECT USING SAMPLES TAKEN FROM HOLES AT THE LOCATIONS INDICATED IN THE TEST REPORTS. THIS SOIL PROFILE IS ON FILE IN THE DISTRICT AND CENTRAL CONSTRUCTION OFFICES AND IS AVAILABLE FOR EXAMINATION. THE DEPARTMENT DOES NOT GUARANTEE THAT THE MATERIALS AS SHOWN IN THE REPORTS ARE NECESSARILY TO BE FOUND OUTSIDE THE TEST HOLES.

(9) 25% SHRINKAGE FACTOR USED IN THE EARTHWORK CALCULATIONS IS FOR DESIGN ESTIMATING PURPOSES ONLY.

(10) THE TOP THREE FEET AND VARIABLE OF THE DESIGN SOILS (BOTH NATURAL AND EMBANKMENT) SHALL BE CONSTRUCTED OF SOIL CLASSIFIED AS B9 OR BETTER, PER AASHTO DESIGNATION: M 145-91, EXCEPT AT UNDERCUT LOCATIONS DESIGNATED ON THE PLANS OR AS DIRECTED BY THE ENGINEER TO RECEIVE CLASS B-15 BORROW EXCAVATION. EXTREME CARE SHALL BE EXERCISED IN UNDERCUT AREAS, AND THE UNDERCUT DEPTH MAY BE ADJUSTED AT CROSS DRAINS AS DIRECTED BY THE ENGINEER. FOR ADDITIONAL DETAILS THE CONTRACTOR IS REFERRED TO THE NOTICE TO BIDDERS ON DESIGN SOIL MATERIAL IN THE CONTRACT PROPOSAL DOCUMENT.

(11) VOIDS CREATED BY THE REMOVAL OF, BUT NOT LIMITED TO, POSTS, CONCRETE ANCHORS, AND FOOTINGS SHALL BE BACKFILLED AND TAMPED IN ACCORDANCE WITH SECTION 203 OF THE MISSISSIPPI STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION, THE COST OF WHICH WILL BE ABSORBED IN OTHER ITEMS BID.

(12) WORK ON STRUCTURES FOR THIS PROJECT REQUIRES EXCAVATION IN THE IMMEDIATE VICINITY OF TRAFFIC AND ADJACENT PROPERTIES. THEREFORE, THE RISK OF A FAILURE OCCURRING DURING EXCAVATION REQUIRES THAT EXTREME CAUTION BE EXERCISED. THE CONTRACTOR SHALL BE RESPONSIBLE FOR PLACING WHAT BRACING, SHORING, OR GROUND SUPPORT SYSTEM THAT IS DEEMED NECESSARY TO PREVENT A FAILURE AND PROTECT THE PERSONS WORKING NEAR THE EXCAVATION, THE PUBLIC THAT MAY BE ABOVE THE EXCAVATION, OR ANY STRUCTURES ADJACENT TO THE EXCAVATION. ALL COSTS FOR DESIGNING, DRAWING, AND CONSTRUCTING THE FACILITY SHALL BE INCLUDED IN THE PRICE BID FOR CONTRACT ITEMS.

(13) SMALL AMOUNTS OF EXCAVATION MAY BE NECESSARY AT SOME OF THE SITES. THIS MATERIAL MAY BE USED AS E.S.F.E. MATERIAL AND WILL BE PAID FOR AS BORROW. NO E.S.F.E. MATERIAL SHALL BE REMOVED FROM THE PROJECT WITHOUT THE APPROVAL OF THE ENGINEER.

(14) VEGETATIVE MATERIAL WILL BE REMOVED PRIOR TO PLACEMENT OF GRANULAR MATERIAL. THE COST OF WHICH SHALL BE ABSORBED IN OTHER ITEMS BID.

(15) THIN LAYERS OF ROCK ENCOUNTERED DURING EXCAVATION WILL BE PAID FOR AS UNCLASSIFIED EXCAVATION. SOLID ROCK AS SHOWN ON PLANS AND CROSS SECTIONS WILL BE PAID FOR AS ROCK EXCAVATION.

(16) PRIOR TO EARTHWORK OPERATIONS, THE EXISTING TOP 6" TOPSOIL IS TO BE STRIPPED AND STOCKPILED. AFTER THE GRADING OPERATIONS ARE COMPLETED, SAID TOPSOIL SHALL BE PLACED ON ALL AREAS THAT ARE NOT TO BE PAVED OR OTHERWISE PROTECTED, IN ACCORDANCE WITH SECTION 211 OF THE SPECIFICATIONS, OR THE VEGETATION SCHEDULE (SEE WK. SH. VS-1). EXISTING TOPSOIL AND ALL COSTS ASSOCIATED WITH STRIPPING, HAULING, STOCKPILING, AND PLACEMENT OF THE EXISTING TOPSOIL IS TO BE ABSORBED IN OTHER EARTHWORK ITEMS.

GENERAL NOTES (CONT.)

ENVIRONMENTAL & CLEARING

(18) NO TEMPORARY CULVERT STREAM CROSSINGS WILL BE ALLOWED.

(19) FOR CLEARING LIMITS ADJACENT TO THE STREAMS AT STATION(S) 380+00 TO 386+00, SEE WORKING SHEET NUMBERS ECP-RB-3. FOR CLEARING LIMITS ADJACENT TO THE STREAMS AT STATION(S) 403+00 TO 427+00, SEE WORKING SHEET NUMBERS ECP-RB-4. FOR CLEARING LIMITS ADJACENT TO THE STREAMS AT STATION(S) 454+00 TO 457+00, SEE WORKING SHEET NUMBERS ECP-RB-5. THE CLEARING LIMITS SHOWN ON THESE SHEETS ARE ONLY FOR THE RIPARIAN BUFFER CLEARING. CLEARING AT OTHER LOCATIONS SHOULD STILL APPLY.

(20) CLEARING IN WETLANDS AREA UNDERNEATH BRIDGES IS PROHIBITED, EXCEPT WHERE NECESSARY FOR BRIDGE CONSTRUCTION. THIS CLEARING MUST BE DONE WITH SAWS, BULL DOZERS OR OTHER MECHANIZED CLEARING, WHICH WILL DISTURB NATURAL GROUND SURFACE, ARE NOT ALLOWED.

EROSION CONTROL - PERMANENT

EROSION CONTROL - TEMPORARY

(21) WIRE FENCE BACKING WILL BE REQUIRED FOR ALL SILT FENCE. (SEE WK. NO. ECD-3)

(22) THE EROSION CONTROL DEVICES REFERENCED IN THESE PLANS ARE A MINIMUM REQUIREMENT. IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO ENSURE THAT SILT DOES NOT LEAVE THE RIGHT OF WAY OR CONTAMINATE WATERS OF THE U. S. DURING CONSTRUCTION. THE CONTRACTOR SHALL SUBMIT AN EROSION CONTROL PLAN PRIOR TO COMMENCEMENT OF WORK AND MAINTAIN THE PLAN DURING CONSTRUCTION. ANY ADDITIONAL SILT BASINS NOT SHOWN IN THE PLANS SHALL BE INCLUDED IN THE CONTRACTOR'S EROSION CONTROL PLAN PRIOR TO SUBMITTING FOR APPROVAL.

(23) ALL ITEMS OF WORK ASSOCIATED WITH THE INSTALLATION OF A CONSTRUCTION ENTRANCE SHALL BE ABSORBED IN OTHER ITEMS OF WORK.

PAVEMENT, BASE, AND SHOULDERS

(24) THE CONTRACTOR SHALL REPAIR ANY DAMAGE TO THE PAVED OR UNPAVED SHOULDER THAT MIGHT OCCUR DURING CONSTRUCTION. ANY REPAIR TO SHOULDER WILL BE IN ACCORDANCE WITH THE APPLICABLE SECTIONS OF THE MISSISSIPPI STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION. NO PAYMENT WILL BE MADE FOR REPAIR OF DAMAGED SHOULDER.

(25) TEMPORARY PAVEMENT JOINTS (PAPER JOINTS) SHALL BE EMPLOYED AT ALL LOCATIONS REQUIRING TRAFFIC TO TRAVERSE AN UNEVEN PAVEMENT JOINT. PAPER JOINTS SHALL BE A MINIMUM OF 9 FEET IN LENGTH AND SHALL BE ADEQUATELY MAINTAINED.

(26) WHERE MILLING IS REQUIRED, THE CONTRACTOR SHALL PROVIDE OUTLETS IN THE EXISTING SHOULDERS AT SUFFICIENT INTERVALS TO PREVENT POOLING OR STANDING WATER ON THE MILLED SURFACE, THE COST OF WHICH SHALL BE ABSORBED IN OTHER ITEMS BID.

PLANS

(27) IF COLORS ARE USED ON PLAN/PROFILE SHEETS, THEY ARE INTENDED TO VISUALLY EASE THE LOCATION OF ELEMENTS FOR USERS OF THESE DRAWINGS. ALTHOUGH THE INTENT IS TO CATEGORIZE EVERYTHING AS EITHER EXISTING OR PROPOSED, IT IS THE END USER'S RESPONSIBILITY TO ENSURE ALL ELEMENTS ARE INTERPRETED CORRECTLY, REGARDLESS OF COLOR.

(28) ALL ADDENDA TO THESE PLANS WILL BE POSTED TO WWW.MDOT.MS.GOV UNDER THE PROPOSAL ADDENDA COLUMN. BIDDERS ARE ADVISED THAT HARD COPIES OF ANY ADDENDA FOR THIS PROJECT WILL NOT BE MAILED. IT IS THE BIDDER'S RESPONSIBILITY TO CHECK AND SEE IF ANY ADDENDA HAVE BEEN POSTED FOR THIS PROJECT.

(29) SEE BRIDGE PLANS FOR DETAILED INDEX SHEET(S), ESTIMATED AND SUMMARY OF QUANTITY SHEETS, AND EROSION CONTROL SHEETS.

NOTICE:
THE NOTES CONTAINED HEREON ARE SPECIFIC TO THE SUBJECT PROJECT AND SHOULD BE REVIEWED IN DETAIL BY THE CONTRACTOR, PER SECTION 102.05 OF THE STANDARD SPECIFICATIONS, "THE BIDDER IS REQUIRED TO EXAMINE CAREFULLY THE SITE OF THE PROPOSED WORK, THE PROPOSAL, PLANS, STANDARD SPECIFICATIONS, SPECIAL PROVISIONS, NOTICES TO BIDDERS AND CONTRACT FORMS BEFORE SUBMITTING A PROPOSAL."



				MISSISSIPPI DEPARTMENT OF TRANSPORTATION GENERAL NOTES			
				PROJ. NO.: BR-0051-02(023) COUNTY: TALLAHATCHIE			
				FILE NAME: _GN.dgn			
				DESIGN TEAM _____ MENDROP _____ CHECKED _____ DATE _____			
				WORKING NUMBER GN-1			
				SHEET NUMBER 4			



11/5/2025 3:40 PM GN.DGN
PLAN DIVISION
ROADWAY
MISSISSIPPI DEPARTMENT OF TRANSPORTATION

STATE	PROJECT NO.
MISS.	BR-0051-02(023)

GENERAL NOTES

ROADSIDE BARRIERS

(30) ALL DIMENSIONS AND SPACINGS FOR BRIDGE RAIL CONNECTORS SHALL BE VERIFIED IN THE FIELD BY THE CONTRACTOR PRIOR TO FABRICATION.

TRAFFIC CONTROL - PERMANENT

(31) INSTALLATION DATES SHALL BE CLEARLY WRITTEN IN BOLD BLACK MARKINGS ON THE BACK BOTTOM HALF OF ALL SIGNS WITH A PERMANENT MARKING STICK THAT IS WATERPROOF, FADE RESISTANT AND MARKS ON WET OR DRY SURFACES.

(32) ALL POST, PIPE, AND I-BEAM LENGTHS IN THESE PLANS ARE ESTIMATES. POST LENGTHS FOR ALL SIGNS SHALL BE VERIFIED IN THE FIELD BY THE CONTRACTOR PRIOR TO FABRICATION.

(33) ALL EXISTING SIGNS WHICH ARE TO BE REMOVED AS A PART OF THIS PROJECT THAT ARE NOT IN CONFLICT WITH CONSTRUCTION SHALL REMAIN IN PLACE UNTIL NEW SIGNS ARE INSTALLED UNLESS NOTED OR DIRECTED OTHERWISE BY THE PROJECT ENGINEER. ROADWAY SIGNS THAT ARE IN CONFLICT WITH CONSTRUCTION SHALL BE REMOVED AND RELOCATED BY THE CONTRACTOR AS DIRECTED BY THE ENGINEER, THE COST OF WHICH SHALL BE ABSORBED IN OTHER ITEMS BID.

(34) DIRECT-APPLIED LEGEND, BORDER, AND/OR SHIELDS ARE TO BE USED ON ALL SIGNS. DIGITALLY PRODUCED SIGN COPY, SHIELDS, LEGEND, SYMBOLS, OR IMAGES WILL NOT BE ALLOWED WITHOUT WRITTEN APPROVAL FROM MDOT'S PROJECT ENGINEER.

(35) AFTER THE PERMANENT SIGNS HAVE BEEN INSTALLED, THE CONTRACTOR SHALL SUBMIT TO THE PROJECT ENGINEER A DIGITAL COPY OF A MICROSOFT EXCEL SPREADSHEET WITH THE FOLLOWING INVENTORY DATA CAPTURED FOR EACH SIGN: LOCATION OF SIGN (LATITUDE-LONGITUDE GPS COORDINATES), MUTCD SIGN CODE, SIZE, BACKGROUND AND LEGEND COLORS, SUPPORT TYPE (POST, PIPE, SQUARE POST, OR I-BEAM), NUMBER OF SUPPORTS, DATE OF INSTALLATION, SIGN FACE DIRECTION, ROUTE NAME OR NUMBER, DIRECTION OF VEHICLE TRAVEL, AND LEGEND ON SIGN IF APPLICABLE. EACH SIGN SHALL BE ASSIGNED A UNIQUE ID NUMBER AND A DIGITAL PHOTO OF EACH SIGN SHALL BE SUBMITTED IN BITMAP FORMAT. THE PHOTO FILENAME SHALL CORRESPOND WITH THE UNIQUE ID NUMBER.

(36) MDOT'S TRAFFIC ENGINEERING DIVISION SHALL BE NOTIFIED UPON SUBSTANTIAL COMPLETION OF THE PROJECT IN ORDER TO EVALUATE THE SPEED LIMIT VALUES AND THE LIMITS OF THE SPEED ZONES PRIOR TO THE FABRICATION AND INSTALLATION OF ANY SPEED LIMIT SIGNS.

(37) ALL PERMANENT SIGNS SHALL CONFORM TO THE LATEST EDITION OF THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES.

(38) ALL SIGN LOCATIONS SHALL BE APPROVED BY THE PROJECT ENGINEER PRIOR TO INSTALLATION.

(39) THE RETROREFLECTIVE SIGN SHEETING ON PERMANENT GROUND-MOUNTED SIGNS SHALL BE AS FOLLOWS: BROWN BACKGROUND SHEETING ON GUIDE SIGNS SHALL BE MINIMUM TYPE VIII; GREEN AND BLUE BACKGROUND SHEETING ON GUIDE SIGNS SHALL BE MINIMUM TYPE IX; ALL WHITE, YELLOW, FLUORESCENT YELLOW AND FLUORESCENT YELLOW/GREEN SHEETING SHALL BE TYPE XI. ALL SIGN SHEETING ON OVERHEAD SIGNS SHALL BE TYPE XI.

(40) ALL EXISTING SIGNS AND SUPPORTS REMOVED UNDER THIS PROJECT SHALL BECOME THE PROPERTY OF THE CONTRACTOR AND ARE NOT A SEPARATE PAY ITEM.

(41) ALL SIDE ROAD, STOP SIGN MOUNTED STREET NAME SIGNS TO BE SALVAGED AND STORED AT THE DIRECTION OF THE PROJECT ENGINEER (NOT A SEPARATE PAY ITEM).

(42) REMOVAL OF RAISED PAVEMENT MARKERS THAT ARE IN CONFLICT WITH REQUIRED CONSTRUCTION IS NOT CONSIDERED A SEPARATE PAY ITEM. COST TO BE ABSORBED IN OTHER ITEMS BID.

(43) REMOVAL OF OBJECT MARKERS IS NOT CONSIDERED A SEPARATE PAY ITEM, AND SHALL BE ABSORBED IN OTHER ITEMS BID.

TRAFFIC CONTROL - TEMPORARY

(44) THE LOCATION AND SPACING OF SIGNS, SHOWN ON THE TRAFFIC CONTROL PLANS, ARE APPROXIMATE AND MAY BE ADJUSTED AS NECESSARY TO FIT FIELD CONDITIONS.

(45) ALL TRAFFIC CONTROL DEVICES ON THIS PROJECT SHALL COMPLY WITH PART VI OF THE MUTCD (LATEST EDITION).

(46) ALL PLASTIC DRUMS SHALL HAVE A BALLASTING COLLAR MADE FROM RECYCLED TRUCK TIRES OR OTHER SUITABLE MATERIAL.

(47) FLUORESCENT ORANGE SHEETING SHALL BE USED ON ALL CONSTRUCTION AND TRAFFIC CONTROL SIGNS EXCEPT FOR THOSE DESIGNATED ON THE PLANS TO BE BLACK LEGEND AND BORDER ON WHITE BACKGROUND.

(48) THE CONTRACTOR SHALL COORDINATE WITH THE CONTRACTOR FROM ADJACENT PROJECT(S) IN IMPLEMENTING THE TRAFFIC CONTROL PLAN AS DIRECTED BY THE ENGINEER. ALL CONFLICTING SIGNS SHALL BE COVERED OR REMOVED AS DIRECTED BY THE ENGINEER.

GENERAL NOTES (CONT.)

(49) THE CONTRACTOR SHALL COVER OR REMOVE ANY TEMPORARY TRAFFIC CONTROL SIGNS SHOWN IN THE TRAFFIC CONTROL PLAN THAT DO NOT APPLY TO THE CURRENT PHASE.

(50) THE RETROREFLECTIVE SIGN SHEETING ON RIGID, TEMPORARY TRAFFIC CONTROL (ORANGE) SIGNS SHALL BE MINIMUM TYPE IX.

(51) TEMPORARY STRIPING SHALL CONFORM TO FINISHED STRIPE SPECIFICATIONS FOR ALIGNMENT, NEATNESS, AND STRAIGHTNESS.

UTILITIES

(52) UTILITIES ON THE DRAWINGS ARE SHOWN IN THEIR ORIGINAL LOCATION BASED UPON THE BEST INFORMATION AVAILABLE TO THE ENGINEER. UTILITIES THAT WERE FOUND TO BE IN CONFLICT WITH CONSTRUCTION HAVE BEEN RELOCATED. PERMITS ARE ON FILE WITH THE DEPARTMENT SHOWING THE APPROXIMATE LOCATION OF UTILITIES RELOCATED WITHIN THE RIGHT-OF-WAY. THE ENGINEER CAN NOT AND DOES NOT WARRANT THAT THIS INFORMATION IS COMPLETE OR ACCURATE. THE CONTRACTOR MUST COORDINATE DIRECTLY WITH THE INVOLVED UTILITY OWNERS TO HAVE UNDERGROUND UTILITY LINES FIELD LOCATED IN ADVANCE OF CONSTRUCTION.

(53) LIST OF PUBLIC UTILITIES

- A. AT&T
- B. SPARKLIGHT
- C. BLUE CANE COWART TIPPO WATER
- D. TVEPA

MISCELLANEOUS

(54) SOME WORK IS REQUIRED OUTSIDE THE PROJECT LIMITS. NO ADDITIONAL COMPENSATION WILL BE MADE FOR SUCH WORK EXCEPT AS PROVIDED BY SPECIFIC PAY ITEMS INCLUDED IN THE PLANS.

(55) THE CONTRACTOR SHALL BE RESPONSIBLE FOR MAINTAINING AND RELOCATING MAIL BOXES AS NECESSARY TO MAINTAIN CONTINUOUS MAIL SERVICE THROUGHOUT THE LIFE OF THE PROJECT, THE COST OF WHICH SHALL BE ABSORBED IN OTHER ITEMS BID.

(56) THE CONTRACTOR IS RESPONSIBLE FOR FIELD-VERIFICATION OF EXISTING GRADES AND MAKING ADJUSTMENTS AS NECESSARY WITH THE APPROVAL OF THE PROJECT ENGINEER.

(57) THE CONTRACTOR SHALL COORDINATE AND CONDUCT WORK AT LOCAL ROADS AND DRIVEWAYS IN A MANNER SUCH THAT ACCESS IS NOT INTERRUPTED UNNECESSARILY. ACCESS SHALL BE PRESERVED IN THE BEST MANNER POSSIBLE. COORDINATION AND COMMUNICATION WITH LANDOWNERS MAY BE NECESSARY TO PREVENT INTERRUPTION OF DRIVEWAY ACCESS.

(58) THE CONTRACTOR SHALL REMOVE AND RESET ANY GATES REQUIRED TO TIE IN DRIVEWAYS. THE COST OF WHICH SHALL BE ABSORBED IN OTHER ITEMS BID.

(59) THE CONTRACTOR SHALL SUBMIT AN OPERATIONS PLAN FOR APPROVAL BY THE ENGINEER AT LEAST TWO WEEKS PRIOR TO ANY WORK RELATED TO THE DEMOLITION OF THE EXISTING BRIDGE.

NOTICE:

THE NOTES CONTAINED HEREON ARE SPECIFIC TO THE SUBJECT PROJECT AND SHOULD BE REVIEWED IN DETAIL BY THE CONTRACTOR, PER SECTION 102.05 OF THE STANDARD SPECIFICATIONS, "THE BIDDER IS REQUIRED TO EXAMINE CAREFULLY THE SITE OF THE PROPOSED WORK, THE PROPOSAL, PLANS, STANDARD SPECIFICATIONS, SPECIAL PROVISIONS, NOTICES TO BIDDERS AND CONTRACT FORMS BEFORE SUBMITTING A PROPOSAL."



					BY	MISSISSIPPI DEPARTMENT OF TRANSPORTATION GENERAL NOTES	
					REVISION		
					DATE	FILE NAME: _GN.dgn	
					DESIGN TEAM	MENDROP	CHECKED _____ DATE _____
						WORKING NUMBER GN-2	
						SHEET NUMBER 5	

