

TITLE SHEET


7/21/2026 10:08:55 AM TITLE_SH.dgn

GENERAL INDEX		
INCLUDED THIS PROJECT		BEGIN WITH SHEET
☒ ROADWAY.....	1	
☐ PERMANENT SIGNS.....	1001	
☐ TRAFFIC SIGNALS.....	2001	
☐ ITS COMPONENTS.....	3001	
☐ LIGHTING.....	4001	
☐ (RESERVED).....	5001	
☒ ROADWAY STD. DWGS.....	6001	
☐ BOX CULVERT STD. DWGS (LRFD).....	7001	
☐ BOX CULVERT STD. DWGS (STD. SPEC.)....	7501	
☒ BRIDGE.....	8001	
☐ CROSS SECTIONS.....	9001	

BRIDGE STRUCTURES REQ'D.
_____ NONE _____

BOX BRIDGES REQ'D.
_____ NONE _____


CONVENTIONAL SYMBOLS

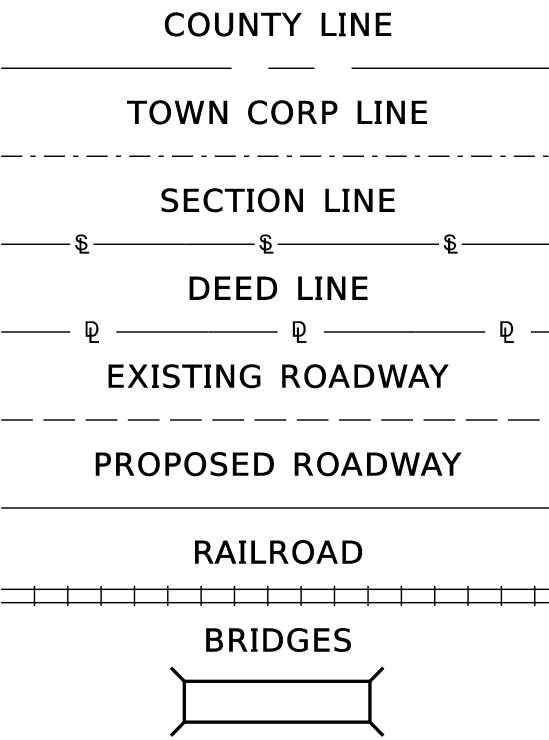

LENGTH DATA		
LENGTH OF ROADWAY	_____ FT.	_____ MI.
LENGTH OF BRIDGES	_____ FT.	_____ MI.
LENGTH OF PROJECT (NET)	_____ FT.	_____ MI.
LENGTH OF EXCEPTIONS	_____ FT.	_____ MI.
LENGTH OF PROJECT (GROSS)	_____ FT.	_____ MI.

STATE OF MISSISSIPPI
MISSISSIPPI DEPARTMENT OF TRANSPORTATION

PLAN AND PROFILE OF
PROPOSED STATE HIGHWAY
FEDERAL AID PROJECT NO. STBG-0642-00(028)
MS 19 OVER BIG BLACK RIVER (BRIDGE #114.9)
ATTALA COUNTY

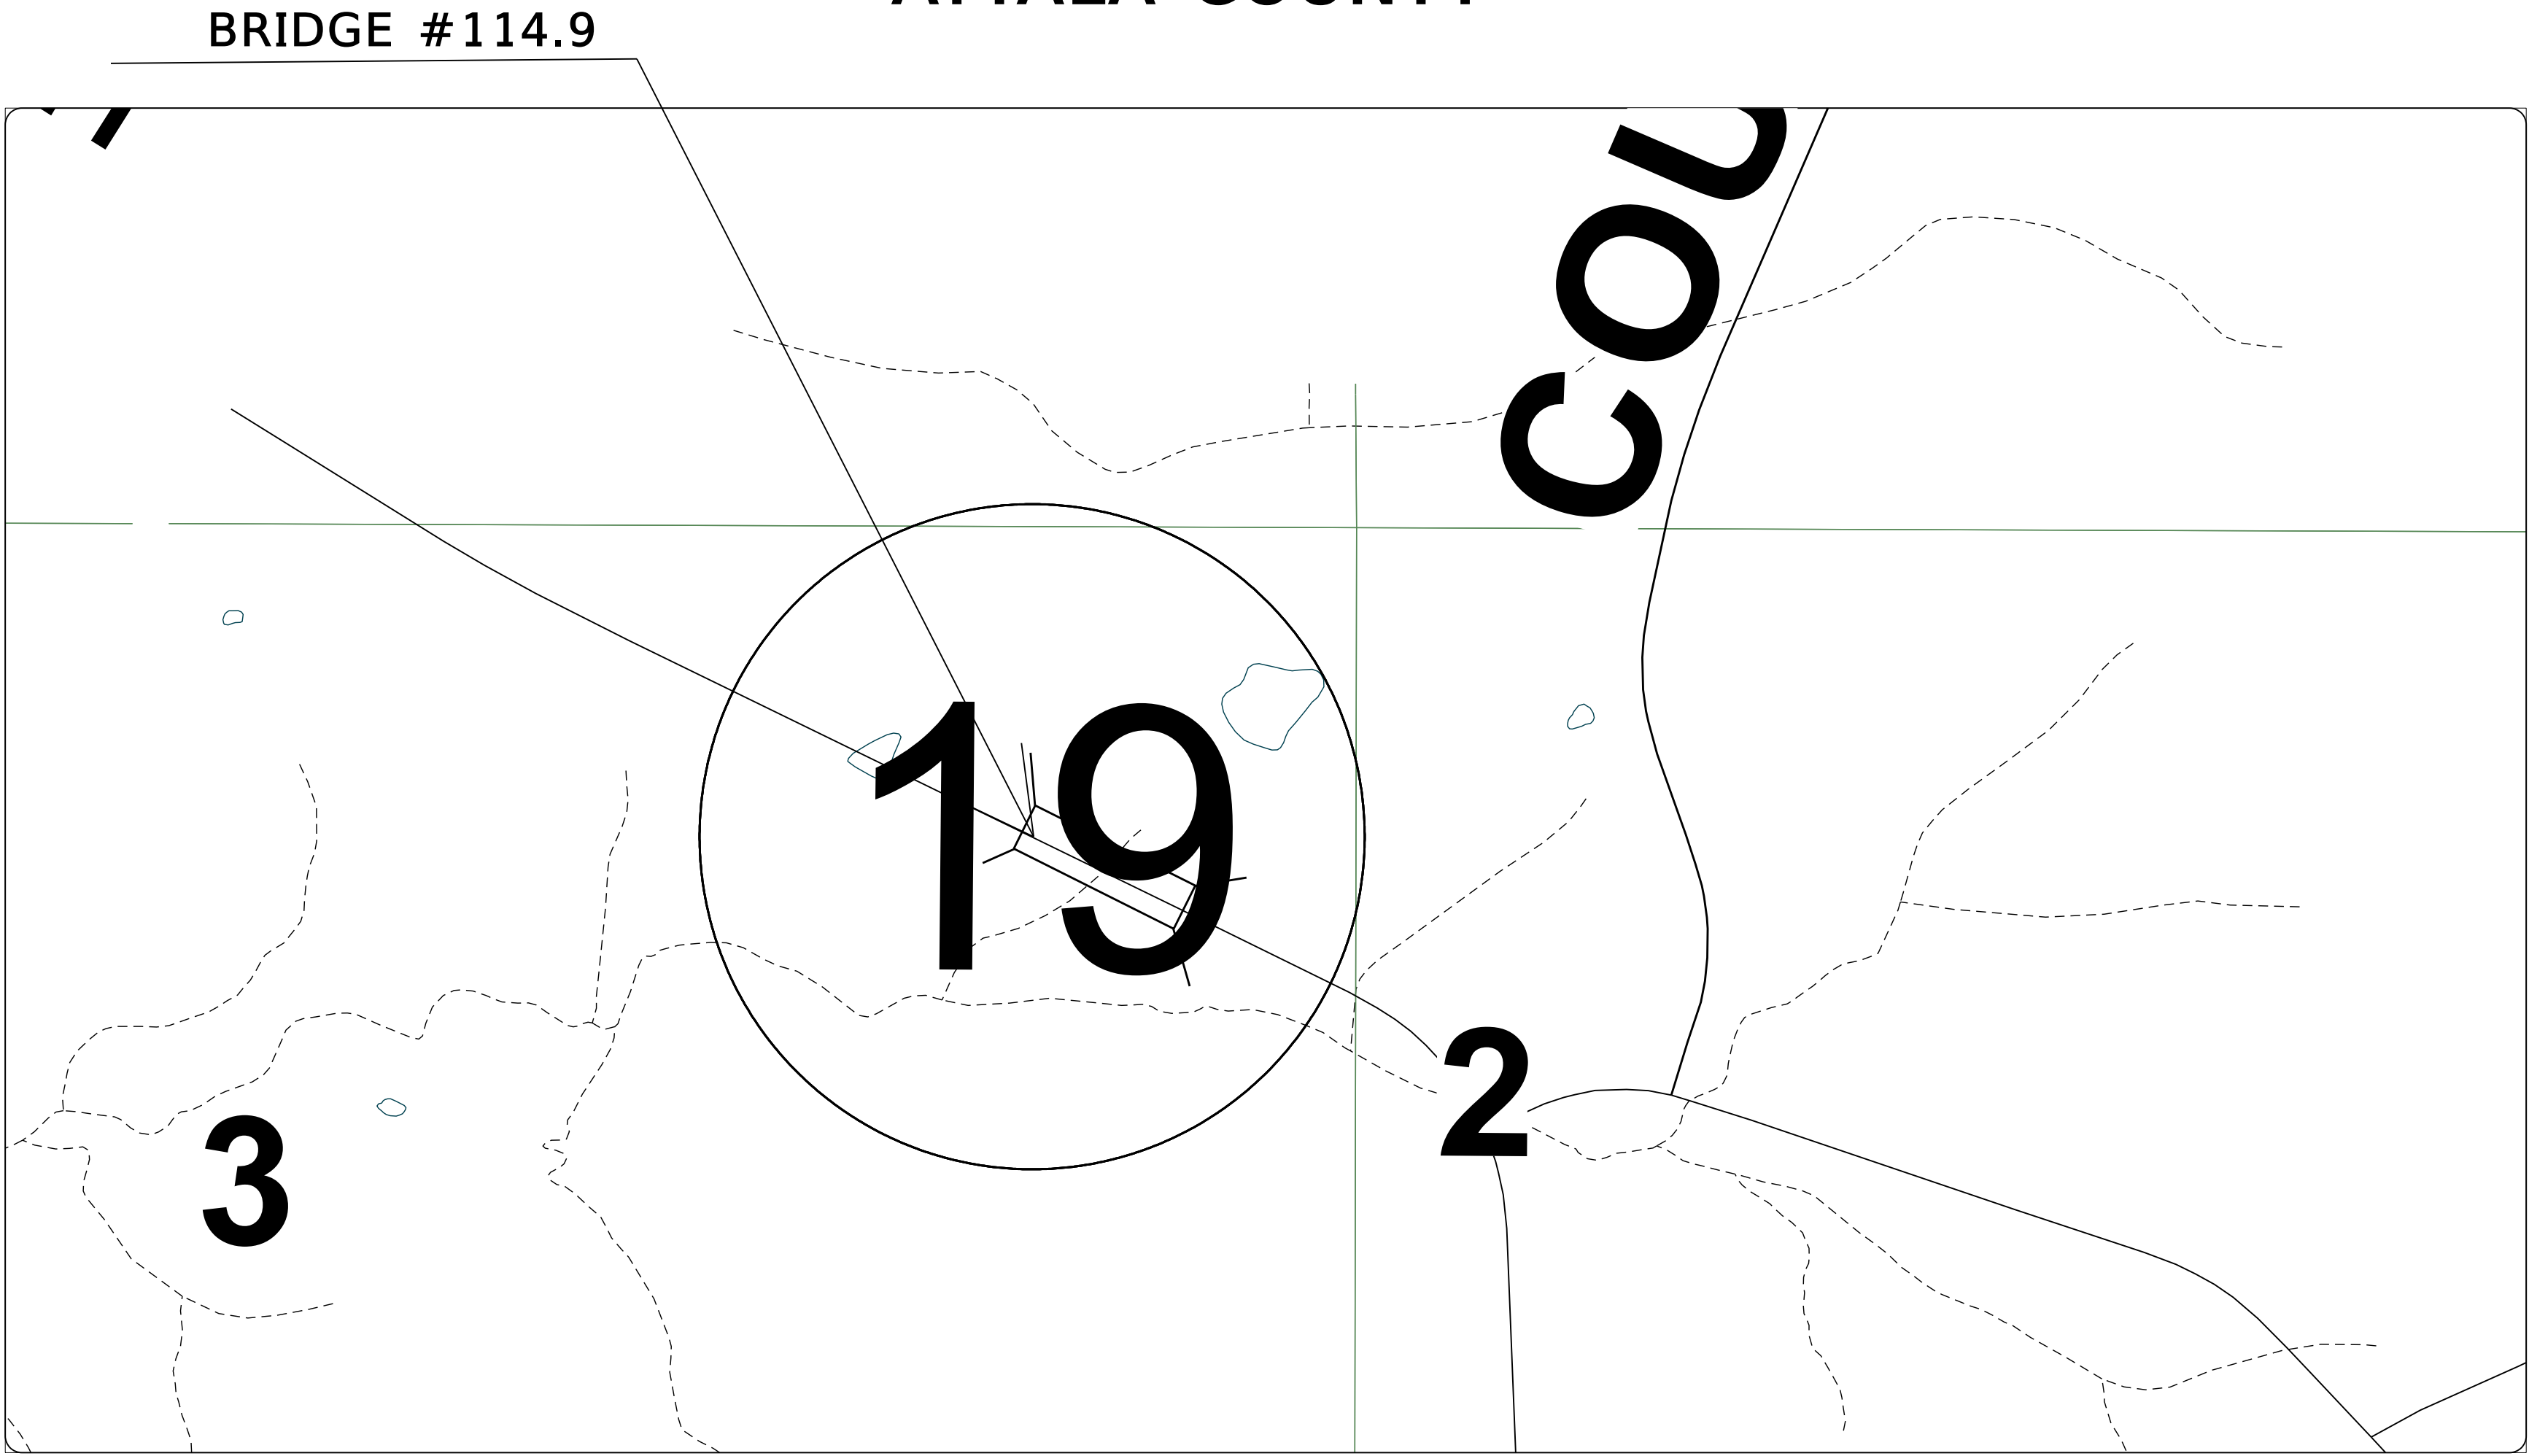


EQUATIONS
_____ NONE _____

PLAN 1 IN.= 100 FT.
PROFILE {HOR. 1 IN.= 100 FT.
LAYOUT {VERT. 1 IN.= 10 FT.
1 IN.= FT.

EXCEPTIONS
_____ NONE _____

1ST ORD.
REVISION

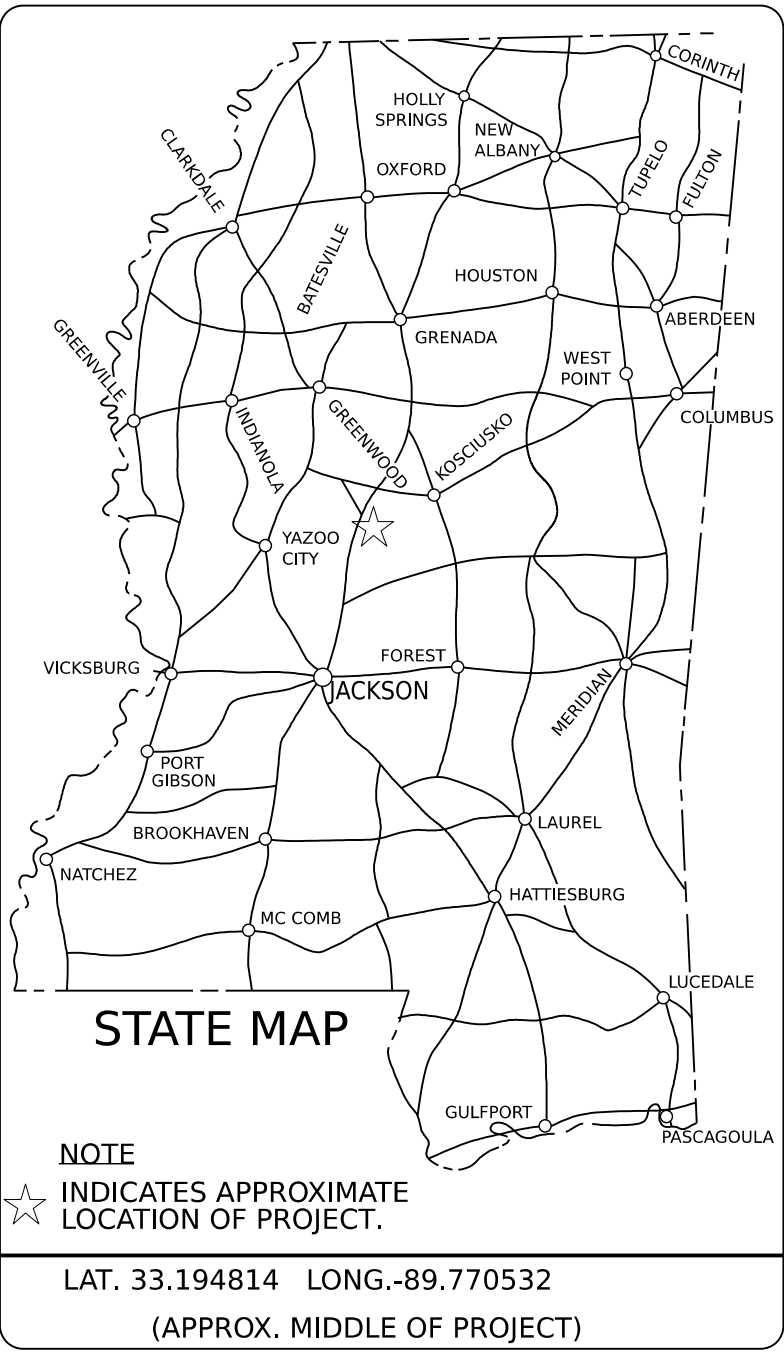

DESIGN CONTROL
___ MPH = V (SPEED DESIGN)
ADT (___) = ___ : ADT (___) = ___
DHV = ___ : D = ___ % T = ___ %

PERMITS ACQUIRED BY MDOT		
WETLANDS AND WATERS PERMITS		
NATIONWIDE #14	☒ N	☒ N
NATIONWIDE (OTHER)*	☒ Y	☒ N
GENERAL*	☒ N	☒ N
INDIVIDUAL (404)*	☒ N	☒ N
STORMWATER PERMIT		☒ N
Y REQUIRED, CNOI SUBMITTED BY MDOT (DISTURBED AREA=5 ACRES)		
S REQUIRED, SCNOI TO BE SUBMITTED BY CONTRACTOR (1 TO 4.99 ACRES)		
N NO STORMWATER PERMIT REQUIRED (<1 ACRE)		
APPROVED BY: _____		

DESIGNED BY: _____

CONSTRUCTION PROJECT DATA	
EXTERNAL PROJECT NUMBER	STBG-0642-00(028)
FMS & DETAIL	110041/301000

P S & E DATE: _____
APPROVED: _____

DEPUTY EXECUTIVE DIRECTOR / CHIEF ENGINEER
EXECUTIVE DIRECTOR



DESCRIPTION OF SHEET	WK. NO. SHEET NO.	
TITLE SHEET (1)	1	
DETAILED INDEX & GENERAL NOTES (3)		
DETAILED INDEX	DI-1	2
SUMMARY OF REVISIONS	REV-1	
GENERAL NOTES	GN-1	3
QUANTITY SHEETS (2)		
SUMMARY OF QUANTITIES	SQ-1	4
ESTIMATED QUANTITIES FOR TRAFFIC CONTROL SIGNS	TCPQ-1	5
SPECIAL DESIGN SHEETS (2)		
DETAIL OF CONSTRUCTION SIGNING	DCS-1	6
TRAFFIC CONTROL PLAN - ROAD CLOSURE DETAIL	TC-1	7
STANDARD DRAWINGS (6)		
PAVEMENT MARKING DETAILS FOR 2-LANE & 4-LANE DIVIDED ROADWAYS.	PM-1	6051
HIGHWAY SIGN AND BARRICADE DETAILS FOR CONSTRUCTION PROJECTS	TCP-8	6358
TRAFFIC CONTROL PLAN MOBILE DETAILS FOR CONTRUCTION PROJECTS	TCP-9	6359
TEMPORARY STRIPING FOR TRAFFIC CONTROL 2-LANE AND 4-LAND DIVIDED HIGHWAYS	TCP-13	6363
LOCATION OF R16-3 SIGNS (SPEEDING FINES DOUBLED)	TCP-15	6365
TRAFFIC CONTROL DETAILS DRUM PLACEMENT AND SHOULDER CLOSURE	TCP-16	6366
TOTAL SHEETS (NOT INCLUDING BRIDGE SHEETS) (13)		



DESIGNED BY:	DETAILED BY:	CHECKED BY:	DATE:
--------------	--------------	-------------	-------

FMS CON: 110041/301000	PROJECT NO.: STBG-0642-00(028)	COUNTY: ATTALA
------------------------	--------------------------------	----------------

DETAILED INDEX

SHEET ID DI-1
SHEET NO. 2



FMS CON: 110041/301000	DESIGNED BY: M.F. GRONDIN
PROJECT NO.: STBG-0642-00(028)	DETAILED BY:
	CHECKED BY:
COUNTY: ATTALA	DATE:

SHEET ID
REV-1

GENERAL NOTES

BRIDGES AND WALLS

- (1) STORAGE OF FLAMMABLE MATERIALS WILL NOT BE ALLOWED UNDER ANY BRIDGE STRUCTURES WITHOUT WRITTEN APPROVAL FROM THE PROJECT ENGINEER. SEE NOTICE TO BIDDERS ENTITLED "MATERIAL STORAGE UNDER BRIDGES" FOR MORE INFORMATION.

DRAINAGE STRUCTURES

- (2) THE CONTRACTOR SHALL BE RESPONSIBLE FOR PROTECTING EXISTING STRUCTURES SUCH AS, BUT NOT LIMITED TO, PIPES, INLETS, APRONS, AND BRIDGES FROM DAMAGE WHICH MIGHT OCCUR DURING CONSTRUCTION. THE CONTRACTOR SHALL REPLACE OR REPAIR, AS DIRECTED BY THE ENGINEER, ANY STRUCTURES DAMAGED DURING THE LIFE OF THE CONTRACT. NO PAYMENT WILL BE MADE FOR REPLACEMENT OR REPAIR OF DAMAGED ITEMS.

EARTHWORK

- (3) VOIDS CREATED BY THE REMOVAL OF, BUT NOT LIMITED TO, POSTS, CONCRETE ANCHORS, AND FOOTINGS SHALL BE BACKFILLED AND TAMPED IN ACCORDANCE WITH SECTION 203 OF *THE MISSISSIPPI STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION*, THE COST OF WHICH WILL BE ABSORBED IN OTHER ITEMS BID.

PLANS

- (4) ALL ADDENDA TO THESE PLANS WILL BE POSTED TO WWW.MDOT.MS.GOV UNDER THE PROPOSAL ADDENDA COLUMN. BIDDERS ARE ADVISED THAT HARD COPIES OF ANY ADDENDA FOR THIS PROJECT WILL NOT BE MAILED. IT IS THE BIDDER'S RESPONSIBILITY TO CHECK AND SEE IF ANY ADDENDA HAVE BEEN POSTED FOR THIS PROJECT.
- (5) SEE BRIDGE PLANS FOR DETAILED INDEX SHEET(S), ESTIMATED AND SUMMARY OF QUANTITY SHEETS, AND EROSION CONTROL SHEETS.


TRAFFIC CONTROL - TEMPORARY

- (6) THE LOCATION AND SPACING OF SIGNS, SHOWN ON THE TRAFFIC CONTROL PLANS, ARE APPROXIMATE AND MAY BE ADJUSTED AS NECESSARY TO FIT FIELD CONDITIONS.
- (7) ALL TRAFFIC CONTROL DEVICES ON THIS PROJECT SHALL COMPLY WITH PART VI OF THE *MUTCD* (LATEST EDITION).
- (8) ALL PLASTIC DRUMS SHALL HAVE A BALLASTING COLLAR MADE FROM RECYCLED TRUCK TIRES OR OTHER SUITABLE MATERIAL.
- (9) FLUORESCENT ORANGE SHEETING SHALL BE USED ON ALL CONSTRUCTION AND TRAFFIC CONTROL SIGNS EXCEPT FOR THOSE DESIGNATED ON THE PLANS TO BE BLACK LEGEND AND BORDER ON WHITE BACKGROUND.
- (10) THE CONTRACTOR SHALL COVER OR REMOVE ANY TEMPORARY TRAFFIC CONTROL SIGNS SHOWN IN THE TRAFFIC CONTROL PLAN THAT DO NOT APPLY TO THE CURRENT PHASE.
- (11) TEMPORARY STRIPING SHALL COMFORM TO FINISHED STRIPE SPECIFICATIONS FOR ALIGNMENT, NEATNESS, AND STRAIGHTNESS.

MISCELLANEOUS

- (12) SOME WORK IS REQUIRED OUTSIDE THE PROJECT LIMITS. NO ADDITIONAL COMPENSATION WILL BE MADE FOR SUCH WORK EXCEPT AS PROVIDED BY SPECIFIC PAY ITEMS INCLUDED IN THE PLANS.
- (13) THE CONTRACTOR IS RESPONSIBLE FOR FIELD-VERIFICATION OF EXISTING GRADES AND MAKING ADJUSTMENTS AS NECESSARY WITH THE APPROVAL OF THE PROJECT ENGINEER.
- (14) REMOVAL OF RAISED PAVEMENT MARKERS THAT ARE IN CONFLICT WITH REQUIRED CONSTRUCTION IS NOT CONSIDERED A SEPARATE PAY ITEM. COST TO BE OBSORBED IN OTHER ITEMS BID.
- (15) REMOVAL OF OBJECT MARKERS IS NOT CONSIDERED A SEPERATE PAY ITEM, AND SHALL BE ABSORBED IN OTHER ITEMS BID.

NOTICE:
THE NOTES CONTAINED HEREON ARE SPECIFIC TO THE SUBJECT PROJECT AND SHOULD BE REVIEWED IN DETAIL BY THE CONTRACTOR, PER SECTION 102.05 OF THE STANDARD SPECIFICATIONS, "THE BIDDER IS REQUIRED TO EXAMINE CAREFULLY THE SITE OF THE PROPOSED WORK, THE PROPOSAL, PLANS, STANDARD SPECIFICATIONS, SPECIAL PROVISIONS, NOTICES TO BIDDERS AND CONTRACT FORMS BEFORE SUBMITTING A PROPOSAL.

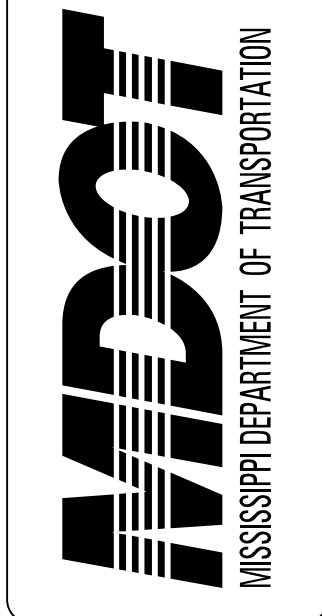

DESIGNED BY:		FMS CON: 110041/301000
DETAILED BY:		PROJECT NO.: STBG-0642-00(028)
CHECKED BY:		COUNTY: ATTALA
DATE:		

GENERAL NOTES

SHEET ID GN-1
SHEET NO. 3