MDOT Use Only
Checked _____
Loaded _____
Keyed _____

09 -

SM No. CSTBG0510000121

PROPOSAL AND CONTRACT DOCUMENTS

FOR THE CONSTRUCTION OF

09
Bridge Repair on SR 433 over Mound Creek (Bridge No. 11.6), known as Federal Aid Project No. STBG-0510-00(012) / 110184301 in Yazoo County.

Project Completion: 46 Working Days

(STATE DELEGATED)

NOTICE

BIDDERS MUST COMPLETE AN ONLINE REQUEST FOR PERMISSION TO BID THIS PROJECT.

Electronic addendum updates will be posted on www.gomdot.com

SECTION 900

OF THE CURRENT 2017 STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION

JACKSON, MISSISSIPPI

MISSISSIPPI DEPARTMENT OF TRANSPORTATION
TABLE OF CONTENTS

PROJECT: STBG-0510-00(012)/110184301 - Yazoo

Section 901 - Advertisement

Section 904 - Notice to Bidders

#1	Governing Specification, w/ Supplement
#2	Status of ROW, w/ Attachments
#3	Final Cleanup
#296	Reduced Speed Limit Signs
#445	Mississippi Agent or Qualified Nonresident Agent
#516	Errata and Modifications to the 2017 Standard Specifications
#1225	Early Notice to Proceed
#1226	Material Storage Under Bridges
#1241	Fuel and Material Adjustments
#2206	MASH Compliant Devices
#2273	Mississippi Special Fuel Tax Law
#2954	Reflective Sheeting for Signs
#4113	Unique Entity ID Requirement For Federal Funded Projects
#4702	App for Traffic Control Report
#5551	Federal Bridge Formula
#7624	Standard Drawings w/Supplement
#8191	Obligation Date
#8317	Contract Time
#8318	Specialty Items
#8319	Scope of Work
#8341	Standard Drawings, w/Supplement

906	Required Federal Contract Provisions -- FHWA 1273, w/Supplements

Section 907 - Special Provisions

907-101-1	Definitions and Terms
907-102-2	Bidding Requirements and Conditions
907-104-2	Minor Alterations to the Contract
907-105-3	Control of Work
907-106-5	Control of Materials
907-108-4	Subletting of Contract
907-108-6	Default and Termination of Contract
907-109-5	Measurement and Payment
907-618-12	Traffic Control Management
907-619-5	Traffic Control for Construction Zones
907-700-3	Materials and Tests w/Attachment
907-701-4	Hydraulic Cement, w/ Supplement
907-702-4	Bituminous Materials
907-703-2	Gradation
907-705-1	Stone Riprap
907-707-3	Joint Materials
907-711-2	Plain Steel Wire

PROJECT: STBG-0510-00(012)/110184301 - Yazoo

907-712-1	Fence and Guardrail
907-714-4	Miscellaneous Materials
907-718-1	Timber and Dimension Lumber
907-720-4	Pavement Marking Materials
907-721-4	Materials for Signing
907-824-4	Routine Bridge Repair

Section 905 - Proposal, Proposal Bid Items, Combination Bid Proposal
Certification of Performance - Prior Federal-Aid Contracts
Certification Regarding Non-Collusion, Debarment and Suspension
SAM.GOV Registration and Unique Entity ID
Section 902 - Contract Form
Section 903 - Contract Bond Forms

Progress Schedule

(REVISIONS TO THE ABOVE WILL BE INDICATED ON THE SECOND SHEET
OF SECTION 905 AS ADDENDA)

08/28/2026 02:22 PM

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 901 - ADVERTISEMENT

Electronic bids will be received by the Mississippi Transportation Commission at 10:00 o'clock A.M., Tuesday, September 22, 2026, from the Bid Express Service and shorty thereafter publicly read on the Sixth Floor For:

Bridge Repair on SR 433 over Mound Creek (Bridge No. 11.6), known as Federal Aid Project No. STBG-0510-00(012) / 110184301 in Yazoo County.

The attention of bidders is directed to the Contract Provisions governing selection and employment of labor. Minimum wage rates have been predetermined by the Secretary of Labor and are subject to Public Law 87-581, Work Hours Act of 1962, as set forth in the Contract Provisions.

The specifications are on file in the offices of the Mississippi Department of Transportation.

Contractors may request permission to bid online at http://shop.mdot.ms.gov at no cost. Upon approval, Contractors shall be eligible to submit a bid using Bid Express at http://bidx.com. Specimen proposals may be viewed and downloaded online at no cost at http://mdot.ms.gov or purchased online at http://shop.mdot.ms.gov at a cost of Ten Dollars ($10.00) per proposal plus a small convenience fee. Cash or checks will not be accepted as payment.

Bid bond, signed or countersigned by a Mississippi Agent or Qualified Nonresident Agent, with Power of Attorney attached, a Cashier's check or Certified Check for five (5%) percent of bid, payable to STATE OF MISSISSIPPI, must accompany each proposal.

The attention of bidders is directed to the provisions of Subsection 102.07 pertaining to irregular proposals and rejection of bids.

BRAD WHITE
EXECUTIVE DIRECTOR

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SUPPLEMENT TO NOTICE TO BIDDERS NO. 1

DATE: **06/08/2021**

SUBJECT: **Governing Specifications**

Change the web address at the end of the first paragraph to the following.

https://shop.mdot.ms.gov/default.aspx?StoreIndex=1

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 - NOTICE TO BIDDERS NO. 1 **CODE: (IS)**

DATE: 03/01/2017

SUBJECT: Governing Specifications

The current (2017) Edition of the Standard Specifications for Road and Bridge Construction adopted by the Mississippi Transportation Commission is made a part hereof fully and completely as if it were attached hereto, except where superseded by special provisions, or amended by revisions of the Specifications contained within this proposal. Copies of the specification book may be purchased from the MDOT Construction Division, or online at shopmdot/default.aspx?StoreIndex=1.

A reference in any contract document to controlling requirements in another portion of the contract documents shall be understood to apply equally to any revision or amendment thereof included in the contract.

In the event the plans or proposal contain references to the 2004 Edition of the Standard Specifications for Road and Bridge Construction, it is to be understood that such references shall mean the comparable provisions of the 2017 Edition of the Standard Specifications.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 - NOTICE TO BIDDERS NO. 2 **CODE: (IS)**

DATE: 03/01/2017

SUBJECT: Status of Right-of-Way

Although it is desirable to have acquired all rights-of-way and completed all railroad agreements, utility adjustments and work to be performed by others prior to receiving bids, sometimes it is not considered to be in the public interest to wait until each and every such clearance has been obtained. The bidder is hereby advised of possible unacquired rights-of-way, relocates, railroad agreements and utilities adjustments which have not been completed.

The status of right-of-way acquisition, utility adjustments, encroachments, potentially contaminated sites, railroad facilities, improvements, and asbestos contamination are set forth in the following attachments.

In the event right of entry is not available to ALL parcels of right-of-way and/or all work that is to be accomplished by others on the date set forth in the contract for the Notice to Proceed is not complete, the Department will issue a restricted Notice to Proceed.

STATUS OF RIGHT-OF-WAY
STBG-0510-00(012)
110184/301000
Yazoo County

All rights of way and legal rights of entry have been acquired **except:**

None.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

Inter-Departmental Memorandum

To: Right of Way Division
Don Drake

Date: July 20, 2026

From: District 3
Corry Harms

Project No: 110184/301000
STBG-0510-00(012)

County: Yazoo

DISTRICT STATUS REPORT

1. **STATUS OF RIGHT OF WAY:** All work to be done within existing ROW.
2. **RIGHT OF WAY CLEARANCE:** There are no encroachments.
3. **STATUS OF AFFECTED RAILROAD OPERATING FACILITIES:** None affected.
4. **STATUS OF REQUIRED UTILITY RELOCATIONS:** No utility conflicts.
5. **STATUS OF CONSTRUCTION AGREEMENT:** None required.

CH:ch

pc: Joel Bellipanni (District Three)
James Burks (District Three)
File

ASBESTOS ABATEMENT STATUS REPORT

STBG-0510-00(012) 110184-301000

Yazoo County

July 20, 2026

Reference is made to notices to bidders entitled "Asbestos National Emission Standards for Hazardous Air Pollutants (NESHAP)" and "Removal of Obstructions".

The following pertinent information is furnished concerning asbestos-containing materials (ACMs), if any, found in buildings to be removed by the Contractor.

There is no right-of-way required for this project, and the contractor will not need to remove any buildings.

STATUS OF POTENTIALLY CONTAMINATED SITES REPORT

STBG-0510-00(012) 110184-301000

Yazoo County

July 20, 2026

THERE IS NO RIGHT-OF-WAY REQUIRED FOR THIS PROJECT. NO INITIAL SITE ASSESSMENT WILL BE PERFORMED. IF CONTAMINATION ON THE EXISTING RIGHT-OF-WAY IS DISCOVERED, IT WILL BE HANDLED BY THE DEPARTMENT.

IMPROVEMENTS STATUS REPORT

Improvements to be included in the Notice to Bidders to be removed by the Construction Contractor

FMS Construction Project No: 110184-301000

FMS ROW Project No:

External ROW No: STBG-0510-00(012)

Parcel No:
Station No:
Property Owner:
Description/Pictures:

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 - NOTICE TO BIDDERS NO. 3 **CODE: (SP)**

DATE: 01/17/2017

SUBJECT: Final Clean-Up

Immediately prior to final inspection for release of maintenance, the Contractor shall pick up, load, transport and properly dispose of all litter from the entire highway right-of-way that is within the termini of the project.

Litter shall include, but not be limited to, solid wastes such a glass, paper products, tires, wood products, metal, synthetic materials and other miscellaneous debris.

Litter removal is considered incidental to other items of work and will not be measured for separate payment.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 - NOTICE TO BIDDERS NO. 296 **CODE: (SP)**

DATE: 07/25/2017

SUBJECT: Reduced Speed Limit Signs

Bidders are advised that when the plans or contract documents require the speed limit on a project to be reduced, the Contractor shall begin work within 48 hours of installing the reduced speed limit signs. Should the Contractor not start work or have no plans to start work within 48 hours of installing the signs, the reduced speed limit signs shall be covered and existing speed limit signs uncovered.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 - NOTICE TO BIDDERS NO. 445 **CODE: (SP)**

DATE: 10/10/2017

SUBJECT: Mississippi Agent or Qualified Nonresident Agent

Bidders are hereby advised of the requirements of Subsections 102.08, 103.05.2, and 107.14.2.1 of the *2017 Standard Specifications for Road and Bridge Construction* as it refers to bonding agents. Proposal guaranties, bonds, and liability insurance policies must be signed by a **Mississippi Agent or Qualified Nonresident Agent.**

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 - NOTICE TO BIDDERS NO. 516 **CODE: (IS)**

DATE: 11/28/2017

SUBJECT: Errata and Modifications to the 2017 Standard Specifications

Page	Subsection	Change
16	102.06	In the seventh full paragraph, change "Engineer" to "Director."
33	105.05.1	In the sixth sentence, change "Contract Administration Engineer" to "Contract Administration Director."
34	105.05.2.1	In subparagraph 2, change "SWPPP, ECP" to "SWPPP and the ECP"
35	105.05.2.2	In subparagraphs 2, add " and" to the end of the sentence. In subparagraph 3, remove ", and" and add ".".
90	109.04.2	In the last paragraph of subparagraph (a), place a period "." at the end of the sentence.
93	109.04.2	In the last paragraph of subparagraph (g), place a period "." at the end of the sentence. Also, in the first paragraph of subparagraph (h), place a period "." at the end of the sentence.
97	109.07	Under ADJUSTMENT CODE, subparagraph (A1), change "HMA mixture" to "Asphalt mixtures."
98	109.11	In the third sentence, change "Engineer" to "Director."
219	308.04	In the last sentence of the last paragraph, change "Contractor's decision" to "Engineer's decision."
300	405.02.5.9	In the first sentence of the second paragraph, change "Hot Mix Asphalt" to "Asphalt Mixtures."
502	630.01.1	In the first paragraph, change "AASHTO" to "AASHTO's LRFD".
636	646.05	Change "each" to "per each" for the pay item units of payment.
640	656.02.6.2	In item 7), change "down stream" to "downstream".
688	630.03.2	Change the subsection number from "630.03.2" to "680.03.2."

725	702.08.3	In the second sentence of the first paragraph, change "hot-mix" to "asphalt."
954	804.02.13.1.6	In the definition for "M" in the % Reduction formulas, change "paragraph 7.3" to "paragraph 5.3."

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 - NOTICE TO BIDDERS NO. 1225 **CODE: (SP)**

DATE: 11/13/2018

SUBJECT: Early Notice to Proceed

Bidders are advised that if an early notice to proceed is allowed by the Department and the Contractor experiences problems or delays between the early notice to proceed date and the original notice to proceed date, this shall not be justification for any monetary compensation or an extension of contract time.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 - NOTICE TO BIDDERS NO. 1226 **CODE: (IS)**

DATE: 11/16/2018

SUBJECT: Material Storage Under Bridges

Bidders are advised that Subsection 106.08 of the Standard Specifications allows the Contractor to store materials and equipment on portions of the right-of-way. However, the Contractor will not be allowed to store or stockpile materials under bridges without written permission from the Project Engineer. The Contractor shall submit a detailed request of all proposed materials to be stored under bridges to the Engineer a minimum of 14 calendar days prior to anticipated storage. This detail shall include, but not limited to, bridge location, material type, material quantity, and duration of storage. The Project Engineer and any other needed Division will review this information and determine whether to grant approval. The Contractor shall not store any material under any bridge without written approval from the Project Engineer.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 - NOTICE TO BIDDERS NO. 1241 **CODE: (IS)**

DATE: 11/27/2018

SUBJECT: Fuel and Material Adjustments

Bidder's attention is brought to the last paragraph of Subsection 109.07 of the Standard Specifications which states that no fuel or material adjustment will be made after the completion of contract time. Any fuels consumed or materials incorporated into the work during the monthly estimate period falling wholly after the expiration of contract time will not be subject a fuel or material adjustment.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 - NOTICE TO BIDDERS NO. 2206 **CODE: (IS)**

DATE: 01/14/2020

SUBJECT: MASH Compliant Devices

Bidders are hereby advised that compliance associated with the requirements of meeting either the National Cooperative Highway Research Program (NCHRP) Report 350 or the Manual for Assessing Safety Hardware (MASH) for installations of certain traffic control devices and permanent safety hardware devices (guardrails, guardrail terminals, permanent portable barriers, cast-in-place barriers, all other permanent longitudinal barriers, crash cushions, cable barriers, cable barrier terminals, bridge rails, bridge rail transitions, all other terminals, sign supports, and all other breakaway hardware) as listed throughout the Standard Specifications and/or the Standard Drawings, or both, is now replaced with the requirements of meeting the 2016 version of MASH after December 31, 2019. This change applies to new permanent installations and to full replacements of existing installations.

At the preconstruction conference or prior to starting any work on the project, the Contractor shall submit a letter stating that the traffic control devices and permanent safety hardware devices as outlined within the paragraph above that are to be used on the project are certified to meet MASH 2016.

When a MASH 2016-compliant device does not exist for the new permanent installations and/or full replacement installations of permanent safety hardware devices, as listed above, a MASH 2009-compliant or a NCHRP 350-compliant device may be proposed by the Contractor for the project. A written request for such instances must be submitted by the Contractor either at the preconstruction conference or prior to starting any work on the project. The Contractor shall submit the following items to the Project Engineer: (1) a detailed list of the proposed devices and locations thereof; and (2) certification letters indicating that the proposed devices are compliant with either MASH 2009 or NCHRP 350.

When a MASH 2016-compliant device does not exist for the temporary work zone traffic control devices (Category 1, Category 2, and Category 3 devices) , a MASH 2009-compliant or a NCHRP 350-compliant device may be proposed by the Contractor for the project. Temporary work zone traffic control devices (Category 1, Category 2, and Category 3 devices) that are MASH 2009-compliant or NCHRP 350–compliant that have been in use prior to December 31, 2019, and that have a remaining service life may be proposed for use throughout their normal service life on the project by the Contractor. For either of these scenarios for temporary work zone traffic control devices, a written request must be submitted by the Contractor either at the preconstruction conference or prior to starting any work on the project. The Contractor shall submit the following items to the Project Engineer: (1) a detailed list of the proposed devices and locations thereof; and (2) certification letters indicating that the proposed devices are compliant with either MASH 2009 or NCHRP 350.

Work will only be allowed to proceed after the Department has granted written concurrence(s) with the proposed request(s) as listed above.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 - NOTICE TO BIDDERS NO. 2273 **CODE: (SP)**

DATE: 02/12/2020

SUBJECT: Mississippi Special Fuel Tax Law

Bidder's attention is brought to the second paragraph of Subsection 107.02 of the Standard Specifications which states that all Contractors and Subcontractors must comply with all requirements contained in the Mississippi Special Fuel Tax Law, Section 27-55-501, *et seq*. Attached are two Fact Sheets provided by the Mississippi Department of Revenue (MDOR) with additional information.

DEPARTMENT OF REVENUE
STATE OF MISSISSIPPI

Gasoline and Dyed Diesel Used for Non-Highway Purposes

Mississippi provides a reduced rate for gasoline and dyed diesel used for non-highway purposes. The reduced rates are 6.44 cents per gallon and 5.75 cents per gallon of gasoline or dyed diesel. These fuels are generally taxed at 18 cents per gallon if for on road use.

Gasoline Used for Non-Highway Purposes

You may be entitled to a refund of 11.56 cents per gallon (making this an equivalent to a tax rate of 6.44 cents per gallon) if you desire to purchase gasoline to be used off road. The gasoline must be used for agricultural, maritime, industrial, manufacturing, domestic or non-highway purposes only.

Examples of non-highway include gasoline used in boats, golf carts, machinery used for manufacturing or farm equipment used exclusively in plowing, planting or harvesting farm products.

Refund Gasoline User

The refund is based on the amount of gallons used. Before a refund is issued, you are required to…

1. Obtain a refund gasoline user's permit and a certificate for refund booklet from the Department of Revenue;
2. Have a storage tank marked "REFUND GASOLINE"; and,
3. Purchase the gasoline from someone who holds a refund gasoline dealer's permit.

No refund will be allowed for gasoline used in motor vehicles owned or operated by a government entity or used in Mississippi government contracts.

Refund Gasoline Dealer

You must obtain a refund gasoline dealer's permit from the Department of Revenue before selling refund gasoline. At no time should the gasoline be delivered to a tank that is not properly marked. The gasoline must be dyed a distinctive mahogany color at the time of delivery.

The Department of Revenue may waive the dye requirement if the dye may cause damage to the equipment. The refund gasoline user is required to obtain the waiver from the Department of Revenue.

Dyed Diesel Used for Non-Highway Purposes

Unlike gasoline, you are not required to apply for a refund if you desire to purchase dyed diesel to be used off road. Mississippi provides a reduced rate of 5.75 cents per gallon on dyed diesel used off road. Diesel used on road is subjected to 18 cents per gallon. Dyed diesel used in motor vehicles owned or operated by a government entity or used in Mississippi government contracts will be subjected to 18 cents per gallon.

Dyed Diesel Used on the Highway

Any person who purchases, receives, acquires or uses dyed diesel for highway use will be liable to pay 18 cents per gallon and subject to a penalty in the amount of $1000.

Identifying Dyed Diesel

Storage facilities for dyed diesel must be plainly marked "NONHIGHWAY DIESEL FUEL" or "NONHIGHWAY KEROSENE". Retailers are also required to mark all pumps or dispensing equipment.

This fact sheet is intended to help you become more familiar with Mississippi tax laws and your rights and responsibilities under the laws. Nothing in this fact sheet supersedes, alters, or otherwise changes any provisions of the tax law, regulations, court decisions, or notices.

Revised March 2017

Petroleum Tax Bureau
P. O. Box 1033
Jackson, MS 39215-1033
Phone: (601) 923-7150

DEPARTMENT OF REVENUE
STATE OF MISSISSIPPI

Special Fuel Used on Government Contracts

State and Local Government Contracts

Special fuel purchased, acquired or used in performing contracts with the State of Mississippi, counties, municipalities or any political subdivision is taxed at a rate of 18 cents per gallon. Special fuel includes but is not limited to the following:

- Dyed diesel fuel;
- Kerosene;
- Undyed diesel fuel; and,
- Fuel oil.

State and local government contracts include construction, reconstruction and maintenance or repairs of projects such as roads, bridges, water systems, sewer systems, buildings, drainage canals and recreational facilities. The Department of Revenue may require contractors to remit the excise tax directly to the state in lieu of paying the tax to a distributor.

Special Fuel Direct Pay Permit

Contractors that remit the excise tax to the state will be issued a Special Fuel Direct Pay Permit. This permit relieves the distributor from collecting the tax and requires the contractor to file a monthly special fuel return. The distributor should include the contractor's permit number on all invoices that are related to tax-free sales.

The contractor is required to furnish a surety or cash bond guaranteeing the payment of the excise tax prior to receiving the Special Fuel Direct Pay Permit. The Department of Revenue may accept a contractors tax bond if the bond covers the excise tax levied on special fuel.

Special Fuel Distributors

If the contractor does not have a Special Fuel Direct Pay Permit, distributors are required to collect the 18 cents excise tax and remit the tax to the Department of Revenue. The additional 12.25 cents levied on special fuel (excluding undyed diesel) should be reported on schedules 5F and 5G of the special fuel return.

Environmental Protection Fee

Special fuel distributors are required to collect the environmental protection fee even if the contractor has a Special Fuel Direct Pay Permit. The fee is levied at 4/10^{ths} of a cent per gallon. The fee is suspended or reinstated when the trust fund has exceeded or fallen below the obligatory balance.

Penalties

Any person who knowingly and willfully purchases untaxed fuel for use in equipment utilized on a road or highway construction site in this state is guilty of a misdemeanor and, upon conviction, shall be fined not less than $1,000 or more than $100,000, or imprisoned in the county jail for not more than one year, or both.

This fact sheet is intended to help you become more familiar with Mississippi tax laws and your rights and responsibilities under the laws. Nothing in this fact sheet supersedes, alters, or otherwise changes any provisions of the tax law, regulations, court decisions, or notices.

Petroleum Tax Bureau
P. O. Box 1033
Jackson, MS 39215-1033
Phone: (601) 923-7150

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 - NOTICE TO BIDDERS NO. 2954 **CODE: (IS)**

DATE: **12/01/2020**

SUBJECT: **Reflective Sheeting for Signs**

Bidders are hereby advised that the retroreflective sign sheeting used for signs on this project shall be as listed below and shall meet the requirements of Subsection 721.06.

Temporary Construction Signs

Temporary traffic control (orange) sign sheeting shall be a minimum Type IX Fluorescent Orange sheeting as shown in Special Provision 907-721.

Permanent Signs

Permanent signs, except signs on traffic signal poles/mast arms, shall be as follows:

- Brown background sheeting on guide signs shall be a minimum Type VIII sheeting,
- Green and blue background sheeting on guide signs shall be a minimum Type IX sheeting, and
- All white, yellow, red, fluorescent yellow, and fluorescent yellow/green sheeting shall be Type XI sheeting.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 - NOTICE TO BIDDERS NO. 4113 **CODE: (SP)**

DATE: **03/23/2022**

SUBJECT: **Unique Entity ID (SAM) Requirement for Federal Funded Projects**

Bidders are advised that the Prime Contractor must register and maintain a current registration in the System for Award Management (http://sam.gov) at all times during this project. Upon registration, the Contractor will be assigned a SAM Unique Entity ID.

Bidders are also advised that prior to the award of this contract, they MUST be registered, active, and have no active exclusions in the System for Award Management.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 - NOTICE TO BIDDERS NO. 4702 **CODE: (SP)**

DATE: 11/22/2022

SUBJECT: App for Traffic Control Reports

Bidders are advised that the Department has created a smart phone App for completing and submitting traffic control reports (Form CSD-762) required on this project. The Contractor who monitors traffic control activities and completes traffic control reports will be required to download and use this App when completing and submitting traffic control reports. The reports will then be readily available to all persons who need access to the forms. The App is free and is available for downloading at the following location.

https://extacctmgmt.mdot.state.ms.us/

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 - NOTICE TO BIDDERS NO. 5551 **CODE: (IS)**

DATE: **12/06/2023**

SUBJECT: **Federal Bridge Formula**

Bidders are hereby advised that the latest revision of Federal Highway Administration Publication No. FHWA-HOP-06-105, **BRIDGE FORMULA WEIGHTS**, dated August 2006, is made a part of this contract when applicable.

Prior to the preconstruction conference, the Contractor shall advise the Engineer, in writing, what materials, if any, will be delivered to the jobsite via Interstate route(s).

Copies of the **BRIDGE FORMULA WEIGHTS** publication may be obtained by contacting:

Federal Highway Administration
400 7th Street, SW
Washington, DC 20590
(202) 366-2212

or

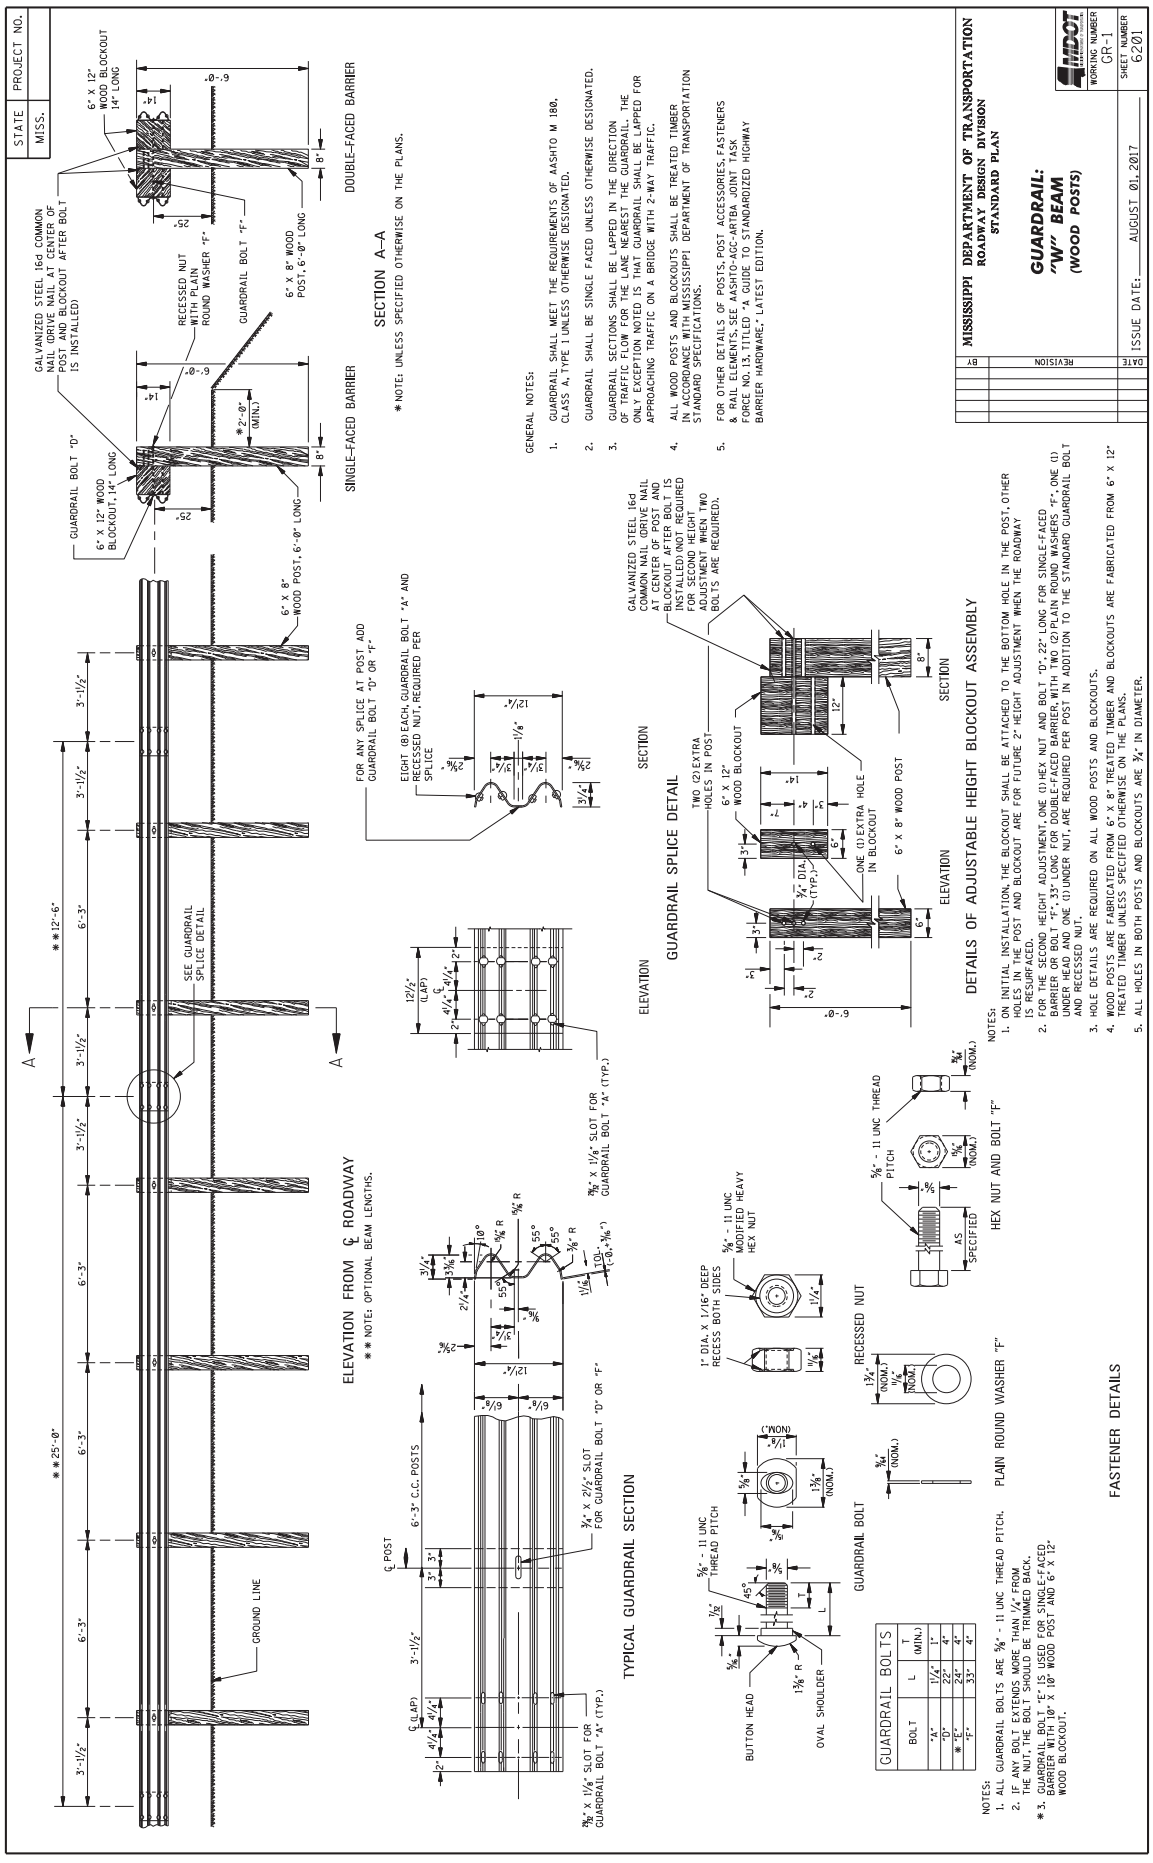
https://ops.fhwa.dot.gov/freight/publications/brdg_frm_wghts/

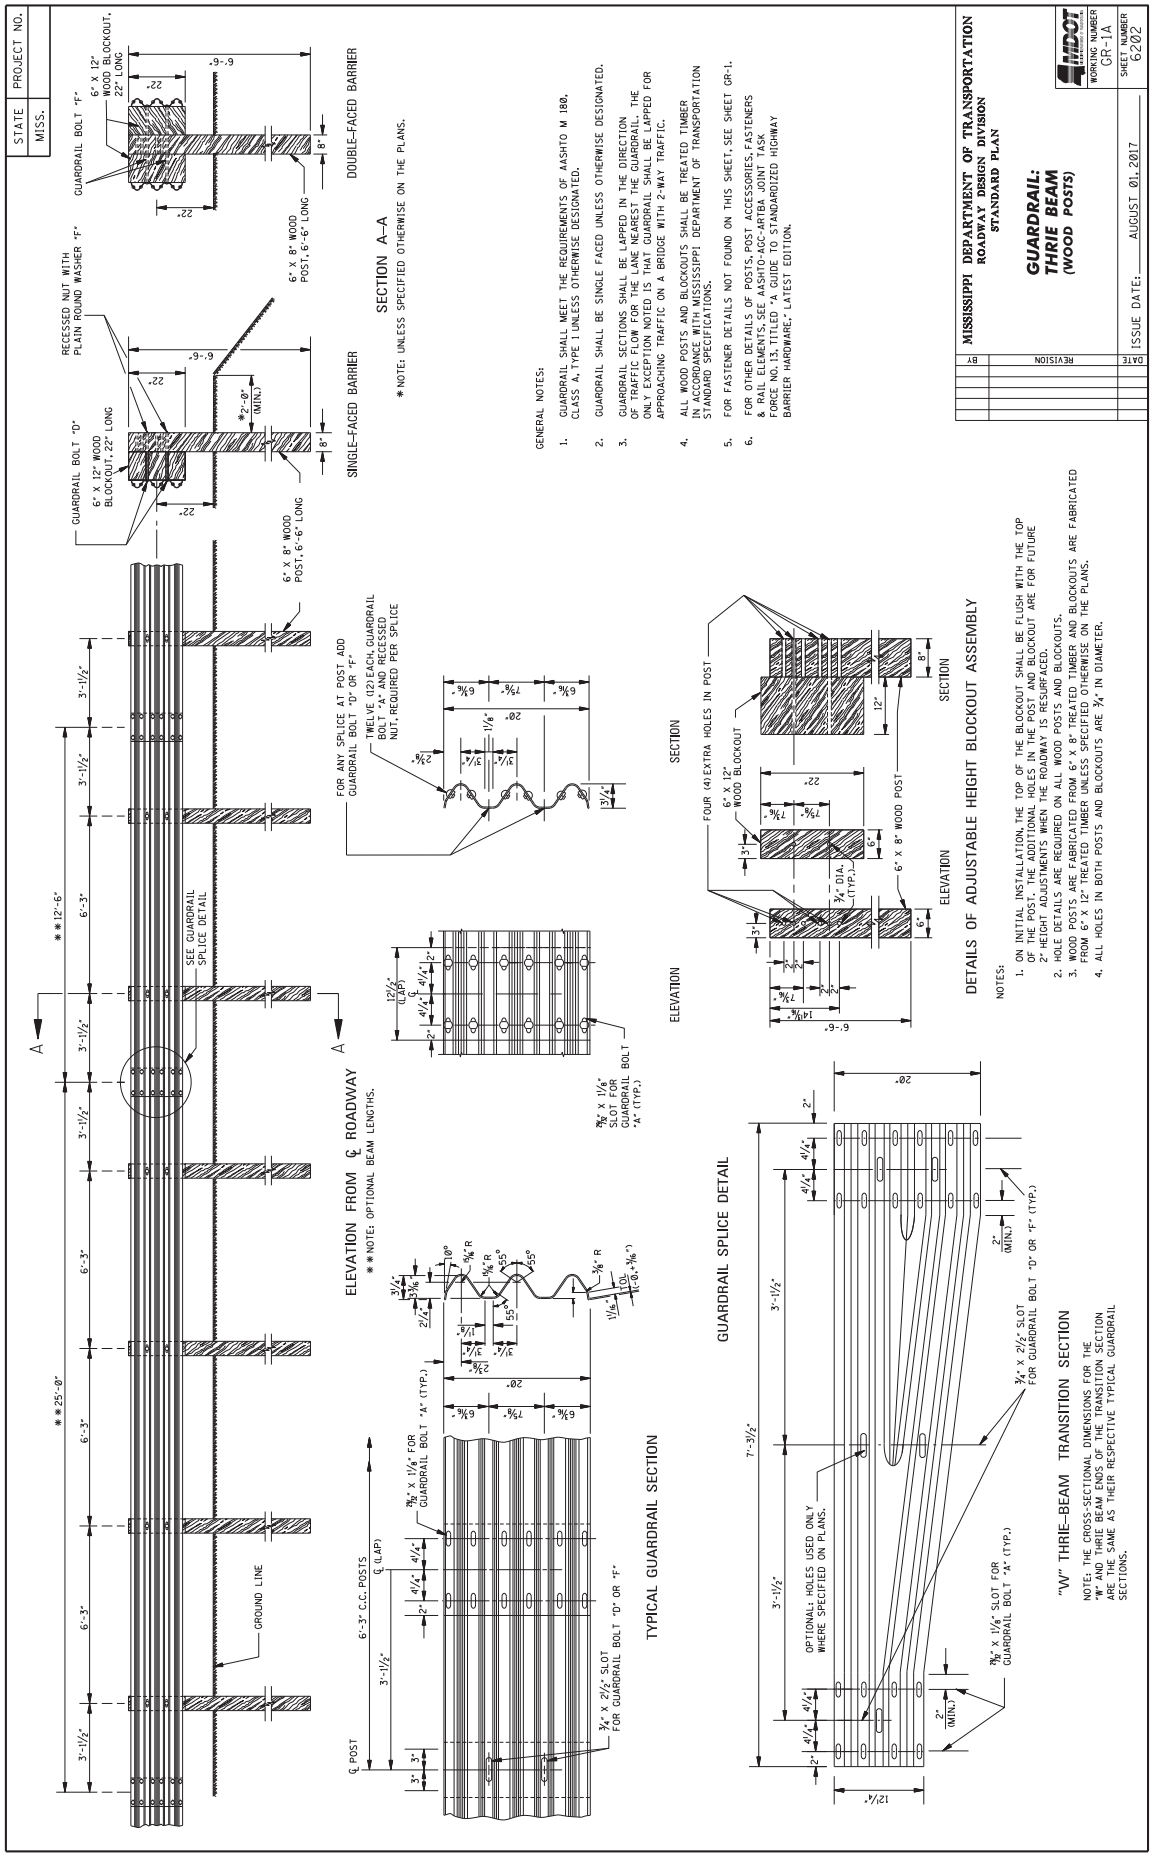
MISSISSIPPI DEPARTMENT OF TRANSPORTATION

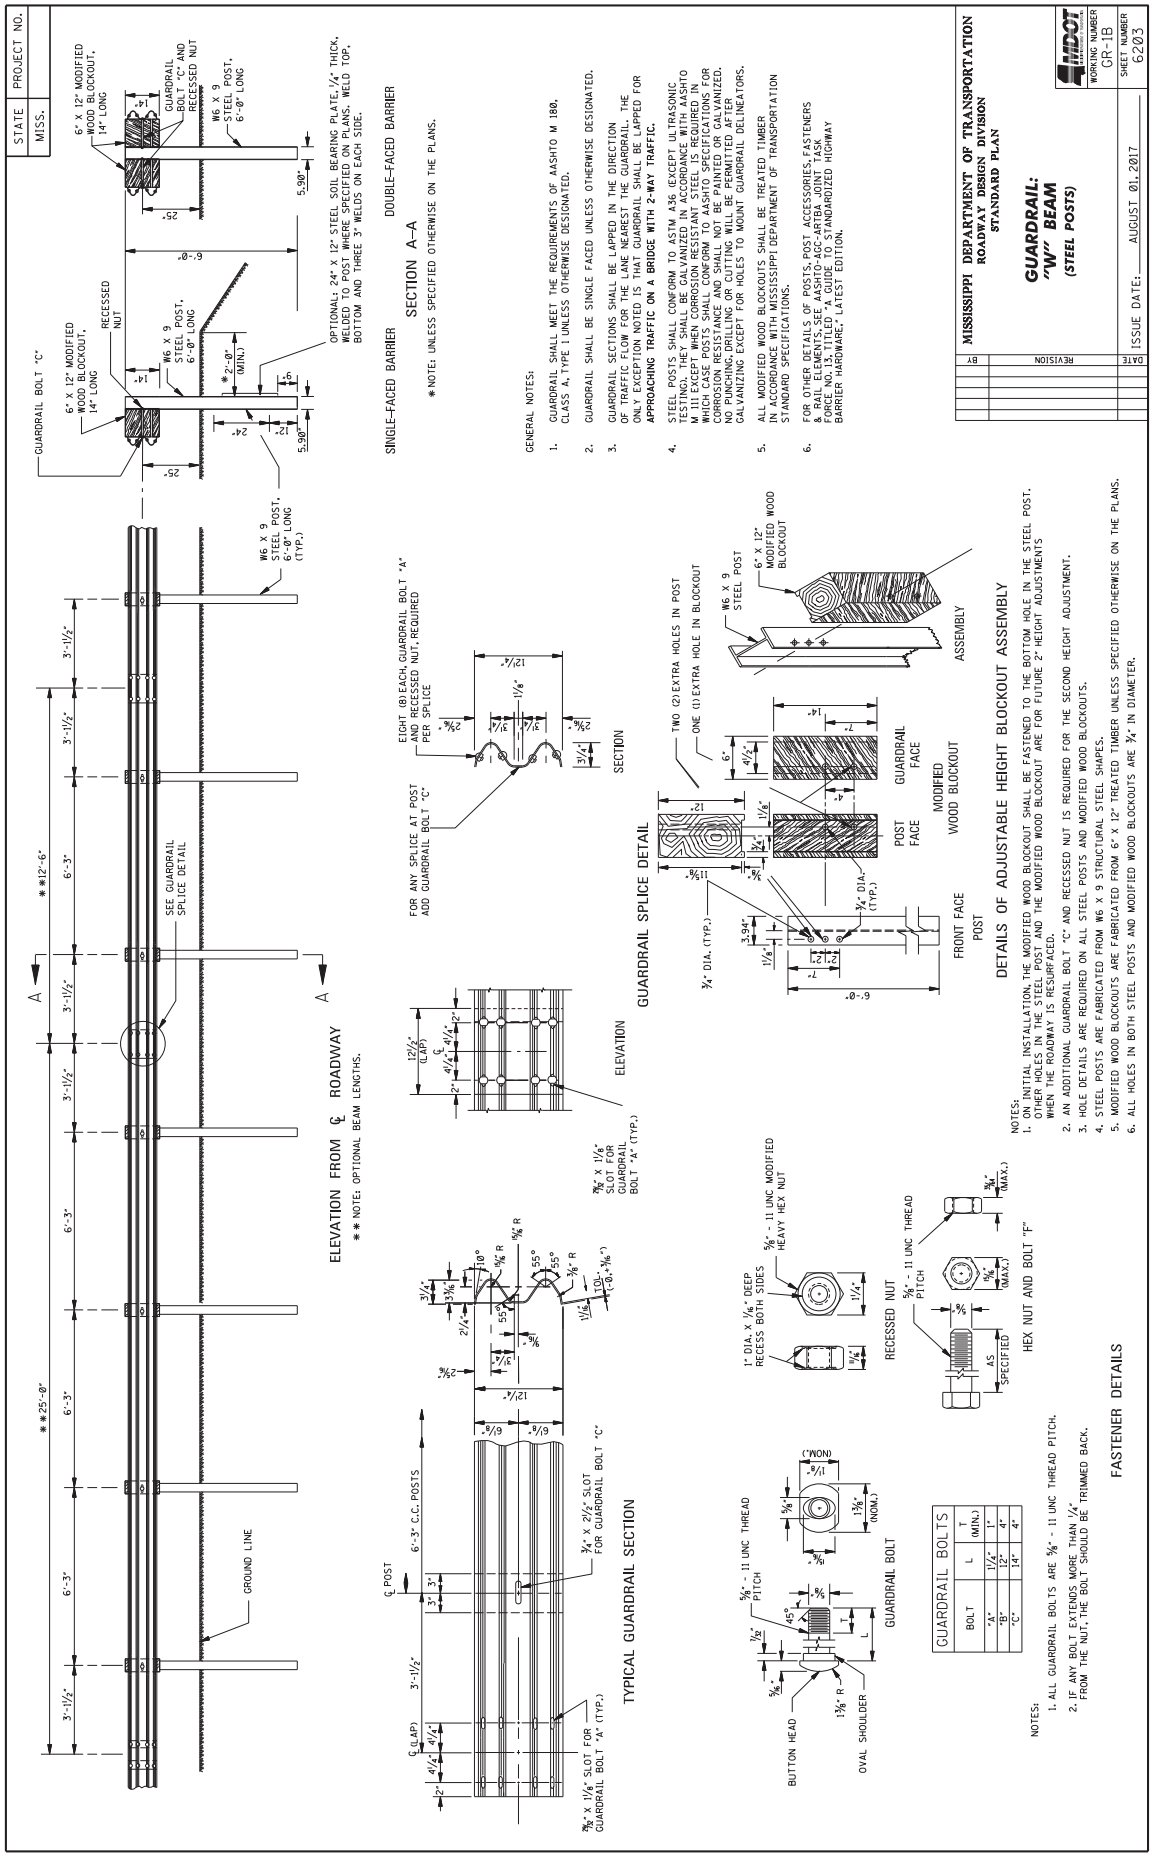
SUPPLEMENT TO NOTICE TO BIDDERS NO. 7624

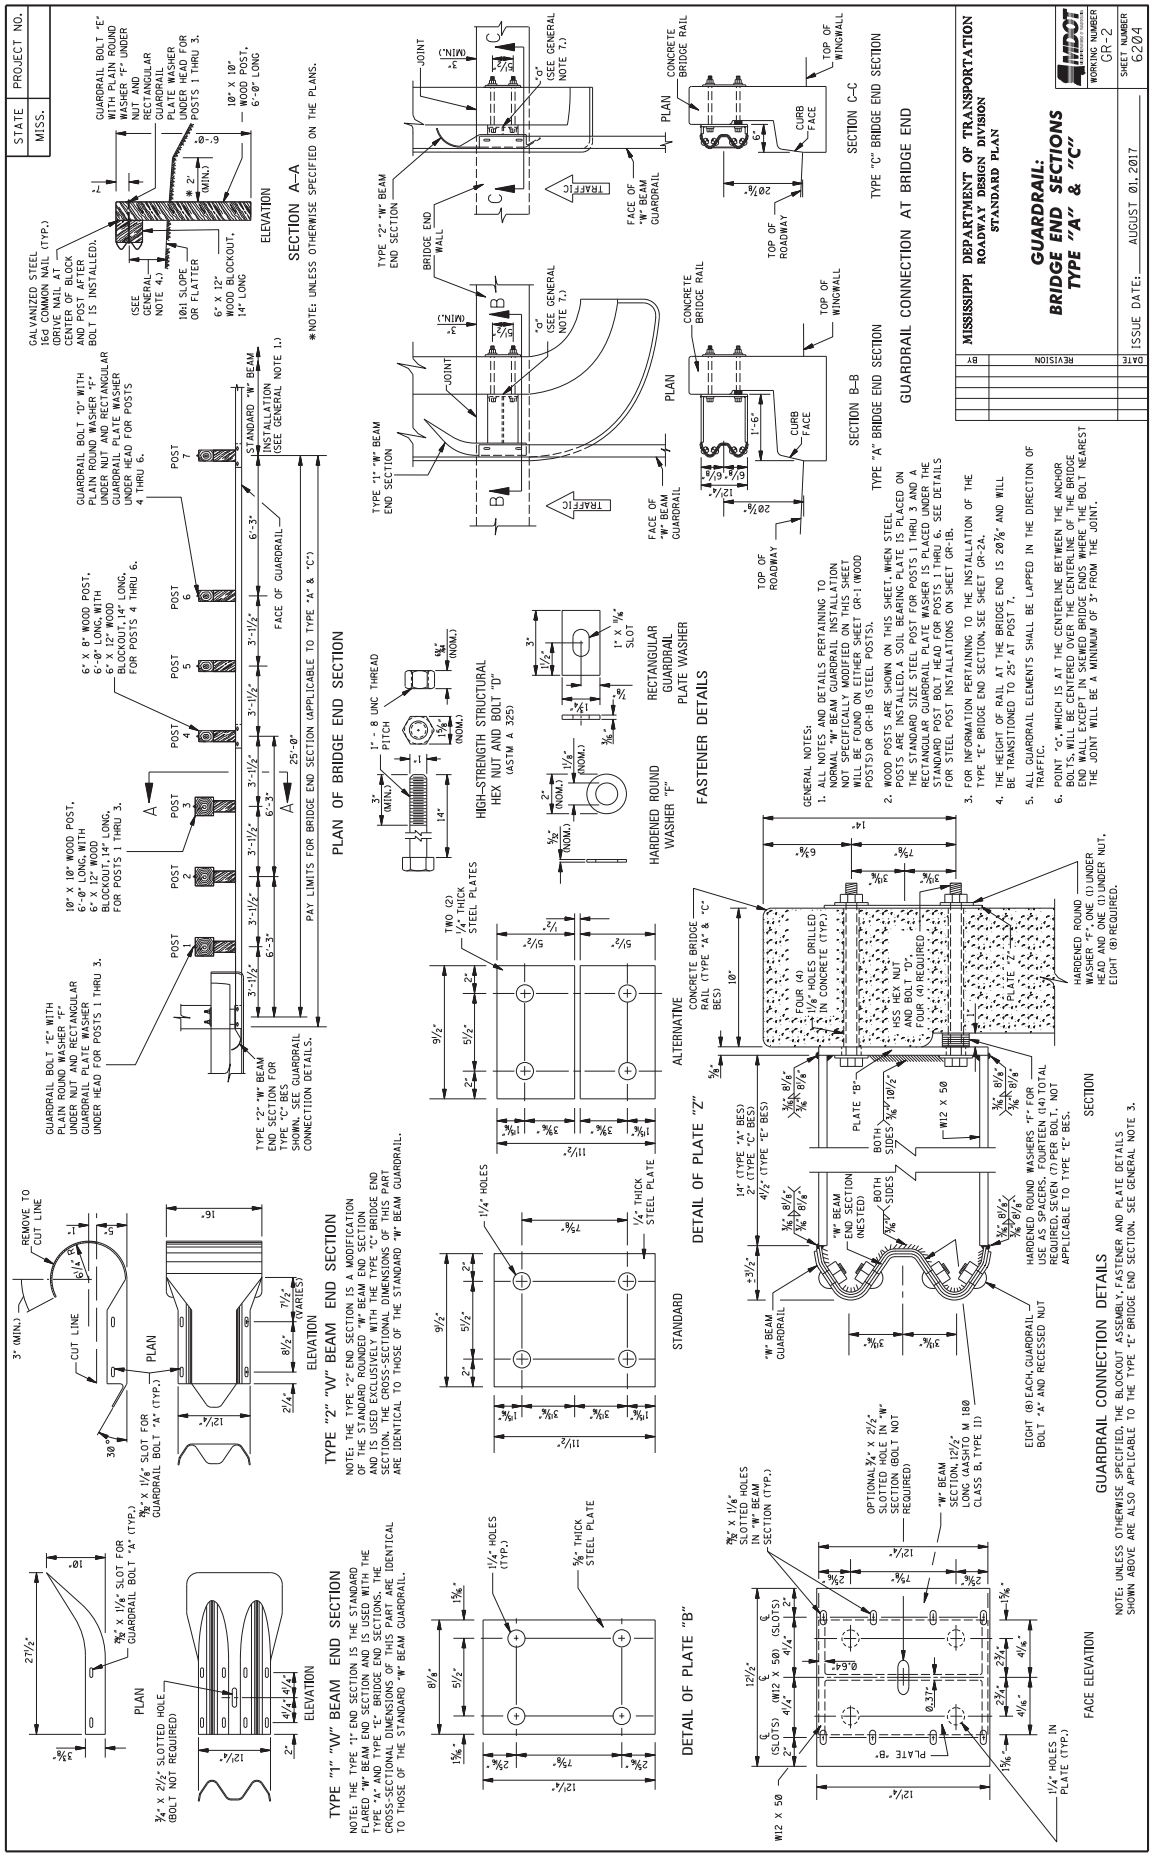
DATE: **01/26/2026**

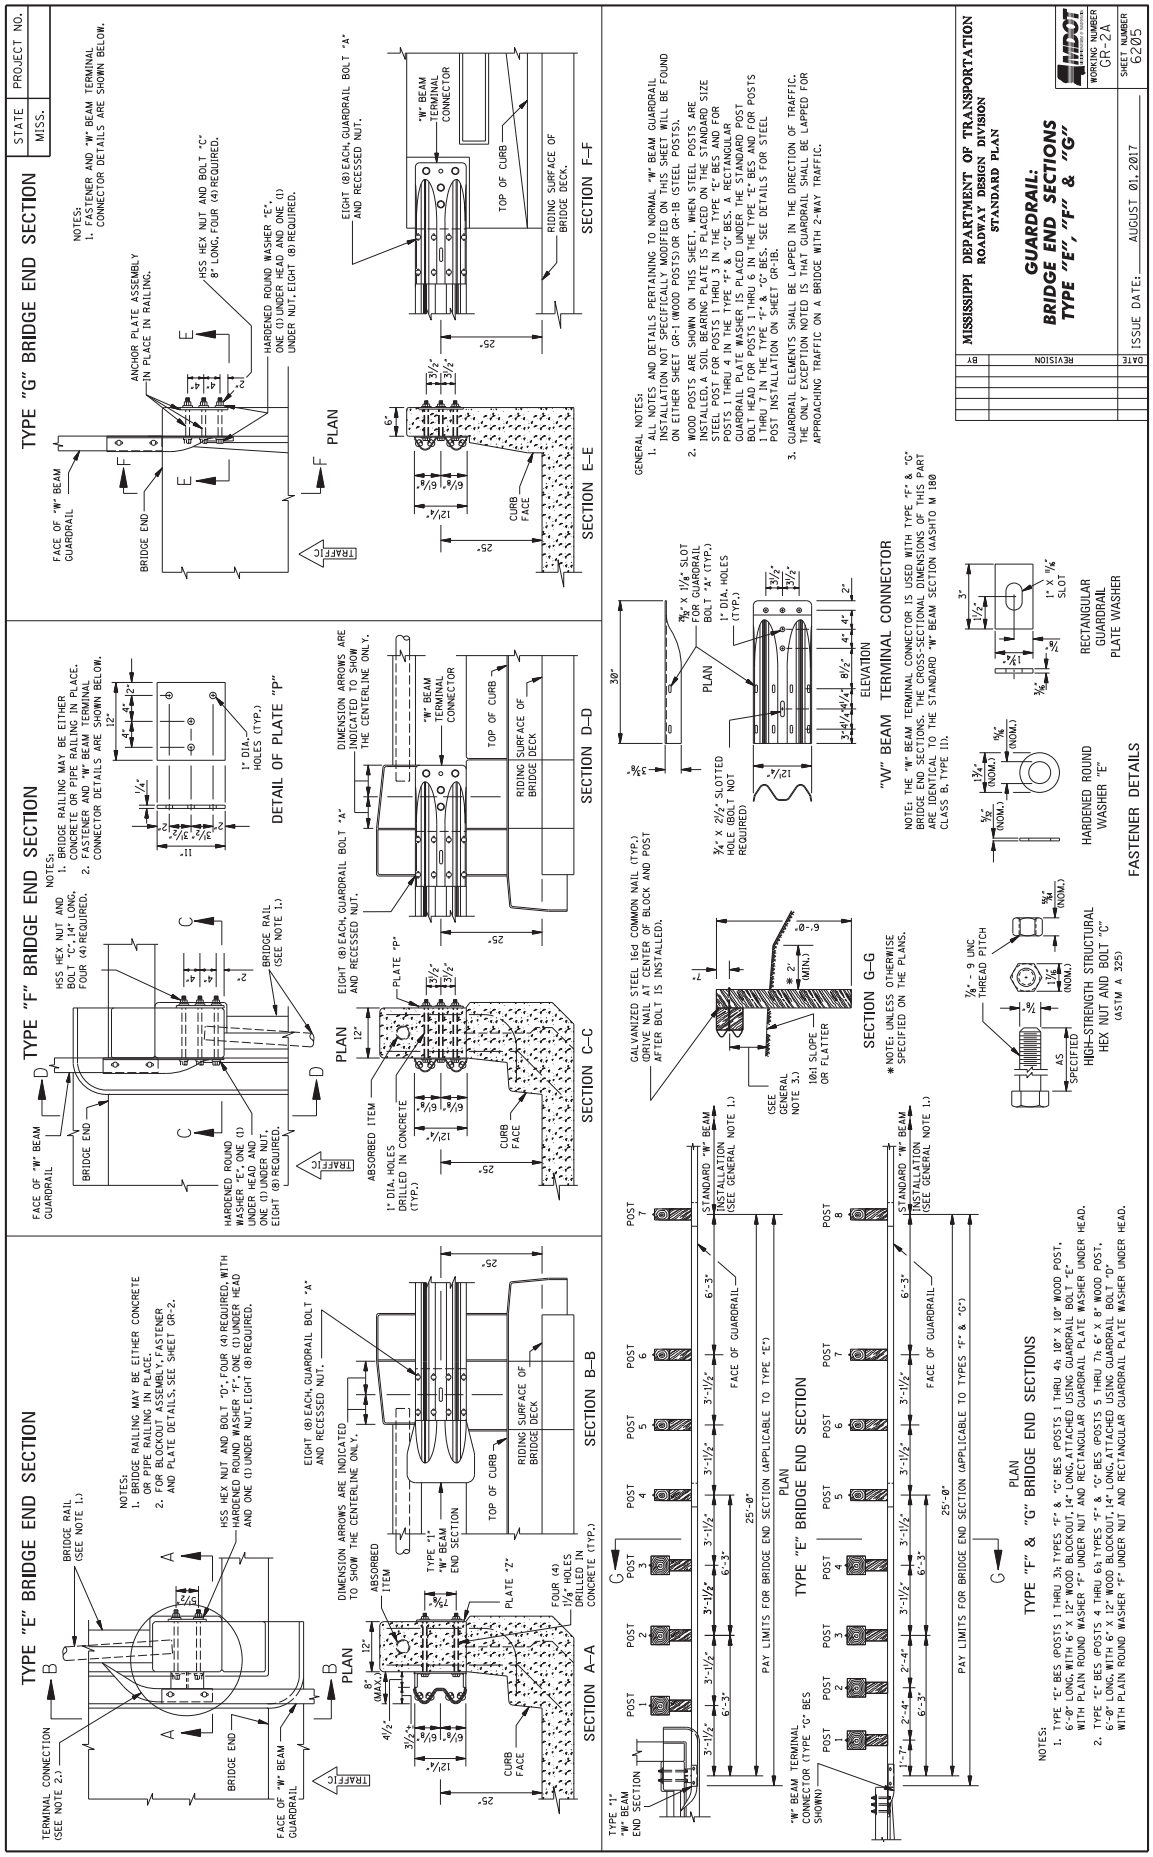
After the last drawing on page 33, add the following.

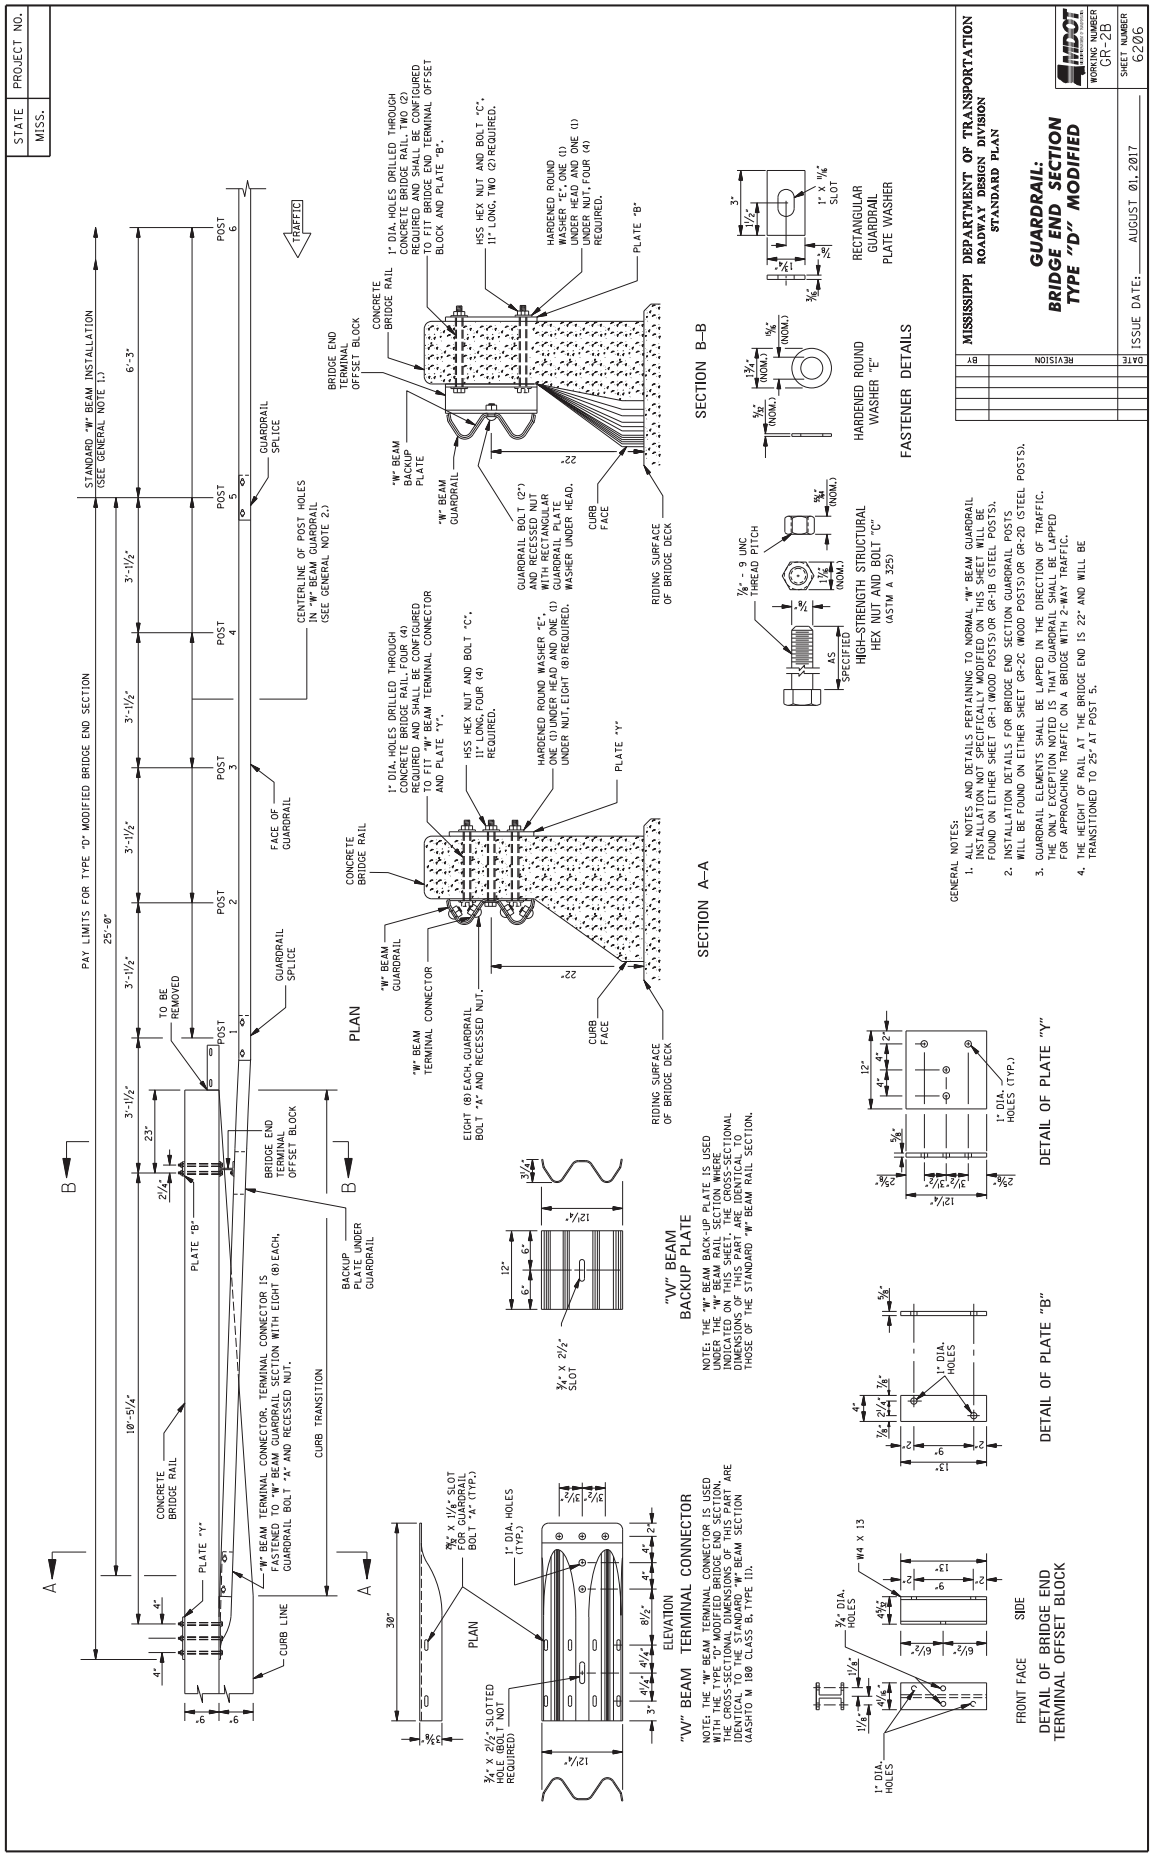

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
GUARDRAIL: "W" BEAM (WOOD POSTS)
WORKING NUMBER GR-1
SHEET NUMBER 6201
ISSUE DATE: AUGUST 01, 2017
DATE REVISION BY
GENERAL NOTES:
1. GUARDRAIL SHALL MEET THE REQUIREMENTS OF AASHTO M 180, CLASS A, TYPE 1 UNLESS OTHERWISE DESIGNATED.
2. GUARDRAIL SHALL BE SINGLE FACED UNLESS OTHERWISE DESIGNATED.
3. GUARDRAIL SECTIONS SHALL BE LAPPED IN THE DIRECTION OF TRAFFIC FLOW FOR THE LANE NEAREST THE GUARDRAIL. THE ONLY EXCEPTION NOTED IS THAT GUARDRAIL SHALL BE LAPPED FOR APPROACHING TRAFFIC ON A BRIDGE WITH 2-WAY TRAFFIC.
4. ALL WOOD POSTS AND BLOCKOUTS SHALL BE TREATED TIMBER IN ACCORDANCE WITH MISSISSIPPI DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS.
5. FOR OTHER DETAILS OF POSTS, POST ACCESSORIES, FASTENERS & RAIL ELEMENTS, SEE AASHTO-AGC-ARTBA JOINT TASK FORCE NO. 13, TITLED "A GUIDE TO STANDARDIZED HIGHWAY BARRIER HARDWARE," LATEST EDITION.
SINGLE-FACED BARRIER
DOUBLE-FACED BARRIER
SECTION A-A
*NOTE: UNLESS SPECIFIED OTHERWISE ON THE PLANS.
GALVANIZED STEEL 16d COMMON NAIL (DRIVE NAIL AT CENTER OF POST AND BLOCKOUT AFTER BOLT IS INSTALLED)
RECESSED NUT WITH PLAIN ROUND WASHER "F"
GUARDRAIL BOLT "F"
GUARDRAIL BOLT "D"
6" X 12" WOOD BLOCKOUT, 14" LONG
6" X 8" WOOD POST, 6'-0" LONG
6" X 12" WOOD BLOCKOUT 14" LONG
*2'-0" (MIN.)
ELEVATION FROM ℄ ROADWAY
** NOTE: OPTIONAL BEAM LENGTHS.
SEE GUARDRAIL SPLICE DETAIL
GROUND LINE
TYPICAL GUARDRAIL SECTION
℄ POST
6'-3" C.C. POSTS
℄ (LAP)
3/4" X 2 1/2" SLOT FOR GUARDRAIL BOLT "D" OR "F"
13/16" X 1 1/4" SLOT FOR GUARDRAIL BOLT "A" (TYP.)
FOR ANY SPLICE AT POST ADD GUARDRAIL BOLT "D" OR "F".
EIGHT (8) EACH GUARDRAIL BOLT "A" AND RECESSED NUT, REQUIRED PER SPLICE
13/16" X 1 1/8" SLOT FOR GUARDRAIL BOLT "A" (TYP.)
ELEVATION
SECTION
GUARDRAIL SPLICE DETAIL
GALVANIZED STEEL 16d COMMON NAIL (DRIVE NAIL AT CENTER OF POST AND BLOCKOUT AFTER BOLT IS INSTALLED) NOT REQUIRED FOR SECOND HEIGHT ADJUSTMENT WHEN TWO BOLTS ARE REQUIRED.
TWO (2) EXTRA HOLES IN POST
6" X 12" WOOD BLOCKOUT
ONE (1) EXTRA HOLE IN BLOCKOUT
6" X 8" WOOD POST
ELEVATION
SECTION
DETAILS OF ADJUSTABLE HEIGHT BLOCKOUT ASSEMBLY
NOTES:
1. ON INITIAL INSTALLATION, THE BLOCKOUT SHALL BE ATTACHED TO THE BOTTOM HOLE IN THE POST. OTHER HOLES IN THE POST AND BLOCKOUT ARE FOR FUTURE 2" HEIGHT ADJUSTMENT WHEN THE ROADWAY IS RESURFACED.
2. FOR THE SECOND HEIGHT ADJUSTMENT, ONE (1) HEX NUT AND BOLT "D", 22" LONG FOR SINGLE-FACED BARRIER OR BOLT "F", 33" LONG FOR DOUBLE-FACED BARRIER, WITH TWO (2) PLAIN ROUND WASHERS "F", ONE (1) UNDER HEAD AND ONE (1) UNDER NUT, ARE REQUIRED PER POST IN ADDITION TO THE STANDARD GUARDRAIL BOLT AND RECESSED NUT.
3. HOLE DETAILS ARE REQUIRED ON ALL WOOD POSTS AND BLOCKOUTS.
4. WOOD POSTS ARE FABRICATED FROM 6" X 8" TREATED TIMBER AND BLOCKOUTS ARE FABRICATED FROM 6" X 12" TREATED TIMBER UNLESS SPECIFIED OTHERWISE ON THE PLANS.
5. ALL HOLES IN BOTH POSTS AND BLOCKOUTS ARE 3/4" IN DIAMETER.
GUARDRAIL BOLTS
BOLT | L | T (MIN.)
"A" | 11 1/2" | 1"
"D" | 22" | 4"
* "E" | 24" | 4"
"F" | 33" | 4"
NOTES:
1. ALL GUARDRAIL BOLTS ARE 5/8" - 11 UNC THREAD PITCH.
2. IF ANY BOLT EXTENDS MORE THAN 1/4" FROM THE NUT, THE BOLT SHOULD BE TRIMMED BACK.
* 3. GUARDRAIL BOLT "E" IS USED FOR SINGLE-FACED BARRIER WITH 10" X 10" WOOD POST AND 6" X 12" WOOD BLOCKOUT.
FASTENER DETAILS
1" DIA. X 1/16" DEEP RECESS BOTH SIDES
3/4" - 11 UNC MODIFIED HEAVY HEX NUT
5/8" - 11 UNC THREAD PITCH
BUTTON HEAD
OVAL SHOULDER
GUARDRAIL BOLT
RECESSED NUT
PLAIN ROUND WASHER "F"
HEX NUT AND BOLT "F"

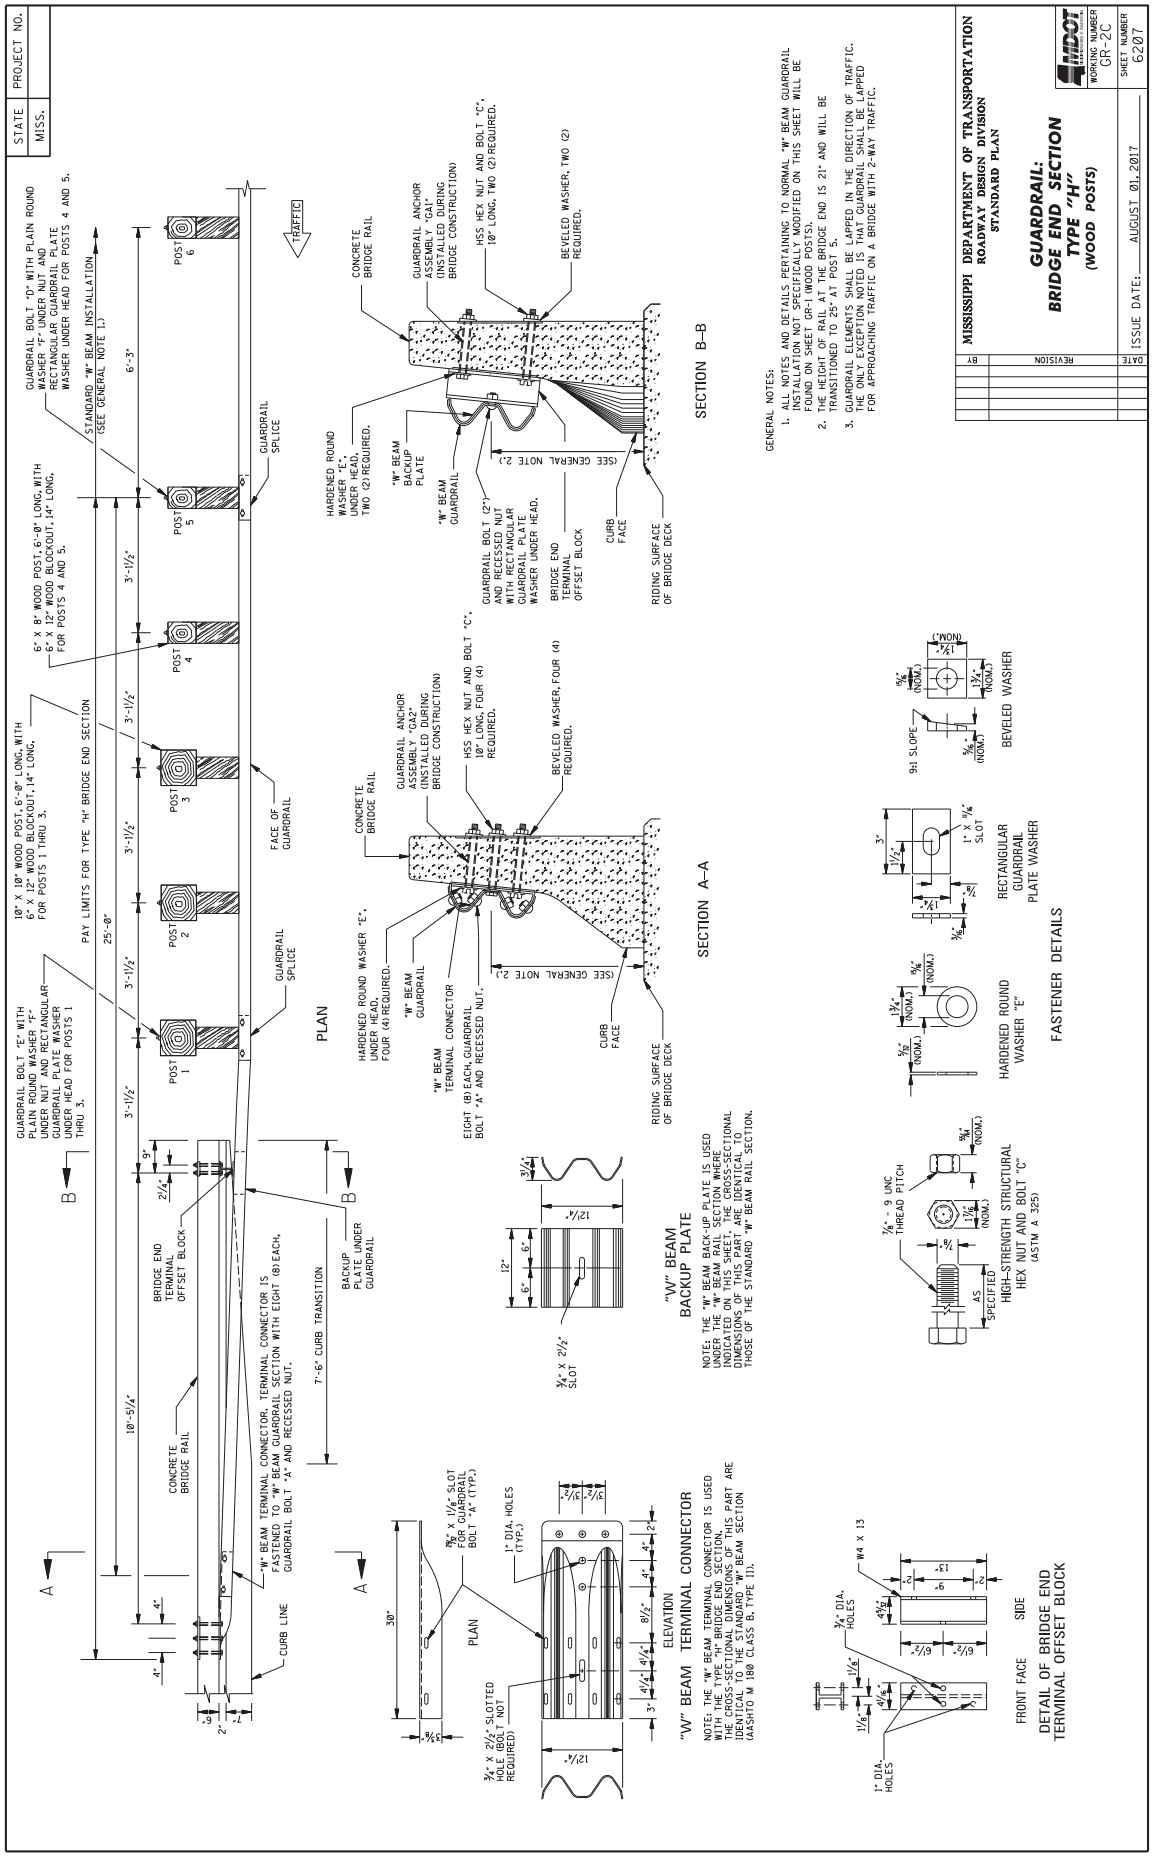

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
GUARDRAIL: THRIE BEAM (WOOD POSTS)
WORKING NUMBER GR-1A
SHEET NUMBER 6202
ISSUE DATE: AUGUST 01, 2017
BY REVISION DATE
GENERAL NOTES:
1. GUARDRAIL SHALL MEET THE REQUIREMENTS OF AASHTO M 180, CLASS A, TYPE I UNLESS OTHERWISE DESIGNATED.
2. GUARDRAIL SHALL BE SINGLE FACED UNLESS OTHERWISE DESIGNATED.
3. GUARDRAIL SECTIONS SHALL BE LAPPED IN THE DIRECTION OF TRAFFIC FLOW FOR THE LANE NEAREST THE GUARDRAIL. THE ONLY EXCEPTION NOTED IS THAT GUARDRAIL SHALL BE LAPPED FOR APPROACHING TRAFFIC ON A BRIDGE WITH 2-WAY TRAFFIC.
4. ALL WOOD POSTS AND BLOCKOUTS SHALL BE TREATED TIMBER IN ACCORDANCE WITH MISSISSIPPI DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS.
5. FOR FASTENER DETAILS NOT FOUND ON THIS SHEET, SEE SHEET GR-1.
6. FOR OTHER DETAILS OF POSTS, POST ACCESSORIES, FASTENERS & RAIL ELEMENTS, SEE AASHTO-AGC-ARTBA JOINT TASK FORCE NO. 13, TITLED "A GUIDE TO STANDARDIZED HIGHWAY BARRIER HARDWARE," LATEST EDITION.
SECTION A–A
* NOTE: UNLESS SPECIFIED OTHERWISE ON THE PLANS.
SINGLE-FACED BARRIER
DOUBLE-FACED BARRIER
GUARDRAIL BOLT "D"
6" X 12" WOOD BLOCKOUT, 22" LONG
GUARDRAIL BOLT "F"
RECESSED NUT WITH PLAIN ROUND WASHER "F"
6" X 8" WOOD POST, 6'-6" LONG
2'-0" (MIN.)
ELEVATION FROM ℄ ROADWAY
** NOTE: OPTIONAL BEAM LENGTHS.
SEE GUARDRAIL SPLICE DETAIL
GROUND LINE
TYPICAL GUARDRAIL SECTION
℄ POST
6'-3" C.C. POSTS
℄ (LAP)
FOR GUARDRAIL BOLT "A" (TYP.)
FOR GUARDRAIL BOLT "D" OR "F"
FOR ANY SPLICE AT POST ADD GUARDRAIL BOLT "D" OR "F"
TWELVE (12) EACH, GUARDRAIL BOLT "A" AND RECESSED NUT, REQUIRED PER SPLICE
SECTION
ELEVATION
FOR GUARDRAIL BOLT "A" (TYP.)
GUARDRAIL SPLICE DETAIL
OPTIONAL HOLES USED ONLY WHERE SPECIFIED ON PLANS.
"W" THRIE-BEAM TRANSITION SECTION
NOTE: THE CROSS-SECTIONAL DIMENSIONS FOR THE "W" AND THRIE BEAM ENDS OF THE TRANSITION SECTION ARE THE SAME AS THEIR RESPECTIVE TYPICAL GUARDRAIL SECTIONS.
FOUR (4) EXTRA HOLES IN POST
6" X 12" WOOD BLOCKOUT
6" X 8" WOOD POST
DETAILS OF ADJUSTABLE HEIGHT BLOCKOUT ASSEMBLY
NOTES:
1. ON INITIAL INSTALLATION, THE TOP OF THE BLOCKOUT SHALL BE FLUSH WITH THE TOP OF THE POST. THE ADDITIONAL HOLES IN THE POST AND BLOCKOUT ARE FOR FUTURE 2" HEIGHT ADJUSTMENTS WHEN THE ROADWAY IS RESURFACED.
2. HOLE DETAILS ARE REQUIRED ON ALL WOOD POSTS AND BLOCKOUTS.
3. WOOD POSTS ARE FABRICATED FROM 6" X 8" TREATED TIMBER AND BLOCKOUTS ARE FABRICATED FROM 6" X 12" TREATED TIMBER UNLESS SPECIFIED OTHERWISE ON THE PLANS.
4. ALL HOLES IN BOTH POSTS AND BLOCKOUTS ARE ¾" IN DIAMETER.

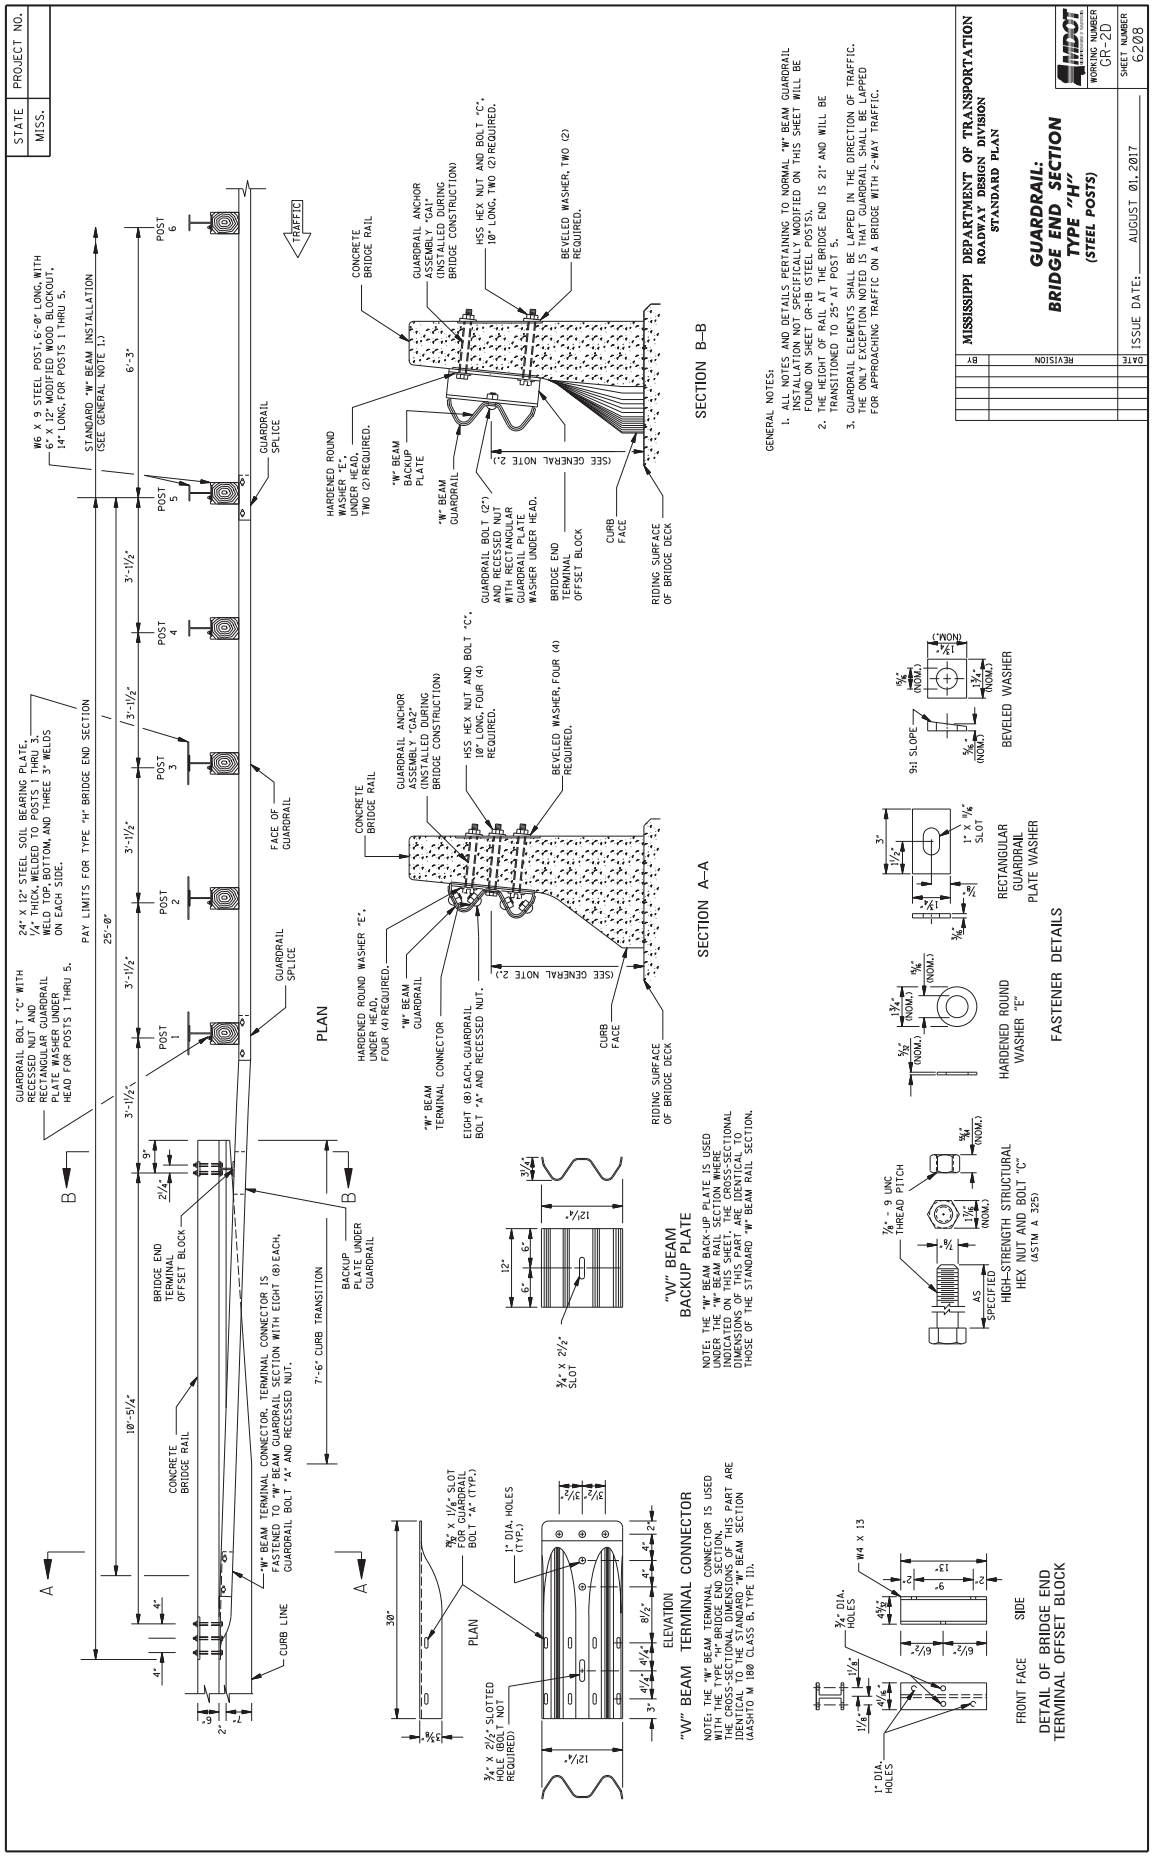

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
GUARDRAIL: "W" BEAM (STEEL POSTS)
WORKING NUMBER GR-1B
SHEET NUMBER 6203
ISSUE DATE: AUGUST 01, 2017
DATE REVISION BY
SINGLE-FACED BARRIER
DOUBLE-FACED BARRIER
SECTION A–A
*NOTE: UNLESS SPECIFIED OTHERWISE ON THE PLANS.
GENERAL NOTES:
1. GUARDRAIL SHALL MEET THE REQUIREMENTS OF AASHTO M 180, CLASS A, TYPE 1 UNLESS OTHERWISE DESIGNATED.
2. GUARDRAIL SHALL BE SINGLE FACED UNLESS OTHERWISE DESIGNATED.
3. GUARDRAIL SECTIONS SHALL BE LAPPED IN THE DIRECTION OF TRAFFIC FLOW FOR THE LANE NEAREST THE GUARDRAIL. THE ONLY EXCEPTION NOTED IS THAT GUARDRAIL SHALL BE LAPPED FOR APPROACHING TRAFFIC ON A BRIDGE WITH 2-WAY TRAFFIC.
4. STEEL POSTS SHALL CONFORM TO ASTM A36 (EXCEPT ULTRASONIC TESTING) AND SHALL BE GALVANIZED IN ACCORDANCE WITH AASHTO M 111 EXCEPT WHEN CORROSION RESISTANT STEEL IS REQUIRED IN WHICH CASE POSTS SHALL CONFORM TO AASHTO SPECIFICATIONS FOR CORROSION RESISTANCE AND SHALL NOT BE PAINTED OR GALVANIZED. NO PUNCHING, DRILLING OR CUTTING WILL BE PERMITTED AFTER GALVANIZING EXCEPT FOR HOLES TO MOUNT GUARDRAIL DELINEATORS.
5. ALL MODIFIED WOOD BLOCKOUTS SHALL BE TREATED TIMBER IN ACCORDANCE WITH MISSISSIPPI DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS.
6. FOR OTHER DETAILS OF POSTS, POST ACCESSORIES, FASTENERS & RAIL ELEMENTS, SEE AASHTO-AGC-ARTBA JOINT TASK FORCE NO. 13, TITLED "A GUIDE TO STANDARDIZED HIGHWAY BARRIER HARDWARE," LATEST EDITION.
ELEVATION FROM ℄ ROADWAY
** NOTE: OPTIONAL BEAM LENGTHS.
GROUND LINE
SEE GUARDRAIL SPLICE DETAIL
GUARDRAIL BOLT "C"
6" X 12" MODIFIED WOOD BLOCKOUT, 14" LONG
RECESSED NUT
W6 X 9 STEEL POST, 6'-0" LONG
OPTIONAL: 24" X 12" STEEL SOIL BEARING PLATE, 1/4" THICK, WELDED TO POST WHERE SPECIFIED ON PLANS. WELD TOP, BOTTOM AND THREE 3" WELDS ON EACH SIDE.
GUARDRAIL BOLT "A" AND RECESSED NUT
#W6 X 9 STEEL POST, 6'-0" LONG (TYP.)
TYPICAL GUARDRAIL SECTION
6'-3" C.C. POSTS
3/4" X 2 1/2" SLOT FOR GUARDRAIL BOLT "C"
3/4" X 1 1/4" SLOT FOR GUARDRAIL BOLT "A" (TYP.)
GUARDRAIL BOLTS
BOLT L T (MIN.)
"A" 1 1/4" 1"
"B" 12" 4"
"C" 14" 4"
GUARDRAIL BOLT
BUTTON HEAD
OVAL SHOULDER
FASTENER DETAILS
NOTES:
1. ALL GUARDRAIL BOLTS ARE 5/8" - 11 UNC THREAD PITCH.
2. IF ANY BOLT EXTENDS MORE THAN 1/4" FROM THE NUT, THE BOLT SHOULD BE TRIMMED BACK.
EIGHT (8) EACH, GUARDRAIL BOLT "A" AND RECESSED NUT, REQUIRED PER SPLICE
FOR ANY SPLICE AT POST ADD GUARDRAIL BOLT "C"
SECTION
ELEVATION
GUARDRAIL SPLICE DETAIL
TWO (2) EXTRA HOLES IN POST
ONE (1) EXTRA HOLE IN BLOCKOUT
3/4" DIA. (TYP.)
1 1/8" DIA. (TYP.)
POST FACE
GUARDRAIL FACE
MODIFIED WOOD BLOCKOUT
FRONT FACE POST
W6 X 9 STEEL POST
6" X 12" MODIFIED WOOD BLOCKOUT
ASSEMBLY
DETAILS OF ADJUSTABLE HEIGHT BLOCKOUT ASSEMBLY
1" DIA. X 1/8" DEEP RECESS BOTH SIDES
5/8" - 11 UNC MODIFIED HEAVY HEX NUT
RECESSED NUT
5/8" - 11 UNC THREAD PITCH
AS SPECIFIED
HEX NUT AND BOLT "F"
NOTES:
1. ON INITIAL INSTALLATION, THE MODIFIED WOOD BLOCKOUT SHALL BE FASTENED TO THE BOTTOM HOLE IN THE STEEL POST. OTHER HOLES IN THE STEEL POST AND THE MODIFIED WOOD BLOCKOUT ARE FOR FUTURE 2" HEIGHT ADJUSTMENTS WHEN THE ROADWAY IS RESURFACED.
2. AN ADDITIONAL GUARDRAIL BOLT "C" AND RECESSED NUT IS REQUIRED FOR THE SECOND HEIGHT ADJUSTMENT.
3. HOLE DETAILS ARE REQUIRED ON ALL STEEL POSTS AND MODIFIED WOOD BLOCKOUTS.
4. STEEL POSTS ARE FABRICATED FROM W6 X 9 STRUCTURAL STEEL SHAPES.
5. MODIFIED WOOD BLOCKOUTS ARE FABRICATED FROM 6" X 12" TREATED TIMBER UNLESS SPECIFIED OTHERWISE ON THE PLANS.
6. ALL HOLES IN BOTH STEEL POSTS AND MODIFIED WOOD BLOCKOUTS ARE 3/4" IN DIAMETER.

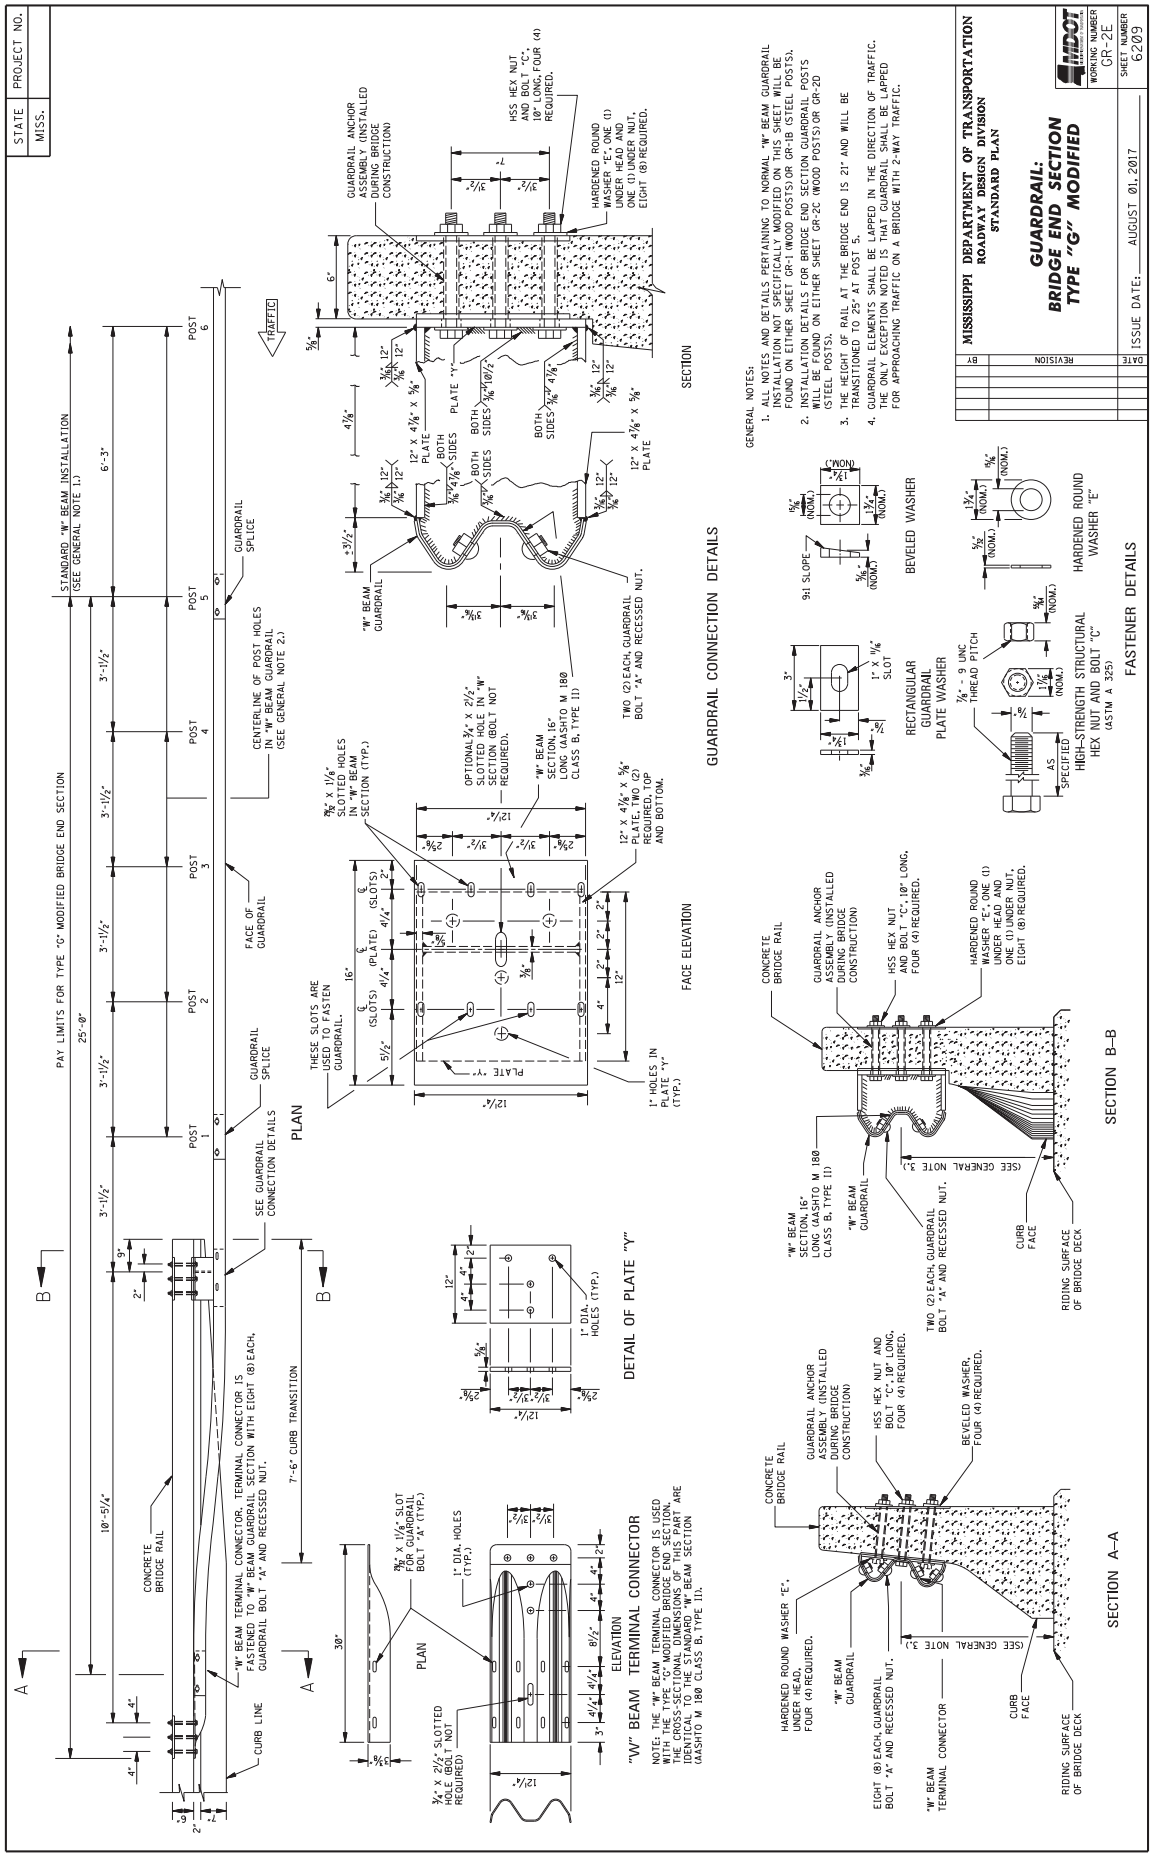

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
GUARDRAIL:
BRIDGE END SECTIONS
TYPE "A" & "C"
WORKING NUMBER GR-2
SHEET NUMBER 6204
ISSUE DATE: AUGUST 01, 2017
DATE REVISION BY
PLAN OF BRIDGE END SECTION
SECTION A–A
ELEVATION
TYPE "2" "W" BEAM END SECTION
TYPE "1" "W" BEAM END SECTION
DETAIL OF PLATE "B"
DETAIL OF PLATE "Z"
FASTENER DETAILS
GUARDRAIL CONNECTION DETAILS
TYPE "A" BRIDGE END SECTION
GUARDRAIL CONNECTION AT BRIDGE END
TYPE "C" BRIDGE END SECTION
SECTION B–B
SECTION C–C
GENERAL NOTES:
1. ALL NOTES AND DETAILS PERTAINING TO NORMAL "W" BEAM GUARDRAIL INSTALLATION NOT SPECIFICALLY MODIFIED ON THIS SHEET WILL BE FOUND ON EITHER SHEET GR-1 (WOOD POSTS) OR GR-1B (STEEL POSTS).
2. WOOD POSTS ARE SHOWN ON THIS SHEET. WHEN STEEL POSTS ARE INSTALLED, A SOIL BEARING PLATE IS PLACED ON THE STANDARD SIZE STEEL POST FOR POSTS 1 THRU 3 AND A RECTANGULAR GUARDRAIL PLATE WASHER IS PLACED UNDER THE STANDARD POST BOLT HEAD FOR POSTS 1 THRU 6. SEE DETAILS FOR STEEL POST INSTALLATIONS ON SHEET GR-1B.
3. FOR INFORMATION PERTAINING TO THE INSTALLATION OF THE TYPE "E" BRIDGE END SECTION, SEE SHEET GR-2A.
4. THE HEIGHT OF RAIL AT THE BRIDGE END IS 20⅞" AND WILL BE TRANSITIONED TO 25" AT POST 7.
5. ALL GUARDRAIL ELEMENTS SHALL BE LAPPED IN THE DIRECTION OF TRAFFIC.
6. POINT "a", WHICH IS AT THE CENTERLINE BETWEEN THE ANCHOR BOLTS, WILL BE CENTERED OVER THE CENTERLINE OF THE BRIDGE END WALL EXCEPT IN SKEWED BRIDGE ENDS WHERE THE BOLT NEAREST THE JOINT WILL BE A MINIMUM OF 3" FROM THE JOINT.

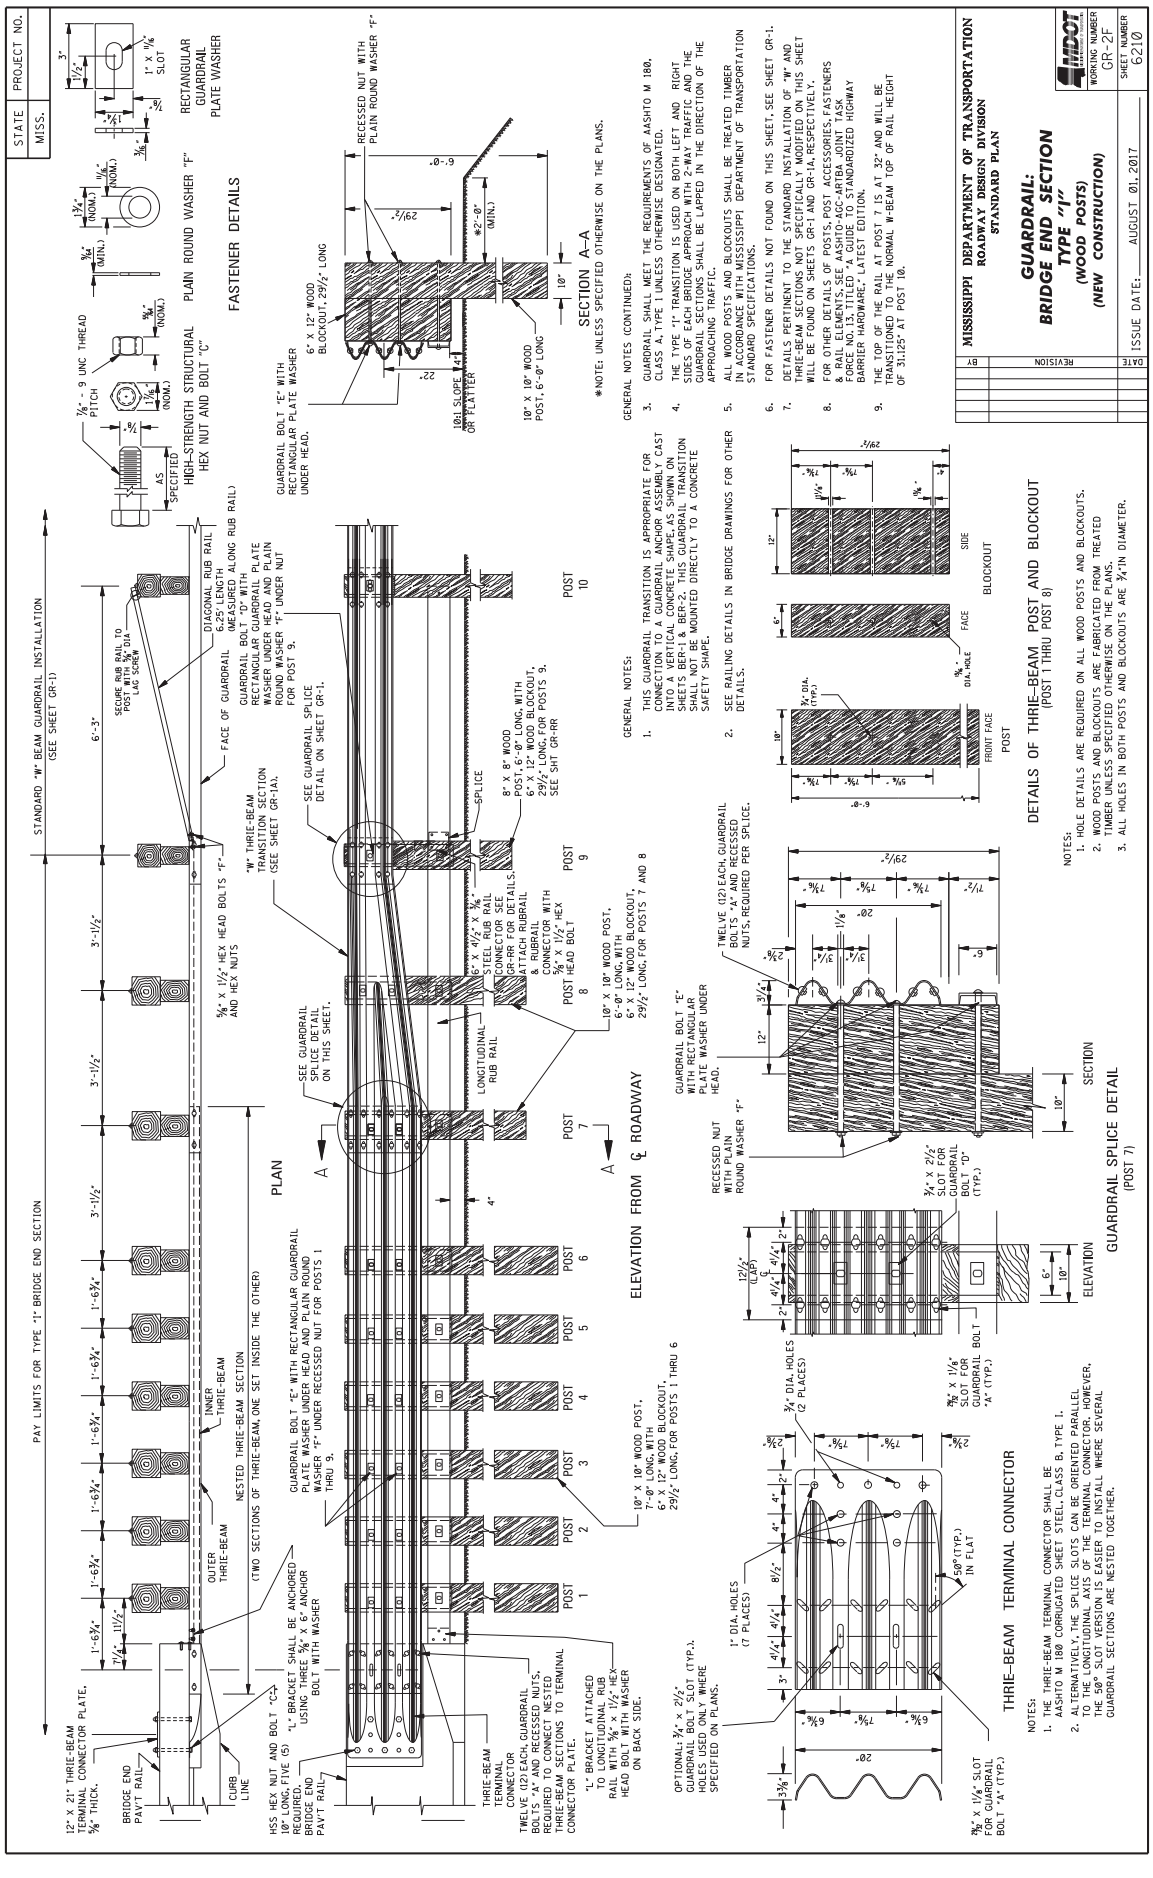

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
GUARDRAIL:
BRIDGE END SECTIONS
TYPE "E", "F" & "G"
WORKING NUMBER GR-2A
SHEET NUMBER 6205
ISSUE DATE: AUGUST 01, 2017
DATE REVISION BY
TYPE "E" BRIDGE END SECTION
TYPE "F" BRIDGE END SECTION
TYPE "G" BRIDGE END SECTION
DETAIL OF PLATE "P"
"W" BEAM TERMINAL CONNECTOR
FASTENER DETAILS
TYPE "F" & "G" BRIDGE END SECTIONS
SECTION A–A
SECTION B–B
SECTION C–C
SECTION D–D
SECTION E–E
SECTION F–F
SECTION G–G
PLAN
ELEVATION
NOTES:
GENERAL NOTES:
TERMINAL CONNECTION (SEE NOTE 2.)
BRIDGE RAIL (SEE NOTE 1.)
BRIDGE END
FACE OF "W" BEAM GUARDRAIL
TRAFFIC
CURB FACE
TOP OF CURB
RIDING SURFACE OF BRIDGE DECK
ANCHOR PLATE ASSEMBLY IN PLACE IN RAILING.
HSS HEX NUT AND BOLT "C" 8" LONG, FOUR (4) REQUIRED.
HARDENED ROUND WASHER "E", ONE (1) UNDER HEAD AND ONE (1) UNDER NUT, EIGHT (8) REQUIRED.
EIGHT (8) EACH, GUARDRAIL BOLT "A" AND RECESSED NUT.
"W" BEAM TERMINAL CONNECTOR
TYPE "1" "W" BEAM END SECTION
"W" BEAM TERMINAL CONNECTOR (TYPE "G" BES SHOWN)
STANDARD "W" BEAM INSTALLATION (SEE GENERAL NOTE 1.)
PAY LIMITS FOR BRIDGE END SECTION (APPLICABLE TO TYPE "E")
PAY LIMITS FOR BRIDGE END SECTION (APPLICABLE TO TYPES "F" & "G")
FACE OF GUARDRAIL
25'-0"
HARDENED ROUND WASHER "E"
RECTANGULAR GUARDRAIL PLATE WASHER
HIGH-STRENGTH STRUCTURAL HEX NUT AND BOLT "C" (ASTM A 325)
GALVANIZED STEEL 16d COMMON NAIL (TYP.) (DRIVE NAIL AT CENTER OF BLOCK AND POST AFTER BOLT IS INSTALLED.)
* NOTE: UNLESS OTHERWISE SPECIFIED ON THE PLANS.
"W" BEAM TERMINAL CONNECTOR
NOTE: THE "W" BEAM TERMINAL CONNECTOR IS USED WITH TYPE "F" & "G" BRIDGE END SECTIONS. THE CROSS-SECTIONAL DIMENSIONS OF THIS PART ARE IDENTICAL TO THE STANDARD "W" BEAM SECTION (AASHTO M 180 CLASS B, TYPE II).
1. BRIDGE RAILING MAY BE EITHER CONCRETE OR PIPE RAILING IN PLACE.
2. FOR BLOCKOUT ASSEMBLY, FASTENER AND PLATE DETAILS, SEE SHEET GR-2.
1. BRIDGE RAILING MAY BE EITHER CONCRETE OR PIPE RAILING IN PLACE.
2. FASTENER AND "W" BEAM TERMINAL CONNECTOR DETAILS ARE SHOWN BELOW.
1. FASTENER AND "W" BEAM TERMINAL CONNECTOR DETAILS ARE SHOWN BELOW.
1. ALL NOTES AND DETAILS PERTAINING TO NORMAL "W" BEAM GUARDRAIL INSTALLATION NOT SPECIFICALLY MODIFIED ON THIS SHEET WILL BE FOUND ON EITHER SHEET GR-1 (WOOD POSTS) OR GR-1B (STEEL POSTS).
2. WOOD POSTS ARE SHOWN ON THIS SHEET. WHEN STEEL POSTS ARE INSTALLED, A SOIL BEARING PLATE IS PLACED ON THE STANDARD SIZE STEEL POST FOR POSTS 1 THRU 3 IN THE TYPE "E" BES AND FOR POSTS 1 THRU 4 IN THE TYPES "F" & "G" BRIDGE END SECTIONS. A REGULAR GUARDRAIL PLATE WASHER IS PLACED UNDER THE STANDARD POST BOLT HEAD FOR POSTS 1 THRU 6 IN THE TYPE "E" BES AND FOR POSTS 1 THRU 7 IN THE TYPE "F" & "G" BES. SEE DETAILS FOR STEEL POST INSTALLATION ON SHEET GR-1B.
3. GUARDRAIL ELEMENTS SHALL BE LAPPED IN THE DIRECTION OF TRAFFIC. THE ONLY EXCEPTION NOTED IS THAT GUARDRAIL SHALL BE LAPPED FOR APPROACHING TRAFFIC ON A BRIDGE WITH 2-WAY TRAFFIC.
1. TYPE "E" BES (POSTS 1 THRU 3), TYPES "F" & "G" BES (POSTS 1 THRU 4), 10' X 10" WOOD POST, 6'-0" LONG, WITH 6" X 12" WOOD BLOCKOUT, 14" LONG, ATTACHED USING GUARDRAIL BOLT "E", WITH PLAIN ROUND WASHER "F" UNDER NUT AND RECTANGULAR GUARDRAIL PLATE WASHER UNDER HEAD.
2. TYPE "E" BES (POSTS 4 THRU 6), TYPES "F" & "G" BES (POSTS 5 THRU 7), 6" X 8" WOOD POST, 6'-0" LONG, WITH 6" X 12" WOOD BLOCKOUT, 14" LONG, ATTACHED USING GUARDRAIL BOLT "D", WITH PLAIN ROUND WASHER "F" UNDER NUT AND RECTANGULAR GUARDRAIL PLATE WASHER UNDER HEAD.

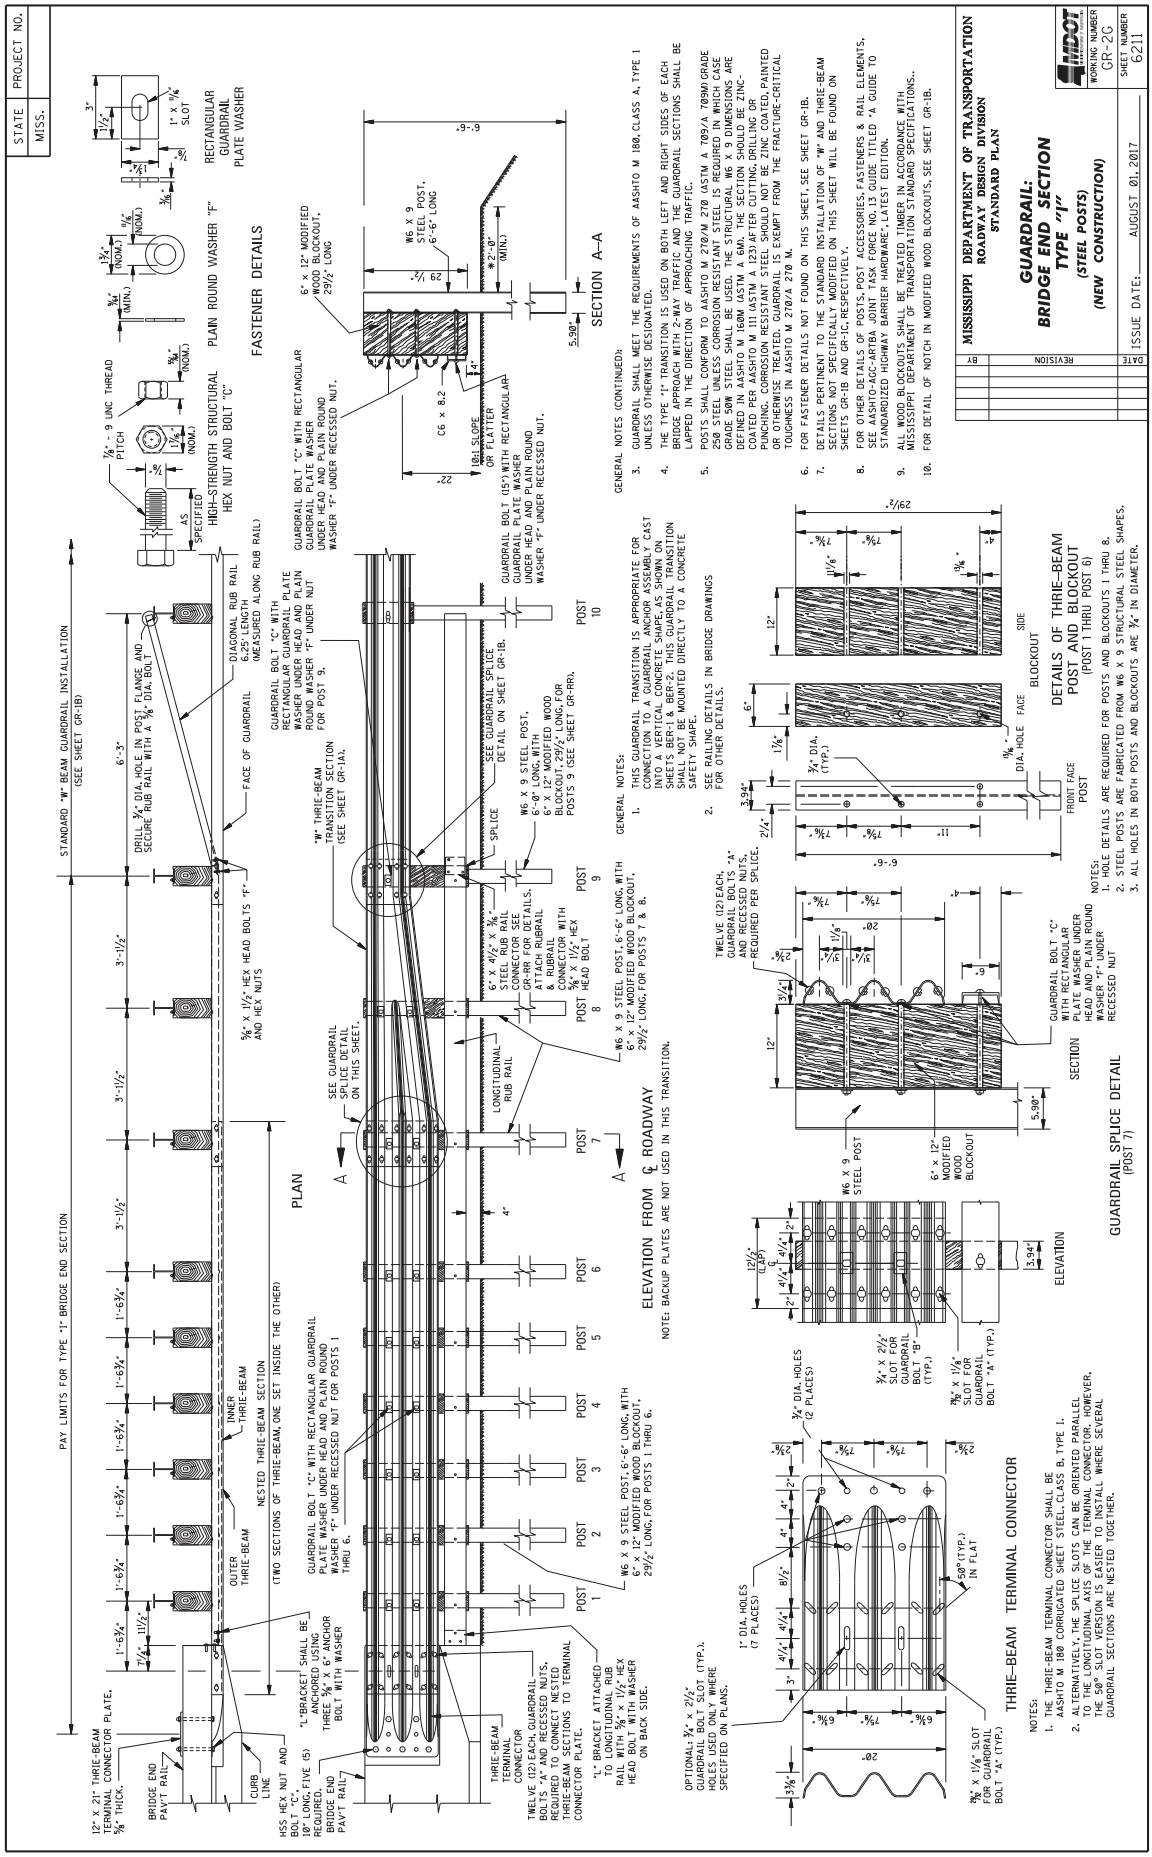

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
GUARDRAIL:
BRIDGE END SECTION
TYPE "D" MODIFIED
WORKING NUMBER GR-2B
SHEET NUMBER 6206
ISSUE DATE: AUGUST 01, 2017
REVISION
DATE
BY
PLAN
SECTION A–A
SECTION B–B
FASTENER DETAILS
HARDENED ROUND WASHER "E"
RECTANGULAR GUARDRAIL PLATE WASHER
HIGH-STRENGTH STRUCTURAL HEX NUT AND BOLT "C" (ASTM A 325)
GENERAL NOTES:
1. ALL NOTES AND DETAILS PERTAINING TO NORMAL "W" BEAM GUARDRAIL INSTALLATION NOT SPECIFICALLY MODIFIED ON THIS SHEET WILL BE FOUND ON EITHER SHEET GR-1C (WOOD POSTS) OR GR-1D (STEEL POSTS).
2. INSTALLATION DETAILS FOR BRIDGE END SECTION GUARDRAIL POSTS WILL BE FOUND ON EITHER SHEET GR-2C (WOOD POSTS) OR GR-2D (STEEL POSTS).
3. GUARDRAIL ELEMENTS SHALL BE LAPPED IN THE DIRECTION OF TRAFFIC. THE ONLY EXCEPTION NOTED IS THAT GUARDRAIL SHALL BE LAPPED FOR APPROACHING TRAFFIC ON A BRIDGE WITH 2-WAY TRAFFIC.
4. THE HEIGHT OF RAIL AT THE BRIDGE END IS 22" AND WILL BE TRANSITIONED TO 25" AT POST 5.
"W" BEAM TERMINAL CONNECTOR
"W" BEAM BACKUP PLATE
DETAIL OF PLATE "Y"
DETAIL OF PLATE "B"
DETAIL OF BRIDGE END TERMINAL OFFSET BLOCK

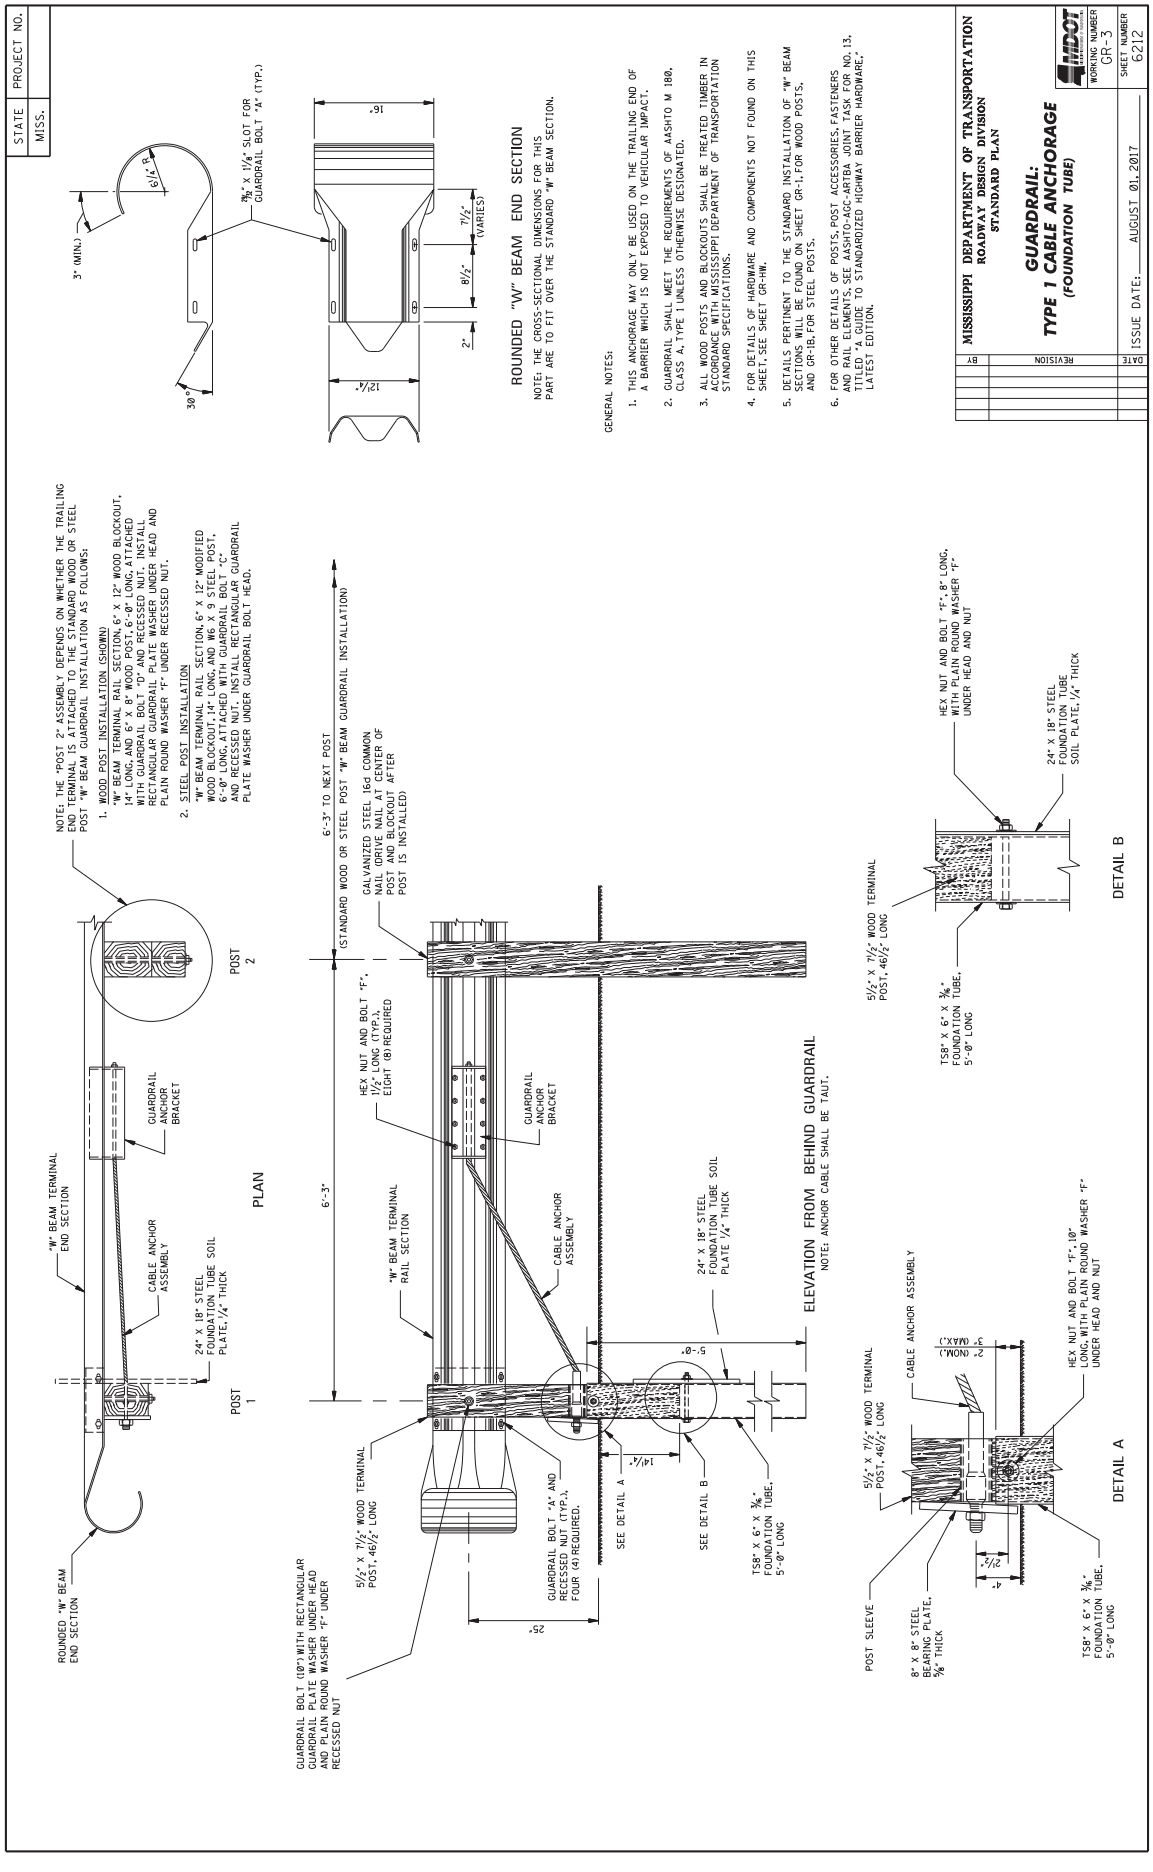

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
GUARDRAIL:
BRIDGE END SECTION
TYPE "H"
(WOOD POSTS)
WORKING NUMBER GR-2C
SHEET NUMBER 6207
ISSUE DATE: AUGUST 01, 2017
REVISION
DATE
BY
GENERAL NOTES:
1. ALL NOTES AND DETAILS PERTAINING TO NORMAL "W" BEAM GUARDRAIL INSTALLATION NOT SPECIFICALLY MODIFIED ON THIS SHEET WILL BE FOUND ON SHEET GR-1 (WOOD POSTS).
2. THE HEIGHT OF RAIL AT THE BRIDGE END IS 21" AND WILL BE TRANSITIONED TO 25" AT POST 5.
3. GUARDRAIL ELEMENTS SHALL BE LAPPED IN THE DIRECTION OF TRAFFIC. THE ONLY EXCEPTION NOTED IS THAT GUARDRAIL SHALL BE LAPPED FOR APPROACHING TRAFFIC ON A BRIDGE WITH 2-WAY TRAFFIC.
PLAN
SECTION A–A
SECTION B–B
"W" BEAM TERMINAL CONNECTOR
"W" BEAM BACKUP PLATE
FASTENER DETAILS
DETAIL OF BRIDGE END TERMINAL OFFSET BLOCK
TRAFFIC
PAY LIMITS FOR TYPE "H" BRIDGE END SECTION
STANDARD "W" BEAM INSTALLATION (SEE GENERAL NOTE 1.)
CONCRETE BRIDGE RAIL
BRIDGE END TERMINAL OFFSET BLOCK
BACKUP PLATE UNDER GUARDRAIL
GUARDRAIL SPLICE
FACE OF GUARDRAIL
CURB LINE
7'-6" CURB TRANSITION
POST 1
POST 2
POST 3
POST 4
POST 5
POST 6
25'-0"
3'-1½"
10'-5¼"
4"
9"
2¼"
30"
12"
6'
6'-3"
GUARDRAIL BOLT "E" WITH PLAIN ROUND WASHER "F" UNDER NUT AND RECTANGULAR GUARDRAIL PLATE WASHER UNDER HEAD FOR POSTS 1 THRU 3.
10" X 10" WOOD POST, 6'-0" LONG, WITH 6" X 12" WOOD BLOCKOUT, 14" LONG, FOR POSTS 1 THRU 3.
6" X 8" WOOD POST, 6'-0" LONG, WITH 6" X 12" WOOD BLOCKOUT, 14" LONG, FOR POSTS 4 AND 5.
GUARDRAIL BOLT "D" WITH PLAIN ROUND WASHER UNDER NUT AND RECTANGULAR GUARDRAIL PLATE WASHER UNDER HEAD FOR POSTS 4 AND 5.
"W" BEAM TERMINAL CONNECTOR, TERMINAL CONNECTOR IS FASTENED TO "W" BEAM GUARDRAIL SECTION WITH EIGHT (8) EACH, GUARDRAIL BOLT "A" AND RECESSED NUT.
HARDENED ROUND WASHER "E", UNDER HEAD, FOUR (4) REQUIRED.
"W" BEAM GUARDRAIL
"W" BEAM TERMINAL CONNECTOR
EIGHT (8) EACH, GUARDRAIL BOLT "A" AND RECESSED NUT.
GUARDRAIL ANCHOR ASSEMBLY "GA2" (INSTALLED DURING BRIDGE CONSTRUCTION)
HSS HEX NUT AND BOLT "C", 10" LONG, FOUR (4) REQUIRED.
BEVELED WASHER, FOUR (4) REQUIRED.
(SEE GENERAL NOTE 2.)
CURB FACE
RIDING SURFACE OF BRIDGE DECK
HARDENED ROUND WASHER "E", UNDER HEAD, TWO (2) REQUIRED.
"W" BEAM BACKUP PLATE
GUARDRAIL BOLT (2") AND RECESSED NUT WITH RECTANGULAR GUARDRAIL PLATE WASHER UNDER HEAD.
BRIDGE END TERMINAL OFFSET BLOCK
HSS HEX NUT AND BOLT "C", 10" LONG, TWO (2) REQUIRED.
BEVELED WASHER, TWO (2) REQUIRED.
NOTE: THE "W" BEAM BACK-UP PLATE IS USED UNDER THE "W" BEAM RAIL SECTION WHERE INDICATED ON THIS SHEET. CROSS-SECTIONAL DIMENSIONS OF THIS PART ARE IDENTICAL TO THOSE OF THE STANDARD "W" BEAM RAIL SECTION.
NOTE: THE "W" BEAM TERMINAL CONNECTOR IS USED WITH THE TYPE "H" BRIDGE END SECTION. THE CROSS-SECTIONAL DIMENSIONS OF THIS PART ARE IDENTICAL TO THE STANDARD "W" BEAM SECTION (AASHTO M 180 CLASS B, TYPE II).
HARDENED ROUND WASHER "E"
RECTANGULAR GUARDRAIL PLATE WASHER
BEVELED WASHER
HIGH-STRENGTH STRUCTURAL HEX NUT AND BOLT "C" (ASTM A 325)
FRONT FACE
SIDE

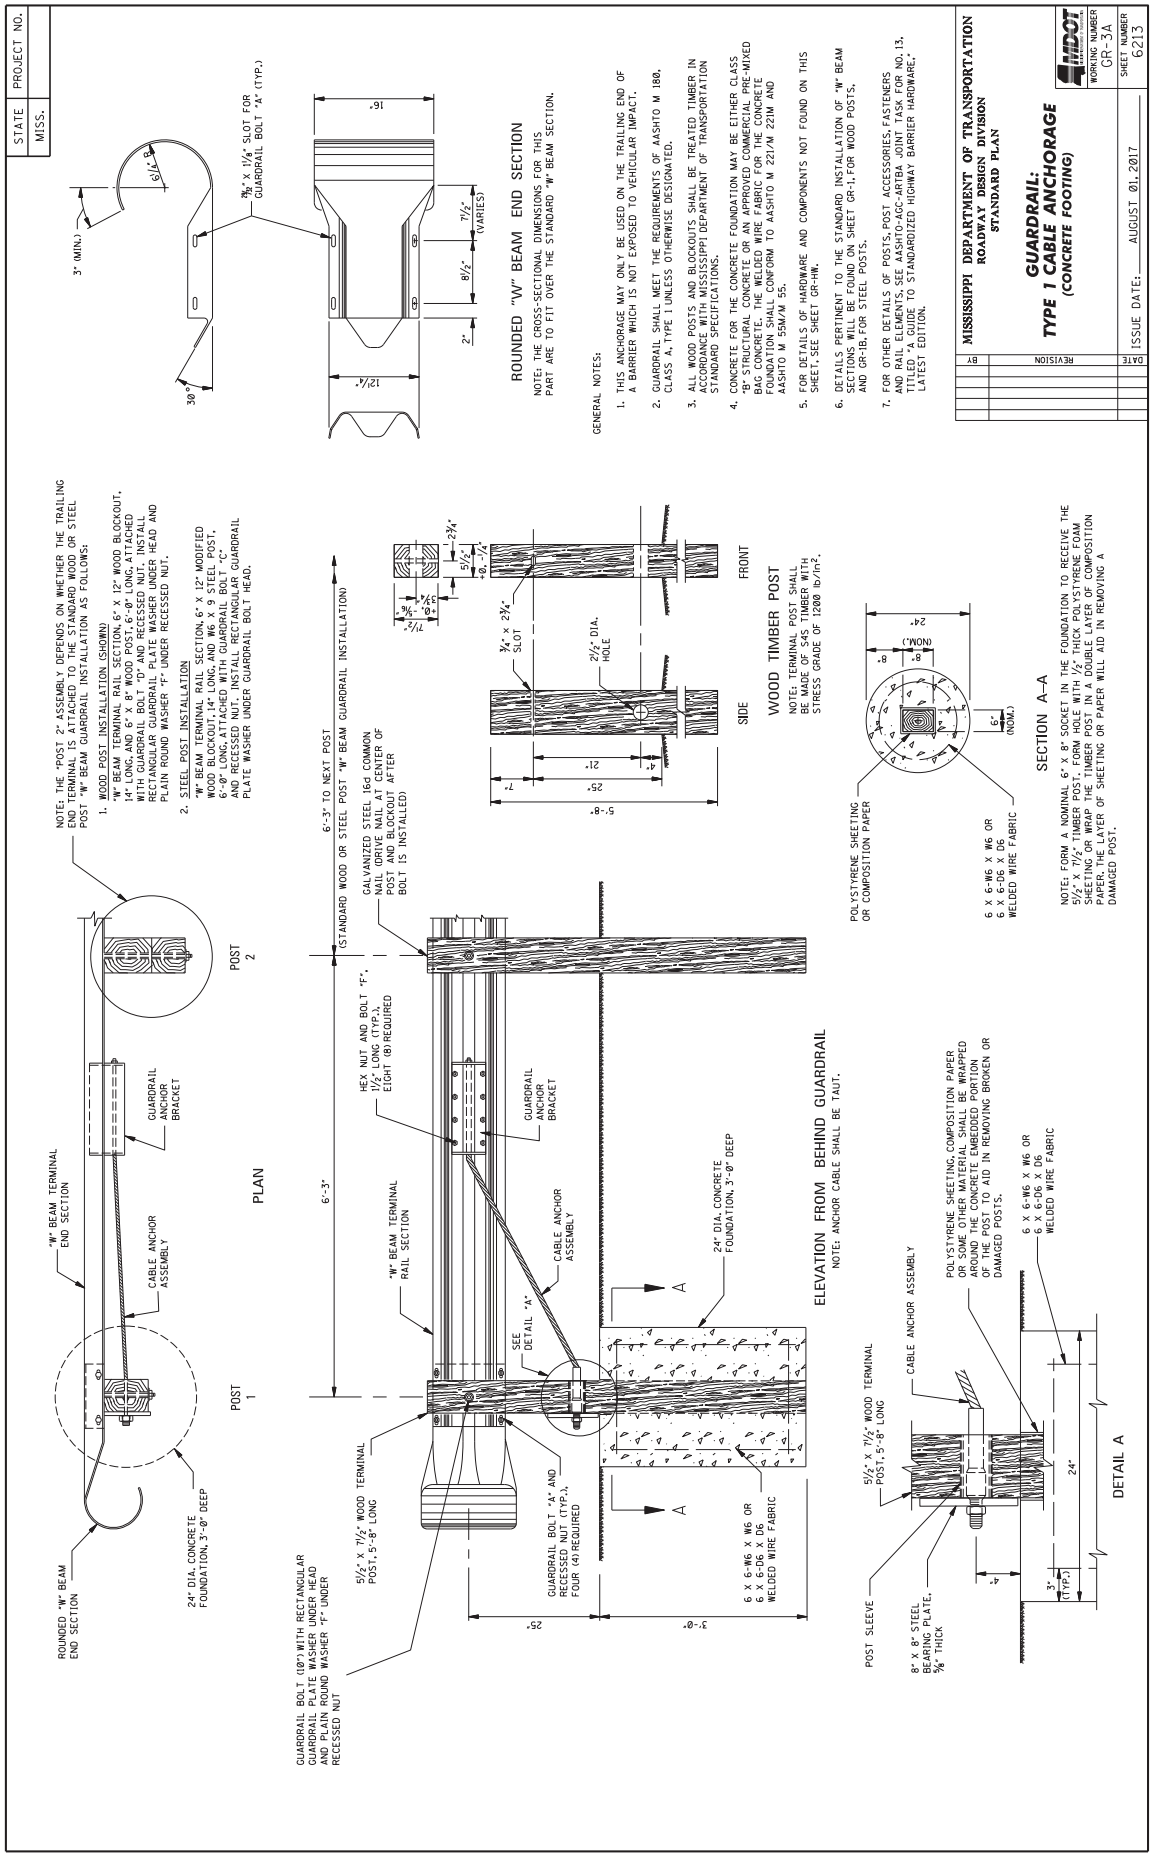

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
GUARDRAIL:
BRIDGE END SECTION
TYPE "H"
(STEEL POSTS)
WORKING NUMBER GR-2D
SHEET NUMBER 6208
ISSUE DATE: AUGUST 01, 2017
DATE REVISION BY
GENERAL NOTES:
1. ALL NOTES AND DETAILS PERTAINING TO NORMAL "W" BEAM GUARDRAIL INSTALLATION NOT SPECIFICALLY MODIFIED ON THIS SHEET WILL BE FOUND ON SHEET GR-1B (STEEL POSTS).
2. THE HEIGHT OF RAIL AT THE BRIDGE END IS 21" AND WILL BE TRANSITIONED TO 25" AT POST 5.
3. GUARDRAIL ELEMENTS SHALL BE LAPPED IN THE DIRECTION OF TRAFFIC. THE ONLY EXCEPTION NOTED IS THAT GUARDRAIL SHALL BE LAPPED FOR APPROACHING TRAFFIC ON A BRIDGE WITH 2-WAY TRAFFIC.
PLAN
SECTION A–A
SECTION B–B
"W" BEAM BACKUP PLATE
"W" BEAM TERMINAL CONNECTOR
FASTENER DETAILS
DETAIL OF BRIDGE END TERMINAL OFFSET BLOCK
TRAFFIC
CONCRETE BRIDGE RAIL
GUARDRAIL SPLICE
FACE OF GUARDRAIL
BRIDGE END TERMINAL OFFSET BLOCK
BACKUP PLATE UNDER GUARDRAIL
CURB LINE
7'-6" CURB TRANSITION
"W" BEAM TERMINAL CONNECTOR, TERMINAL CONNECTOR IS FASTENED TO "W" BEAM GUARDRAIL SECTION WITH EIGHT (8) EACH, GUARDRAIL BOLT "A" AND RECESSED NUT.
GUARDRAIL BOLT "C" WITH RECESSED NUT AND RECTANGULAR GUARDRAIL PLATE WASHER UNDER HEAD FOR POSTS 1 THRU 5.
24" X 12" STEEL SOIL BEARING PLATE, 1/4" THICK, WELDED TO POSTS 1 THRU 3, WELD TOP, BOTTOM, AND THREE 3" WELDS ON EACH SIDE.
W6 X 9 STEEL POST, 6'-0" LONG, WITH 6" X 12" MODIFIED WOOD BLOCKOUT, 14" LONG, FOR POSTS 1 THRU 5.
STANDARD "W" BEAM INSTALLATION (SEE GENERAL NOTE 1.)
PAY LIMITS FOR TYPE "H" BRIDGE END SECTION
25'-0"
POST 1
POST 2
POST 3
POST 4
POST 5
POST 6
3'-1½"
6'-3"
10'-5¼"
4'
9"
2¼"
CONCRETE BRIDGE RAIL
GUARDRAIL ANCHOR ASSEMBLY "GA1" (INSTALLED DURING BRIDGE CONSTRUCTION)
HSS HEX NUT AND BOLT "C", 10" LONG, TWO (2) REQUIRED.
BEVELED WASHER, TWO (2) REQUIRED.
HARDENED ROUND WASHER "E", UNDER HEAD, TWO (2) REQUIRED.
"W" BEAM BACKUP PLATE
"W" BEAM GUARDRAIL
GUARDRAIL BOLT (2") AND RECESSED NUT WITH RECTANGULAR GUARDRAIL PLATE WASHER UNDER HEAD.
BRIDGE END TERMINAL OFFSET BLOCK
CURB FACE
RIDING SURFACE OF BRIDGE DECK
(SEE GENERAL NOTE 2.)
GUARDRAIL ANCHOR ASSEMBLY "GA2" (INSTALLED DURING BRIDGE CONSTRUCTION)
HSS HEX NUT AND BOLT "C", 10" LONG, FOUR (4) REQUIRED.
BEVELED WASHER, FOUR (4) REQUIRED.
HARDENED ROUND WASHER "E", UNDER HEAD, FOUR (4) REQUIRED.
"W" BEAM TERMINAL CONNECTOR
EIGHT (8) EACH, GUARDRAIL BOLT "A" AND RECESSED NUT.
¾" X 2½" SLOT
12¼"
12"
6"
3¼"
30"
⅝" X 1¼" SLOT FOR GUARDRAIL BOLT "A" (TYP.)
1" DIA. HOLES (TYP.)
¾" X 2½" SLOTTED HOLE (BOLT NOT REQUIRED)
3"
4½"
8½"
4¼"
2"
¾" DIA. HOLES
1" DIA. HOLES
W4 X 13
13"
9"
6½"
1⅛"
⅝"
⅞" - 9 UNC THREAD PITCH
AS SPECIFIED
HIGH-STRENGTH STRUCTURAL HEX NUT AND BOLT "C" (ASTM A 325)
HARDENED ROUND WASHER "E"
RECTANGULAR GUARDRAIL PLATE WASHER
1" X 1⅛" SLOT
BEVELED WASHER
9:1 SLOPE
NOTE: THE "W" BEAM BACK-UP PLATE IS USED UNDER THE "W" BEAM RAIL SECTION WHERE INDICATED ON THIS SHEET. CROSS-SECTIONAL DIMENSIONS OF THIS PART ARE IDENTICAL TO THOSE OF THE STANDARD "W" BEAM RAIL SECTION.
NOTE: THE "W" BEAM TERMINAL CONNECTOR IS USED WITH THE TYPE "H" BRIDGE END SECTION. THE CROSS-SECTIONAL DIMENSIONS OF THIS PART ARE IDENTICAL TO THE STANDARD "W" BEAM SECTION (AASHTO M 180 CLASS B, TYPE II).
FRONT FACE SIDE

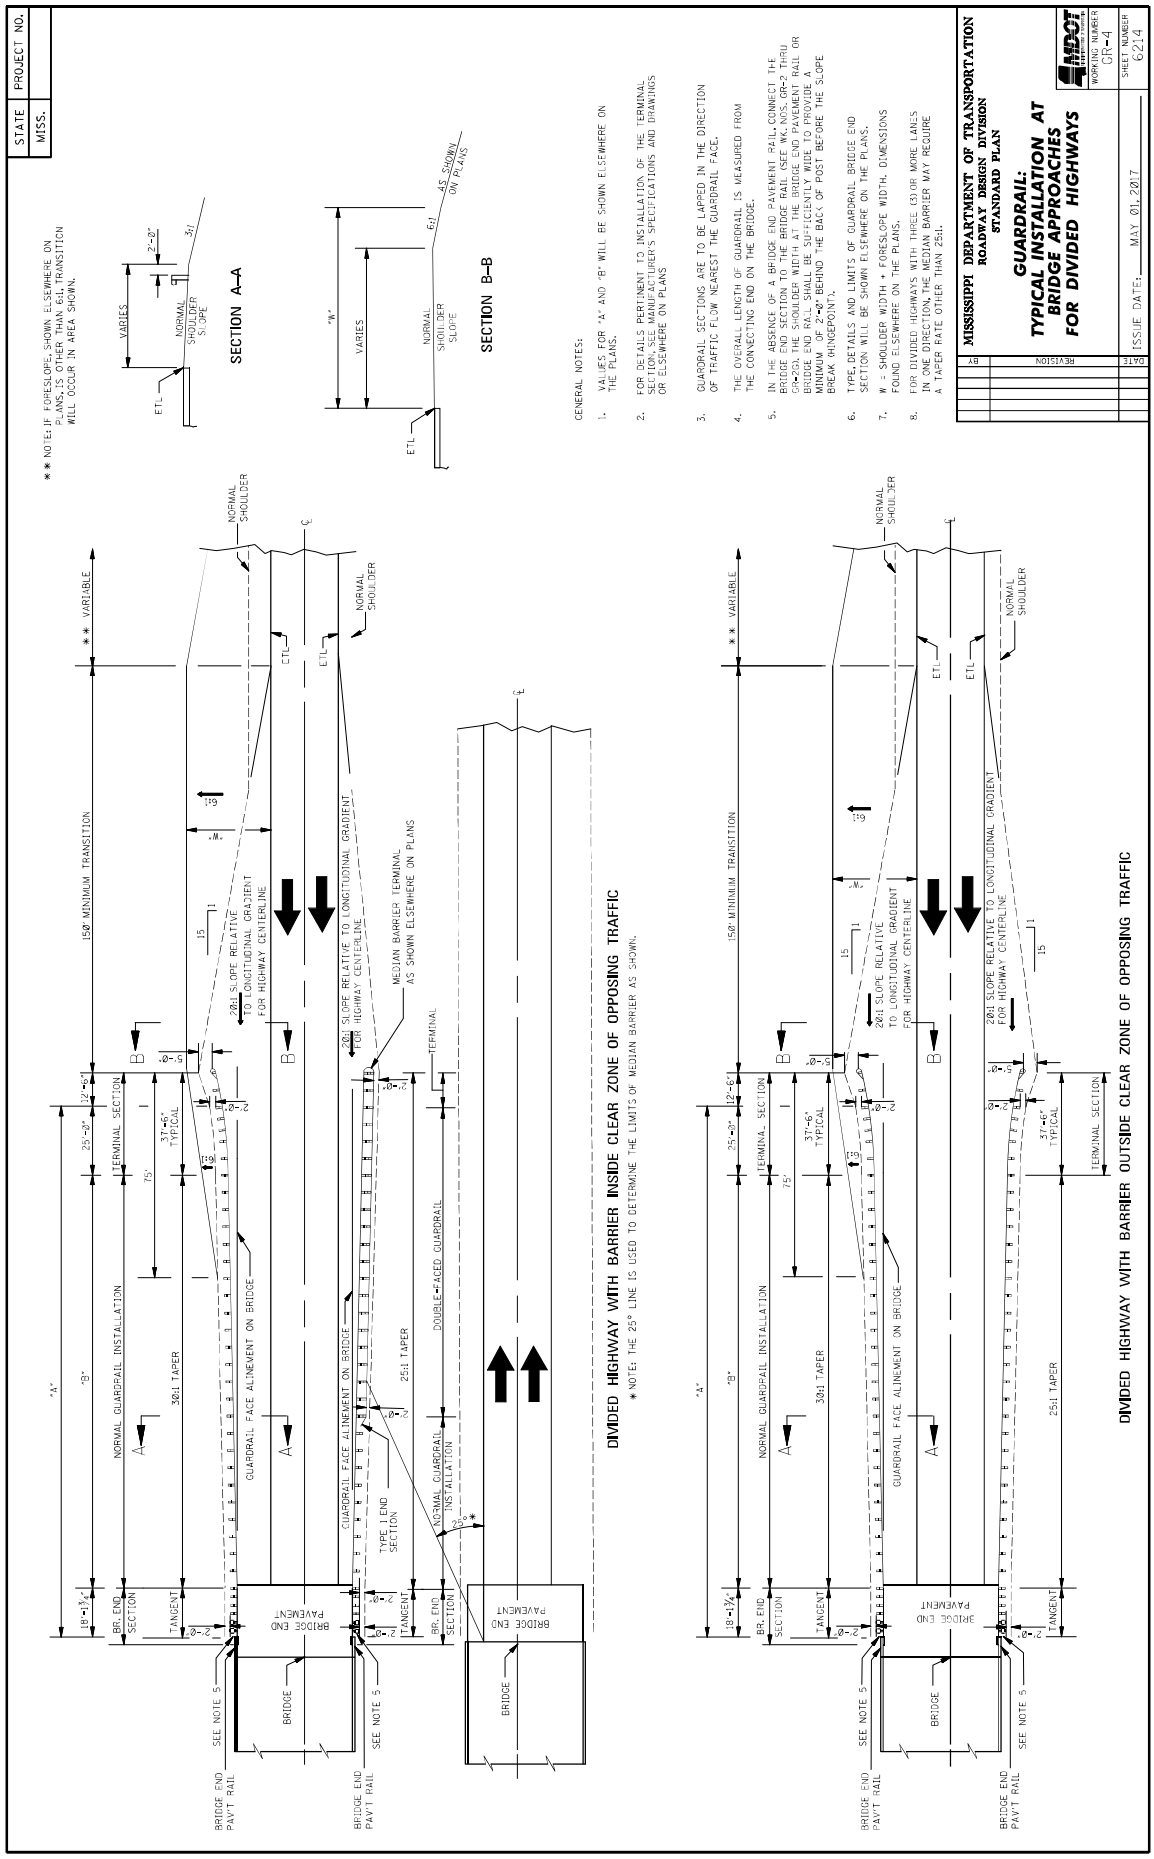

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
GUARDRAIL:
BRIDGE END SECTION
TYPE "G" MODIFIED
WORKING NUMBER GR-2E
SHEET NUMBER 6209
ISSUE DATE: AUGUST 01, 2017
BY REVISION DATE
GENERAL NOTES:
1. ALL NOTES AND DETAILS PERTAINING TO NORMAL "W" BEAM GUARDRAIL INSTALLATION NOT SPECIFICALLY MODIFIED ON THIS SHEET WILL BE FOUND ON EITHER SHEET GR-1 (WOOD POSTS) OR GR-1B (STEEL POSTS).
2. INSTALLATION DETAILS FOR BRIDGE END SECTION GUARDRAIL POSTS WILL BE FOUND ON EITHER SHEET GR-2C (WOOD POSTS) OR GR-2D (STEEL POSTS).
3. THE HEIGHT OF RAIL AT THE BRIDGE END IS 21" AND WILL BE TRANSITIONED TO 25" AT POST 5.
4. GUARDRAIL ELEMENTS SHALL BE LAPPED IN THE DIRECTION OF TRAFFIC. THE ONLY EXCEPTION NOTED IS THAT GUARDRAIL SHALL BE LAPPED FOR APPROACHING TRAFFIC ON A BRIDGE WITH 2-WAY TRAFFIC.
PLAN
PAY LIMITS FOR TYPE "G" MODIFIED BRIDGE END SECTION
STANDARD "W" BEAM INSTALLATION (SEE GENERAL NOTE 1.)
25'-0"
10'-5¼"
6'-3"
3'-1½"
POST 1
POST 2
POST 3
POST 4
POST 5
POST 6
GUARDRAIL SPLICE
CENTERLINE OF POST HOLES IN "W" BEAM GUARDRAIL (SEE GENERAL NOTE 2.)
FACE OF GUARDRAIL
SEE GUARDRAIL CONNECTION DETAILS
7'-6" CURB TRANSITION
CONCRETE BRIDGE RAIL
CURB LINE
"W" BEAM TERMINAL CONNECTOR, TERMINAL CONNECTOR IS FASTENED TO THE GUARDRAIL SECTION WITH EIGHT (8) EACH, GUARDRAIL BOLT "A" AND RECESSED NUT.
TRAFFIC
SECTION
GUARDRAIL ANCHOR ASSEMBLY (INSTALLED DURING BRIDGE CONSTRUCTION)
HSS HEX NUT AND BOLT "C", 10" LONG, FOUR (4) REQUIRED.
HARDENED ROUND WASHER "E", ONE (1) UNDER NUT, ONE (1) UNDER HEAD AND EIGHT (8) REQUIRED.
PLATE "Y"
12" X 4⅛" X ⅝" PLATE
BOTH SIDES
"W" BEAM GUARDRAIL
TWO (2) EACH, GUARDRAIL BOLT "A" AND RECESSED NUT.
GUARDRAIL CONNECTION DETAILS
⅝" X 1⅛" SLOTTED HOLES IN "W" BEAM SECTION (TYP.)
OPTIONAL ¾" X 2½" SLOTTED HOLE IN "W" SECTION (BOLT NOT REQUIRED).
"W" BEAM SECTION, 16' LONG (AASHTO M 180 CLASS B, TYPE II)
12" X 4⅛" X ⅝" PLATE, TWO (2) REQUIRED, TOP AND BOTTOM.
THESE SLOTS ARE USED TO FASTEN GUARDRAIL.
1" HOLES IN PLATE "Y" (TYP.)
FACE ELEVATION
9:1 SLOPE
BEVELED WASHER
RECTANGULAR GUARDRAIL PLATE WASHER
HARDENED ROUND WASHER "E"
¾" - 9 UNC THREAD PITCH
HIGH-STRENGTH STRUCTURAL HEX NUT AND BOLT "C" (ASTM A 325)
FASTENER DETAILS
DETAIL OF PLATE "Y"
1" DIA. HOLES (TYP.)
"W" BEAM TERMINAL CONNECTOR
NOTE: THE "W" BEAM TERMINAL CONNECTOR IS USED WITH THE TYPE "G" MODIFIED BRIDGE END SECTION. THE CROSS-SECTIONAL DIMENSIONS OF THIS PART ARE IDENTICAL TO THE STANDARD "W" BEAM SECTION (AASHTO M 180 CLASS B, TYPE II).
¾" X 2½" SLOTTED HOLE (BOLT NOT REQUIRED)
⅝" X 1⅛" SLOT FOR GUARDRAIL BOLT "A" (TYP.)
1" DIA. HOLES (TYP.)
ELEVATION
PLAN
SECTION A–A
SECTION B–B
HARDENED ROUND WASHER "E", UNDER HEAD, FOUR (4) REQUIRED.
"W" BEAM GUARDRAIL
EIGHT (8) EACH, GUARDRAIL BOLT "A" AND RECESSED NUT.
"W" BEAM TERMINAL CONNECTOR
CONCRETE BRIDGE RAIL
GUARDRAIL ANCHOR ASSEMBLY (INSTALLED DURING BRIDGE CONSTRUCTION)
HSS HEX NUT AND BOLT "C", 10" LONG, FOUR (4) REQUIRED.
BEVELED WASHER, FOUR (4) REQUIRED.
HARDENED ROUND WASHER "E", ONE (1) UNDER NUT, ONE (1) UNDER HEAD AND EIGHT (8) REQUIRED.
"W" BEAM SECTION, 16' LONG (AASHTO M 180 CLASS B, TYPE II)
TWO (2) EACH, GUARDRAIL BOLT "A" AND RECESSED NUT.
(SEE GENERAL NOTE 3.)
CURB FACE
RIDING SURFACE OF BRIDGE DECK

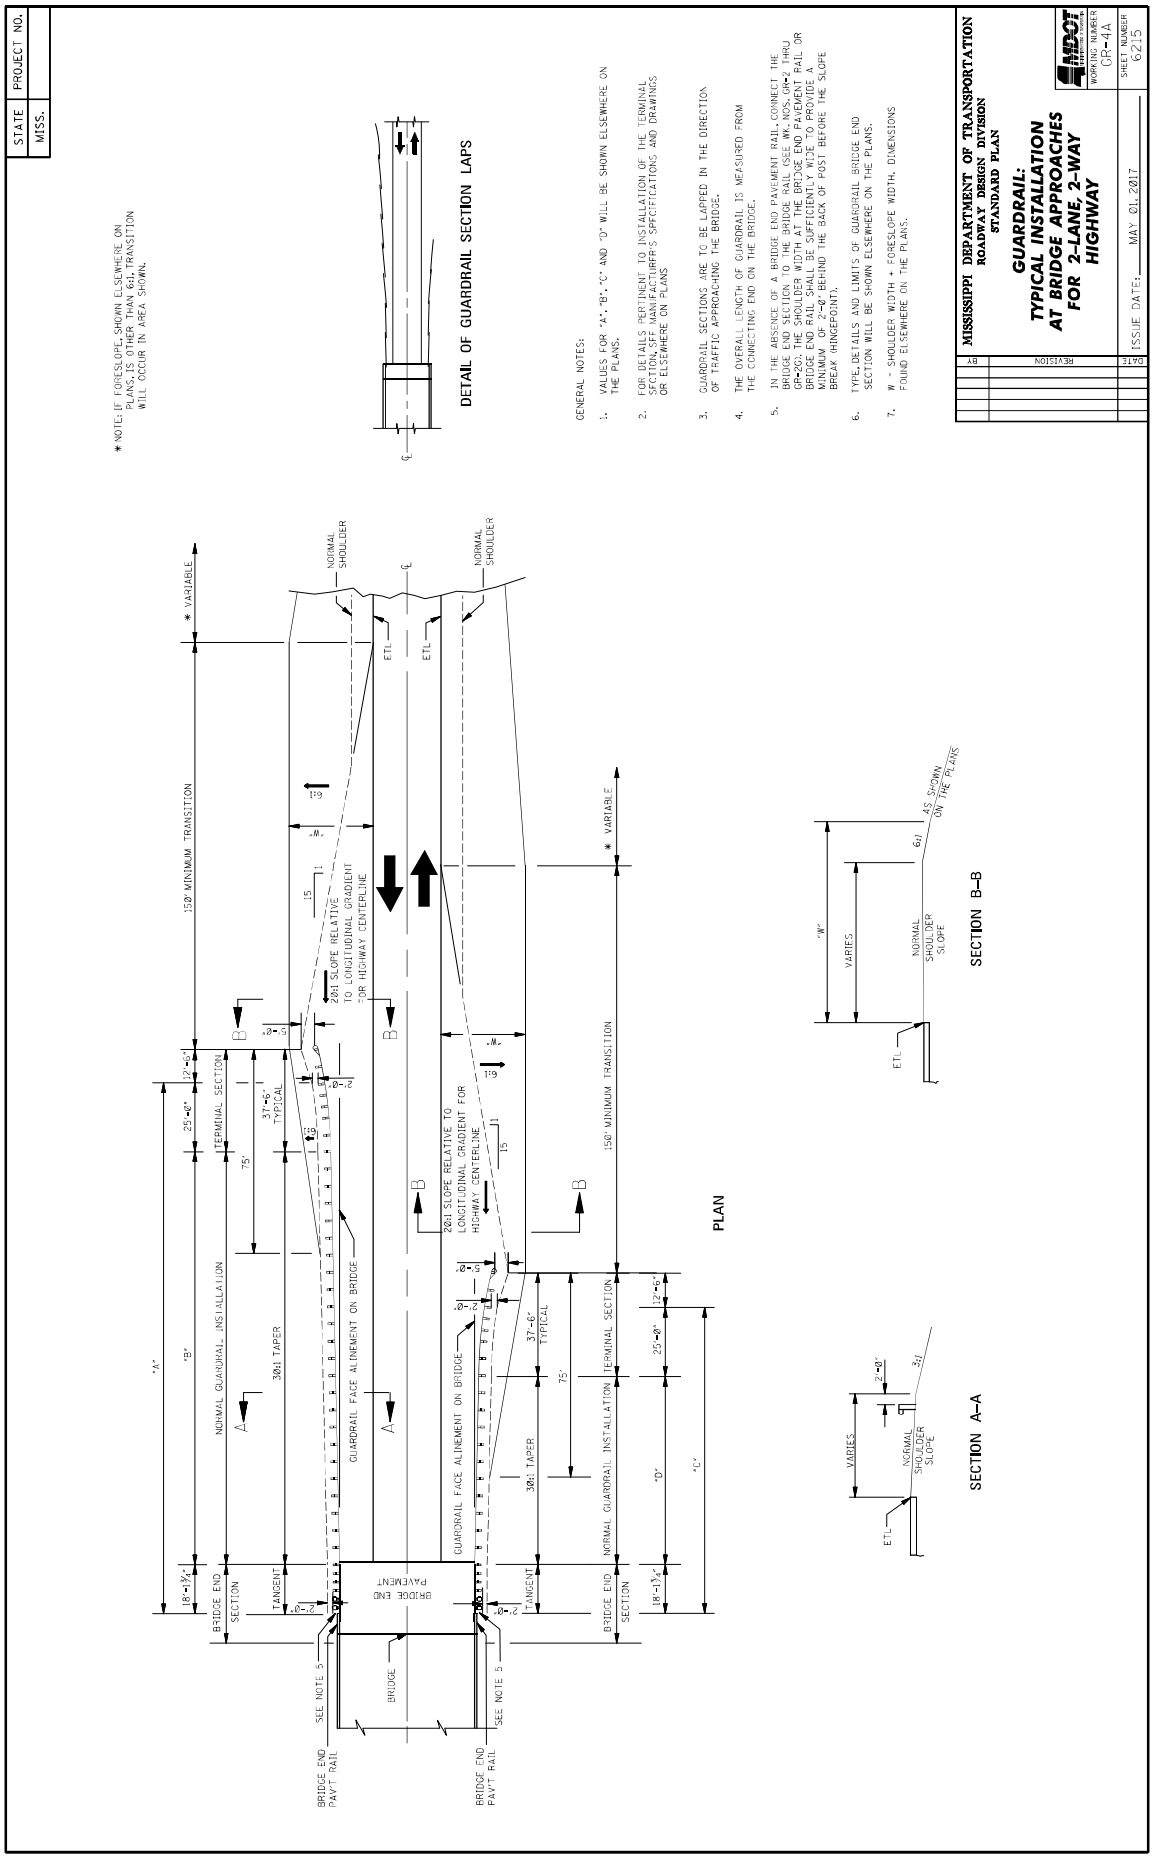

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
GUARDRAIL:
BRIDGE END SECTION
TYPE "I"
(WOOD POSTS)
(NEW CONSTRUCTION)
WORKING NUMBER GR-2F
SHEET NUMBER 6210
ISSUE DATE: AUGUST 01, 2017
REVISION
BY
DATE
STANDARD "W" BEAM GUARDRAIL INSTALLATION (SEE SHEET GR-1)
PAY LIMITS FOR TYPE "I" BRIDGE END SECTION
PLAN
ELEVATION FROM ℄ ROADWAY
SECTION A–A
*NOTE: UNLESS SPECIFIED OTHERWISE ON THE PLANS.
FASTENER DETAILS
HIGH-STRENGTH STRUCTURAL HEX NUT AND BOLT "C"
PLAIN ROUND WASHER "F"
RECTANGULAR GUARDRAIL PLATE WASHER
GENERAL NOTES (CONTINUED):
GENERAL NOTES:
DETAILS OF THRIE-BEAM POST AND BLOCKOUT
(POST 1 THRU POST 8)
THRIE-BEAM TERMINAL CONNECTOR
GUARDRAIL SPLICE DETAIL
(POST 7)
NOTES:
1. HOLE DETAILS ARE REQUIRED ON ALL WOOD POSTS AND BLOCKOUTS.
2. WOOD POSTS AND BLOCKOUTS ARE FABRICATED FROM TREATED TIMBER UNLESS SPECIFIED OTHERWISE ON THE PLANS.
3. ALL HOLES IN BOTH POSTS AND BLOCKOUTS ARE ¾"IN DIAMETER.

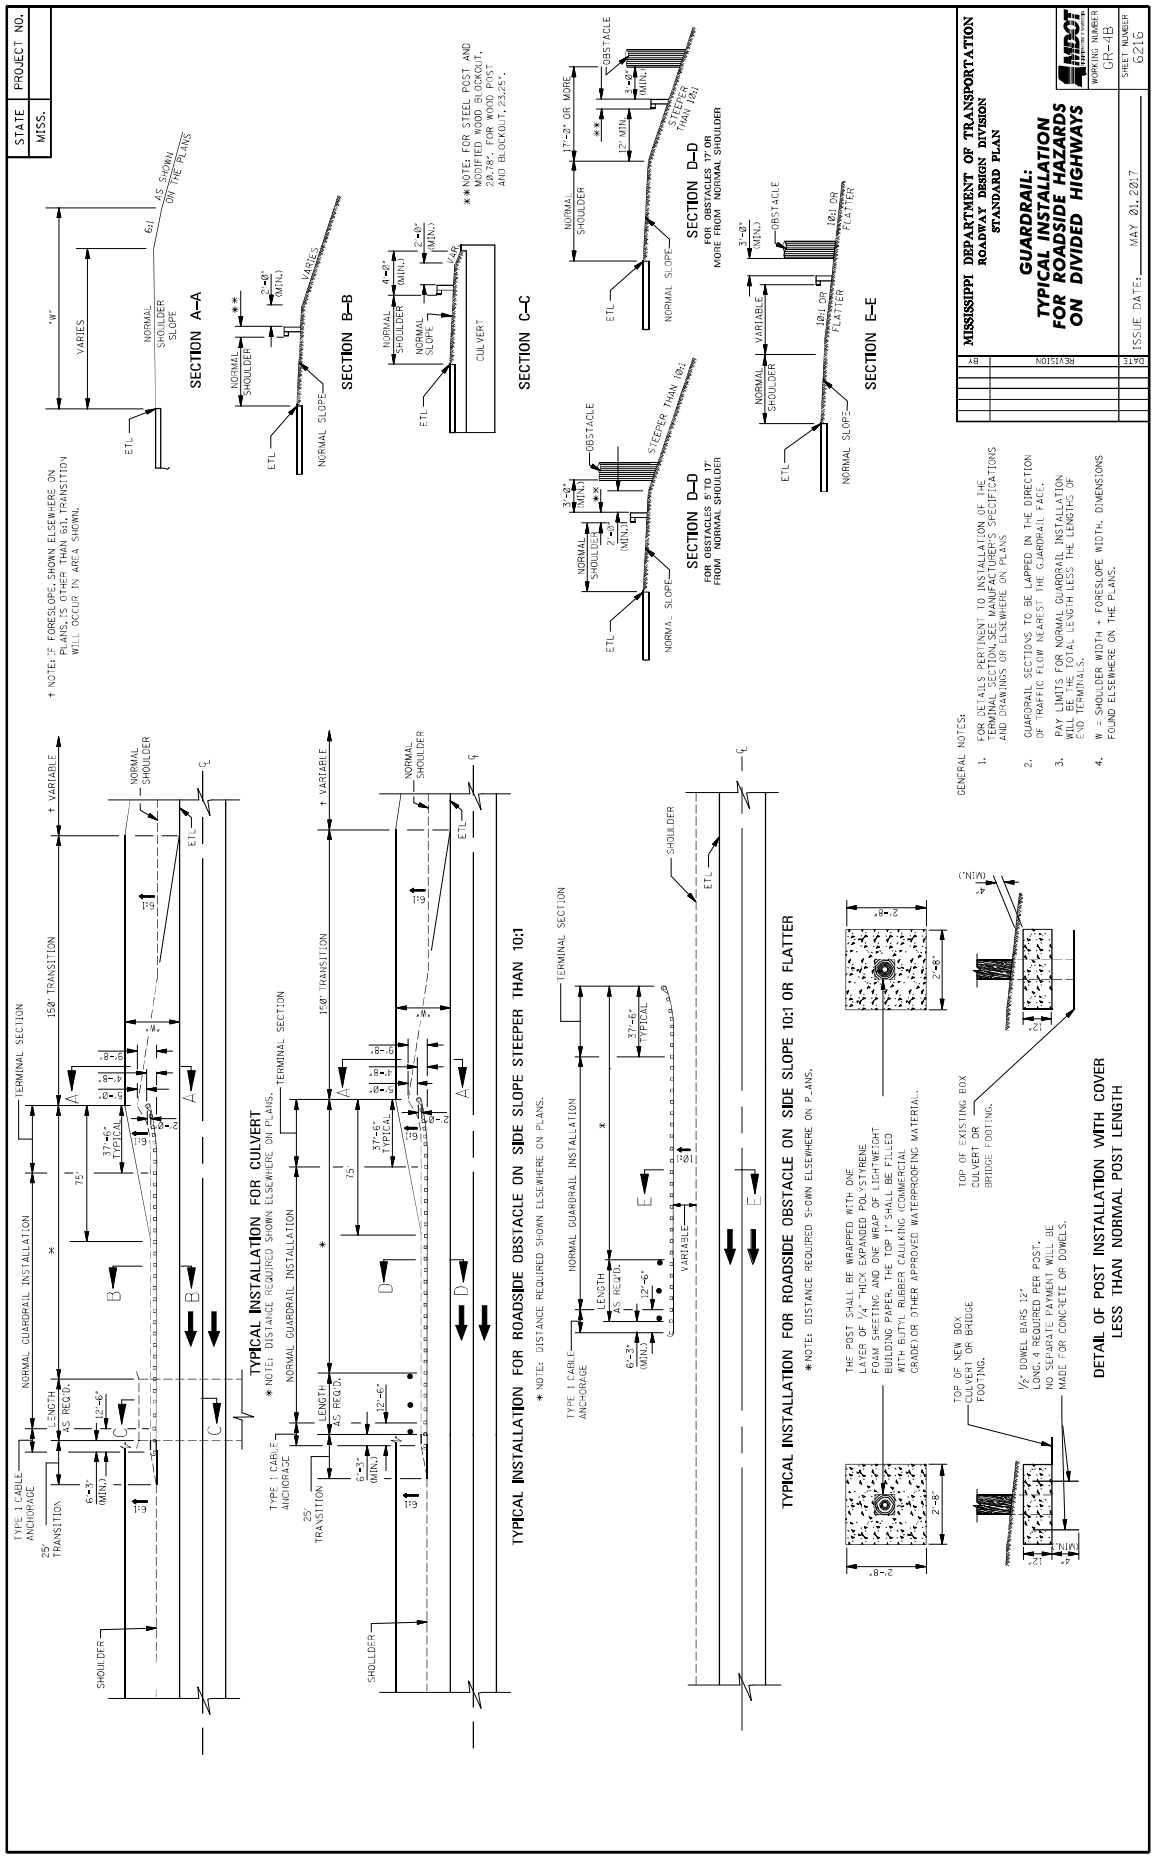

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
GUARDRAIL:
BRIDGE END SECTION
TYPE "1"
(STEEL POSTS)
(NEW CONSTRUCTION)
WORKING NUMBER GR-2G
SHEET NUMBER 6211
ISSUE DATE: AUGUST 01, 2017
DATE REVISION BY
PAY LIMITS FOR TYPE "1" BRIDGE END SECTION
STANDARD "W" BEAM GUARDRAIL INSTALLATION (SEE SHEET GR-1B)
PLAN
ELEVATION FROM ℄ ROADWAY
NOTE: BACKUP PLATES ARE NOT USED IN THIS TRANSITION.
FASTENER DETAILS
SECTION A–A
GUARDRAIL SPLICE DETAIL (POST 7)
THRIE-BEAM TERMINAL CONNECTOR
DETAILS OF THRIE-BEAM POST AND BLOCKOUT (POST 1 THRU POST 6)
GENERAL NOTES (CONTINUED):
GENERAL NOTES:

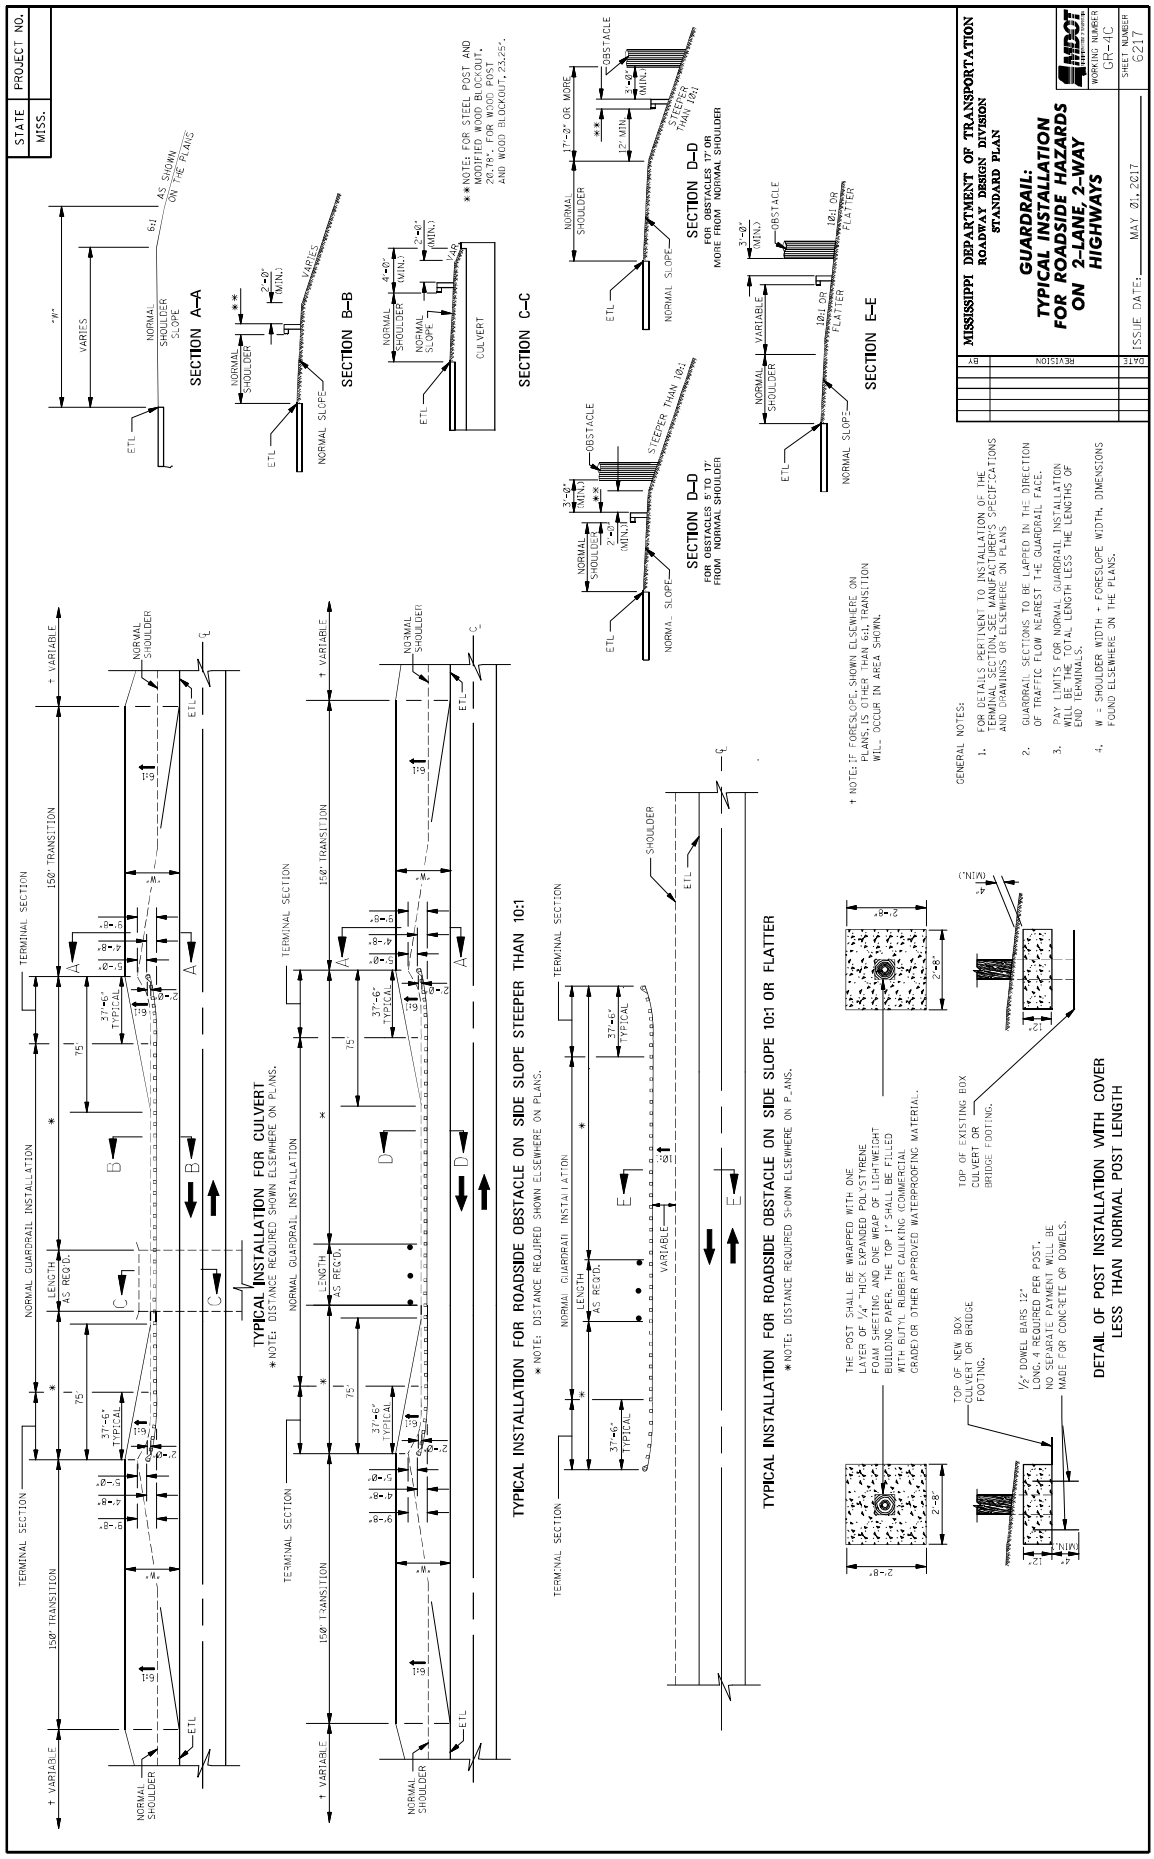

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
GUARDRAIL:
TYPE 1 CABLE ANCHORAGE
(FOUNDATION TUBE)
WORKING NUMBER GR-3
SHEET NUMBER 6212
ISSUE DATE: AUGUST 01, 2017
DATE REVISION BY
GENERAL NOTES:
1. THIS ANCHORAGE MAY ONLY BE USED ON THE TRAILING END OF A BARRIER WHICH IS NOT EXPOSED TO VEHICULAR IMPACT.
2. GUARDRAIL SHALL MEET THE REQUIREMENTS OF AASHTO M 180, CLASS A, TYPE 1 UNLESS OTHERWISE DESIGNATED.
3. ALL WOOD POSTS AND BLOCKOUTS SHALL BE TREATED TIMBER IN ACCORDANCE WITH MISSISSIPPI DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS.
4. FOR DETAILS OF HARDWARE AND COMPONENTS NOT FOUND ON THIS SHEET, SEE SHEET GR-HW.
5. DETAILS PERTINENT TO THE STANDARD INSTALLATION OF "W" BEAM SECTIONS WILL BE FOUND ON SHEET GR-1, FOR WOOD POSTS, AND GR-1B, FOR STEEL POSTS.
6. FOR OTHER DETAILS OF POSTS, POST ACCESSORIES, FASTENERS AND RAIL ELEMENTS, SEE AASHTO-AGC-ARTBA JOINT TASK FOR NO. 13, TITLED "A GUIDE TO STANDARDIZED HIGHWAY BARRIER HARDWARE," LATEST EDITION.
ROUNDED "W" BEAM END SECTION
NOTE: THE CROSS-SECTIONAL DIMENSIONS FOR THIS PART ARE TO FIT OVER THE STANDARD "W" BEAM SECTION.
3" (MIN.)
6 1/4" R
30°
7/8" X 1 1/4" SLOT FOR GUARDRAIL BOLT "A" (TYP.)
12 1/4"
16"
8 1/2"
7 1/2" (VARIES)
2"
NOTE: THE "POST 2" ASSEMBLY DEPENDS ON WHETHER THE TRAILING END TERMINAL IS ATTACHED TO THE STANDARD WOOD OR STEEL POST "W" BEAM GUARDRAIL INSTALLATION AS FOLLOWS:
1. WOOD POST INSTALLATION (SHOWN)
"W" BEAM TERMINAL RAIL SECTION, 6" X 12" WOOD BLOCKOUT, 14" LONG, AND 6" X 8" WOOD POST, 6'-0" LONG, ATTACHED WITH GUARDRAIL BOLT "D" AND RECESSED NUT. INSTALL RECTANGULAR GUARDRAIL PLATE WASHER UNDER HEAD AND PLAIN ROUND WASHER "F" UNDER RECESSED NUT.
2. STEEL POST INSTALLATION
"W" BEAM TERMINAL RAIL SECTION, 6" X 12" MODIFIED WOOD BLOCKOUT, 14" LONG, AND W6 X 9 STEEL POST, 6'-0" LONG, ATTACHED WITH GUARDRAIL BOLT "C" AND RECESSED NUT. INSTALL RECTANGULAR GUARDRAIL PLATE WASHER UNDER GUARDRAIL BOLT HEAD.
"W" BEAM TERMINAL END SECTION
CABLE ANCHOR ASSEMBLY
GUARDRAIL ANCHOR BRACKET
24" X 18" STEEL FOUNDATION TUBE SOIL PLATE, 1/4" THICK
POST 1
POST 2
PLAN
6'-3" TO NEXT POST (STANDARD WOOD OR STEEL POST "W" BEAM GUARDRAIL INSTALLATION)
GALVANIZED STEEL 16d COMMON NAIL (DRIVE NAIL AT CENTER OF POST AND BLOCKOUT AFTER POST IS INSTALLED)
HEX NUT AND BOLT "F", 1" LONG (TYP.), EIGHT (8) REQUIRED
6'-3"
"W" BEAM TERMINAL RAIL SECTION
CABLE ANCHOR ASSEMBLY
5 1/2" X 7 1/2" WOOD TERMINAL POST, 46 1/2" LONG
GUARDRAIL BOLT "A" AND RECESSED NUT (TYP.), FOUR (4) REQUIRED.
SEE DETAIL A
SEE DETAIL B
TS8" X 6" X 3/16" FOUNDATION TUBE, 5'-0" LONG
14 1/4"
25"
5'-0"
ELEVATION FROM BEHIND GUARDRAIL
NOTE: ANCHOR CABLE SHALL BE TAUT.
GUARDRAIL BOLT (10") WITH RECTANGULAR GUARDRAIL PLATE WASHER UNDER HEAD AND PLAIN ROUND WASHER "F" UNDER RECESSED NUT
ROUNDED "W" BEAM END SECTION
HEX NUT AND BOLT "F", 8" LONG, WITH PLAIN ROUND WASHER "F" UNDER HEAD AND NUT
24" X 18" STEEL FOUNDATION TUBE SOIL PLATE, 1/4" THICK
5 1/2" X 7 1/2" WOOD TERMINAL POST, 46 1/2" LONG
TS8" X 6' X 3/16" FOUNDATION TUBE, 5'-0" LONG
DETAIL B
POST SLEEVE
8" X 8" STEEL BEARING PLATE, 3/8" THICK
TS8" X 6" X 3/16" FOUNDATION TUBE, 5'-0" LONG
5 1/2" X 7 1/2" WOOD TERMINAL POST, 46 1/2" LONG
CABLE ANCHOR ASSEMBLY
2" (NOM.) 3" (MAX.)
HEX NUT AND BOLT "F", 10" LONG, WITH PLAIN ROUND WASHER "F" UNDER HEAD AND NUT
2 1/2"
4"
DETAIL A

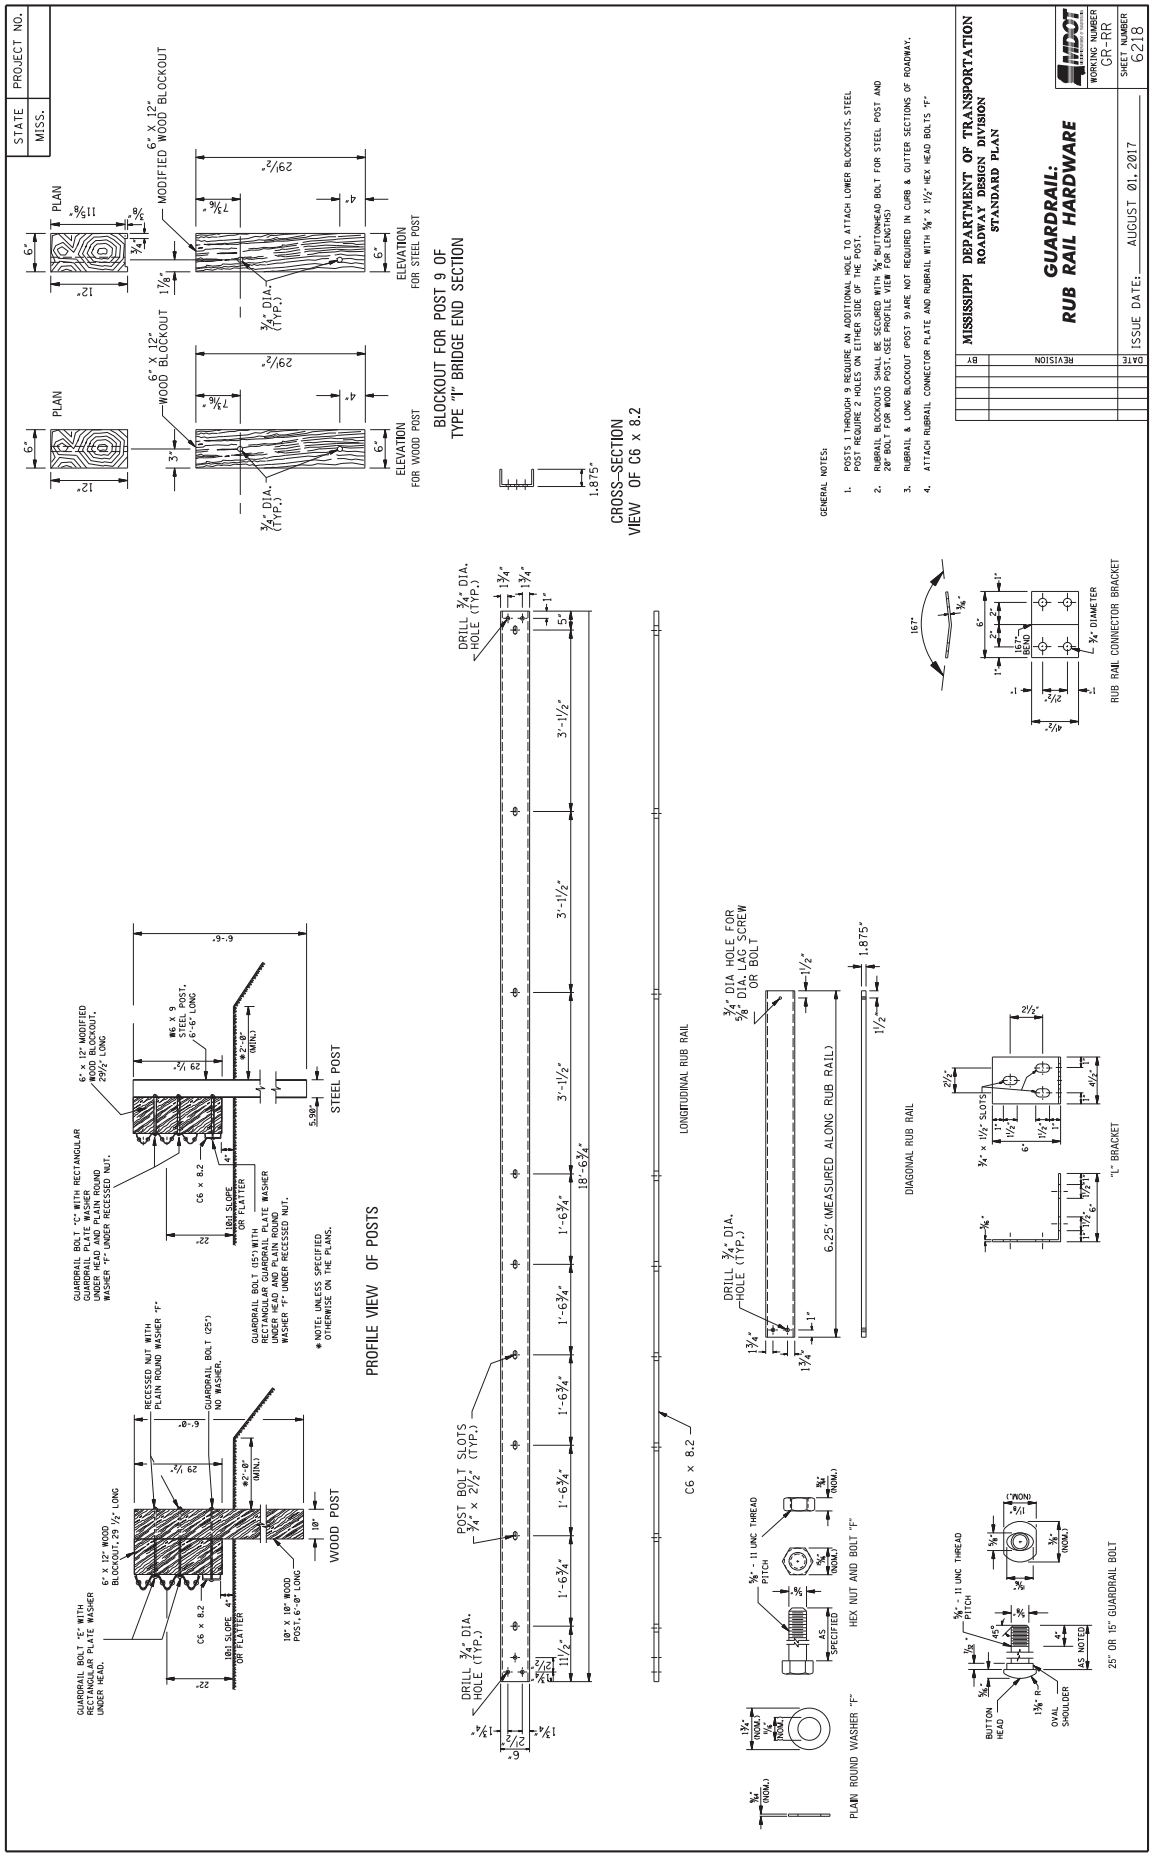

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
GUARDRAIL:
TYPE 1 CABLE ANCHORAGE
(CONCRETE FOOTING)
WORKING NUMBER GR-3A
SHEET NUMBER 6213
ISSUE DATE: AUGUST 01, 2017
DATE REVISION BY
ROUNDED "W" BEAM END SECTION
NOTE: THE CROSS-SECTIONAL DIMENSIONS FOR THIS PART ARE TO FIT OVER THE STANDARD "W" BEAM SECTION.
GENERAL NOTES:
1. THIS ANCHORAGE MAY ONLY BE USED ON THE TRAILING END OF A BARRIER WHICH IS NOT EXPOSED TO VEHICULAR IMPACT.
2. GUARDRAIL SHALL MEET THE REQUIREMENTS OF AASHTO M 180, CLASS A, TYPE I UNLESS OTHERWISE DESIGNATED.
3. ALL WOOD POSTS AND BLOCKOUTS SHALL BE TREATED TIMBER IN ACCORDANCE WITH MISSISSIPPI DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS.
4. CONCRETE FOR THE CONCRETE FOUNDATION MAY BE EITHER CLASS "B" STRUCTURAL CONCRETE OR AN APPROVED COMMERCIAL PRE-MIXED BAG CONCRETE. THE WELDED WIRE FABRIC FOR THE CONCRETE FOUNDATION SHALL CONFORM TO AASHTO M 221/M 221M AND AASHTO M 55M/M 55.
5. FOR DETAILS OF HARDWARE AND COMPONENTS NOT FOUND ON THIS SHEET, SEE SHEET GR-HW.
6. DETAILS PERTINENT TO THE STANDARD INSTALLATION OF "W" BEAM SECTIONS WILL BE FOUND ON SHEET GR-1, FOR WOOD POSTS, AND GR-1B, FOR STEEL POSTS.
7. FOR OTHER DETAILS OF POSTS, POST ACCESSORIES, FASTENERS AND RAIL ELEMENTS, SEE AASHTO-AGC-ARTBA JOINT TASK FOR NO. 13, TITLED "A GUIDE TO STANDARDIZED HIGHWAY BARRIER HARDWARE," LATEST EDITION.
NOTE: THE "POST 2" ASSEMBLY DEPENDS ON WHETHER THE TRAILING END TERMINAL IS ATTACHED TO THE STANDARD WOOD OR STEEL POST "W" BEAM GUARDRAIL INSTALLATION AS FOLLOWS:
1. WOOD POST INSTALLATION (SHOWN)
"W" BEAM TERMINAL RAIL SECTION, 6' X 12" WOOD BLOCKOUT, 14" LONG, AND 6' X 8" WOOD POST, 6'-0" LONG, ATTACHED WITH GUARDRAIL BOLT "D" AND RECESSED NUT. INSTALL RECTANGULAR GUARDRAIL PLATE WASHER UNDER HEAD AND PLAIN ROUND WASHER "F" UNDER RECESSED NUT.
2. STEEL POST INSTALLATION
"W" BEAM TERMINAL RAIL SECTION, 6' X 12" MODIFIED WOOD BLOCKOUT, 14" LONG, AND W6 X 9 STEEL POST, 6'-6" LONG ATTACHED WITH GUARDRAIL BOLT "C" AND RECESSED NUT. INSTALL RECTANGULAR GUARDRAIL PLATE WASHER UNDER GUARDRAIL BOLT HEAD.
PLAN
SIDE
FRONT
WOOD TIMBER POST
NOTE: TERMINAL POST SHALL BE MADE OF S4S TIMBER WITH STRESS GRADE OF 1200 lb/in².
ELEVATION FROM BEHIND GUARDRAIL
NOTE: ANCHOR CABLE SHALL BE TAUT.
SECTION A–A
NOTE: FORM A NOMINAL 6" X 8" SOCKET IN THE FOUNDATION TO RECEIVE THE 5½" X 7½" TIMBER POST. FORM HOLE WITH 6" ø POLYSTYRENE FOAM SHEETING OR WRAP THE TIMBER POST IN A DOUBLE LAYER OF COMPOSITION PAPER. THE LAYER OF SHEETING OR PAPER WILL AID IN REMOVING A DAMAGED POST.
DETAIL A
NOTE: ANCHOR CABLE SHALL BE TAUT.
"W" BEAM TERMINAL END SECTION
CABLE ANCHOR ASSEMBLY
GUARDRAIL ANCHOR BRACKET
24" DIA. CONCRETE FOUNDATION, 3'-0" DEEP
ROUNDED "W" BEAM END SECTION
GUARDRAIL BOLT (10") WITH RECTANGULAR GUARDRAIL PLATE WASHER UNDER HEAD AND PLAIN ROUND WASHER "F" UNDER RECESSED NUT
POST 1
POST 2
6'-3"
6'-3" TO NEXT POST
(STANDARD WOOD OR STEEL POST "W" BEAM GUARDRAIL INSTALLATION)
"W" BEAM TERMINAL RAIL SECTION
HEX NUT AND BOLT "F", 1½" LONG (TYP.), EIGHT (8) REQUIRED
GALVANIZED STEEL 16d COMMON NAIL (DRIVE NAIL AT CENTER OF POST AND BLOCKOUT AFTER BOLT IS INSTALLED)
SEE DETAIL "A"
CABLE ANCHOR ASSEMBLY
5½" X 7½" WOOD TERMINAL POST, 5'-8" LONG
GUARDRAIL BOLT (TYP.), AND RECESSED NUT FOUR (4) REQUIRED
6 X 6-W6 X W6 OR 6 X 6-D6 X D6 WELDED WIRE FABRIC
POLYSTYRENE SHEETING OR COMPOSITION PAPER
POST SLEEVE
8" X 8" STEEL BEARING PLATE, ⅝" THICK
5½" X 7½" WOOD TERMINAL POST, 5'-8" LONG
POLYSTYRENE SHEETING, COMPOSITION PAPER OR SOME OTHER MATERIAL SHALL BE WRAPPED AROUND THE CONCRETE EMBEDDED PORTION OF THE POST TO AID IN REMOVING BROKEN OR DAMAGED POSTS.
3" (TYP.)
24"
3" (MIN.)
30°
¾" X 1½" SLOT FOR GUARDRAIL BOLT "A" (TYP.)
16"
12½"
2"
8½"
7½" (VARIES)
¾" X 2¾" SLOT
2½" DIA. HOLE
2¾"
5½"
+0, -¼"
¾"
½"
7"
21"
25"
5'-8"
4"
24" (NOM.)
8"
3" (NOM.)

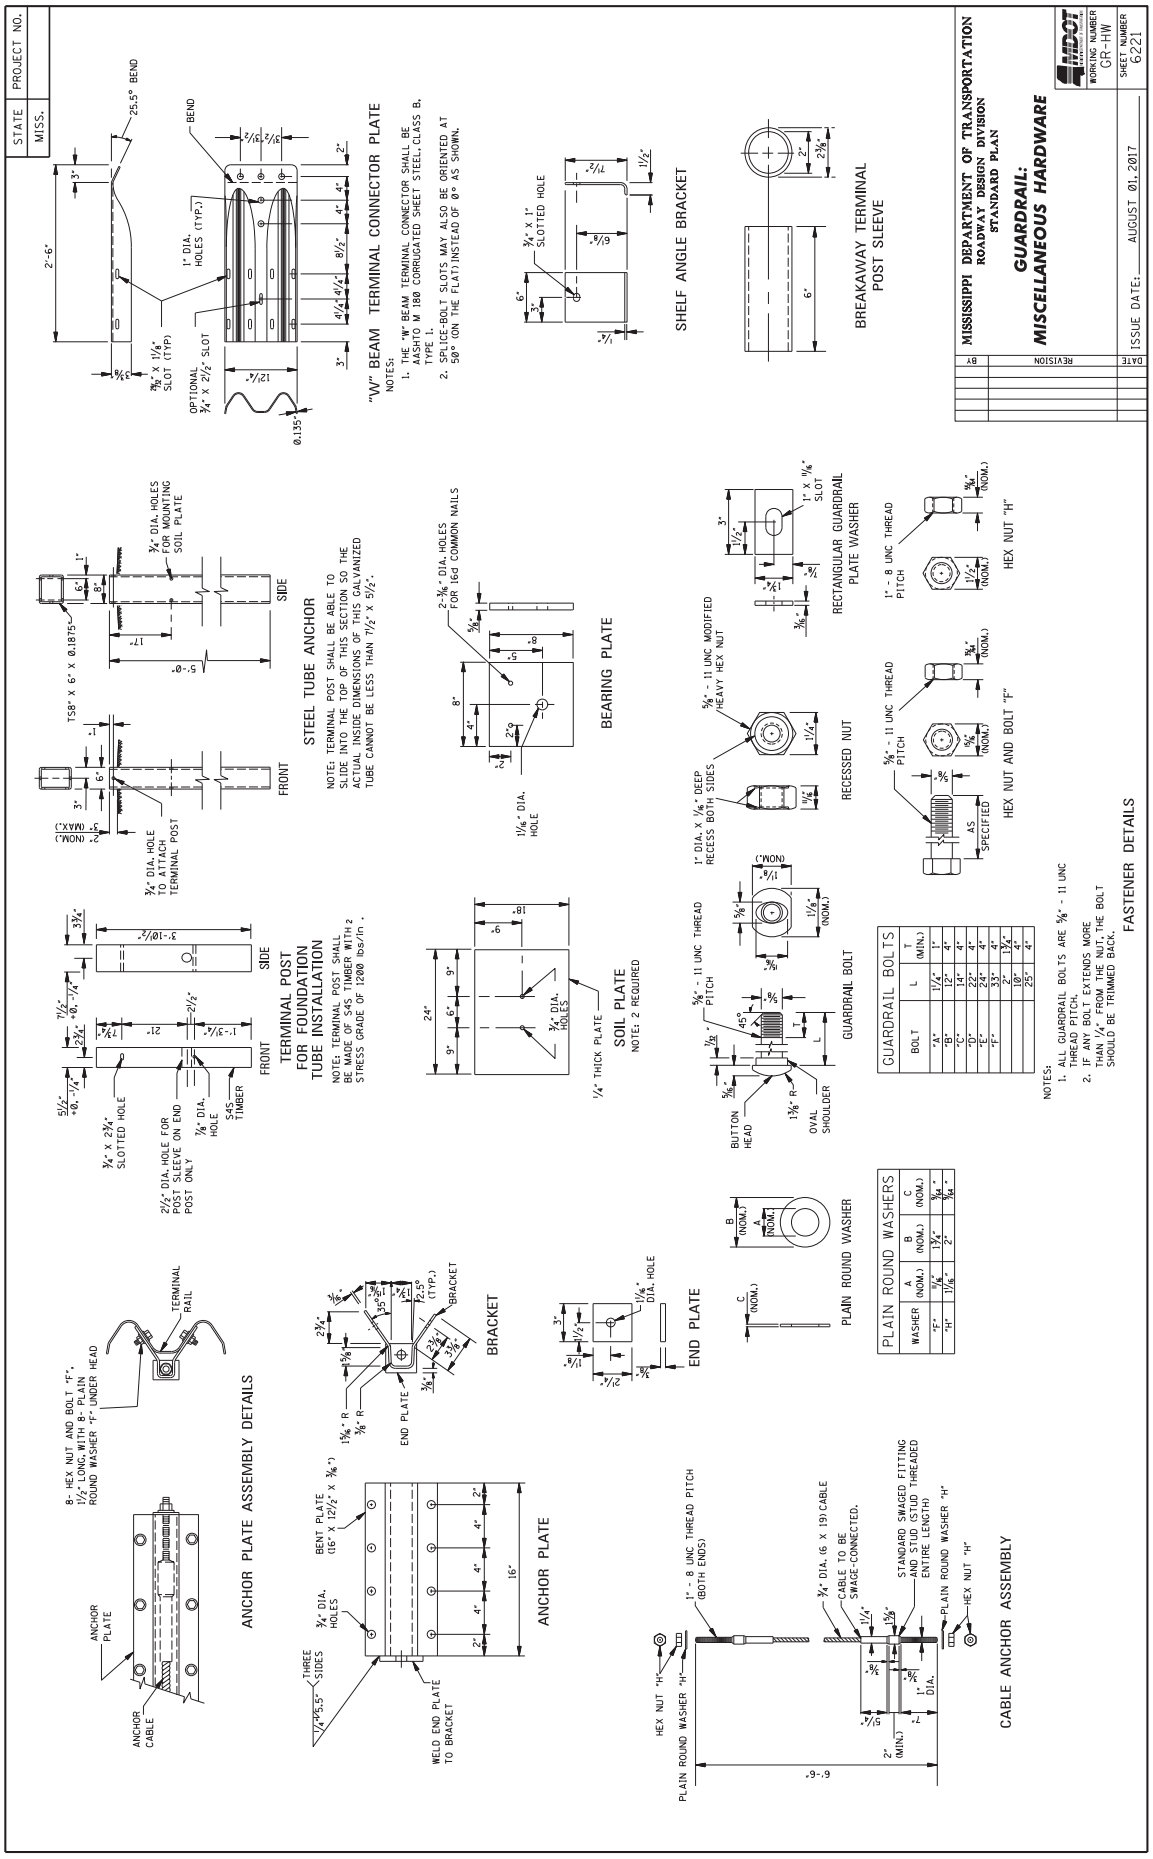

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
GUARDRAIL:
TYPICAL INSTALLATION AT BRIDGE APPROACHES FOR DIVIDED HIGHWAYS
WORKING NUMBER GR-4
SHEET NUMBER 6214
ISSUE DATE: MAY 01, 2017
BY REVISION DATE
** NOTE: IF FORESLOPE, SHOWN ELSEWHERE ON PLANS, IS OTHER THAN 6:1, TRANSITION WILL OCCUR IN AREA SHOWN.
SECTION A–A
SECTION B–B
GENERAL NOTES:
1. VALUES FOR "A" AND "B" WILL BE SHOWN ELSEWHERE ON THE PLANS.
2. FOR DETAILS PERTINENT TO INSTALLATION OF THE TERMINAL SECTION, SEE MANUFACTURER'S SPECIFICATIONS AND DRAWINGS OR ELSEWHERE ON PLANS
3. GUARDRAIL SECTIONS ARE TO BE LAPPED IN THE DIRECTION OF TRAFFIC FLOW NEAREST THE GUARDRAIL FACE.
4. THE OVERALL LENGTH OF GUARDRAIL IS MEASURED FROM THE CONNECTING END ON THE BRIDGE.
5. IN THE ABSENCE OF A BRIDGE END PAVEMENT RAIL CONNECT THE BRIDGE END SECTION TO THE BRIDGE RAIL SECTIONS (GR-2 THRU GR-3), THE SHOULDER WIDTH AT THE BRIDGE END PAVEMENT RAIL OR BRIDGE END RAIL SHALL BE SUFFICIENTLY WIDE TO PROVIDE A MINIMUM OF 2'-0" BEHIND THE BACK OF POST BEFORE THE SLOPE BREAK (HINGEPOINT).
6. TYPE DETAILS AND LIMITS OF GUARDRAIL BRIDGE END SECTION WILL BE SHOWN ELSEWHERE ON THE PLANS.
7. "W" = SHOULDER WIDTH + FORESLOPE WIDTH. DIMENSIONS FOUND ELSEWHERE ON THE PLANS.
8. FOR DIVIDED HIGHWAYS WITH THREE (3) OR MORE LANES IN ONE DIRECTION, THE MEDIAN BARRIER MAY REQUIRE A TAPER RATE OTHER THAN 25:1.
DIVIDED HIGHWAY WITH BARRIER INSIDE CLEAR ZONE OF OPPOSING TRAFFIC
* NOTE: THE 25° LINE IS USED TO DETERMINE THE LIMITS OF MEDIAN BARRIER AS SHOWN.
DIVIDED HIGHWAY WITH BARRIER OUTSIDE CLEAR ZONE OF OPPOSING TRAFFIC
150' MINIMUM TRANSITION
** VARIABLE
NORMAL GUARDRAIL INSTALLATION
GUARDRAIL FACE ALINEMENT ON BRIDGE
30:1 TAPER
25:1 TAPER
TERMINAL SECTION
DOUBLE-FACED GUARDRAIL
TYPE I END SECTION
BRIDGE END SECTION
TANGENT
BRIDGE END PAVEMENT
BRIDGE
SEE NOTE 5
BRIDGE END PAVT RAIL
NORMAL SHOULDER
20:1 SLOPE RELATIVE TO LONGITUDINAL GRADIENT FOR HIGHWAY CENTERLINE
MEDIAN BARRIER TERMINAL AS SHOWN ELSEWHERE ON PLANS
37'-6" TYPICAL
25'-0"
12'-6"
18'-3"
75'
VARIES
NORMAL SHOULDER SLOPE
ETL
2'-0"
3:1
6:1
AS SHOWN ON PLANS

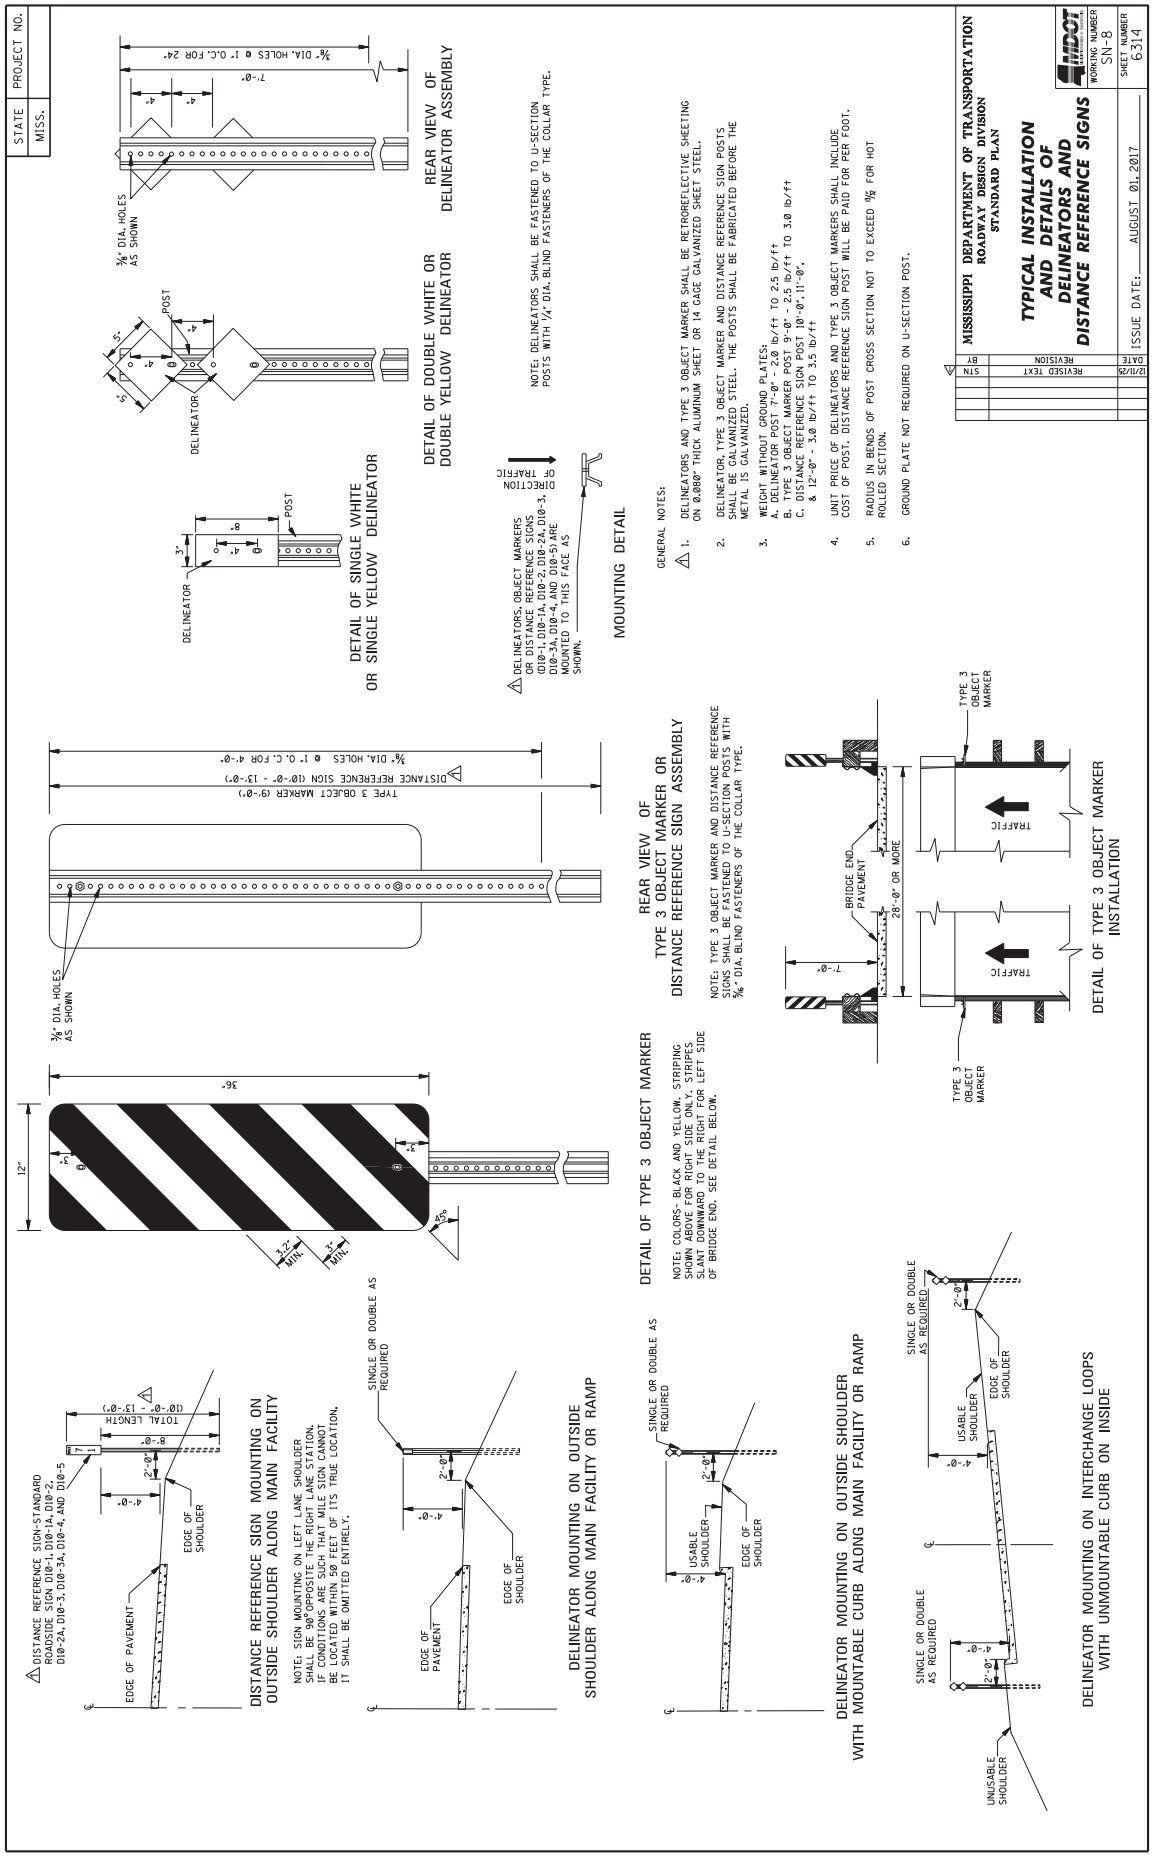

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
GUARDRAIL:
TYPICAL INSTALLATION
AT BRIDGE APPROACHES
FOR 2-LANE 2-WAY
HIGHWAY
WORKING NUMBER GR-4A
SHEET NUMBER 6215
ISSUE DATE: MAY 01, 2017
BY REVISION DATE
* NOTE: IF FORESLOPE SHOWN ELSEWHERE ON PLANS, IS OTHER THAN 6:1, TRANSITION WILL OCCUR IN AREA SHOWN.
DETAIL OF GUARDRAIL SECTION LAPS
GENERAL NOTES:
1. VALUES FOR "A", "B", "C" AND "D" WILL BE SHOWN ELSEWHERE ON THE PLANS.
2. FOR DETAILS PERTINENT TO INSTALLATION OF THE TERMINAL SECTION, SEE MANUFACTURER'S SPECIFICATIONS AND DRAWINGS OR ELSEWHERE ON PLANS
3. GUARDRAIL SECTIONS ARE TO BE LAPPED IN THE DIRECTION OF TRAFFIC APPROACHING THE BRIDGE.
4. THE OVERALL LENGTH OF GUARDRAIL IS MEASURED FROM THE CONNECTING END ON THE BRIDGE.
5. IN THE ABSENCE OF A BRIDGE END PAVEMENT RAIL, CONNECT THE BRIDGE END SECTION TO THE BRIDGE RAIL (SEE MS-GR-2 THRU GR-2C). THE SHOULDER WIDTH AT THE BRIDGE END PROVIDED FOR BRIDGE END RAIL SHALL BE SUFFICIENT TO PROVIDE A MINIMUM OF 2'-0" BEHIND THE BACK OF POST BEFORE THE SLOPE BREAK (HINGEPOINT).
6. TYPE DETAILS AND LIMITS OF GUARDRAIL BRIDGE END SECTION WILL BE SHOWN ELSEWHERE ON THE PLANS.
7. "W" = SHOULDER WIDTH + FORESLOPE WIDTH, DIMENSIONS FOUND ELSEWHERE ON THE PLANS.
PLAN
SECTION A–A
SECTION B–B
VARIABLE
150' MINIMUM TRANSITION
NORMAL GUARDRAIL INSTALLATION
TERMINAL SECTION
BRIDGE END SECTION
TANGENT
37'-6" TYPICAL
75'
30:1 TAPER
GUARDRAIL FACE ALINEMENT ON BRIDGE
BRIDGE END PAVEMENT
BRIDGE
SEE NOTE 5
BRIDGE END PAVT' RAIL
20:1 SLOPE RELATIVE TO LONGITUDINAL GRADIENT FOR HIGHWAY CENTERLINE
NORMAL SHOULDER
ETL
AS SHOWN ON THE PLANS
VARIES
NORMAL SHOULDER SLOPE
2'-0"
3:1
6:1


STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
GUARDRAIL:
TYPICAL INSTALLATION
FOR ROADSIDE HAZARDS
ON DIVIDED HIGHWAYS
WORKING NUMBER GR-4B
SHEET NUMBER 6216
ISSUE DATE: MAY 01, 2017
DATE
REVISION
BY
† NOTE: IF FORESLOPE, SHOWN ELSEWHERE ON PLANS, IS OTHER THAN 6:1, TRANSITION WILL OCCUR IN AREA SHOWN.
SECTION A–A
SECTION B–B
SECTION C–C
SECTION D–D
FOR OBSTACLES 5' TO 17' FROM NORMAL SHOULDER
SECTION D–D
FOR OBSTACLES 17' OR MORE FROM NORMAL SHOULDER
SECTION E–E
**NOTE: FOR STEEL POST AND WOOD BLOCKOUT, USE 6"x8" WOOD POST AND BLOCKOUT, 23.25".
TYPICAL INSTALLATION FOR CULVERT
* NOTE: DISTANCE REQUIRED SHOWN ELSEWHERE ON PLANS.
TYPICAL INSTALLATION FOR ROADSIDE OBSTACLE ON SIDE SLOPE STEEPER THAN 10:1
* NOTE: DISTANCE REQUIRED SHOWN ELSEWHERE ON PLANS.
TYPICAL INSTALLATION FOR ROADSIDE OBSTACLE ON SIDE SLOPE 10:1 OR FLATTER
*NOTE: DISTANCE REQUIRED SHOWN ELSEWHERE ON PLANS.
DETAIL OF POST INSTALLATION WITH COVER
LESS THAN NORMAL POST LENGTH
GENERAL NOTES:
1. FOR DETAILS PERTINENT TO INSTALLATION OF THE TERMINAL SECTION, SEE MANUFACTURER'S SPECIFICATIONS AND DRAWINGS OR ELSEWHERE ON PLANS
2. GUARDRAIL SECTIONS TO BE LAPPED IN THE DIRECTION OF TRAFFIC FLOW NEAREST THE GUARDRAIL FACE.
3. PAY LIMITS FOR NORMAL GUARDRAIL INSTALLATION WILL BE THE TOTAL LENGTH LESS THE LENGTHS OF END TERMINALS.
4. W = SHOULDER WIDTH + FORESLOPE WIDTH. DIMENSIONS FOUND ELSEWHERE ON THE PLANS.


STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
GUARDRAIL: TYPICAL INSTALLATION FOR ROADSIDE HAZARDS ON 2-LANE, 2-WAY HIGHWAYS
WORKING NUMBER GR-4C
SHEET NUMBER 6217
ISSUE DATE: MAY 01, 2017
DATE
BY
REVISION
SECTION A-A
SECTION B-B
SECTION C-C
SECTION D-D FOR OBSTACLES 5' TO 17' FROM NORMAL SHOULDER
SECTION D-D FOR OBSTACLES 17' OR MORE FROM NORMAL SHOULDER
SECTION E-E
** NOTE: FOR STEEL POST AND MODIFIED WOOD BLOCKOUT, USE 12" POWER POST. FOR STEEL POST AND WOOD BLOCKOUT, USE 6".
† NOTE: IF FORESLOPE SHOWN ELSEWHERE ON PLANS IS OTHER THAN 6:1, TRANSITION WILL OCCUR IN AREA SHOWN.
GENERAL NOTES:
1. FOR DETAILS PERTINENT TO INSTALLATION OF THE TERMINAL SECTION, SEE MANUFACTURER'S SPECIFICATIONS AND DRAWINGS OR ELSEWHERE ON PLANS
2. GUARDRAIL SECTIONS TO BE LAPPED IN THE DIRECTION OF TRAFFIC FLOW NEAREST THE GUARDRAIL FACE.
3. PAY LIMITS FOR NORMAL GUARDRAIL INSTALLATION WILL BE THE TOTAL LENGTH LESS THE LENGTHS OF END TERMINALS.
4. W = SHOULDER WIDTH + FORESLOPE WIDTH. DIMENSIONS FOUND ELSEWHERE ON THE PLANS.
TYPICAL INSTALLATION FOR CULVERT
* NOTE: DISTANCE REQUIRED SHOWN ELSEWHERE ON PLANS.
TYPICAL INSTALLATION FOR ROADSIDE OBSTACLE ON SIDE SLOPE STEEPER THAN 10:1
* NOTE: DISTANCE REQUIRED SHOWN ELSEWHERE ON PLANS.
TYPICAL INSTALLATION FOR ROADSIDE OBSTACLE ON SIDE SLOPE 10:1 OR FLATTER
* NOTE: DISTANCE REQUIRED SHOWN ELSEWHERE ON PLANS.
DETAIL OF POST INSTALLATION WITH COVER
LESS THAN NORMAL POST LENGTH
THE POST SHALL BE WRAPPED WITH ONE LAYER OF 1/4" THICK EXPANDED POLYSTYRENE FOAM SHEETING AND ONE WRAP OF LIGHTWEIGHT BUILDING PAPER. THE TOP 1' SHALL BE FILLED WITH BUTYL RUBBER CAULKING (COMMERCIAL GRADE) OR OTHER APPROVED WATERPROOFING MATERIAL.
TOP OF NEW BOX CULVERT OR BRIDGE FOOTING.
TOP OF EXISTING BOX CULVERT OR BRIDGE FOOTING.
1/2" DOWEL BARS 12" LONG 4 REQUIRED PER POST. NO SPECIAL EQUIPMENT WILL BE MADE FOR CONCRETE OR DOWELS.


STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
GUARDRAIL:
RUB RAIL HARDWARE
WORKING NUMBER GR-RR
SHEET NUMBER 6218
ISSUE DATE: AUGUST 01, 2017
BY REVISION DATE
GENERAL NOTES:
1. POSTS 1 THROUGH 9 REQUIRE AN ADDITIONAL HOLE TO ATTACH LOWER BLOCKOUTS. STEEL POST REQUIRE 2 HOLES ON EITHER SIDE OF THE POST.
2. RUBRAIL BLOCKOUTS SHALL BE SECURED WITH ⅝" BUTTONHEAD BOLT FOR STEEL POST AND 20" BOLT FOR WOOD POST. (SEE PROFILE VIEW FOR LENGTHS)
3. RUBRAIL & LONG BLOCKOUT (POST 9) ARE NOT REQUIRED IN CURB & GUTTER SECTIONS OF ROADWAY.
4. ATTACH RUBRAIL CONNECTOR PLATE AND RUBRAIL WITH ⅝" X 1½" HEX HEAD BOLTS "F"
BLOCKOUT FOR POST 9 OF TYPE "1" BRIDGE END SECTION
6" X 12" WOOD BLOCKOUT
MODIFIED WOOD BLOCKOUT
PLAN
ELEVATION FOR WOOD POST
ELEVATION FOR STEEL POST
¾" DIA. (TYP.)
CROSS-SECTION VIEW OF C6 x 8.2
PROFILE VIEW OF POSTS
GUARDRAIL BOLT "C" WITH RECTANGULAR GUARDRAIL PLATE WASHER UNDER HEAD AND PLAIN ROUND WASHER "F" UNDER RECESSED NUT.
6" X 12" MODIFIED WOOD BLOCKOUT, 29½" LONG
#6 X 9 STEEL POST, 6'-6" LONG
C6 x 8.2
10¹/₂ SLOPE OR FLATTER
GUARDRAIL BOLT (25") WITH RECTANGULAR GUARDRAIL PLATE WASHER UNDER HEAD AND PLAIN ROUND WASHER "F" UNDER RECESSED NUT.
* NOTE: UNLESS SPECIFIED OTHERWISE ON THE PLANS.
STEEL POST
RECESSED NUT WITH PLAIN ROUND WASHER "F"
GUARDRAIL BOLT (25") NO WASHER.
6" X 12" WOOD BLOCKOUT, 29½" LONG
10" X 10" WOOD POST, 6'-0" LONG
WOOD POST
GUARDRAIL BOLT "E" WITH RECTANGULAR PLATE WASHER UNDER HEAD.
DRILL ¾" DIA. HOLE (TYP.)
POST BOLT SLOTS ¾" X 2½" (TYP.)
LONGITUDINAL RUB RAIL
C6 x 8.2
¾" DIA HOLE FOR ⅝" DIA. LAG SCREW OR BOLT
DIAGONAL RUB RAIL
6.25" (MEASURED ALONG RUB RAIL)
HEX NUT AND BOLT "F"
PLAIN ROUND WASHER "F"
¾" - 11 UNC THREAD PITCH
AS SPECIFIED
AS NOTED
25° OR 15° GUARDRAIL BOLT
BUTTON HEAD
OVAL SHOULDER
"L" BRACKET
¾" x 1½" SLOTS
RUB RAIL CONNECTOR BRACKET
¾" DIAMETER
16° BEND


STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
GUARDRAIL:
MISCELLANEOUS HARDWARE
WORKING NUMBER GR-HW
SHEET NUMBER 6221
ISSUE DATE: AUGUST 01, 2017
REVISION
DATE
BY
"W" BEAM TERMINAL CONNECTOR PLATE
NOTES:
1. THE "W" BEAM TERMINAL CONNECTOR SHALL BE AASHTO M 180 CORRUGATED SHEET STEEL, CLASS B, TYPE 1.
2. SPLICE-BOLT SLOTS MAY ALSO BE ORIENTED AT 50° (ON THE FLAT) INSTEAD OF 0° AS SHOWN.
SHELF ANGLE BRACKET
BREAKAWAY TERMINAL POST SLEEVE
STEEL TUBE ANCHOR
NOTE: TERMINAL POST SHALL BE ABLE TO SLIDE INTO THE TOP OF THIS SECTION SO THE ACTUAL INSIDE DIMENSIONS OF THIS GALVANIZED TUBE CANNOT BE LESS THAN 7½" X 5½".
BEARING PLATE
TERMINAL POST FOR FOUNDATION TUBE INSTALLATION
NOTE: TERMINAL POST SHALL BE MADE OF S4S TIMBER WITH A STRESS GRADE OF 1200 lbs/in.²
SOIL PLATE
NOTE: 2 REQUIRED
RECESSED NUT
RECTANGULAR GUARDRAIL PLATE WASHER
HEX NUT "H"
HEX NUT AND BOLT "F"
GUARDRAIL BOLT
GUARDRAIL BOLTS
BOLT | L | T (MIN.)
"A" | 1¼" | 1"
"B" | 12" | 4"
"C" | 14" | 4"
"D" | 22" | 4"
"E" | 24" | 4"
"F" | 33" | 4"
"G" | 2' | 1¾"
"H" | 10' | 4"
"I" | 25' | 4"
NOTES:
1. ALL GUARDRAIL BOLTS ARE ⅝" - 11 UNC THREAD PITCH.
2. IF ANY BOLT EXTENDS MORE THAN ¼" FROM THE NUT, THE BOLT SHOULD BE TRIMMED BACK.
FASTENER DETAILS
PLAIN ROUND WASHER
PLAIN ROUND WASHERS
WASHER | A (NOM.) | B (NOM.) | C (NOM.)
"F" | ¾" | 1¾" | ⅝"
"H" | 1⅛" | 2" | ⅝"
ANCHOR PLATE ASSEMBLY DETAILS
8- HEX NUT AND BOLT "F", 1½" LONG, WITH 8- PLAIN ROUND WASHER "F" UNDER HEAD
TERMINAL RAIL
ANCHOR PLATE
ANCHOR CABLE
BRACKET
END PLATE
ANCHOR PLATE
BENT PLATE (16" X 12½" X ⅜")
WELD END PLATE TO BRACKET
CABLE ANCHOR ASSEMBLY
HEX NUT "H"
PLAIN ROUND WASHER "H"
1" - 8 UNC THREAD PITCH (BOTH ENDS)
¾" DIA. (6 X 19) CABLE
CABLE TO BE SWAGE-CONNECTED.
STANDARD SWAGED FITTING AND STUD (STUD THREADED ENTIRE LENGTH)


STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
TYPICAL INSTALLATION AND DETAILS OF DELINEATORS AND DISTANCE REFERENCE SIGNS
WORKING NUMBER SN-8
SHEET NUMBER 6314
ISSUE DATE: AUGUST 01, 2017
REVISION DATE BY
REVISED TEXT 12/1/25 STN
GENERAL NOTES:
1. DELINEATORS AND TYPE 3 OBJECT MARKER SHALL BE RETROREFLECTIVE SHEETING ON 0.080" THICK ALUMINUM SHEET OR 14 GAGE GALVANIZED SHEET STEEL.
2. DELINEATOR, TYPE 3 OBJECT MARKER AND DISTANCE REFERENCE SIGN POSTS SHALL BE GALVANIZED STEEL. THE POSTS SHALL BE FABRICATED BEFORE THE METAL IS GALVANIZED.
3. WEIGHT WITHOUT GROUND PLATES:
A. DELINEATOR POST 7'-0" - 2.0 lb/ft TO 2.5 lb/ft
B. TYPE 3 OBJECT MARKER POST 9'-0" - 2.5 lb/ft TO 3.0 lb/ft
C. DISTANCE REFERENCE SIGN POST 10'-0",11'-0", & 12'-0" - 3.0 lb/ft TO 3.5 lb/ft
4. UNIT PRICE OF DELINEATORS AND TYPE 3 OBJECT MARKERS SHALL INCLUDE COST OF POST. DISTANCE REFERENCE SIGN POST WILL BE PAID FOR PER FOOT.
5. RADIUS IN BENDS OF POST CROSS SECTION NOT TO EXCEED 5/8 FOR HOT ROLLED SECTION.
6. GROUND PLATE NOT REQUIRED ON U-SECTION POST.
NOTE: DELINEATORS SHALL BE FASTENED TO U-SECTION POSTS WITH 1/4" DIA. BLIND FASTENERS OF THE COLLAR TYPE.
REAR VIEW OF DELINEATOR ASSEMBLY
DETAIL OF DOUBLE WHITE OR DOUBLE YELLOW DELINEATOR
DETAIL OF SINGLE WHITE OR SINGLE YELLOW DELINEATOR
MOUNTING DETAIL
DELINEATORS, OBJECT MARKERS OR DISTANCE REFERENCE SIGNS (D10-1, D10-1A, D10-2, D10-2A, D10-3, D10-3A, D10-4, AND D10-5) ARE MOUNTED TO THIS FACE AS SHOWN.
DIRECTION OF TRAFFIC
REAR VIEW OF TYPE 3 OBJECT MARKER OR DISTANCE REFERENCE SIGN ASSEMBLY
NOTE: TYPE 3 OBJECT MARKER AND DISTANCE REFERENCE SIGNS SHALL BE FASTENED TO U-SECTION POSTS WITH 3/8" DIA. BLIND FASTENERS OF THE COLLAR TYPE.
DETAIL OF TYPE 3 OBJECT MARKER
NOTE: COLORS- BLACK AND YELLOW. STRIPING SHOWN ABOVE FOR RIGHT SIDE ONLY. STRIPES SLANT DOWNWARD TO THE RIGHT FOR LEFT SIDE OF BRIDGE END. SEE DETAIL BELOW.
DETAIL OF TYPE 3 OBJECT MARKER INSTALLATION
DISTANCE REFERENCE SIGN MOUNTING ON OUTSIDE SHOULDER ALONG MAIN FACILITY
NOTE: SIGN MOUNTING ON LEFT LANE SHOULDER SHALL BE 500' OPPOSITE THE RIGHT LANE STATION. IF CONDITIONS ARE SUCH THAT MILE SIGN CANNOT BE LOCATED WITHIN 500 FEET OF ITS TRUE LOCATION, IT SHALL BE OMITTED ENTIRELY.
DELINEATOR MOUNTING ON OUTSIDE SHOULDER ALONG MAIN FACILITY OR RAMP
DELINEATOR MOUNTING ON OUTSIDE SHOULDER ALONG MAIN FACILITY OR RAMP
DELINEATOR MOUNTING ON INTERCHANGE LOOPS WITH UNMOUNTABLE CURB ON INSIDE

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 – NOTICE TO BIDDERS NO. 7624 **CODE: (SP)**

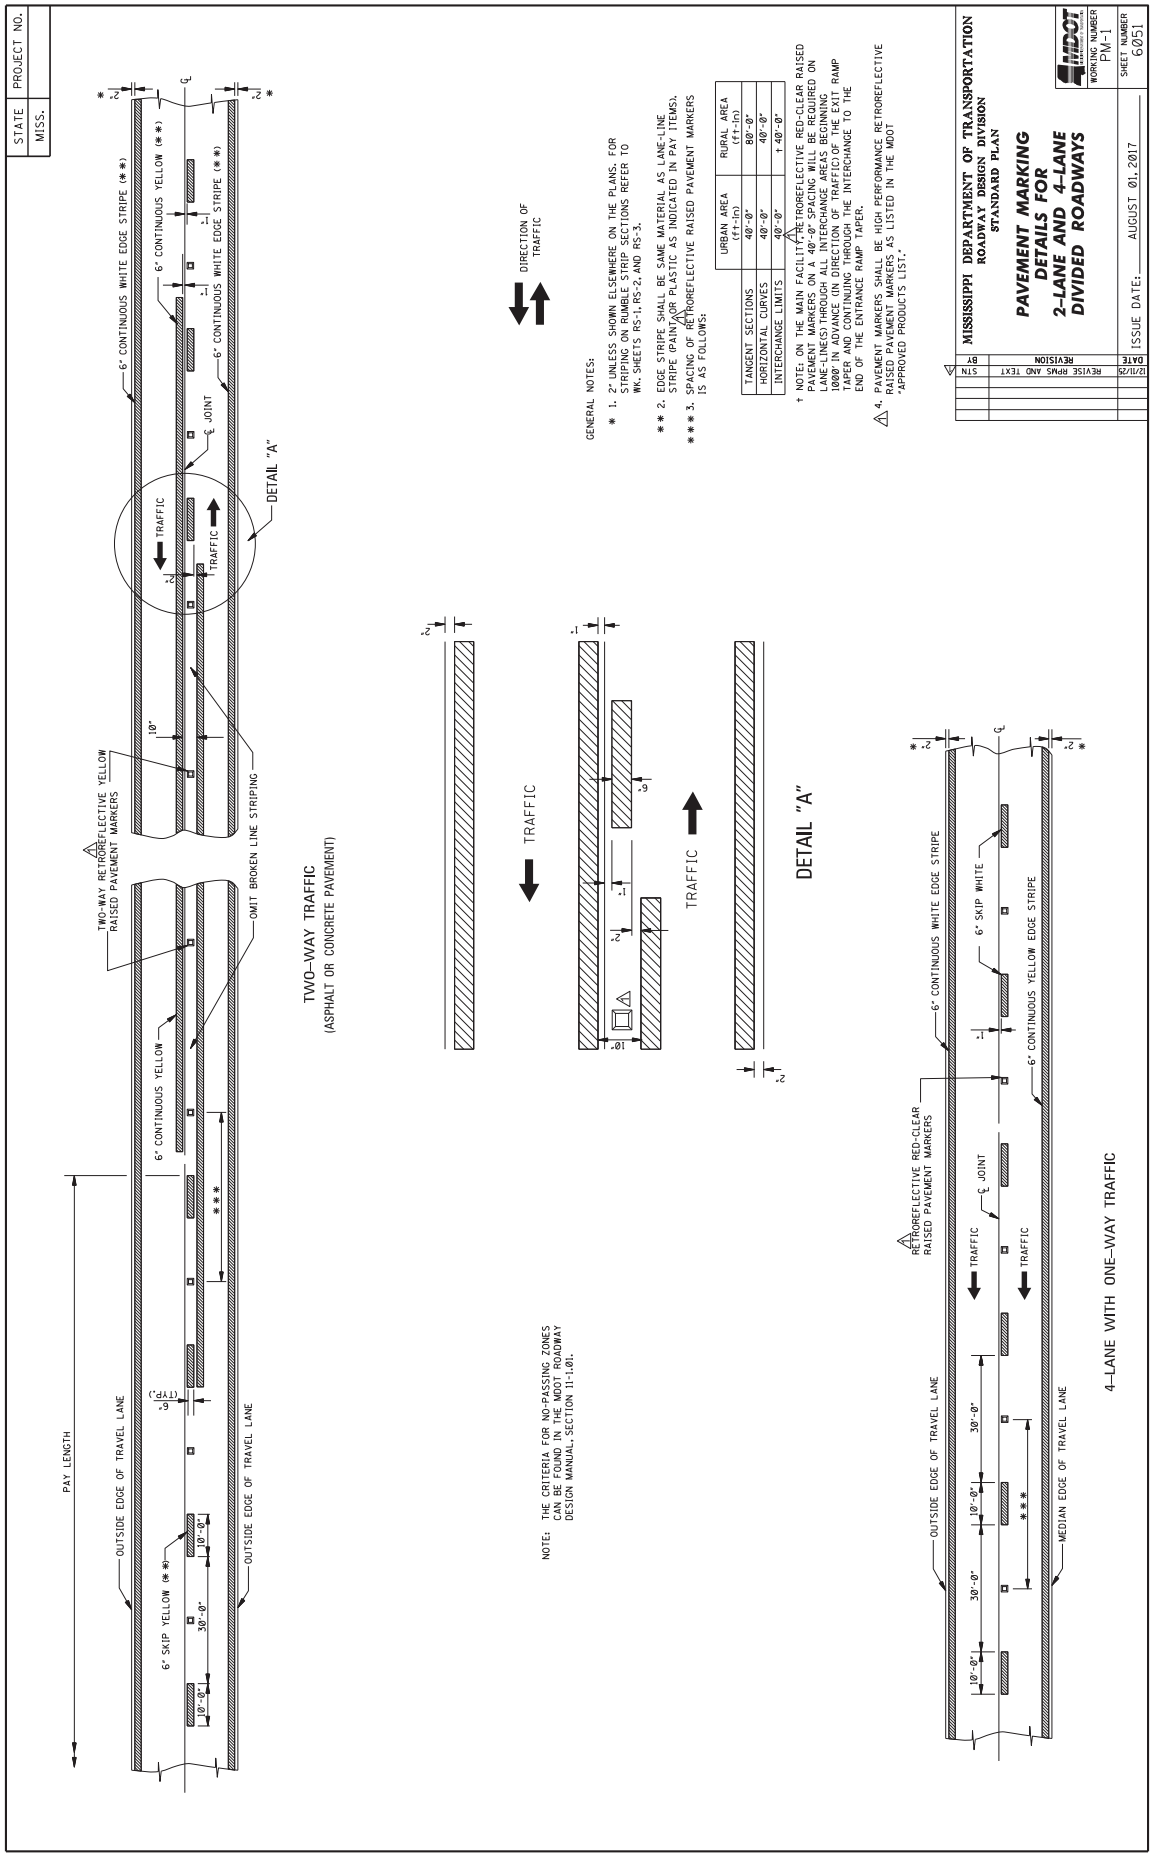
DATE: 01/20/2026

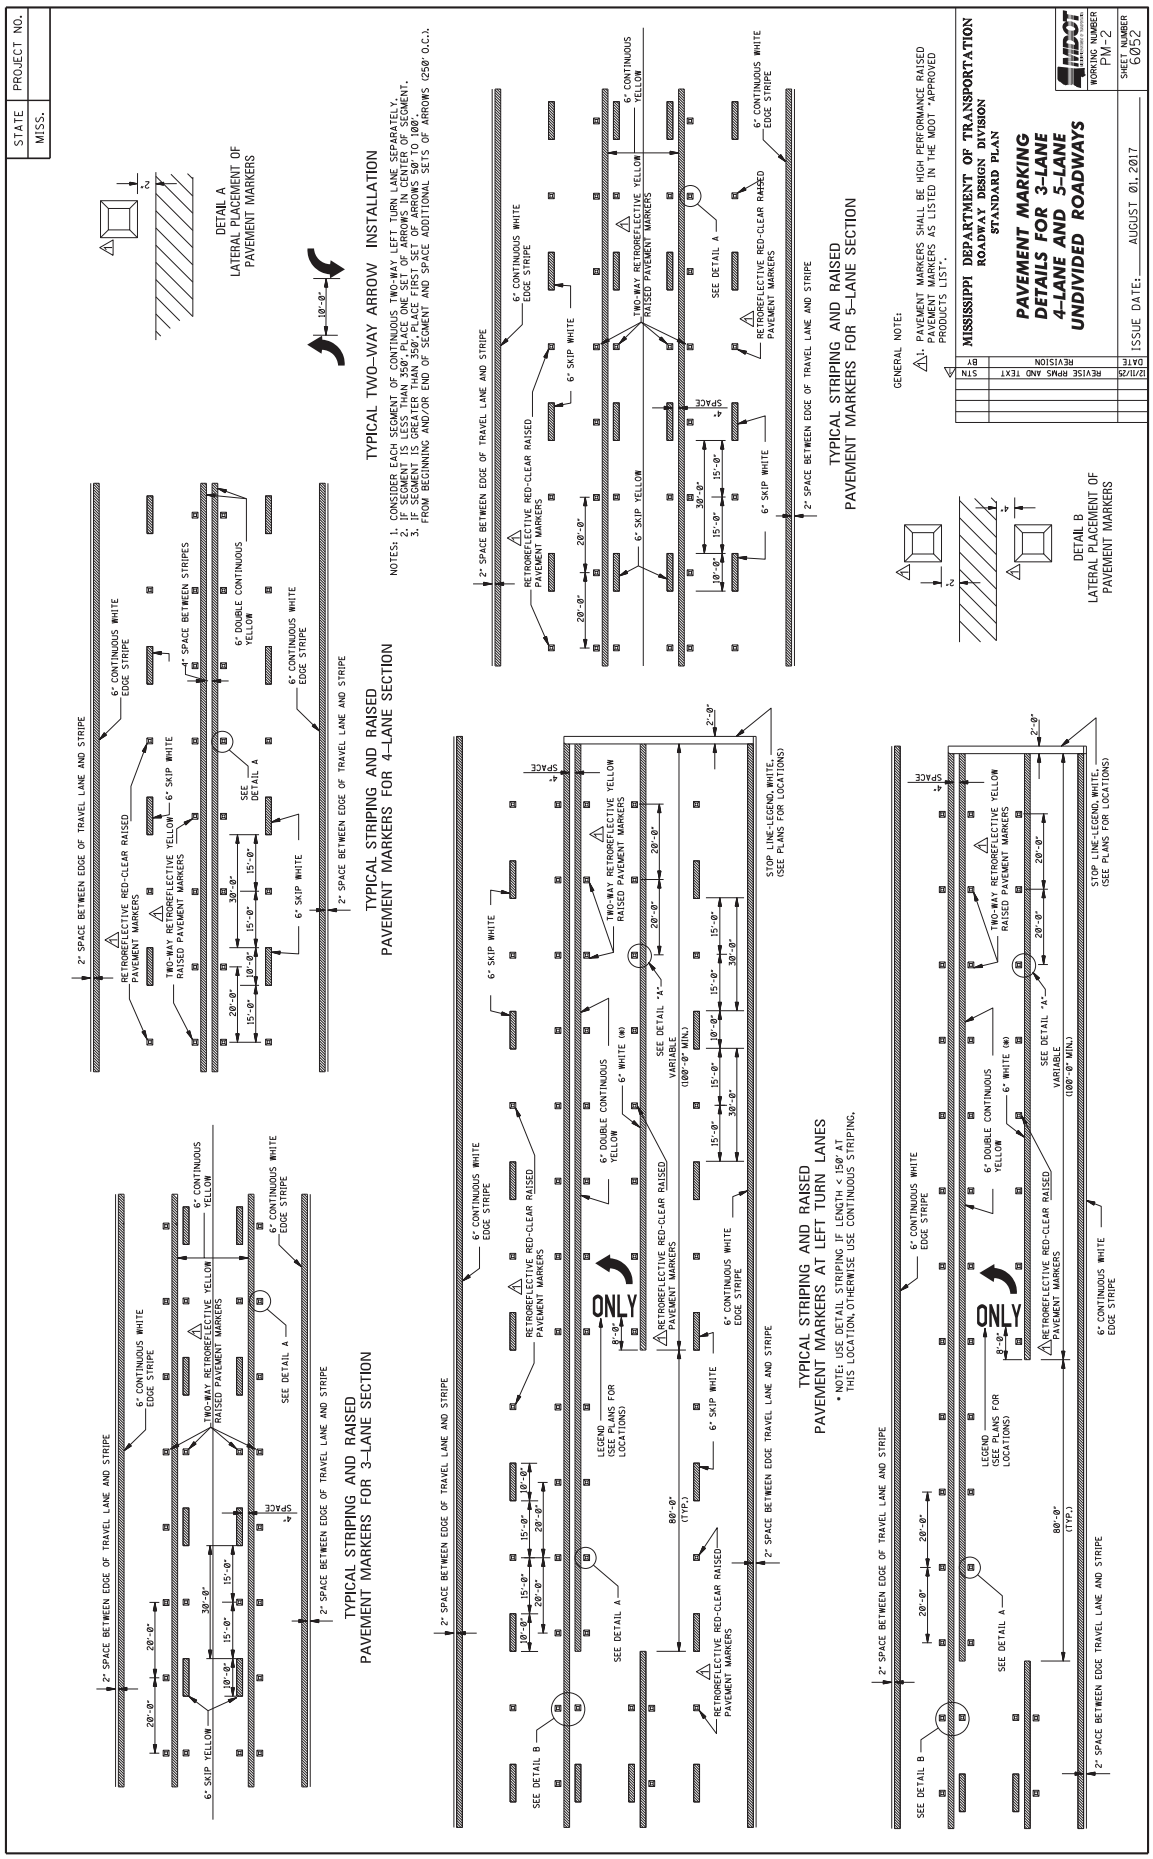
SUBJECT: Standard Drawings

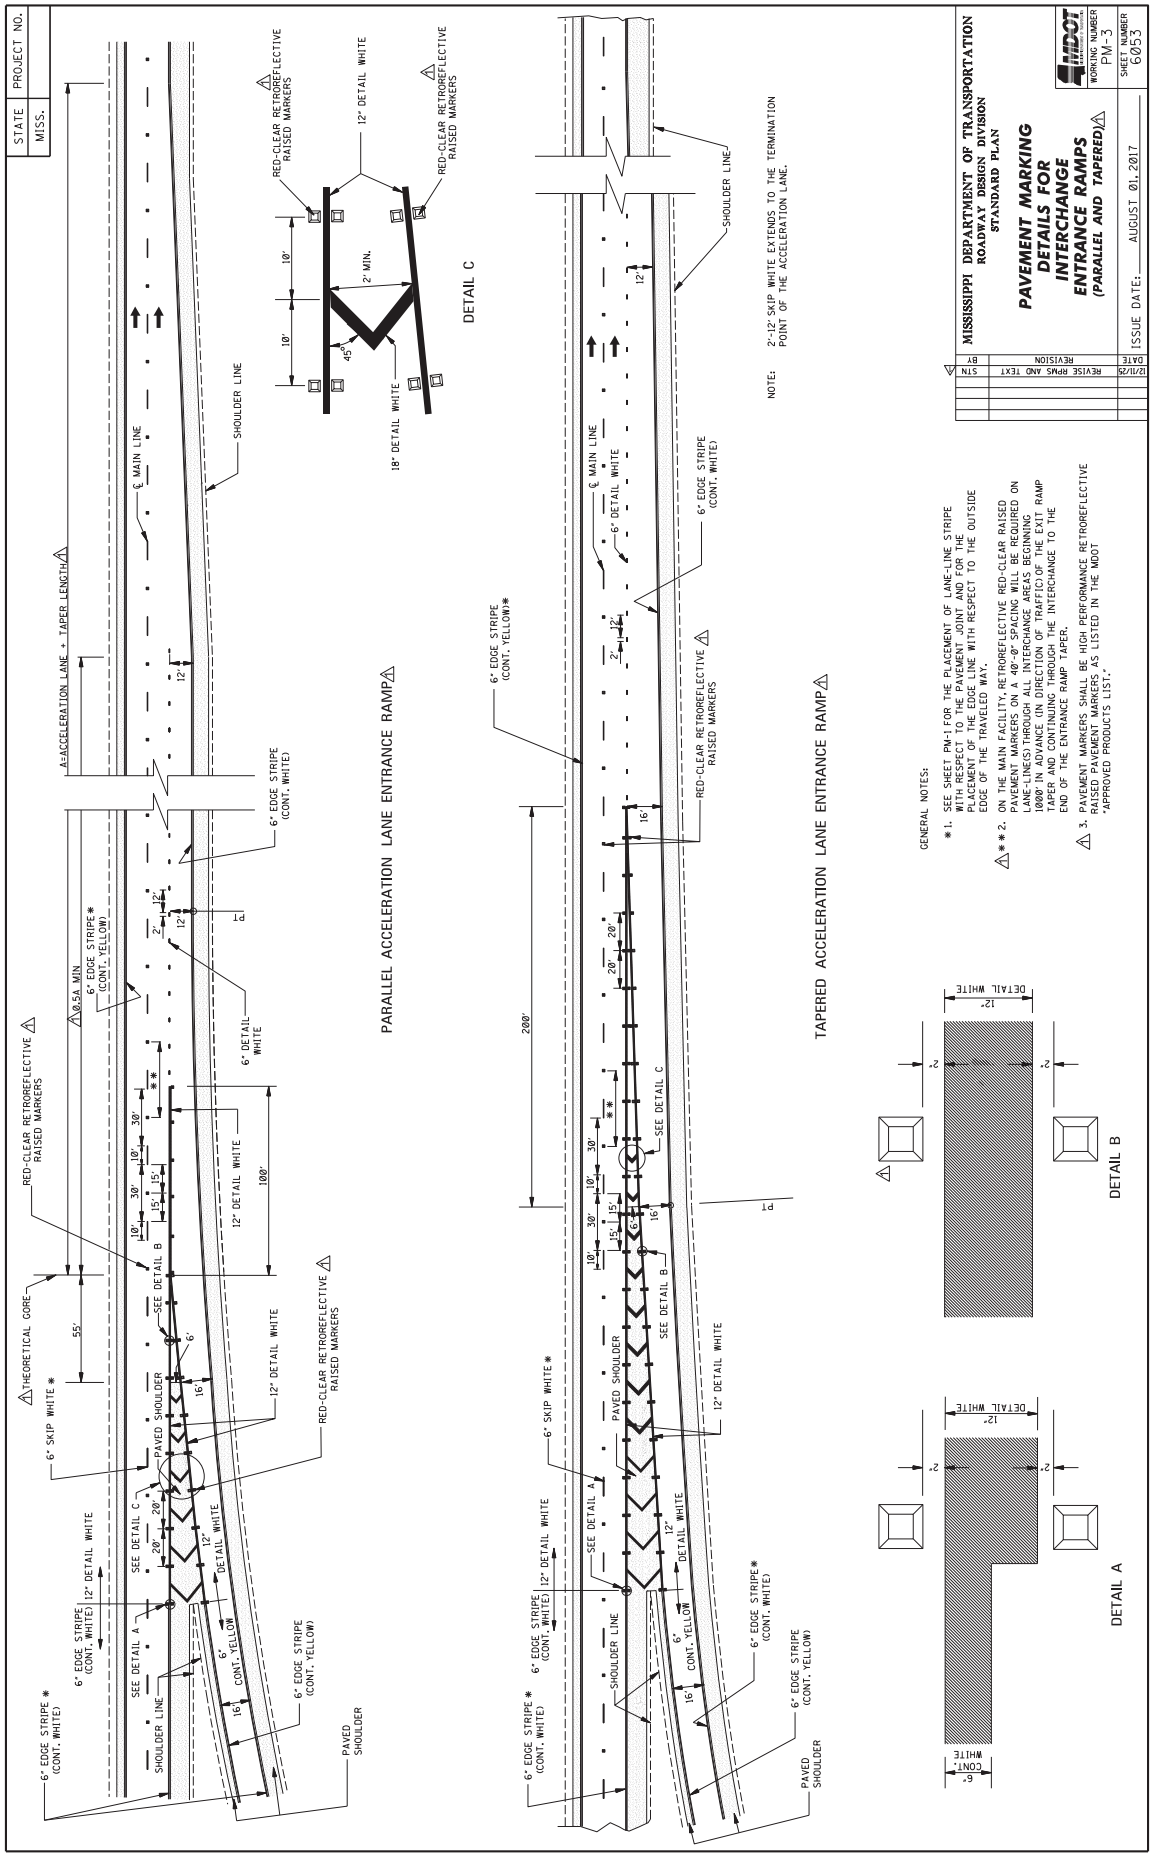
Standard Drawings attached hereto shall govern appropriate items of required work.

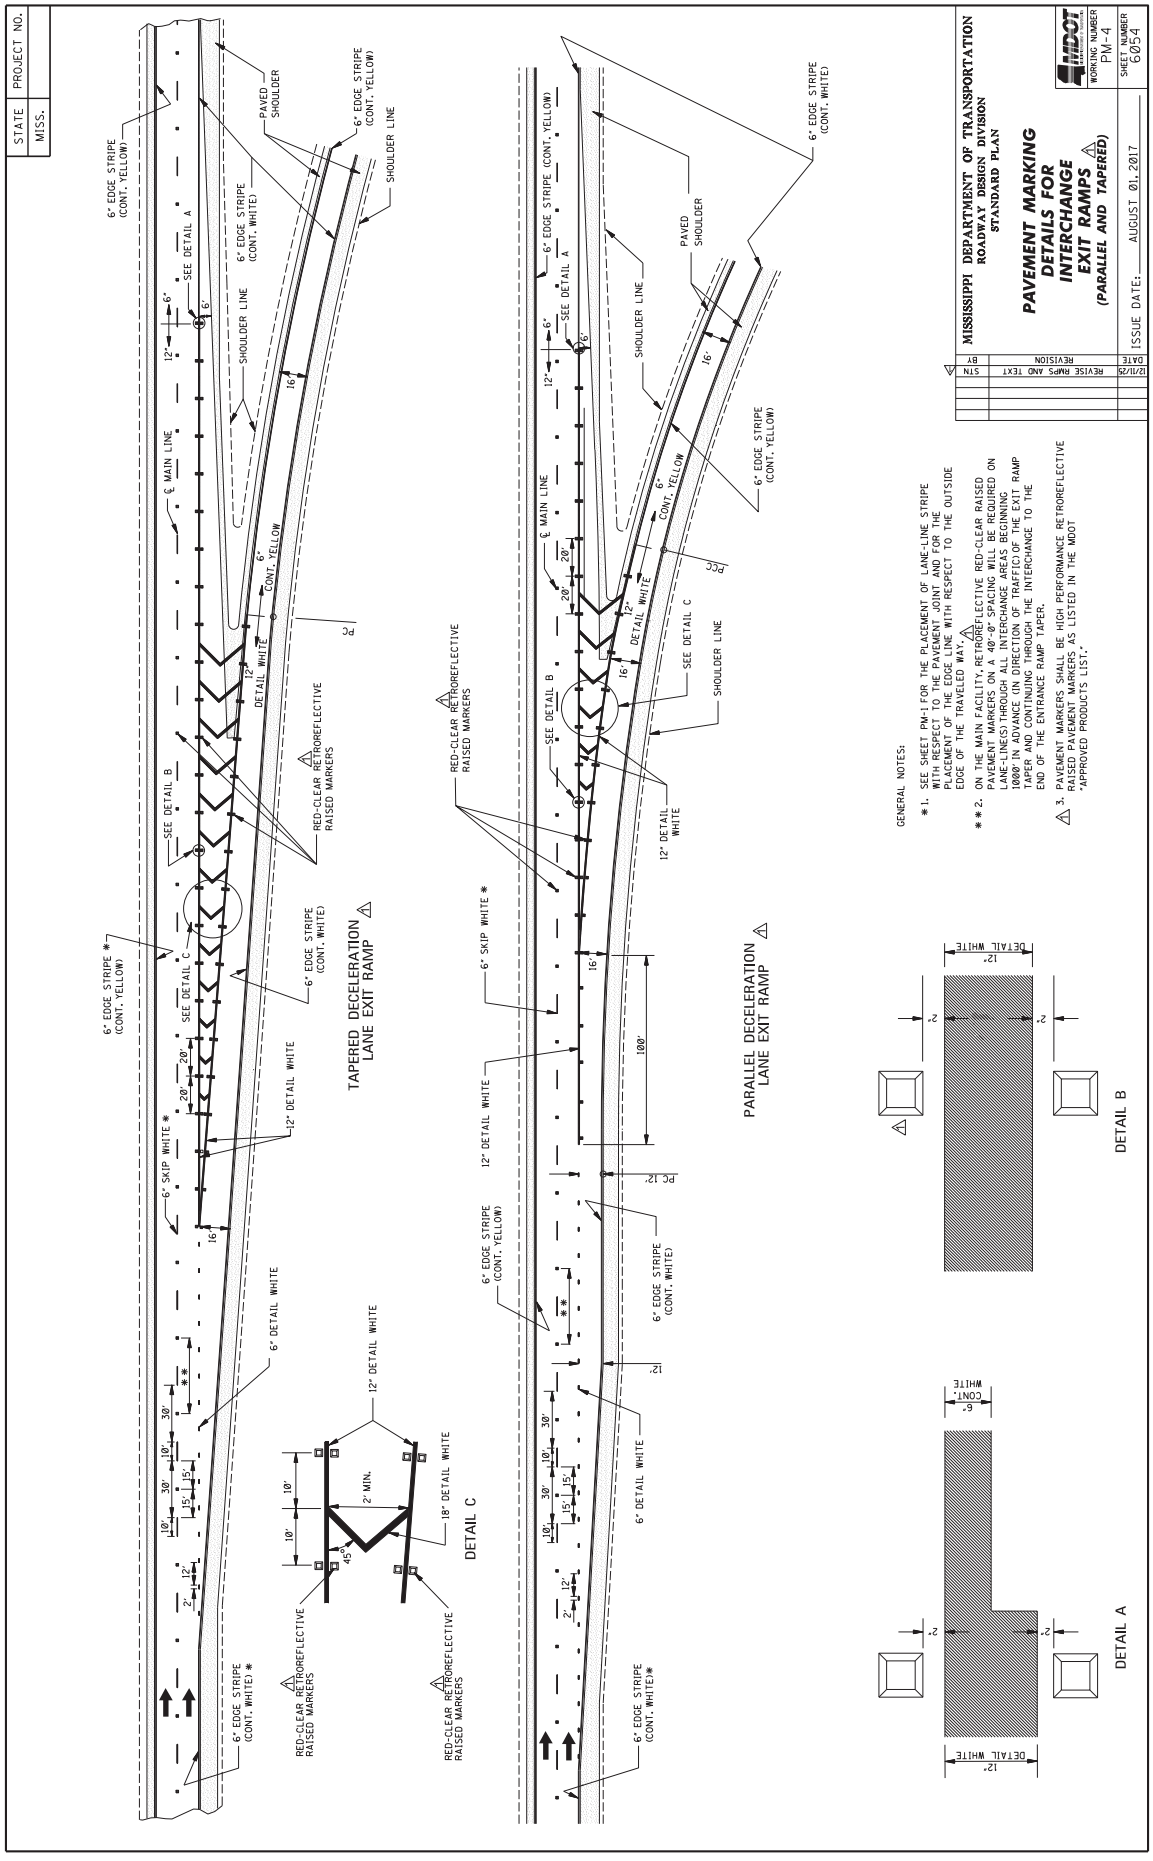
Larger copies of Standard Drawings may be purchased from:

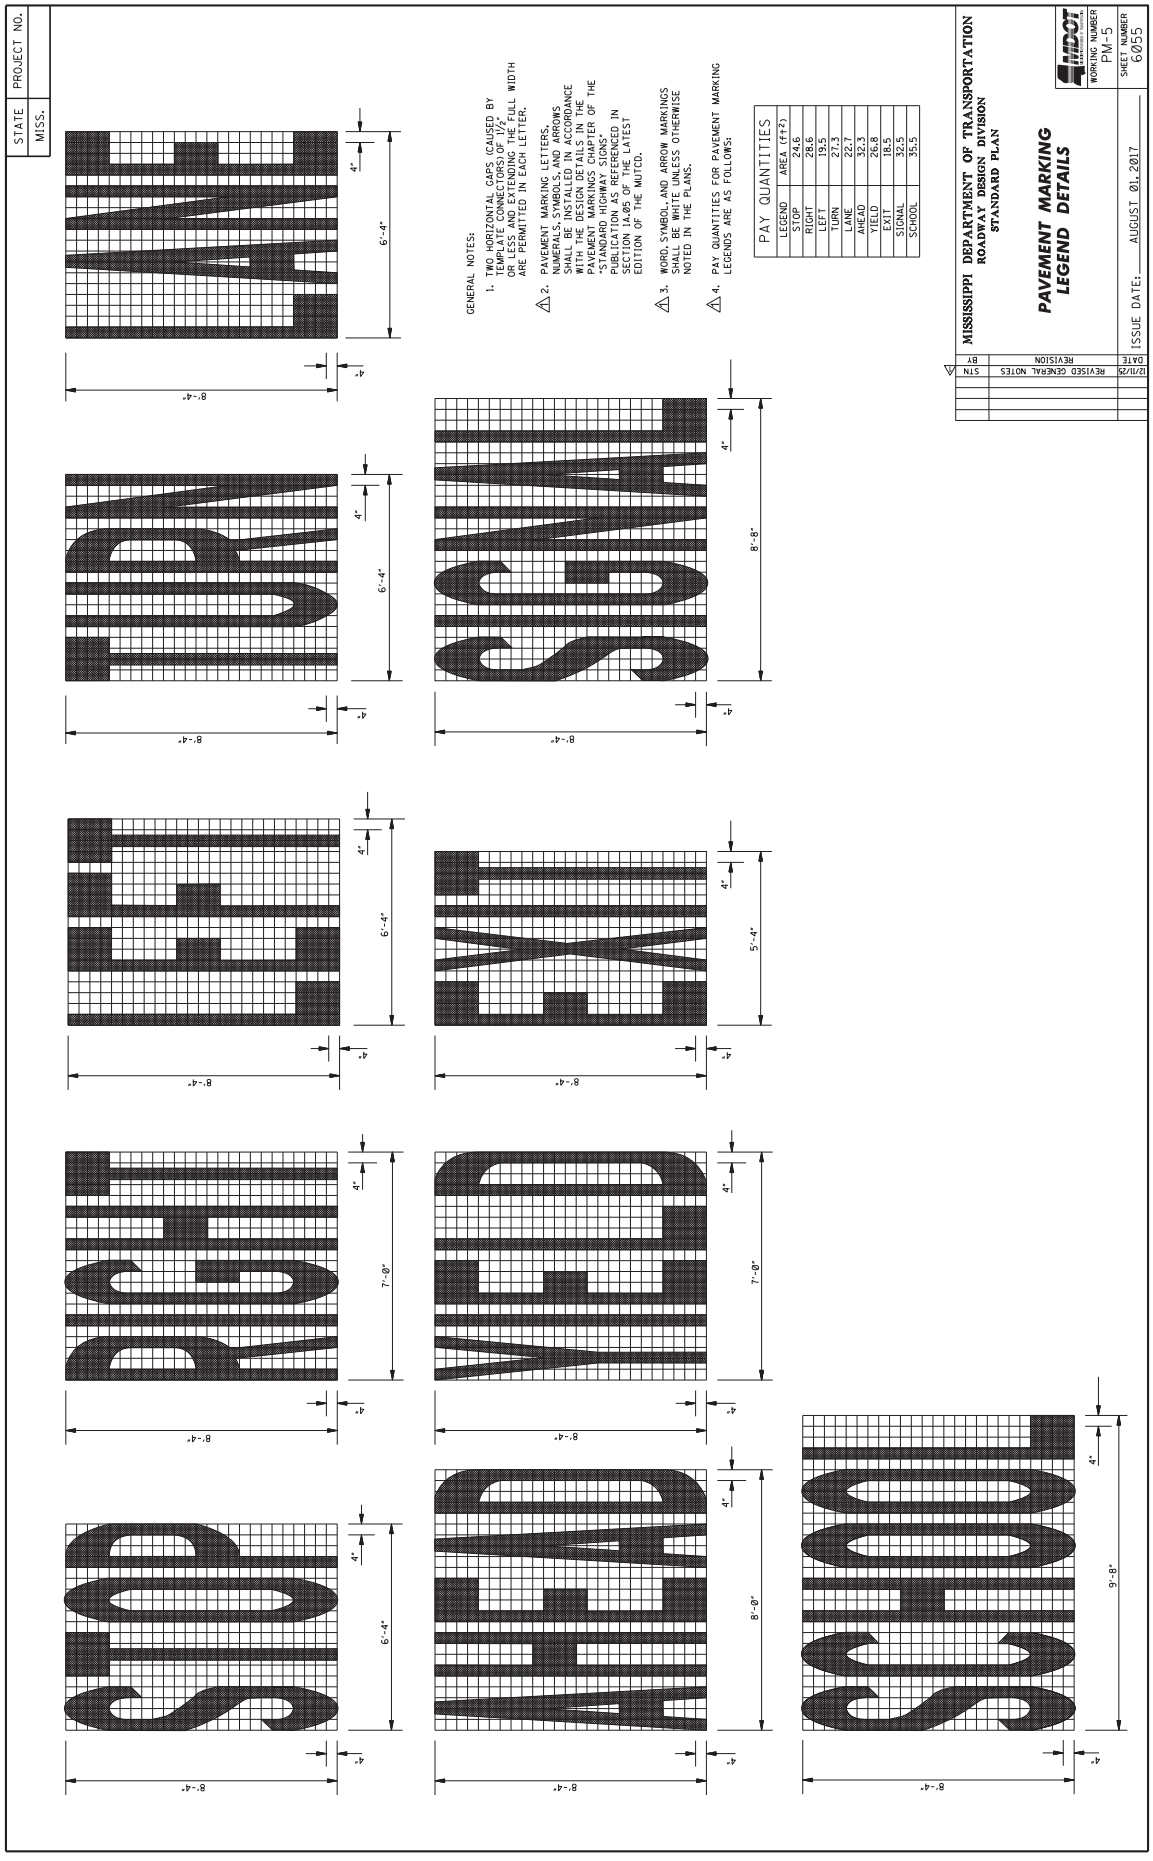
MDOT Plans Print Shop
MDOT Shop Complex, Building C, Room 114
2567 North West Street
P.O. Box 1850
Jackson, MS 39215-1850
Telephone: (601) 359-7460
or FAX: (601) 359-7461
or e-mail: plans@mdot.state.ms.us

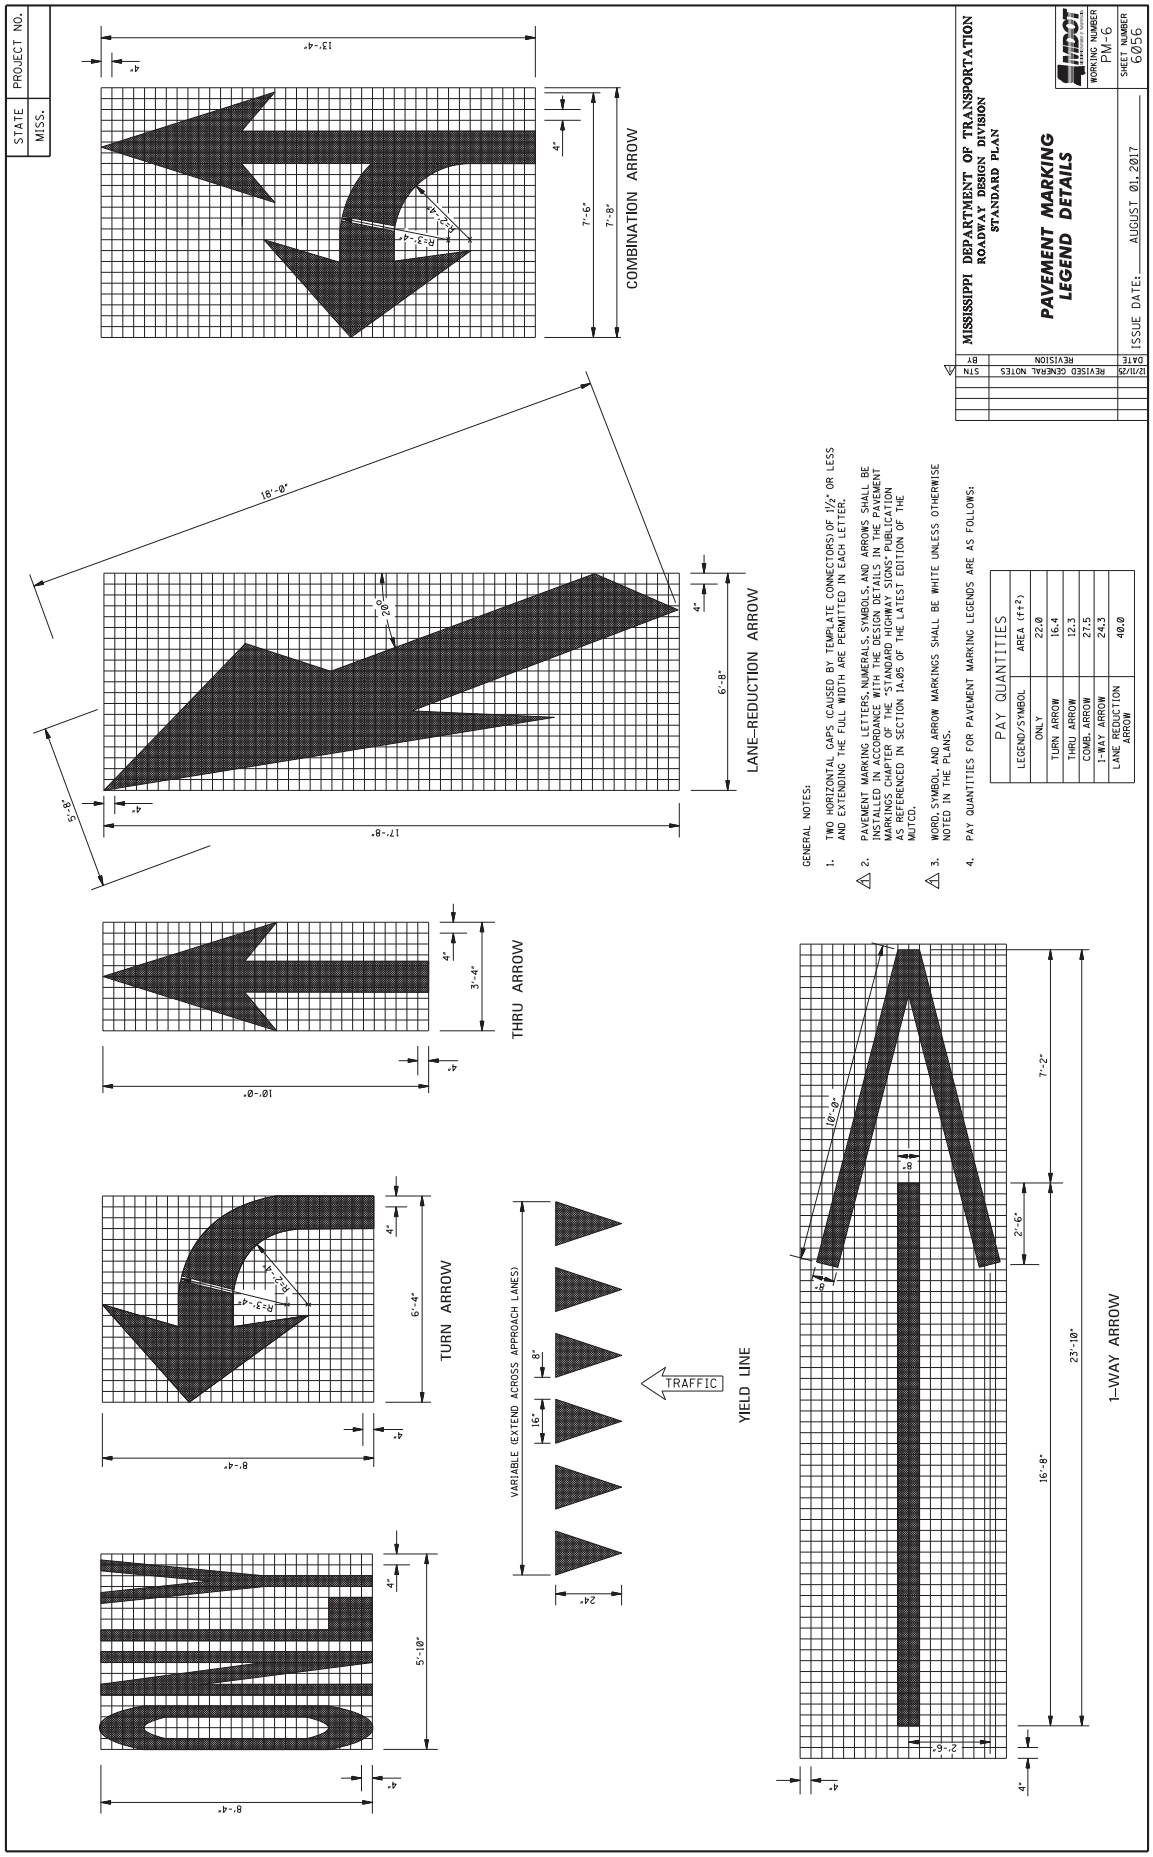

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
PAVEMENT MARKING DETAILS FOR 2-LANE AND 4-LANE DIVIDED ROADWAYS
WORKING NUMBER PM-1
SHEET NUMBER 6051
ISSUE DATE: AUGUST 01, 2017
REVISE RPMS AND TEXT
12/11/20
STN BY
GENERAL NOTES:
* 1. 2" UNLESS SHOWN ELSEWHERE ON THE PLANS. FOR STRIPING ON RUMBLE STRIP SECTIONS REFER TO MK. SHEETS RS-1, RS-2, AND RS-3.
** 2. EDGE STRIPE SHALL BE SAME MATERIAL AS LANE-LINE STRIPE (PAINT OR PLASTIC AS INDICATED IN PAY ITEMS).
*** 3. SPACING OF RETROREFLECTIVE RAISED PAVEMENT MARKERS IS AS FOLLOWS:
URBAN AREA (ft-in) RURAL AREA (ft-in)
TANGENT SECTIONS 40'-0" 80'-0"
HORIZONTAL CURVES 40'-0" 40'-0"
INTERCHANGE LIMITS 40'-0" † 40'-0"
† NOTE: ON THE MAIN FACILITY, RETROREFLECTIVE RED-CLEAR RAISED PAVEMENT MARKERS SPACED AT 40'-0" CENTERS WILL BE REQUIRED ON LANE LINE(S) THROUGH ALL INTERCHANGE AREAS BEGINNING 1000' IN ADVANCE (IN DIRECTION OF TRAFFIC) OF THE EXIT RAMP TAPER AND CONTINUING THROUGH THE INTERCHANGE TO THE END OF THE ENTRANCE RAMP TAPER.
△4. PAVEMENT MARKERS SHALL BE HIGH PERFORMANCE RETROREFLECTIVE RAISED PAVEMENT MARKERS AS LISTED IN THE MDOT "APPROVED PRODUCTS LIST."
TWO-WAY RETROREFLECTIVE YELLOW RAISED PAVEMENT MARKERS
6" CONTINUOUS WHITE EDGE STRIPE (**)
6" CONTINUOUS YELLOW (**)
6" CONTINUOUS WHITE EDGE STRIPE (**)
℄ JOINT
TRAFFIC
TRAFFIC
DETAIL "A"
OMIT BROKEN LINE STRIPING
PAY LENGTH
OUTSIDE EDGE OF TRAVEL LANE
6" SKIP YELLOW (**)
10'-0"
30'-0"
10'-0"
6" CONTINUOUS YELLOW
***
OUTSIDE EDGE OF TRAVEL LANE
TWO-WAY TRAFFIC
(ASPHALT OR CONCRETE PAVEMENT)
NOTE: THE CRITERIA FOR NO-PASSING ZONES CAN BE FOUND IN THE MDOT ROADWAY DESIGN MANUAL, SECTION 11-1.01.
DIRECTION OF TRAFFIC
TRAFFIC
TRAFFIC
DETAIL "A"
4-LANE WITH ONE-WAY TRAFFIC
RETROREFLECTIVE RED-CLEAR RAISED PAVEMENT MARKERS
6" CONTINUOUS WHITE EDGE STRIPE
6" SKIP WHITE
6" CONTINUOUS YELLOW EDGE STRIPE
℄ JOINT
TRAFFIC
TRAFFIC
OUTSIDE EDGE OF TRAVEL LANE
MEDIAN EDGE OF TRAVEL LANE
10'-0"
30'-0"
10'-0"
***

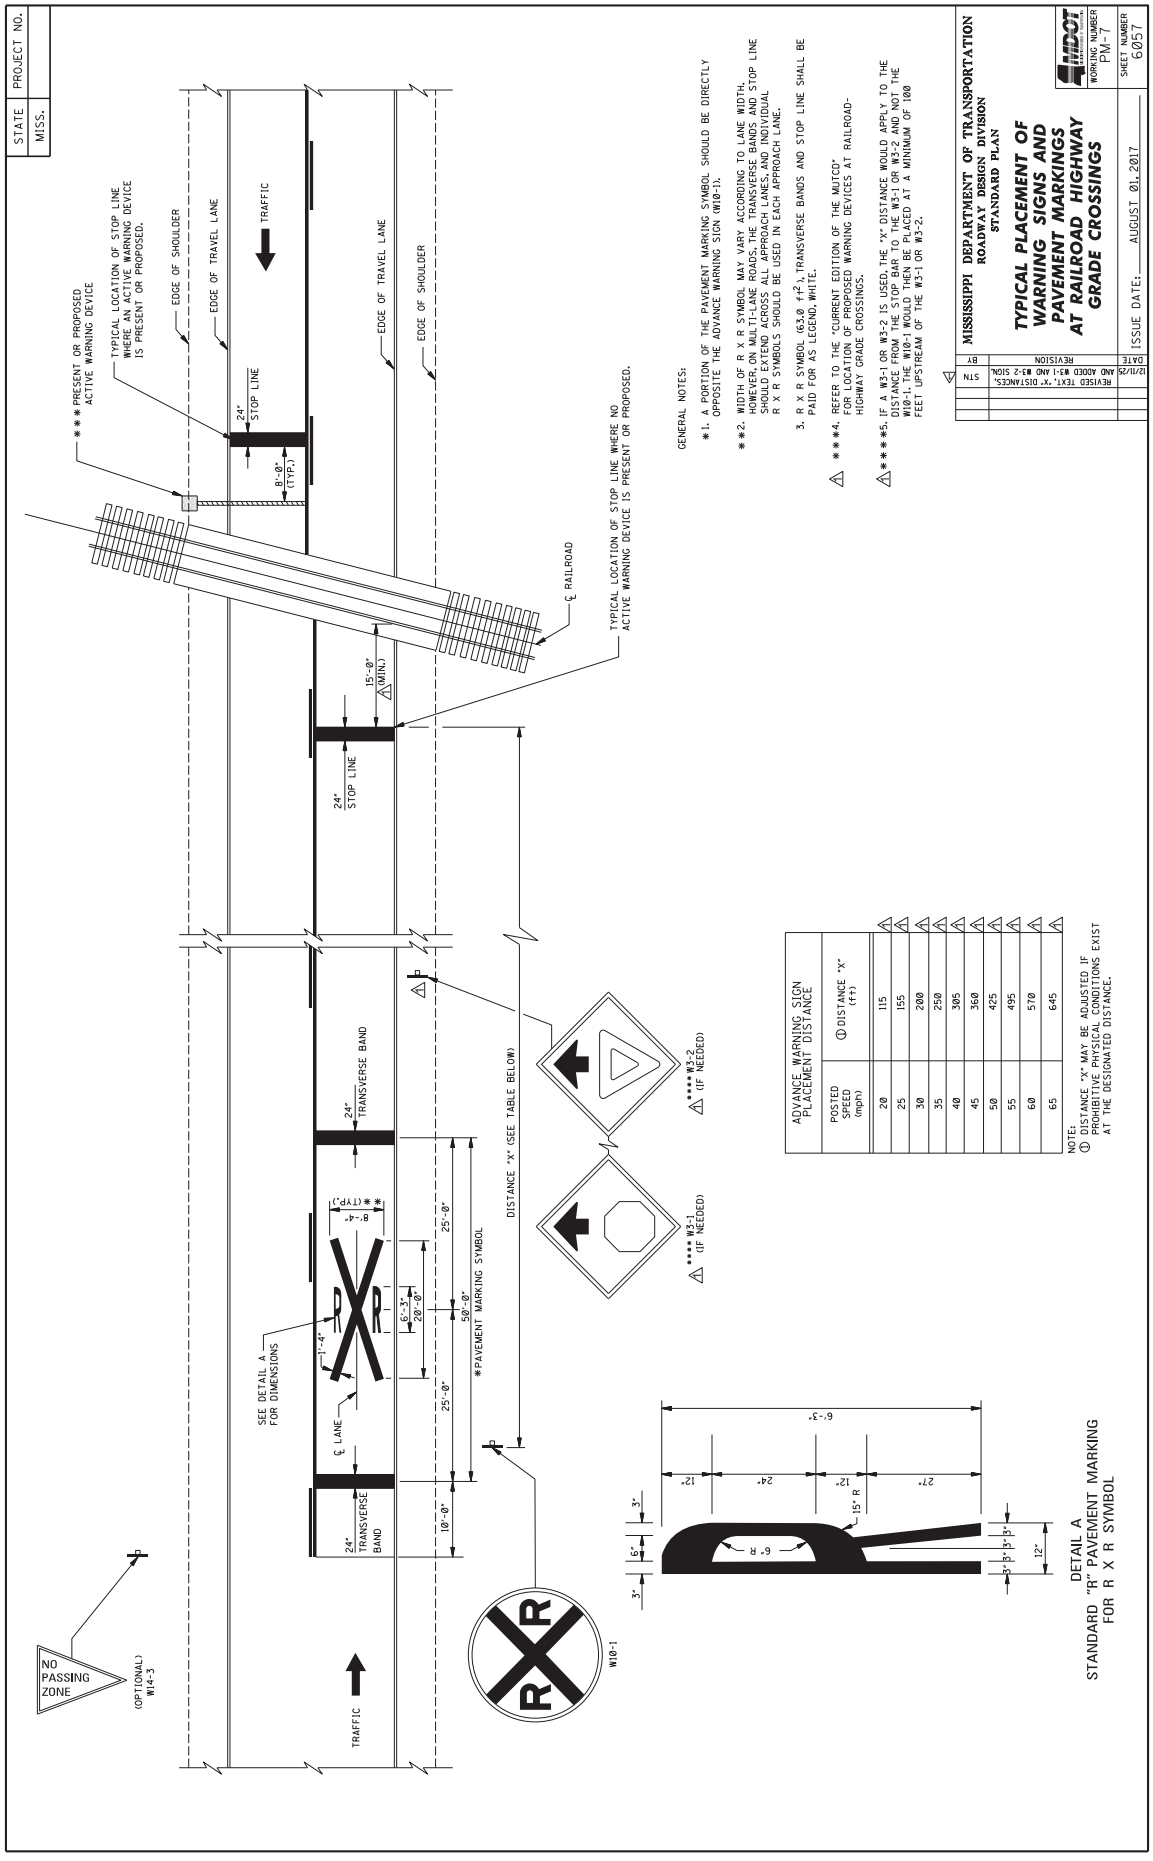

STATE MISS.
PROJECT NO.
TYPICAL STRIPING AND RAISED PAVEMENT MARKERS FOR 3-LANE SECTION
TYPICAL TWO-WAY ARROW INSTALLATION
NOTES: 1. CONSIDER EACH SEGMENT OF CONTINUOUS TWO-WAY LEFT TURN LANE SEPARATELY.
2. IF SEGMENT IS LESS THAN 350', PLACE ONE SET OF ARROWS IN EACH SEGMENT.
3. IF SEGMENT IS GREATER THAN 350', PLACE FIRST SET OF ARROWS 50' TO 100' FROM BEGINNING AND/OR END OF SEGMENT AND SPACE ADDITIONAL SETS OF ARROWS (250' O.C.).
TYPICAL STRIPING AND RAISED PAVEMENT MARKERS FOR 4-LANE SECTION
TYPICAL STRIPING AND RAISED PAVEMENT MARKERS FOR 5-LANE SECTION
TYPICAL STRIPING AND RAISED PAVEMENT MARKERS AT LEFT TURN LANES
* NOTE: USE DETAIL STRIPING IF LENGTH < 150' AT THIS LOCATION, OTHERWISE USE CONTINUOUS STRIPING.
DETAIL A LATERAL PLACEMENT OF PAVEMENT MARKERS
DETAIL B LATERAL PLACEMENT OF PAVEMENT MARKERS
GENERAL NOTE:
1. PAVEMENT MARKERS SHALL BE HIGH PERFORMANCE RAISED PAVEMENT MARKERS AS LISTED IN THE MDOT "APPROVED PRODUCTS LIST".
STN BY DATE REVISION
12/1/25 REVISE RPMS AND TEXT
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
PAVEMENT MARKING DETAILS FOR 3-LANE 4-LANE AND 5-LANE UNDIVIDED ROADWAYS
ISSUE DATE: AUGUST 01, 2017
WORKING NUMBER FM-2
SHEET NUMBER 6052

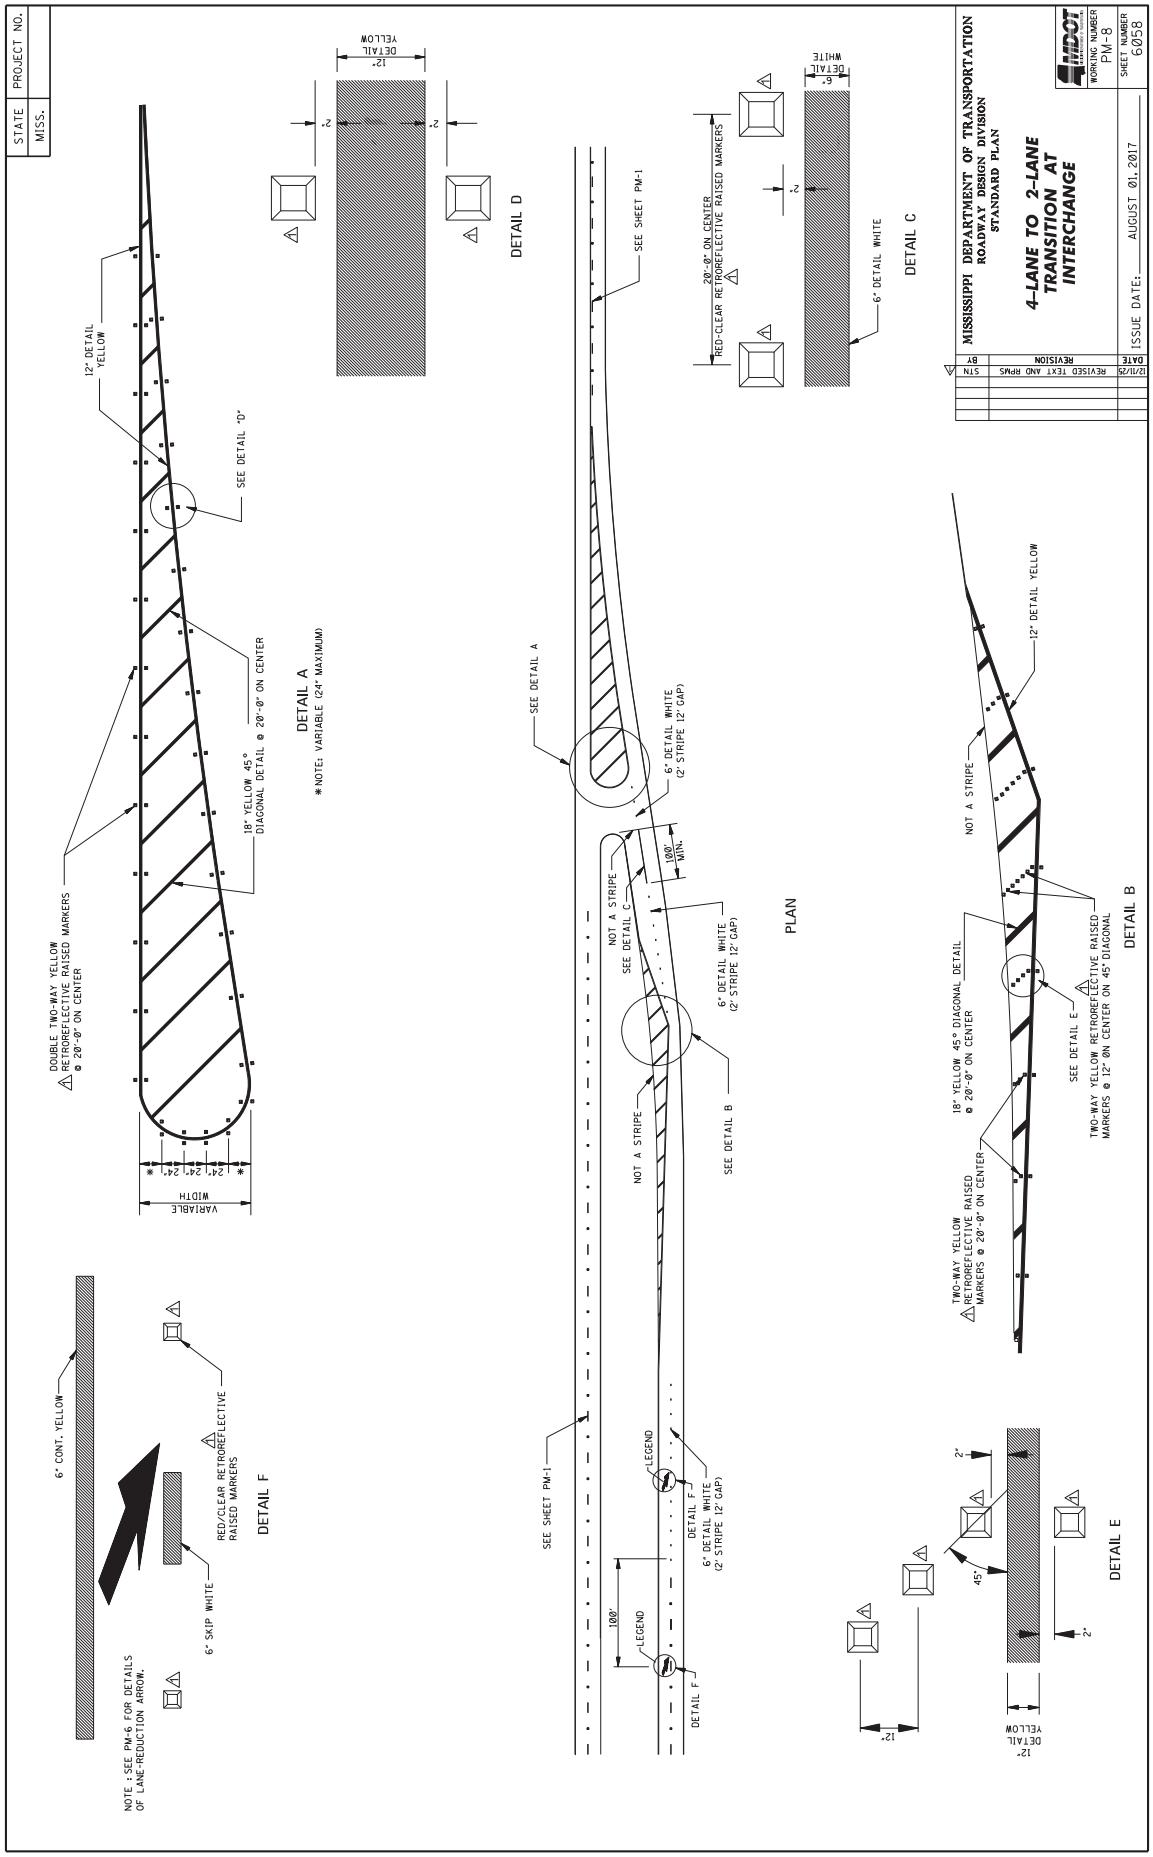

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
PAVEMENT MARKING DETAILS FOR INTERCHANGE ENTRANCE RAMPS (PARALLEL AND TAPERED)
WORKING NUMBER PM-3
SHEET NUMBER 6053
ISSUE DATE: AUGUST 01, 2017
REVISION
DATE
BY
12/11/20 REVISE RPMS AND TEXT STN
PARALLEL ACCELERATION LANE ENTRANCE RAMP
TAPERED ACCELERATION LANE ENTRANCE RAMP
DETAIL A
DETAIL B
DETAIL C
GENERAL NOTES:
*1. SEE SHEET PM-1 FOR THE PLACEMENT OF LANE-LINE STRIPE WITH RESPECT TO THE PAVEMENT JOINT AND FOR THE PLACEMENT OF THE EDGE LINE WITH RESPECT TO THE OUTSIDE EDGE OF THE TRAVELED WAY.
**2. ON THE MAIN FACILITY, RETROREFLECTIVE RED-CLEAR RAISED PAVEMENT MARKERS ON A 40'-0" SPACING WILL BE REQUIRED ON LANE-LINE(S) THROUGH ALL INTERCHANGE AREAS BEGINNING 1000' IN ADVANCE (IN DIRECTION OF TRAFFIC) OF THE EXIT RAMP TAPER AND CONTINUING THROUGH THE INTERCHANGE TO THE END OF THE ENTRANCE RAMP TAPER.
3. PAVEMENT MARKERS SHALL BE HIGH PERFORMANCE RETROREFLECTIVE RAISED PAVEMENT MARKERS AS LISTED IN THE MDOT "APPROVED PRODUCTS LIST."
NOTE: 2'-12' SKIP WHITE EXTENDS TO THE TERMINATION POINT OF THE ACCELERATION LANE.

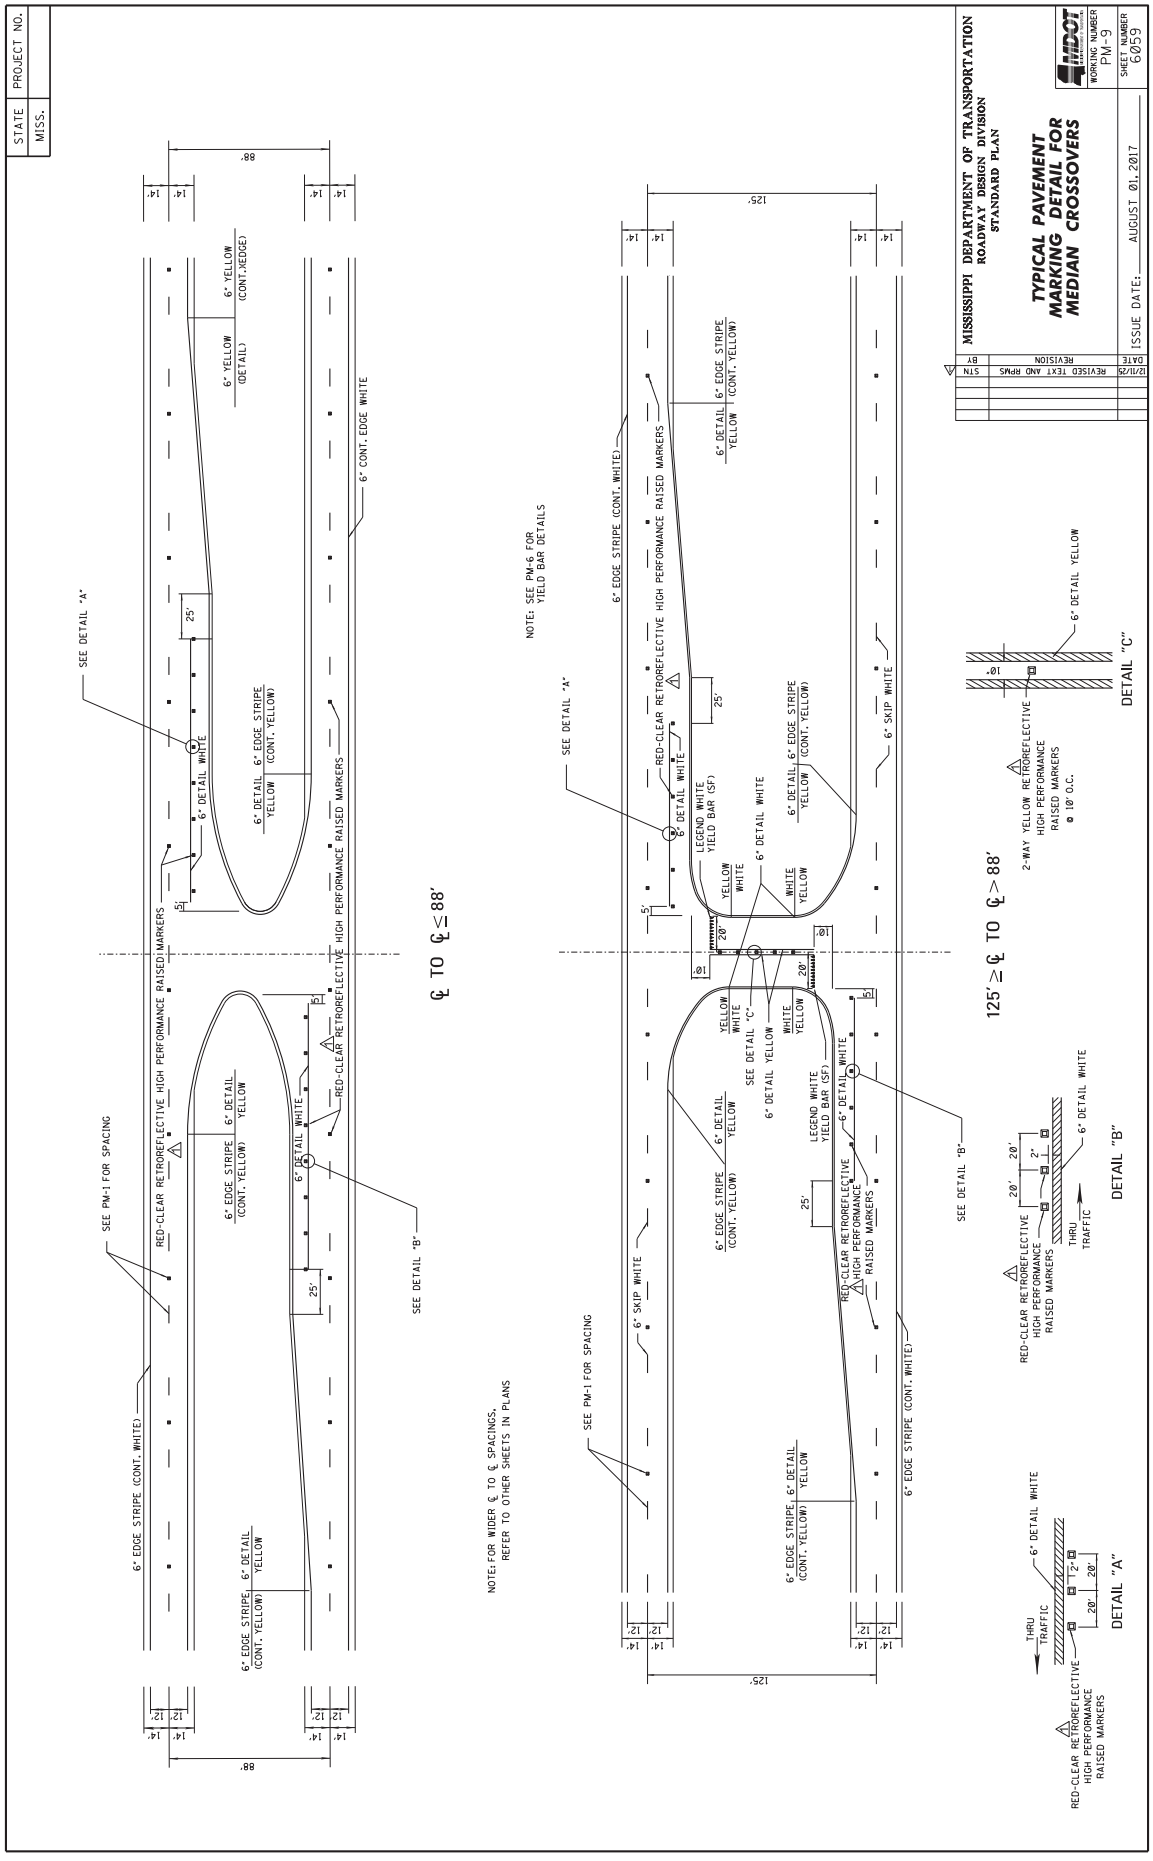

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
PAVEMENT MARKING DETAILS FOR INTERCHANGE EXIT RAMPS
(PARALLEL AND TAPERED)
WORKING NUMBER PM-4
SHEET NUMBER 6054
ISSUE DATE: AUGUST 01, 2017
DATE REVISION BY
12/1/23 REVISE RMPS AND TEXT STN
TAPERED DECELERATION LANE EXIT RAMP
PARALLEL DECELERATION LANE EXIT RAMP
DETAIL A
DETAIL B
DETAIL C
GENERAL NOTES:
* 1. SEE SHEET PM-1 FOR THE PLACEMENT OF LANE-LINE STRIPE WITH RESPECT TO THE PAVEMENT JOINTS AND FOR THE PLACEMENT OF THE EDGE LINE WITH RESPECT TO THE OUTSIDE EDGE OF THE TRAVELED WAY.
* * 2. ON THE MAIN FACILITY, RETROREFLECTIVE RED-CLEAR RAISED PAVEMENT MARKERS ON A 40'-0" SPACING WILL BE REQUIRED ON LANE-LINE(S) THROUGH ALL INTERCHANGE AREAS BEGINNING 1000' IN ADVANCE (IN DIRECTION OF TRAFFIC) OF THE EXIT RAMP TAPER AND CONTINUING THROUGH THE INTERCHANGE TO THE END OF THE ENTRANCE RAMP TAPER.
3. PAVEMENT MARKERS SHALL BE HIGH PERFORMANCE RETROREFLECTIVE RAISED PAVEMENT MARKERS AS LISTED IN THE MDOT "APPROVED PRODUCTS LIST."

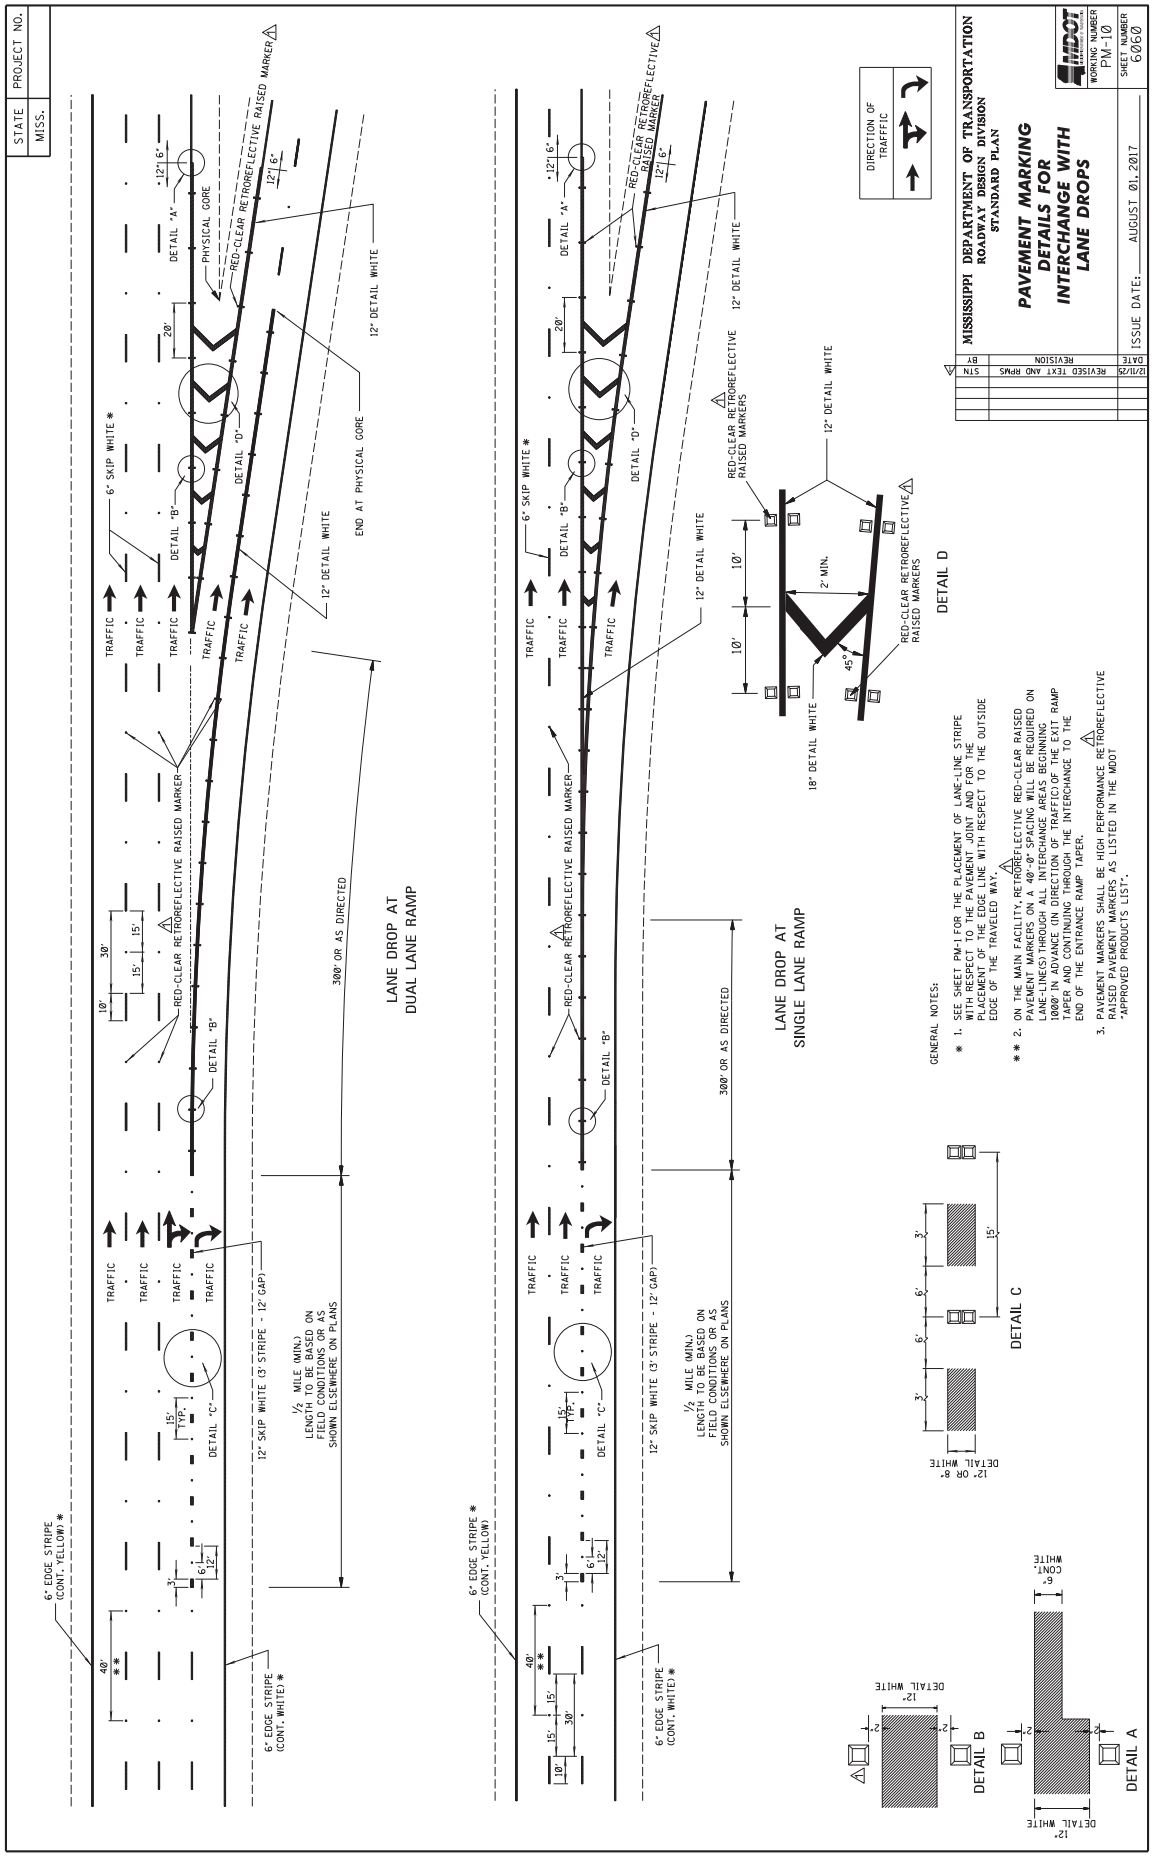

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
PAVEMENT MARKING LEGEND DETAILS
WORKING NUMBER PM-5
SHEET NUMBER 6055
ISSUE DATE: AUGUST 01, 2017
GENERAL NOTES:
1. TWO HORIZONTAL GAPS (CAUSED BY TEMPLATE CONNECTORS) OF 1/2" OR LESS AND EXTENDING THE FULL WIDTH ARE PERMITTED IN EACH LETTER.
2. PAVEMENT MARKING LETTERS, NUMERALS, SYMBOLS, AND ARROWS SHALL BE INSTALLED IN ACCORDANCE WITH THE DESIGN DETAILS IN THE PAVEMENT MARKINGS CHAPTER OF THE STANDARD HIGHWAY SIGNS PUBLICATION AS REFERENCED IN SECTION 1A.05 OF THE LATEST EDITION OF THE MUTCD.
3. WORD, SYMBOL, AND ARROW MARKINGS SHALL BE WHITE UNLESS OTHERWISE NOTED IN THE PLANS.
4. PAY QUANTITIES FOR PAVEMENT MARKING LEGENDS ARE AS FOLLOWS:
PAY QUANTITIES
LEGEND | AREA (FT²)
STOP 24.6
RIGHT 28.6
LEFT 19.5
TURN 27.3
LANE 22.7
AHEAD 32.3
YIELD 26.8
EXIT 18.5
SIGNAL 32.5
SCHOOL 35.5
STN BY REVISION DATE
12/1/25 REVISED GENERAL NOTES

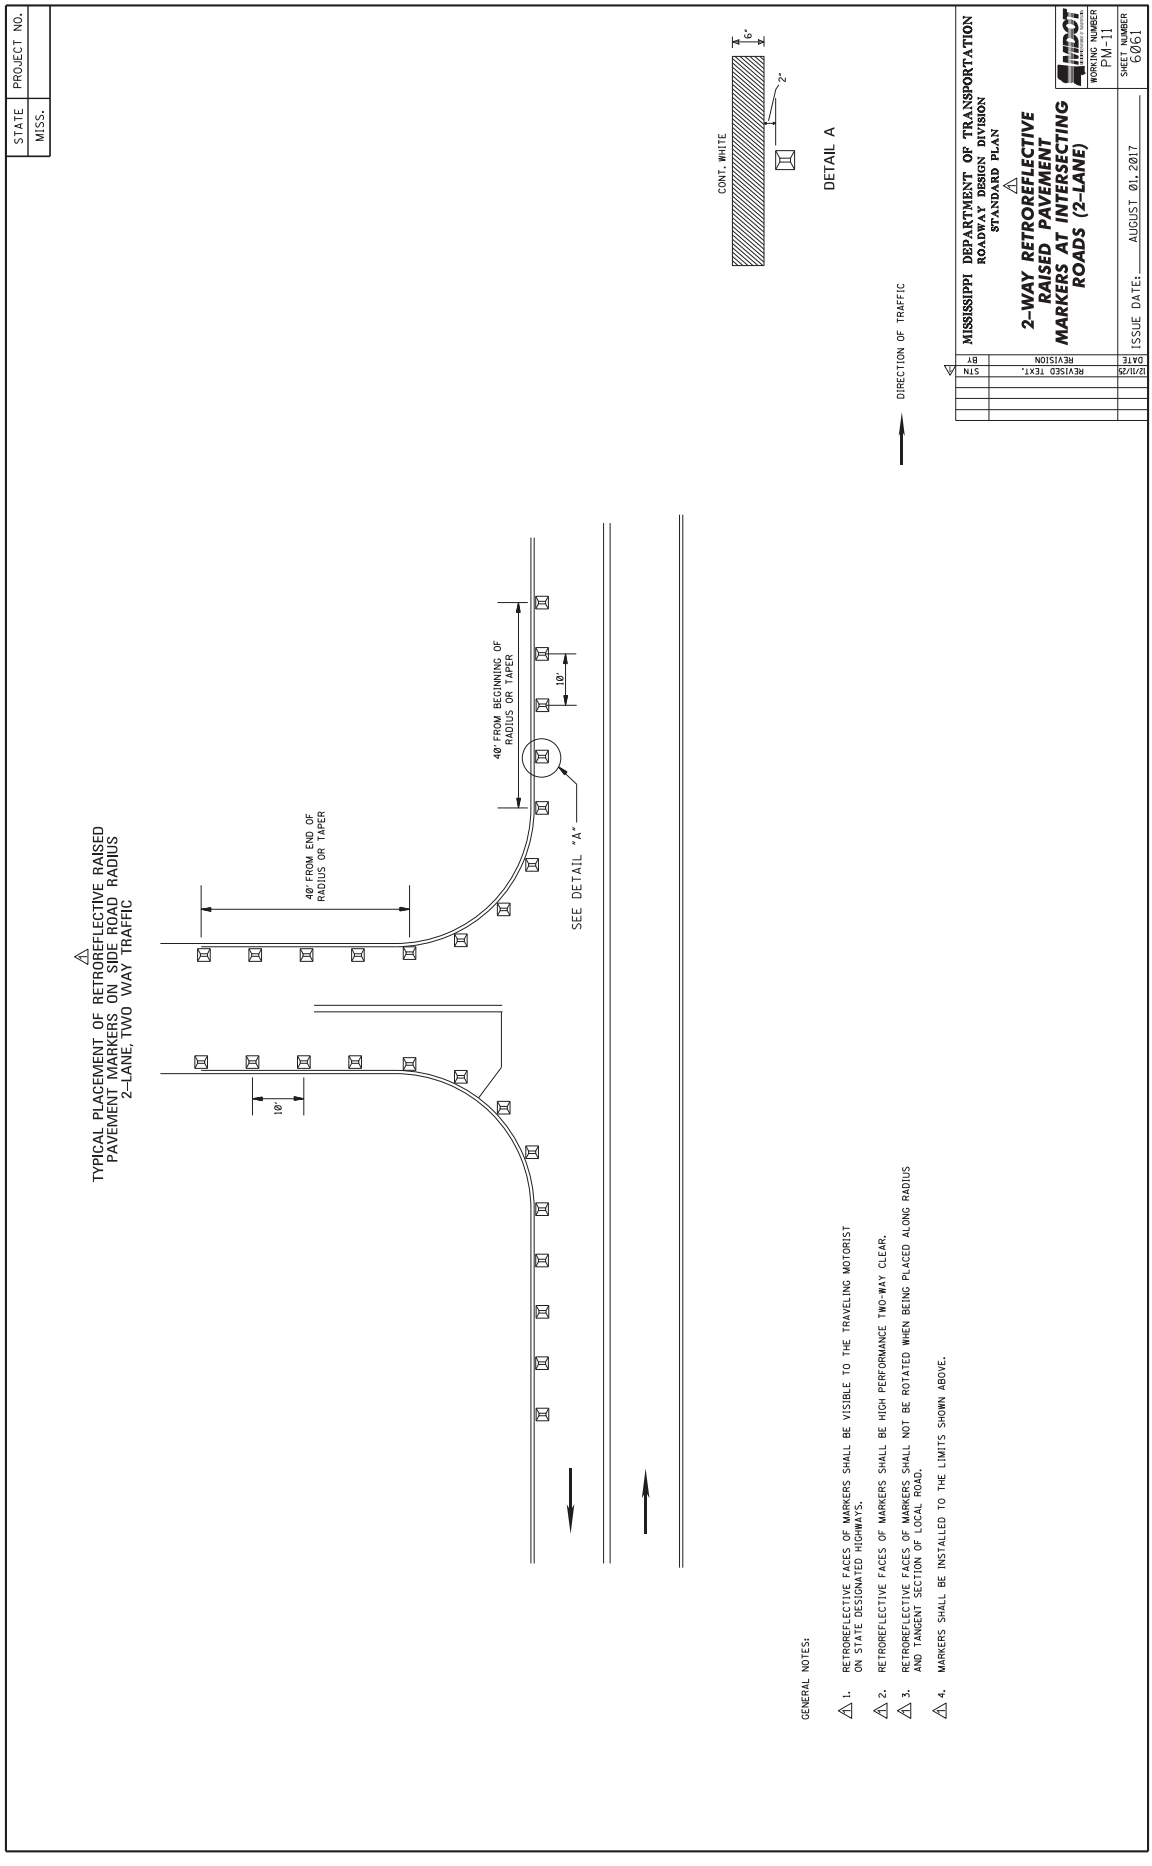

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
PAVEMENT MARKING LEGEND DETAILS
WORKING NUMBER PM-6
SHEET NUMBER 6056
ISSUE DATE: AUGUST 01, 2017
REVISION
REVISED GENERAL NOTES
GENERAL NOTES:
1. TWO HORIZONTAL GAPS (CAUSED BY TEMPLATE CONNECTORS) OF 1/2" OR LESS AND EXTENDING THE FULL WIDTH ARE PERMITTED IN EACH LETTER.
2. PAVEMENT MARKING LETTERS, NUMERALS, SYMBOLS, AND ARROWS SHALL BE INSTALLED IN ACCORDANCE WITH THE DESIGN DETAILS IN THE PAVEMENT MARKINGS CHAPTER OF THE "STANDARD HIGHWAY SIGNS" PUBLICATION AS REFERENCED IN SECTION 1A.05 OF THE LATEST EDITION OF THE MUTCD.
3. WORD, SYMBOL AND ARROW MARKINGS SHALL BE WHITE UNLESS OTHERWISE NOTED IN THE PLANS.
4. PAY QUANTITIES FOR PAVEMENT MARKING LEGENDS ARE AS FOLLOWS:
PAY QUANTITIES
LEGEND/SYMBOL
AREA (ft²)
ONLY 22.0
TURN ARROW 16.4
THRU ARROW 12.3
COMB. ARROW 27.5
1-WAY ARROW 24.3
LANE REDUCTION ARROW 40.0
COMBINATION ARROW
LANE-REDUCTION ARROW
THRU ARROW
TURN ARROW
YIELD LINE
TRAFFIC
VARIABLE (EXTEND ACROSS APPROACH LANES)
1-WAY ARROW

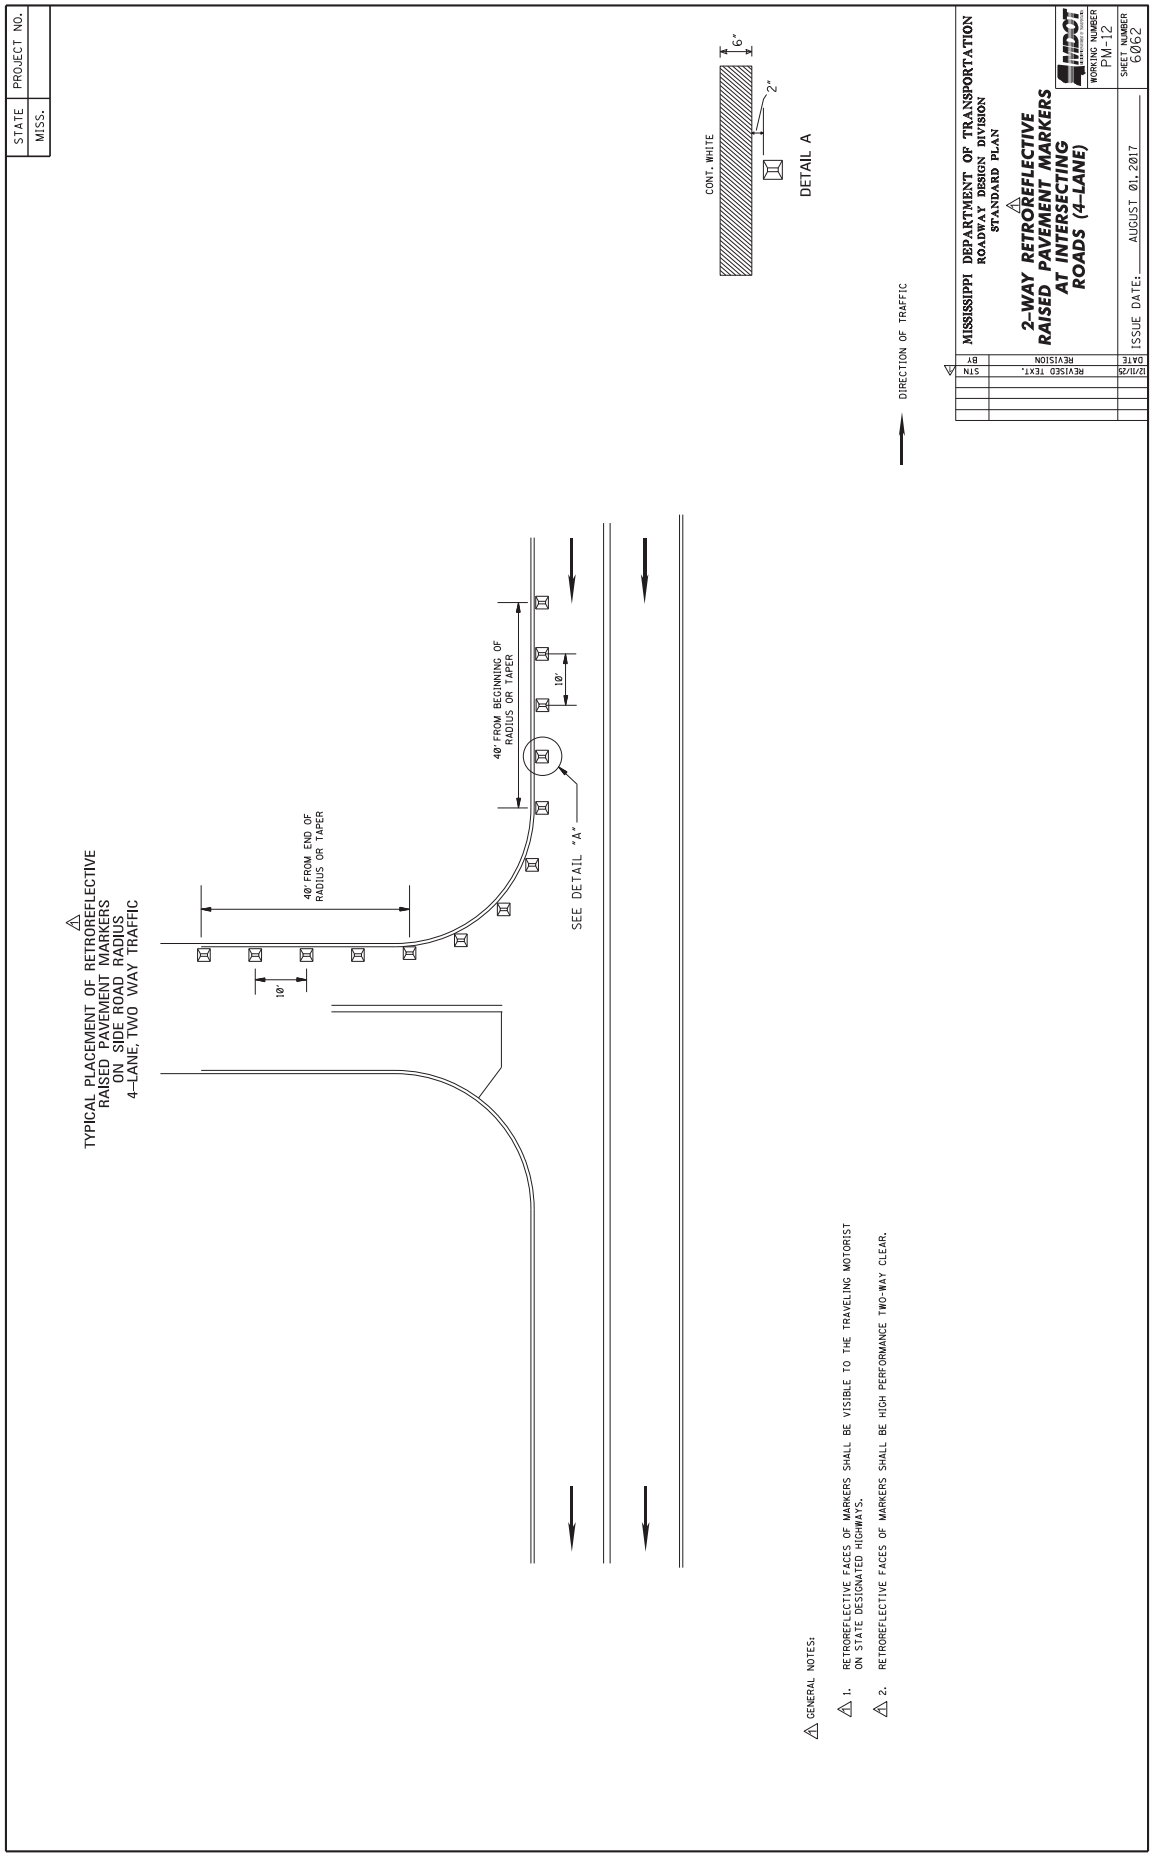

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
TYPICAL PLACEMENT OF WARNING SIGNS AND PAVEMENT MARKINGS AT RAILROAD HIGHWAY GRADE CROSSINGS
WORKING NUMBER FM-7
SHEET NUMBER 6057
ISSUE DATE: AUGUST 01, 2017
REVISED TEXT, 'X' DISTANCES, AND ADDED M3-1 AND M3-2 SIGN.
12/11/20
STN
BY
DATE
REVISION
GENERAL NOTES:
*1. A PORTION OF THE PAVEMENT MARKING SYMBOL SHOULD BE DIRECTLY OPPOSITE THE ADVANCE WARNING SIGN (W10-1).
**2. WIDTH OF R X R SYMBOL MAY VARY ACCORDING TO LANE WIDTH. HOWEVER, ON MULTI-LANE ROADS, THE TRANSVERSE BANDS AND STOP LINE SHOULD EXTEND ACROSS ALL APPROACH LANES, AND INDIVIDUAL R X R SYMBOLS SHOULD BE USED IN EACH APPROACH LANE.
3. R X R SYMBOL (63.0 ft²), TRANSVERSE BANDS AND STOP LINE SHALL BE PAID FOR AS LEGEND, WHITE.
***4. REFER TO THE "CURRENT EDITION OF THE MUTCD" FOR LOCATION OF PROPOSED WARNING DEVICES AT RAILROAD-HIGHWAY GRADE CROSSINGS.
****5. IF A W3-1 OR W3-2 IS USED, THE 'X' DISTANCE WOULD APPLY TO THE DISTANCE FROM THE STOP BAR TO THE W10-1 AND TO THE W10-1, THE W10-1 WOULD THEN BE PLACED AT A MINIMUM OF 100 FEET UPSTREAM OF THE W3-1 OR W3-2.
*** PRESENT OR PROPOSED ACTIVE WARNING DEVICE
TYPICAL LOCATION OF STOP LINE WHERE AN ACTIVE WARNING DEVICE IS PRESENT OR PROPOSED.
EDGE OF SHOULDER
EDGE OF TRAVEL LANE
TRAFFIC
24" STOP LINE
8'-0" (TYP.)
℄ RAILROAD
TYPICAL LOCATION OF STOP LINE WHERE NO ACTIVE WARNING DEVICE IS PRESENT OR PROPOSED.
15'-0" (MIN.)
24" TRANSVERSE BAND
SEE DETAIL A FOR DIMENSIONS
*PAVEMENT MARKING SYMBOL
DISTANCE "X" (SEE TABLE BELOW)
**** W3-2 (IF NEEDED)
**** W3-1 (IF NEEDED)
W10-1
NO PASSING ZONE
(OPTIONAL) W14-3
ADVANCE WARNING SIGN PLACEMENT DISTANCE
POSTED SPEED (mph)
① DISTANCE "X" (ft)
20 115
25 155
30 200
35 250
40 305
45 360
50 425
55 495
60 570
65 645
NOTE:
① DISTANCE "X" MAY BE ADJUSTED IF PROHIBITIVE PHYSICAL CONDITIONS EXIST AT THE DESIGNATED DISTANCE.
DETAIL A
STANDARD "R" PAVEMENT MARKING FOR R X R SYMBOL

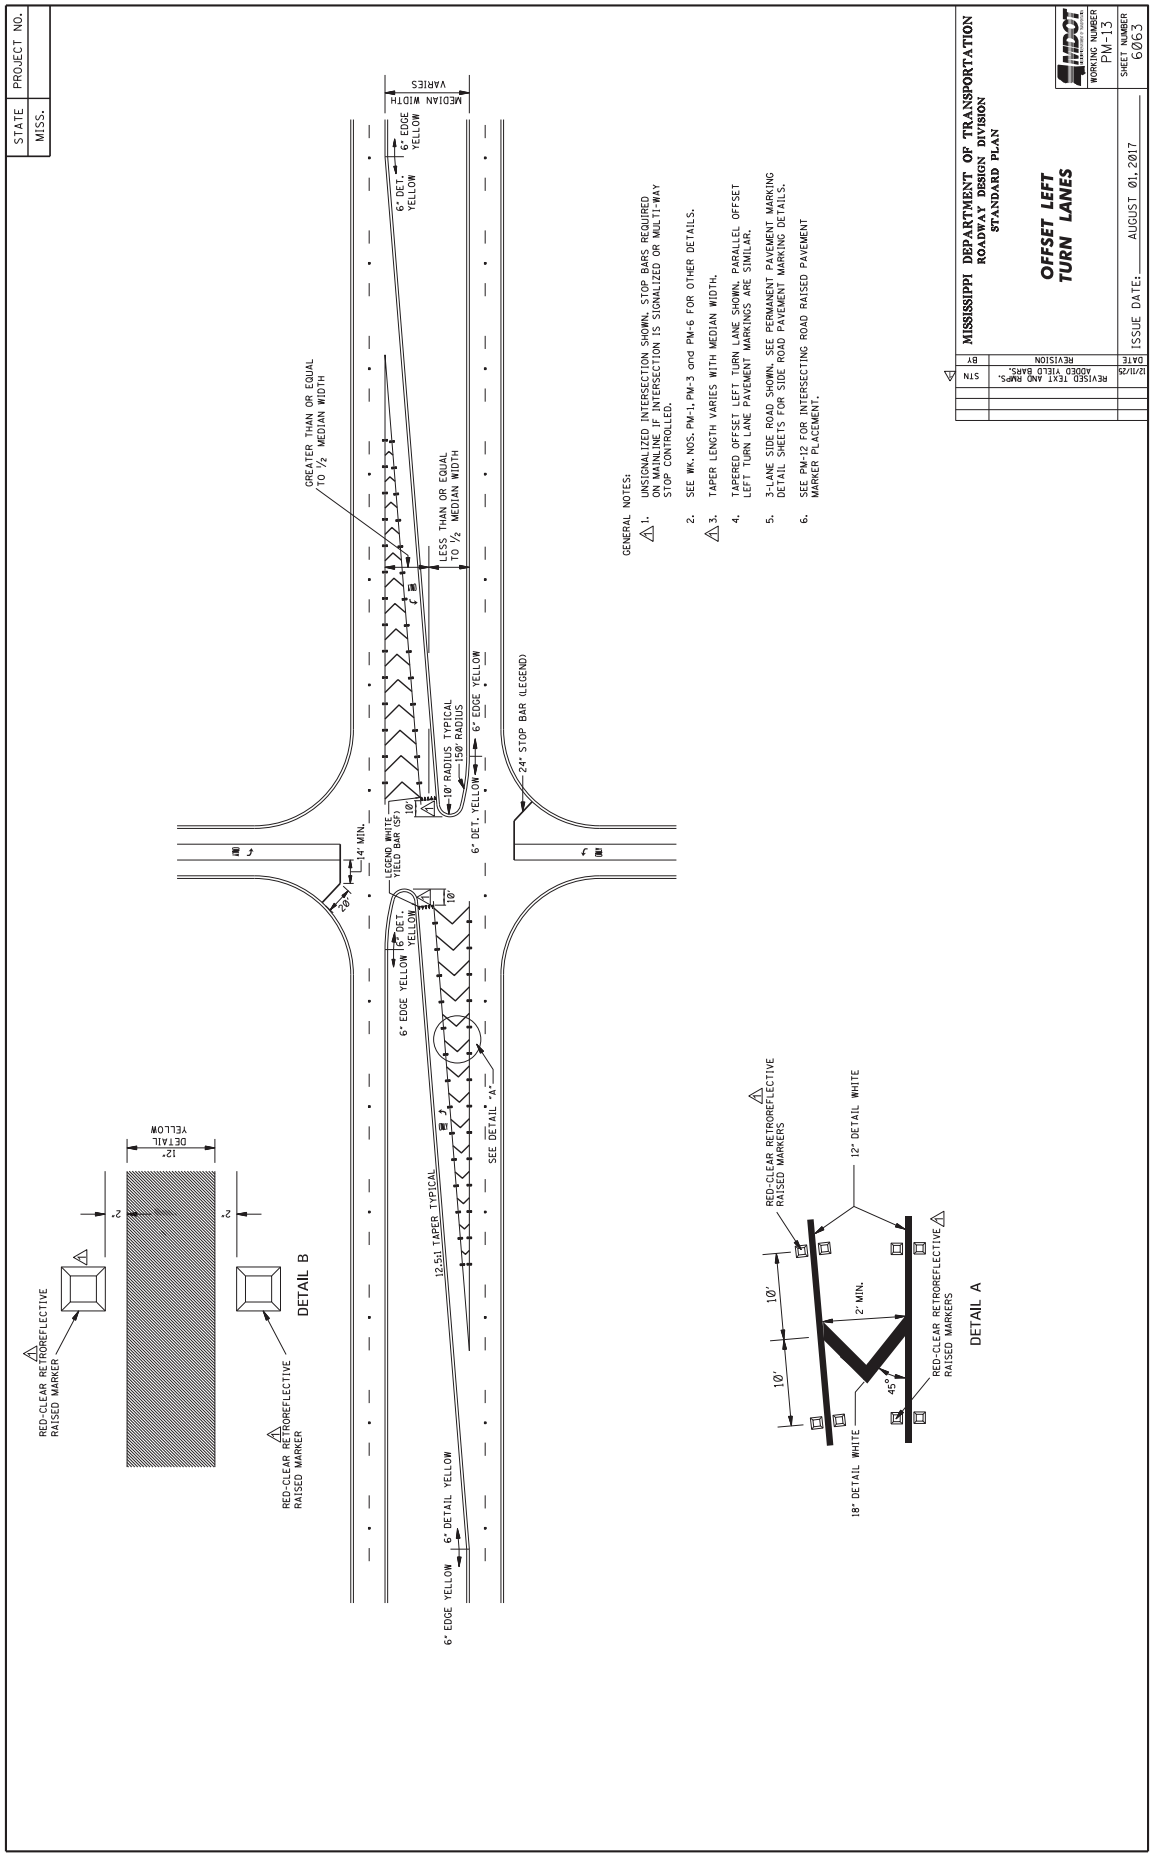

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
4-LANE TO 2-LANE TRANSITION AT INTERCHANGE
WORKING NUMBER PM-8
SHEET NUMBER 6058
ISSUE DATE: AUGUST 01, 2017
DATE REVISION BY STN
12/11/25 REVISED TEXT AND RPMS
DOUBLE TWO-WAY YELLOW RETROREFLECTIVE RAISED MARKERS @ 20'-0" ON CENTER
12" DETAIL YELLOW
SEE DETAIL "D"
18" YELLOW 45° DIAGONAL DETAIL @ 20'-0" ON CENTER
VARIABLE WIDTH
24" 24" 24" 24"
DETAIL A
*NOTE: VARIABLE (24" MAXIMUM)
DETAIL D
12" DETAIL YELLOW
2"
20'-0" ON CENTER
RED-CLEAR RETROREFLECTIVE RAISED MARKERS
6" DETAIL WHITE
DETAIL C
SEE SHEET PM-1
SEE DETAIL A
6" DETAIL WHITE (2" STRIPE 12' GAP)
100' MIN.
NOT A STRIPE
SEE DETAIL C
SEE DETAIL B
PLAN
LEGEND
DETAIL F
6" CONT. YELLOW
RED/CLEAR RETROREFLECTIVE RAISED MARKERS
6" SKIP WHITE
NOTE : SEE PM-6 FOR DETAILS OF LANE-REDUCTION ARROW.
DETAIL F
TWO-WAY YELLOW RETROREFLECTIVE RAISED MARKERS @ 20'-0" ON CENTER
18" YELLOW 45° DIAGONAL DETAIL @ 20'-0" ON CENTER
TWO-WAY YELLOW RETROREFLECTIVE RAISED MARKERS @ 12' ON CENTER ON 45° DIAGONAL
SEE DETAIL E
DETAIL B
45°
DETAIL E

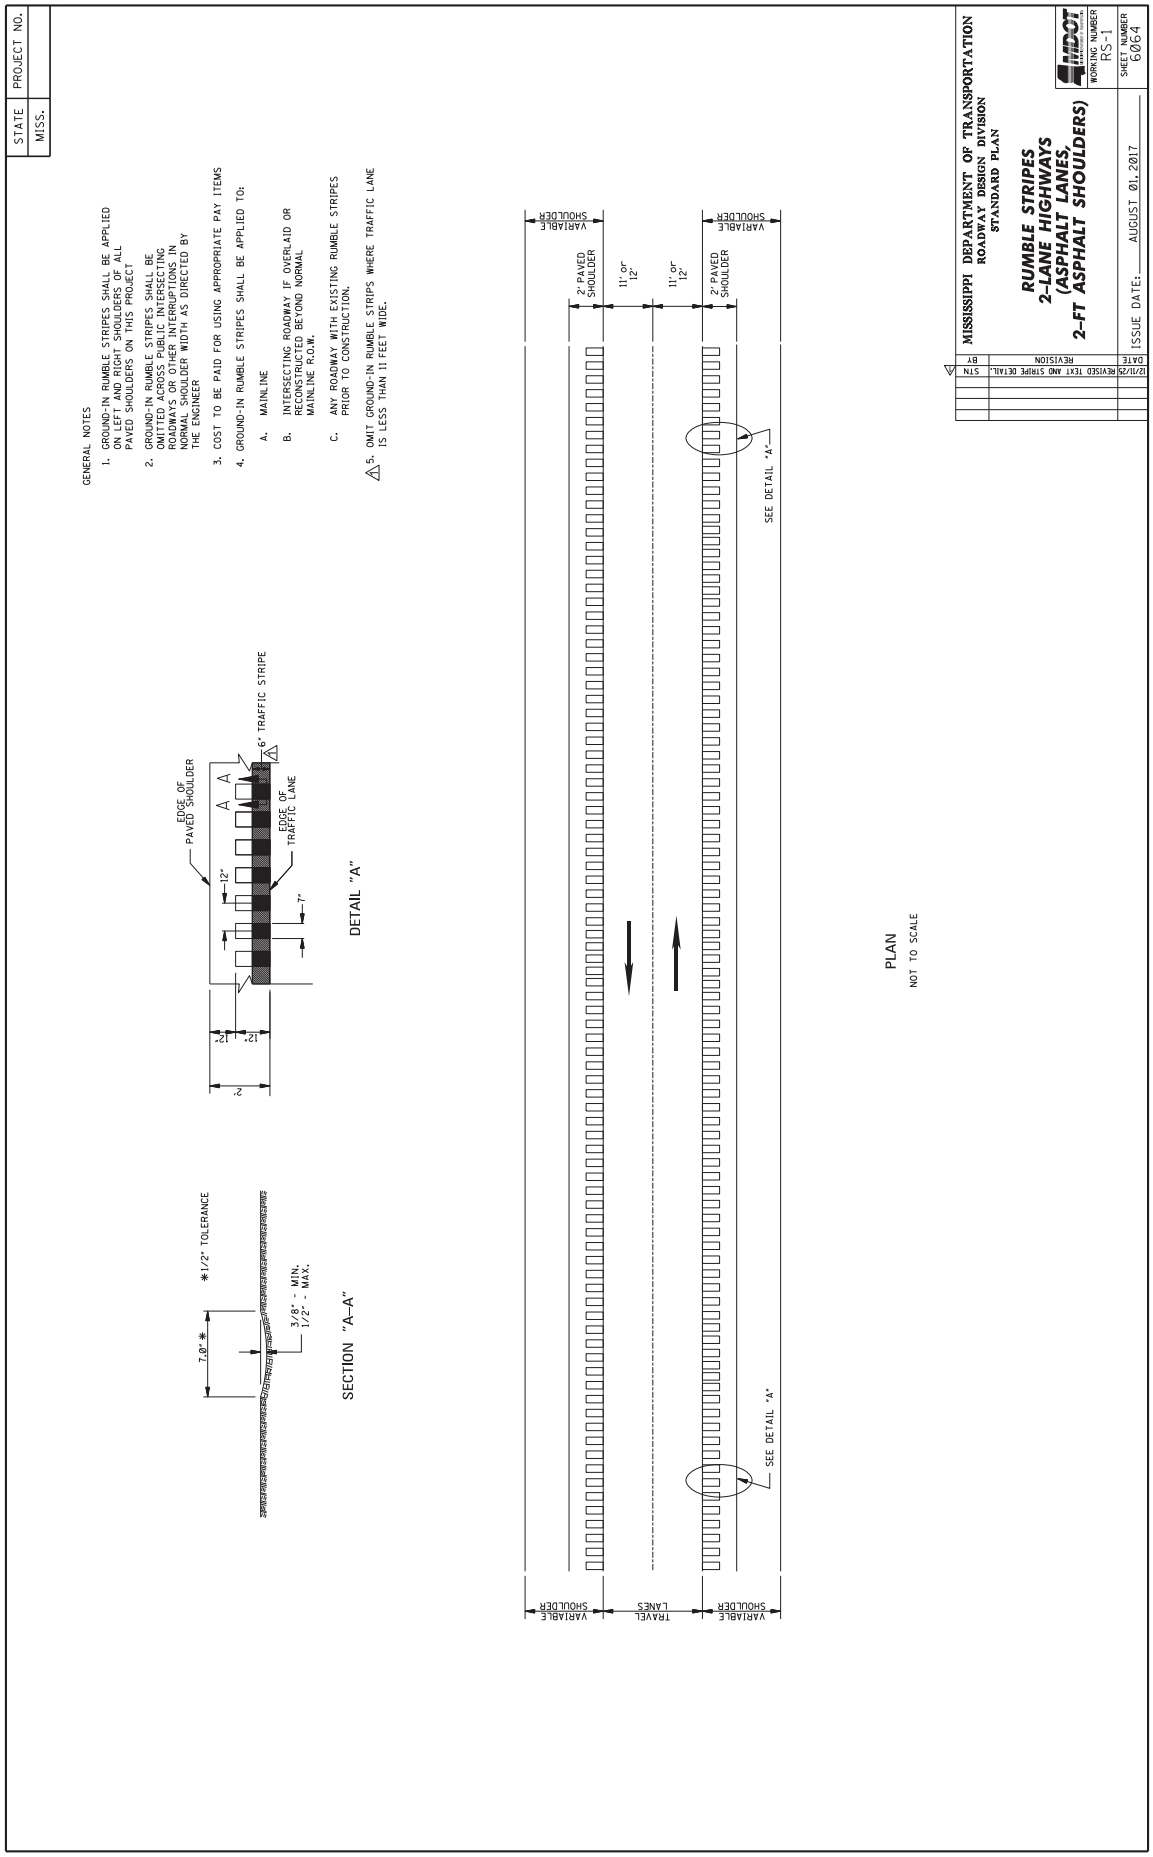

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
TYPICAL PAVEMENT MARKING DETAIL FOR MEDIAN CROSSOVERS
WORKING NUMBER PM-9
SHEET NUMBER 6059
ISSUE DATE: AUGUST 01, 2017
DATE REVISION BY
12/11/25 REVISED TEXT AND RPMS STN
SEE DETAIL "A"
SEE DETAIL "B"
SEE PM-1 FOR SPACING
RED-CLEAR RETROREFLECTIVE HIGH PERFORMANCE RAISED MARKERS
6" EDGE STRIPE (CONT. WHITE)
6" DETAIL WHITE
6" EDGE STRIPE (CONT. YELLOW)
6" DETAIL YELLOW
6" YELLOW (DETAIL)
6" YELLOW (CONT.XEDGE)
6" CONT. EDGE WHITE
℄ TO ℄≤88'
NOTE: FOR WIDER ℄ TO ℄ SPACINGS, REFER TO OTHER SHEETS IN PLANS
NOTE: SEE PM-6 FOR YIELD BAR DETAILS
LEGEND WHITE YIELD BAR (SF)
6" SKIP WHITE
6" EDGE STRIPE (CONT. WHITE)
SEE DETAIL "C"
125' ≥ ℄ TO ℄ > 88'
2-WAY YELLOW RETROREFLECTIVE HIGH PERFORMANCE RAISED MARKERS @ 10' O.C.
DETAIL "C"
DETAIL "A"
DETAIL "B"
THRU TRAFFIC

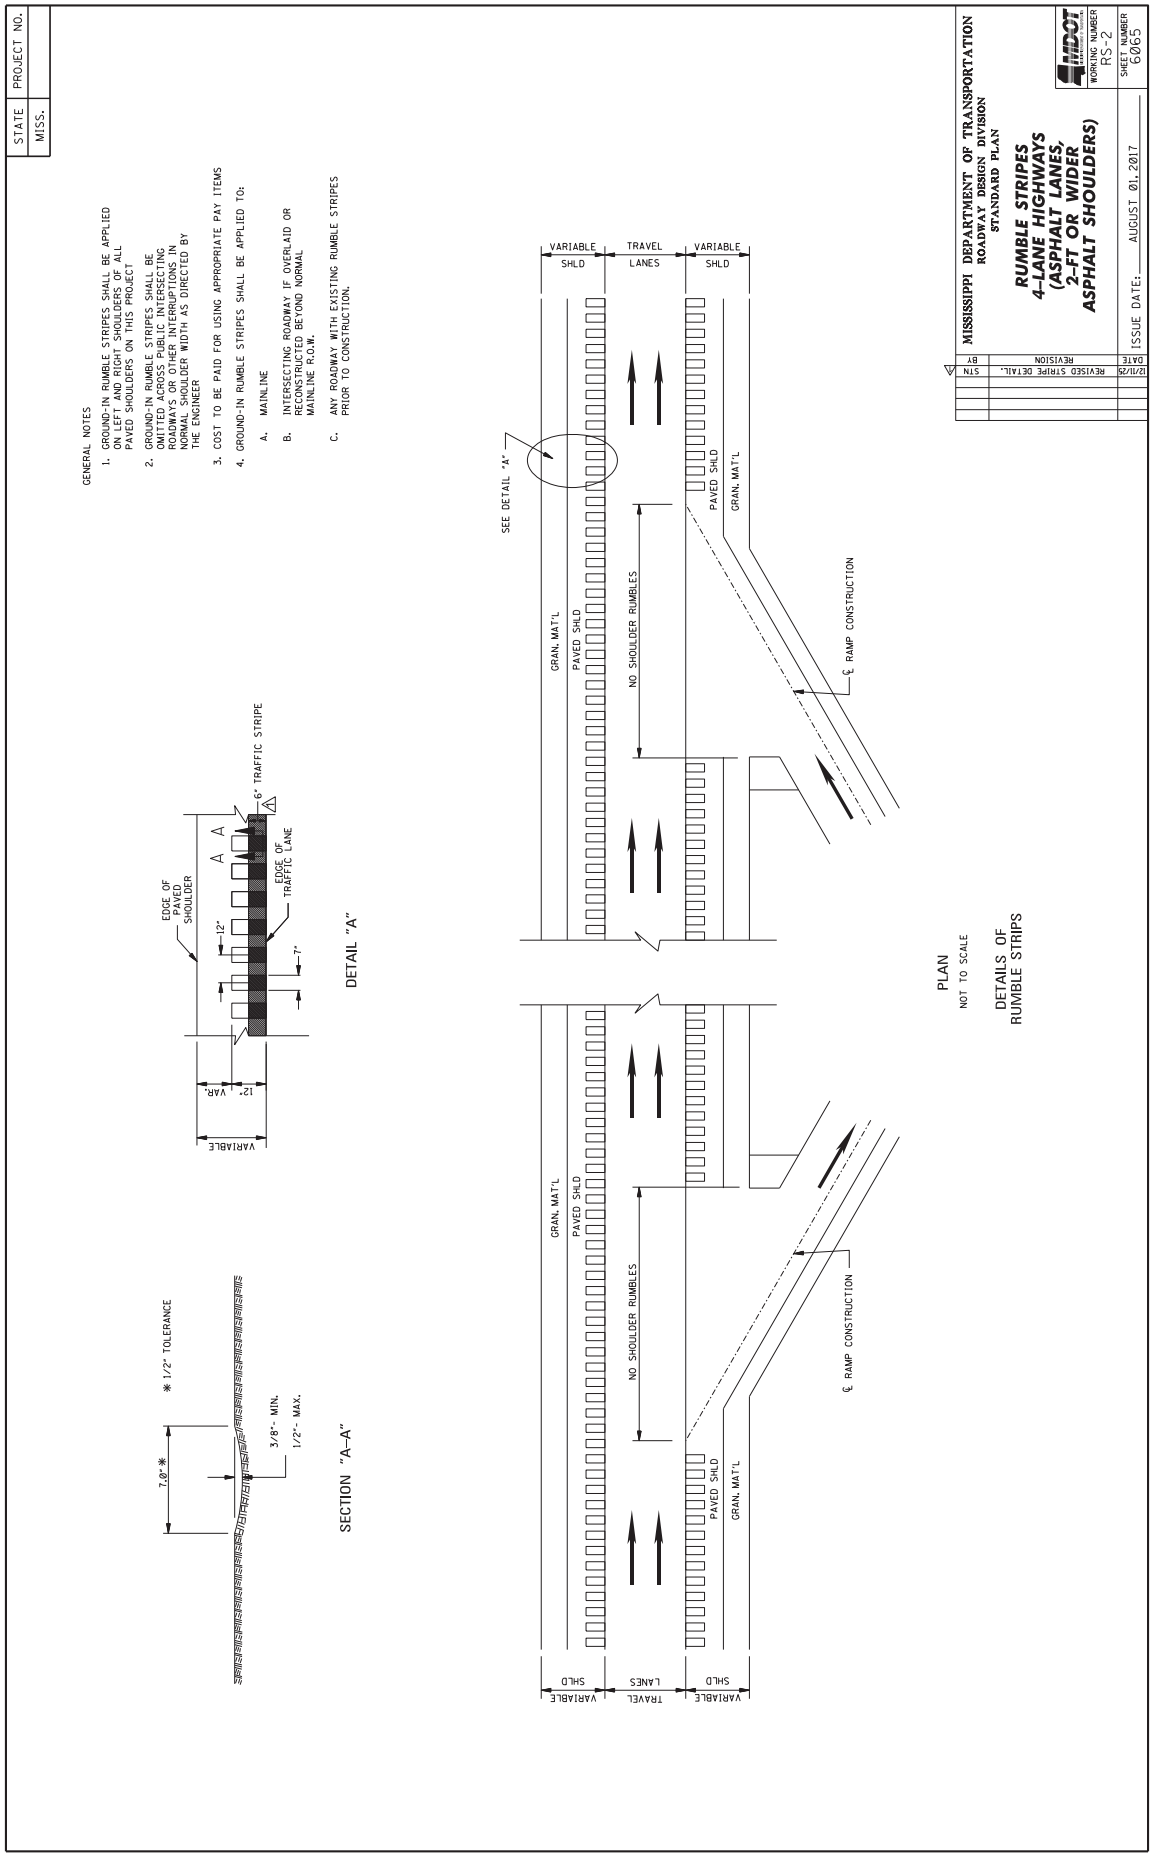

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
PAVEMENT MARKING DETAILS FOR INTERCHANGE WITH LANE DROPS
WORKING NUMBER PM-10
SHEET NUMBER 6060
ISSUE DATE: AUGUST 01, 2017
REVISED TEXT AND RPMS
LANE DROP AT DUAL LANE RAMP
LANE DROP AT SINGLE LANE RAMP
DETAIL D
DETAIL C
DETAIL B
DETAIL A
GENERAL NOTES:
* 1. SEE SHEET PM-1 FOR THE PLACEMENT OF LANE-LINE STRIPE WITH RESPECT TO THE PAVEMENT JOINT AND FOR THE PLACEMENT OF THE EDGE LINE WITH RESPECT TO THE OUTSIDE EDGE OF THE TRAVELED WAY.
** 2. ON THE MAIN FACILITY, RETROREFLECTIVE RED-CLEAR RAISED PAVEMENT MARKERS ON A 40'-0" SPACING WILL BE REQUIRED ON LANE-LINE(S) THROUGH ALL INTERCHANGE AREAS BEGINNING 1000' IN ADVANCE (IN DIRECTION OF TRAFFIC) OF THE EXIT RAMP TAPER AND CONTINUING THROUGH THE INTERCHANGE TO THE END OF THE ENTRANCE RAMP TAPER.
3. PAVEMENT MARKERS SHALL BE HIGH PERFORMANCE RETROREFLECTIVE RAISED PAVEMENT MARKERS AS LISTED IN THE MDOT "APPROVED PRODUCTS LIST".
DIRECTION OF TRAFFIC

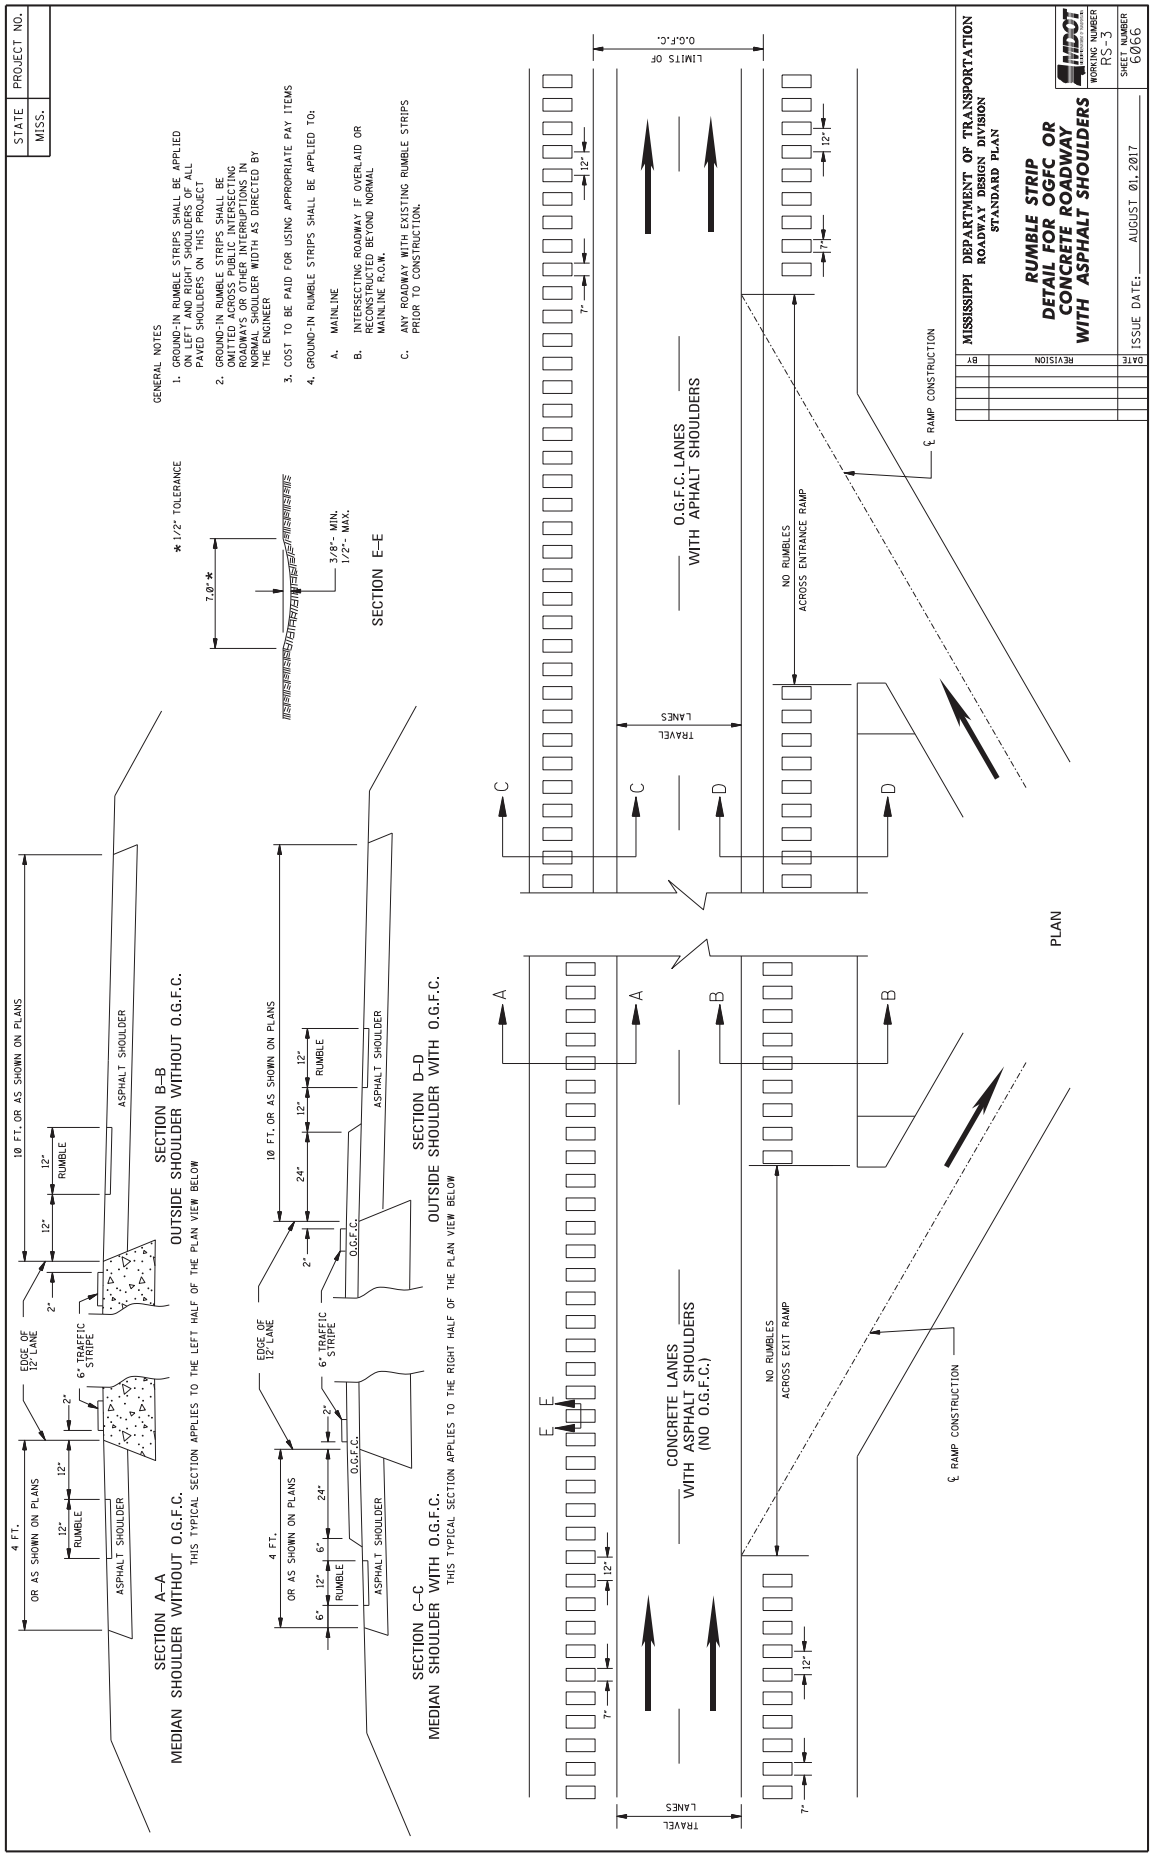

STATE
MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
2-WAY RETROREFLECTIVE RAISED PAVEMENT MARKERS AT INTERSECTING ROADS (2-LANE)
WORKING NUMBER PM-11
SHEET NUMBER 6061
ISSUE DATE: AUGUST 01, 2017
REVISED TEXT.
DATE
REVISION
BY
STN
TYPICAL PLACEMENT OF RETROREFLECTIVE RAISED PAVEMENT MARKERS ON SIDE ROAD RADIUS 2-LANE, TWO WAY TRAFFIC
40' FROM END OF RADIUS OR TAPER
40' FROM BEGINNING OF RADIUS OR TAPER
10'
10'
SEE DETAIL "A"
DIRECTION OF TRAFFIC
CONT. WHITE
6"
2"
DETAIL A
GENERAL NOTES:
1. RETROREFLECTIVE FACES OF MARKERS SHALL BE VISIBLE TO THE TRAVELING MOTORIST ON STATE DESIGNATED HIGHWAYS.
2. RETROREFLECTIVE FACES OF MARKERS SHALL BE HIGH PERFORMANCE TWO-WAY CLEAR.
3. RETROREFLECTIVE FACES OF MARKERS SHALL NOT BE ROTATED WHEN BEING PLACED ALONG RADIUS AND TANGENT SECTION OF LOCAL ROAD.
4. MARKERS SHALL BE INSTALLED TO THE LIMITS SHOWN ABOVE.

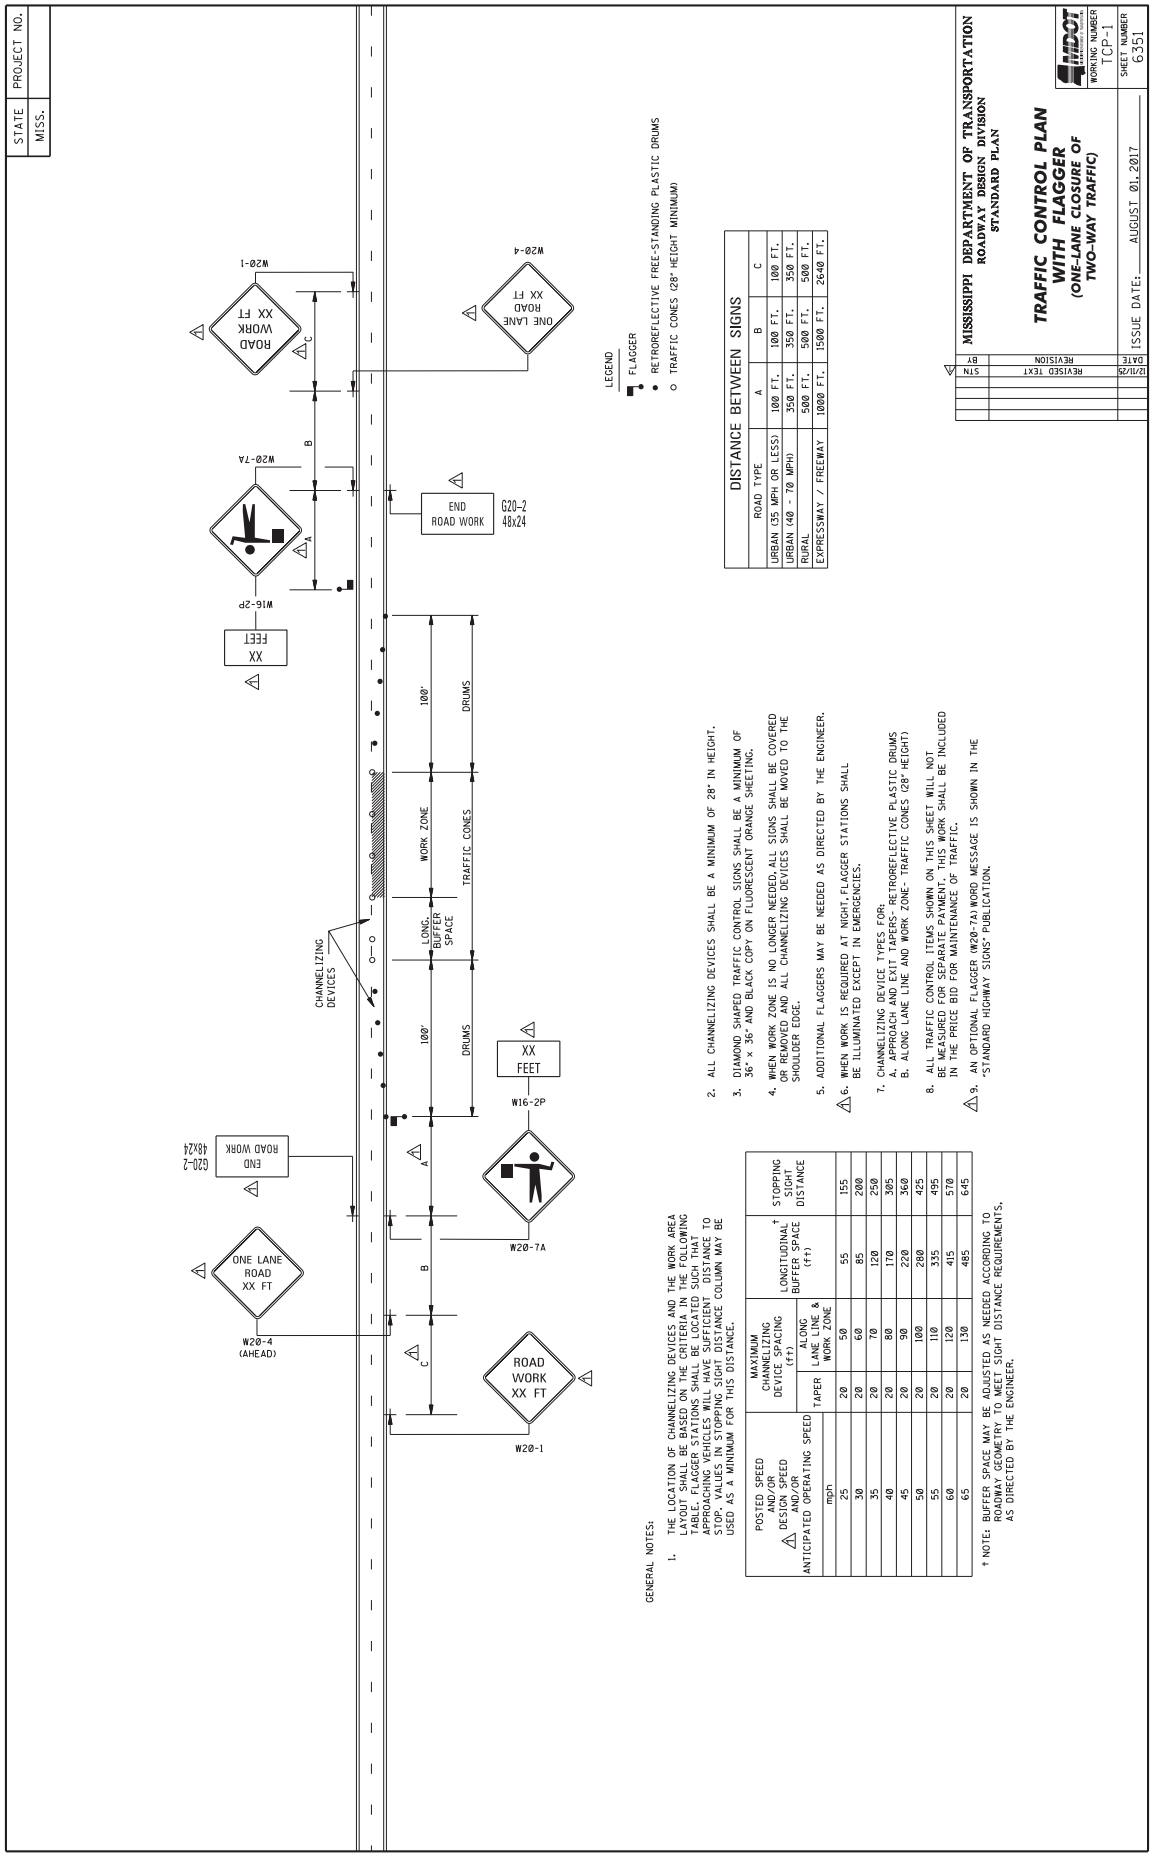

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
2-WAY RETROREFLECTIVE RAISED PAVEMENT MARKERS AT INTERSECTING ROADS (4-LANE)
WORKING NUMBER PM-12
SHEET NUMBER 6062
ISSUE DATE: AUGUST 01, 2017
DATE REVISION BY
12/11/25 REVISED TEXT. STN
TYPICAL PLACEMENT OF RETROREFLECTIVE RAISED PAVEMENT MARKERS ON SIDE ROAD RADIUS 4-LANE, TWO WAY TRAFFIC
40' FROM END OF RADIUS OR TAPER
40' FROM BEGINNING OF RADIUS OR TAPER
10'
10'
SEE DETAIL "A"
DIRECTION OF TRAFFIC
CONT. WHITE
6"
2"
DETAIL A
GENERAL NOTES:
1. RETROREFLECTIVE FACES OF MARKERS SHALL BE VISIBLE TO THE TRAVELING MOTORIST ON STATE DESIGNATED HIGHWAYS.
2. RETROREFLECTIVE FACES OF MARKERS SHALL BE HIGH PERFORMANCE TWO-WAY CLEAR.


STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
OFFSET LEFT TURN LANES
WORKING NUMBER PM-13
SHEET NUMBER 6063
ISSUE DATE: AUGUST 01, 2017
REVISION
ADDED TEXT AND DWGS, ADDED YIELD BARS.
DATE 12/11/20
BY STN
GENERAL NOTES:
1. UNSIGNALIZED INTERSECTION SHOWN. STOP BARS REQUIRED ONLY WHERE INTERSECTION IS SIGNALIZED OR MULTI-WAY STOP CONTROLLED.
2. SEE MK. NOS. PM-1, PM-3 and PM-6 FOR OTHER DETAILS.
3. TAPER LENGTH VARIES WITH MEDIAN WIDTH.
4. TAPERED OFFSET LEFT TURN LANE SHOWN. PARALLEL OFFSET LEFT TURN LANE PAVEMENT MARKINGS ARE SIMILAR.
5. 3-LANE SIDE ROAD SHOWN. SEE PERMANENT PAVEMENT MARKING DETAIL SHEETS FOR SIDE ROAD PAVEMENT MARKING DETAILS.
6. SEE PM-12 FOR INTERSECTING ROAD RAISED PAVEMENT MARKER PLACEMENT.
MEDIAN WIDTH VARIES
6" EDGE YELLOW
6" DET. YELLOW
GREATER THAN OR EQUAL TO ½ MEDIAN WIDTH
LESS THAN OR EQUAL TO ½ MEDIAN WIDTH
10' RADIUS TYPICAL
150' RADIUS
6" DET. YELLOW
6" EDGE YELLOW
24" STOP BAR (LEGEND)
14' MIN.
LEGEND WHITE YIELD BAR (SP)
6" DET. YELLOW
6" EDGE YELLOW
12.5% TAPER TYPICAL
SEE DETAIL "A"
6" EDGE YELLOW
6" DETAIL YELLOW
RED-CLEAR RETROREFLECTIVE RAISED MARKER
DETAIL B
12" DETAIL YELLOW
RED-CLEAR RETROREFLECTIVE RAISED MARKERS
RED-CLEAR RETROREFLECTIVE RAISED MARKERS
12" DETAIL WHITE
10'
10'
2' MIN.
45°
18" DETAIL WHITE
DETAIL A


STATE
MISS.
PROJECT NO.
GENERAL NOTES
1. GROUND-IN RUMBLE STRIPES SHALL BE APPLIED ON LEFT AND RIGHT SHOULDERS OF ALL PAVED SHOULDERS ON THIS PROJECT
2. GROUND-IN RUMBLE STRIPES SHALL BE OMITTED ACROSS PUBLIC INTERSECTING ROADWAYS OR OTHER INTERRUPTIONS IN NORMAL SHOULDER WIDTH AS DIRECTED BY THE ENGINEER
3. COST TO BE PAID FOR USING APPROPRIATE PAY ITEMS
4. GROUND-IN RUMBLE STRIPES SHALL BE APPLIED TO:
A. MAINLINE
B. INTERSECTING ROADWAY IF OVERLAID OR RECONSTRUCTED BEYOND NORMAL MAINLINE R.O.W.
C. ANY ROADWAY WITH EXISTING RUMBLE STRIPES PRIOR TO CONSTRUCTION.
5. OMIT GROUND-IN RUMBLE STRIPS WHERE TRAFFIC LANE IS LESS THAN 11 FEET WIDE.
EDGE OF PAVED SHOULDER
6" TRAFFIC STRIPE
EDGE OF TRAFFIC LANE
12"
7"
DETAIL "A"
7.0"*
*1/2" TOLERANCE
3/8" - MIN.
1/2" - MAX.
SECTION "A–A"
VARIABLE SHOULDER
2' PAVED SHOULDER
11' or 12'
TRAVEL LANES
SEE DETAIL 'A'
PLAN
NOT TO SCALE
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
RUMBLE STRIPES
2-LANE HIGHWAYS
(ASPHALT LANES,
2-FT ASPHALT SHOULDERS)
WORKING NUMBER RS-1
SHEET NUMBER 6064
ISSUE DATE: AUGUST 01, 2017
STN BY REVISION DATE
12/11/25 REVISED TEXT AND STRIPE DETAIL


STATE
MISS.
PROJECT NO.
GENERAL NOTES
1. GROUND-IN RUMBLE STRIPES SHALL BE APPLIED ON LEFT AND RIGHT SHOULDERS OF ALL PAVED SHOULDERS ON THIS PROJECT
2. GROUND-IN RUMBLE STRIPES SHALL BE OMITTED ACROSS PUBLIC INTERSECTING ROADWAYS OR OTHER INTERRUPTIONS IN NORMAL SHOULDER WIDTH AS DIRECTED BY THE ENGINEER
3. COST TO BE PAID FOR USING APPROPRIATE PAY ITEMS
4. GROUND-IN RUMBLE STRIPES SHALL BE APPLIED TO:
A. MAINLINE
B. INTERSECTING ROADWAY IF OVERLAID OR RECONSTRUCTED BEYOND NORMAL MAINLINE R.O.W.
C. ANY ROADWAY WITH EXISTING RUMBLE STRIPES PRIOR TO CONSTRUCTION.
6" TRAFFIC STRIPE
EDGE OF PAVED SHOULDER
EDGE OF TRAFFIC LANE
12"
7"
12" VAR.
VARIABLE
DETAIL "A"
7.0"*
* 1/2" TOLERANCE
3/8"- MIN.
1/2"- MAX.
SECTION "A-A"
VARIABLE SHLD
TRAVEL LANES
VARIABLE SHLD
SEE DETAIL "A"
GRAN. MAT'L
PAVED SHLD
NO SHOULDER RUMBLES
PAVED SHLD
GRAN. MAT'L
℄ RAMP CONSTRUCTION
PLAN
NOT TO SCALE
DETAILS OF RUMBLE STRIPS
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
RUMBLE STRIPES
4-LANE HIGHWAYS
(ASPHALT LANES,
2-FT OR WIDER
ASPHALT SHOULDERS)
WORKING NUMBER
RS-2
SHEET NUMBER
6065
ISSUE DATE: AUGUST 01, 2017
STN
REVISED STRIPE DETAIL.
DATE
REVISION
BY


STATE MISS.
PROJECT NO.
GENERAL NOTES
1. GROUND-IN RUMBLE STRIPS SHALL BE APPLIED ON LEFT AND RIGHT SHOULDERS OF ALL PAVED SHOULDERS ON THIS PROJECT
2. GROUND-IN RUMBLE STRIPS SHALL BE OMITTED ACROSS PUBLIC INTERSECTING ROADWAYS OR OTHER INTERRUPTIONS IN NORMAL SHOULDER WIDTH AS DIRECTED BY THE ENGINEER
3. COST TO BE PAID FOR USING APPROPRIATE PAY ITEMS
4. GROUND-IN RUMBLE STRIPS SHALL BE APPLIED TO:
A. MAINLINE
B. INTERSECTING ROADWAY IF OVERLAID OR RECONSTRUCTED BEYOND NORMAL MAINLINE R.O.W.
C. ANY ROADWAY WITH EXISTING RUMBLE STRIPS PRIOR TO CONSTRUCTION.
* 1/2" TOLERANCE
7.0"*
3/8"- MIN. 1/2"- MAX.
SECTION E–E
SECTION A–A
MEDIAN SHOULDER WITHOUT O.G.F.C.
THIS TYPICAL SECTION APPLIES TO THE LEFT HALF OF THE PLAN VIEW BELOW
4 FT. OR AS SHOWN ON PLANS
EDGE OF 12' LANE
6" TRAFFIC STRIPE
2"
12" RUMBLE
12"
ASPHALT SHOULDER
SECTION B–B
OUTSIDE SHOULDER WITHOUT O.G.F.C.
10 FT. OR AS SHOWN ON PLANS
SECTION C–C
MEDIAN SHOULDER WITH O.G.F.C.
THIS TYPICAL SECTION APPLIES TO THE RIGHT HALF OF THE PLAN VIEW BELOW
6" 12" 6"
24"
O.G.F.C.
SECTION D–D
OUTSIDE SHOULDER WITH O.G.F.C.
PLAN
CONCRETE LANES
WITH ASPHALT SHOULDERS
(NO O.G.F.C.)
O.G.F.C. LANES
WITH APHALT SHOULDERS
NO RUMBLES
ACROSS EXIT RAMP
NO RUMBLES
ACROSS ENTRANCE RAMP
℄ RAMP CONSTRUCTION
TRAVEL LANES
LIMITS OF O.G.F.C.
7"
12"
A
B
C
D
E
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
RUMBLE STRIP
DETAIL FOR OGFC OR
CONCRETE ROADWAY
WITH ASPHALT SHOULDERS
BY
REVISION
DATE
ISSUE DATE: AUGUST 01, 2017
WORKING NUMBER RS-3
SHEET NUMBER 6066



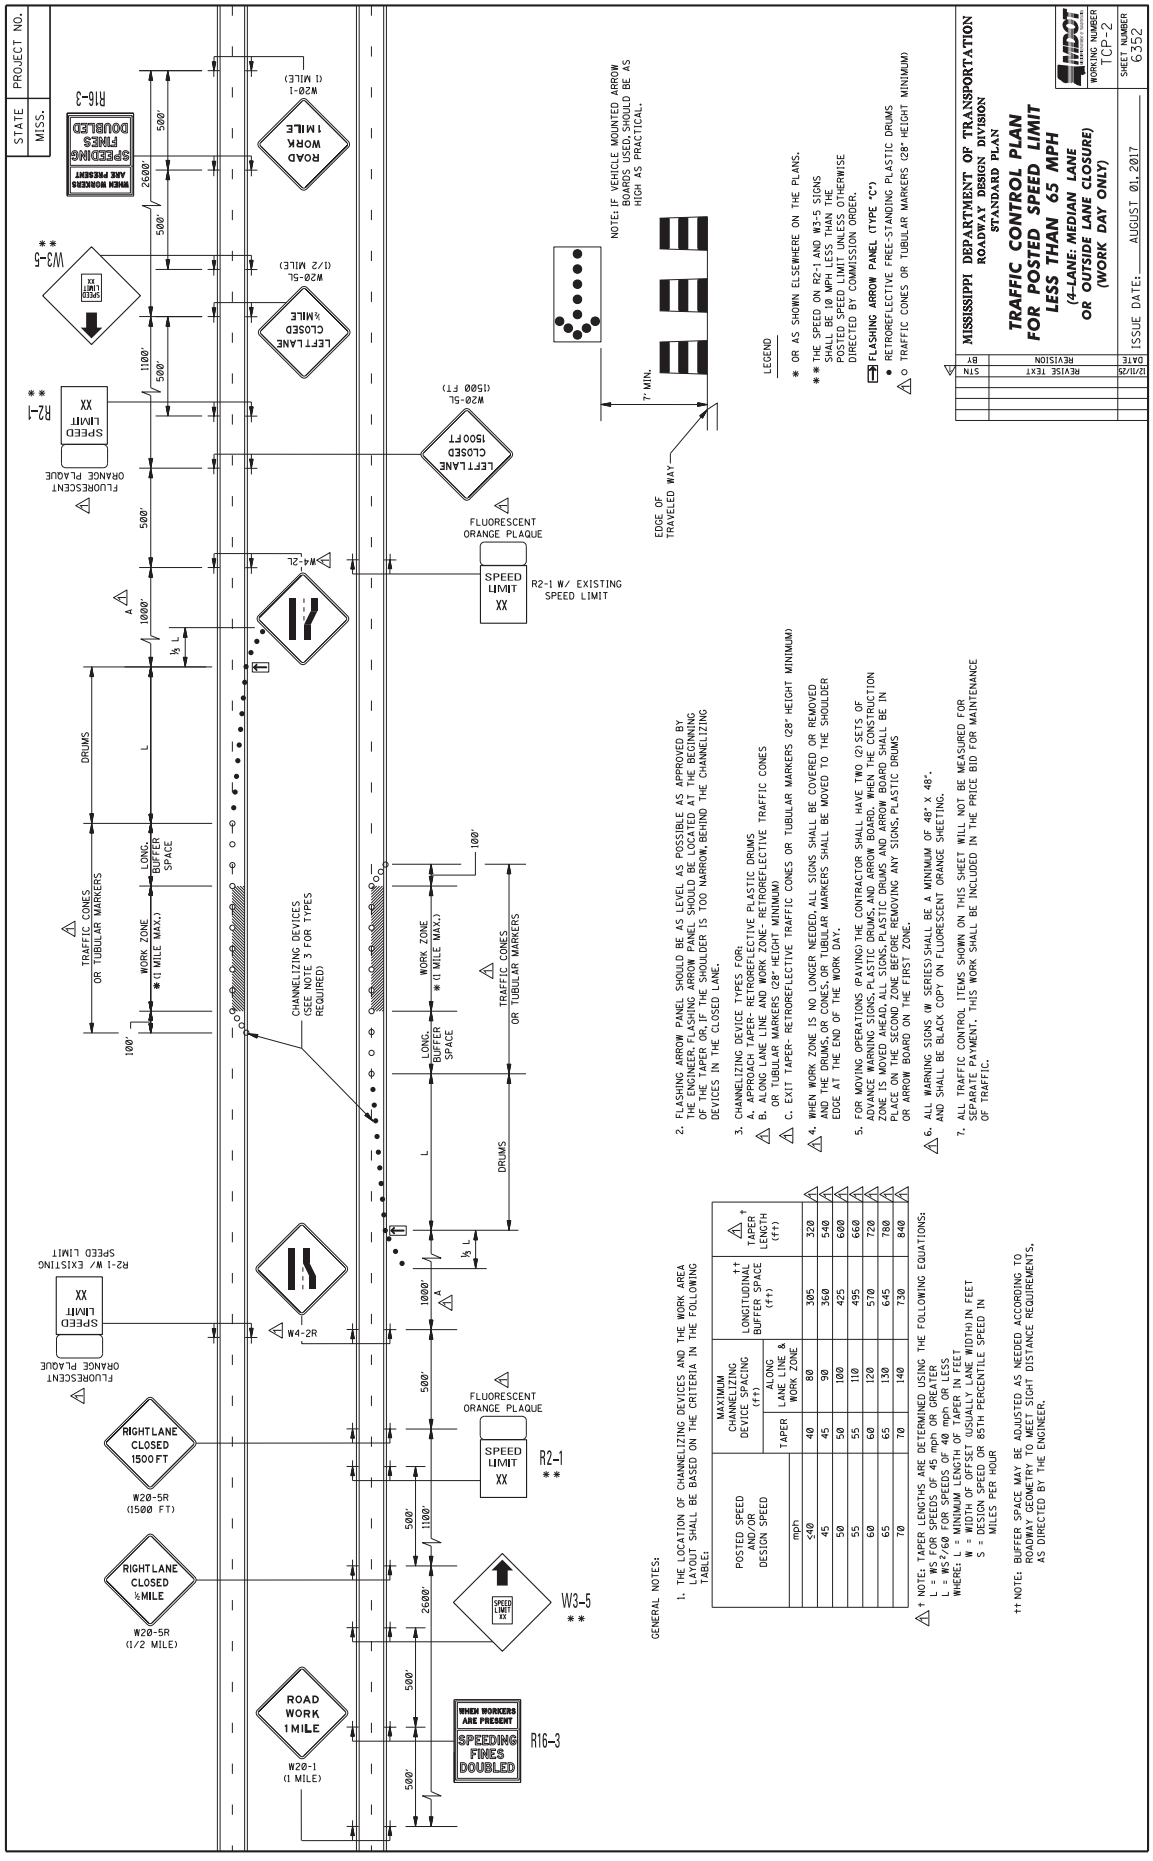
GENERAL NOTES:

1. THE LOCATION OF CHANNELIZING DEVICES AND THE WORK AREA LAYOUT SHALL BE BASED ON THE CRITERIA IN THE FOLLOWING TABLE. FLAGGER STATIONS SHALL BE LOCATED SUCH THAT APPROACHING VEHICLES WILL HAVE SUFFICIENT DISTANCE TO STOP. VALUES IN STOPPING SIGHT DISTANCE COLUMN MAY BE USED AS A MINIMUM FOR THIS DISTANCE.

POSTED SPEED AND/OR ⚠ DESIGN SPEED AND/OR ANTICIPATED OPERATING SPEED	MAXIMUM CHANNELIZING DEVICE SPACING (ft)		LONGITUDINAL † BUFFER SPACE (ft)	STOPPING SIGHT DISTANCE
	TAPER	ALONG LANE LINE & WORK ZONE		
mph				
25	20	50	55	155
30	20	60	85	200
35	20	70	120	250
40	20	80	170	305
45	20	90	220	360
50	20	100	280	425
55	20	110	335	495
60	20	120	415	570
65	20	130	485	645

† NOTE: BUFFER SPACE MAY BE ADJUSTED AS NEEDED ACCORDING TO ROADWAY GEOMETRY TO MEET SIGHT DISTANCE REQUIREMENTS, AS DIRECTED BY THE ENGINEER.

2. ALL CHANNELIZING DEVICES SHALL BE A MINIMUM OF 28" IN HEIGHT.
3. DIAMOND SHAPED TRAFFIC CONTROL SIGNS SHALL BE A MINIMUM OF 36" × 36" AND BLACK COPY ON FLUORESCENT ORANGE SHEETING.
4. WHEN WORK ZONE IS NO LONGER NEEDED, ALL SIGNS SHALL BE COVERED OR REMOVED AND ALL CHANNELIZING DEVICES SHALL BE MOVED TO THE SHOULDER EDGE.
5. ADDITIONAL FLAGGERS MAY BE NEEDED AS DIRECTED BY THE ENGINEER.
⚠ 6. WHEN WORK IS REQUIRED AT NIGHT, FLAGGER STATIONS SHALL BE ILLUMINATED EXCEPT IN EMERGENCIES.
7. CHANNELIZING DEVICE TYPES FOR:
   A. APPROACH AND EXIT TAPERS- RETROREFLECTIVE PLASTIC DRUMS
   B. ALONG LANE LINE AND WORK ZONE- TRAFFIC CONES (28" HEIGHT)
8. ALL TRAFFIC CONTROL ITEMS SHOWN ON THIS SHEET WILL NOT BE MEASURED FOR SEPARATE PAYMENT. THIS WORK SHALL BE INCLUDED IN THE PRICE BID FOR MAINTENANCE OF TRAFFIC.
⚠ 9. AN OPTIONAL FLAGGER (W20-7A) WORD MESSAGE IS SHOWN IN THE "STANDARD HIGHWAY SIGNS" PUBLICATION.



GENERAL NOTES:

1. THE LOCATION OF CHANNELIZING DEVICES AND THE WORK AREA LAYOUT SHALL BE BASED ON THE CRITERIA IN THE FOLLOWING TABLE:

POSTED SPEED AND/OR DESIGN SPEED	MAXIMUM CHANNELIZING DEVICE SPACING (ft)		LONGITUDINAL BUFFER SPACE (ft) ††	TAPER LENGTH † (ft)
mph	TAPER	ALONG LANE LINE & WORK ZONE		
≤40	40	80	305	320
45	45	90	360	540
50	50	100	425	600
55	55	110	495	660
60	60	120	570	720
65	65	130	645	780
70	70	140	730	840

2. FLASHING ARROW PANEL SHOULD BE AS LEVEL AS POSSIBLE AS APPROVED BY THE ENGINEER. FLASHING ARROW PANEL SHOULD BE LOCATED AT THE BEGINNING OF THE TAPER OR, IF THE SHOULDER IS TOO NARROW, BEHIND THE CHANNELIZING DEVICES IN THE CLOSED LANE.

3. CHANNELIZING DEVICE TYPES FOR:
   A. APPROACH TAPER- RETROREFLECTIVE PLASTIC DRUMS
   B. ALONG LANE LINE AND WORK ZONE- RETROREFLECTIVE TRAFFIC CONES OR TUBULAR MARKERS (28" HEIGHT MINIMUM)
   C. EXIT TAPER- RETROREFLECTIVE TRAFFIC CONES OR TUBULAR MARKERS (28" HEIGHT MINIMUM)

4. WHEN WORK ZONE IS NO LONGER NEEDED, ALL SIGNS SHALL BE COVERED OR REMOVED AND THE DRUMS OR CONES OR TUBULAR MARKERS SHALL BE MOVED TO THE SHOULDER EDGE AT THE END OF THE WORK DAY.

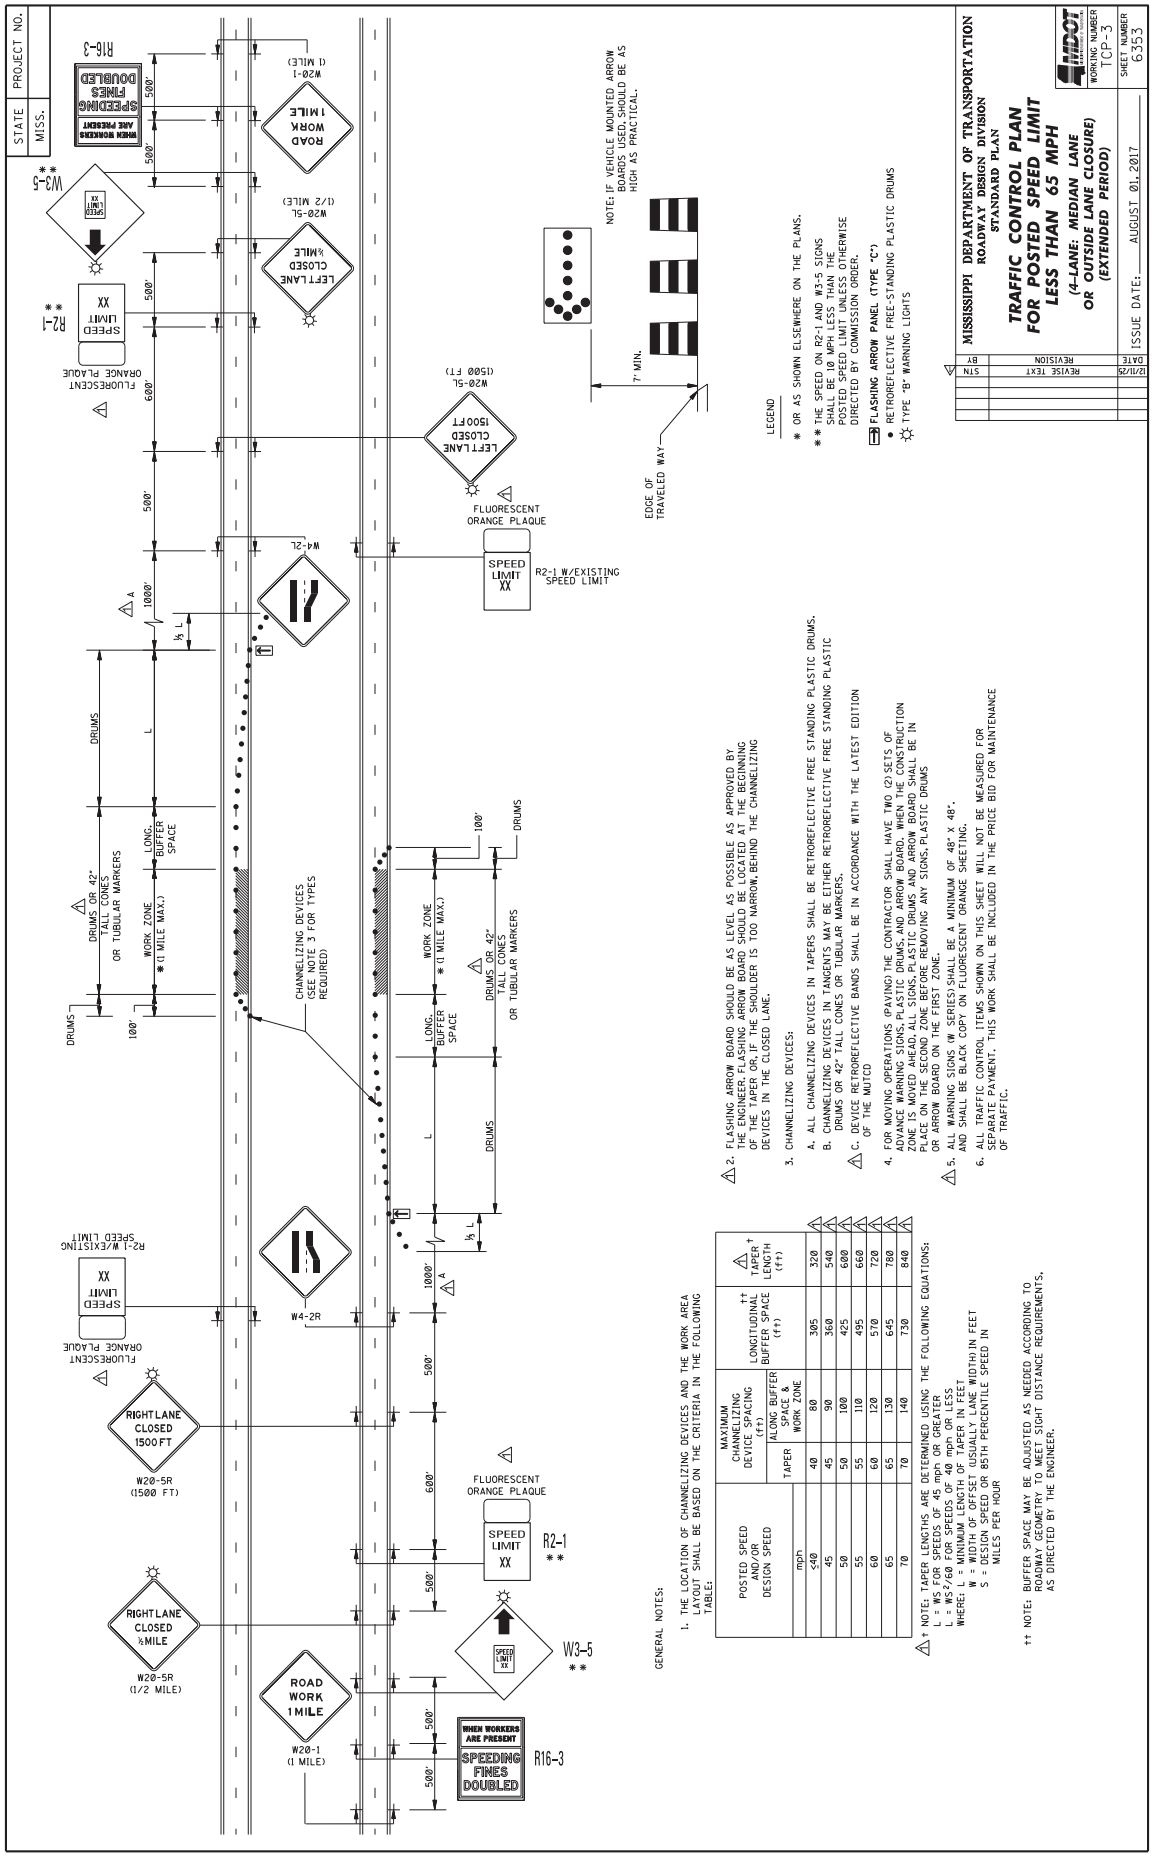
5. FOR MOVING OPERATIONS (PAVING) THE CONTRACTOR SHALL HAVE TWO (2) SETS OF ADVANCE WARNING SIGNS, PLASTIC DRUMS, AND ARROW BOARD. WHEN THE CONSTRUCTION ZONE IS MOVED AHEAD, ALL SIGNS, PLASTIC DRUMS AND ARROW BOARD SHALL BE IN PLACE FOR THE SECOND MOVE BEFORE REMOVING ANY SIGNS, PLASTIC DRUMS OR ARROW BOARD ON THE FIRST ZONE.

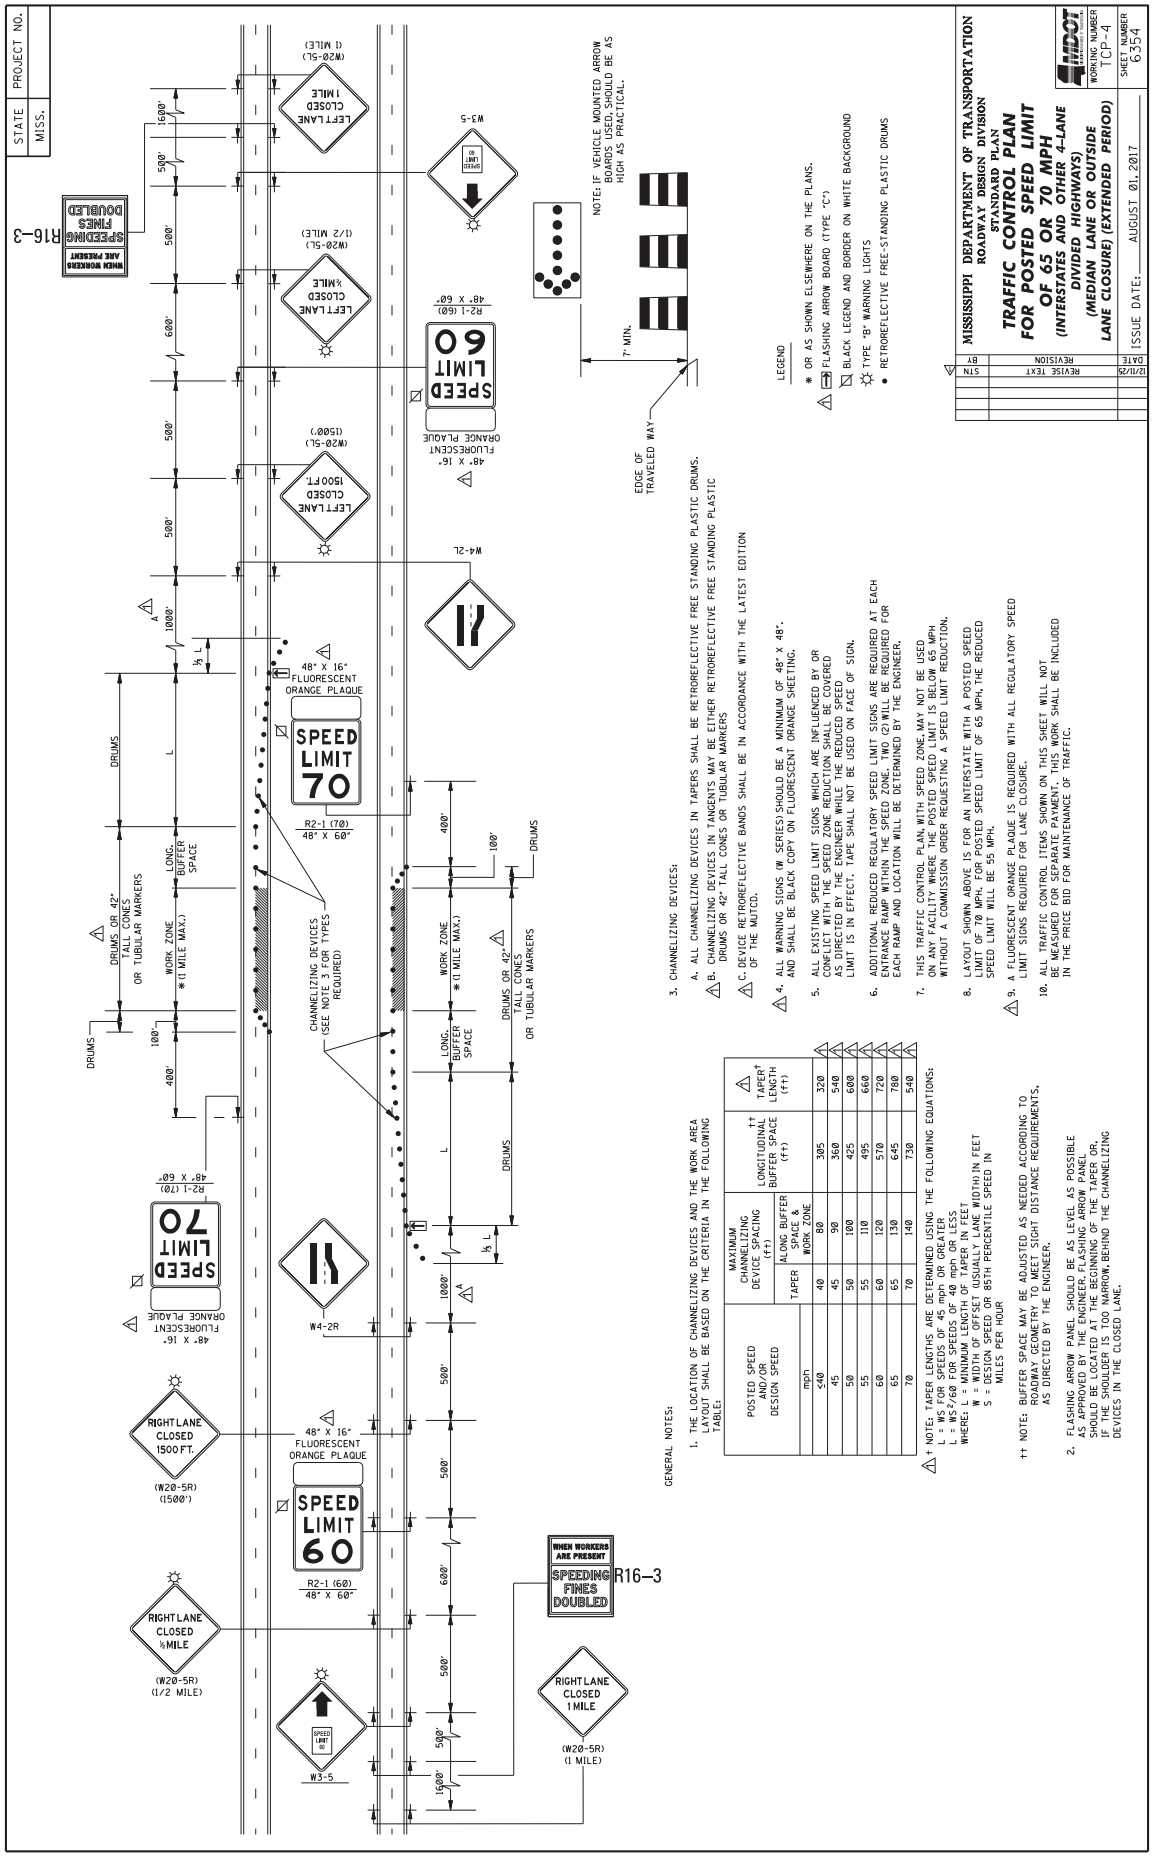
6. ALL WARNING SIGNS (W SERIES) SHALL BE A MINIMUM OF 48" X 48", AND SHALL BE BLACK COPY ON FLUORESCENT ORANGE SHEETING.

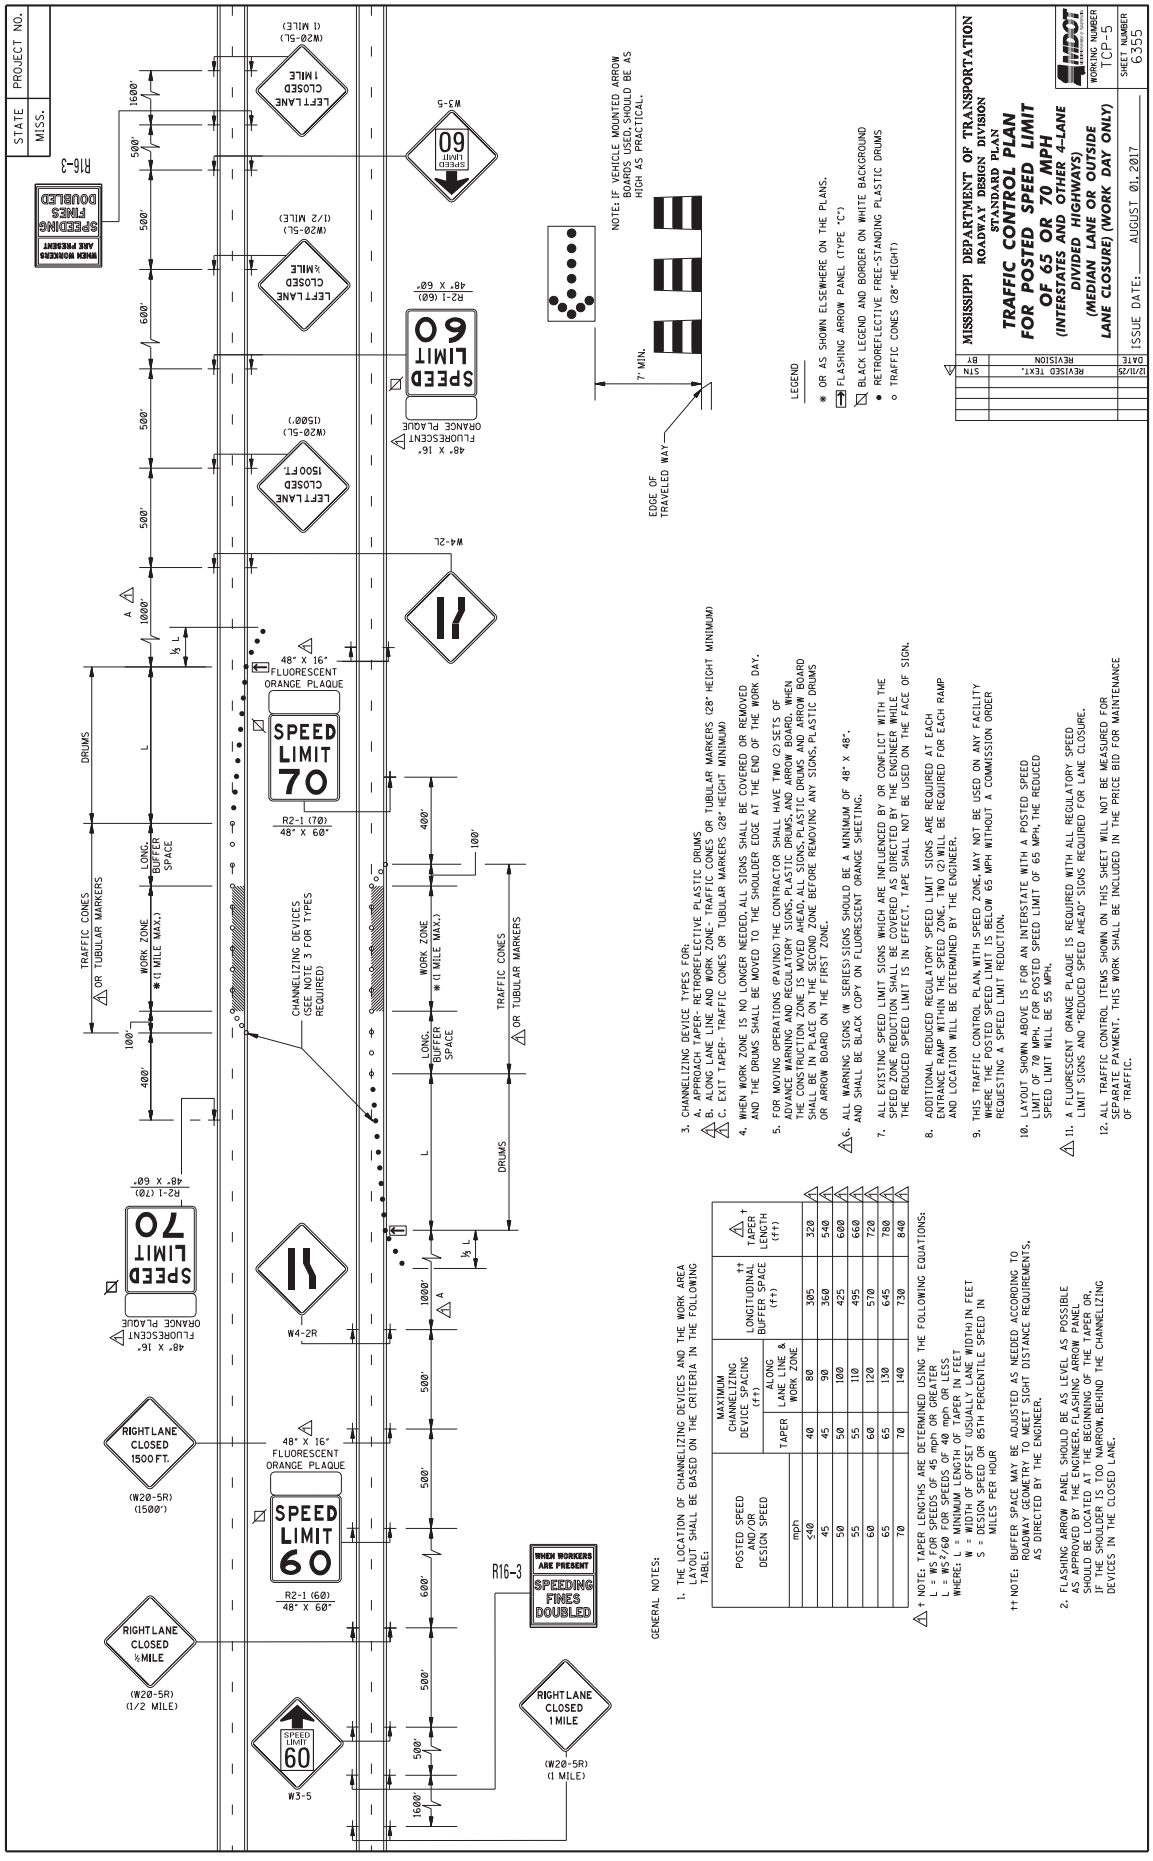
7. ALL TRAFFIC CONTROL ITEMS SHOWN ON THIS SHEET WILL NOT BE MEASURED FOR SEPARATE PAYMENT. THIS WORK SHALL BE INCLUDED IN THE PRICE BID FOR MAINTENANCE OF TRAFFIC.

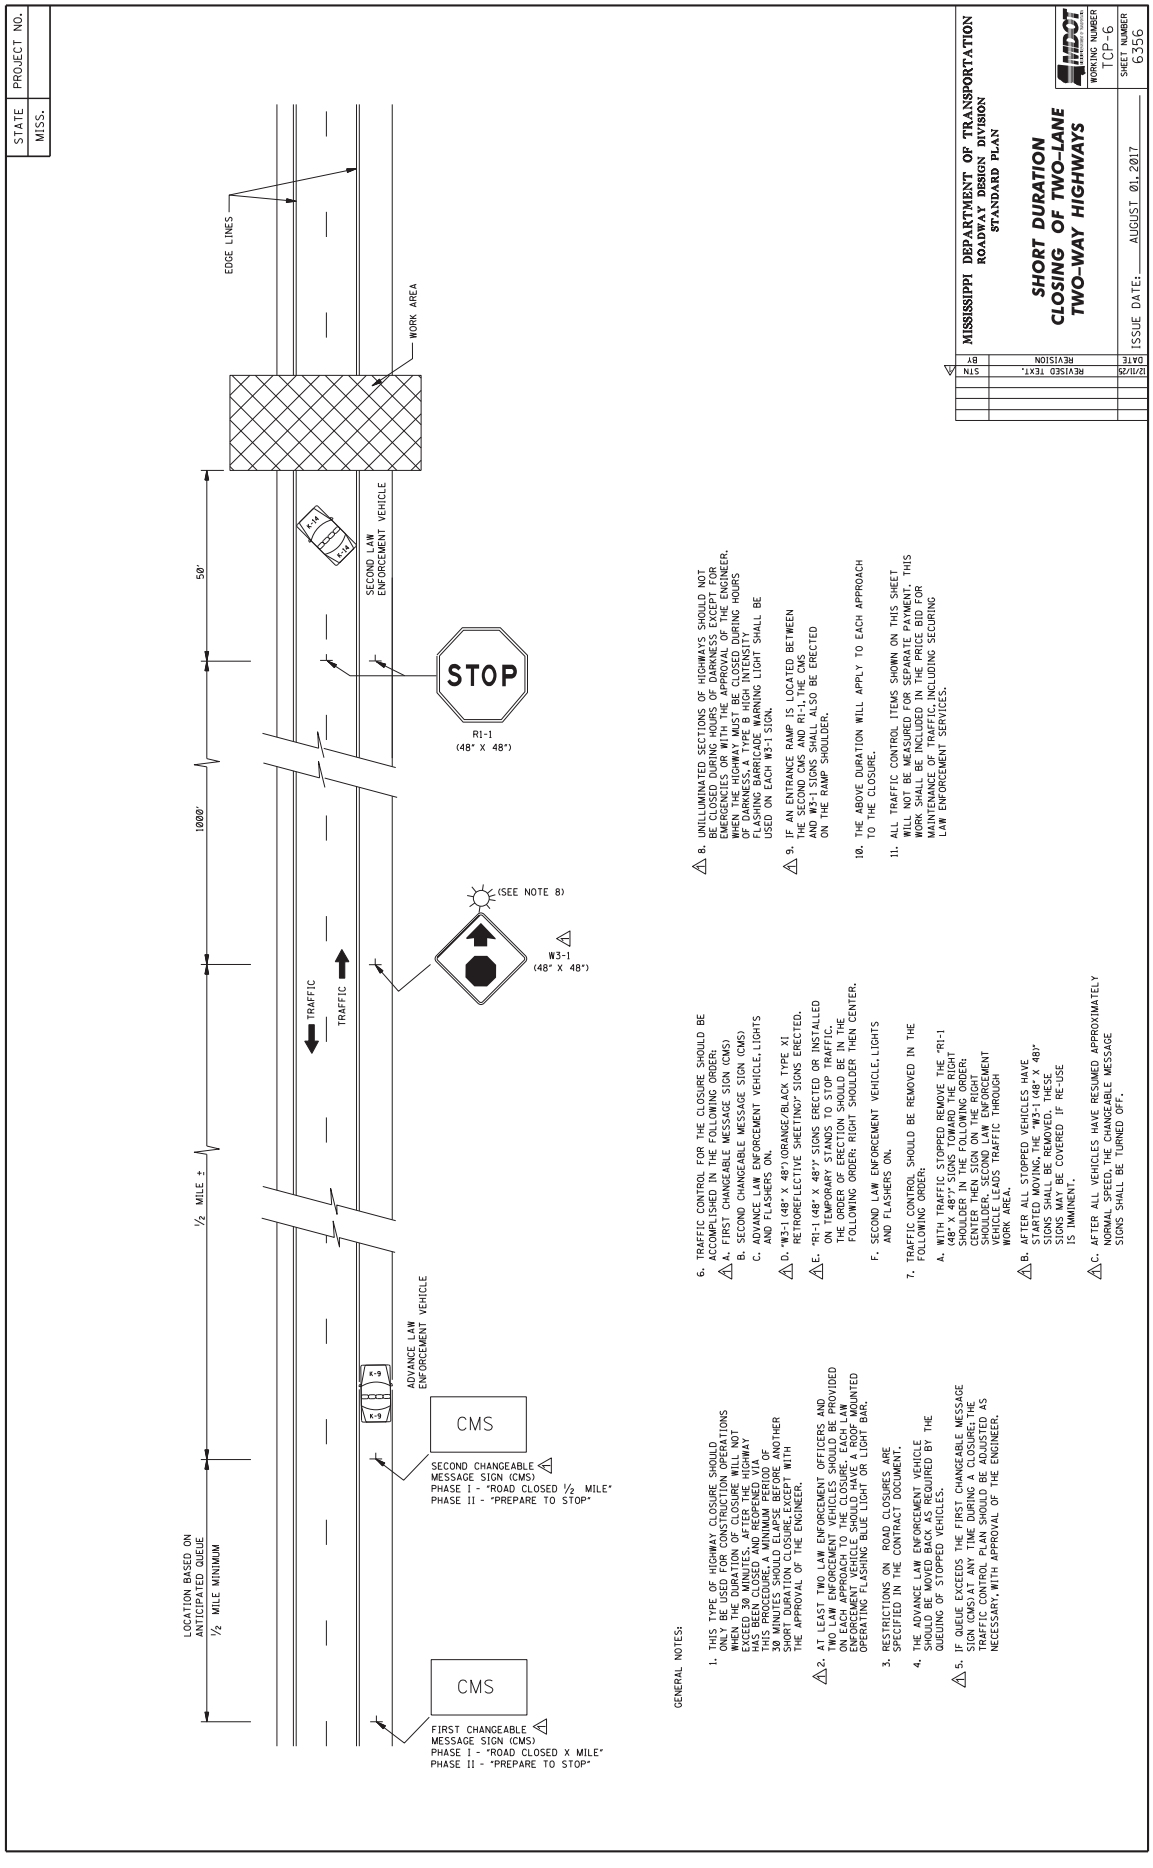
† NOTE: TAPER LENGTHS ARE DETERMINED USING THE FOLLOWING EQUATIONS:
L = WS FOR SPEEDS OF 45 mph OR GREATER
L = WS²/60 FOR SPEEDS OF 40 mph OR LESS
WHERE: L = MINIMUM LENGTH OF TAPER IN FEET
W = WIDTH OF OFFSET (USUALLY LANE WIDTH) IN FEET
S = DESIGN SPEED OR 85TH PERCENTILE SPEED IN MILES PER HOUR

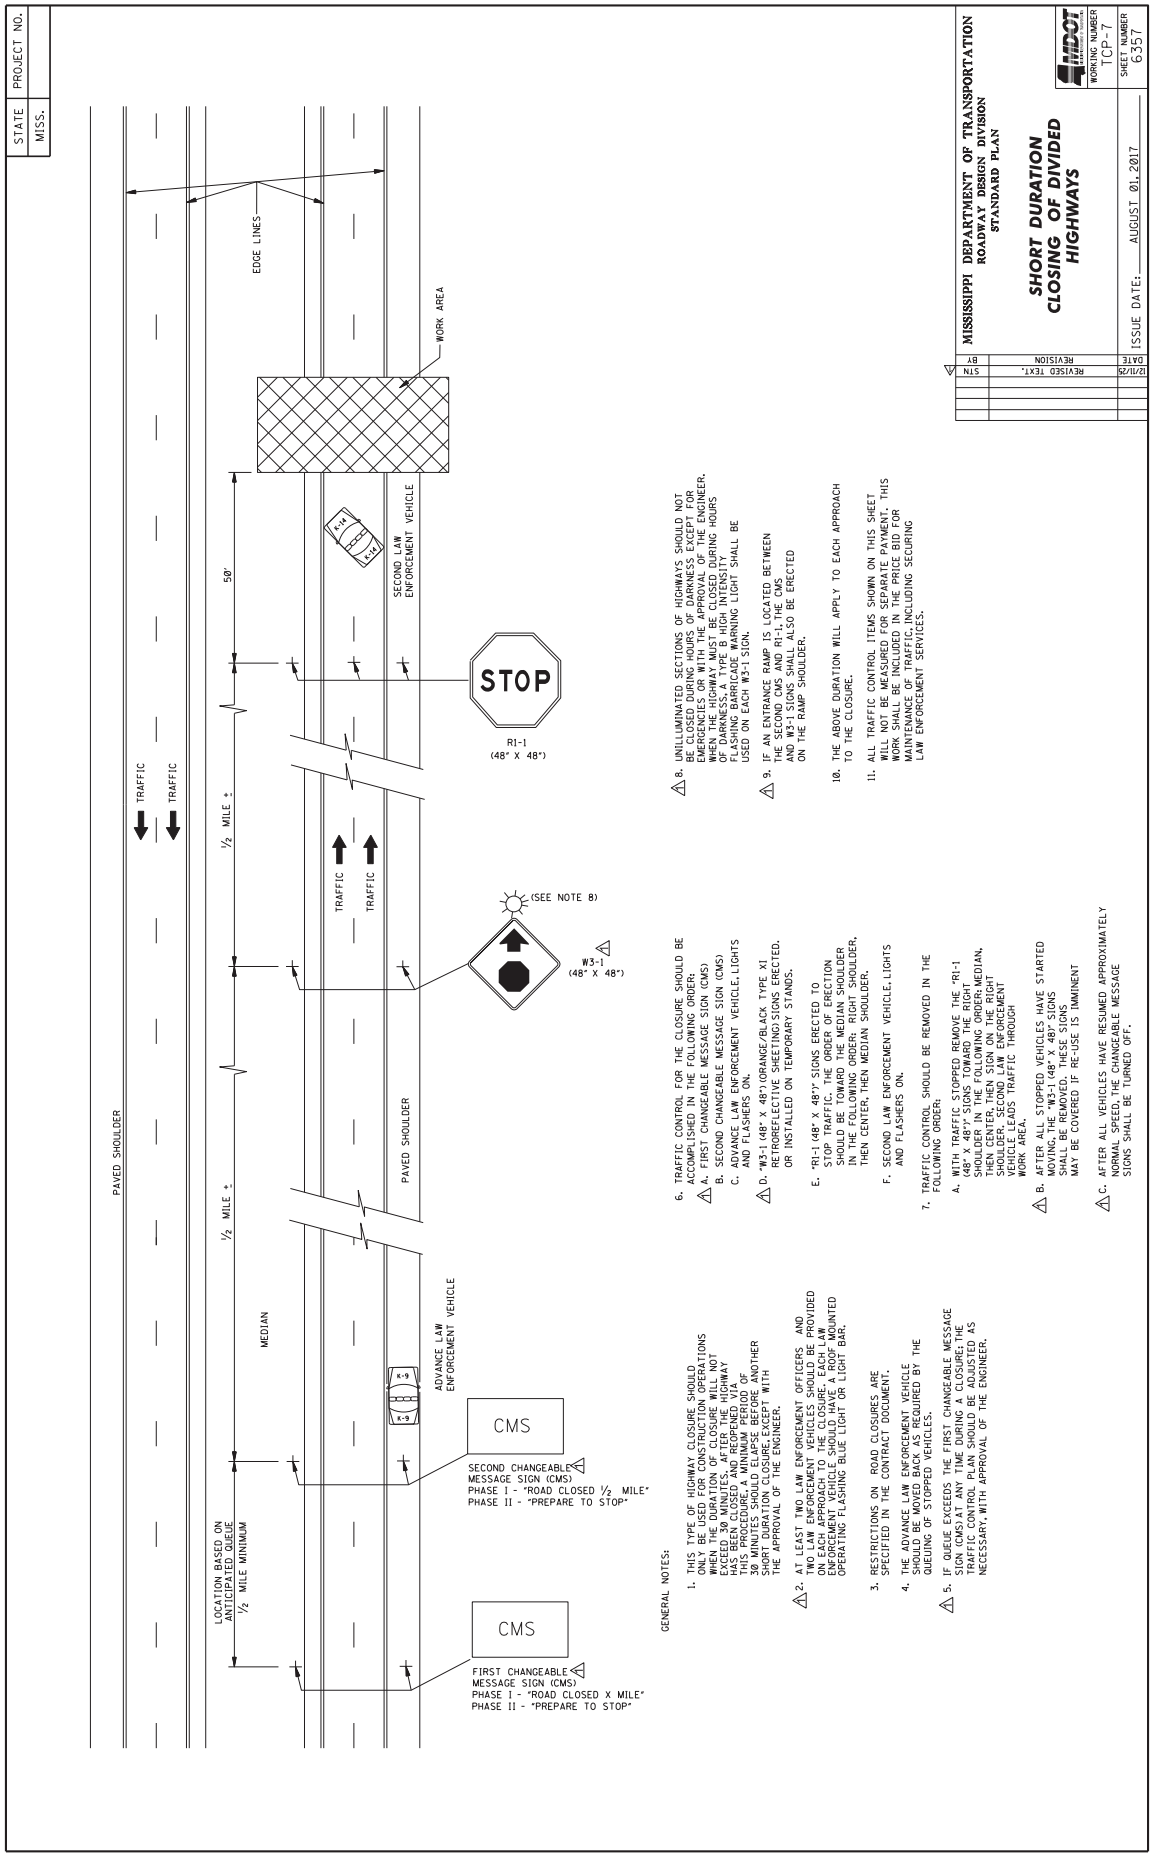
†† NOTE: BUFFER SPACE MAY BE ADJUSTED AS NEEDED ACCORDING TO ROADWAY GEOMETRY TO MEET SIGHT DISTANCE REQUIREMENTS, AS DIRECTED BY THE ENGINEER.

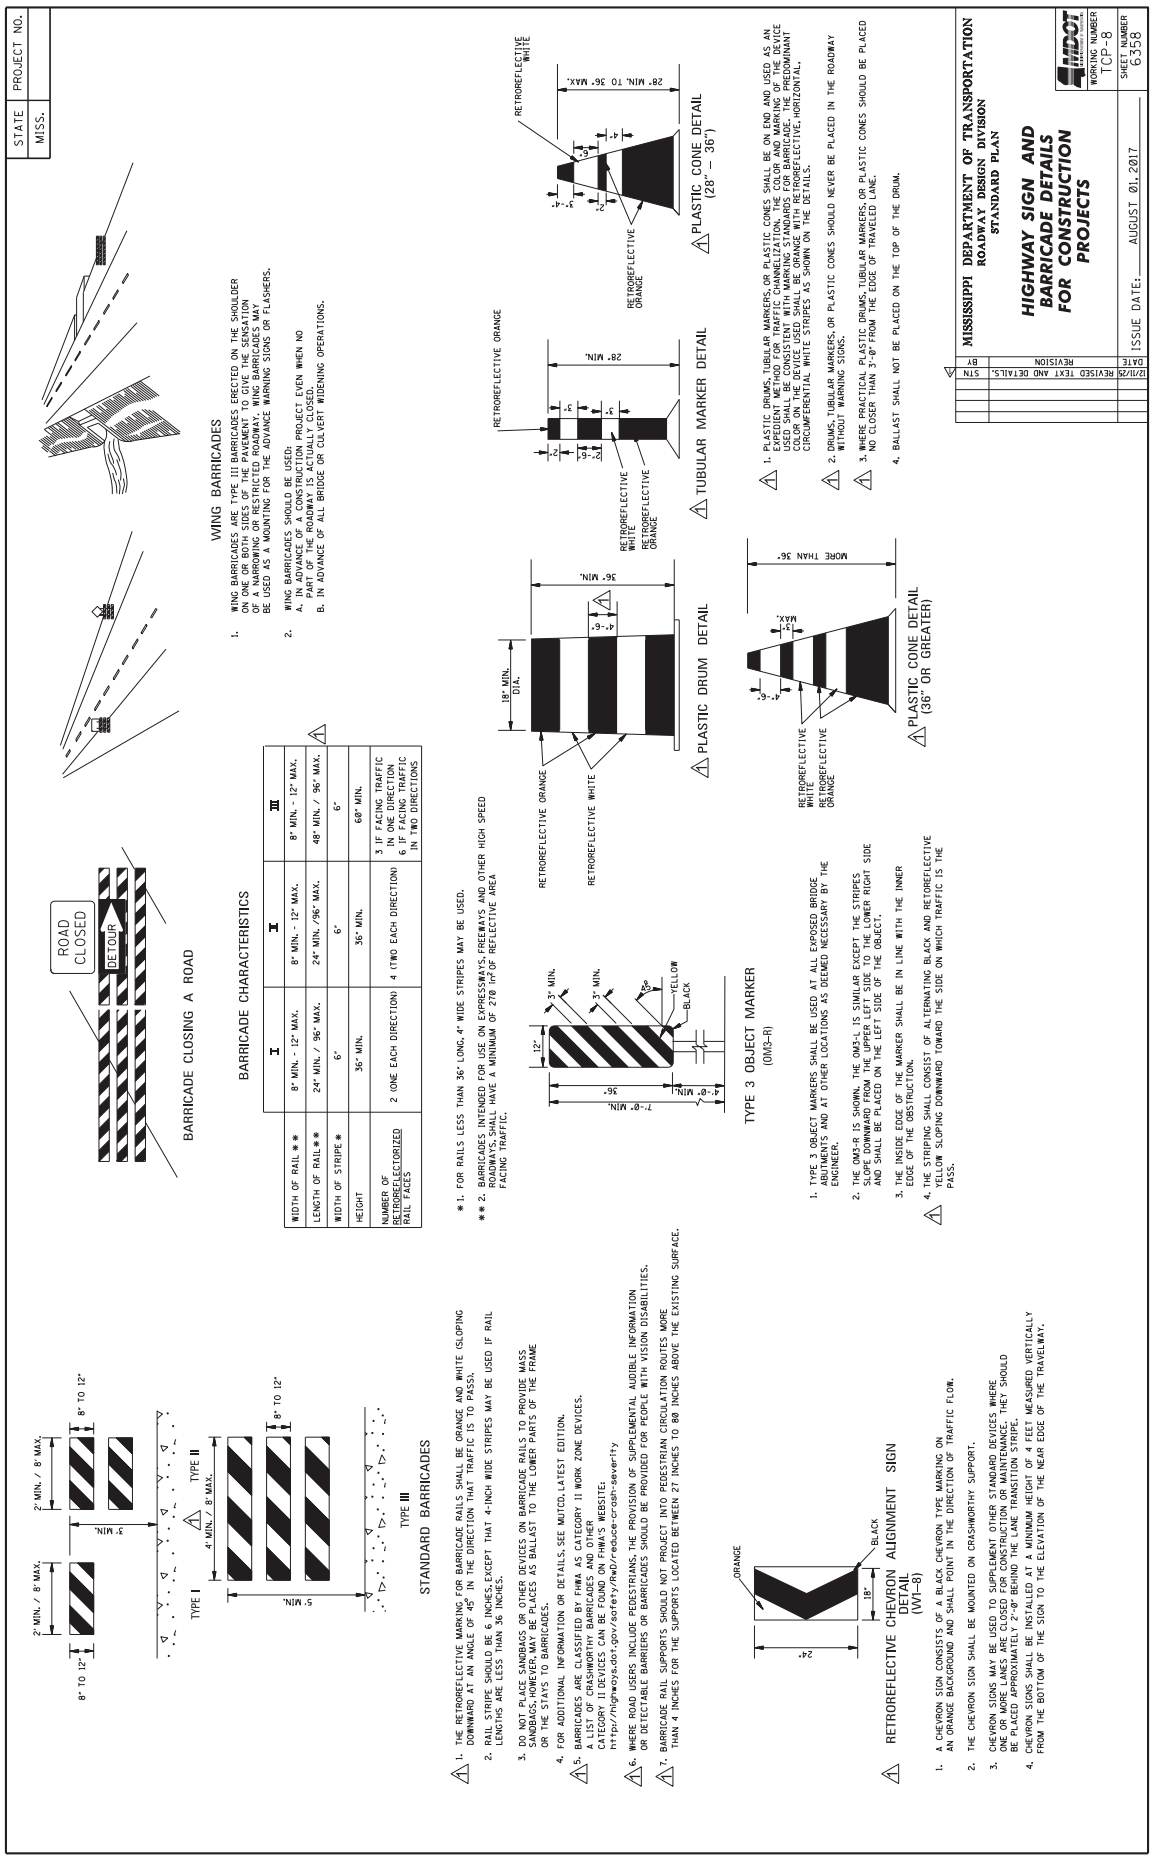

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
TRAFFIC CONTROL PLAN
FOR POSTED SPEED LIMIT
LESS THAN 65 MPH
(4-LANE: MEDIAN LANE OR OUTSIDE LANE CLOSURE)
(EXTENDED PERIOD)
WORKING NUMBER TCP-3
SHEET NUMBER 6353
ISSUE DATE: AUGUST 01, 2017
DATE BY REVISION
12/11/20 STN REVISE TEXT
LEGEND
* OR AS SHOWN ELSEWHERE ON THE PLANS.
** THE SPEED ON R2-1 AND W3-5 SIGNS SHALL BE 10 MPH LESS THAN THE POSTED SPEED LIMIT UNLESS OTHERWISE DIRECTED BY COMMISSION ORDER.
FLASHING ARROW PANEL (TYPE "C")
RETROREFLECTIVE FREE-STANDING PLASTIC DRUMS
TYPE "B" WARNING LIGHTS
NOTE: IF VEHICLE MOUNTED ARROW BOARDS USED, SHOULD BE AS HIGH AS PRACTICAL.
7' MIN.
EDGE OF TRAVELED WAY
ROAD WORK 1 MILE
W20-1 (1 MILE)
LEFT LANE CLOSED ½ MILE
W20-5L (1/2 MILE)
LEFT LANE CLOSED 1500 FT
W20-5L (1500 FT)
RIGHT LANE CLOSED ½ MILE
W20-5R (1/2 MILE)
RIGHT LANE CLOSED 1500 FT
W20-5R (1500 FT)
WHEN WORKERS ARE PRESENT
SPEEDING FINES DOUBLED
R16-3
SPEED LIMIT XX
R2-1 **
FLUORESCENT ORANGE PLAQUE
R2-1 W/EXISTING SPEED LIMIT
W4-2R
W4-2L
W3-5 **
DRUMS
DRUMS OR 42" TALL CONES OR TUBULAR MARKERS
WORK ZONE * (1 MILE MAX.)
LONG. BUFFER SPACE
CHANNELIZING DEVICES (SEE NOTE 3 FOR TYPES REQUIRED)
100'
500'
600'
1000'
A
½ L
L
GENERAL NOTES:
1. THE LOCATION OF CHANNELIZING DEVICES AND THE WORK AREA LAYOUT SHALL BE BASED ON THE CRITERIA IN THE FOLLOWING TABLE:
POSTED SPEED / DESIGN SPEED | MAXIMUM CHANNELIZING DEVICE SPACING (ft) | LONGITUDINAL† BUFFER SPACE (ft) | †† TAPER LENGTH (ft)
mph | TAPER | ALONG BUFFER SPACE & WORK ZONE
≤40 | 40 | 80 | 305 | 320
45 | 45 | 90 | 360 | 540
50 | 50 | 100 | 425 | 600
55 | 55 | 110 | 495 | 660
60 | 60 | 120 | 570 | 720
65 | 65 | 130 | 645 | 780
70 | 70 | 140 | 730 | 840
† NOTE: TAPER LENGTHS ARE DETERMINED USING THE FOLLOWING EQUATIONS:
L = WS²/60 FOR SPEEDS OF 45 mph OR LESS
L = WS/60 FOR SPEEDS OF 40 mph OR LESS
WHERE: L = MINIMUM LENGTH OF TAPER IN FEET
W = WIDTH OF OFFSET (USUALLY LANE WIDTH) IN FEET
S = DESIGN SPEED OR 85TH PERCENTILE SPEED IN MILES PER HOUR
†† NOTE: BUFFER SPACE MAY BE ADJUSTED AS NEEDED ACCORDING TO ROADWAY GEOMETRY TO MEET SIGHT DISTANCE REQUIREMENTS, AS DIRECTED BY THE ENGINEER.
2. FLASHING ARROW BOARD SHOULD BE AS LEVEL AS POSSIBLE AS APPROVED BY THE ENGINEER. FLASHING ARROW BOARD SHOULD BE LOCATED AT THE BEGINNING OF THE TAPER ONLY IF THE SHOULDER IS TOO NARROW, BEHIND THE CHANNELIZING DEVICES IN THE CLOSED LANE.
3. CHANNELIZING DEVICES:
A. ALL CHANNELIZING DEVICES IN TAPERS SHALL BE RETROREFLECTIVE FREE STANDING PLASTIC DRUMS.
B. CHANNELIZING DEVICES IN TANGENTS MAY BE EITHER RETROREFLECTIVE FREE STANDING PLASTIC DRUMS OR 42" TALL CONES OR TUBULAR MARKERS.
C. DEVICE RETROREFLECTIVE BANDS SHALL BE IN ACCORDANCE WITH THE LATEST EDITION OF THE MUTCD
4. FOR MOVING OPERATIONS (PAVING) THE CONTRACTOR SHALL HAVE TWO (2) SETS OF ADVANCE WARNING SIGNS, PLASTIC DRUMS, AND ARROW BOARD. WHEN THE CONSTRUCTION ZONE IS MOVED AHEAD, ALL SIGNS, PLASTIC DRUMS AND ARROW BOARD SHALL BE IN PLACE ON THE SECOND ZONE BEFORE REMOVING ANY SIGNS, PLASTIC DRUMS OR ARROW BOARD ON THE FIRST ZONE.
5. ALL WARNING SIGNS (W SERIES) SHALL BE A MINIMUM OF 48" X 48", AND SHALL BE BLACK COPY ON FLUORESCENT ORANGE SHEETING.
6. ALL TRAFFIC CONTROL ITEMS SHOWN ON THIS SHEET WILL NOT BE MEASURED FOR SEPARATE PAYMENT. THIS WORK SHALL BE INCLUDED IN THE PRICE BID FOR MAINTENANCE OF TRAFFIC.


STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
TRAFFIC CONTROL PLAN
FOR POSTED SPEED LIMIT
OF 65 OR 70 MPH
(INTERSTATES AND OTHER 4-LANE DIVIDED HIGHWAYS)
(MEDIAN LANE OR OUTSIDE LANE CLOSURE) (EXTENDED PERIOD)
WORKING NUMBER TCP-4
SHEET NUMBER 6354
ISSUE DATE: AUGUST 01, 2017
REVISE TEXT STN
DATE BY REVISION
12/11/25
LEGEND
* OR AS SHOWN ELSEWHERE ON THE PLANS.
FLASHING ARROW BOARD (TYPE "C")
BLACK LEGEND AND BORDER ON WHITE BACKGROUND
TYPE "B" WARNING LIGHTS
RETROREFLECTIVE FREE-STANDING PLASTIC DRUMS
NOTE: IF VEHICLE MOUNTED ARROW BOARDS USED, SHOULD BE AS HIGH AS PRACTICAL.
7' MIN.
EDGE OF TRAVELED WAY
GENERAL NOTES:
1. THE LOCATION OF CHANNELIZING DEVICES AND THE WORK AREA LAYOUT SHALL BE BASED ON THE CRITERIA IN THE FOLLOWING TABLE:
POSTED SPEED AND/OR DESIGN SPEED
MAXIMUM CHANNELIZING DEVICE SPACING (FEET)
ALONG BUFFER SPACE & WORK ZONE
TAPER
LONGITUDINAL BUFFER SPACE (ft)
TAPER† LENGTH (ft)
mph
<40 40 80 305 320
45 45 90 360 540
50 50 100 425 600
55 55 110 495 660
60 60 120 570 720
65 65 130 645 780
70 70 140 730 540
† NOTE: TAPER LENGTHS ARE DETERMINED USING THE FOLLOWING EQUATIONS:
L = WS FOR SPEEDS OF 45 mph OR GREATER
L = WS²/60 FOR SPEEDS OF 40 mph OR LESS
WHERE: L = MINIMUM LENGTH OF TAPER IN FEET
W = WIDTH OF OFFSET (USUALLY LANE WIDTH) IN FEET
S = DESIGN SPEED OR 85TH PERCENTILE SPEED IN MILES PER HOUR
†† NOTE: BUFFER SPACE MAY BE ADJUSTED AS NEEDED ACCORDING TO ROADWAY GEOMETRY TO ENSURE SIGHT DISTANCE REQUIREMENTS, AS DIRECTED BY THE ENGINEER.
2. FLASHING ARROW PANEL SHOULD BE AS LEVEL AS POSSIBLE AS APPROVED BY THE ENGINEER. FLASHING ARROW PANEL SHOULD BE LOCATED AT THE BEGINNING OF THE TAPER OR, IF THE SHOULDER IS TOO NARROW, BEHIND THE CHANNELIZING DEVICES IN THE CLOSED LANE.
3. CHANNELIZING DEVICES:
A. ALL CHANNELIZING DEVICES IN TAPERS SHALL BE RETROREFLECTIVE FREE STANDING PLASTIC DRUMS.
B. CHANNELIZING DEVICES IN TANGENTS MAY BE EITHER RETROREFLECTIVE FREE STANDING PLASTIC DRUMS OR 42" TALL CONES OR TUBULAR MARKERS
C. DEVICE RETROREFLECTIVE BANDS SHALL BE IN ACCORDANCE WITH THE LATEST EDITION OF THE MUTCD.
4. ALL WARNING SIGNS (W SERIES) SHOULD BE A MINIMUM OF 48" X 48". AND SHALL BE BLACK COPY ON FLUORESCENT ORANGE SHEETING.
5. ALL EXISTING SPEED LIMIT SIGNS WHICH ARE INFLUENCED BY OR CONFLICT WITH THE SPEED ZONE REDUCTION SHALL BE COVERED AS DIRECTED BY THE ENGINEER. THE REDUCED SPEED LIMIT IS IN EFFECT. TAPE SHALL NOT BE USED ON FACE OF SIGN.
6. ADDITIONAL REDUCED REGULATORY SPEED LIMIT SIGNS ARE REQUIRED AT EACH ENTRANCE RAMP WITHIN THE SPEED ZONE. TWO (2) WILL BE REQUIRED FOR EACH RAMP AND LOCATION WILL BE DETERMINED BY THE ENGINEER.
7. THIS TRAFFIC CONTROL PLAN, WITH SPEED ZONE, MAY NOT BE USED ON ANY FACILITY WHERE THE POSTED SPEED LIMIT IS BELOW 65 MPH WITHOUT A COMMISSION ORDER REQUESTING A SPEED LIMIT REDUCTION.
8. LAYOUT SHOWN ABOVE IS FOR AN INTERSTATE WITH A POSTED SPEED LIMIT OF 70 MPH. FOR A POSTED SPEED LIMIT OF 65 MPH, THE REDUCED SPEED LIMIT WILL BE 55 MPH.
9. A FLUORESCENT ORANGE PLAQUE IS REQUIRED WITH ALL REGULATORY SPEED LIMIT SIGNS REQUIRED FOR LANE CLOSURE.
10. ALL TRAFFIC CONTROL ITEMS SHOWN ON THIS SHEET WILL NOT BE MEASURED FOR SEPARATE PAYMENT. THIS WORK SHALL BE INCLUDED IN THE PRICE BID FOR MAINTENANCE OF TRAFFIC.
SPEED LIMIT 70
SPEED LIMIT 60
48" X 16" FLUORESCENT ORANGE PLAQUE
R2-1 (70) 48" X 60"
R2-1 (60) 48" X 60"
WHEN WORKERS ARE PRESENT
SPEEDING FINES DOUBLED
R16-3
LEFT LANE CLOSED 1 MILE (W20-5L) (1 MILE)
LEFT LANE CLOSED ½ MILE (W20-5L) (1/2 MILE)
LEFT LANE CLOSED 1500 FT (W20-5L) (1500')
RIGHT LANE CLOSED 1500 FT. (W20-5R) (1500')
RIGHT LANE CLOSED ½ MILE (W20-5R) (1/2 MILE)
RIGHT LANE CLOSED 1 MILE (W20-5R) (1 MILE)
W4-2L
W4-2R
W3-5
SPEED LIMIT 60
DRUMS
DRUMS OR 42" TALL CONES OR TUBULAR MARKERS
LONG. BUFFER SPACE
WORK ZONE * (1 MILE MAX.)
CHANNELIZING DEVICES (SEE NOTE 3 FOR TYPES REQUIRED)
L
½ L
A
100'
400'
500'
600'
1000'
1500'


STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
TRAFFIC CONTROL PLAN
FOR POSTED SPEED LIMIT
OF 65 OR 70 MPH
(INTERSTATES AND OTHER 4-LANE DIVIDED HIGHWAYS)
(MEDIAN LANE OR OUTSIDE LANE CLOSURE) (WORK DAY ONLY)
WORKING NUMBER TCP-5
SHEET NUMBER 6355
ISSUE DATE: AUGUST 01, 2017
REVISION BY DATE
REVISED TEXT. STN 12/11/25
LEGEND
* OR AS SHOWN ELSEWHERE ON THE PLANS.
FLASHING ARROW PANEL (TYPE "C")
BLACK LEGEND AND BORDER ON WHITE BACKGROUND
RETROREFLECTIVE FREE-STANDING PLASTIC DRUMS
TRAFFIC CONES (28" HEIGHT)
NOTE: IF VEHICLE MOUNTED ARROW BOARDS USED, SHOULD BE AS HIGH AS PRACTICAL.
7' MIN.
EDGE OF TRAVELED WAY
GENERAL NOTES:
1. THE LOCATION OF CHANNELIZING DEVICES AND THE WORK AREA LAYOUT SHALL BE BASED ON THE CRITERIA IN THE FOLLOWING TABLE:
POSTED SPEED AND/OR DESIGN SPEED
MAXIMUM CHANNELIZING DEVICE SPACING (††) TAPER
ALONG LANE LINE & WORK ZONE
LONGITUDINAL BUFFER SPACE (††)
TAPER † LENGTH (††)
mph
≤40 40 80 305 320
45 45 90 360 540
50 50 100 425 600
55 55 110 495 660
60 60 120 570 720
65 65 130 645 780
70 70 140 730 840
† NOTE: TAPER LENGTHS ARE DETERMINED USING THE FOLLOWING EQUATIONS:
L = WS FOR SPEEDS OF 45 mph OR GREATER
L = WS²/60 FOR SPEEDS OF 40 mph OR LESS
WHERE: L = MINIMUM LENGTH OF TAPER IN FEET
W = WIDTH OF OFFSET (USUALLY LANE WIDTH) IN FEET
S = DESIGN SPEED OR 85TH PERCENTILE SPEED IN MILES PER HOUR
†† NOTE: BUFFER SPACE MAY BE ADJUSTED AS NEEDED ACCORDING TO ROADWAY GEOMETRY TO MEET SIGHT DISTANCE REQUIREMENTS, AS DIRECTED BY THE ENGINEER.
2. FLASHING ARROW PANEL SHOULD BE AS LEVEL AS POSSIBLE AS APPROVED BY THE ENGINEER. FLASHING ARROW PANEL SHOULD BE LOCATED AT THE BEGINNING OF THE TAPER OR, IF THE SHOULDER IS TOO NARROW, BEHIND THE CHANNELIZING DEVICES IN THE CLOSED LANE.
3. CHANNELIZING DEVICE TYPES FOR:
A. APPROACH TAPER- RETROREFLECTIVE PLASTIC DRUMS
B. ALONG LANE LINE AND WORK ZONE- TRAFFIC CONES OR TUBULAR MARKERS (28" HEIGHT MINIMUM)
C. EXIT TAPER- TRAFFIC CONES OR TUBULAR MARKERS (28" HEIGHT MINIMUM)
4. WHEN WORK ZONE IS NO LONGER NEEDED, ALL SIGNS SHALL BE COVERED OR REMOVED AND THE DRUMS SHALL BE MOVED TO THE SHOULDER EDGE AT THE END OF THE WORK DAY.
5. FOR MOVING OPERATIONS (PAVING) THE CONTRACTOR SHALL HAVE TWO (2) SETS OF ADVANCE WARNING AND REGULATORY SIGNS, PLASTIC DRUMS, AND ARROW BOARD. WHEN THE CONSTRUCTION ZONE IS MOVED AHEAD, ALL SIGNS, PLASTIC DRUMS AND ARROW BOARD SHALL BE IN PLACE ON THE SECOND ZONE BEFORE REMOVING ANY SIGNS, PLASTIC DRUMS OR ARROW BOARD ON THE FIRST ZONE.
6. ALL WARNING SIGNS (W SERIES) SIGNS SHOULD BE A MINIMUM OF 48" X 48", AND SHALL BE BLACK COPY ON FLUORESCENT ORANGE SHEETING.
7. ALL EXISTING SPEED LIMIT SIGNS WHICH ARE INFLUENCED BY OR CONFLICT WITH THE SPEED ZONE REDUCTION SHALL BE COVERED AS DIRECTED BY THE ENGINEER WHILE THE REDUCED SPEED LIMIT IS IN EFFECT. TAPE SHALL NOT BE USED ON THE FACE OF SIGN.
8. ADDITIONAL REDUCED REGULATORY SPEED LIMIT SIGNS ARE REQUIRED AT EACH ENTRANCE RAMP WITHIN THE SPEED ZONE. TWO (2) WILL BE REQUIRED FOR EACH RAMP AND LOCATION WILL BE DETERMINED BY THE ENGINEER.
9. THIS TRAFFIC CONTROL PLAN, WITH SPEED ZONE, MAY NOT BE USED ON ANY FACILITY WHERE THE POSTED SPEED LIMIT IS BELOW 65 MPH WITHOUT A COMMISSION ORDER REQUESTING A SPEED LIMIT REDUCTION.
10. LAYOUT SHOWN ABOVE IS FOR AN INTERSTATE WITH A POSTED SPEED LIMIT OF 70 MPH. FOR POSTED SPEED LIMIT OF 65 MPH, THE REDUCED SPEED LIMIT WILL BE 55 MPH.
11. A FLUORESCENT ORANGE PLAQUE IS REQUIRED WITH ALL REGULATORY SPEED LIMIT SIGNS AND "REDUCED SPEED AHEAD" SIGNS REQUIRED FOR LANE CLOSURE.
12. ALL TRAFFIC CONTROL ITEMS SHOWN ON THIS SHEET WILL NOT BE MEASURED FOR SEPARATE PAYMENT. THIS WORK SHALL BE INCLUDED IN THE PRICE BID FOR MAINTENANCE OF TRAFFIC.
TRAFFIC CONES OR TUBULAR MARKERS
DRUMS
LONG. BUFFER SPACE
WORK ZONE * (1 MILE MAX.)
CHANNELIZING DEVICES (SEE NOTE 3 FOR TYPES REQUIRED)
48" X 16" FLUORESCENT ORANGE PLAQUE
SPEED LIMIT 70
R2-1 (70) 48" X 60"
SPEED LIMIT 60
R2-1 (60) 48" X 60"
48" X 16" FLUORESCENT ORANGE PLAQUE
W4-2L
W4-2R
W3-5
R16-3
WHEN WORKERS ARE PRESENT
SPEEDING FINES DOUBLED
RIGHT LANE CLOSED 1500 FT.
(W20-5R) (1500')
RIGHT LANE CLOSED ½MILE
(W20-5R) (1/2 MILE)
RIGHT LANE CLOSED 1 MILE
(W20-5R) (1 MILE)
LEFT LANE CLOSED 1 MILE (W20-5L) (1 MILE)
LEFT LANE CLOSED ½MILE (W20-5L) (1/2 MILE)
LEFT LANE CLOSED 1500 FT. (W20-5L) (1500')
48" X 16" FLUORESCENT ORANGE PLAQUE
SPEED LIMIT 60
W3-5
100' 400' 500' 600' 1000' 1600'
A
½ L
L

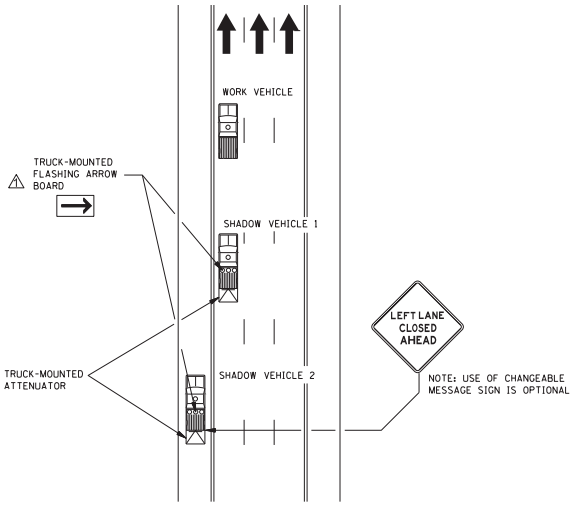

STATE
MISS.
PROJECT NO.
EDGE LINES
WORK AREA
SECOND LAW ENFORCEMENT VEHICLE
STOP
R1-1
(48" X 48")
50'
1000'
½ MILE ±
TRAFFIC
TRAFFIC
(SEE NOTE 8)
W3-1
(48" X 48")
ADVANCE LAW ENFORCEMENT VEHICLE
CMS
SECOND CHANGEABLE MESSAGE SIGN (CMS)
PHASE I - "ROAD CLOSED ½ MILE"
PHASE II - "PREPARE TO STOP"
CMS
FIRST CHANGEABLE MESSAGE SIGN (CMS)
PHASE I - "ROAD CLOSED X MILE"
PHASE II - "PREPARE TO STOP"
LOCATION BASED ON ANTICIPATED QUEUE
½ MILE MINIMUM
GENERAL NOTES:
1. THIS TYPE OF HIGHWAY CLOSURE SHOULD ONLY BE USED FOR CONSTRUCTION OPERATIONS WHEN THE DURATION OF CLOSURE WILL NOT EXCEED 30 MINUTES. AFTER THE HIGHWAY HAS BEEN CLOSED AND ESCORTED, USE THIS PROCEDURE A MINIMUM PERIOD OF 30 MINUTES SHOULD ELAPSE BEFORE ANOTHER SHORT DURATION CLOSURE, EXCEPT WITH THE APPROVAL OF THE ENGINEER.
2. AT LEAST TWO LAW ENFORCEMENT OFFICERS AND TWO LAW ENFORCEMENT VEHICLES SHOULD BE PROVIDED ON EACH APPROACH TO THE CLOSURE. EACH LAW ENFORCEMENT VEHICLE SHOULD HAVE A ROOF MOUNTED OPERATING FLASHING BLUE LIGHT OR LIGHT BAR.
3. RESTRICTIONS ON ROAD CLOSURES ARE SPECIFIED IN THE CONTRACT DOCUMENT.
4. THE ADVANCE LAW ENFORCEMENT VEHICLE SHOULD BE MOVED BACK AS REQUIRED BY THE QUEUING OF STOPPED VEHICLES.
5. IF QUEUE EXCEEDS THE FIRST CHANGEABLE MESSAGE SIGN (CMS) AT ANY TIME DURING A CLOSURE, THE TRAFFIC CONTROL PLAN SHOULD BE ADJUSTED AS NECESSARY, WITH APPROVAL OF THE ENGINEER.
6. TRAFFIC CONTROL FOR THE CLOSURE SHOULD BE ACCOMPLISHED IN THE FOLLOWING ORDER:
A. FIRST CHANGEABLE MESSAGE SIGN (CMS)
B. SECOND CHANGEABLE MESSAGE SIGN (CMS)
C. ADVANCE LAW ENFORCEMENT VEHICLE, LIGHTS AND FLASHERS ON.
D. W3-1 (48" X 48") ORANGE/BLACK TYPE XI RETROREFLECTIVE SHEETING" SIGNS ERECTED.
E. "R1-1 (48" X 48")" SIGNS ERECTED OR INSTALLED ON TEMPORARY STANDS TO STOP TRAFFIC, THE ORDER OF ERECTION SHOULD BE IN THE FOLLOWING ORDER: RIGHT SHOULDER THEN CENTER.
F. SECOND LAW ENFORCEMENT VEHICLE, LIGHTS AND FLASHERS ON.
7. TRAFFIC CONTROL SHOULD BE REMOVED IN THE FOLLOWING ORDER:
A. WITH TRAFFIC STOPPED REMOVE THE "R1-1 (48" X 48")" SIGNS FROM THE ROADWAY; SHOULDER IN THE FOLLOWING ORDER; CENTER THEN SIGN ON THE RIGHT SHOULDER. SECOND LAW ENFORCEMENT VEHICLE LEADS TRAFFIC THROUGH WORK AREA.
B. AFTER ALL STOPPED VEHICLES HAVE STARTED MOVING REMOVE W3-1 (48" X 48") SIGNS SHALL BE REMOVED. THESE SIGNS MAY BE COVERED IF RE-USE IS IMMINENT.
C. AFTER ALL VEHICLES HAVE RESUMED APPROXIMATELY NORMAL SPEED, THE CHANGEABLE MESSAGE SIGNS SHALL BE TURNED OFF.
8. UNILLUMINATED SECTIONS OF HIGHWAYS SHOULD NOT BE CLOSED DURING HOURS OF DARKNESS EXCEPT FOR EMERGENCIES OR WITH THE APPROVAL OF THE ENGINEER. WHEN THE HIGHWAY MUST BE CLOSED DURING HOURS OF DARKNESS, A TYPE B HIGH INTENSITY FLASHING BARRICADE WARNING LIGHT SHALL BE USED ON EACH W3-1 SIGN.
9. IF AN ENTRANCE RAMP IS LOCATED BETWEEN THE SECOND CMS AND R1-1, THE CMS AND W3-1 SIGNS SHALL ALSO BE ERECTED ON THE RAMP SHOULDER.
10. THE ABOVE DURATION WILL APPLY TO EACH APPROACH TO THE CLOSURE.
11. ALL TRAFFIC CONTROL ITEMS SHOWN ON THIS SHEET WILL NOT BE MEASURED FOR SEPARATE PAYMENT; THIS WORK SHALL BE INCLUDED IN THE PRICE BID FOR MAINTENANCE OF TRAFFIC, INCLUDING SECURING LAW ENFORCEMENT SERVICES.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
SHORT DURATION CLOSING OF TWO-LANE TWO-WAY HIGHWAYS
MDOT
WORKING NUMBER TCP-6
SHEET NUMBER 6356
ISSUE DATE: AUGUST 01, 2017
DATE | REVISION | BY
12/11/23 | REVISED TEXT. | STN


STATE
MISS.
PROJECT NO.
PAVED SHOULDER
TRAFFIC
TRAFFIC
½ MILE ±
EDGE LINES
WORK AREA
50'
SECOND LAW ENFORCEMENT VEHICLE
STOP
R1-1 (48" X 48")
TRAFFIC
TRAFFIC
½ MILE ±
MEDIAN
PAVED SHOULDER
(SEE NOTE 8)
W3-1 (48" X 48")
LOCATION BASED ON ANTICIPATED QUEUE ½ MILE MINIMUM
ADVANCE LAW ENFORCEMENT VEHICLE
CMS
SECOND CHANGEABLE MESSAGE SIGN (CMS) PHASE I - "ROAD CLOSED ½ MILE" PHASE II - "PREPARE TO STOP"
CMS
FIRST CHANGEABLE MESSAGE SIGN (CMS) PHASE I - "ROAD CLOSED X MILE" PHASE II - "PREPARE TO STOP"
GENERAL NOTES:
1. THIS TYPE OF HIGHWAY CLOSURE SHOULD ONLY BE USED FOR CONSTRUCTION OPERATIONS WHEN THE ROADWAY IS CLOSED FOR NOT EXCEED 30 MINUTES, AFTER THE HIGHWAY HAS BEEN CLOSED AND REOPENED VIA THIS PROCEDURE, A MINIMUM PERIOD OF 30 MINUTES SHOULD ELAPSE BEFORE ANOTHER SHORT DURATION CLOSURE, EXCEPT WITH THE APPROVAL OF THE ENGINEER.
2. AT LEAST TWO LAW ENFORCEMENT OFFICERS AND TWO LAW ENFORCEMENT VEHICLES SHOULD BE PROVIDED ON EACH APPROACH TO THE CLOSURE. EACH LAW ENFORCEMENT VEHICLE SHOULD HAVE A ROOF MOUNTED OPERATING FLASHING BLUE LIGHT OR LIGHT BAR.
3. RESTRICTIONS ON ROAD CLOSURES ARE SPECIFIED IN THE CONTRACT DOCUMENT.
4. THE ADVANCE LAW ENFORCEMENT VEHICLE SHOULD BE MOVED BACK AS REQUIRED BY THE QUEUING OF STOPPED VEHICLES.
5. IF QUEUE EXCEEDS THE FIRST CHANGEABLE MESSAGE SIGN (CMS) AT ANY TIME DURING A CLOSURE, THE TRAFFIC CONTROL PLAN SHOULD BE ADJUSTED AS NECESSARY, WITH APPROVAL OF THE ENGINEER.
6. TRAFFIC CONTROL FOR THE CLOSURE SHOULD BE ACCOMPLISHED IN THE FOLLOWING ORDER:
A. FIRST CHANGEABLE MESSAGE SIGN (CMS)
B. SECOND CHANGEABLE MESSAGE SIGN (CMS)
C. ADVANCE LAW ENFORCEMENT VEHICLE, LIGHTS AND FLASHERS ON.
D. "W3-1 (48" X 48") ORANGE/BLACK TYPE XI RETROREFLECTIVE SHEETING) SIGNS ERECTED. OR INSTALLED ON TEMPORARY STANDS.
E. "R1-1 (48" X 48") SIGNS ERECTED TO STOP TRAFFIC, THE ORDER OF ERECTION SHOULD BE TOWARD THE MEDIAN SHOULDER ON THE FOLLOWING ORDER: RIGHT SHOULDER, THEN CENTER, THEN MEDIAN SHOULDER.
F. SECOND LAW ENFORCEMENT VEHICLE, LIGHTS AND FLASHERS ON.
7. TRAFFIC CONTROL SHOULD BE REMOVED IN THE FOLLOWING ORDER:
A. WITH TRAFFIC STOPPED, REMOVE THE "R1-1 (48" X 48") SIGNS TOWARD THE RIGHT SHOULDER IN THE FOLLOWING ORDER: MEDIAN, THEN CENTER, THEN SIGN ON THE RIGHT SHOULDER, SECOND LAW ENFORCEMENT VEHICLE LEADS TRAFFIC THROUGH WORK AREA.
B. AFTER ALL STOPPED VEHICLES HAVE STARTED MOVING, THE "W3-1 (48" X 48") SIGNS SHALL BE REMOVED. THESE SIGNS MAY BE COVERED IF RE-USE IS IMMINENT
C. AFTER ALL VEHICLES HAVE RESUMED APPROXIMATELY NORMAL SPEED, THE CHANGEABLE MESSAGE SIGNS SHALL BE TURNED OFF.
8. UNILLUMINATED SECTIONS OF HIGHWAYS SHOULD NOT BE CLOSED DURING HOURS OF DARKNESS EXCEPT FOR EMERGENCIES OR WITH THE APPROVAL OF THE ENGINEER. WHEN SUCH HIGHWAYS ARE CLOSED DURING HOURS OF DARKNESS, A TYPE B HIGH INTENSITY FLASHING BARRICADE WARNING LIGHT SHALL BE USED ON EACH W3-1 SIGN.
9. IF AN ENTRANCE RAMP IS LOCATED BETWEEN THE SECOND CMS AND R1-1, THE CMS AND W3-1 SIGNS SHALL ALSO BE ERECTED ON THE RAMP SHOULDER.
10. THE ABOVE DURATION WILL APPLY TO EACH APPROACH TO THE CLOSURE.
11. ALL TRAFFIC CONTROL ITEMS SHOWN ON THIS SHEET WILL NOT BE MEASURED FOR SEPARATE PAYMENT. THIS WORK SHALL BE INCLUDED IN THE PRICE BID FOR MAINTENANCE OF TRAFFIC INCLUDING SECURING LAW ENFORCEMENT SERVICES.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
SHORT DURATION CLOSING OF DIVIDED HIGHWAYS
MDOT
WORKING NUMBER TCP-7
SHEET NUMBER 6357
ISSUE DATE: AUGUST 01, 2017
DATE | REVISION | BY
12/11/25 | REVISED TEXT. | STM


STATE MISS.
PROJECT NO.
ROAD CLOSED
DETOUR
BARRICADE CLOSING A ROAD
WING BARRICADES
1. WING BARRICADES ARE TYPE III BARRICADES ERECTED ON THE SHOULDER ON ONE OR BOTH SIDES OF THE PAVEMENT TO GIVE THE SENSATION OF A NARROWING OR RESTRICTED ROADWAY. WING BARRICADES MAY BE USED AS A MOUNTING FOR THE ADVANCE WARNING SIGNS OR FLASHERS.
2. WING BARRICADES SHOULD BE USED:
A. IN ADVANCE OF A CONSTRUCTION PROJECT EVEN WHEN NO PART OF THE ROADWAY IS ACTUALLY CLOSED.
B. IN ADVANCE OF ALL BRIDGE OR CULVERT WIDENING OPERATIONS.
BARRICADE CHARACTERISTICS
I II III
WIDTH OF RAIL** 8" MIN. - 12" MAX. 8" MIN. - 12" MAX. 8" MIN. - 12" MAX.
LENGTH OF RAIL** 24" MIN. / 96" MAX. 24" MIN. /96" MAX. 48" MIN. / 96" MAX.
WIDTH OF STRIPE* 6" 6" 6"
HEIGHT 36" MIN. 36" MIN. 60" MIN.
NUMBER OF RETROREFLECTORIZED RAIL FACES 2 (ONE EACH DIRECTION) 4 (TWO EACH DIRECTION) 3 IF FACING TRAFFIC IN ONE DIRECTION 6 IF FACING TRAFFIC IN TWO DIRECTIONS
2' MIN. / 8' MAX.
8" TO 12"
5' MIN.
TYPE I
4' MIN. / 8' MAX.
TYPE II
5' MIN.
TYPE III
STANDARD BARRICADES
1. THE RETROREFLECTIVE MARKING FOR BARRICADE RAILS SHALL BE ORANGE AND WHITE (SLOPING DOWNWARD AT AN ANGLE OF 45° IN THE DIRECTION THAT TRAFFIC IS TO PASS.
2. RAIL STRIPE SHOULD BE 6 INCHES EXCEPT THAT 4-INCH WIDE STRIPES MAY BE USED IF RAIL LENGTHS ARE LESS THAN 36 INCHES.
3. DO NOT PLACE SANDBAGS OR OTHER DEVICES ON BARRICADE RAILS TO PROVIDE MASS SANDBAGS, HOWEVER, MAY BE PLACES AS BALLAST TO THE LOWER PARTS OF THE FRAME OR THE STAYS TO BARRICADES.
4. FOR ADDITIONAL INFORMATION OR DETAILS, SEE MUTCD, LATEST EDITION.
5. BARRICADES ARE CLASSIFIED BY FHWA AS CATEGORY II WORK ZONE DEVICES. A LIST OF CRASHWORTHY BARRICADES AND OTHER CATEGORY II DEVICES CAN BE FOUND ON FHWA'S WEBSITE: http://safety.fhwa.dot.gov/roadway_dept/policy/mutcd/fmutcdca_ca.htm
6. WHERE ROAD USERS INCLUDE PEDESTRIANS, THE PROVISION OF SUPPLEMENTAL AUDIBLE INFORMATION OR DETECTABLE BARRIERS OR BARRICADES SHOULD BE PROVIDED FOR PEOPLE WITH VISION DISABILITIES.
7. BARRICADE RAIL SUPPORTS SHOULD NOT PROJECT INTO PEDESTRIAN CIRCULATION ROUTES MORE THAN 4 INCHES FOR THE SUPPORTS LOCATED BETWEEN 27 INCHES TO 80 INCHES ABOVE THE EXISTING SURFACE.
* 1. FOR RAILS LESS THAN 36" LONG, 4" WIDE STRIPES MAY BE USED.
** 2. BARRICADES INTENDED FOR USE ON EXPRESSWAYS, FREEWAYS AND OTHER HIGH SPEED ROADWAYS, SHALL HAVE A MINIMUM OF 270 in² OF REFLECTIVE AREA FACING TRAFFIC.
ORANGE
24"
18"
BLACK
RETROREFLECTIVE CHEVRON ALIGNMENT SIGN DETAIL (W1-8)
1. A CHEVRON SIGN CONSISTS OF A BLACK CHEVRON TYPE MARKING ON AN ORANGE BACKGROUND AND SHALL POINT IN THE DIRECTION OF TRAFFIC FLOW.
2. THE CHEVRON SIGN SHALL BE MOUNTED ON CRASHWORTHY SUPPORT.
3. CHEVRON SIGNS MAY BE USED TO SUPPLEMENT OTHER STANDARD DEVICES WHERE ONE OR MORE LANES ARE CLOSED FOR CONSTRUCTION OR MAINTENANCE. THEY SHOULD BE PLACED APPROXIMATELY 2'-0" BEHIND THE LANE TRANSITION STRIPE.
4. CHEVRON SIGNS SHALL BE INSTALLED AT A MINIMUM HEIGHT OF 4 FEET MEASURED VERTICALLY FROM THE BOTTOM OF THE SIGN TO THE ELEVATION OF THE NEAR EDGE OF THE TRAVELWAY.
12"
3" MIN.
3" MIN.
45°
YELLOW
BLACK
36"
7'-0" MIN.
4'-0" MIN.
TYPE 3 OBJECT MARKER (OM3-R)
1. TYPE 3 OBJECT MARKERS SHALL BE USED AT ALL EXPOSED BRIDGE ABUTMENTS AND AT OTHER LOCATIONS AS DEEMED NECESSARY BY THE ENGINEER.
2. THE OM3-R IS SHOWN. THE OM3-L IS SIMILAR EXCEPT THE STRIPES SLOPE DOWNWARD FROM THE LOWER LEFT SIDE TO THE LOWER RIGHT SIDE AND SHALL BE PLACED ON THE LEFT SIDE OF THE OBJECT.
3. THE INSIDE EDGE OF THE MARKER SHALL BE IN LINE WITH THE INNER EDGE OF THE OBSTRUCTION.
4. THE STRIPING SHALL CONSIST OF ALTERNATING BLACK AND RETOREFLECTIVE YELLOW SLOPING DOWNWARD TOWARD THE SIDE ON WHICH TRAFFIC IS THE PASS.
RETROREFLECTIVE ORANGE
RETROREFLECTIVE WHITE
36" MIN.
18" MIN. DIA.
PLASTIC DRUM DETAIL
MORE THAN 36".
4'-6"
MAX.
RETROREFLECTIVE WHITE
RETROREFLECTIVE ORANGE
PLASTIC CONE DETAIL (36" OR GREATER)
1. PLASTIC DRUMS, TUBULAR MARKERS, OR PLASTIC CONES SHALL BE ON END AND USED AS AN EXPEDIENT METHOD FOR TRAFFIC CHANNELIZATION, THE COLOR AND MARKING OF THE DEVICE USED SHALL BE CONSISTENT WITH MARKING STANDARDS FOR BARRICADE. THE PREDOMINANT COLOR OF THESE DEVICES SHALL BE ORANGE AND SHALL BE RETROREFLECTIVE, HORIZONTAL, CIRCUMFERENTIAL WHITE STRIPES AS SHOWN ON THE DETAILS.
2. DRUMS, TUBULAR MARKERS, OR PLASTIC CONES SHOULD NEVER BE PLACED IN THE ROADWAY WITHOUT WARNING SIGNS.
3. WHERE PRACTICAL PLASTIC DRUMS, TUBULAR MARKERS, OR PLASTIC CONES SHOULD BE PLACED NO CLOSER THAN 3'-0" FROM THE EDGE OF TRAVELED LANE.
4. BALLAST SHALL NOT BE PLACED ON THE TOP OF THE DRUM.
RETROREFLECTIVE ORANGE
28" MIN.
RETROREFLECTIVE WHITE
RETROREFLECTIVE ORANGE
TUBULAR MARKER DETAIL
RETROREFLECTIVE WHITE
28" MIN. TO 36" MAX.
RETROREFLECTIVE ORANGE
PLASTIC CONE DETAIL (28" – 36")
STN BY DATE REVISION
12/11/25 REVISED TEXT AND DETAILS.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
HIGHWAY SIGN AND BARRICADE DETAILS FOR CONSTRUCTION PROJECTS
MDOT
WORKING NUMBER TCP-8
ISSUE DATE: AUGUST 01, 2017
SHEET NUMBER 6358

STATE	PROJECT NO.
MISS.	

MOBILE OPERATIONS ON MULTILANE ROAD



MOBILE OPERATIONS ON MULTILANE ROAD

NOTES FOR MULTILANE LANE OPERATION:

⚠ 1. SHADOW AND WORK VEHICLES SHALL DISPLAY HIGH-INTENSITY ROTATING, FLASHING, OSCILLATING, OR STROBE LIGHTS. AN ARROW BOARD SHALL BE USED WHEN A FREEWAY LANE IS CLOSED. WHEN MORE THAN ONE FREEWAY LANE IS CLOSED, A SEPARATE ARROW BOARD SHALL BE USED FOR EACH CLOSED LANE.

⚠ 2. SHADOW VEHICLE 2 SHOULD BE EQUIPPED WITH AN ARROW BOARD AND TRUCK MOUNTED ATTENUATOR (TMA), AN APPROPRIATE LANE CLOSURE SIGN SHOULD BE PLACED ON SHADOW VEHICLE 2 SO AS NOT TO OBSCURE THE ARROW BOARD.

⚠ 3. SHADOW VEHICLE 1 SHOULD BE EQUIPPED WITH AN ARROW BOARD AND TRUCK-MOUNTED ATTENUATOR (TMA).

4. SHADOW VEHICLE 2 SHOULD TRAVEL AT A VARYING DISTANCE FROM THE WORK OPERATION SO AS TO PROVIDE ADEQUATE SIGHT DISTANCE FOR TRAFFIC APPROACHING FROM THE REAR.

⚠ 5. THE SPACING BETWEEN THE WORK VEHICLES AND THE SHADOW VEHICLES, AND BETWEEN EACH SHADOW VEHICLE, SHOULD BE MINIMIZED TO DETER ROAD USERS FROM DRIVING IN BETWEEN.

⚠ 6. ON HIGH-SPEED ROADWAYS, A THIRD SHADOW VEHICLE (NOT SHOWN) MAY BE USED WITH SHADOW VEHICLE 1 IN THE CLOSED LANE, SHADOW VEHICLE 2 STRADDLING THE EDGE LINE, AND SHADOW VEHICLE 3 ON THE SHOULDER.

⚠ 7. ARROW BOARD SHALL BE AS A MINIMUM TYPE B, 60" X 30" IN ACCORDANCE WITH THE CRITERIA PRESENTED IN THE MUTCD.

8. WORK SHOULD NORMALLY BE DONE DURING OFF-PEAK HOURS.

9. VEHICLE-MOUNTED SIGNS SHOULD BE MOUNTED WITH THE BOTTOM OF THE SIGN LOCATED AT A MINIMUM HEIGHT OF 48" ABOVE THE PAVEMENT AND SHALL NOT BE OBSCURED BY EQUIPMENT OR SUPPLIES. SIGN LEGENDS SHALL BE COVERED OR TURNED FROM VIEW WHEN WORK IS NOT IN PROGRESS.

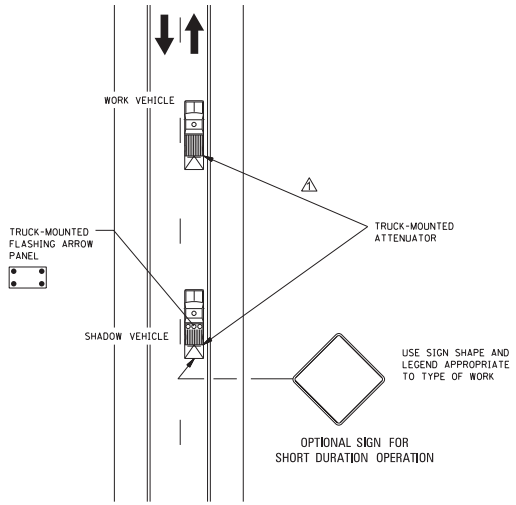
⚠ 10. WHEN THE WORK VEHICLE OCCUPIES AN INTERIOR LANE (A LANE OTHER THAN THE FAR RIGHT OR FAR LEFT) OF A DIRECTIONAL ROADWAY HAVING A RIGHT-HAND SHOULDER 10 FEET OR MORE IN WIDTH, SHADOW VEHICLE 2 SHOULD DRIVE ON THE RIGHT-HAND SHOULDER WITH A SIGN INDICATING THAT WORK IS TAKING PLACE IN THE INTERIOR LANE.

⚠ 11. ON HIGH-SPEED ROADWAYS, A THIRD SHADOW VEHICLE (NOT SHOWN) MAY BE USED WITH SHADOW VEHICLE 1 IN THE CLOSED LANE, SHADOW VEHICLE 2 STRADDLING THE EDGE LINE, AND SHADOW VEHICLE 3 ON THE SHOULDER.

⚠ 12. WHERE ADEQUATE SHOULDER WIDTH IS NOT AVAILABLE, SHADOW VEHICLE 3 MAY ALSO STRADDLE THE EDGE LINE.

⚠ 13. ALL TRAFFIC CONTROL ITEMS SHOWN ON THIS SHEET WILL NOT BE MEASURED FOR SEPARATE PAYMENT. THIS WORK SHALL BE INCLUDED IN THE PRICE BID FOR MAINTENANCE OF TRAFFIC.

MOBILE OPERATIONS ON TWO–LANE ROAD



MOBILE OPERATIONS ON TWO–LANE ROAD

NOTES FOR TWO-LANE OPERATION:

1. WHERE PRACTICAL AND WHEN NEEDED, THE WORK AND SHADOW VEHICLES SHOULD PULL OVER PERIODICALLY TO ALLOW TRAFFIC TO PASS. IF THIS CAN NOT BE DONE FREQUENTLY, AS AN ALTERNATIVE, A "DO NOT PASS" SIGN MAY BE PLACED ON THE REAR OF THE VEHICLE BLOCKING THE LANE.

2. THE DISTANCE BETWEEN THE WORK AND SHADOW VEHICLES MAY VARY ACCORDING TO TERRAIN, PAINT DRYING TIME, AND OTHER FACTORS. SHADOW VEHICLES ARE USED TO WARN TRAFFIC OF THE OPERATION AHEAD. WHENEVER ADEQUATE STOPPING SIGHT DISTANCE EXISTS TO THE REAR, THE SHADOW VEHICLE SHOULD MAINTAIN THE MINIMUM DISTANCE AND PROCEED AT THE SAME SPEED AS THE WORK VEHICLE. THE SHADOW VEHICLE SHOULD SLOW DOWN IN ADVANCE OF VERTICAL OR HORIZONTAL CURVES THAT RESTRICT SIGHT DISTANCE.

3. ADDITIONAL SHADOW VEHICLES TO WARN AND REDUCE THE SPEED OF ONCOMING OR OPPOSING TRAFFIC MAY BE USED. POLICE PATROL CARS MAY BE USED FOR THIS PURPOSE.

4. A TRUCK-MOUNTED ATTENUATOR (TMA) SHOULD BE USED ON THE SHADOW VEHICLE AND MAY BE USED ON THE WORK VEHICLE.

5. THE WORK VEHICLE SHALL BE EQUIPPED WITH BEACONS, AND THE SHADOW VEHICLES SHALL BE EQUIPPED WITH TWO HIGH-INTENSITY FLASHING LIGHTS MOUNTED ON THE REAR, ADJACENT TO THE SIGN. SHADOW AND WORK VEHICLES SHALL DISPLAY FLASHING OR ROTATING BEACONS BOTH FORWARD AND TO THE REAR.

6. VEHICLE-MOUNTED SIGNS SHOULD BE MOUNTED WITH THE BOTTOM OF THE SIGN LOCATED AT A MINIMUM HEIGHT OF 48" ABOVE THE PAVEMENT AND SHALL NOT BE OBSCURED BY EQUIPMENT OR SUPPLIES. SIGN LEGENDS SHALL BE COVERED OR TURNED FROM VIEW WHEN WORK IS NOT IN PROGRESS.

7. ARROW BOARD TO BE USED IN CAUTION MODE.

8. ALL TRAFFIC CONTROL ITEMS SHOWN ON THIS SHEET WILL NOT BE MEASURED FOR SEPARATE PAYMENT. THIS WORK SHALL BE INCLUDED IN THE PRICE BID FOR MAINTENANCE OF TRAFFIC.

DATE	REVISION	BY
12/17/25	REVISED TEXT AND DETAILS	SYN

MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN

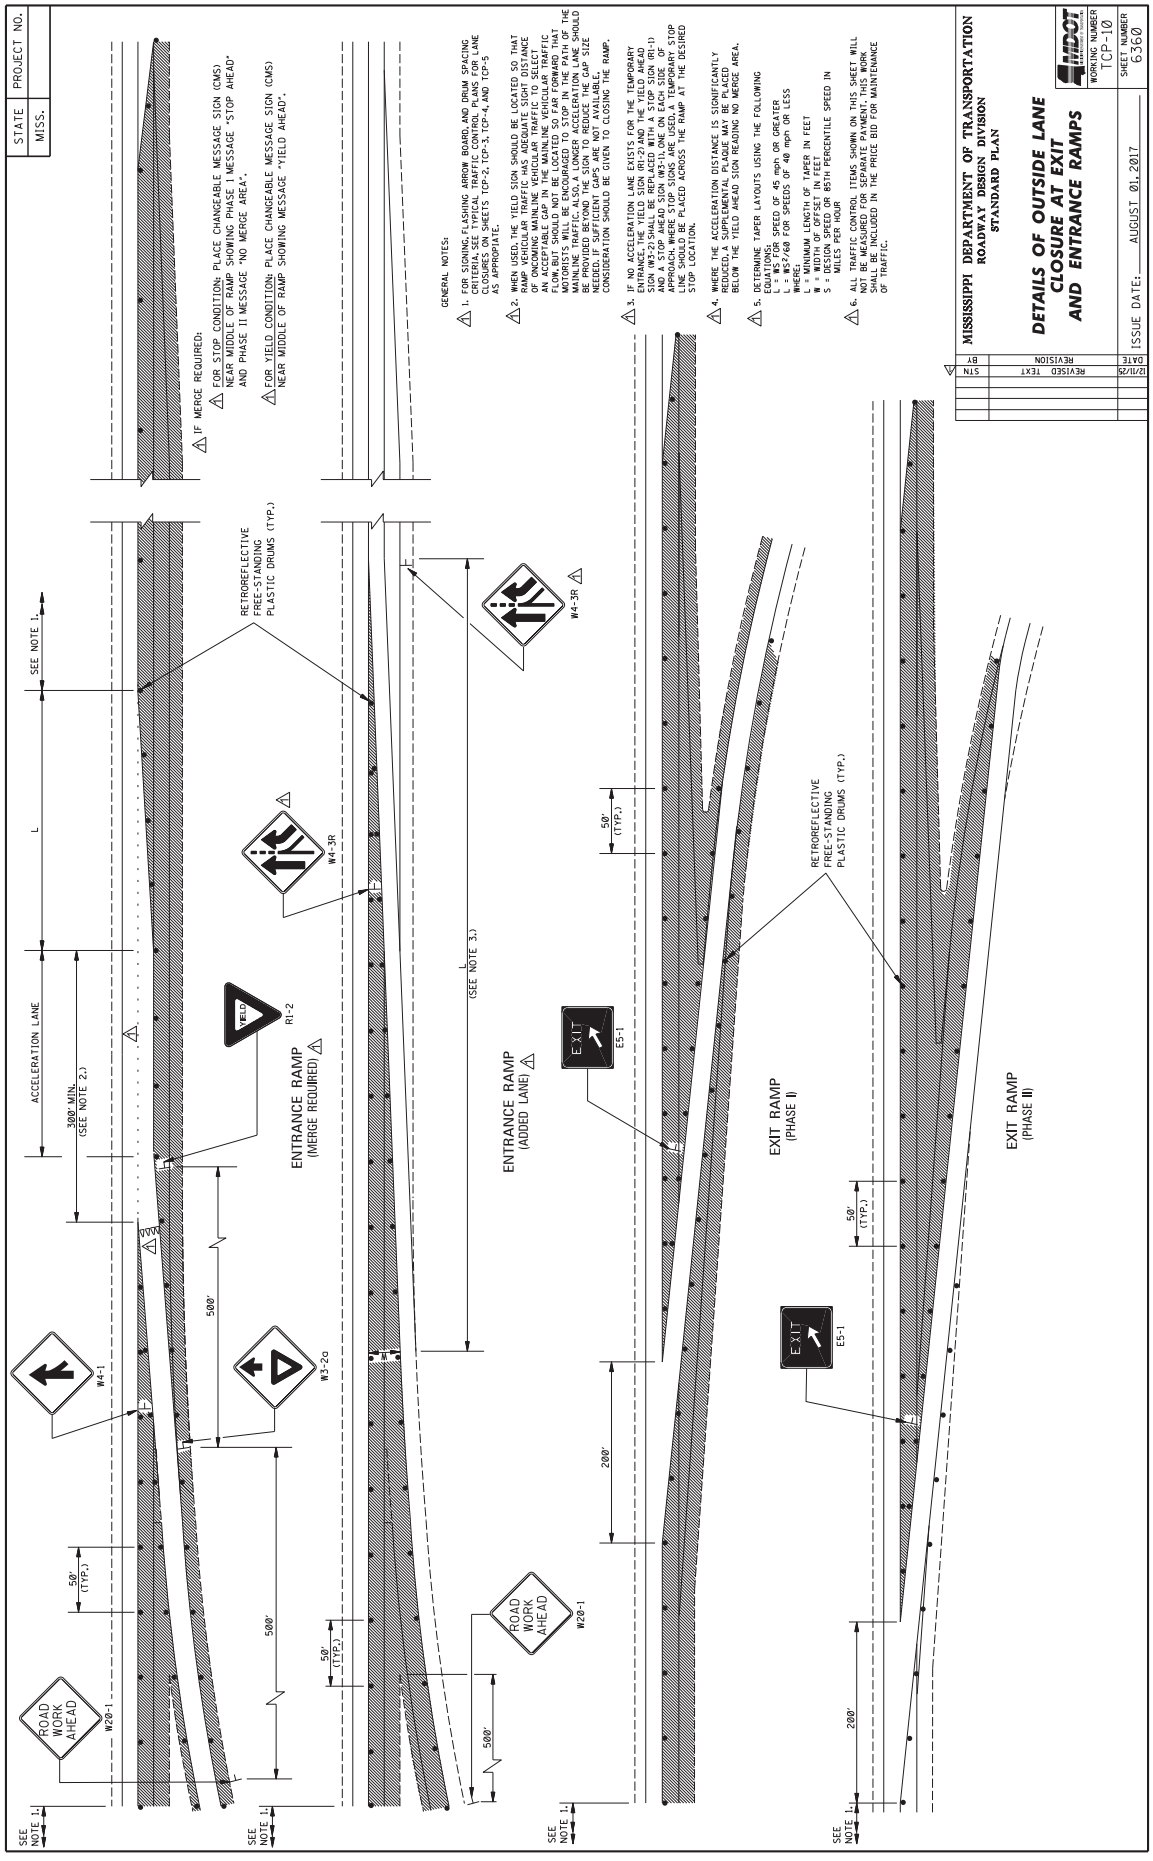
TRAFFIC CONTROL PLAN MOBILE OPERATIONS MULTILANE ROADS AND TWO–LANE ROADS

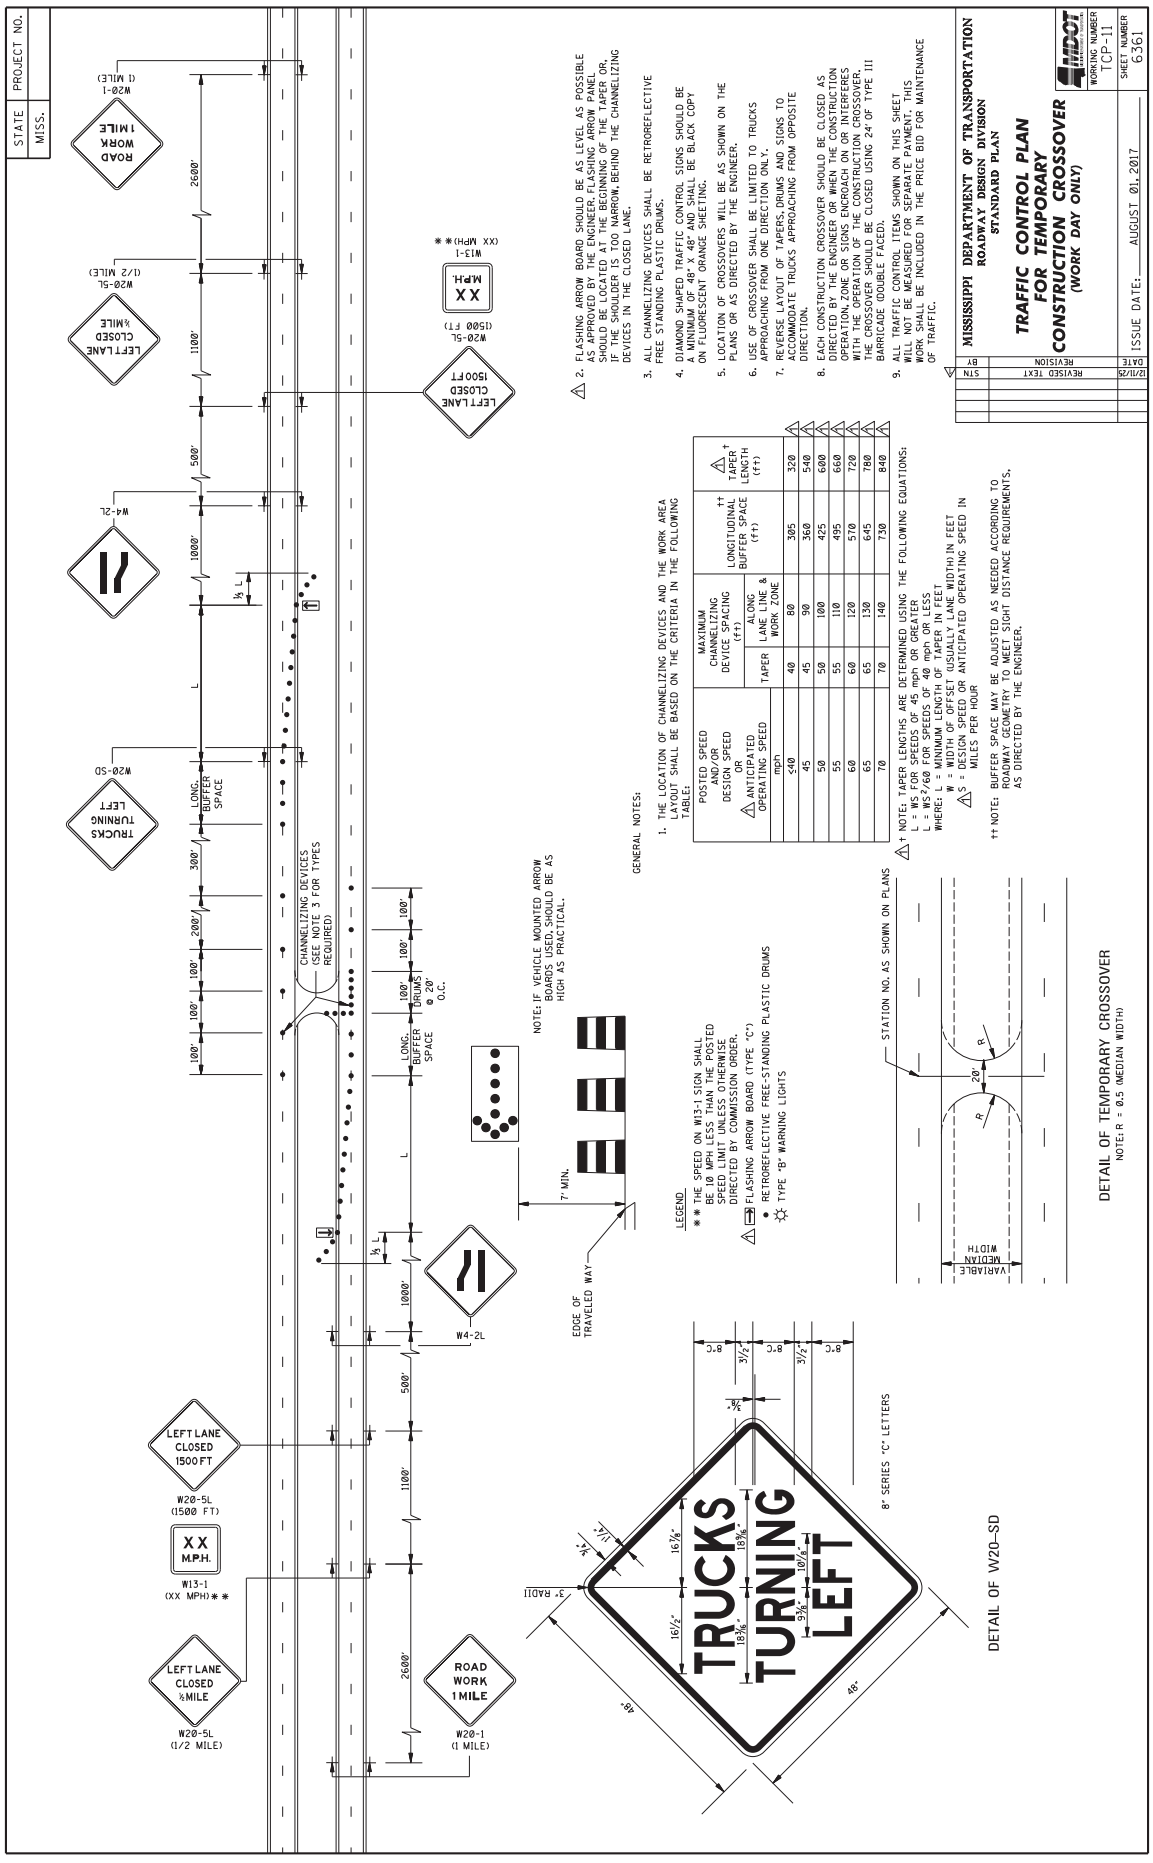
MDOT

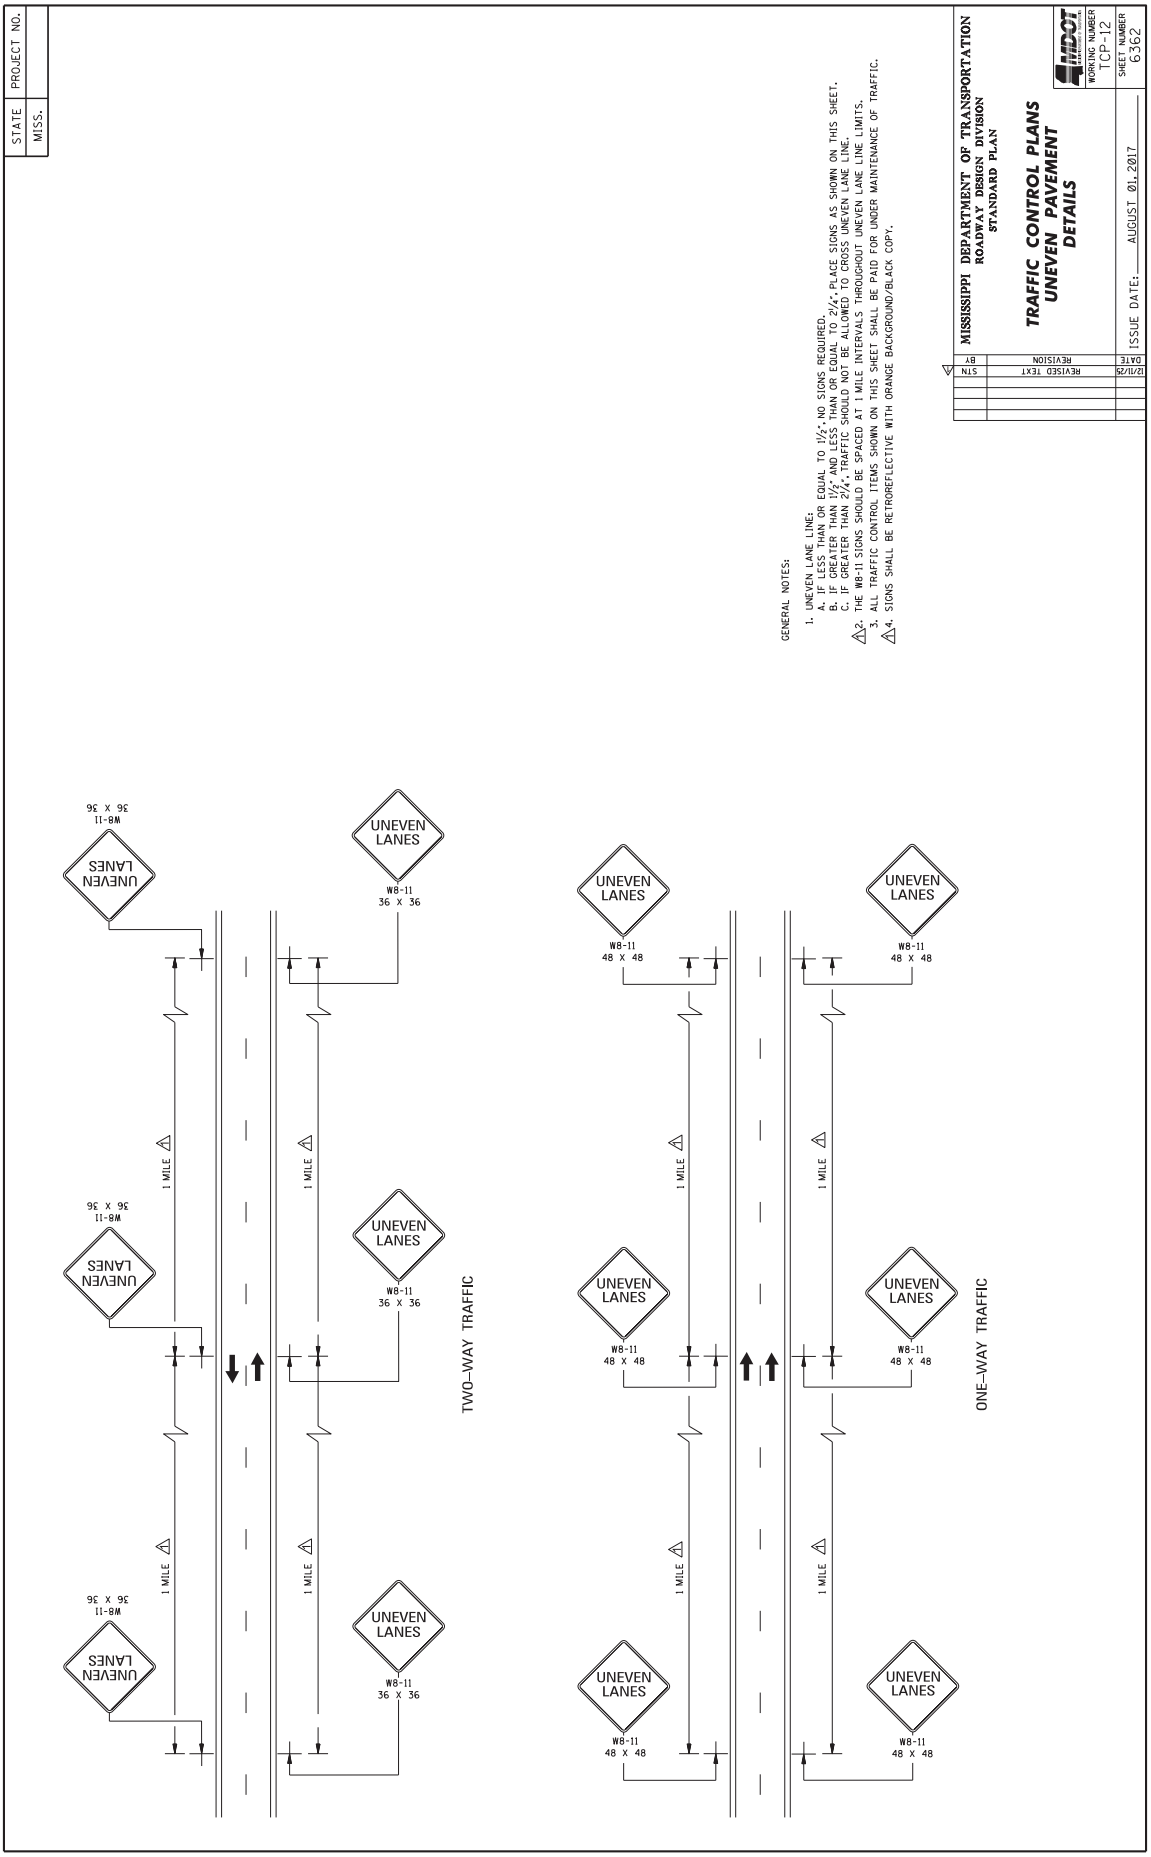
WORKING NUMBER TCP-9

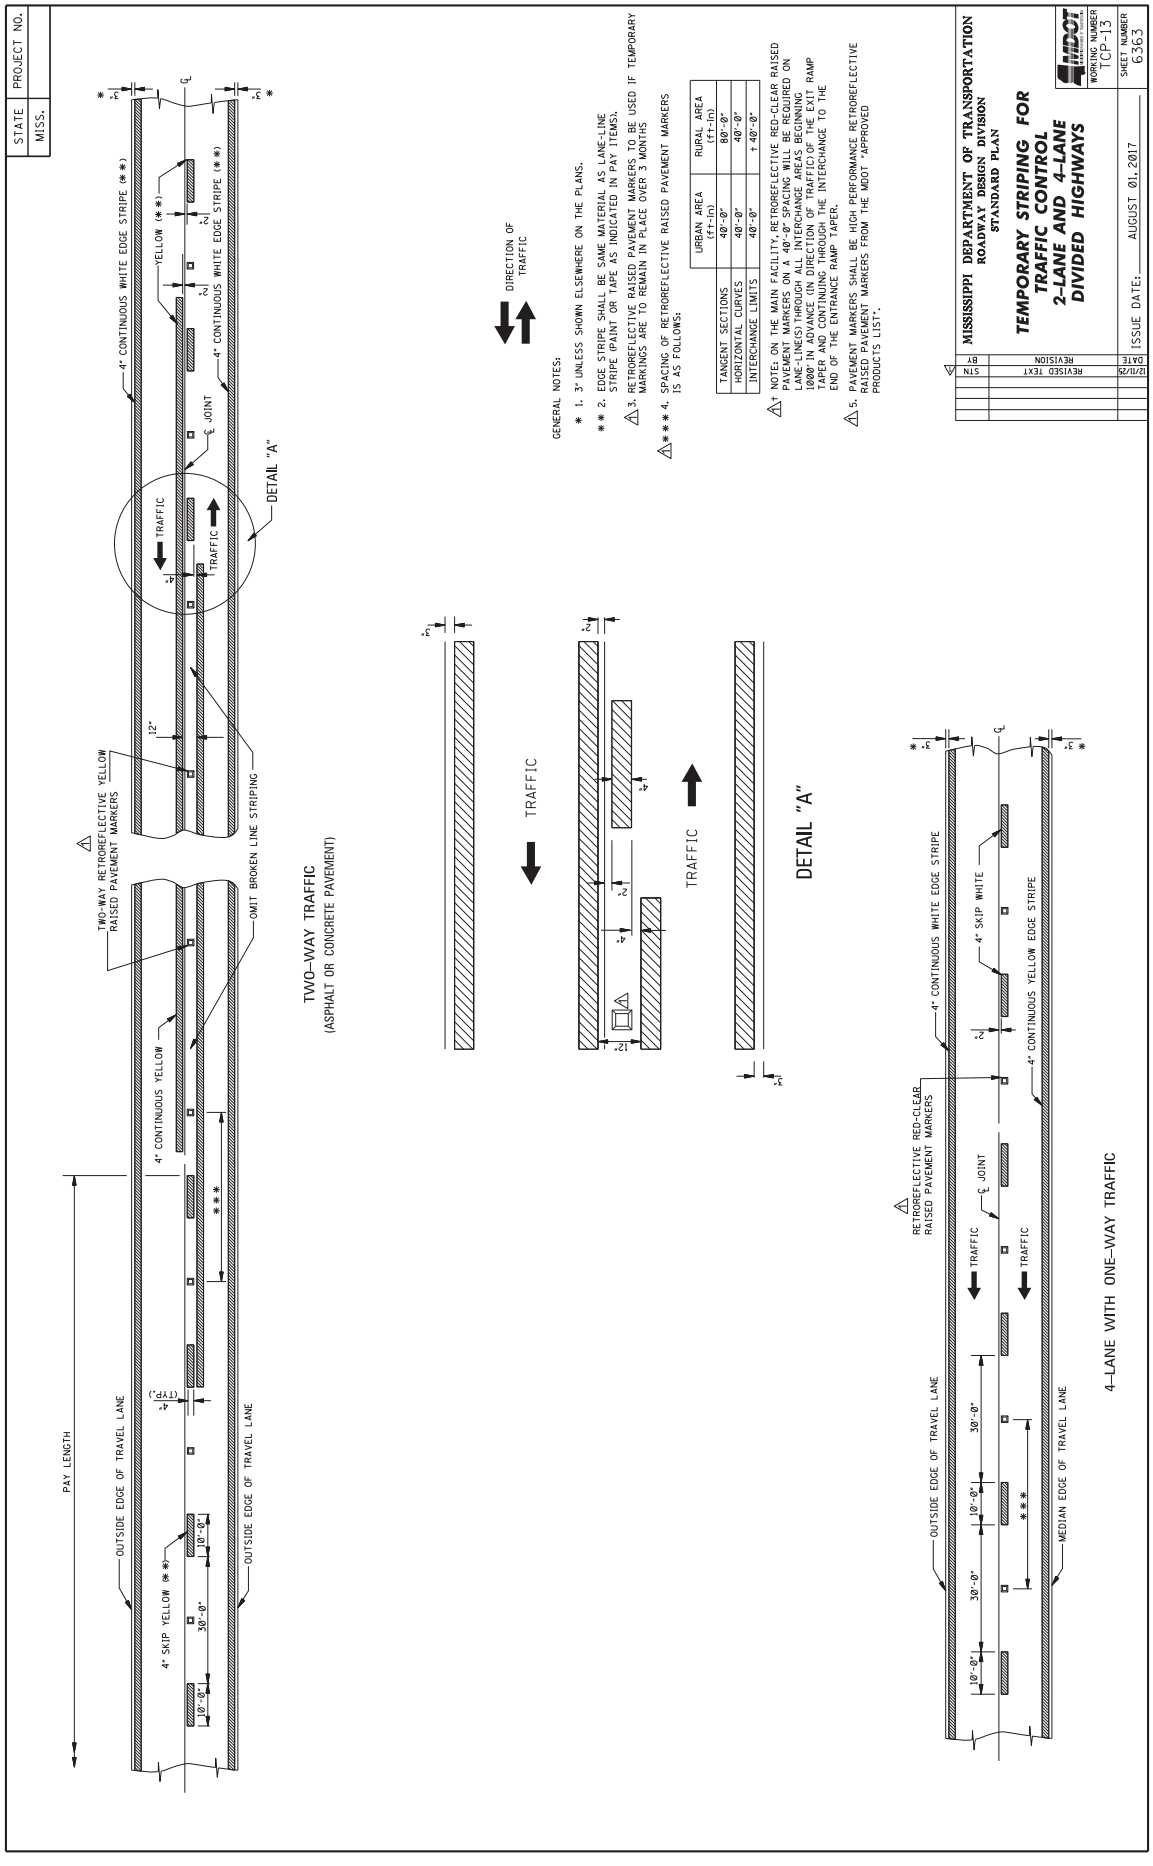
ISSUE DATE: AUGUST 01, 2017

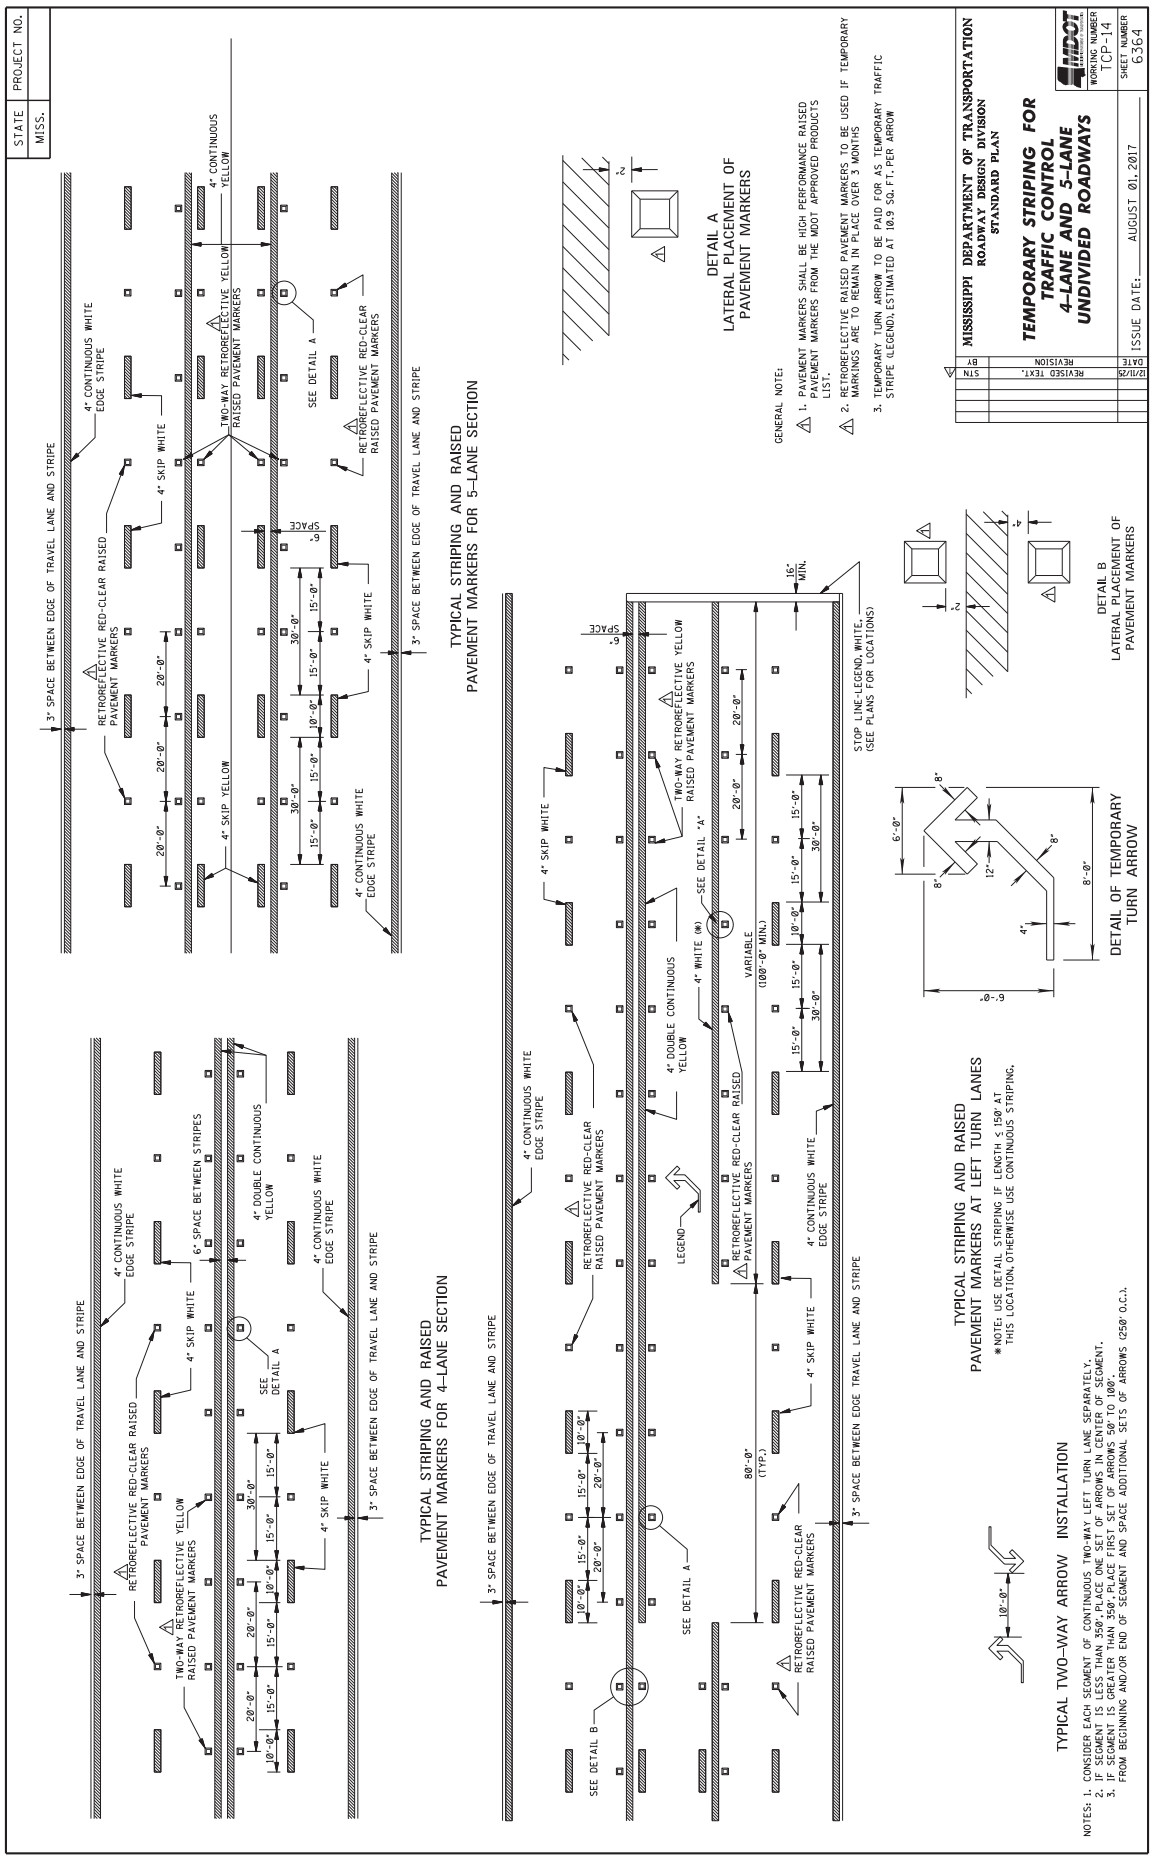
SHEET NUMBER 6359

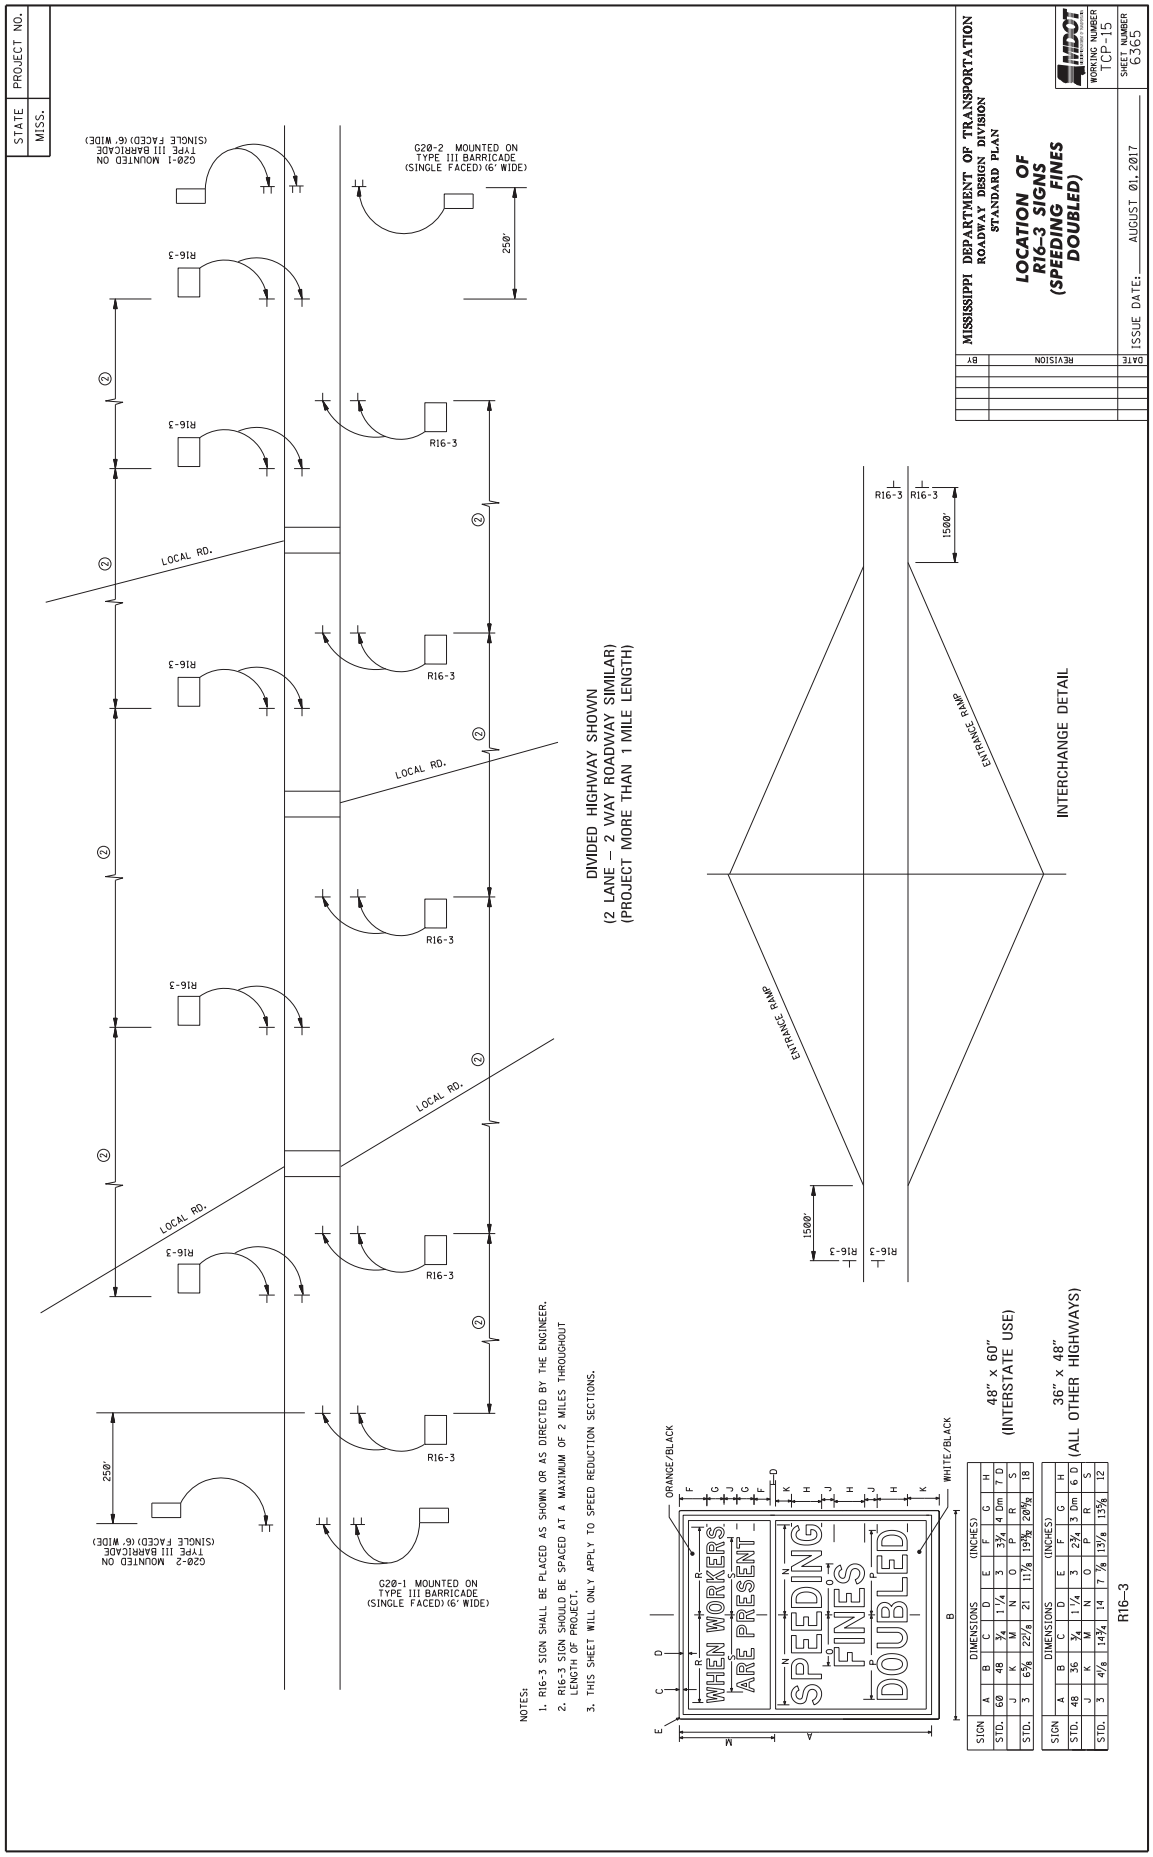

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
DETAILS OF OUTSIDE LANE CLOSURE AT EXIT AND ENTRANCE RAMPS
WORKING NUMBER TCP-10
SHEET NUMBER 6360
ISSUE DATE: AUGUST 01, 2017
REVISED TEXT
GENERAL NOTES:
1. FOR SIGNING, FLASHING ARROW BOARD, AND DRUM SPACING CRITERIA SEE STANDARD TRAFFIC CONTROL PLANS FOR LANE CLOSURES ON SHEETS TCP-2, TCP-3, TCP-4, AND TCP-5 AS APPROPRIATE.
2. WHEN USED, THE YIELD SIGN SHOULD BE LOCATED SO THAT RAMP VEHICULAR TRAFFIC HAS ADEQUATE SIGHT DISTANCE OF ONCOMING MAINLINE VEHICULAR TRAFFIC TO SELECT AN ACCEPTABLE GAP IN THE MAINLINE VEHICULAR TRAFFIC FLOW, BUT SHOULD NOT BE LOCATED SO FAR FORWARD THAT MOTORISTS WILL BE ENCOURAGED TO STOP IN THE PATH OF THE MAINLINE TRAFFIC. ALSO, A LONGER ACCELERATION LANE SHOULD BE PROVIDED BEYOND THIS POINT TO PROVIDE THE GAP SIZE NEEDED. IF SUFFICIENT GAPS ARE NOT AVAILABLE, CONSIDERATION SHOULD BE GIVEN TO CLOSING THE RAMP.
3. IF NO ACCELERATION LANE EXISTS FOR THE TEMPORARY ENTRANCE RAMP, THE YIELD AHEAD SIGN (W3-2) AND THE YIELD AHEAD SIGN (W3-2) SHALL BE REPLACED WITH A STOP SIGN (R1-1) AND A STOP AHEAD SIGN (W3-1), ONE ON EACH SIDE OF APPROACH. WHERE CONDITIONS WARRANT, A TEMPORARY STOP LINE SHOULD BE PLACED ACROSS THE RAMP AT THE DESIRED STOP LOCATION.
4. WHERE THE ACCELERATION DISTANCE IS SIGNIFICANTLY REDUCED, A SUPPLEMENTAL PLAQUE SHALL BE PLACED BELOW THE YIELD AHEAD SIGN READING NO MERGE AREA.
5. DETERMINE TAPER LAYOUTS USING THE FOLLOWING CRITERIA:
L = WS FOR SPEED OF 45 mph OR GREATER
L = WS²/60 FOR SPEEDS OF 40 mph OR LESS
WHERE:
L = MINIMUM LENGTH OF TAPER IN FEET
W = WIDTH OF OFFSET IN FEET
S = DESIGN SPEED OR 85TH PERCENTILE SPEED IN MILES PER HOUR
6. ALL TRAFFIC CONTROL ITEMS SHOWN ON THIS SHEET WILL NOT BE MEASURED FOR SEPARATE PAYMENT; THIS WORK SHALL BE INCLUDED IN THE PRICE BID FOR MAINTENANCE OF TRAFFIC.
IF MERGE REQUIRED:
FOR STOP CONDITION: PLACE CHANGEABLE MESSAGE SIGN (CMS) NEAR MIDDLE OF RAMP SHOWING PHASE I MESSAGE "STOP AHEAD" AND PHASE II MESSAGE "NO MERGE AREA".
FOR YIELD CONDITION: PLACE CHANGEABLE MESSAGE SIGN (CMS) NEAR MIDDLE OF RAMP SHOWING MESSAGE "YIELD AHEAD".
ENTRANCE RAMP (MERGE REQUIRED)
ENTRANCE RAMP (ADDED LANE)
EXIT RAMP (PHASE I)
EXIT RAMP (PHASE II)
ACCELERATION LANE
300' MIN. (SEE NOTE 2.)
L
(SEE NOTE 3.)
SEE NOTE 1.
RETROREFLECTIVE FREE-STANDING PLASTIC DRUMS (TYP.)
50' (TYP.)
500'
200'
W4-1
W3-2o
W4-3R
R1-2
E5-1
W20-1
ROAD WORK AHEAD
YIELD
EXIT


STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
TRAFFIC CONTROL PLAN
FOR TEMPORARY
CONSTRUCTION CROSSOVER
(WORK DAY ONLY)
WORKING NUMBER TCP-11
SHEET NUMBER 6361
ISSUE DATE: AUGUST 01, 2017
REVISED TEXT
GENERAL NOTES:
1. THE LOCATION OF CHANNELIZING DEVICES AND THE WORK AREA LAYOUT SHALL BE BASED ON THE CRITERIA IN THE FOLLOWING TABLE:
2. FLASHING ARROW BOARD SHOULD BE AS LEVEL AS POSSIBLE AS APPROVED BY THE ENGINEER. FLASHING ARROW PANEL SHOULD BE LOCATED AT THE BEGINNING OF THE TAPER OR IF THE SIGN DOES NOT HAVE AN ARROW, BEHIND THE CHANNELIZING DEVICES IN THE CLOSED LANE.
3. ALL CHANNELIZING DEVICES SHALL BE RETROREFLECTIVE FREE STANDING PLASTIC DRUMS.
4. DIAMOND SHAPED TRAFFIC CONTROL SIGNS SHOULD BE A MINIMUM OF 48" X 48" AND SHALL BE BLACK COPY ON FLUORESCENT ORANGE SHEETING.
5. LOCATION OF CROSSOVERS WILL BE AS SHOWN ON THE PLANS OR AS DIRECTED BY THE ENGINEER.
6. USE OF CROSSOVER SHALL BE LIMITED TO TRUCKS APPROACHING FROM ONE DIRECTION ONLY.
7. REVERSE LAYOUT OF TAPERS, DRUMS AND SIGNS TO ACCOMMODATE TRUCKS APPROACHING FROM OPPOSITE DIRECTION.
8. EACH CONSTRUCTION CROSSOVER SHOULD BE CLOSED AS DIRECTED BY THE ENGINEER OR WHEN THE CONSTRUCTION OPERATION, ZONE OR SIGNS ENCROACH ON OR INTERFERES WITH THE OPERATION OF THE CONSTRUCTION CROSSOVER. THE CROSSOVER SHOULD BE CLOSED USING 24" OF TYPE III BARRICADE, DOUBLE FACED.
9. ALL TRAFFIC CONTROL ITEMS SHOWN ON THIS SHEET WILL NOT BE MEASURED FOR SEPARATE PAYMENT. THIS WORK SHALL BE INCLUDED IN THE PRICE BID FOR MAINTENANCE OF TRAFFIC.
POSTED SPEED AND/OR DESIGN SPEED OR ANTICIPATED OPERATING SPEED mph
MAXIMUM CHANNELIZING DEVICES SPACING (ft)
TAPER
ALONG LANE LINE & WORK ZONE
LONGITUDINAL BUFFER SPACE (ft) ††
TAPER LENGTH (ft) †
† NOTE: TAPER LENGTHS ARE DETERMINED USING THE FOLLOWING EQUATIONS:
L = WS FOR SPEEDS OF 45 mph OR GREATER
L = WS²/60 FOR SPEEDS OF 40 mph OR LESS
WHERE: L = MINIMUM LENGTH OF TAPER IN FEET
W = WIDTH OFFSET (EQUAL LANE WIDTH) IN FEET
S = DESIGN SPEED OR ANTICIPATED OPERATING SPEED IN MILES PER HOUR
†† NOTE: BUFFER SPACE MAY BE ADJUSTED AS NEEDED ACCORDING TO ROADWAY GEOMETRY TO MEET SIGHT DISTANCE REQUIREMENTS, AS DIRECTED BY THE ENGINEER.
LEGEND
** THE SPEED ON W13-1 SIGN SHALL BE 10 MPH LESS THAN THE POSTED SPEED LIMIT UNLESS OTHERWISE DIRECTED BY COMMISSION ORDER.
FLASHING ARROW BOARD (TYPE "C")
RETROREFLECTIVE FREE-STANDING PLASTIC DRUMS
TYPE "B" WARNING LIGHTS
NOTE: IF VEHICLE MOUNTED ARROW BOARDS USED, SHOULD BE AS HIGH AS PRACTICAL.
EDGE OF TRAVELED WAY
7' MIN.
STATION NO. AS SHOWN ON PLANS
VARIABLE MEDIAN WIDTH
20'
R
DETAIL OF TEMPORARY CROSSOVER
NOTE: R = 0.5 MEDIAN WIDTH)
DETAIL OF W20-5D
8" SERIES "C" LETTERS
3" RADII
TRUCKS TURNING LEFT
48"
W20-5D
TRUCKS TURNING LEFT
W4-2L
W20-5L (1500 FT)
LEFT LANE CLOSED 1500FT
W13-1 (XX MPH)**
XX M.P.H.
W20-5L (1/2 MILE)
LEFT LANE CLOSED ½MILE
W20-1 (1 MILE)
ROAD WORK 1 MILE
CHANNELIZING DEVICES (SEE NOTE 3 FOR TYPES REQUIRED)
LONG. BUFFER SPACE
100' DRUMS @ 20' O.C.
100' 100' 100' 200' 300' 500' 1000' 1100' 2600'
L
½ L
W20-5L (1500 FT)
W13-1 (XX MPH)**
XX MPH.
W20-5L (1/2 MILE)
W20-1 (1 MILE)


STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
TRAFFIC CONTROL PLANS
UNEVEN PAVEMENT
DETAILS
WORKING NUMBER TCP-12
SHEET NUMBER 6362
ISSUE DATE: AUGUST 01, 2017
DATE REVISION BY
12/1/25 REVISED TEXT STN
GENERAL NOTES:
1. UNEVEN LANE LINE:
A. IF LESS THAN OR EQUAL TO 1½", NO SIGNS REQUIRED.
B. IF GREATER THAN 1½" AND LESS THAN OR EQUAL TO 2¼", PLACE SIGNS AS SHOWN ON THIS SHEET.
C. IF GREATER THAN 2¼", TRAFFIC SHOULD NOT BE ALLOWED TO CROSS UNEVEN LANE LINE.
2. THE W8-11 SIGNS SHOULD BE SPACED AT 1 MILE INTERVALS THROUGHOUT UNEVEN LANE LINE LIMITS.
3. ALL TRAFFIC CONTROL ITEMS SHOWN ON THIS SHEET SHALL BE PAID FOR UNDER MAINTENANCE OF TRAFFIC.
4. SIGNS SHALL BE RETROREFLECTIVE WITH ORANGE BACKGROUND/BLACK COPY.
TWO-WAY TRAFFIC
ONE-WAY TRAFFIC
UNEVEN LANES
W8-11
36 X 36
48 X 48
1 MILE

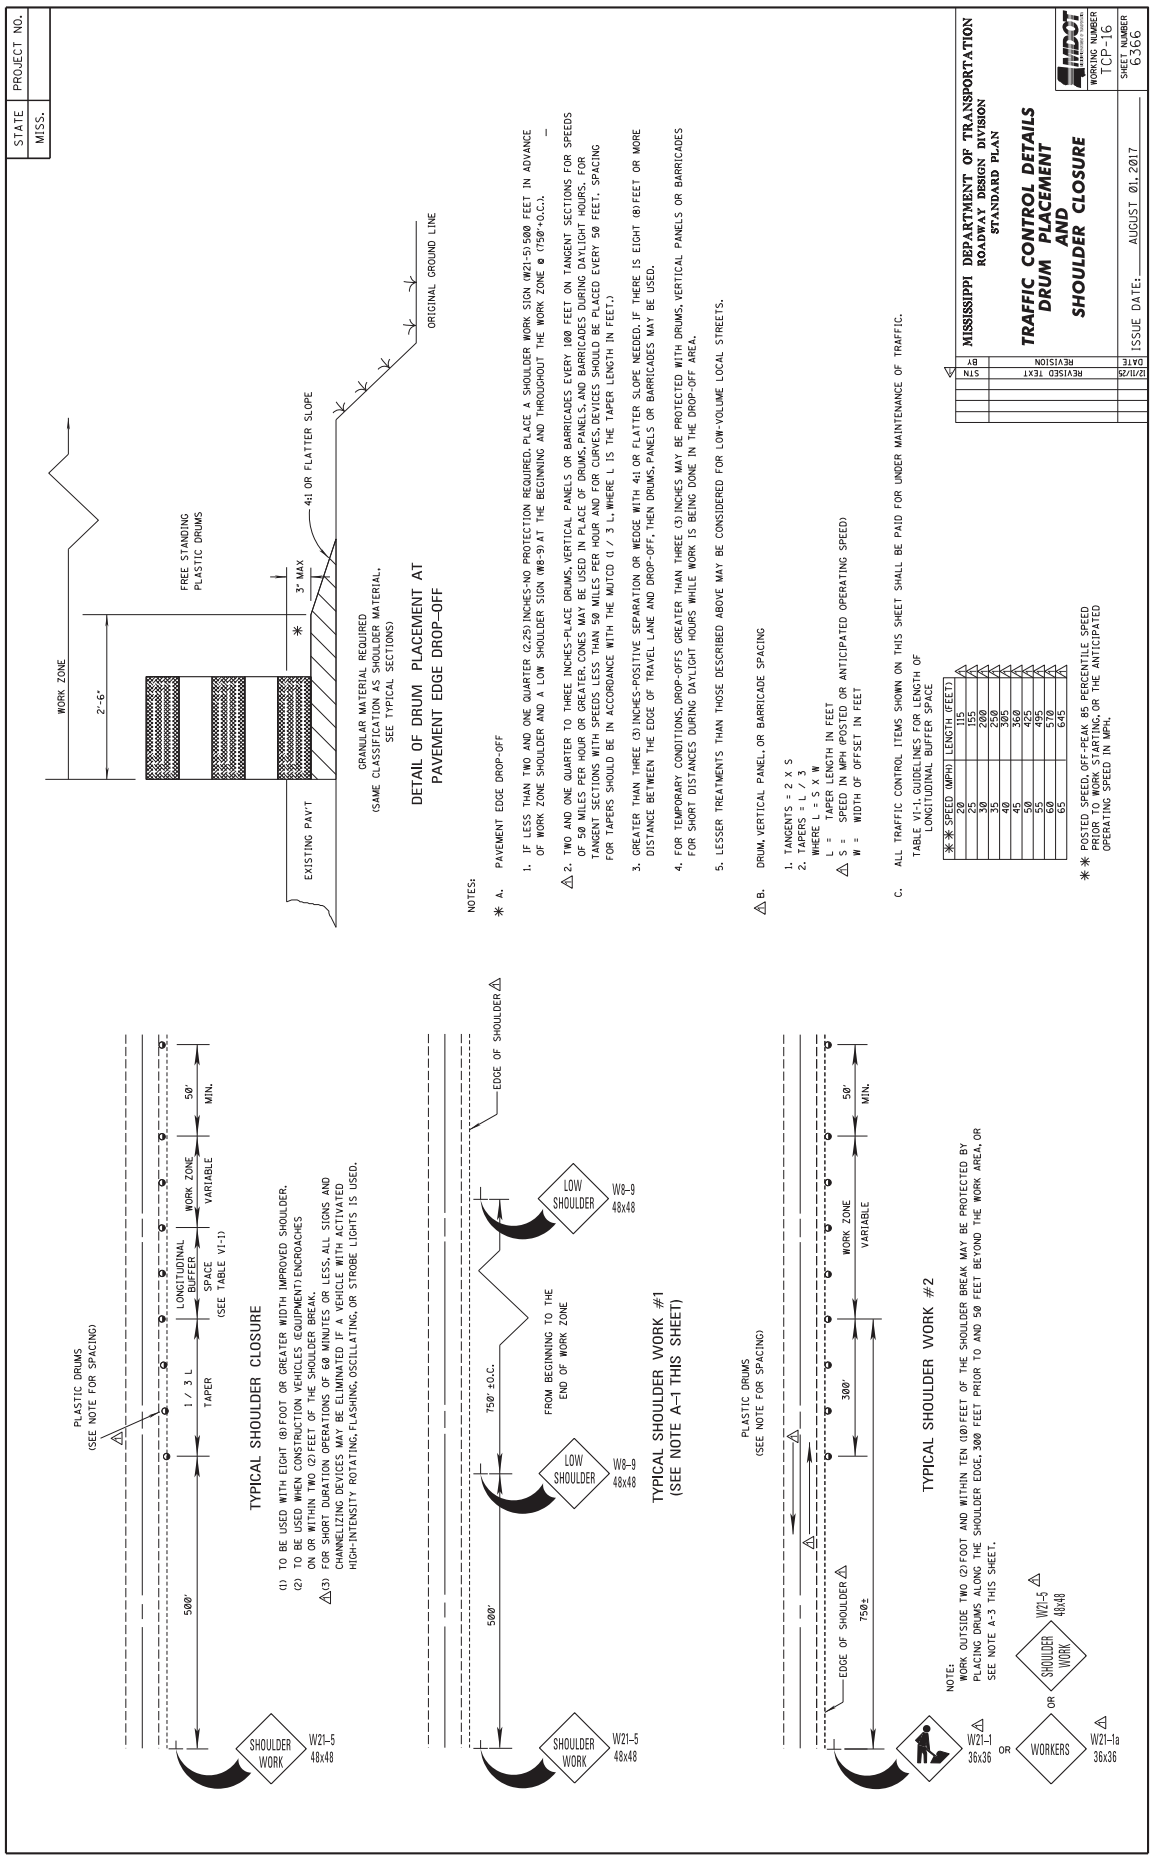

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
TEMPORARY STRIPING FOR TRAFFIC CONTROL 2-LANE AND 4-LANE DIVIDED HIGHWAYS
WORKING NUMBER TCP-13
SHEET NUMBER 6363
ISSUE DATE: AUGUST 01, 2017
REVISED TEXT
DATE 12/11/20
BY STN
GENERAL NOTES:
* 1. 3" UNLESS SHOWN ELSEWHERE ON THE PLANS.
** 2. EDGE STRIPE SHALL BE SAME MATERIAL AS LANE-LINE STRIPE (PAINT OR TAPE AS INDICATED IN PAY ITEMS).
3. RETROREFLECTIVE RAISED PAVEMENT MARKERS TO BE USED IF TEMPORARY MARKINGS ARE TO REMAIN IN PLACE OVER 3 MONTHS
*** 4. SPACING OF RETROREFLECTIVE RAISED PAVEMENT MARKERS IS AS FOLLOWS:
URBAN AREA (ft-in) / RURAL AREA (ft-in)
TANGENT SECTIONS 40'-0" 80'-0"
HORIZONTAL CURVES 40'-0" 40'-0"
INTERCHANGE LIMITS 40'-0" † 40'-0"
† NOTE: ON THE MAIN FACILITY, RETROREFLECTIVE RED-CLEAR RAISED PAVEMENT MARKERS ON A 40'-0" SPACING WILL BE REQUIRED ON LANE-LINES) THROUGH ALL INTERCHANGE AREAS BEGINNING (ADVANCE WARNING) DIRECTIONAL GORE TRAFFIC EXIT RAMP TAPER AND CONTINUING THROUGH THE INTERCHANGE TO THE END OF THE ENTRANCE RAMP TAPER.
5. PAVEMENT MARKERS SHALL BE HIGH PERFORMANCE RETROREFLECTIVE RAISED PAVEMENT MARKERS FROM THE MDOT "APPROVED PRODUCTS LIST".
DIRECTION OF TRAFFIC
TRAFFIC
DETAIL "A"
TWO-WAY RETROREFLECTIVE YELLOW RAISED PAVEMENT MARKERS
4" CONTINUOUS YELLOW
4" SKIP YELLOW (**)
4" CONTINUOUS WHITE EDGE STRIPE (**)
YELLOW (**)
℄ JOINT
OMIT BROKEN LINE STRIPING
OUTSIDE EDGE OF TRAVEL LANE
PAY LENGTH
TWO-WAY TRAFFIC
(ASPHALT OR CONCRETE PAVEMENT)
4" SKIP WHITE
RETROREFLECTIVE RED-CLEAR RAISED PAVEMENT MARKERS
MEDIAN EDGE OF TRAVEL LANE
4-LANE WITH ONE-WAY TRAFFIC


STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
TEMPORARY STRIPING FOR TRAFFIC CONTROL 4-LANE AND 5-LANE UNDIVIDED ROADWAYS
WORKING NUMBER TCP-14
SHEET NUMBER 6364
ISSUE DATE: AUGUST 01, 2017
STN BY REVISION DATE
12/11/25 REVISED TEXT.
TYPICAL STRIPING AND RAISED PAVEMENT MARKERS FOR 4-LANE SECTION
TYPICAL STRIPING AND RAISED PAVEMENT MARKERS FOR 5-LANE SECTION
TYPICAL STRIPING AND RAISED PAVEMENT MARKERS AT LEFT TURN LANES
* NOTE: USE DETAIL STRIPING IF LENGTH ≤ 150' AT THIS LOCATION, OTHERWISE USE CONTINUOUS STRIPING.
TYPICAL TWO-WAY ARROW INSTALLATION
NOTES: 1. CONSIDER EACH SEGMENT OF CONTINUOUS TWO-WAY LEFT TURN LANE SEPARATELY.
2. IF SEGMENT IS LESS THAN 350', PLACE ONE SET OF ARROWS IN CENTER OF SEGMENT.
3. IF SEGMENT IS GREATER THAN 350', PLACE FIRST SET OF ARROWS 50' TO 100' FROM BEGINNING AND/OR END OF SEGMENT AND SPACE ADDITIONAL SETS OF ARROWS @250' O.C.).
DETAIL A LATERAL PLACEMENT OF PAVEMENT MARKERS
DETAIL B LATERAL PLACEMENT OF PAVEMENT MARKERS
DETAIL OF TEMPORARY TURN ARROW
GENERAL NOTE:
1. PAVEMENT MARKERS SHALL BE HIGH PERFORMANCE RAISED PAVEMENT MARKERS FROM THE MDOT APPROVED PRODUCTS LIST.
2. RETROREFLECTIVE RAISED PAVEMENT MARKERS TO BE USED IF TEMPORARY MARKINGS ARE TO REMAIN IN PLACE OVER 3 MONTHS
3. TEMPORARY TURN ARROW TO BE PAID FOR AS TEMPORARY TRAFFIC STRIPE (LEGEND), ESTIMATED AT 10.9 SQ. FT. PER ARROW



SIGN	DIMENSIONS (INCHES)								
	A	B	C	D	E	F	G	H
STD.	60	48	¾	1 ¼	3	3¾	4 Dm	7 D
	J	K	M	N	O	P	R	S
STD.	3	6⅝	22⅛	21	11⅞	19⅜	20⅜	18

SIGN	DIMENSIONS (INCHES)								
	A	B	C	D	E	F	G	H
STD.	48	36	¾	1 ¼	3	2¾	3 Dm	6 D
	J	K	M	N	O	P	R	S
STD.	3	4⅛	14¾	14	7 ⅞	13⅛	13⅜	12


STATE MISS.
PROJECT NO.
WORK ZONE
2'-6"
FREE STANDING PLASTIC DRUMS
3" MAX
4:1 OR FLATTER SLOPE
EXISTING PAVT
GRANULAR MATERIAL REQUIRED (SAME CLASSIFICATION AS SHOULDER MATERIAL, SEE TYPICAL SECTIONS)
ORIGINAL GROUND LINE
DETAIL OF DRUM PLACEMENT AT PAVEMENT EDGE DROP-OFF
NOTES:
* A. PAVEMENT EDGE DROP-OFF
1. IF LESS THAN TWO AND ONE QUARTER (2.25) INCHES-NO PROTECTION REQUIRED. PLACE A SHOULDER WORK SIGN (W21-5) 500 FEET IN ADVANCE OF WORK ZONE SHOULDER AND A LOW SHOULDER SIGN (W8-9) AT THE BEGINNING AND THROUGHOUT THE WORK ZONE @ (750'+O.C.).
△2. TWO AND ONE QUARTER TO THREE INCHES-PLACE DRUMS, VERTICAL PANELS OR BARRICADES EVERY 100 FEET ON TANGENT SECTIONS FOR SPEEDS OF 50 MILES PER HOUR OR GREATER. CONES MAY BE USED IN PLACE OF DRUMS, PANELS, AND BARRICADES DURING DAYLIGHT HOURS. FOR TANGENT SECTIONS WITH SPEEDS LESS THAN 50 MILES PER HOUR AND FOR CURVES, DEVICES SHOULD BE PLACED EVERY 50 FEET. SPACING FOR TAPERS SHOULD BE IN ACCORDANCE WITH THE MUTCD (1 / 3 L, WHERE L IS THE TAPER LENGTH IN FEET.)
3. GREATER THAN THREE (3) INCHES-POSITIVE SEPARATION OR WEDGE WITH 4:1 OR FLATTER SLOPE NEEDED. IF THERE IS EIGHT (8) FEET OR MORE DISTANCE BETWEEN THE EDGE OF TRAVEL LANE AND DROP-OFF, THEN DRUMS, PANELS OR BARRICADES MAY BE USED.
4. FOR TEMPORARY CONDITIONS, DROP-OFFS GREATER THAN THREE (3) INCHES MAY BE PROTECTED WITH DRUMS, VERTICAL PANELS OR BARRICADES FOR SHORT DISTANCES DURING DAYLIGHT HOURS WHILE WORK IS BEING DONE IN THE DROP-OFF AREA.
5. LESSER TREATMENTS THAN THOSE DESCRIBED ABOVE MAY BE CONSIDERED FOR LOW-VOLUME LOCAL STREETS.
△B. DRUM, VERTICAL PANEL, OR BARRICADE SPACING
1. TANGENTS = 2 X S
2. TAPERS = L / 3
WHERE L = S X W
L = TAPER LENGTH IN FEET
△S = SPEED IN MPH (POSTED OR ANTICIPATED OPERATING SPEED)
W = WIDTH OF OFFSET IN FEET
C. ALL TRAFFIC CONTROL ITEMS SHOWN ON THIS SHEET SHALL BE PAID FOR UNDER MAINTENANCE OF TRAFFIC.
TABLE VI-1, GUIDELINES FOR LENGTH OF LONGITUDINAL BUFFER SPACE
** SPEED (MPH)	LENGTH (FEET)
20	115
25	155
30	200
35	245
40	320
45	360
50	425
55	495
60	570
65	645
** POSTED SPEED, OFF-PEAK 85 PERCENTILE SPEED PRIOR TO WORK STARTING, OR THE ANTICIPATED OPERATING SPEED IN MPH.
TYPICAL SHOULDER CLOSURE
(1) TO BE USED WITH EIGHT (8) FOOT OR GREATER WIDTH IMPROVED SHOULDER.
(2) TO BE USED WHEN CONSTRUCTION VEHICLES (EQUIPMENT) ENCROACHES ON OR WITHIN TWO (2) FEET OF THE SHOULDER BREAK.
△(3) FOR SHORT DURATION OPERATIONS OF 60 MINUTES OR LESS, ALL SIGNS AND CHANNELIZING DEVICES MAY BE ELIMINATED IF A VEHICLE WITH ACTIVATED HIGH-INTENSITY ROTATING, FLASHING, OSCILLATING, OR STROBE LIGHTS IS USED.
PLASTIC DRUMS (SEE NOTE FOR SPACING)
LONGITUDINAL BUFFER SPACE (SEE TABLE VI-1)
1 / 3 L TAPER
WORK ZONE VARIABLE
50' MIN.
500'
SHOULDER WORK W21-5 48x48
TYPICAL SHOULDER WORK #1 (SEE NOTE A-1 THIS SHEET)
EDGE OF SHOULDER △
750' ±O.C.
FROM BEGINNING TO THE END OF WORK ZONE
LOW SHOULDER W8-9 48x48
TYPICAL SHOULDER WORK #2
PLASTIC DRUMS (SEE NOTE FOR SPACING)
300'
750±
WORK ZONE VARIABLE
50' MIN.
NOTE: WORK OUTSIDE TWO (2) FOOT AND WITHIN TEN (10) FEET OF THE SHOULDER BREAK MAY BE PROTECTED BY PLACING DRUMS ALONG THE SHOULDER EDGE. 300 FEET PRIOR TO AND 50 FEET BEYOND THE WORK AREA, OR SEE NOTE A-3 THIS SHEET.
△W21-1 36x36 OR WORKERS △W21-1a 36x36
OR SHOULDER WORK △W21-5 48x48
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
TRAFFIC CONTROL DETAILS DRUM PLACEMENT AND SHOULDER CLOSURE
MDOT
WORKING NUMBER TCP-16
SHEET NUMBER 6366
ISSUE DATE: AUGUST 01, 2017
△ STN REVISED TEXT 12/11/25
BY REVISION DATE

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 - NOTICE TO BIDDERS NO. 8191 **CODE: (SP)**

DATE: 07/01/2026

SUBJECT: Obligation Date

With respect to the obligation date referenced in Special Provision No. 907-700-3 entitled "Materials and Tests", bidders are advised that this project will be obligated on or after October 1, 2025 and before October 1, 2026.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 - NOTICE TO BIDDERS NO. 8317 **CODE: (SP)**

DATE: 08/06/2026

SUBJECT: Contract Time

PROJECT: STBG-0510-00(012) / 110184301 – Yazoo County

The completion of work to be performed by the Contractor for this project will not be a specified date but shall be when all allowable working days are assessed, or any extension thereto as provided in Subsection 108.06. It is anticipated that the Notice of Award will be issued no later than **October 13, 2026** and the date for Notice to Proceed / Beginning of Contract Time will be **November 12, 2026**.

Should the Contractor request a Notice to Proceed earlier than **November 12, 2026** and it is agreeable with the Department for an early Notice to Proceed, the requested date will become the new Notice to Proceed date. Regardless of whether or not an early Notice to Proceed is granted, contract time will start at the original Notice to Proceed date.

All requests for an early Notice to Proceed shall be sent to the Project Engineer who will forward it to the Contract Administration Division.

46 Working Days have been allowed for the completion of work on this project.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 - NOTICE TO BIDDERS NO. 8318

DATE: 8/06/2026

SUBJECT: Specialty Items

PROJECT: STBG-0510-00(012)/110184301 - YAZOO

Pursuant to the provisions of Section 108, the following work items are hereby designated as "Specialty Items" for this contract. Bidders are reminded that these items must be subcontracted in order to be considered as specialty items.

CATEGORY: TRAFFIC CONTROL - TEMPORARY

Line No	Pay Item	Description
0010	619-D1001	Standard Roadside Construction Signs, Less than 10 Square Feet
0020	619-D2001	Standard Roadside Construction Signs, 10 Square Feet or More
0030	619-G4005	Barricades, Type III, Single Faced
0060	907-619-E3001	Changeable Message Sign

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 – NOTICE TO BIDDERS NO. 8319 **CODE: (SP)**

DATE: 8/6/2026

SUBJECT: Scope of Work

PROJECT: STBG-0510-00(012) / 110184301 – Yazoo County

The contract documents do not include an official set of construction plans, but may, by reference, include some Standard Drawings when so specified in a Notice to Bidders entitled, "Standard Drawings."

MS HIGHWAY 438 (Br. 11.6)

BRIDGE REPAIR OVER MOUND CREEK

IN YAZOO COUNTY

The work to be accomplished using the pay items and corresponding specifications set forth in the contract shall consist of the following bridge repairs on Bridge 11.6 (15291) on SR 433 in Yazoo County.

Work on the Project shall consist of the following:

Minor changes in detail of design or construction procedure may be authorized by the Director of Structures, State Bridge Engineer provided such changes will not be cause for contract price adjustment. Work for which no pay item is provided will not be paid for directly and shall therefore be considered an absorbed item of work.

It shall be the responsibility of the Contractor to protect the existing structure from damage which might occur during construction. The Contractor shall replace or repair, as directed by the Engineer, any structures damaged during the life of the contract. No payment will be made for replacement or repair of damaged items.

All details are based on the dimensions shown on the original plans for the existing structure. The Contractor shall be responsible for adjusting the elements of the new construction to ensure a proper fit with the existing structure. The Contractor shall verify all dimensions of the existing structure prior to beginning work.

During construction, care shall be exercised to ensure that no debris falls into hydraulic crossings below the structures. All debris, including any material that has accumulated on the bridge deck or caps, shall become the property of the Contractor and shall be removed from the construction site and disposed of properly.

Scope of Work Bridge 11.6 (15291)

1. Remove Concrete Debris From Around Bent 2 and Creek
2. Reshape Creek/Spill Slope at Bent 2
3. Epoxy Inject and FRP Wrap Piles at Bent 2

Removal of Concrete Debris

All concrete debris in and around the creek shall be removed. This work shall be paid for under Pay Item No. 907-824-PP004 Removal of Concrete Debris.

Bank Reshaping and Armoring

Bank reshaping shall be done in accordance with the notes herein and the details shown in the detail drawings. The bank shall be reshaped such that an adequate amount of space remains for the FRP wrapping of the prestressed concrete piles. This work shall be paid for under Pay Item No. 907-824-PP004 Bank Reshaping.

Epoxy Injection

Cracks in the prestressed concrete piles at Bent No. 2 shall be epoxy injected in accordance with Special Provision 907-824.03.6. This item of work shall be paid for under Pay Item No. 907-824-E001 Epoxy Injection.

General Epoxy Repair

General Epoxy Repair shall be done in accordance with Special Provision 907-824.03.1 and with the approved materials outlined in Special Provision 907-824.02.1. All work and material required to perform this item of work shall be paid for under Pay Item No. 907-824-A003 General Epoxy Repair.

Fiber Reinforced Polymer (FRP) Wrap

FRP Wrap shall be done in accordance with the Special Provision 907-824.03.2 and with the approved products outlined in Special Provision 907-824.02.2. All labor, materials, epoxy repair, and surface preparation associated with the installation of FRP wraps shall be included in pay item 907-824-B003: FRP Wrap, Bi-directional.

1. Prior to installation of FRP wraps, the Contractor shall repair concrete spall areas in accordance with the epoxy repair notes. Hammer used for removal of unsound concrete shall be limited to 15 pounds for prestressed girders.
2. The fibrous reinforcement system shall be bi-directional and have a minimum tensile force of 2.1 kips/in.
3. Orientation of fibers in the FRP Wrap shall be oriented in the vertical and horizontal direction, parallel and perpendicular to the shear reinforcement.

SIGNS REQUIRED

	SIGN NO.	SIZE	UNIT AREA FT²	QUAN. REQ'D.	TOTAL SIGN AREA FT²	REMARKS
	G20 - 1	48" X 24"	8.00			ROAD WORK NEXT XX MILES
	G20 - 2	48" X 24"	8.00	2	16.00	END ROAD WORK
	G20 - 4	36" X 18"	4.50			PILOT CAR FOLLOW ME
1	M1 - 1	24" X 24"	4.00			1 OR 2 DIGIT
1	M1 - 1	30" X 24"	5.00			3 DIGIT
2	M1 - 4	24" X 24"	4.00			1 OR 2 DIGIT
2	M1 - 4	30" X 24"	5.00			3 DIGIT
3	M1 - 5	24" X 24"	4.00			1 OR 2 DIGIT
3	M1 - 5	30" X 24"	5.00			3 DIGIT
4	M3 - 1	24" X 12"	2.00			NORTH- 1 OR 2 DIGIT RTE. MARKER
4	M3 - 1	30" X 15"	3.13			NORTH- 3 DIGIT RTE. MARKER
4	M3 - 2	24" X 12"	2.00			EAST- 1 OR 2 DIGIT RTE. MARKER
4	M3 - 2	30" X 15"	3.13			EAST- 3 DIGIT RTE. MARKER
4	M3 - 3	24" X 12"	2.00			SOUTH- 1 OR 2 DIGIT RTE. MARKER
4	M3 - 3	30" X 15"	3.13			SOUTH- 3 DIGIT RTE. MARKER
4	M3 - 4	24" X 12"	2.00			WEST- 1 OR 2 DIGIT RTE. MARKER
4	M3 - 4	30" X 15"	3.13			WEST- 3 DIGIT RTE. MARKER
	M4 - 8	24" X 12"	2.00			DETOUR- 1 OR 2 DIGIT RTE. MARKER
	M4 - 8	30" X 15"	3.13			DETOUR- 3 DIGIT RTE. MARKER
	M4 - 9	48" X 36"	12.00 ♦			DETOUR ↑
	M4 - 9L	48" X 36"	12.00 ♦			DETOUR ←
	M4 - 9BL	48" X 36"	12.00 ♦			DETOUR
	M4 - 9SL	48" X 36"	12.00 ♦			DETOUR
	M4 - 9BSL	48" X 36"	12.00 ♦			DETOUR
	M4 - 9R	48" X 36"	12.00 ♦			DETOUR →
	M4 - 9BR	48" X 36"	12.00 ♦			DETOUR
	M4 - 9SR	48" X 36"	12.00 ♦			DETOUR
	M4 - 9BSR	48" X 36"	12.00 ♦			DETOUR
	M4 - 10L	48" X 18"	6.00			DETOUR
	M4 - 10R	48" X 18"	6.00			DETOUR
4	M4 - 5	24" X 12"	2.00			TO
4	M5 - 1L	21" X 15"	2.19			
4	M5 - 1R	21" X 15"	2.19			
4	M5 - 2L	21" X 15"	2.19			
4	M5 - 2R	21" X 15"	2.19			
4	M6 - 1L	21" X 15"	2.19			
4	M6 - 1R	21" X 15"	2.19			
4	M6 - 2L	21" X 15"	2.19			
4	M6 - 2R	21" X 15"	2.19			
4	M6 - 3	21" X 15"	2.19			

SIGNS REQUIRED (CONT'D)

	SIGN NO.	SIZE	UNIT AREA FT²	QUAN. REQ'D.	TOTAL SIGN AREA FT²	REMARKS
1	R1 - 1	36" OCTAGON	7.46			STOP
2	R1 - 1	48" OCTAGON	13.25 ♦			
2	R1 - 2	36" X 36" X 36"	3.90			YIELD
1	R1 - 2	48" X 48" X 48"	6.93			
2	R1 - 2	60" X 60" X 60"	10.83 ♦			
1	R1 - 3	18" X 9"	1.13			3-WAY, 4-WAY, ETC.
2	R1 - 3	24" X 12"	2.00			
1	R2-1	24" X 30"	5.00			SPEED LIMIT
2	R2-1	36" X 48"	12.00 ♦			
6	R2-1	48" X 60"	20.00 ♦			
1	R3-1	36" X 36"	9.00			
2	R3-1	48" X 48"	16.00 ♦			
1	R3-2	36" X 36"	9.00			
2	R3-2	48" X 48"	16.00 ♦			
1	R3-4	36" X 36"	9.00			
2	R3-4	48" X 48"	16.00 ♦			
	R3-5L	30" X 36"	7.50			ONLY
	R3-5R	30" X 36"	7.50			ONLY
	R3-6L	30" X 36"	7.50			
	R3-6R	30" X 36"	7.50			
	R3-7L	30" X 30"	6.25			LEFT LANE MUST TURN LEFT
	R3-7R	30" X 30"	6.25			RIGHT LANE MUST TURN RIGHT
1	R4-1	24" X 30"	5.00			DO NOT PASS
2	R4-1	48" X 60"	20.00 ♦			
1	R4-2	24" X 30"	5.00			PASS WITH CARE
2	R4-2	48" X 60"	20.00 ♦			
	R4-7	48" X 60"	20.00 ♦			
	R4-8	48" X 60"	20.00 ♦			
	R5-1	48" X 48"	16.00 ♦			DO NOT ENTER
	R5-1a	42" X 30"	8.75			WRONG WAY
	R6-1L	36" X 12"	3.00			ONE WAY
	R6-1R	36" X 12"	3.00			ONE WAY
	R6-2L	24" X 30"	5.00			ONE WAY
	R6-2R	24" X 30"	5.00			ONE WAY
	R10-6	24" X 36"	6.00			STOP HERE ON RED
	R11-3a	60" X 30"	12.50 ♦			ROAD CLOSED XX MILES AHEAD
	R11-3b	60" X 30"	12.50 ♦			BRIDGE OUT XX MILES AHEAD
	R11-4	60" X 30"	12.50 ♦			ROAD CLOSED TO THRU TRAFFIC
	R12-1	36" X 48"	12.00 ♦			WEIGHT LIMIT XX TONS
7	R16-3	36" X 48"	12.00 ♦			WHEN WORKERS ARE PRESENT SPEEDING FINES DOUBLED
6 7	R16-3	48" X 60"	20.00 ♦			

SIGNS REQUIRED (CONT'D)

	SIGN NO.	SIZE	UNIT AREA FT²	QUAN. REQ'D.	TOTAL SIGN AREA FT²	REMARKS
	W1 - 1L	48" X 48"	16.00 ♦			
	W1 - 1R	48" X 48"	16.00 ♦			
	W1 - 2L	48" X 48"	16.00 ♦			
	W1 - 2R	48" X 48"	16.00 ♦			
	W1 - 3L	48" X 48"	16.00 ♦			
	W1 - 3R	48" X 48"	16.00 ♦			
	W1 - 4aL	48" X 48"	16.00 ♦			
	W1 - 4aR	48" X 48"	16.00 ♦			
	W1 - 5L	48" X 48"	16.00 ♦			
	W1 - 5R	48" X 48"	16.00 ♦			
1	W1 - 6L	48" X 24"	8.00			
2	W1 - 6L	60" X 30"	12.50 ♦			
1	W1 - 6R	48" X 24"	8.00			
2	W1 - 6R	60" X 30"	12.50 ♦			
1	W1 - 7	48" X 24"	8.00			
2	W1 - 7	60" X 30"	12.50 ♦			
1	W1 - 8L	18" X 24"	3.00			
2	W1 - 8L	36" X 48"	12.00 ♦			
1	W1 - 8R	18" X 24"	3.00			
2	W1 - 8R	36" X 48"	12.00 ♦			
	W1-9L	48" X 48"	16.00 ♦			
	W1-9L	48" X 48"	16.00 ♦			
	W2-6	36" X 36"	9.00			
	W3-1a	48" X 48"	16.00 ♦			
	W3-2a	48" X 48"	16.00 ♦			
	W3-3	48" X 48"	16.00 ♦			
	W3-5	48" X 48"	16.00 ♦			SPEED REDUCTION
	W4-1L	48" X 48"	16.00 ♦			
	W4-1R	48" X 48"	16.00 ♦			
	W4-2L	48" X 48"	16.00 ♦			
	W4-2R	48" X 48"	16.00 ♦			
	W4-3L	48" X 48"	16.00 ♦			
	W4-3R	48" X 48"	16.00 ♦			
	W4-6	48" X 48"	16.00 ♦			
	W5-1a	48" X 48"	16.00 ♦			PAVEMENT NARROWS
	W6-1	48" X 48"	16.00 ♦			
	W6-2	48" X 48"	16.00 ♦			
	W6-3	48" X 48"	16.00 ♦			
	W8-1	48" X 48"	16.00 ♦			BUMP
	W8-4	48" X 48"	16.00 ♦			SOFT SHOULDER
	W8-6	48" X 48"	16.00 ♦			TRUCK CROSSING

SIGNS REQUIRED (CONT'D)

	SIGN NO.	SIZE	UNIT AREA FT²	QUAN. REQ'D.	TOTAL SIGN AREA FT²	REMARKS
	W8-7	48" X 48"	16.00 ♦			LOOSE GRAVEL
	W8-9	48" X 48"	16.00 ♦			LOW SHOULDER
	W8-11	36" X 36"	9.00			UNEVEN LANES
	W8-12	48" X 48"	16.00 ♦			NO CENTER STRIPE
1	W10-1	36" DIA.	7.07			
2	W10-1	48" DIA.	12.56 ♦			
	W13-1	24" X 24"	4.00			XX MPH
1	W14-3	36" X 48" X 48"	5.56			NO PASSING ZONE
2	W14-3	48" X 64" X 64"	9.89			
	W16-2	24" X 18"	3.00			XXX FEET
	W19-2	48" X 48"	16.00 ♦			BRIDGE MAY ICE IN COLD WEATHER
1	W20 - 1	48" X 48"	16.00 ♦	2	32.00	ADVANCE ROAD WORK
2	W20 - 1	36" X 36"	9.00			
	W20 - 2	48" X 48"	16.00 ♦			ADVANCE DETOUR
	W20 - 3	48" X 48"	16.00 ♦			ADVANCE ROAD CLOSED
	W20 - 4	48" X 48"	16.00 ♦			ADVANCE ONE-LN. RD.
	W20 - 4b	48" X 48"	16.00 ♦			ADVANCE ONE-LN. BR.
	W20 - 5L	48" X 48"	16.00 ♦			ADVANCE LT. LN. CLOSED
	W20 - 5R	48" X 48"	16.00 ♦			ADVANCE RT. LN. CLOSED
	W20 - 7a	48" X 48"	16.00 ♦			
	W21 - 1	36" X 36"	9.00			WORKERS
	W21 - 1a	36" X 36"	9.00			
	W21-2	36" X 36"	9.00			FRESH OIL (TAR)
	W21-3	48" X 48"	16.00 ♦			ADVANCE ROAD MACHINERY
	W21-5	48" X 48"	16.00 ♦			SHOULDER WORK
	W21-6	36" X 36"	16.00 ♦			SURVEY CREW
	W24-1L	48" X 48"	16.00 ♦			
	W24-1R	48" X 48"	16.00 ♦			
	W24-1aL	48" X 48"	16.00 ♦			
	W24-1aR	48" X 48"	16.00 ♦			
	W24-1bL	48" X 48"	16.00 ♦			
	W24-1bR	48" X 48"	16.00 ♦			
	VP-IL	12" X 36"	3.00			
	VP-IR	12" X 36"	3.00			
5	OM-3L	12" X 36"	3.00			
5	OM-3R	12" X 36"	3.00			
	TOTAL SIGN AREA LESS THAN 10 SQ. FT.				16.00 SQ. FT.	
	TOTAL SIGN AREA GREATER THAN 10 SQ. FT. ♦				32.00 SQ. FT.	

NOTES

1. STANDARD
2. SPECIAL (USE WHERE WARRANTED)
1. INTERSTATE ROUTE MARKER
2. UNITED STATES ROUTE MARKER
3. STATE ROUTE MARKER
4. COLORS OF CARDINAL DIRECTION MARKERS AND DIRECTIONAL ARROWS SHALL BE APPROPRIATE TO MATCH ACCOMPANYING ROUTE MARKERS.
5. BLACK STRIPES ON YELLOW BACKGROUND
6. INTERSTATE USE ONLY
7. TOP OF SIGN - BLACK LETTERING ON ORANGE BACKGROUND, BOTTOM OF SIGN - BLACK LETTERING ON WHITE BACKGROUND

THE BACKGROUND OF ALL WARNING SIGNS ("W" SERIES) EXCEPT W10-1 SHALL BE ORANGE. THE W10-1 BACKGROUND SHALL BE YELLOW IN ALL CASES.

DEPARTMENT OF TRANSPORTATION STATE OF MISSISSIPPI

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

DESIGNED BY:
DETAILED BY:
CHECKED BY:
DATE:

FMS CON: 110184/301000
PROJECT NO.: STBG-0510-00(012)
COUNTY: YAZOO

ESTIMATED QUANTITIES FOR TCPQ-1 (DRAWING NO. 6180-419) -- Cont'd

SHEET ID
TCPQ
SHEET NO.

Notice to Bidders

DATE 11:30:07 AM TCPQ-1.dgn PLAN SHEET

87

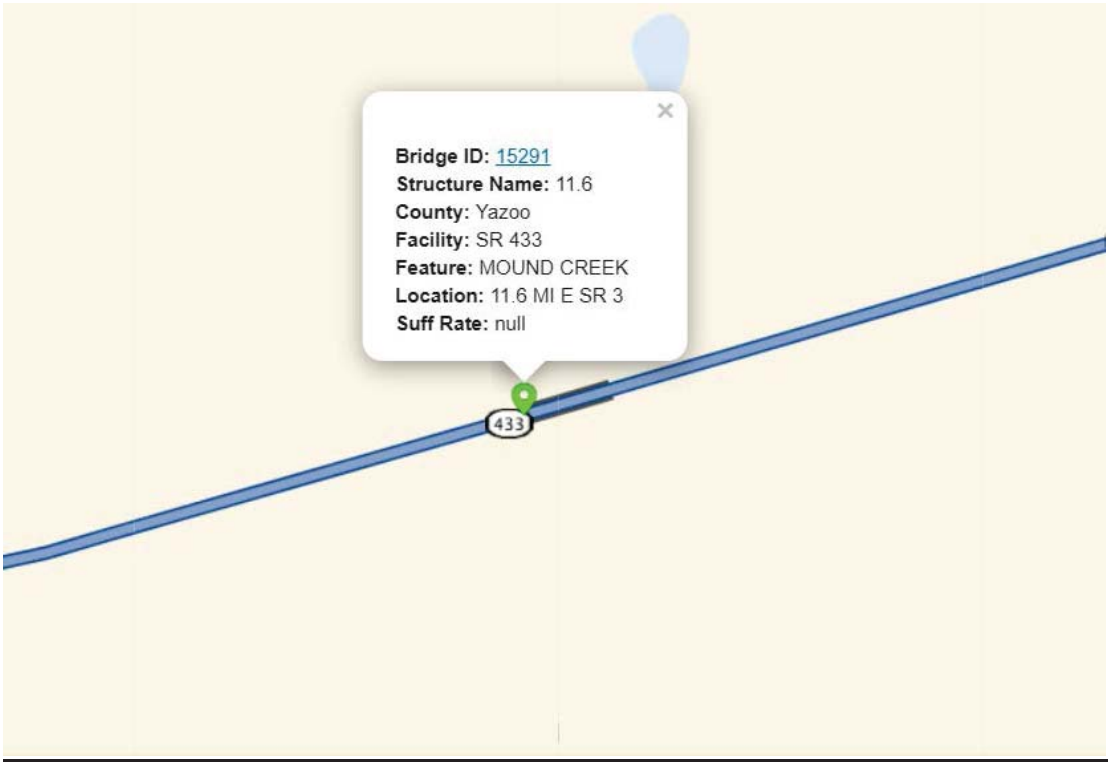
DESIGNED BY:	FMS CON: 110184/301000	DETAIL OF CONSTRUCTION SIGNING	SHEET ID DCS-1
DETAILED BY:	PROJECT NO.: STBG-0510-00(012)		SHEET NO.
CHECKED BY:	COUNTY: YAZOO		
DATE:			

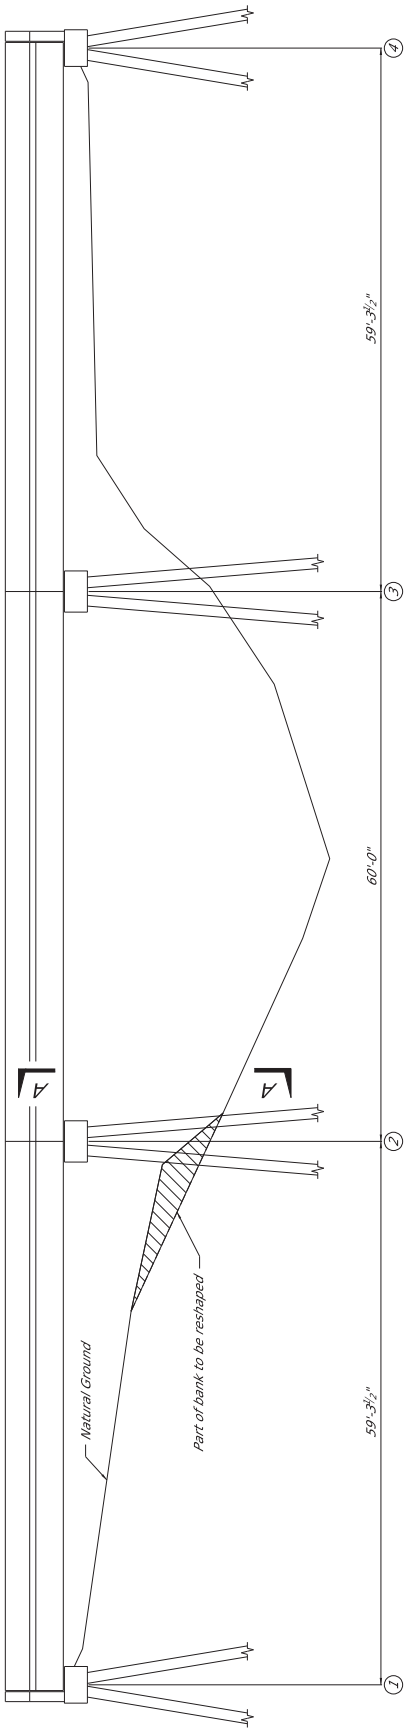
MISSISSIPPI DEPARTMENT OF TRANSPORTATION

NOTES

1. ADVANCE WARNING SIGNS AND DEVICES SHOWN ARE TYPICAL FOR ALL PHASES OF CONSTRUCTION AND MUST BE MAINTAINED WITH OTHER CONSTRUCTION ACTIVITIES REQUIRING ADVANCE WARNING SIGNS. SIGN LOCATIONS AND TYPES ARE TO BE MODIFIED WHEN ADDITIONAL SIGNS ARE REQUIRED FOR CHANNELIZATION, SHIFTS, OR CLOSURES AS REQUIRED FOR VARIOUS OPERATIONS. SIGNS TO REMAIN IN PLACE UNTIL ALL PHASES OF CONSTRUCTION ARE COMPLETE
2. SIGNS MAY BE ADJUSTED AS NECESSARY TO FIT FIELD CONDITIONS.
3. ALL W20-1 "AHEAD" SIGNS TO BE PLACED AT A MINIMUM OF 500 FT. IN ADVANCE TO THE POINT OF CONSTRUCTION.
4. CMS LOCATIONS AND SCREEN MESSAGES TO BE DETERMINED BY THE ENGINEER.

Bridge Location

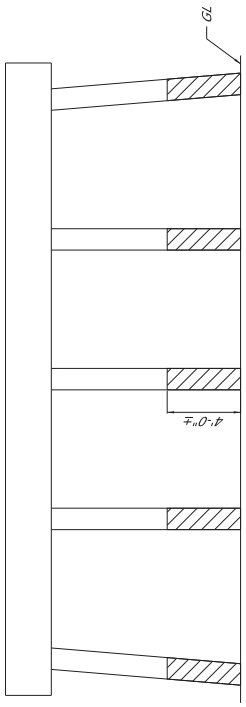




ELEVATION
Showing Limits of Approximate Bank Reshaping

SEQUENCE OF CONSTRUCTION

1. Remove concrete debris in and around creek.
2. Reshape bank so that enough space remains to repair concrete piles.
3. Epoxy inject cracks in concrete piles or epoxy repair piles.
4. FRP wrap concrete piles.



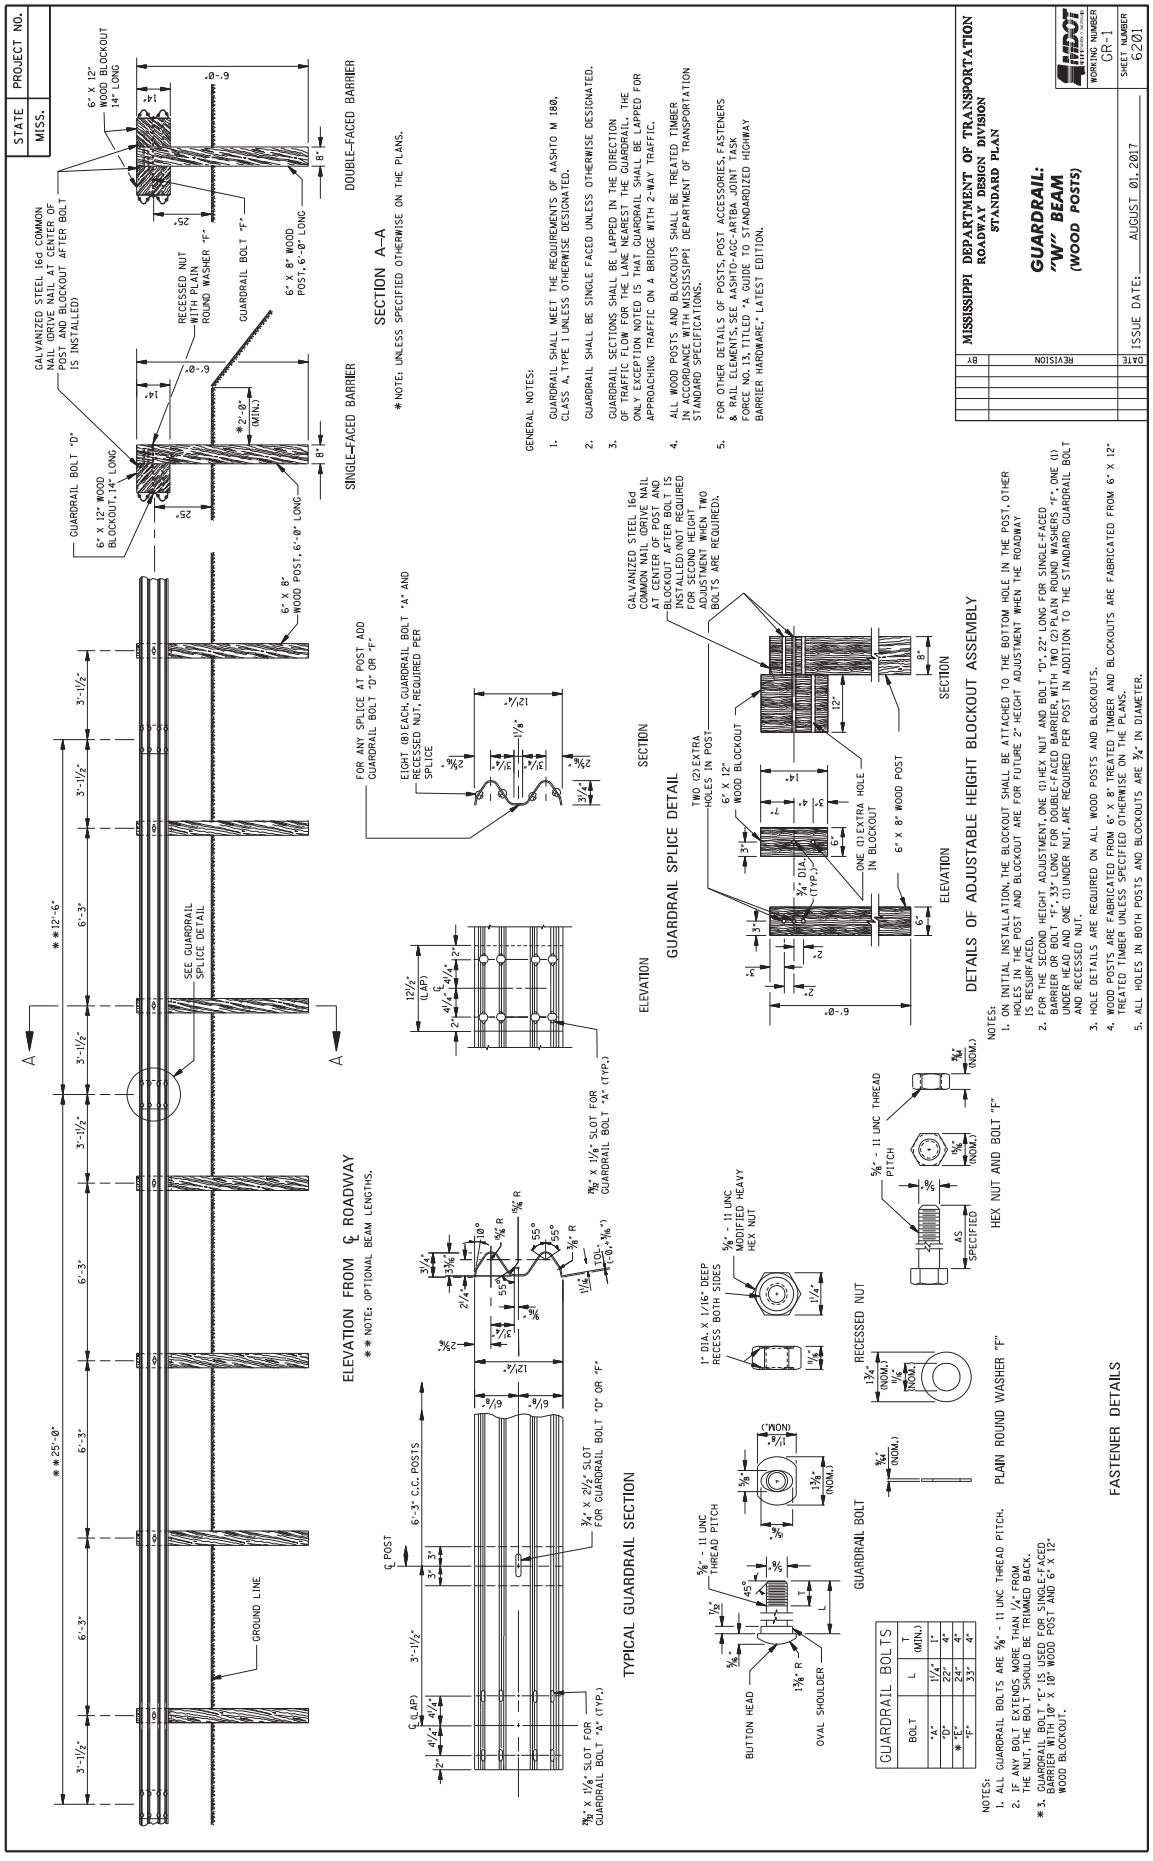
SECTION A-A
Showing Limits of FRP Wrap

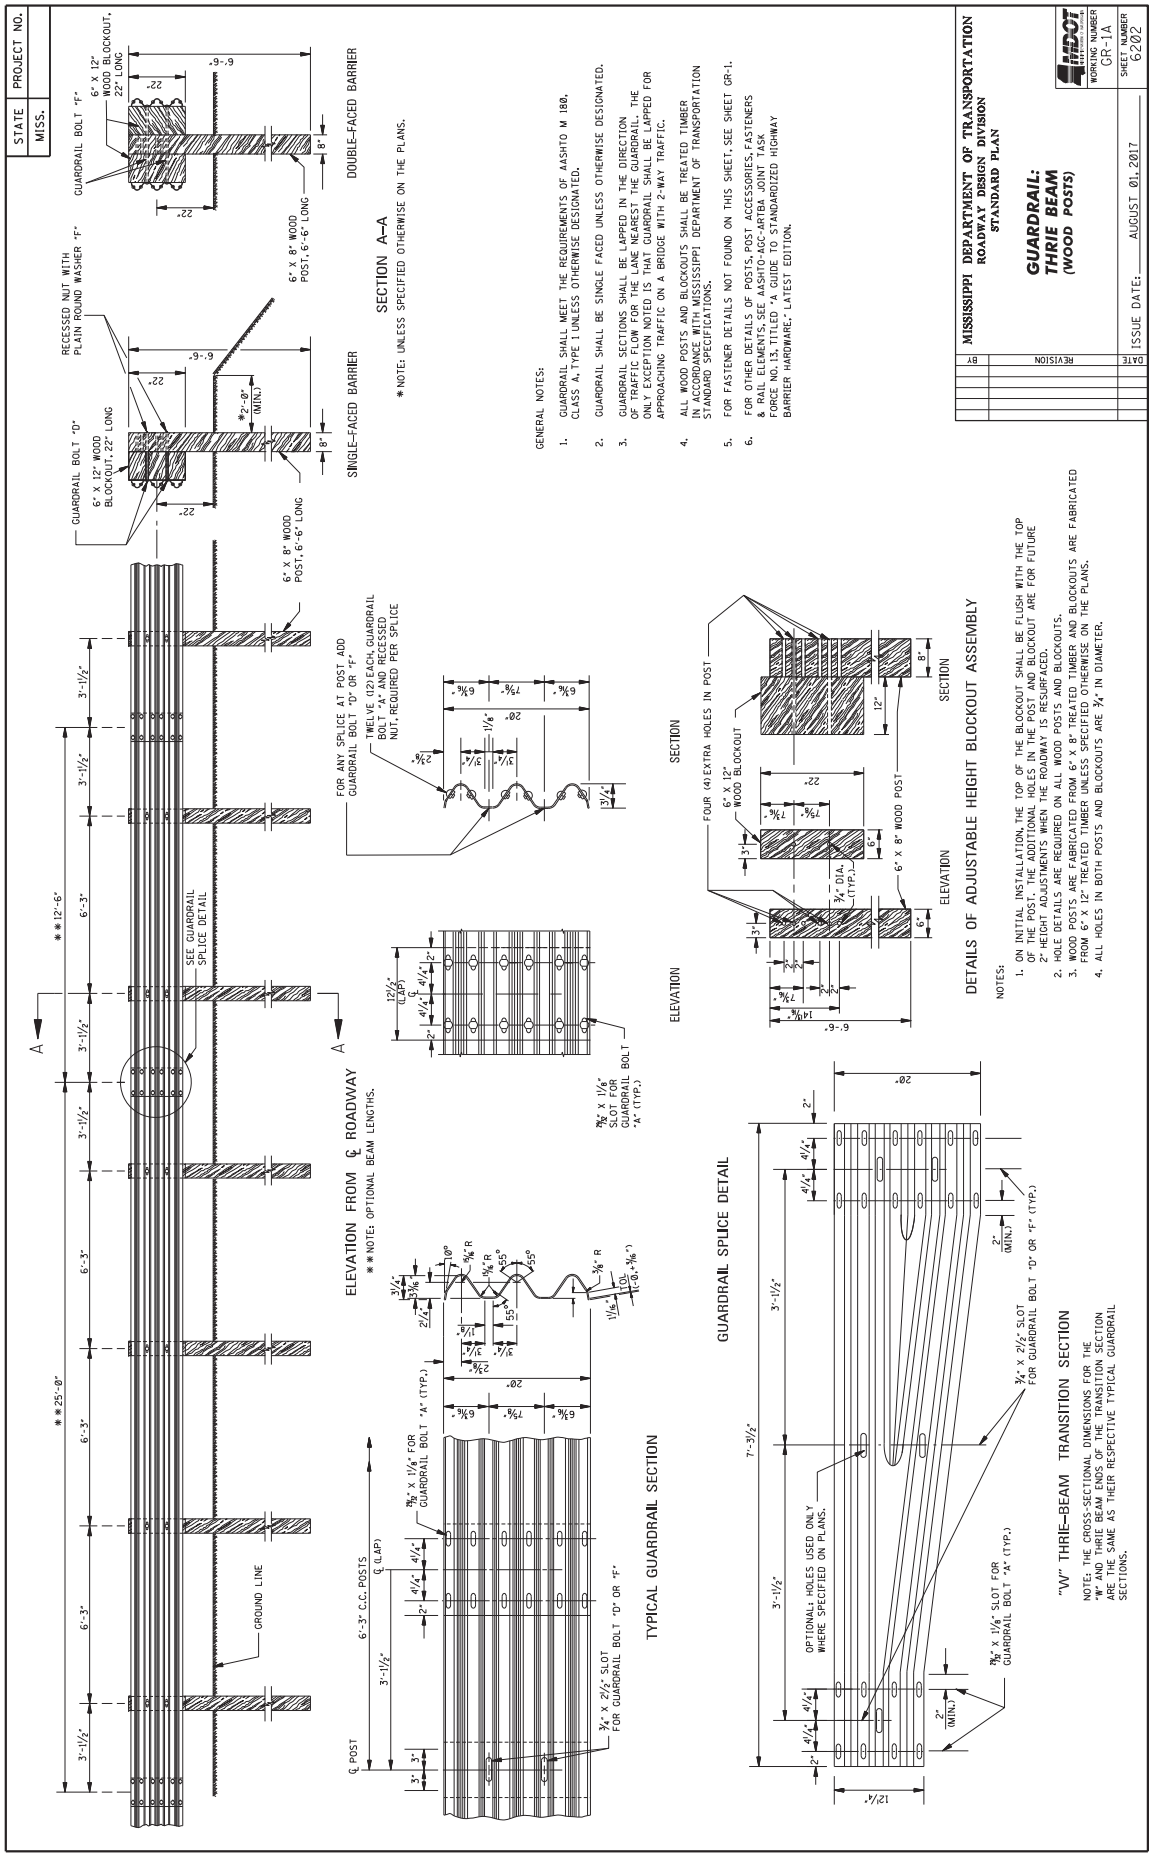
MISSISSIPPI DEPARTMENT OF TRANSPORTATION

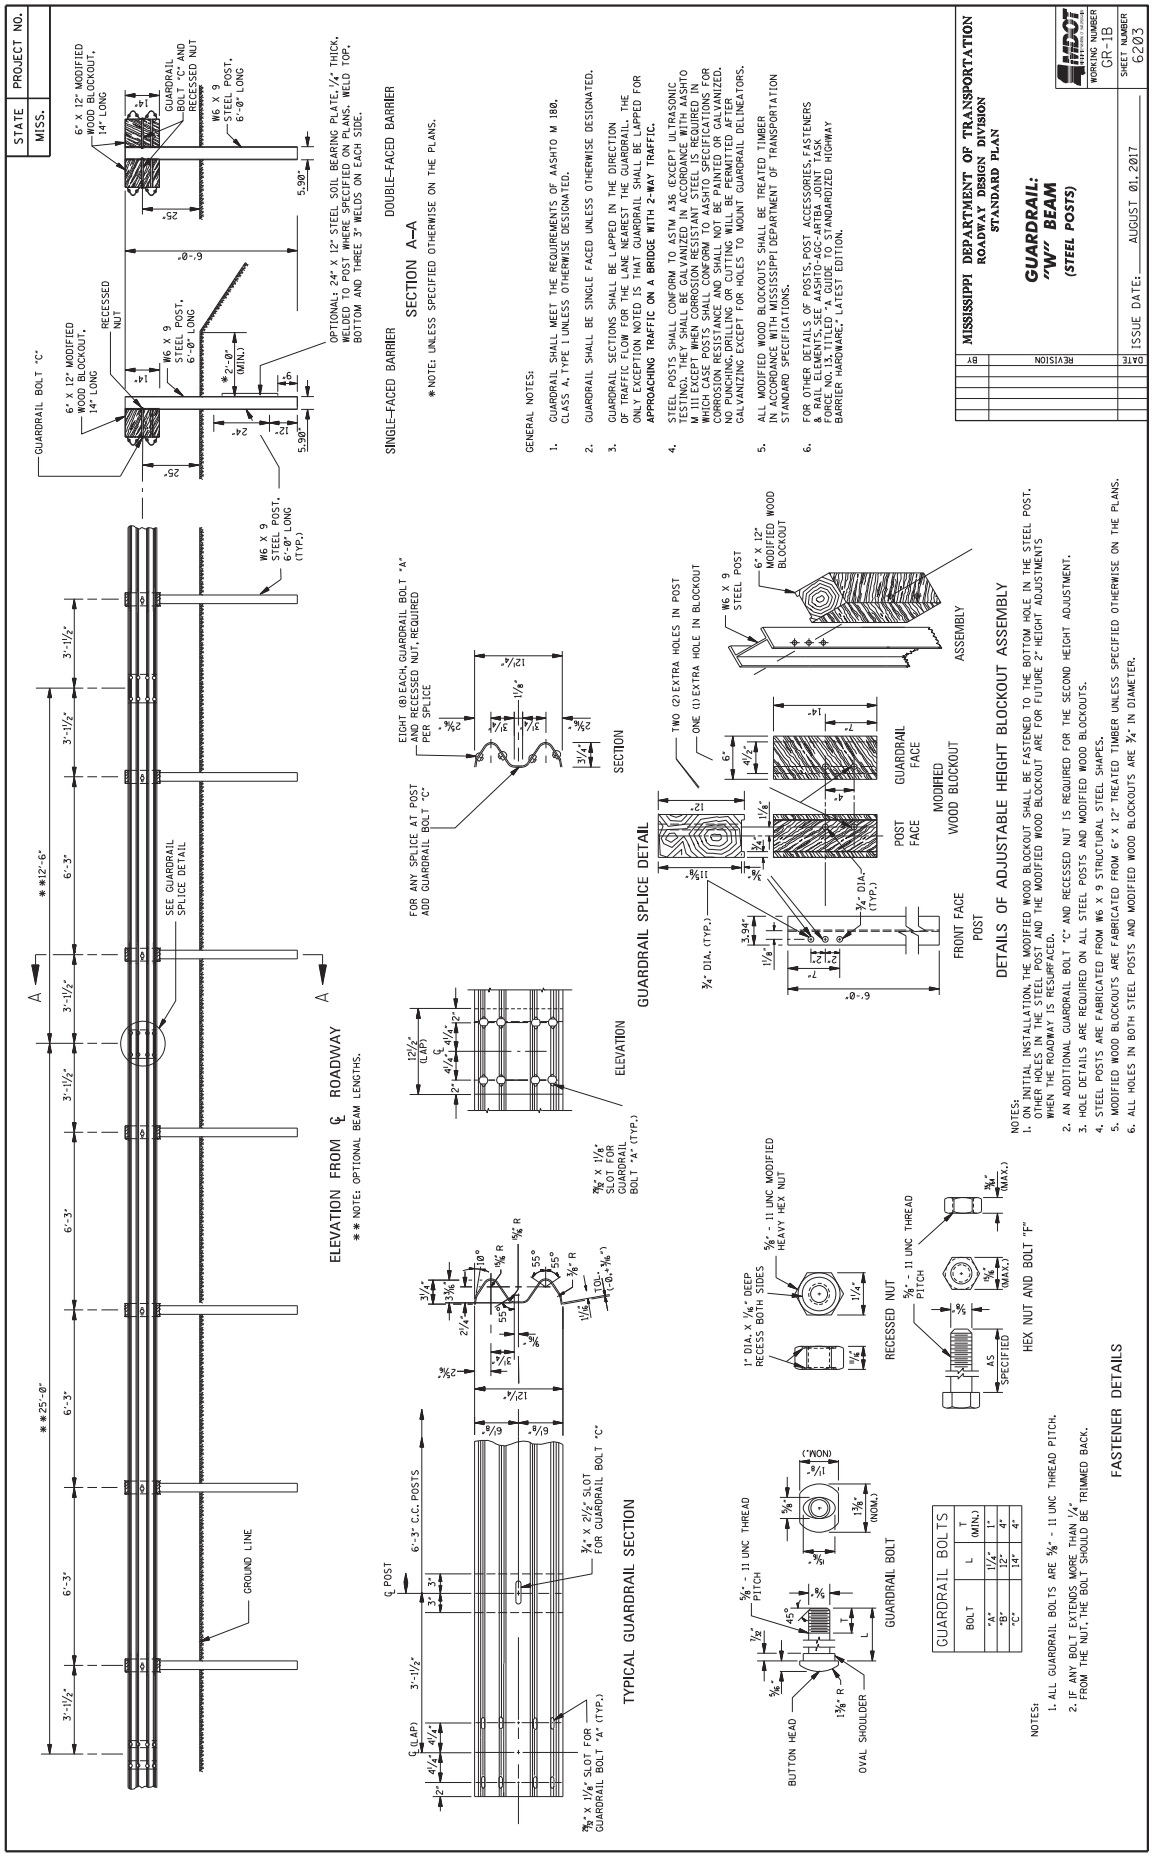
SUPPLEMENT TO NOTICE TO BIDDERS NO. 8341

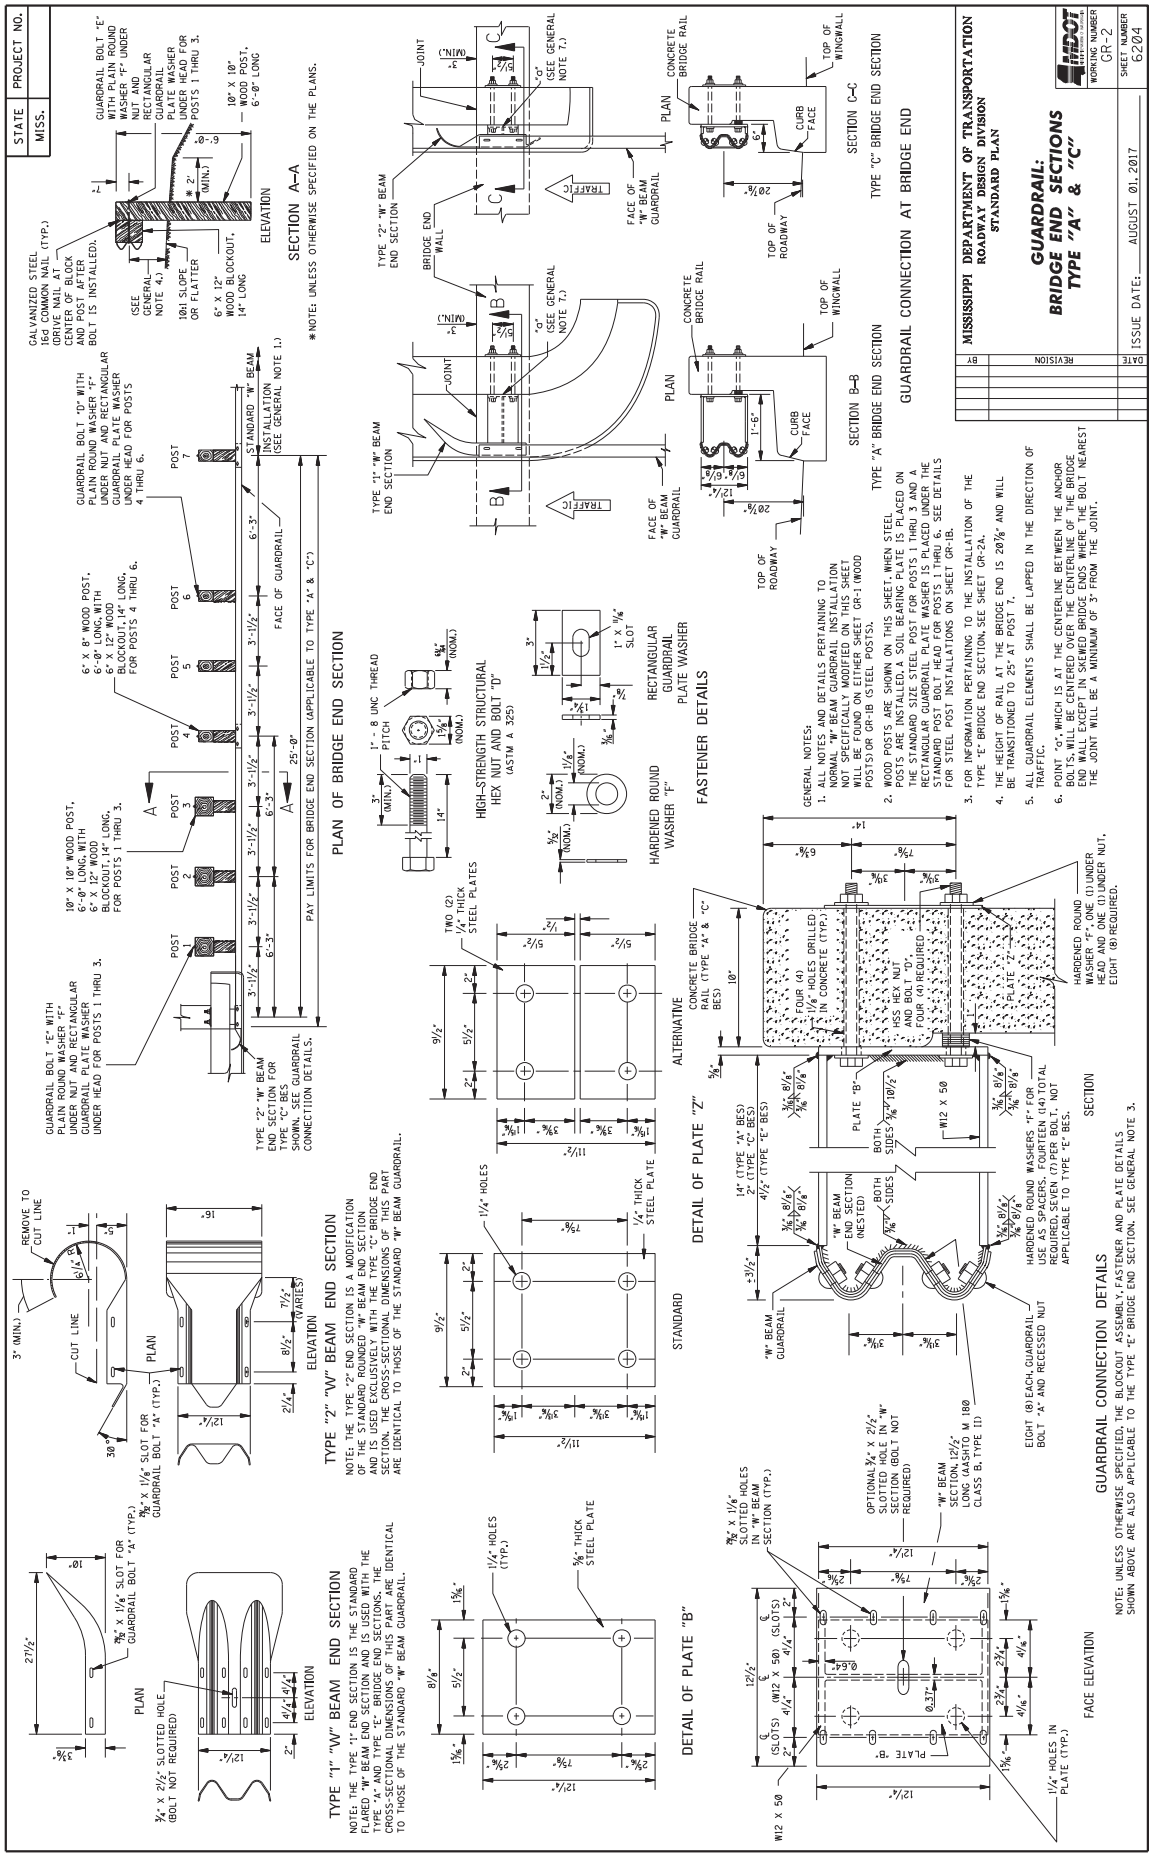
DATE: **08/27/2026**

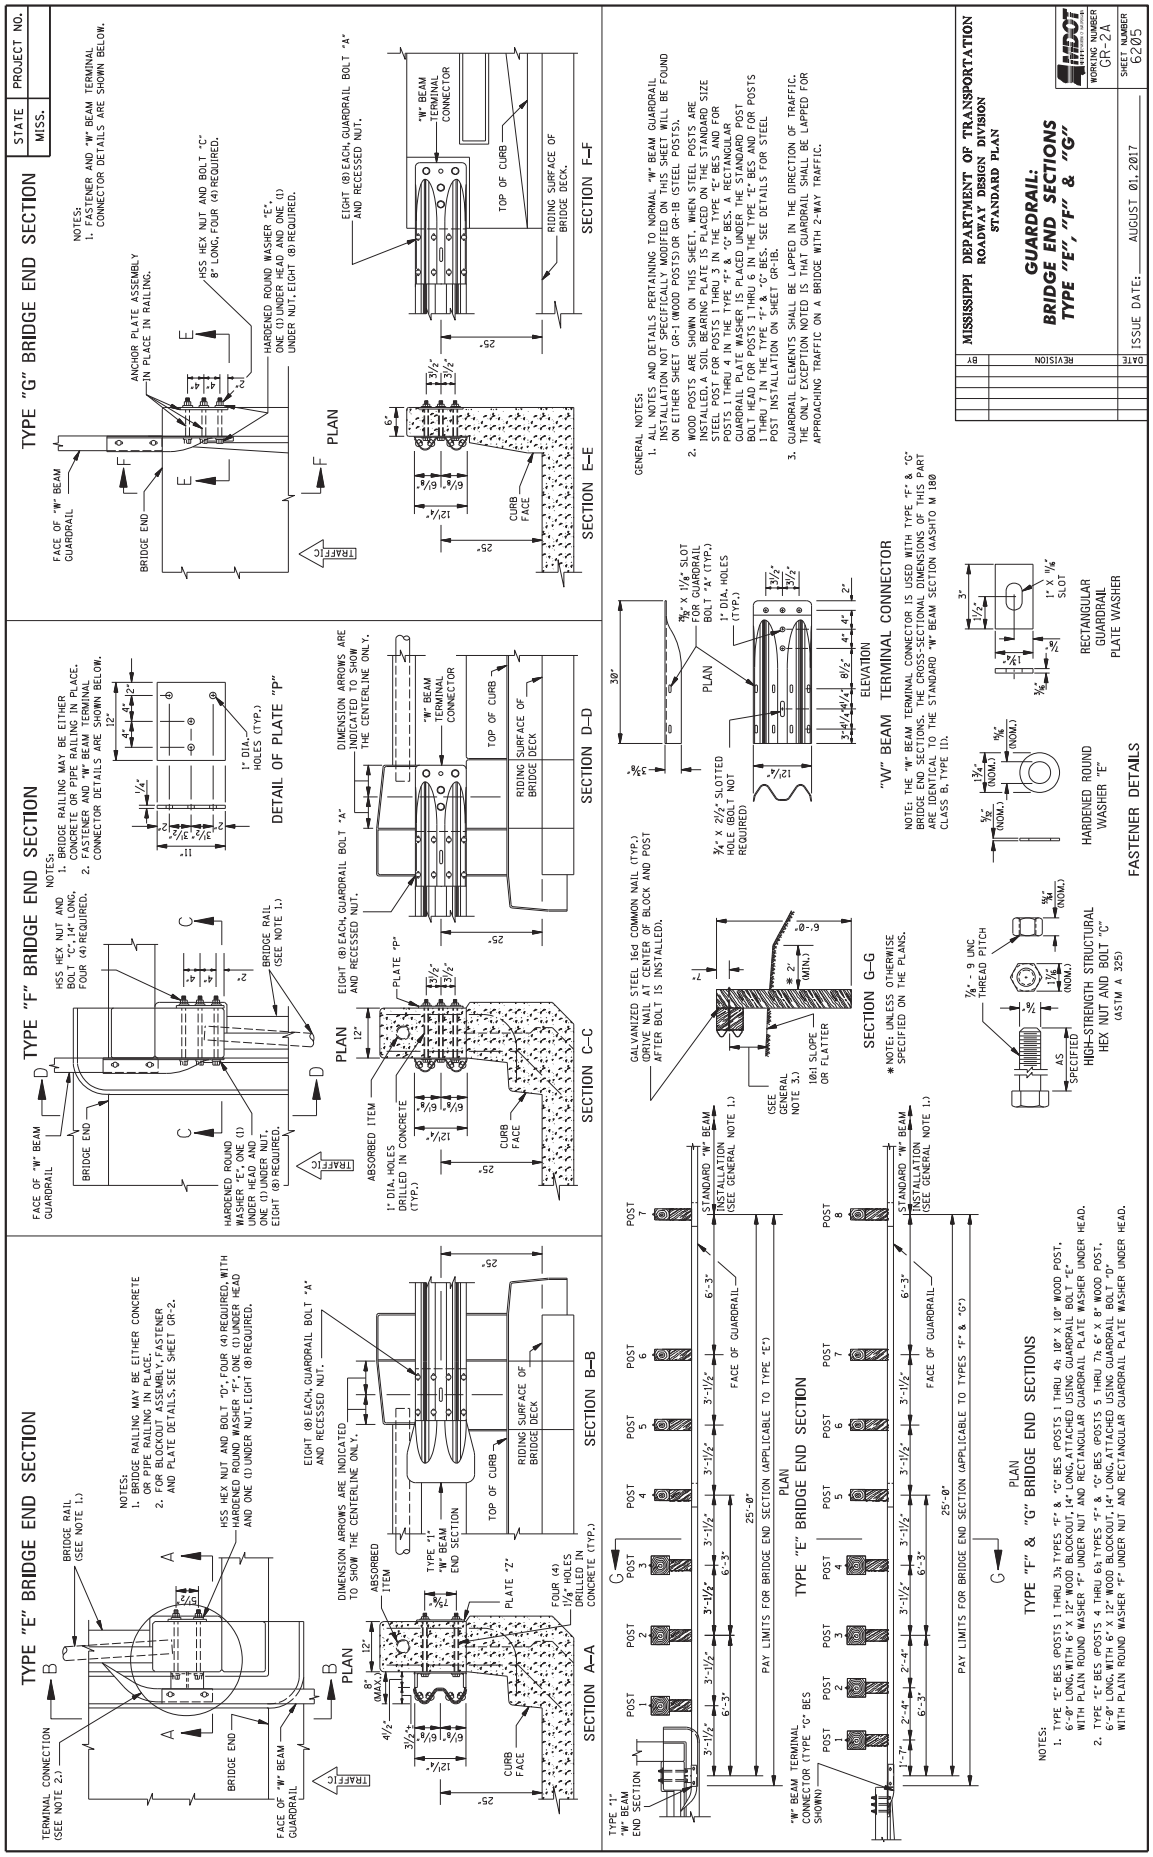
After the last drawing on page 33, add the following.

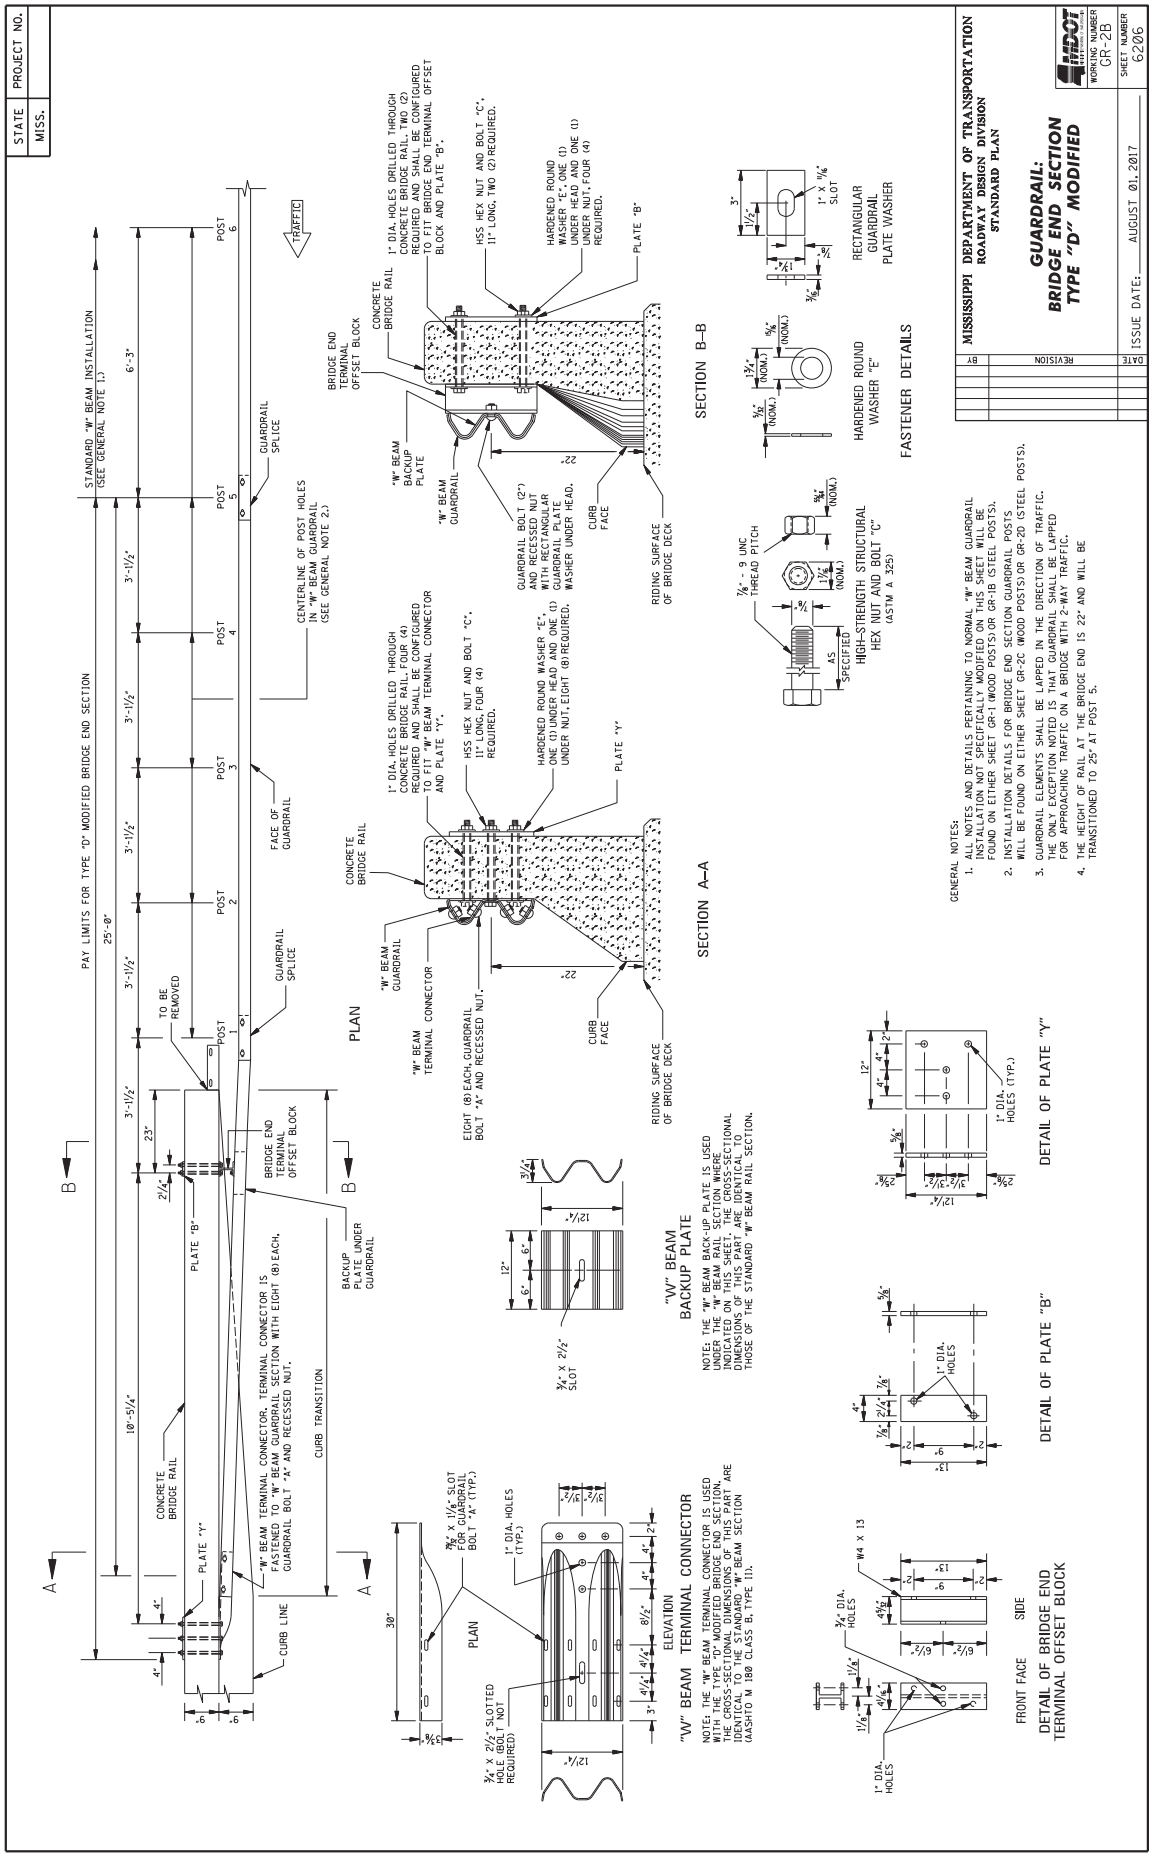

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
GUARDRAIL: "W" BEAM (WOOD POSTS)
WORKING NUMBER GR-1
SHEET NUMBER 6201
ISSUE DATE: AUGUST 01, 2017
BY REVISION DATE
GENERAL NOTES:
1. GUARDRAIL SHALL MEET THE REQUIREMENTS OF AASHTO M 180, CLASS A, TYPE I UNLESS OTHERWISE DESIGNATED.
2. GUARDRAIL SHALL BE SINGLE FACED UNLESS OTHERWISE DESIGNATED.
3. GUARDRAIL SECTIONS SHALL BE LAPPED IN THE DIRECTION OF TRAFFIC FLOW FOR THE LANE NEAREST THE GUARDRAIL. THE ONLY EXCEPTION NOTED IS THAT GUARDRAIL SHALL BE LAPPED FOR APPROACHING TRAFFIC ON A BRIDGE WITH 2-WAY TRAFFIC.
4. ALL WOOD POSTS AND BLOCKOUTS SHALL BE TREATED TIMBER IN ACCORDANCE WITH MISSISSIPPI DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS.
5. FOR OTHER DETAILS OF POSTS, POST ACCESSORIES, FASTENERS & RAIL ELEMENTS, SEE AASHTO-AGC-ARTBA JOINT TASK FORCE NO. 13, TITLED "A GUIDE TO STANDARDIZED HIGHWAY BARRIER HARDWARE," LATEST EDITION.
SINGLE-FACED BARRIER
SECTION A-A
*NOTE: UNLESS SPECIFIED OTHERWISE ON THE PLANS.
DOUBLE-FACED BARRIER
GALVANIZED STEEL 16d COMMON NAIL DRIVE NAIL AT CENTER OF POST AND BLOCKOUT AFTER BOLT IS INSTALLED)
6" X 12" WOOD BLOCKOUT 14" LONG
RECESSED NUT WITH PLAIN ROUND WASHER "F"
GUARDRAIL BOLT "F"
6" X 8" WOOD POST, 6'-0" LONG
GUARDRAIL BOLT "D"
6" X 12" WOOD BLOCKOUT, 14" LONG
*2'-0" (MIN.)
6" X 8" WOOD POST, 6'-0" LONG
ELEVATION FROM ℄ ROADWAY
** NOTE: OPTIONAL BEAM LENGTHS.
SEE GUARDRAIL SPLICE DETAIL
GROUND LINE
TYPICAL GUARDRAIL SECTION
℄ POST
6'-3" C.C. POSTS
3/4" X 2 1/2" SLOT FOR GUARDRAIL BOLT "D" OR "F"
13/16" X 1 1/4" SLOT FOR GUARDRAIL BOLT "A" (TYP.)
FOR ANY SPLICE AT POST ADD GUARDRAIL BOLT "D" OR "F"
EIGHT (8) EACH GUARDRAIL BOLT "A" AND RECESSED NUT, REQUIRED PER SPLICE
13/16" X 1 1/8" SLOT FOR GUARDRAIL BOLT "A" (TYP.)
ELEVATION
SECTION
GALVANIZED STEEL 16d COMMON NAIL DRIVE NAIL AT CENTER OF POST AND BLOCKOUT AFTER BOLT IS INSTALLED) (NOT REQUIRED FOR SECOND HEIGHT ADJUSTMENT WHEN TWO BOLTS ARE REQUIRED.
GUARDRAIL SPLICE DETAIL
TWO (2) EXTRA HOLES IN POST
6" X 12" WOOD BLOCKOUT
ONE (1) EXTRA HOLE IN BLOCKOUT
6" X 8" WOOD POST
ELEVATION
SECTION
DETAILS OF ADJUSTABLE HEIGHT BLOCKOUT ASSEMBLY
NOTES:
1. ON INITIAL INSTALLATION, THE BLOCKOUT SHALL BE ATTACHED TO THE BOTTOM HOLE IN THE POST. OTHER HOLES IN THE POST AND BLOCKOUT ARE FOR FUTURE 2" HEIGHT ADJUSTMENT WHEN THE ROADWAY IS RESURFACED.
2. FOR THE SECOND HEIGHT ADJUSTMENT, ONE (1) HEX NUT AND BOLT "D", 22" LONG FOR SINGLE-FACED BARRIER OR BOLT "F", 33" LONG FOR DOUBLE-FACED BARRIER, WITH TWO (2) PLAIN ROUND WASHERS "F", ONE (1) UNDER HEAD AND ONE (1) UNDER NUT, ARE REQUIRED PER POST IN ADDITION TO THE STANDARD GUARDRAIL BOLT AND RECESSED NUT.
3. HOLE DETAILS ARE REQUIRED ON ALL WOOD POSTS AND BLOCKOUTS.
4. WOOD POSTS ARE FABRICATED FROM 6" X 8" TREATED TIMBER AND BLOCKOUTS ARE FABRICATED FROM 6" X 12" TREATED TIMBER UNLESS SPECIFIED OTHERWISE ON THE PLANS.
5. ALL HOLES IN BOTH POSTS AND BLOCKOUTS ARE 3/4" IN DIAMETER.
FASTENER DETAILS
1" DIA. X 1/16" DEEP RECESS BOTH SIDES
5/8" - 11 UNC MODIFIED HEAVY HEX NUT
5/8" - 11 UNC THREAD PITCH
BUTTON HEAD
OVAL SHOULDER
GUARDRAIL BOLT
RECESSED NUT
PLAIN ROUND WASHER "F"
HEX NUT AND BOLT "F"
AS SPECIFIED
GUARDRAIL BOLTS
BOLT | L | T (MIN.)
"A" | 11 1/2" | 1"
"D" | 22" | 4"
* "E" | 24" | 4"
"F" | 33" | 4"
NOTES:
1. ALL GUARDRAIL BOLTS ARE 5/8" - 11 UNC THREAD PITCH.
2. IF ANY BOLT EXTENDS MORE THAN 1/4" FROM THE NUT, THE BOLT SHOULD BE TRIMMED BACK.
* 3. GUARDRAIL BOLT "E" IS USED FOR SINGLE-FACED BARRIER WITH 10' X 10' WOOD POST AND 6" X 12" WOOD BLOCKOUT.

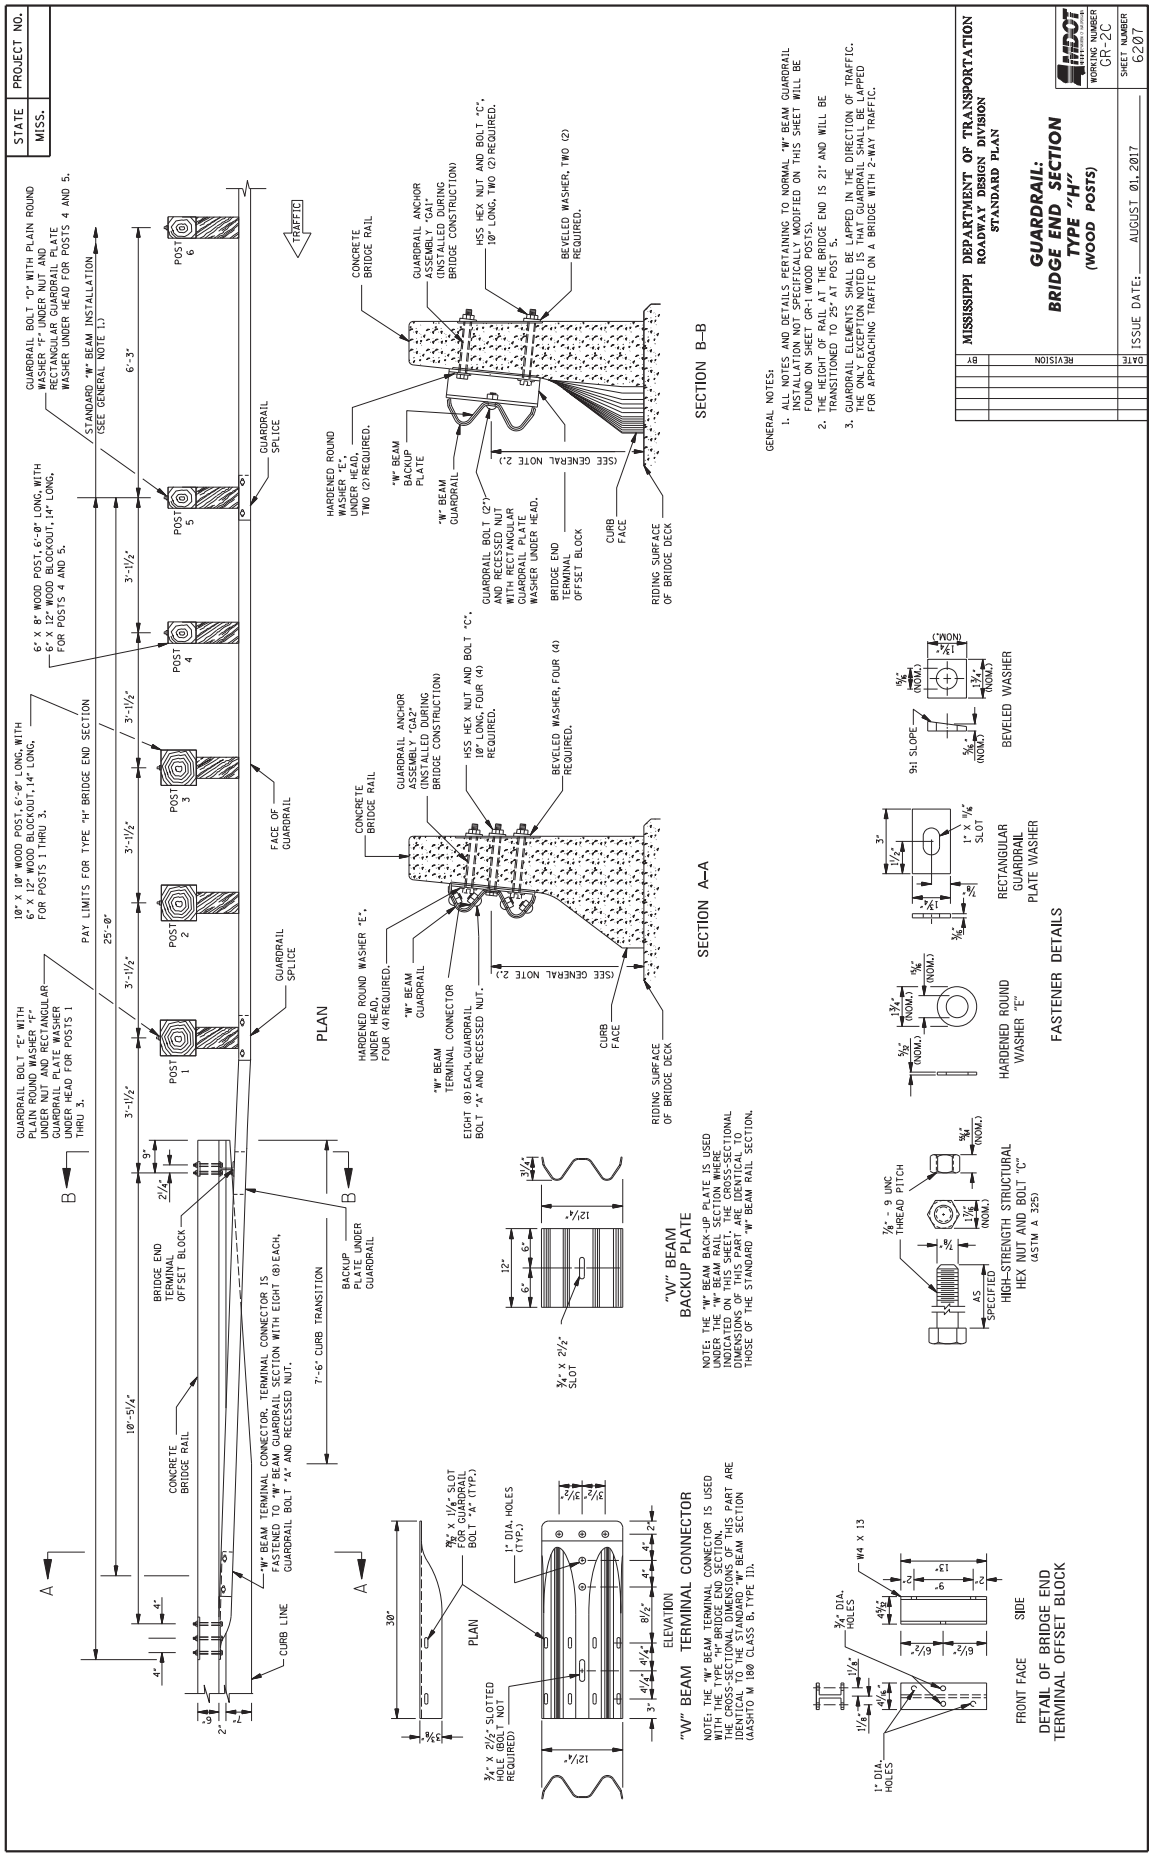

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
GUARDRAIL: THRIE BEAM (WOOD POSTS)
WORKING NUMBER GR-1A
SHEET NUMBER 6202
ISSUE DATE: AUGUST 01, 2017
BY REVISION DATE
GENERAL NOTES:
1. GUARDRAIL SHALL MEET THE REQUIREMENTS OF AASHTO M 180, CLASS A, TYPE 1 UNLESS OTHERWISE DESIGNATED.
2. GUARDRAIL SHALL BE SINGLE FACED UNLESS OTHERWISE DESIGNATED.
3. GUARDRAIL SECTIONS SHALL BE LAPPED IN THE DIRECTION OF TRAFFIC FLOW FOR THE LANE NEAREST THE GUARDRAIL. THE ONLY EXCEPTION NOTED IS THAT GUARDRAIL SHALL BE LAPPED FOR APPROACHING TRAFFIC ON A BRIDGE WITH 2-WAY TRAFFIC.
4. ALL WOOD POSTS AND BLOCKOUTS SHALL BE TREATED TIMBER IN ACCORDANCE WITH MISSISSIPPI DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS.
5. FOR FASTENER DETAILS NOT FOUND ON THIS SHEET, SEE SHEET GR-1.
6. FOR OTHER DETAILS OF POSTS, POST ACCESSORIES, FASTENERS & RAIL ELEMENTS, SEE AASHTO-AGC-ARTBA JOINT TASK FORCE NO. 13, TITLED "A GUIDE TO STANDARDIZED HIGHWAY BARRIER HARDWARE," LATEST EDITION.
SECTION A–A
* NOTE: UNLESS SPECIFIED OTHERWISE ON THE PLANS.
SINGLE-FACED BARRIER
DOUBLE-FACED BARRIER
GUARDRAIL BOLT "D"
6" X 12" WOOD BLOCKOUT, 22" LONG
RECESSED NUT WITH PLAIN ROUND WASHER "F"
GUARDRAIL BOLT "F"
6" X 8" WOOD POST, 6'-6" LONG
SEE GUARDRAIL SPLICE DETAIL
GROUND LINE
ELEVATION FROM ℄ ROADWAY
** NOTE: OPTIONAL BEAM LENGTHS.
TYPICAL GUARDRAIL SECTION
℄ POST
6'-3" C.C. POSTS
℄ (LAP)
3/4" X 1 1/4" FOR GUARDRAIL BOLT "A" (TYP.)
3/4" X 2 1/2" SLOT FOR GUARDRAIL BOLT "D" OR "F"
FOR ANY SPLICE AT POST ADD GUARDRAIL BOLT "D" OR "F"
TWELVE (12) EACH, GUARDRAIL BOLT "A" AND RECESSED NUT, REQUIRED PER SPLICE
3/4" X 1 1/2" SLOT FOR GUARDRAIL BOLT "A" (TYP.)
SECTION
ELEVATION
FOUR (4) EXTRA HOLES IN POST
6" X 12" WOOD BLOCKOUT
3/4" DIA. (TYP.)
6" X 8" WOOD POST
DETAILS OF ADJUSTABLE HEIGHT BLOCKOUT ASSEMBLY
NOTES:
1. ON INITIAL INSTALLATION, THE TOP OF THE BLOCKOUT SHALL BE FLUSH WITH THE TOP OF THE POST. THE ADDITIONAL HOLES IN THE POST AND BLOCKOUT ARE FOR FUTURE 2" HEIGHT ADJUSTMENTS WHEN THE ROADWAY IS RESURFACED.
2. HOLE DETAILS ARE REQUIRED ON ALL WOOD POSTS AND BLOCKOUTS.
3. WOOD POSTS ARE FABRICATED FROM 6" X 8" TREATED TIMBER AND BLOCKOUTS ARE FABRICATED FROM 6" X 12" TREATED TIMBER UNLESS SPECIFIED OTHERWISE ON THE PLANS.
4. ALL HOLES IN BOTH POSTS AND BLOCKOUTS ARE 3/4" IN DIAMETER.
GUARDRAIL SPLICE DETAIL
OPTIONAL HOLES USED ONLY WHERE SPECIFIED ON PLANS.
3/4" X 2 1/2" SLOT FOR GUARDRAIL BOLT "D" OR "F" (TYP.)
"W" THRIE-BEAM TRANSITION SECTION
NOTE: THE CROSS-SECTIONAL DIMENSIONS FOR THE "W" AND THRIE BEAM ENDS OF THE TRANSITION SECTION ARE THE SAME AS THEIR RESPECTIVE TYPICAL GUARDRAIL SECTIONS.

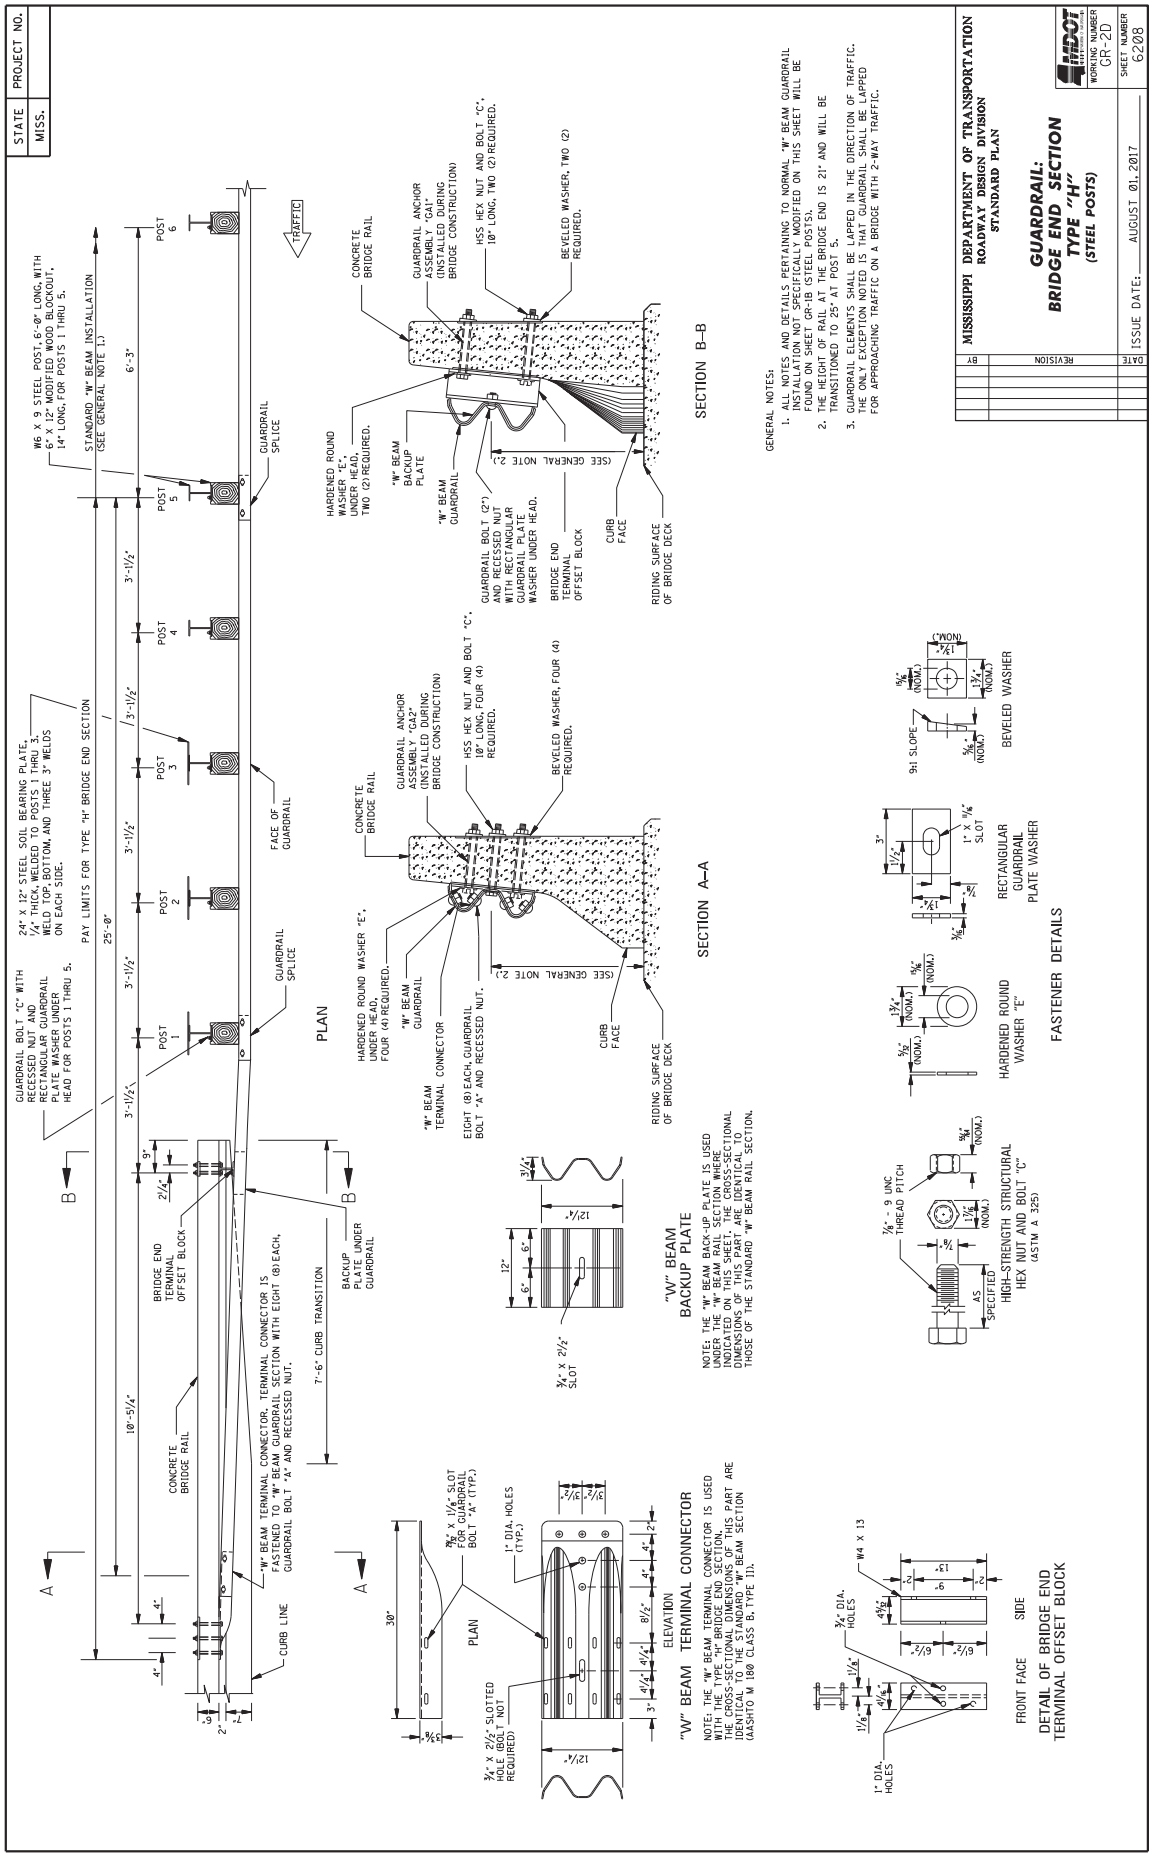

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
GUARDRAIL: "W" BEAM (STEEL POSTS)
WORKING NUMBER GR-1B
SHEET NUMBER 6203
ISSUE DATE: AUGUST 01, 2017
REVISION
BY
DATE
GENERAL NOTES:
1. GUARDRAIL SHALL MEET THE REQUIREMENTS OF AASHTO M 180, CLASS A, TYPE 1 UNLESS OTHERWISE DESIGNATED.
2. GUARDRAIL SHALL BE SINGLE FACED UNLESS OTHERWISE DESIGNATED.
3. GUARDRAIL SECTIONS SHALL BE LAPPED IN THE DIRECTION OF TRAFFIC FLOW FOR THE LANE NEAREST THE GUARDRAIL. THE ONLY EXCEPTION NOTED IS THAT GUARDRAIL SHALL BE LAPPED FOR APPROACHING TRAFFIC ON A BRIDGE WITH 2-WAY TRAFFIC.
4. STEEL POSTS SHALL CONFORM TO ASTM A36 (EXCEPT ULTRASONIC TESTING) AND SHALL BE GALVANIZED IN ACCORDANCE WITH AASHTO M 111 EXCEPT WHEN CORROSION RESISTANT STEEL IS REQUIRED IN WHICH CASE POSTS SHALL CONFORM TO AASHTO SPECIFICATIONS FOR CORROSION RESISTANCE AND SHALL NOT BE PAINTED OR GALVANIZED. NO PUNCHING, DRILLING OR CUTTING WILL BE PERMITTED AFTER GALVANIZING EXCEPT FOR HOLES TO MOUNT GUARDRAIL DELINEATORS.
5. ALL MODIFIED WOOD BLOCKOUTS SHALL BE TREATED TIMBER IN ACCORDANCE WITH MISSISSIPPI DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS.
6. FOR OTHER DETAILS OF POSTS, POST ACCESSORIES, FASTENERS & RAIL ELEMENTS, SEE AASHTO-AGC-ARTBA JOINT TASK FORCE NO. 13, TITLED "A GUIDE TO STANDARDIZED HIGHWAY BARRIER HARDWARE," LATEST EDITION.
SINGLE-FACED BARRIER
DOUBLE-FACED BARRIER
SECTION A-A
*NOTE: UNLESS SPECIFIED OTHERWISE ON THE PLANS.
GUARDRAIL BOLT "C"
6" X 12" MODIFIED WOOD BLOCKOUT, 14" LONG
RECESSED NUT
W6 X 9 STEEL POST, 6'-0" LONG
*2'-0" (MIN.)
OPTIONAL: 24" X 12" STEEL SOIL BEARING PLATE, 1/4" THICK, WELDED TO POST WHERE SPECIFIED ON PLANS. WELD TOP, BOTTOM AND THREE 3" WELDS ON EACH SIDE.
GUARDRAIL BOLT "C" AND RECESSED NUT
ELEVATION FROM ℄ ROADWAY
** NOTE: OPTIONAL BEAM LENGTHS.
SEE GUARDRAIL SPLICE DETAIL
GROUND LINE
TYPICAL GUARDRAIL SECTION
℄ POST
6'-3" C.C. POSTS
℄ (LAP)
3/4" X 2 1/2" SLOT FOR GUARDRAIL BOLT "C"
3/4" X 1 1/2" SLOT FOR GUARDRAIL BOLT "A" (TYP.)
GUARDRAIL BOLTS
BOLT | L | T (MIN.)
"A" | 1 1/2" | 1"
"B" | 12" | 4"
"C" | 14" | 4"
5/8" - 11 UNC THREAD PITCH
BUTTON HEAD
OVAL SHOULDER
GUARDRAIL BOLT
NOTES:
1. ALL GUARDRAIL BOLTS ARE 5/8" - 11 UNC THREAD PITCH.
2. IF ANY BOLT EXTENDS MORE THAN 1/4" FROM THE NUT, THE BOLT SHOULD BE TRIMMED BACK.
FASTENER DETAILS
EIGHT (8) EACH, GUARDRAIL BOLT "A" AND RECESSED NUT, REQUIRED PER SPLICE
FOR ANY SPLICE AT POST ADD GUARDRAIL BOLT "C"
SECTION
ELEVATION
GUARDRAIL SPLICE DETAIL
TWO (2) EXTRA HOLES IN POST
ONE (1) EXTRA HOLE IN BLOCKOUT
3/4" DIA. (TYP.)
W6 X 9 STEEL POST
6" X 12" MODIFIED WOOD BLOCKOUT
POST FACE
GUARDRAIL FACE
MODIFIED WOOD BLOCKOUT ASSEMBLY
FRONT FACE POST
DETAILS OF ADJUSTABLE HEIGHT BLOCKOUT ASSEMBLY
NOTES:
1. ON INITIAL INSTALLATION, THE MODIFIED WOOD BLOCKOUT SHALL BE FASTENED TO THE BOTTOM HOLE IN THE STEEL POST. OTHER HOLES IN THE STEEL POST AND THE MODIFIED WOOD BLOCKOUT ARE FOR FUTURE 2" HEIGHT ADJUSTMENTS WHEN THE ROADWAY IS RESURFACED.
2. AN ADDITIONAL GUARDRAIL BOLT "C" AND RECESSED NUT IS REQUIRED FOR THE SECOND HEIGHT ADJUSTMENT.
3. HOLE DETAILS ARE REQUIRED ON ALL STEEL POSTS AND MODIFIED WOOD BLOCKOUTS.
4. STEEL POSTS ARE FABRICATED FROM W6 X 9 STRUCTURAL STEEL SHAPES.
5. MODIFIED WOOD BLOCKOUTS ARE FABRICATED FROM 6" X 12" TREATED TIMBER UNLESS SPECIFIED OTHERWISE ON THE PLANS.
6. ALL HOLES IN BOTH STEEL POSTS AND MODIFIED WOOD BLOCKOUTS ARE 3/4" IN DIAMETER.
1" DIA. X 1/8" DEEP RECESS BOTH SIDES
5/8" - 11 UNC MODIFIED HEAVY HEX NUT
RECESSED NUT
5/8" - 11 UNC THREAD PITCH
HEX NUT AND BOLT "F"

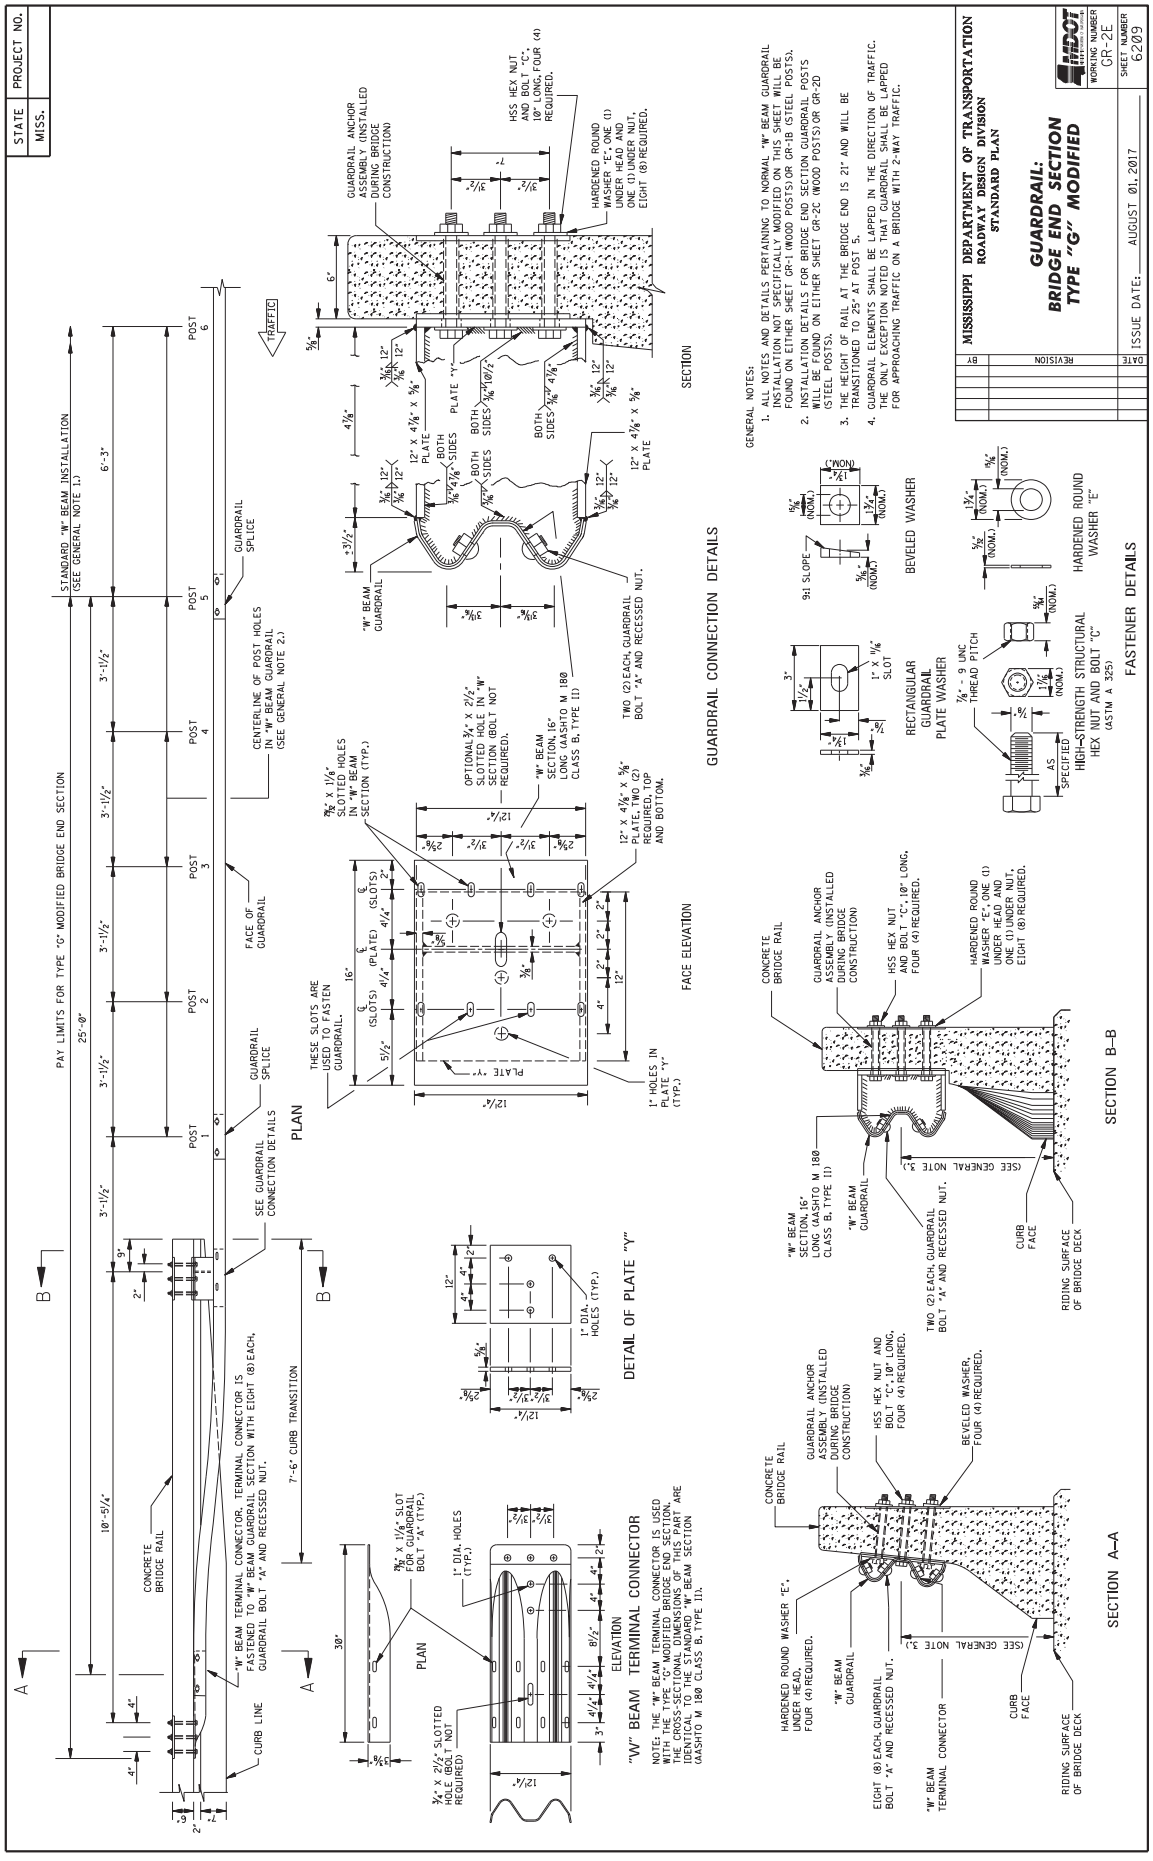

STATE
MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
GUARDRAIL:
BRIDGE END SECTIONS
TYPE "A" & "C"
WORKING NUMBER GR-2
SHEET NUMBER 6204
ISSUE DATE: AUGUST 01, 2017
DATE
REVISION
BY
PLAN OF BRIDGE END SECTION
SECTION A-A
ELEVATION
*NOTE: UNLESS OTHERWISE SPECIFIED ON THE PLANS.
TYPE "2" "W" BEAM END SECTION
TYPE "1" "W" BEAM END SECTION
DETAIL OF PLATE "B"
DETAIL OF PLATE "Z"
FASTENER DETAILS
GUARDRAIL CONNECTION DETAILS
TYPE "A" BRIDGE END SECTION
TYPE "C" BRIDGE END SECTION
GUARDRAIL CONNECTION AT BRIDGE END
SECTION B-B
SECTION C-C
GENERAL NOTES:
1. ALL NOTES AND DETAILS PERTAINING TO NORMAL "W" BEAM GUARDRAIL INSTALLATION NOT SPECIFICALLY MODIFIED ON THIS SHEET WILL BE FOUND ON EITHER SHEET GR-1 (WOOD POSTS) OR GR-1B (STEEL POSTS).
2. WOOD POSTS ARE SHOWN ON THIS SHEET. WHEN STEEL POSTS ARE INSTALLED, A SOIL BEARING PLATE IS PLACED ON THE STANDARD SIZE STEEL POST FOR POSTS 1 THRU 3 AND A RECTANGULAR GUARDRAIL PLATE WASHER IS PLACED UNDER THE STANDARD BOLT HEAD FOR POSTS 1 THRU 6. SEE DETAILS FOR STEEL POST INSTALLATIONS ON SHEET GR-1B.
3. FOR INFORMATION PERTAINING TO THE INSTALLATION OF THE TYPE "E" BRIDGE END SECTION, SEE SHEET GR-2A.
4. THE HEIGHT OF RAIL AT THE BRIDGE END IS 20 5/8" AND WILL BE TRANSITIONED TO 25" AT POST 7.
5. ALL GUARDRAIL ELEMENTS SHALL BE LAPPED IN THE DIRECTION OF TRAFFIC.
6. POINT "a", WHICH IS AT THE CENTERLINE BETWEEN THE ANCHOR BOLTS, WILL BE CENTERED OVER THE CENTERLINE OF THE BRIDGE END WALL EXCEPT IN SKEWED BRIDGE ENDS WHERE THE BOLT NEAREST THE JOINT WILL BE A MINIMUM OF 3" FROM THE JOINT.
NOTE: UNLESS OTHERWISE SPECIFIED, THE BLOCKOUT ASSEMBLY FASTENER AND PLATE DETAILS SHOWN ABOVE ARE ALSO APPLICABLE TO THE TYPE "E" BRIDGE END SECTION. SEE GENERAL NOTE 3.

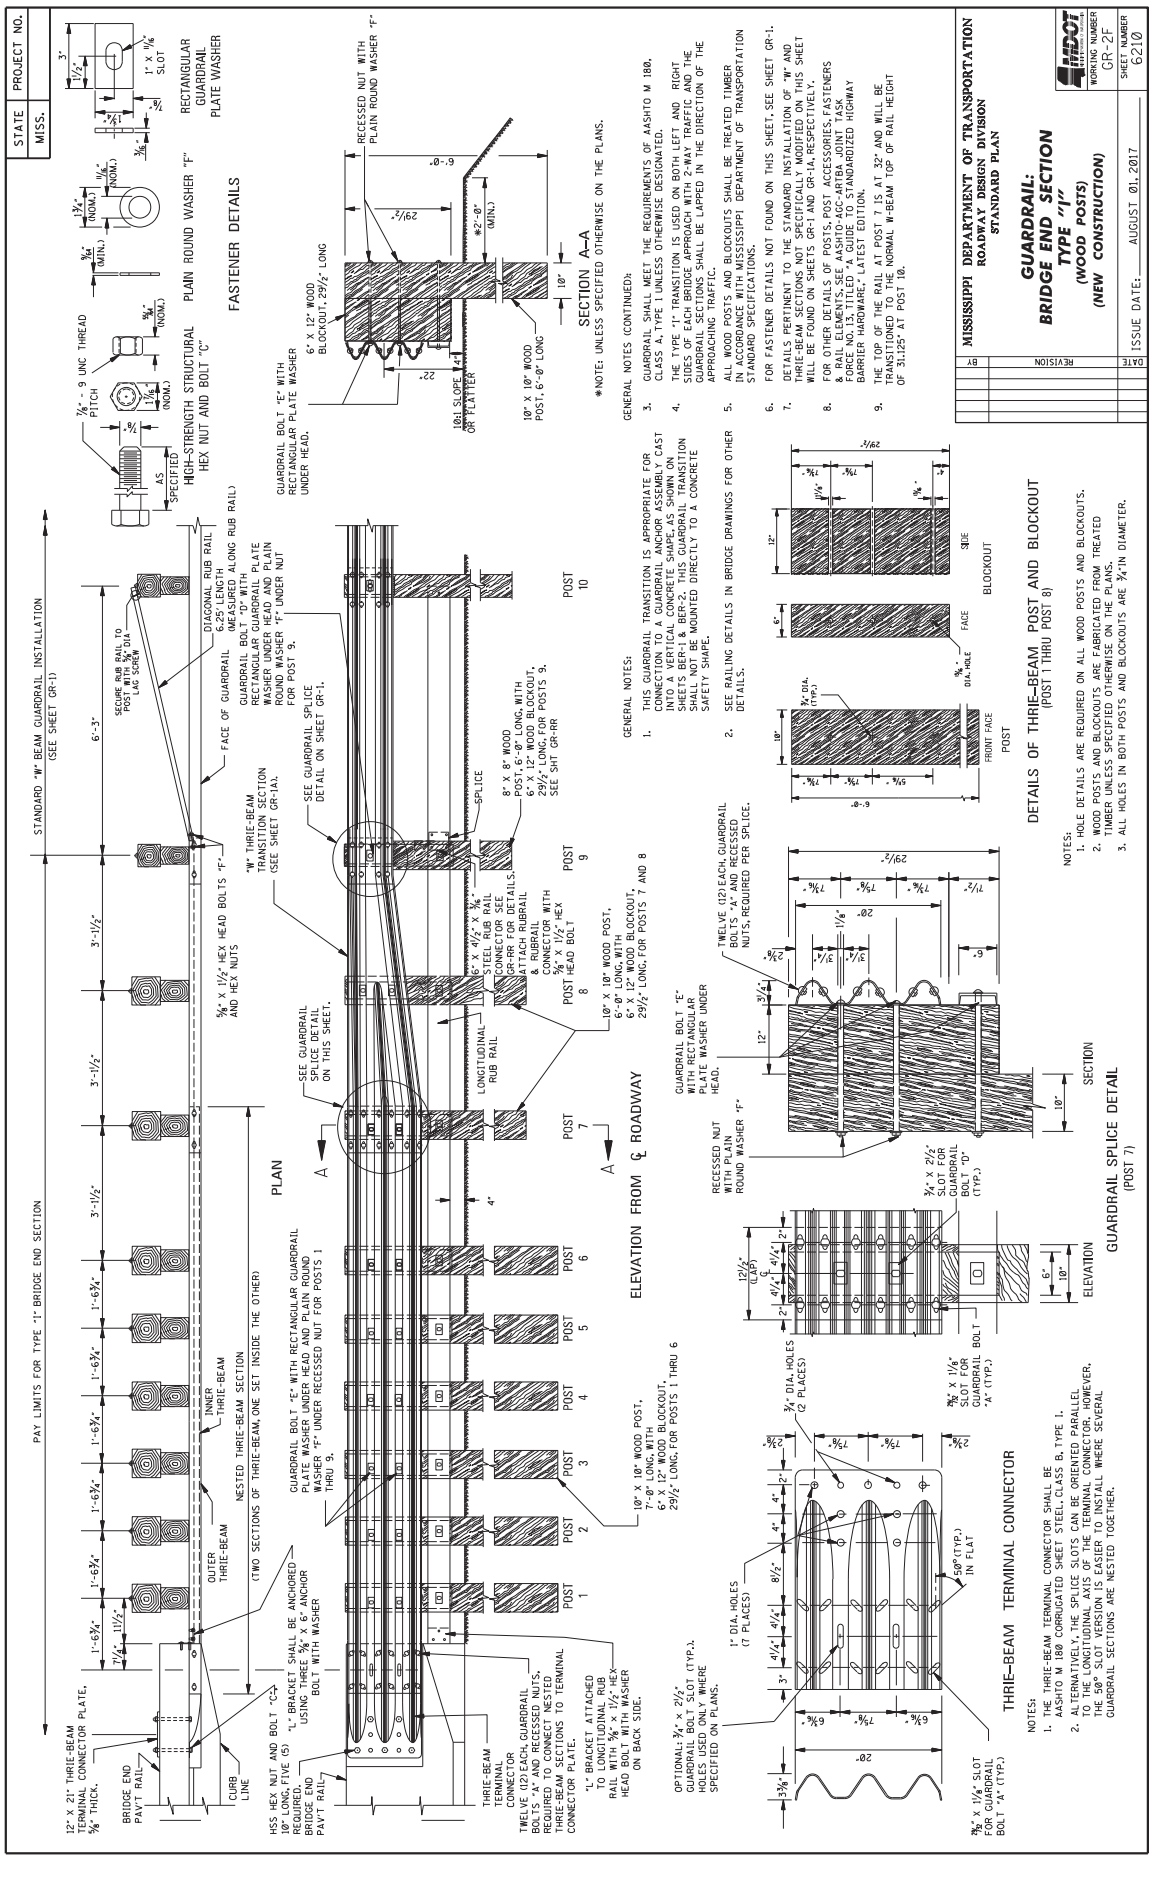

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
GUARDRAIL:
BRIDGE END SECTIONS
TYPE "E", "F" & "G"
WORKING NUMBER GR-2A
SHEET NUMBER 6205
ISSUE DATE: AUGUST 01, 2017
DATE REVISION BY
TYPE "E" BRIDGE END SECTION
TYPE "F" BRIDGE END SECTION
TYPE "G" BRIDGE END SECTION
DETAIL OF PLATE "P"
"W" BEAM TERMINAL CONNECTOR
FASTENER DETAILS
TYPE "F" & "G" BRIDGE END SECTIONS
SECTION A–A
SECTION B–B
SECTION C–C
SECTION D–D
SECTION E–E
SECTION F–F
SECTION G–G
PLAN
ELEVATION
GENERAL NOTES:
1. ALL NOTES AND DETAILS PERTAINING TO NORMAL "W" BEAM GUARDRAIL INSTALLATION NOT SPECIFICALLY MODIFIED ON THIS SHEET WILL BE FOUND ON EITHER SHEET GR-1 (WOOD POSTS) OR GR-1B (STEEL POSTS).
2. WOOD POSTS ARE SHOWN ON THIS SHEET. WHEN STEEL POSTS ARE INSTALLED, A SOIL BEARING PLATE IS PLACED ON THE STANDARD SIZE STEEL POST FOR POSTS 1 THRU 3 IN THE TYPE "E" BES AND FOR POSTS 1 THRU 5 IN THE TYPE "F" BES. A RECTANGULAR GUARDRAIL PLATE WASHER IS PLACED UNDER THE STANDARD POST BOLT HEAD FOR POSTS 1 THRU 6 IN THE TYPE "E" BES AND FOR POSTS 1 THRU 7 IN THE TYPE "F" & "G" BES. SEE DETAILS FOR STEEL POST INSTALLATION ON SHEET GR-1B.
3. GUARDRAIL ELEMENTS SHALL BE LAPPED IN THE DIRECTION OF TRAFFIC. THE ONLY EXCEPTION NOTED IS THAT GUARDRAIL SHALL BE LAPPED FOR APPROACHING TRAFFIC ON A BRIDGE WITH 2-WAY TRAFFIC.
NOTES:
1. TYPE "E" BES (POSTS 1 THRU 3½ TYPES "F" & "G" BES (POSTS 1 THRU 4½ 10' X 10" WOOD POST. 6'-0" LONG, WITH 6" X 12" WOOD BLOCKOUT, 14" LONG, ATTACHED USING GUARDRAIL BOLT "E" WITH PLAIN ROUND WASHER "F" UNDER NUT AND RECTANGULAR GUARDRAIL PLATE WASHER UNDER HEAD.
2. TYPE "E" BES (POSTS 4 THRU 6½ TYPES "F" & "G" BES (POSTS 5 THRU 7½ 6" X 8" WOOD POST. 6'-0" LONG, WITH 6" X 12" WOOD BLOCKOUT, 14" LONG, ATTACHED USING GUARDRAIL BOLT "D" WITH PLAIN ROUND WASHER "F" UNDER NUT AND RECTANGULAR GUARDRAIL PLATE WASHER UNDER HEAD.
HIGH-STRENGTH STRUCTURAL HEX NUT AND BOLT "C" (ASTM A 325)
HARDENED ROUND WASHER
RECTANGULAR GUARDRAIL PLATE WASHER

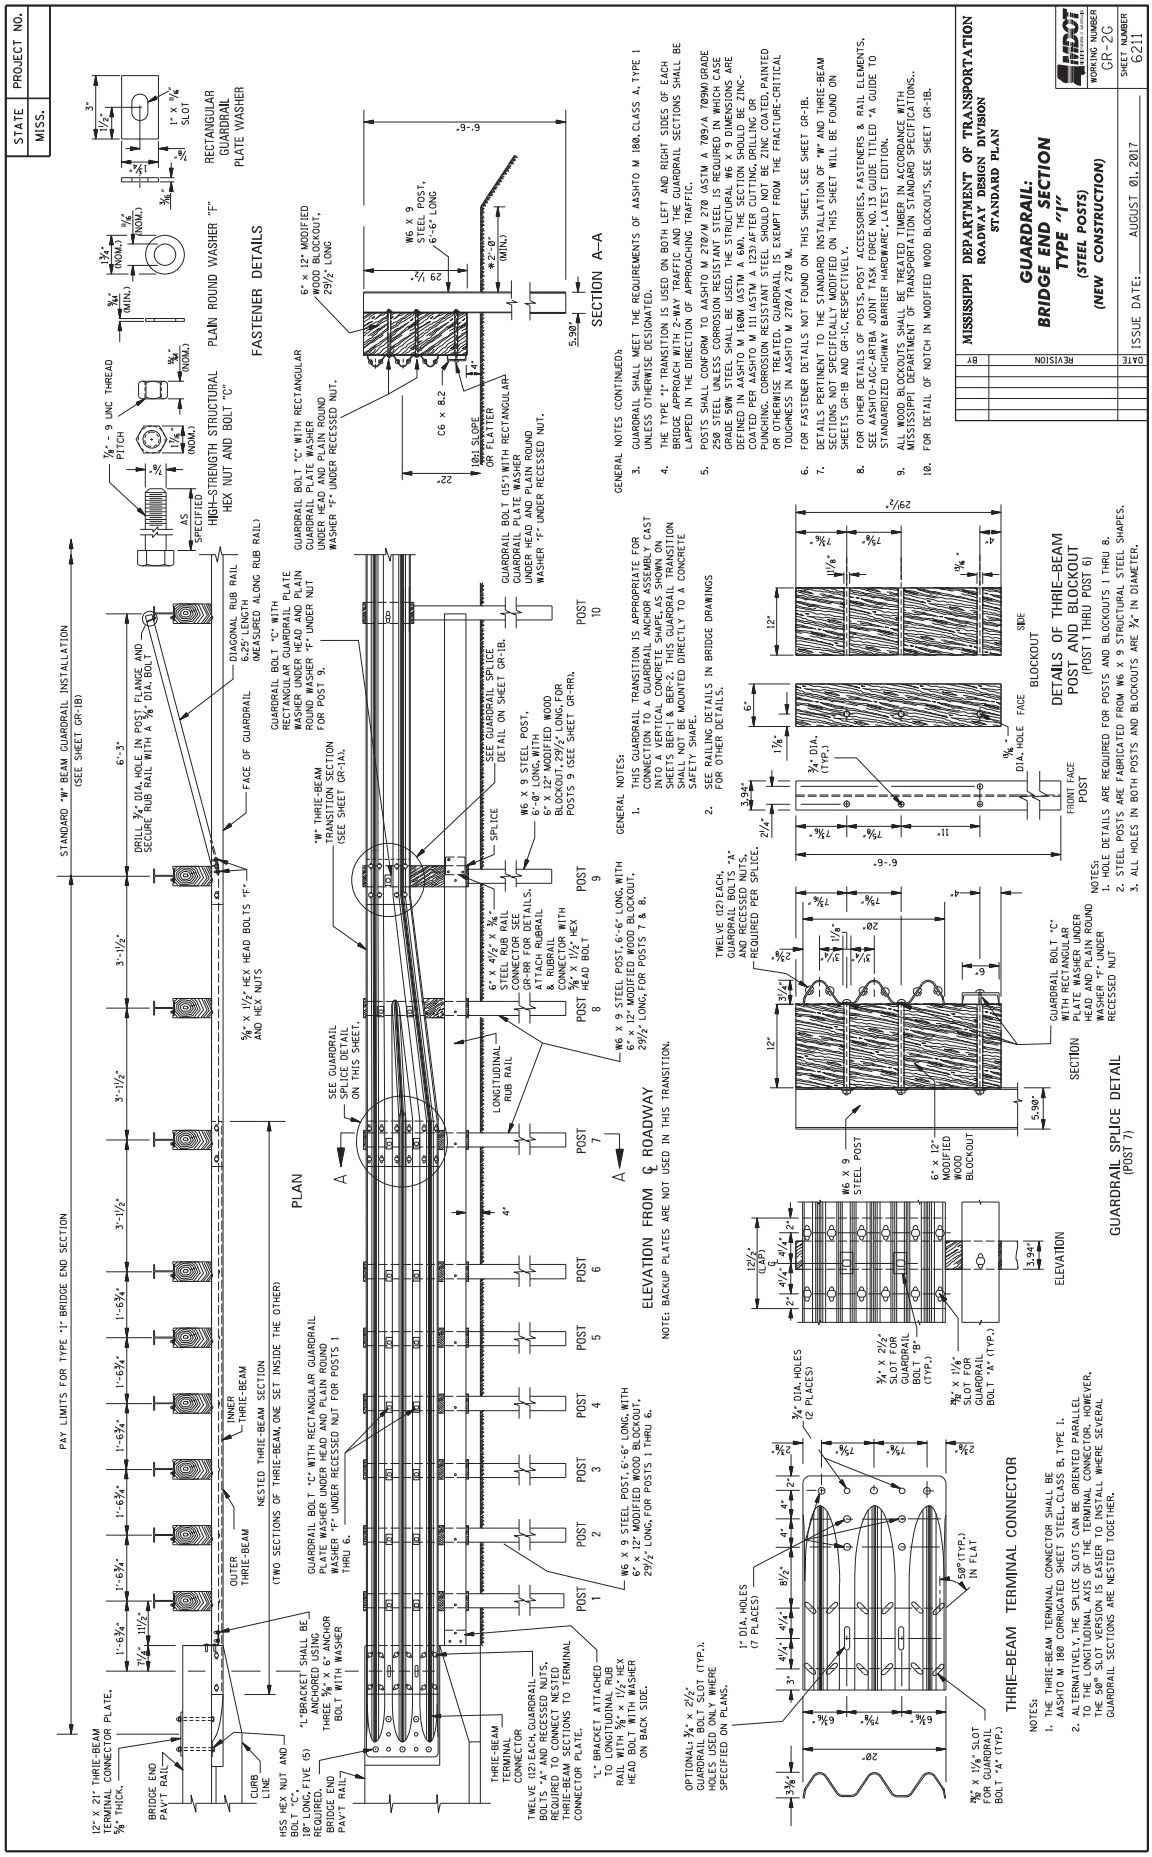

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
GUARDRAIL:
BRIDGE END SECTION
TYPE "D" MODIFIED
WORKING NUMBER GR-2B
SHEET NUMBER 6206
ISSUE DATE: AUGUST 01, 2017
BY REVISION DATE
PAY LIMITS FOR TYPE "D" MODIFIED BRIDGE END SECTION
STANDARD "W" BEAM INSTALLATION (SEE GENERAL NOTE 1.)
CENTERLINE OF POST HOLES IN "W" BEAM GUARDRAIL (SEE GENERAL NOTE 2.)
TRAFFIC
PLAN
SECTION A–A
SECTION B–B
"W" BEAM TERMINAL CONNECTOR, TERMINAL CONNECTOR IS FASTENED TO "W" BEAM GUARDRAIL SECTION WITH EIGHT (8) EACH, GUARDRAIL BOLT "A" AND RECESSED NUT.
CURB TRANSITION
CURB LINE
CONCRETE BRIDGE RAIL
PLATE "Y"
PLATE "B"
BRIDGE END TERMINAL OFFSET BLOCK
BACKUP PLATE UNDER GUARDRAIL
TO BE REMOVED
GUARDRAIL SPLICE
FACE OF GUARDRAIL
"W" BEAM GUARDRAIL
"W" BEAM TERMINAL CONNECTOR
EIGHT (8) EACH, GUARDRAIL BOLT "A" AND RECESSED NUT.
1" DIA. HOLES DRILLED THROUGH CONCRETE BRIDGE RAIL, FOUR (4) REQUIRED AND SHALL BE CONFIGURED TO FIT "W" BEAM TERMINAL CONNECTOR AND PLATE "Y".
HSS HEX NUT AND BOLT "C", 11" LONG, FOUR (4) REQUIRED.
HARDENED ROUND WASHER "E", ONE (1) UNDER HEAD AND ONE (1) UNDER NUT, EIGHT (8) REQUIRED.
CURB FACE
RIDING SURFACE OF BRIDGE DECK
"W" BEAM BACKUP PLATE
BRIDGE END TERMINAL OFFSET BLOCK
1" DIA. HOLES DRILLED THROUGH CONCRETE BRIDGE RAIL, TWO (2) REQUIRED AND SHALL BE CONFIGURED TO FIT BRIDGE END TERMINAL OFFSET BLOCK AND PLATE "B".
HSS HEX NUT AND BOLT "C", 11" LONG, TWO (2) REQUIRED.
HARDENED ROUND WASHER "E", ONE (1) UNDER HEAD AND ONE (1) UNDER NUT, FOUR (4) REQUIRED.
GUARDRAIL BOLT (2") AND RECESSED NUT WITH RECTANGULAR GUARDRAIL PLATE, WASHER UNDER HEAD.
FASTENER DETAILS
HARDENED ROUND WASHER "E"
RECTANGULAR GUARDRAIL PLATE WASHER
HIGH-STRENGTH STRUCTURAL HEX NUT AND BOLT "C" (ASTM A 325)
AS SPECIFIED
GENERAL NOTES:
1. ALL NOTES AND DETAILS PERTAINING TO NORMAL "W" BEAM GUARDRAIL INSTALLATION SPECIFICALLY MODIFIED ON THIS SHEET WILL BE FOUND ON EITHER SHEET GR-1 (WOOD POSTS) OR GR-2 (STEEL POSTS).
2. INSTALLATION DETAILS FOR BRIDGE END SECTION GUARDRAIL POSTS WILL BE FOUND ON EITHER SHEET GR-2C (WOOD POSTS) OR GR-2D (STEEL POSTS).
3. GUARDRAIL ELEMENTS SHALL BE LAPPED IN THE DIRECTION OF TRAFFIC. THE ONLY EXCEPTION NOTED IS THAT GUARDRAIL SHALL BE LAPPED FOR APPROACHING TRAFFIC ON A BRIDGE WITH 2-WAY TRAFFIC.
4. THE HEIGHT OF RAIL AT THE BRIDGE END IS 22" AND WILL BE TRANSITIONED TO 25" AT POST 5.
"W" BEAM TERMINAL CONNECTOR
NOTE: THE "W" BEAM TERMINAL CONNECTOR IS USED WITH THE TYPE "D" MODIFIED BRIDGE END SECTION. THE CROSS SECTIONAL DIMENSIONS OF THIS PART ARE IDENTICAL TO THE STANDARD "W" BEAM SECTION (AASHTO M 180 CLASS B, TYPE II).
"W" BEAM BACKUP PLATE
NOTE: THE "W" BEAM BACK-UP PLATE IS USED UNDER THE "W" BEAM RAIL SECTION WHERE INDICATED ON THIS SHEET. CROSS SECTIONAL DIMENSIONS OF THIS PART ARE IDENTICAL TO THOSE OF THE STANDARD "W" BEAM RAIL SECTION.
DETAIL OF PLATE "B"
DETAIL OF PLATE "Y"
DETAIL OF BRIDGE END TERMINAL OFFSET BLOCK
FRONT FACE
SIDE

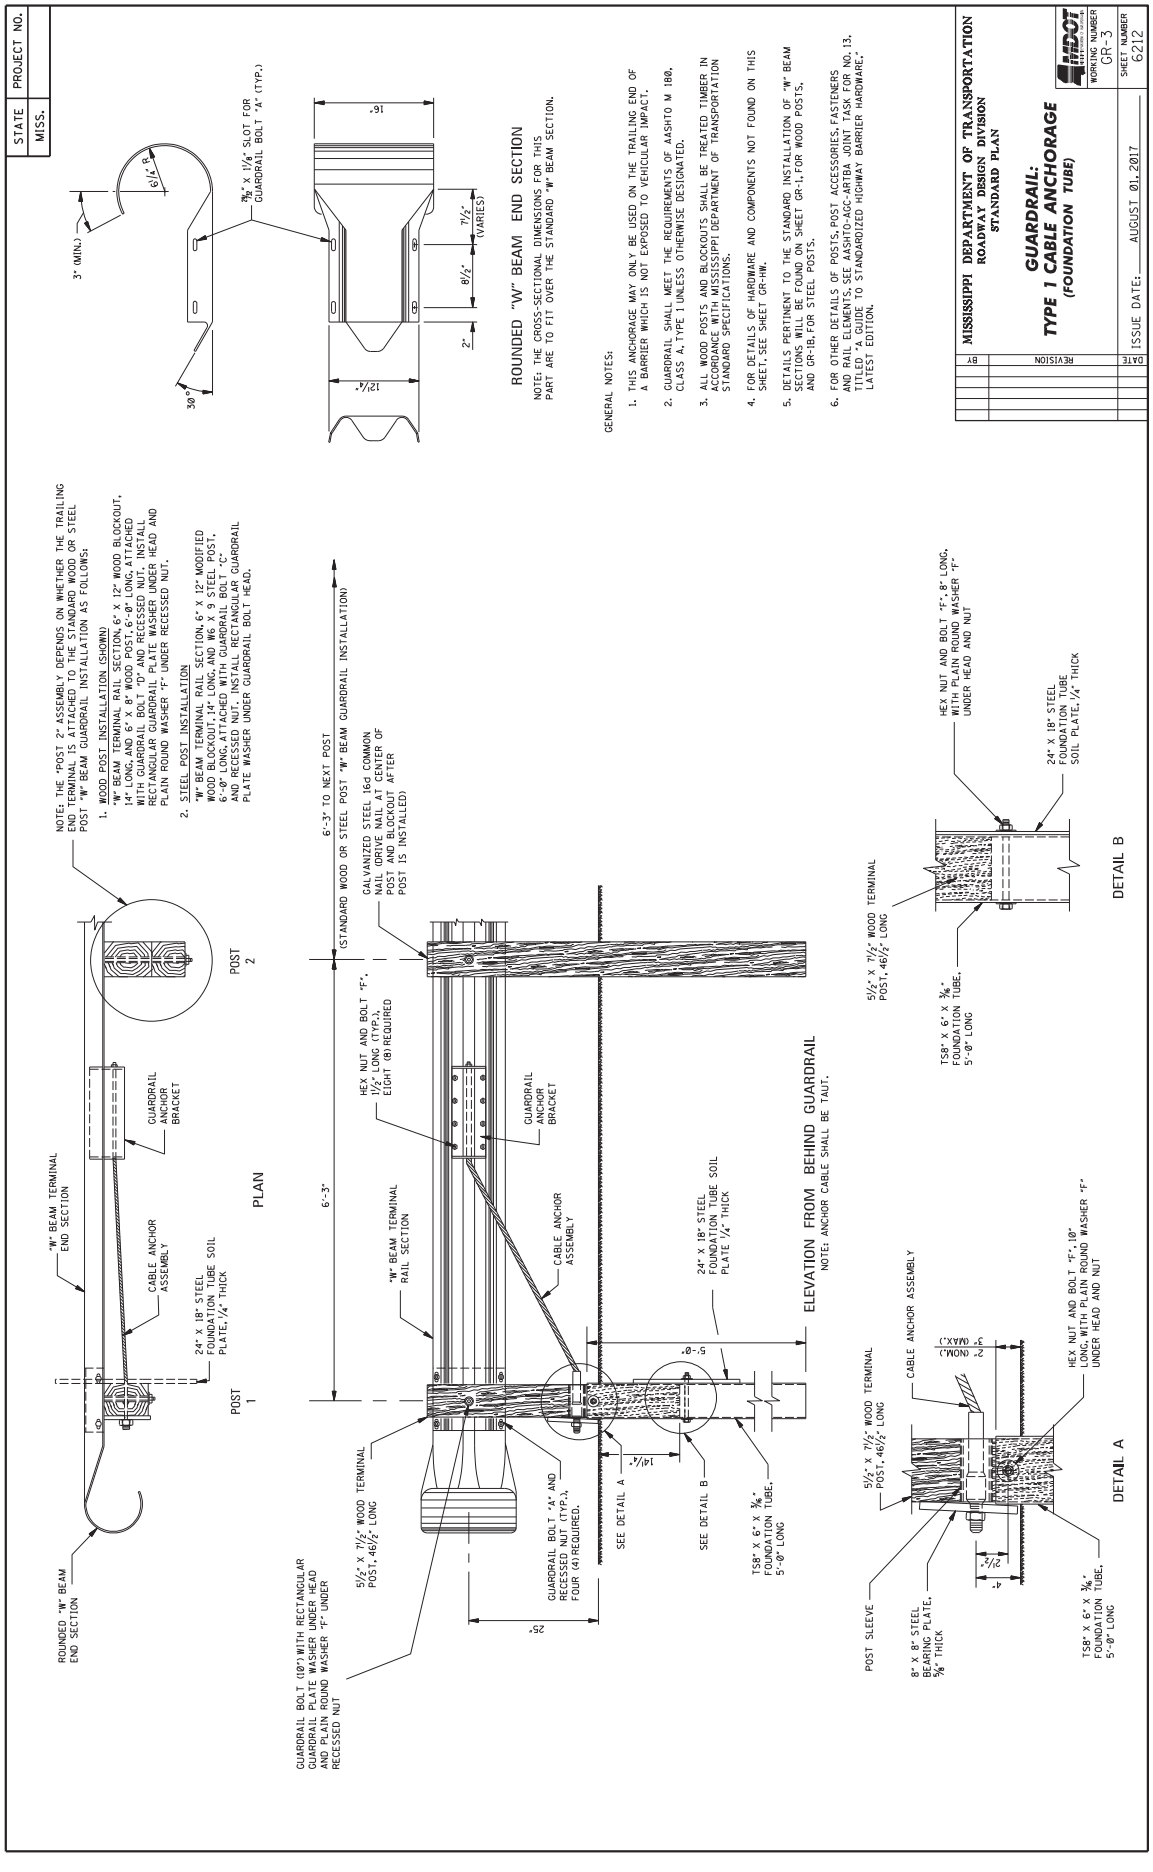

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
GUARDRAIL:
BRIDGE END SECTION
TYPE "H"
(WOOD POSTS)
WORKING NUMBER GR-2C
SHEET NUMBER 6207
ISSUE DATE: AUGUST 01, 2017
DATE REVISION BY
GENERAL NOTES:
1. ALL NOTES AND DETAILS PERTAINING TO NORMAL "W" BEAM GUARDRAIL INSTALLATION NOT SPECIFICALLY MODIFIED ON THIS SHEET WILL BE FOUND ON SHEET GR-1 (WOOD POSTS).
2. THE HEIGHT OF RAIL AT THE BRIDGE END IS 21" AND WILL BE TRANSITIONED TO 25" AT POST 5.
3. GUARDRAIL ELEMENTS SHALL BE LAPPED IN THE DIRECTION OF TRAFFIC. THE ONLY EXCEPTION NOTED IS THAT GUARDRAIL SHALL BE LAPPED FOR APPROACHING TRAFFIC ON A BRIDGE WITH 2-WAY TRAFFIC.
PLAN
SECTION A–A
SECTION B–B
FASTENER DETAILS
"W" BEAM TERMINAL CONNECTOR
"W" BEAM BACKUP PLATE
DETAIL OF BRIDGE END TERMINAL OFFSET BLOCK
TRAFFIC
PAY LIMITS FOR TYPE "H" BRIDGE END SECTION
STANDARD "W" BEAM INSTALLATION (SEE GENERAL NOTE 1.)
CONCRETE BRIDGE RAIL
GUARDRAIL SPLICE
FACE OF GUARDRAIL
BRIDGE END TERMINAL OFFSET BLOCK
BACKUP PLATE UNDER GUARDRAIL
CURB LINE
7'-6" CURB TRANSITION
"W" BEAM TERMINAL CONNECTOR, TERMINAL CONNECTOR IS FASTENED TO "W" BEAM GUARDRAIL SECTION WITH EIGHT (8) EACH, GUARDRAIL BOLT "A" AND RECESSED NUT.
GUARDRAIL BOLT "E" WITH PLAIN ROUND WASHER "F" UNDER NUT AND RECTANGULAR GUARDRAIL PLATE WASHER UNDER HEAD FOR POSTS 1 THRU 3.
10" X 10" WOOD POST, 6'-0" LONG, WITH 6" X 12" WOOD BLOCKOUT, 14" LONG, FOR POSTS 1 THRU 3.
6" X 8" WOOD POST, 6'-0" LONG, WITH 6" X 12" WOOD BLOCKOUT, 14" LONG, FOR POSTS 4 AND 5.
GUARDRAIL BOLT "D" WITH PLAIN ROUND WASHER UNDER NUT AND RECTANGULAR GUARDRAIL PLATE WASHER UNDER HEAD FOR POSTS 4 AND 5.
POST 1
POST 2
POST 3
POST 4
POST 5
POST 6
HARDENED ROUND WASHER "E", UNDER HEAD, FOUR (4) REQUIRED.
"W" BEAM GUARDRAIL
"W" BEAM TERMINAL CONNECTOR
EIGHT (8) EACH, GUARDRAIL BOLT "A" AND RECESSED NUT.
GUARDRAIL ANCHOR ASSEMBLY "GA2" (INSTALLED DURING BRIDGE CONSTRUCTION)
HSS HEX NUT AND BOLT "C", 10" LONG, FOUR (4) REQUIRED.
BEVELED WASHER, FOUR (4) REQUIRED.
(SEE GENERAL NOTE 2.)
CURB FACE
RIDING SURFACE OF BRIDGE DECK
HARDENED ROUND WASHER "E", UNDER HEAD, TWO (2) REQUIRED.
"W" BEAM BACKUP PLATE
GUARDRAIL BOLT (2") AND RECESSED NUT WITH RECTANGULAR GUARDRAIL PLATE WASHER UNDER HEAD.
HSS HEX NUT AND BOLT "C", 10" LONG, TWO (2) REQUIRED.
BEVELED WASHER, TWO (2) REQUIRED.
9:1 SLOPE
BEVELED WASHER
RECTANGULAR GUARDRAIL PLATE WASHER
HARDENED ROUND WASHER "E"
HIGH-STRENGTH STRUCTURAL HEX NUT AND BOLT "C" (ASTM A 325)
NOTE: THE "W" BEAM BACK-UP PLATE IS USED UNDER THE "W" BEAM RAIL SECTION WHERE INDICATED ON THIS SHEET. CROSS-SECTIONAL DIMENSIONS OF THIS PART ARE IDENTICAL TO THOSE OF THE STANDARD "W" BEAM RAIL SECTION.
NOTE: THE "W" BEAM TERMINAL CONNECTOR IS USED WITH THE TYPE "H" BRIDGE END SECTION. THE CROSS-SECTIONAL DIMENSIONS OF THIS PART ARE IDENTICAL TO THE STANDARD "W" BEAM SECTION (AASHTO M 180 CLASS B, TYPE II).
FRONT FACE
SIDE

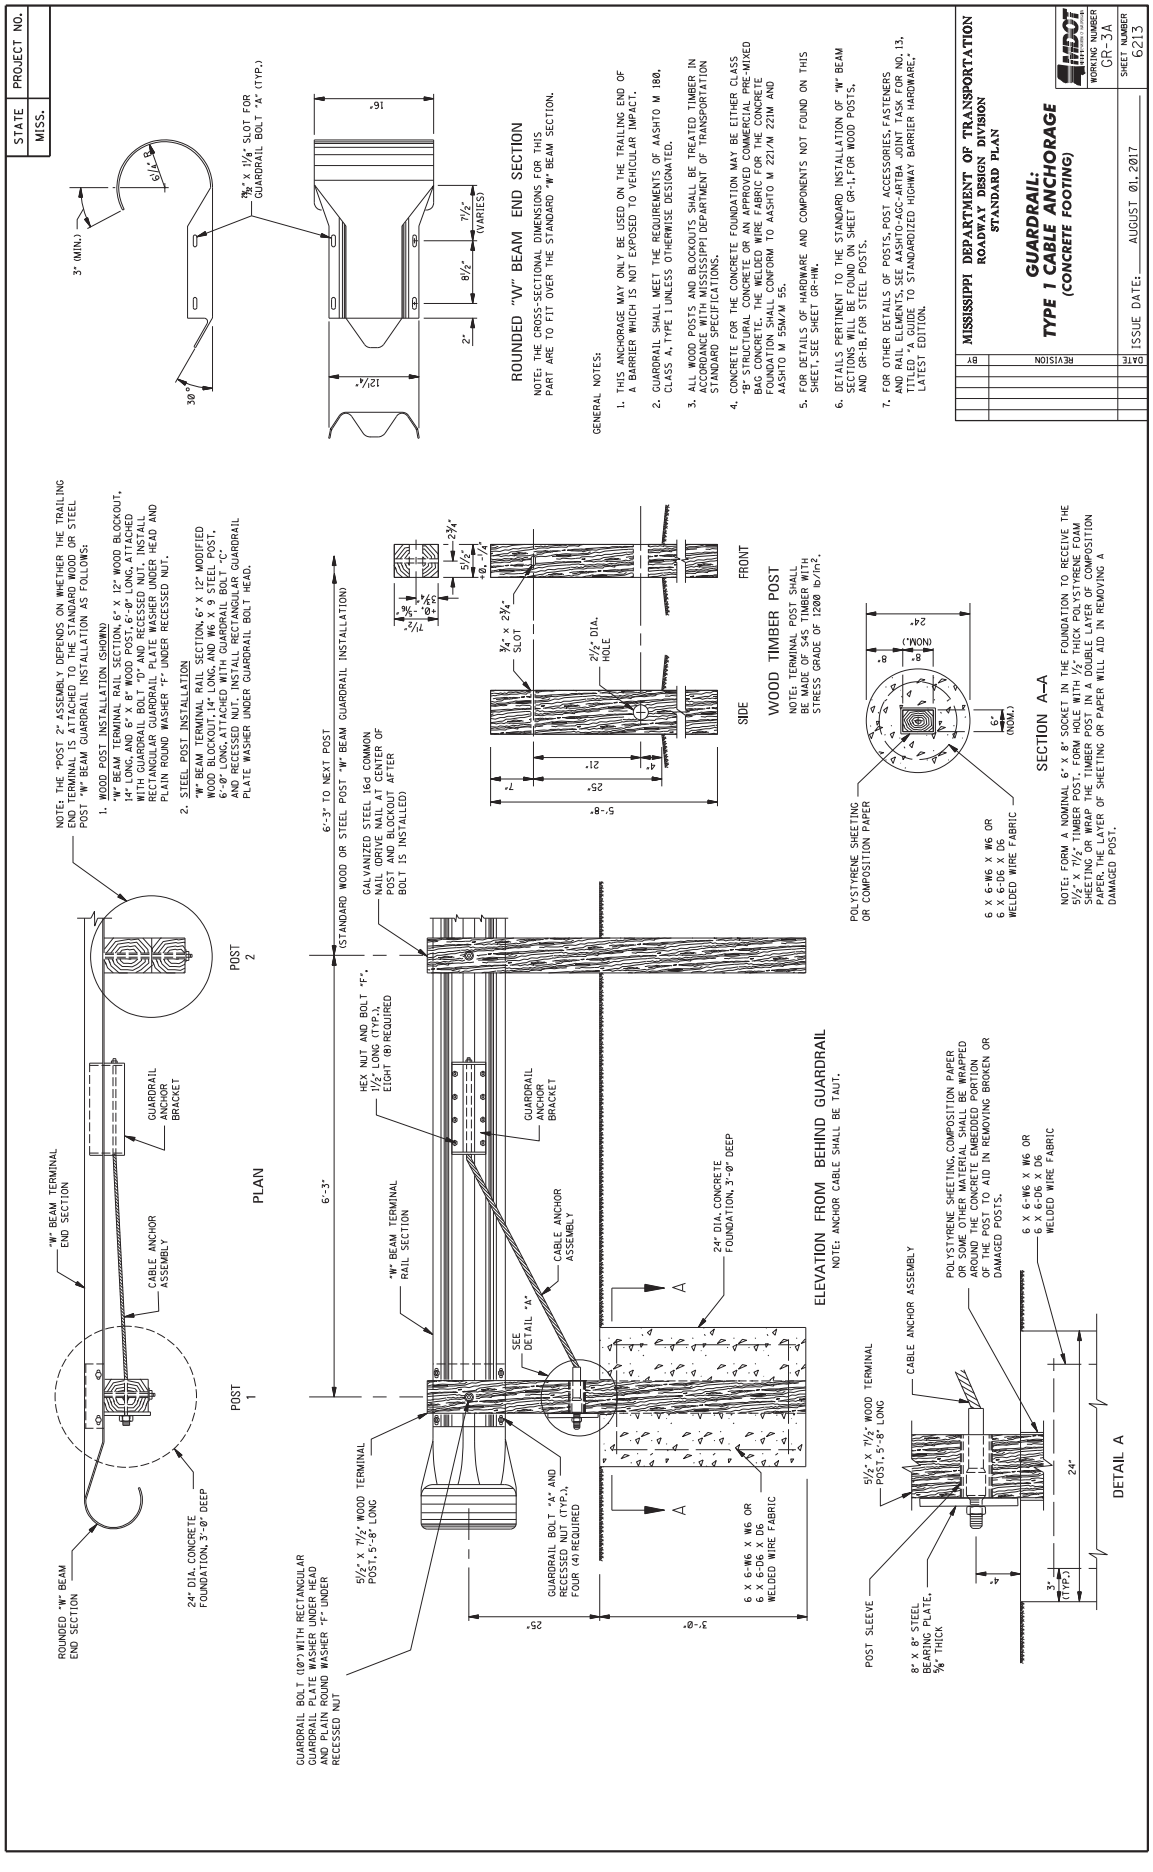

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
GUARDRAIL:
BRIDGE END SECTION
TYPE "H"
(STEEL POSTS)
WORKING NUMBER GR-2D
SHEET NUMBER 6208
ISSUE DATE: AUGUST 01, 2017
DATE REVISION BY
GENERAL NOTES:
1. ALL NOTES AND DETAILS PERTAINING TO NORMAL "W" BEAM GUARDRAIL INSTALLATION NOT SPECIFICALLY MODIFIED ON THIS SHEET WILL BE FOUND ON SHEET GR-1B (STEEL POSTS).
2. THE HEIGHT OF RAIL AT THE BRIDGE END IS 21" AND WILL BE TRANSITIONED TO 25" AT POST 5.
3. GUARDRAIL ELEMENTS SHALL BE LAPPED IN THE DIRECTION OF TRAFFIC. THE ONLY EXCEPTION NOTED IS THAT GUARDRAIL SHALL BE LAPPED FOR APPROACHING TRAFFIC ON A BRIDGE WITH 2-WAY TRAFFIC.
PLAN
SECTION A–A
SECTION B–B
"W" BEAM TERMINAL CONNECTOR
"W" BEAM BACKUP PLATE
FASTENER DETAILS
DETAIL OF BRIDGE END TERMINAL OFFSET BLOCK
STANDARD "W" BEAM INSTALLATION (SEE GENERAL NOTE 1.)
PAY LIMITS FOR TYPE "H" BRIDGE END SECTION
TRAFFIC
CONCRETE BRIDGE RAIL
GUARDRAIL SPLICE
FACE OF GUARDRAIL
BRIDGE END TERMINAL OFFSET BLOCK
BACKUP PLATE UNDER GUARDRAIL
7'-6" CURB TRANSITION
CURB LINE
"W" BEAM TERMINAL CONNECTOR, TERMINAL CONNECTOR IS FASTENED TO "W" BEAM GUARDRAIL SECTION WITH EIGHT (8) EACH, GUARDRAIL BOLT "A" AND RECESSED NUT.
GUARDRAIL BOLT "C" WITH RECESSED NUT AND RECTANGULAR GUARDRAIL PLATE WASHER UNDER HEAD FOR POSTS 1 THRU 5.
24" X 12" STEEL SOIL BEARING PLATE, 1/4" THICK, WELDED TO POSTS 1 THRU 3, WELD TOP, BOTTOM, AND THREE 3" WELDS ON EACH SIDE.
W6 X 9 STEEL POST, 6'-0" LONG, WITH 6" X 12" MODIFIED WOOD BLOCKOUT, 14" LONG, FOR POSTS 1 THRU 5.
POST 1
POST 2
POST 3
POST 4
POST 5
POST 6
25'-0"
10'-5 1/4"
3'-1 1/2"
6'-3"
4'
9"
2 1/4"
CONCRETE BRIDGE RAIL
GUARDRAIL ANCHOR ASSEMBLY "GA2" (INSTALLED DURING BRIDGE CONSTRUCTION)
HSS HEX NUT AND BOLT "C", 10" LONG, FOUR (4) REQUIRED.
BEVELED WASHER, FOUR (4) REQUIRED.
HARDENED ROUND WASHER "E", UNDER HEAD, FOUR (4) REQUIRED.
"W" BEAM GUARDRAIL
"W" BEAM TERMINAL CONNECTOR
EIGHT (8) EACH, GUARDRAIL BOLT "A" AND RECESSED NUT.
(SEE GENERAL NOTE 2.)
CURB FACE
RIDING SURFACE OF BRIDGE DECK
GUARDRAIL ANCHOR ASSEMBLY "GA1" (INSTALLED DURING BRIDGE CONSTRUCTION)
HSS HEX NUT AND BOLT "C", 10" LONG, TWO (2) REQUIRED.
BEVELED WASHER, TWO (2) REQUIRED.
HARDENED ROUND WASHER "E", UNDER HEAD, TWO (2) REQUIRED.
"W" BEAM BACKUP PLATE
GUARDRAIL BOLT (2") AND RECESSED NUT WITH RECTANGULAR GUARDRAIL PLATE WASHER UNDER HEAD.
BRIDGE END TERMINAL OFFSET BLOCK
30"
12"
6"
3/4" X 2 1/2" SLOT
12 7/8"
3 1/4"
NOTE: THE "W" BEAM BACK-UP PLATE IS USED UNDER THE "W" BEAM RAIL SECTION WHERE INDICATED ON THIS SHEET. CROSS-SECTIONAL DIMENSIONS OF THIS PART ARE IDENTICAL TO THOSE OF THE STANDARD "W" BEAM RAIL SECTION.
7/8" X 1 1/4" SLOT FOR GUARDRAIL BOLT "A" (TYP.)
1" DIA. HOLES (TYP.)
3/4" X 2 1/2" SLOTTED HOLE (BOLT NOT REQUIRED)
NOTE: THE "W" BEAM TERMINAL CONNECTOR IS USED WITH THE TYPE "H" BRIDGE END SECTION. THE CROSS-SECTIONAL DIMENSIONS OF THIS PART ARE IDENTICAL TO THE STANDARD "W" BEAM SECTION (AASHTO M 180 CLASS B, TYPE II).
3/4" DIA. HOLES
W4 X 13
1" DIA. HOLES
FRONT FACE
SIDE
1 1/4" X 3 1/4" SLOT
RECTANGULAR GUARDRAIL PLATE WASHER
9:1 SLOPE
BEVELED WASHER
HARDENED ROUND WASHER "E"
7/8" - 9 UNC THREAD PITCH
HIGH-STRENGTH STRUCTURAL HEX NUT AND BOLT "C" (ASTM A 325)

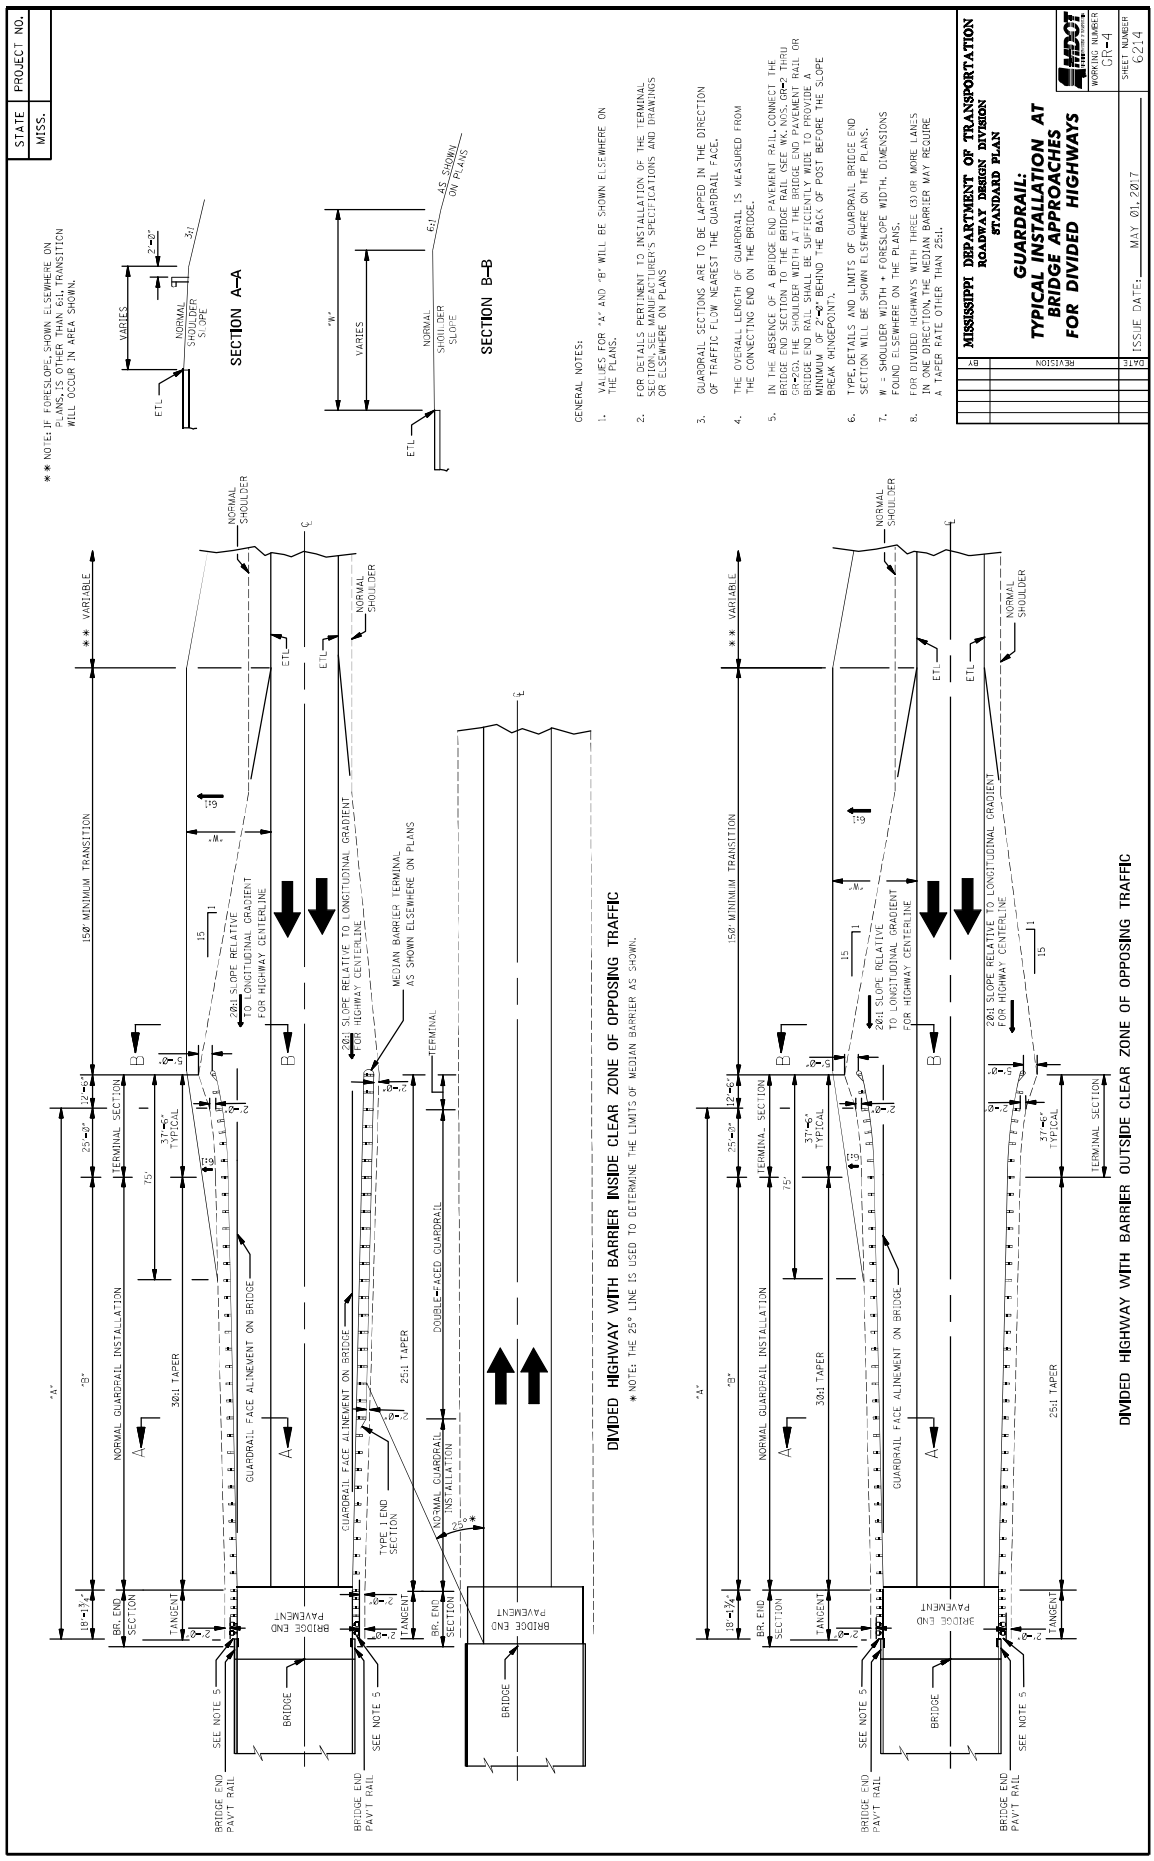

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
GUARDRAIL:
BRIDGE END SECTION
TYPE "G" MODIFIED
WORKING NUMBER GR-2E
SHEET NUMBER 6209
ISSUE DATE: AUGUST 01, 2017
REVISION
BY
DATE
GENERAL NOTES:
1. ALL NOTES AND DETAILS PERTAINING TO NORMAL "W" BEAM GUARDRAIL INSTALLATION NOT SPECIFICALLY MODIFIED ON THIS SHEET WILL BE FOUND ON EITHER SHEET GR-1 (WOOD POSTS) OR GR-1B (STEEL POSTS).
2. INSTALLATION DETAILS FOR BRIDGE END SECTION GUARDRAIL POSTS WILL BE FOUND ON EITHER SHEET GR-2C (WOOD POSTS) OR GR-2D (STEEL POSTS).
3. THE HEIGHT OF RAIL AT THE BRIDGE END IS 21" AND WILL BE TRANSITIONED TO 25" AT POST 5.
4. GUARDRAIL ELEMENTS SHALL BE LAPPED IN THE DIRECTION OF TRAFFIC. THE ONLY EXCEPTION NOTED IS THAT GUARDRAIL SHALL BE LAPPED FOR APPROACHING TRAFFIC ON A BRIDGE WITH 2-WAY TRAFFIC.
PLAN
GUARDRAIL CONNECTION DETAILS
SECTION
FACE ELEVATION
BEVELED WASHER
HARDENED ROUND WASHER "E"
RECTANGULAR GUARDRAIL PLATE WASHER
HIGH-STRENGTH STRUCTURAL HEX NUT AND BOLT "C" (ASTM A 325)
FASTENER DETAILS
"W" BEAM TERMINAL CONNECTOR
DETAIL OF PLATE "Y"
SECTION A–A
SECTION B–B
PAY LIMITS FOR TYPE "G" MODIFIED BRIDGE END SECTION
STANDARD "W" BEAM INSTALLATION (SEE GENERAL NOTE 1.)
CONCRETE BRIDGE RAIL
CURB LINE
7'-6" CURB TRANSITION
SEE GUARDRAIL CONNECTION DETAILS
GUARDRAIL SPLICE
CENTERLINE OF POST HOLES IN "W" BEAM GUARDRAIL (SEE GENERAL NOTE 2.)
FACE OF GUARDRAIL
TRAFFIC
POST 1
POST 2
POST 3
POST 4
POST 5
POST 6
"W" BEAM TERMINAL CONNECTOR, TERMINAL CONNECTOR IS FASTENED TO THE GUARDRAIL SECTION WITH EIGHT (8) EACH, GUARDRAIL BOLT "A" AND RECESSED NUT.
"W" BEAM GUARDRAIL
TWO (2) EACH, GUARDRAIL BOLT "A" AND RECESSED NUT.
"W" BEAM SECTION, 16' LONG (AASHTO M 180 CLASS B, TYPE II)
OPTIONAL 3/4" X 2 1/2" SLOTTED HOLE IN "W" SECTION (BOLT NOT REQUIRED).
12" X 4 1/8" X 5/16" PLATE, TWO (2) REQUIRED, TOP AND BOTTOM.
THESE SLOTS ARE USED TO FASTEN GUARDRAIL.
1" HOLES IN PLATE "Y" (TYP.)
GUARDRAIL ANCHOR ASSEMBLY (INSTALLED DURING BRIDGE CONSTRUCTION)
HSS HEX NUT AND BOLT "C", 10" LONG, FOUR (4) REQUIRED.
HARDENED ROUND WASHER "E", ONE (1) UNDER HEAD AND ONE (1) UNDER NUT, EIGHT (8) REQUIRED.
12" X 4 1/8" X 5/16" PLATE
PLATE "Y"
BOTH SIDES
9:1 SLOPE
1" X 1 1/16" SLOT
3/4" - 9 UNC. THREAD PITCH
AS SPECIFIED
CURB FACE
RIDING SURFACE OF BRIDGE DECK
(SEE GENERAL NOTE 3.)
BEVELED WASHER, FOUR (4) REQUIRED.
HSS HEX NUT AND BOLT "C", 10" LONG, FOUR (4) REQUIRED.
HARDENED ROUND WASHER "E", ONE (1) UNDER HEAD AND ONE (1) UNDER NUT, EIGHT (8) REQUIRED.
TWO (2) EACH, GUARDRAIL BOLT "A" AND RECESSED NUT.
EIGHT (8) EACH, GUARDRAIL BOLT "A" AND RECESSED NUT.
"W" BEAM TERMINAL CONNECTOR
NOTE: THE "W" BEAM TERMINAL CONNECTOR IS USED WITH THE TYPE "G" MODIFIED BRIDGE END SECTION. THE CROSS-SECTIONAL DIMENSIONS OF THIS PART ARE IDENTICAL TO THE STANDARD "W" BEAM SECTION (AASHTO M 180 CLASS B, TYPE II).
3/4" X 2 1/2" SLOTTED HOLE (BOLT NOT REQUIRED)
7/8" X 1 1/8" SLOT FOR GUARDRAIL BOLT "A" (TYP.)
1" DIA. HOLES (TYP.)

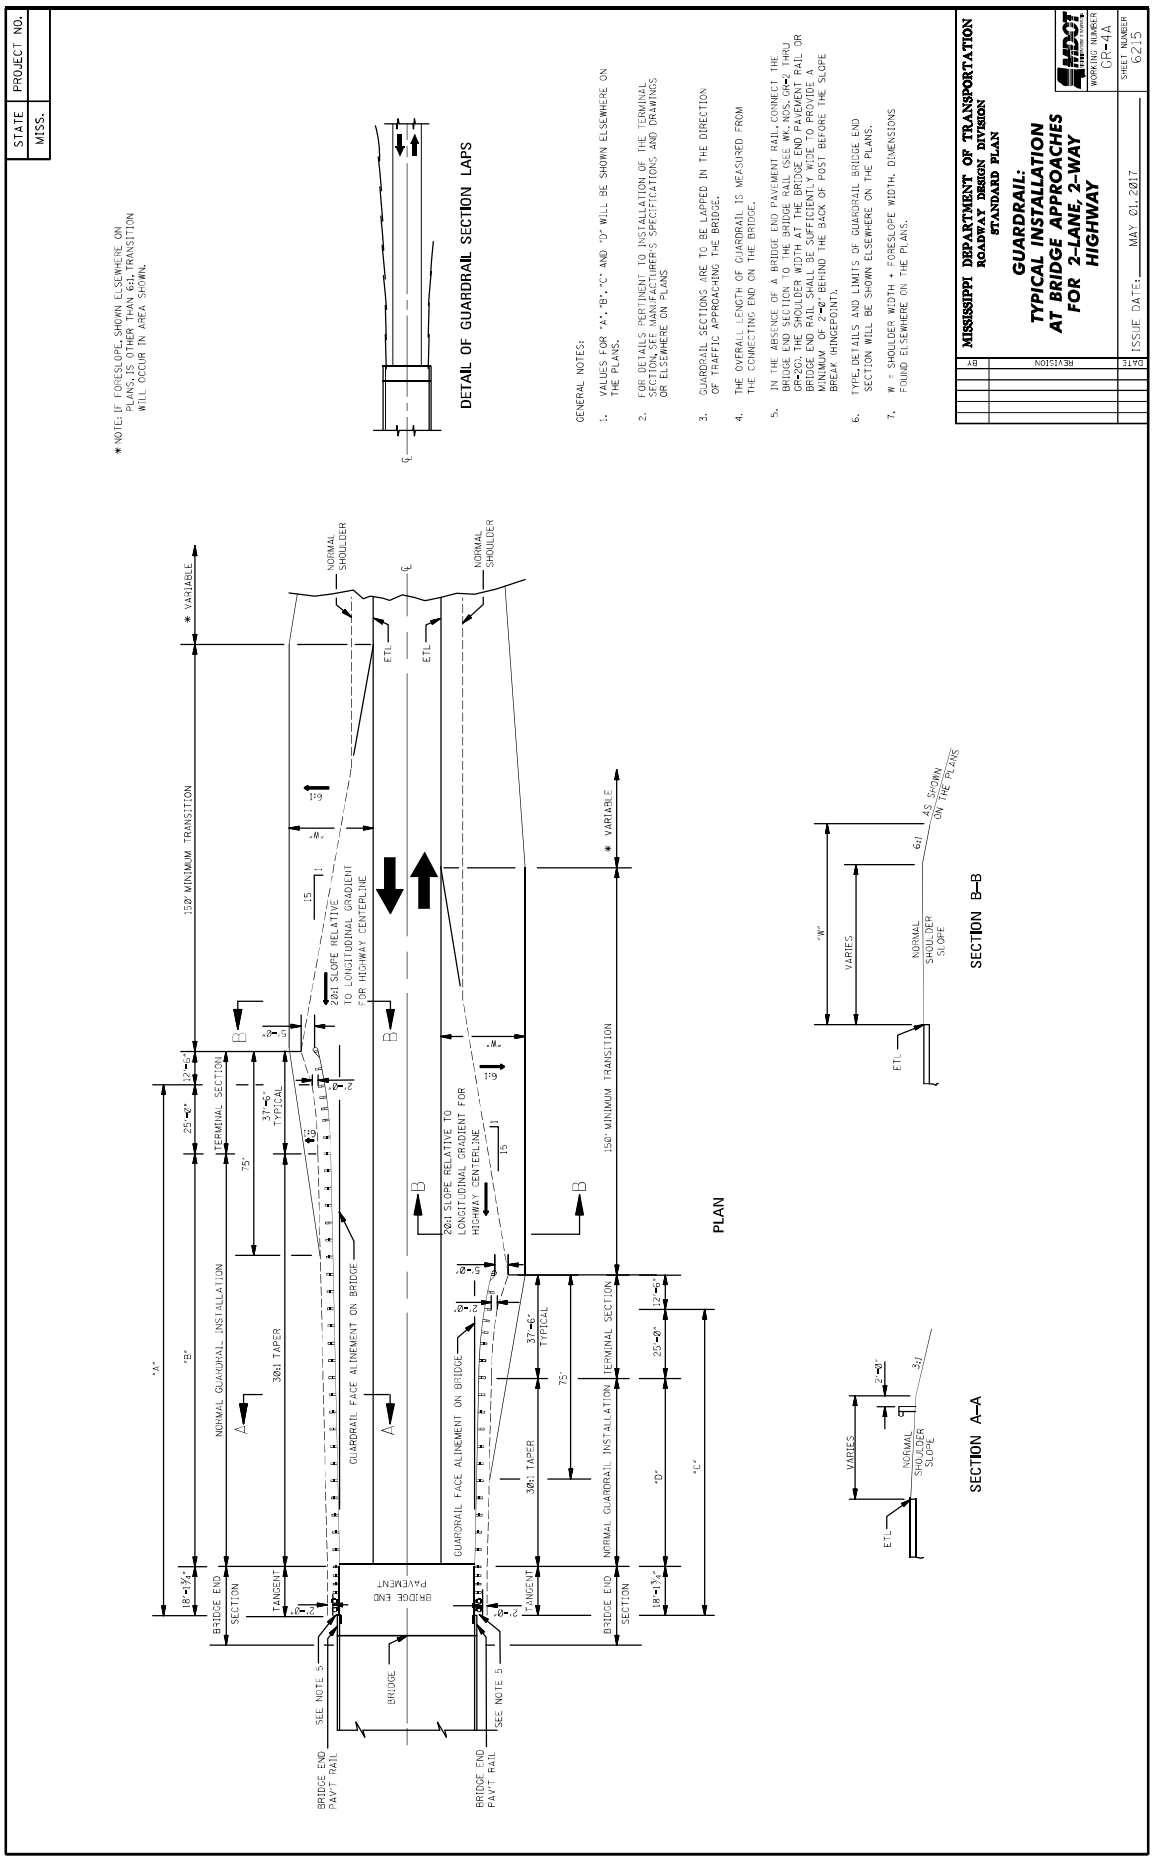

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
GUARDRAIL:
BRIDGE END SECTION
TYPE "I"
(WOOD POSTS)
(NEW CONSTRUCTION)
WORKING NUMBER GR-2F
SHEET NUMBER 6210
ISSUE DATE: AUGUST 01, 2017
DATE REVISION BY
STANDARD "W" BEAM GUARDRAIL INSTALLATION (SEE SHEET GR-1)
PAY LIMITS FOR TYPE "I" BRIDGE END SECTION
PLAN
ELEVATION FROM ℄ ROADWAY
SECTION A–A
*NOTE: UNLESS SPECIFIED OTHERWISE ON THE PLANS.
FASTENER DETAILS
HIGH-STRENGTH STRUCTURAL HEX NUT AND BOLT "C"
PLAIN ROUND WASHER "F"
RECTANGULAR GUARDRAIL PLATE WASHER
GENERAL NOTES (CONTINUED):
GENERAL NOTES:
DETAILS OF THRIE-BEAM POST AND BLOCKOUT
(POST 1 THRU POST 8)
THRIE-BEAM TERMINAL CONNECTOR
GUARDRAIL SPLICE DETAIL
(POST 7)
NOTES:
1. HOLE DETAILS ARE REQUIRED ON ALL WOOD POSTS AND BLOCKOUTS.
2. WOOD POSTS AND BLOCKOUTS ARE FABRICATED FROM TREATED TIMBER UNLESS SPECIFIED OTHERWISE ON THE PLANS.
3. ALL HOLES IN BOTH POSTS AND BLOCKOUTS ARE ¾"IN DIAMETER.
NOTES:
1. THE THRIE-BEAM TERMINAL CONNECTOR SHALL BE AASHTO M 180 CORRUGATED SHEET STEEL, CLASS B, TYPE I.
2. ALTERNATIVELY, THE SPLICE SLOTS CAN BE ORIENTED PARALLEL TO THE LONGITUDINAL AXIS OF THE TERMINAL CONNECTOR, HOWEVER, THE 50° SLOT VERSION IS EASIER TO INSTALL WHERE SEVERAL GUARDRAIL SECTIONS ARE NESTED TOGETHER.

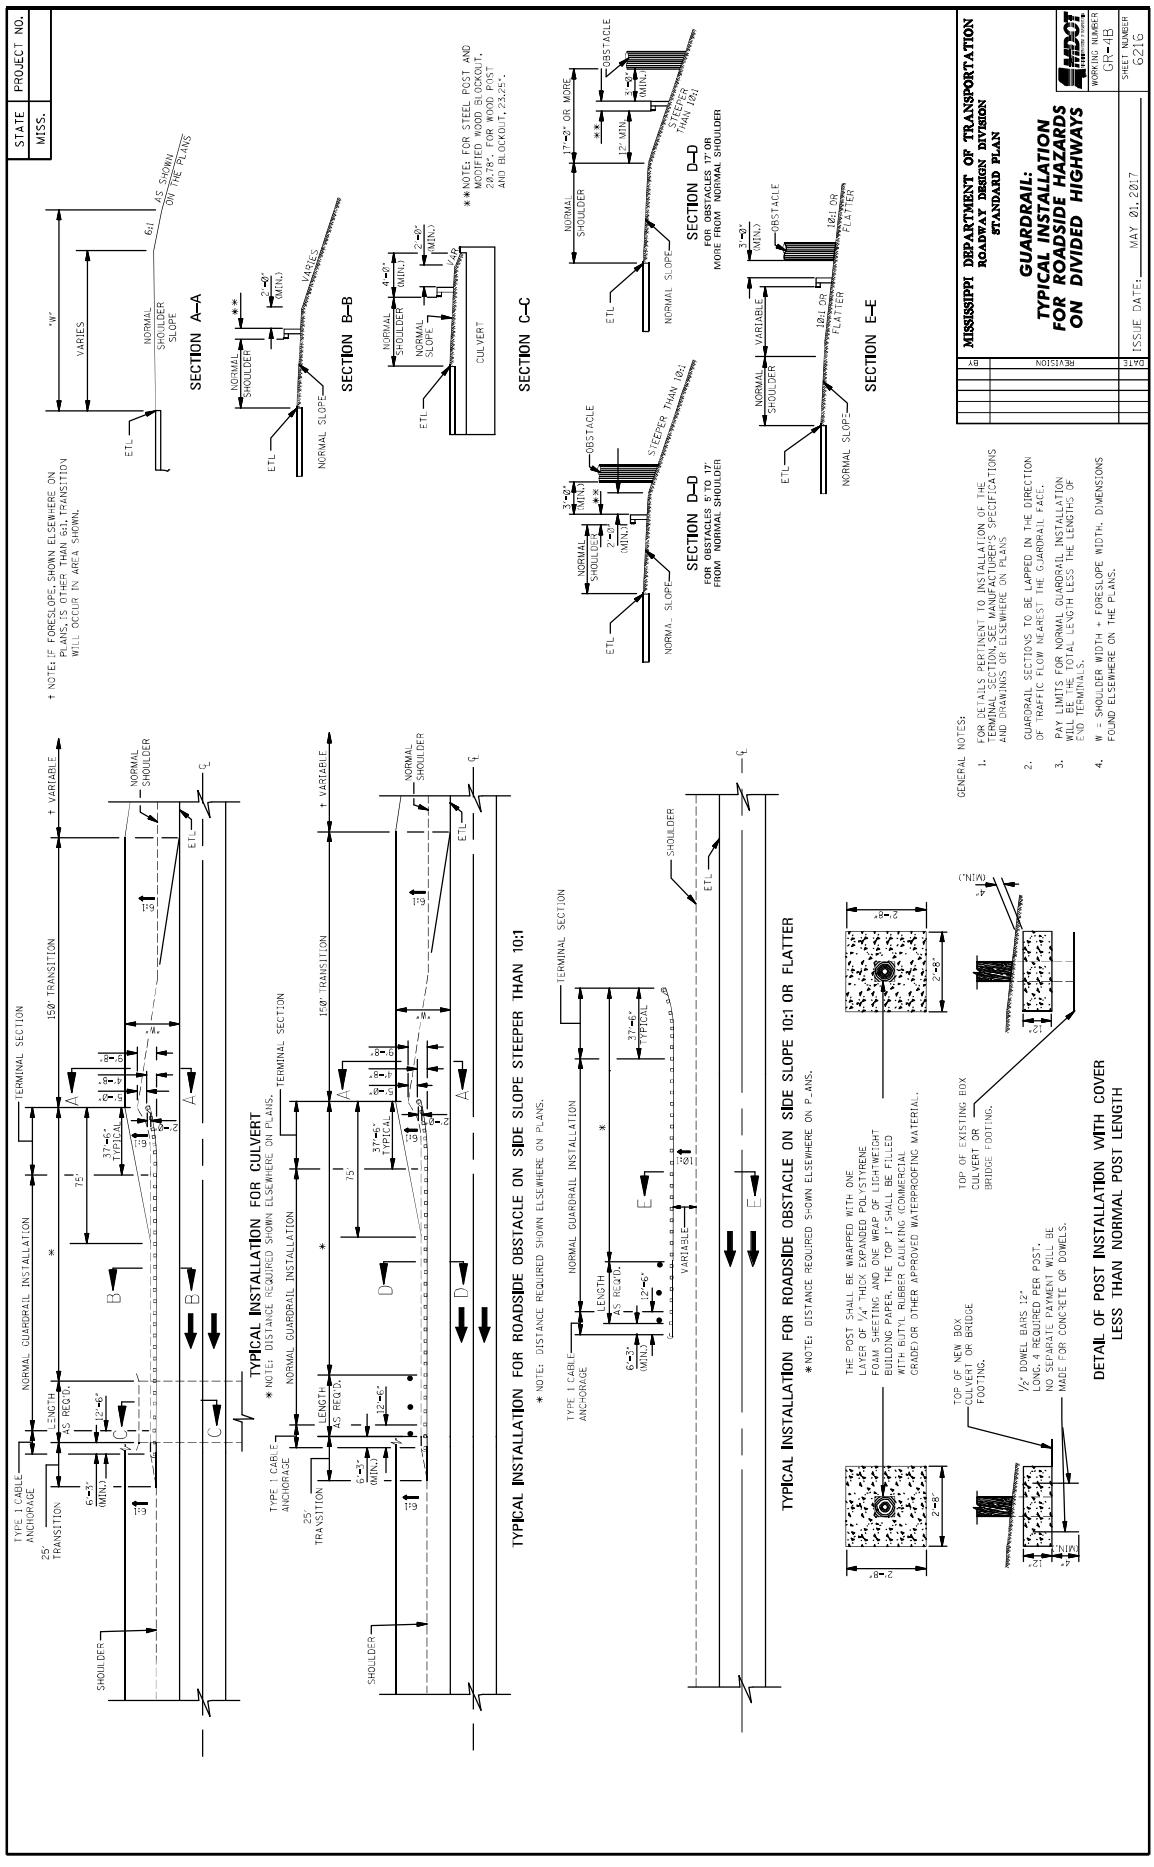

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
GUARDRAIL:
BRIDGE END SECTION
TYPE "1"
(STEEL POSTS)
(NEW CONSTRUCTION)
WORKING NUMBER GR-2C
SHEET NUMBER 6211
ISSUE DATE: AUGUST 01, 2017
REVISION
BY
DATE
STANDARD "W" BEAM GUARDRAIL INSTALLATION (SEE SHEET GR-1B)
PAY LIMITS FOR TYPE "1" BRIDGE END SECTION
PLAN
ELEVATION FROM ℄ ROADWAY
NOTE: BACKUP PLATES ARE NOT USED IN THIS TRANSITION.
FASTENER DETAILS
HIGH-STRENGTH STRUCTURAL HEX NUT AND BOLT "C"
PLAIN ROUND WASHER "F"
RECTANGULAR GUARDRAIL PLATE WASHER
SECTION A–A
GENERAL NOTES:
1. THIS GUARDRAIL TRANSITION IS APPROPRIATE FOR CONNECTION TO A GUARDRAIL ANCHOR ASSEMBLY CAST INTO A VERTICAL CONCRETE SHAPE, AS SHOWN ON SHEET GR-2A. THIS GUARDRAIL TRANSITION SHALL NOT BE MOUNTED DIRECTLY TO A CONCRETE SAFETY SHAPE.
2. SEE RAILING DETAILS IN BRIDGE DRAWINGS FOR OTHER DETAILS.
3. GUARDRAIL SHALL MEET THE REQUIREMENTS OF AASHTO M 180, CLASS A, TYPE 1 UNLESS OTHERWISE DESIGNATED.
4. THE TYPE "1" TRANSITION IS USED ON BOTH LEFT AND RIGHT SIDES OF EACH BRIDGE APPROACH WITH 2-WAY TRAFFIC AND THE GUARDRAIL SECTIONS SHALL BE LAPPED IN THE DIRECTION OF APPROACHING TRAFFIC.
5. POSTS SHALL CONFORM TO AASHTO M 270/M 270 (ASTM A 709/A 709M) GRADE 250 STEEL UNLESS CORROSION RESISTANT STEEL IS REQUIRED IN WHICH CASE GRADE 50W STEEL SHALL BE USED. THE STRUCTURAL W 6 X 9 DIMENSIONS ARE DESCRIBED IN ASTM A 6/A 6M. ALL STEEL SHALL BE HOT-DIP GALVANIZED COATED PER AASHTO M 111/ASTM A 123 AFTER CUTTING, DRILLING OR PUNCHING. CORROSION RESISTANT STEEL SHOULD NOT BE ZINC COATED, PAINTED OR OTHERWISE TREATED. GUARDRAIL IS EXEMPT FROM THE FRACTURE-CRITICAL TOUGHNESS IN AASHTO M 270/A 270 W.
6. FOR FASTENER DETAILS NOT FOUND ON THIS SHEET, SEE SHEET GR-1B.
7. DETAILS PERTINENT TO THE STANDARD INSTALLATION OF "W" AND THRIE-BEAM SECTIONS NOT SPECIFICALLY MODIFIED ON THIS SHEET WILL BE FOUND ON SHEETS GR-1B AND GR-1C, RESPECTIVELY.
8. FOR OTHER DETAILS OF POSTS, POST ACCESSORIES, FASTENERS & RAIL ELEMENTS, SEE AASHTO-AGC-ARTBA JOINT TASK FORCE NO.13 GUIDE TITLED "A GUIDE TO STANDARDIZED HIGHWAY BARRIER HARDWARE", LATEST EDITION.
9. ALL WOOD BLOCKOUTS SHALL BE TREATED TIMBER IN ACCORDANCE WITH MISSISSIPPI DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS..
10. FOR DETAIL OF NOTCH IN MODIFIED WOOD BLOCKOUTS, SEE SHEET GR-1B.
THRIE-BEAM TERMINAL CONNECTOR
NOTES:
1. THE THRIE-BEAM TERMINAL CONNECTOR SHALL BE AASHTO M 180 CORRUGATED SHEET STEEL, CLASS B, TYPE I.
2. ALTERNATIVELY, THE SPLICE SLOTS CAN BE ORIENTED PARALLEL TO THE LONGITUDINAL AXIS OF THE TERMINAL CONNECTOR. HOWEVER, THE 50° SLOT VERSION IS EASIER TO INSTALL WHERE SEVERAL GUARDRAIL SECTIONS ARE NESTED TOGETHER.
GUARDRAIL SPLICE DETAIL (POST 7)
DETAILS OF THRIE-BEAM POST AND BLOCKOUT (POST 1 THRU POST 6)
NOTES:
1. HOLE DETAILS ARE REQUIRED FOR POSTS AND BLOCKOUTS 1 THRU 8.
2. STEEL POSTS ARE FABRICATED FROM W6 X 9 STRUCTURAL STEEL SHAPES.
3. ALL HOLES IN BOTH POSTS AND BLOCKOUTS ARE ¾" IN DIAMETER.

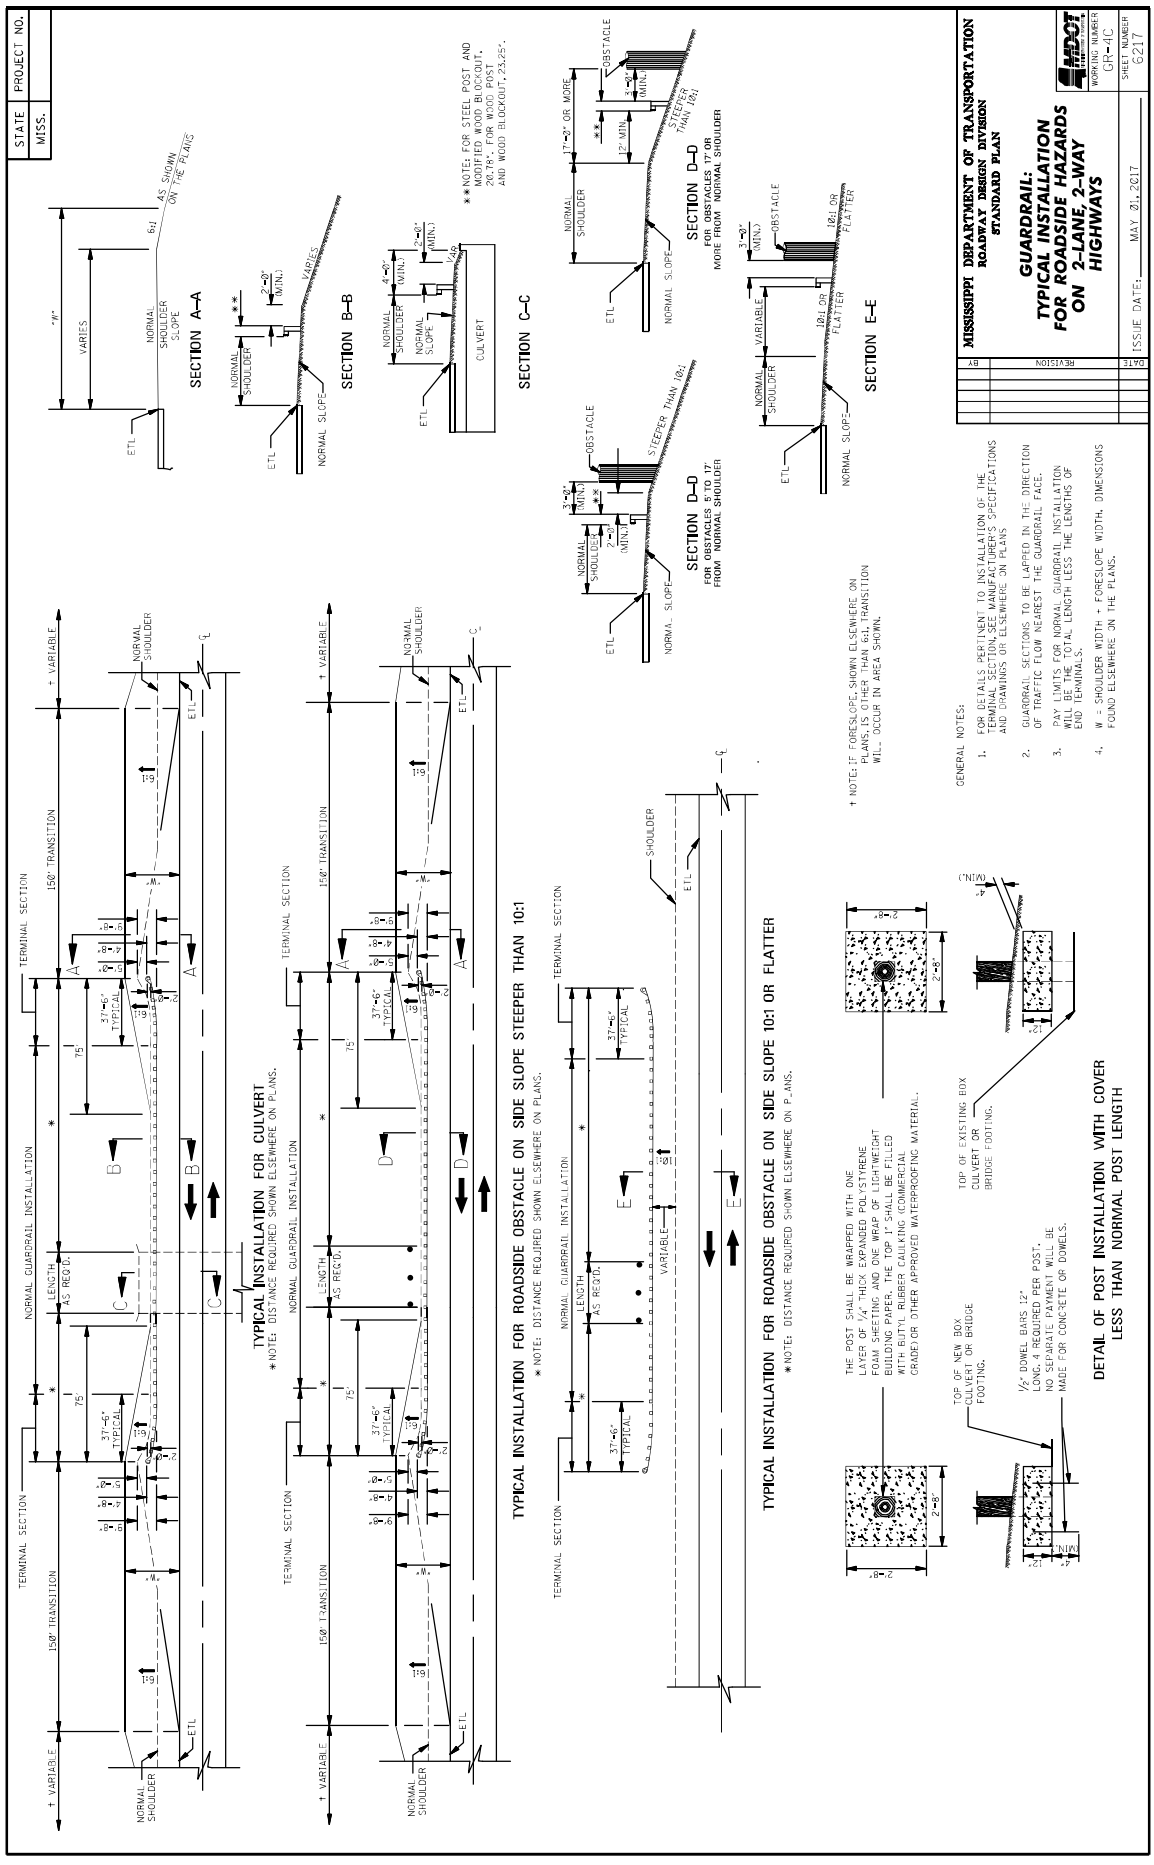

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
GUARDRAIL:
TYPE 1 CABLE ANCHORAGE
(FOUNDATION TUBE)
WORKING NUMBER GR-3
SHEET NUMBER 6212
ISSUE DATE: AUGUST 01, 2017
BY REVISION DATE
ROUNDED "W" BEAM END SECTION
NOTE: THE CROSS-SECTIONAL DIMENSIONS FOR THIS PART ARE TO FIT OVER THE STANDARD "W" BEAM SECTION.
GENERAL NOTES:
1. THIS ANCHORAGE MAY ONLY BE USED ON THE TRAILING END OF A BARRIER WHICH IS NOT EXPOSED TO VEHICULAR IMPACT.
2. GUARDRAIL SHALL MEET THE REQUIREMENTS OF AASHTO M 180, CLASS A, TYPE 1 UNLESS OTHERWISE DESIGNATED.
3. ALL WOOD POSTS AND BLOCKOUTS SHALL BE TREATED TIMBER IN ACCORDANCE WITH MISSISSIPPI DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS.
4. FOR DETAILS OF HARDWARE AND COMPONENTS NOT FOUND ON THIS SHEET, SEE SHEET GR-HW.
5. DETAILS PERTINENT TO THE STANDARD INSTALLATION OF "W" BEAM SECTIONS WILL BE FOUND ON SHEET GR-1, FOR WOOD POSTS, AND GR-1B, FOR STEEL POSTS.
6. FOR OTHER DETAILS OF POSTS, POST ACCESSORIES, FASTENERS AND RAIL ELEMENTS, SEE AASHTO-AGC-ARTBA JOINT TASK FOR NO. 13, TITLED "A GUIDE TO STANDARDIZED HIGHWAY BARRIER HARDWARE," LATEST EDITION.
NOTE: THE "POST 2" ASSEMBLY DEPENDS ON WHETHER THE TRAILING END TERMINAL IS ATTACHED TO THE STANDARD WOOD OR STEEL POST "W" BEAM GUARDRAIL INSTALLATION AS FOLLOWS:
1. WOOD POST INSTALLATION (SHOWN)
"W" BEAM TERMINAL RAIL SECTION, 6" X 12" WOOD BLOCKOUT, 14" LONG, AND 6' X 8" WOOD POST, 6'-0" LONG, ATTACHED WITH GUARDRAIL BOLT "D" AND RECESSED NUT. INSTALL RECESSED NUT UNDER GUARDRAIL AS ASSEMBLED. INSTALL ROUND WASHER "F" UNDER HEAD AND PLAIN ROUND WASHER "F" UNDER RECESSED NUT.
2. STEEL POST INSTALLATION
"W" BEAM TERMINAL RAIL SECTION, 6" X 12" MODIFIED WOOD BLOCKOUT, 14" LONG, AND W6 X 9 STEEL POST, 6'-0" LONG, ATTACHED WITH GUARDRAIL BOLT "C" AND RECESSED NUT. INSTALL RECTANGULAR GUARDRAIL PLATE WASHER UNDER GUARDRAIL BOLT HEAD.
3" (MIN.)
6 1/4" R
30°
7/8" X 1 1/4" SLOT FOR GUARDRAIL BOLT "A" (TYP.)
.91
12 1/4"
8 1/2"
7 1/2" (VARIES)
2"
POST 1
POST 2
PLAN
"W" BEAM TERMINAL END SECTION
CABLE ANCHOR ASSEMBLY
GUARDRAIL ANCHOR BRACKET
24" X 18" STEEL FOUNDATION TUBE SOIL PLATE, 1/4" THICK
ROUNDED "W" BEAM END SECTION
6'-3"
6'-3" TO NEXT POST
(STANDARD WOOD OR STEEL POST "W" BEAM GUARDRAIL INSTALLATION)
GALVANIZED STEEL 16d COMMON NAIL (DRIVE NAIL AT CENTER OF POST AND BLOCKOUT AFTER POST IS INSTALLED)
HEX NUT AND BOLT "F", 1/2" LONG (TYP.) EIGHT (8) REQUIRED
"W" BEAM TERMINAL RAIL SECTION
CABLE ANCHOR ASSEMBLY
5'-0"
14 1/4"
SEE DETAIL A
SEE DETAIL B
25"
5 1/2" X 7 1/2" WOOD TERMINAL POST, 46 1/2" LONG
GUARDRAIL BOLT "A" AND RECESSED NUT (TYP.), FOUR (4) REQUIRED.
TS8" X 6' X 3/16" FOUNDATION TUBE, 5'-0" LONG
GUARDRAIL BOLT (10") WITH RECTANGULAR GUARDRAIL PLATE WASHER UNDER HEAD AND PLAIN ROUND WASHER "F" UNDER RECESSED NUT
ELEVATION FROM BEHIND GUARDRAIL
NOTE: ANCHOR CABLE SHALL BE TAUT.
5 1/2" X 7 1/2" WOOD TERMINAL POST, 46 1/2" LONG
HEX NUT AND BOLT "F", 8" LONG, WITH PLAIN ROUND WASHER "F" UNDER HEAD AND NUT
24" X 18" STEEL FOUNDATION TUBE SOIL PLATE, 1/4" THICK
TS8" X 6' X 3/16" FOUNDATION TUBE, 5'-0" LONG
DETAIL B
CABLE ANCHOR ASSEMBLY
5 1/2" X 7 1/2" WOOD TERMINAL POST, 46 1/2" LONG
3" (MAX.)
2" (NOM.)
HEX NUT AND BOLT "F", 10" LONG, WITH PLAIN ROUND WASHER "F" UNDER HEAD AND NUT
POST SLEEVE
8" X 8" STEEL BEARING PLATE, 3/8" THICK
TS8" X 6' X 3/16" FOUNDATION TUBE, 5'-0" LONG
2 1/2"
4"
DETAIL A

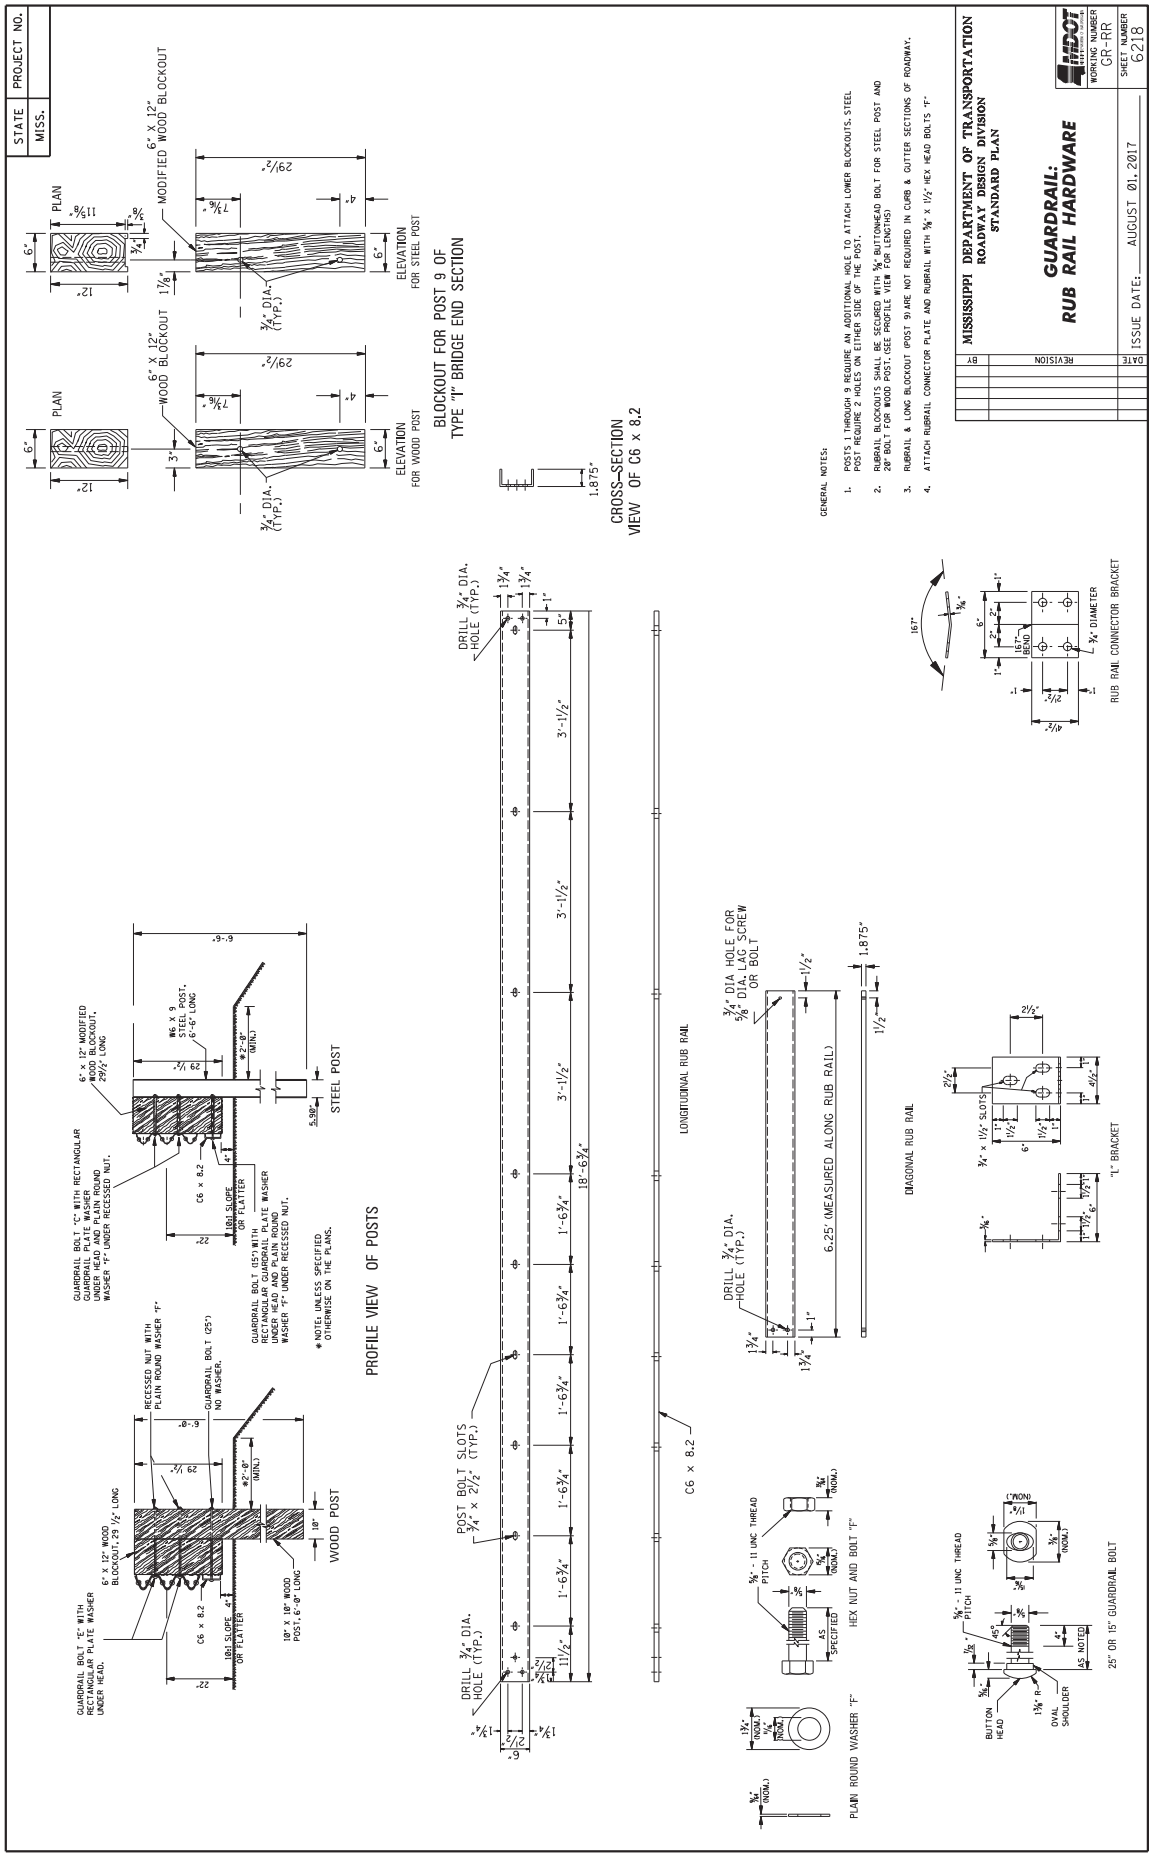

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
GUARDRAIL:
TYPE 1 CABLE ANCHORAGE
(CONCRETE FOOTING)
WORKING NUMBER GR-3A
SHEET NUMBER 6213
ISSUE DATE: AUGUST 01, 2017
DATE REVISION BY
ROUNDED "W" BEAM END SECTION
NOTE: THE CROSS-SECTIONAL DIMENSIONS FOR THIS PART ARE TO FIT OVER THE STANDARD "W" BEAM SECTION.
GENERAL NOTES:
1. THIS ANCHORAGE MAY ONLY BE USED ON THE TRAILING END OF A BARRIER WHICH IS NOT EXPOSED TO VEHICULAR IMPACT.
2. GUARDRAIL SHALL MEET THE REQUIREMENTS OF AASHTO M 180, CLASS A, TYPE 1 UNLESS OTHERWISE DESIGNATED.
3. ALL WOOD POSTS AND BLOCKOUTS SHALL BE TREATED TIMBER IN ACCORDANCE WITH MISSISSIPPI DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS.
4. CONCRETE FOR THE CONCRETE FOUNDATION MAY BE EITHER CLASS "B" STRUCTURAL CONCRETE OR AN APPROVED COMMERCIAL PRE-MIXED BAG CONCRETE. THE WELDED WIRE FABRIC FOR THE CONCRETE FOUNDATION SHALL CONFORM TO AASHTO M 221/M 221M AND AASHTO M 55M/M 55.
5. FOR DETAILS OF HARDWARE AND COMPONENTS NOT FOUND ON THIS SHEET, SEE SHEET GR-HW.
6. DETAILS PERTINENT TO THE STANDARD INSTALLATION OF "W" BEAM SECTIONS WILL BE FOUND ON SHEET GR-1, FOR WOOD POSTS, AND GR-1B, FOR STEEL POSTS.
7. FOR OTHER DETAILS OF POSTS, POST ACCESSORIES, FASTENERS AND RAIL ELEMENTS, SEE AASHTO-AGC-ARTBA JOINT TASK FOR NO. 13, TITLED "A GUIDE TO STANDARDIZED HIGHWAY BARRIER HARDWARE," LATEST EDITION.
NOTE: THE "POST 2" ASSEMBLY DEPENDS ON WHETHER THE TRAILING END TERMINAL IS ATTACHED TO THE STANDARD WOOD OR STEEL POST "W" BEAM GUARDRAIL INSTALLATION AS FOLLOWS:
1. WOOD POST INSTALLATION (SHOWN)
"W" BEAM TERMINAL RAIL SECTION, 6' X 12" WOOD BLOCKOUT, 14" LONG, AND 6' X 8" WOOD POST, 6'-0" LONG, ATTACHED WITH GUARDRAIL BOLT "D" AND RECESSED NUT. INSTALL RECTANGULAR GUARDRAIL PLATE WASHER UNDER HEAD AND PLAIN ROUND WASHER "F" UNDER RECESSED NUT.
2. STEEL POST INSTALLATION
"W" BEAM TERMINAL RAIL SECTION, 6' X 12" MODIFIED WOOD BLOCKOUT, 14" LONG, AND W6 X 9 STEEL POST, 6'-6" LONG ATTACHED WITH GUARDRAIL BOLT "C" AND RECESSED NUT. INSTALL RECTANGULAR GUARDRAIL PLATE WASHER UNDER GUARDRAIL BOLT HEAD.
"W" BEAM END SECTION
"W" BEAM TERMINAL RAIL SECTION
CABLE ANCHOR ASSEMBLY
GUARDRAIL ANCHOR BRACKET
24" DIA. CONCRETE FOUNDATION, 3'-0" DEEP
ROUNDED "W" BEAM END SECTION
POST 1
POST 2
PLAN
6'-3"
6'-3" TO NEXT POST
(STANDARD WOOD OR STEEL POST "W" BEAM GUARDRAIL INSTALLATION)
GALVANIZED STEEL 16d COMMON NAIL (DRIVE NAIL AT CENTER OF POST AND BLOCKOUT AFTER BOLT IS INSTALLED)
HEX NUT AND BOLT "F", 1½" LONG (TYP.), EIGHT (8) REQUIRED
"W" BEAM TERMINAL RAIL SECTION
GUARDRAIL ANCHOR BRACKET
CABLE ANCHOR ASSEMBLY
SEE DETAIL "A"
24" DIA. CONCRETE FOUNDATION, 3'-0" DEEP
5½" X 7½" WOOD TERMINAL POST, 5'-8" LONG
GUARDRAIL BOLT "A" AND RECESSED NUT (TYP.), FOUR (4) REQUIRED
6 X 6-W6 X W6 OR 6 X 6-D6 X D6 WELDED WIRE FABRIC
GUARDRAIL BOLT (10") WITH RECTANGULAR GUARDRAIL PLATE WASHER UNDER HEAD AND PLAIN ROUND WASHER "F" UNDER RECESSED NUT
ELEVATION FROM BEHIND GUARDRAIL
NOTE: ANCHOR CABLE SHALL BE TAUT.
SIDE
FRONT
¾" X 2¾" SLOT
2½" DIA. HOLE
WOOD TIMBER POST
NOTE: TERMINAL POST SHALL BE MADE OF S4S TIMBER WITH STRESS GRADE OF 1200 lb/in².
POLYSTYRENE SHEETING OR COMPOSITION PAPER
6 X 6-W6 X W6 OR 6 X 6-D6 X D6 WELDED WIRE FABRIC
SECTION A–A
NOTE: FORM A NOMINAL 6" X 8" SOCKET IN THE FOUNDATION TO RECEIVE THE 5½" X 7½" TIMBER POST. FORM HOLE WITH TWO LAYERS OF POLYSTYRENE SHEETING OR WRAP THE TIMBER POST IN A DOUBLE LAYER OF COMPOSITION PAPER. THE LAYER OF SHEETING OR PAPER WILL AID IN REMOVING A DAMAGED POST.
POST SLEEVE
8" X 8" STEEL BEARING PLATE, ⅝" THICK
5½" X 7½" WOOD TERMINAL POST, 5'-8" LONG
CABLE ANCHOR ASSEMBLY
POLYSTYRENE SHEETING, COMPOSITION PAPER OR SOME OTHER MATERIAL SHALL BE WRAPPED AROUND THE CONCRETE EMBEDDED PORTION OF THE POST TO AID IN REMOVING BROKEN OR DAMAGED POSTS.
6 X 6-W6 X W6 OR 6 X 6-D6 X D6 WELDED WIRE FABRIC
DETAIL A

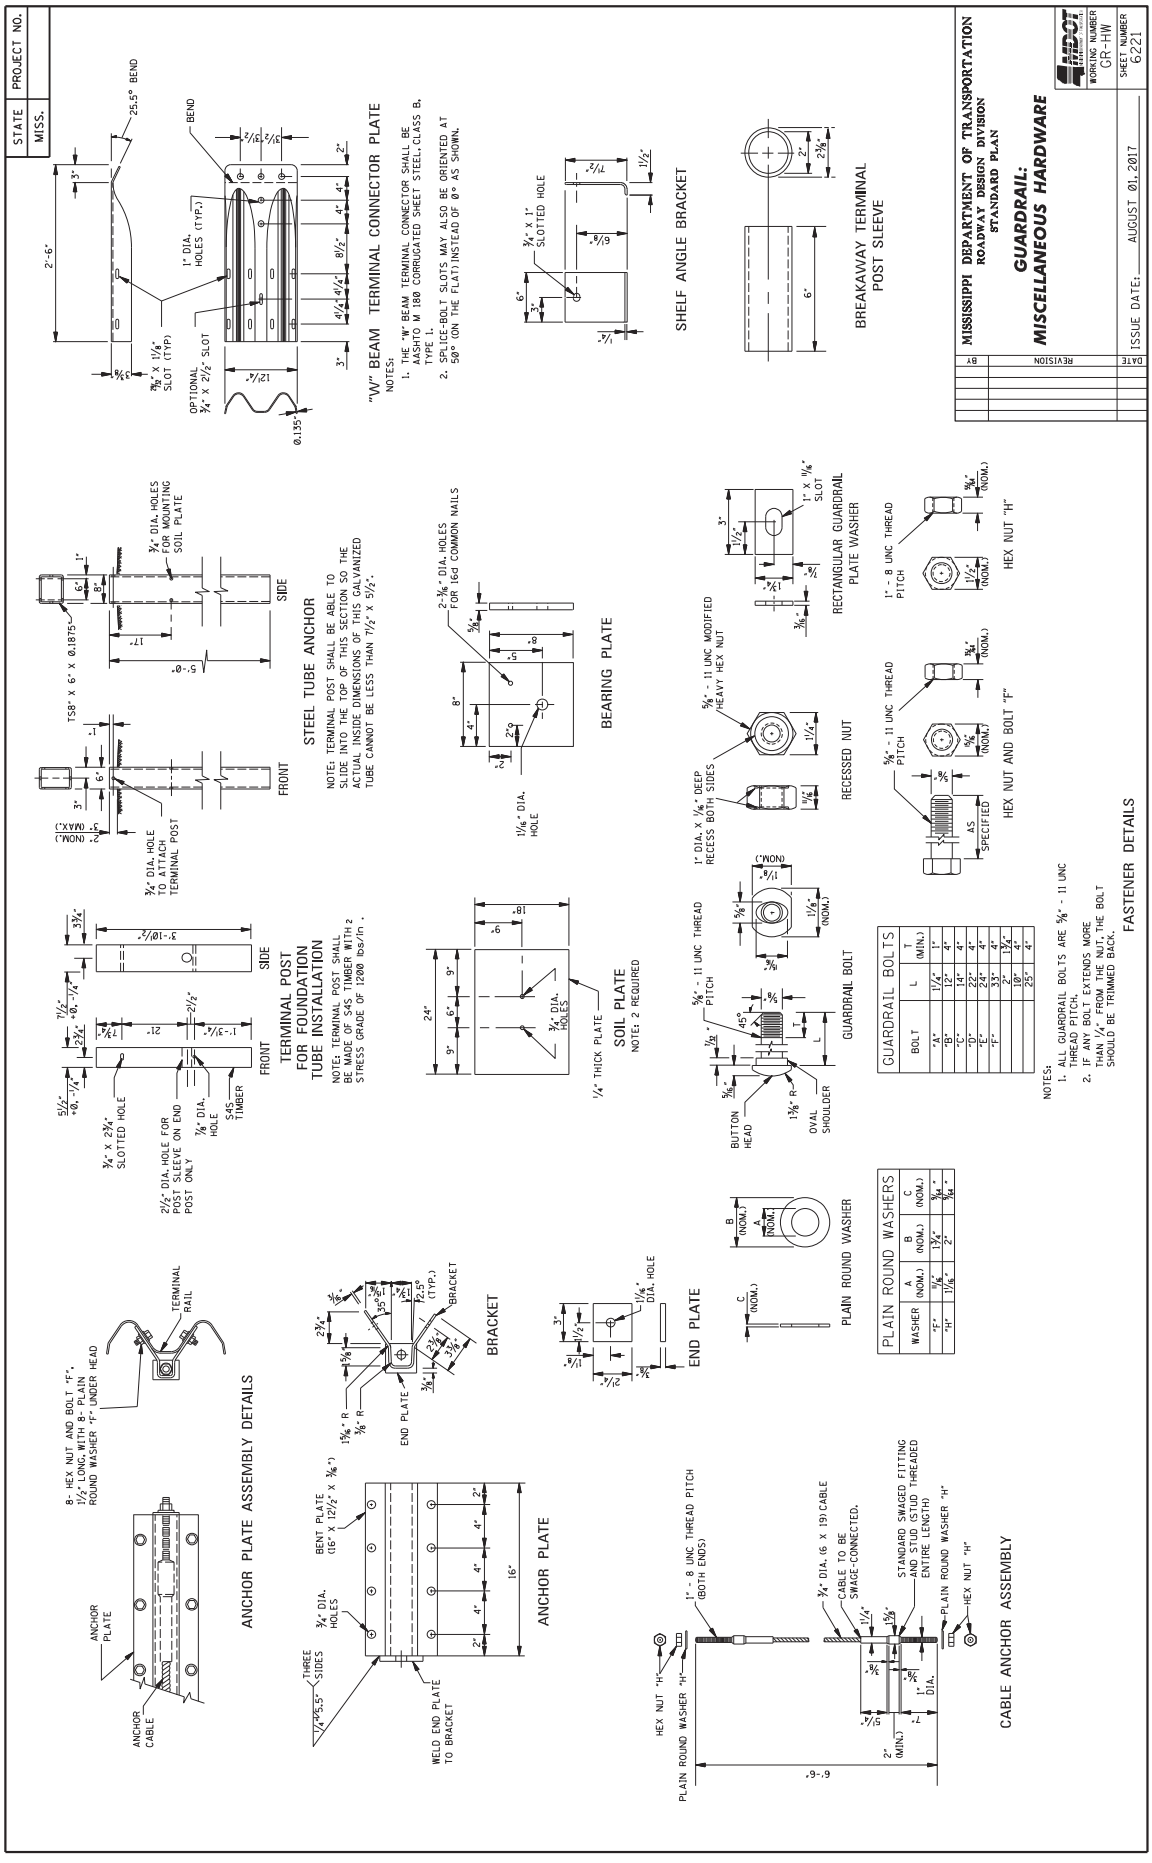

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
GUARDRAIL:
TYPICAL INSTALLATION AT BRIDGE APPROACHES FOR DIVIDED HIGHWAYS
WORKING NUMBER GR-4
SHEET NUMBER 6214
ISSUE DATE: MAY 01, 2017
DATE
REVISION
BY
** NOTE: IF FORESLOPE, SHOWN ELSEWHERE ON PLANS, IS OTHER THAN 6:1, TRANSITION WILL OCCUR IN AREA SHOWN.
SECTION A-A
SECTION B-B
GENERAL NOTES:
1. VALUES FOR "A" AND "B" WILL BE SHOWN ELSEWHERE ON THE PLANS.
2. FOR DETAILS PERTINENT TO INSTALLATION OF THE TERMINAL SECTION, SEE MANUFACTURER'S SPECIFICATIONS AND DRAWINGS OR ELSEWHERE ON PLANS
3. GUARDRAIL SECTIONS ARE TO BE LAPPED IN THE DIRECTION OF TRAFFIC FLOW NEAREST THE GUARDRAIL FACE.
4. THE OVERALL LENGTH OF GUARDRAIL IS MEASURED FROM THE CONNECTING END ON THE BRIDGE.
5. IN THE ABSENCE OF A BRIDGE END PAVEMENT RAIL CONNECT THE BRIDGE END SECTION TO THE BRIDGE RAIL SECTION WITH TWO (2) 12'-6" THRU GR-2(S). THE SHOULDER WIDTH AT THE BRIDGE END PAVEMENT RAIL OR BRIDGE END RAIL SHALL BE SUFFICIENTLY WIDE TO PROVIDE A MINIMUM OF 2'-0" BEHIND THE BACK OF POST BEFORE THE SLOPE BREAK (HINGEPOINT).
6. TYPE DETAILS AND LIMITS OF GUARDRAIL BRIDGE END SECTION WILL BE SHOWN ELSEWHERE ON THE PLANS.
7. "W" = SHOULDER WIDTH + FORESLOPE WIDTH. DIMENSIONS FOUND ELSEWHERE ON THE PLANS.
8. FOR DIVIDED HIGHWAYS WITH THREE (3) OR MORE LANES IN ONE DIRECTION, THE MEDIAN BARRIER MAY REQUIRE A TAPER RATE OTHER THAN 25:1.
VARIES
NORMAL SHOULDER SLOPE
AS SHOWN ON PLANS
ETL
"W"
** VARIABLE
150' MINIMUM TRANSITION
NORMAL SHOULDER
NORMAL GUARDRAIL INSTALLATION
TERMINAL SECTION
30:1 TAPER
25:1 TAPER
GUARDRAIL FACE ALINEMENT ON BRIDGE
20:1 SLOPE RELATIVE TO LONGITUDINAL GRADIENT FOR HIGHWAY CENTERLINE
MEDIAN BARRIER TERMINAL AS SHOWN ELSEWHERE ON PLANS
DOUBLE-FACED GUARDRAIL
TYPE 1 END SECTION
BRIDGE END PAVEMENT
BRIDGE
BRIDGE END PAVT RAIL
SEE NOTE 5
DIVIDED HIGHWAY WITH BARRIER INSIDE CLEAR ZONE OF OPPOSING TRAFFIC
* NOTE: THE 25* LINE IS USED TO DETERMINE THE LIMITS OF MEDIAN BARRIER AS SHOWN.
DIVIDED HIGHWAY WITH BARRIER OUTSIDE CLEAR ZONE OF OPPOSING TRAFFIC


STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
GUARDRAIL:
TYPICAL INSTALLATION
AT BRIDGE APPROACHES
FOR 2-LANE 2-WAY
HIGHWAY
WORKING NUMBER GR-4A
SHEET NUMBER 6215
ISSUE DATE: MAY 01, 2017
BY REVISION DATE
* NOTE: IF FORESLOPE SHOWN ELSEWHERE ON PLANS, IS OTHER THAN 6:1, TRANSITION WILL OCCUR IN AREA SHOWN.
DETAIL OF GUARDRAIL SECTION LAPS
GENERAL NOTES:
1. VALUES FOR "A", "B", "C" AND "D" WILL BE SHOWN ELSEWHERE ON THE PLANS.
2. FOR DETAILS PERTINENT TO INSTALLATION OF THE TERMINAL SECTION, SEE MANUFACTURER'S SPECIFICATIONS AND DRAWINGS OR ELSEWHERE ON PLANS
3. GUARDRAIL SECTIONS ARE TO BE LAPPED IN THE DIRECTION OF TRAFFIC APPROACHING THE BRIDGE.
4. THE OVERALL LENGTH OF GUARDRAIL IS MEASURED FROM THE CONNECTING END ON THE BRIDGE.
5. IN THE ABSENCE OF A BRIDGE END PAVEMENT RAIL, CONNECT THE BRIDGE END SECTION TO THE BRIDGE RAIL (SEE WM-405.01-02 THRU WM-405.01-04). THE SHOULDER WIDTH AT THE BRIDGE END PROVIDED FOR BRIDGE END RAIL SHALL BE SUFFICIENT WIDTH TO PROVIDE A MINIMUM OF 2'-0" BEHIND THE BACK OF POST BEFORE THE SLOPE BREAK (HINGEPOINT).
6. TYPE DETAILS AND LIMITS OF GUARDRAIL BRIDGE END SECTION WILL BE SHOWN ELSEWHERE ON THE PLANS.
7. W = SHOULDER WIDTH + FORESLOPE WIDTH. DIMENSIONS FOUND ELSEWHERE ON THE PLANS.
PLAN
SECTION A-A
SECTION B-B
NORMAL GUARDRAIL INSTALLATION
TERMINAL SECTION
BRIDGE END SECTION
TANGENT
GUARDRAIL FACE ALINEMENT ON BRIDGE
BRIDGE END PAVEMENT
BRIDGE
BRIDGE END PAVT RAIL
SEE NOTE 5
150' MINIMUM TRANSITION
* VARIABLE
NORMAL SHOULDER
ETL
20:1 SLOPE RELATIVE TO LONGITUDINAL GRADIENT FOR HIGHWAY CENTERLINE
30:1 TAPER
37'-6" TYPICAL
75'
25'-0"
12'-0"
18'-1¾"
"A"
"B"
"C"
"D"
"W"
VARIES
NORMAL SHOULDER SLOPE
2'-0"
3:1
6:1
AS SHOWN ON THE PLANS


STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
GUARDRAIL:
TYPICAL INSTALLATION
FOR ROADSIDE HAZARDS
ON DIVIDED HIGHWAYS
WORKING NUMBER GR-4B
SHEET NUMBER 6216
ISSUE DATE: MAY 01, 2017
DATE
REVISION
BY
† NOTE: IF FORESLOPE, SHOWN ELSEWHERE ON PLANS, IS OTHER THAN 6:1, TRANSITION WILL OCCUR IN AREA SHOWN.
SECTION A–A
SECTION B–B
SECTION C–C
SECTION D–D
FOR OBSTACLES 5' TO 17' FROM NORMAL SHOULDER
SECTION D–D
FOR OBSTACLES 17' OR MORE FROM NORMAL SHOULDER
SECTION E–E
**NOTE: FOR STEEL POST AND MODIFIED WOOD BLOCKOUT, USE 6" x 8" WOOD POST AND BLOCKOUT, 23.25".
TYPICAL INSTALLATION FOR CULVERT
* NOTE: DISTANCE REQUIRED SHOWN ELSEWHERE ON PLANS.
TYPICAL INSTALLATION FOR ROADSIDE OBSTACLE ON SIDE SLOPE STEEPER THAN 10:1
* NOTE: DISTANCE REQUIRED SHOWN ELSEWHERE ON PLANS.
TYPICAL INSTALLATION FOR ROADSIDE OBSTACLE ON SIDE SLOPE 10:1 OR FLATTER
*NOTE: DISTANCE REQUIRED SHOWN ELSEWHERE ON PLANS.
DETAIL OF POST INSTALLATION WITH COVER
LESS THAN NORMAL POST LENGTH
GENERAL NOTES:
1. FOR DETAILS PERTINENT TO INSTALLATION OF THE TERMINAL SECTION, SEE MANUFACTURER'S SPECIFICATIONS AND DRAWINGS OR ELSEWHERE ON PLANS
2. GUARDRAIL SECTIONS TO BE LAPPED IN THE DIRECTION OF TRAFFIC FLOW NEAREST THE GUARDRAIL FACE.
3. PAY LIMITS FOR NORMAL GUARDRAIL INSTALLATION WILL BE THE TOTAL LENGTH LESS THE LENGTHS OF END TERMINALS.
4. W = SHOULDER WIDTH + FORESLOPE WIDTH. DIMENSIONS FOUND ELSEWHERE ON THE PLANS.

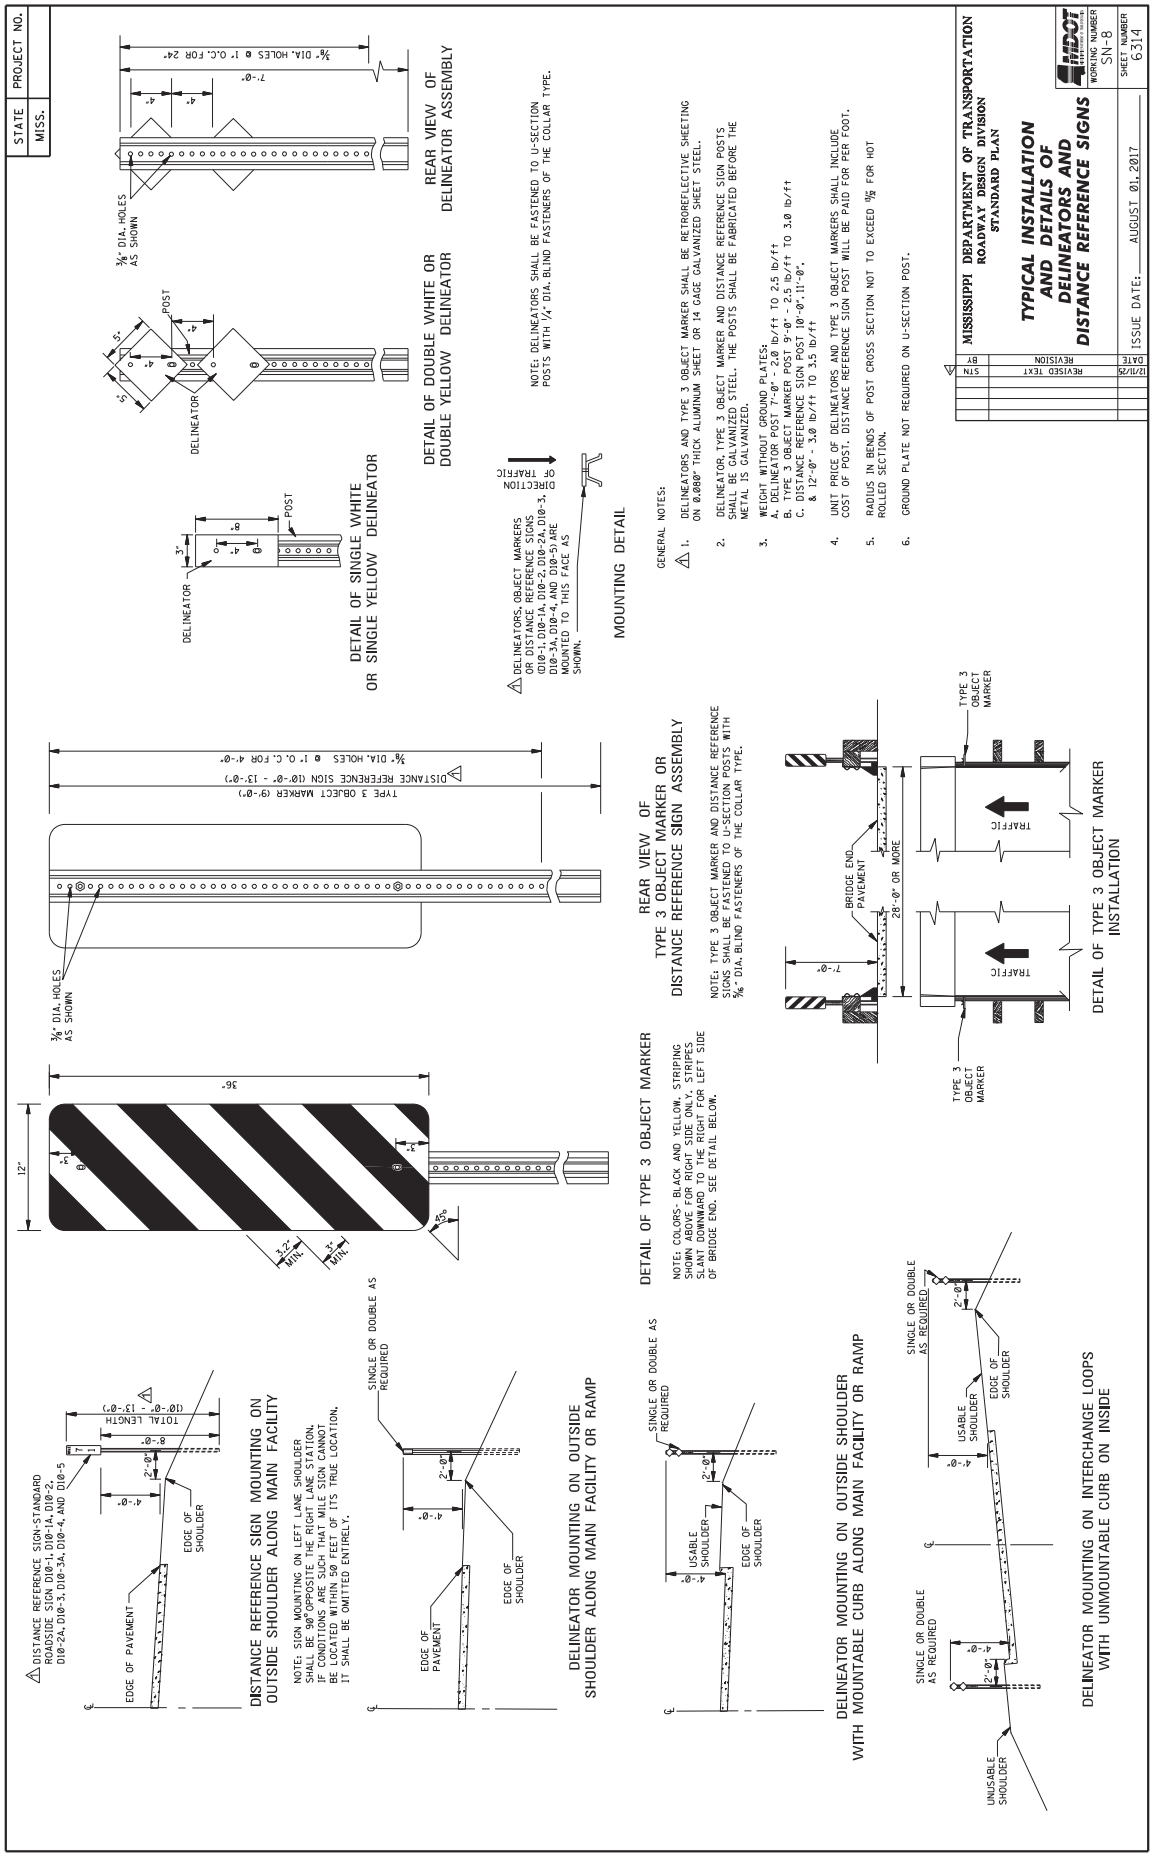

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
GUARDRAIL: TYPICAL INSTALLATION FOR ROADSIDE HAZARDS ON 2-LANE, 2-WAY HIGHWAYS
WORKING NUMBER GR-4C
SHEET NUMBER 6217
ISSUE DATE: MAY 01, 2017
DATE
REVISION
BY
SECTION A-A
SECTION B-B
SECTION C-C
SECTION D-D FOR OBSTACLES 5' TO 17' FROM NORMAL SHOULDER
SECTION D-D FOR OBSTACLES 17' OR MORE FROM NORMAL SHOULDER
SECTION E-E
** NOTE: FOR STEEL POST AND MODIFIED WOOD BLOCKOUT, USE 12" POWER POST 12.25 AND WOOD BLOCKOUT, 23.25".
TYPICAL INSTALLATION FOR CULVERT
* NOTE: DISTANCE REQUIRED SHOWN ELSEWHERE ON PLANS.
TYPICAL INSTALLATION FOR ROADSIDE OBSTACLE ON SIDE SLOPE STEEPER THAN 10:1
* NOTE: DISTANCE REQUIRED SHOWN ELSEWHERE ON PLANS.
TYPICAL INSTALLATION FOR ROADSIDE OBSTACLE ON SIDE SLOPE 10:1 OR FLATTER
* NOTE: DISTANCE REQUIRED SHOWN ELSEWHERE ON PLANS.
† NOTE: IF FORESLOPE SHOWN ELSEWHERE ON PLANS IS OTHER THAN 6:1, TRANSITION WILL OCCUR IN AREA SHOWN.
GENERAL NOTES:
1. FOR DETAILS PERTINENT TO INSTALLATION OF THE TERMINAL SECTION, SEE MANUFACTURER'S SPECIFICATIONS AND DRAWINGS OR ELSEWHERE ON PLANS
2. GUARDRAIL SECTIONS TO BE LAPPED IN THE DIRECTION OF TRAFFIC FLOW NEAREST THE GUARDRAIL FACE.
3. PAY LIMITS FOR NORMAL GUARDRAIL INSTALLATION WILL BE THE TOTAL LENGTH LESS THE LENGTHS OF END TERMINALS.
4. W = SHOULDER WIDTH + FORESLOPE WIDTH. DIMENSIONS FOUND ELSEWHERE ON THE PLANS.
THE POST SHALL BE WRAPPED WITH ONE LAYER OF 1/4" THICK EXPANDED POLYSTYRENE FOAM SHEETING AND ONE WRAP OF LIGHTWEIGHT BUILDING PAPER. THE TOP 1" SHALL BE FILLED WITH BUTYL RUBBER CAULKING (COMMERCIAL GRADE) OR OTHER APPROVED WATERPROOFING MATERIAL.
TOP OF NEW BOX CULVERT OR BRIDGE FOOTING.
TOP OF EXISTING BOX CULVERT OR BRIDGE FOOTING.
1/2" DOWEL BARS 12" LONG 4 REQUIRED PER POST. NO SPECIAL EQUIPMENT WILL BE MADE FOR CONCRETE OR DOWELS.
DETAIL OF POST INSTALLATION WITH COVER LESS THAN NORMAL POST LENGTH


STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
GUARDRAIL:
RUB RAIL HARDWARE
WORKING NUMBER GR-RR
SHEET NUMBER 6218
ISSUE DATE: AUGUST 01, 2017
BY REVISION DATE
BLOCKOUT FOR POST 9 OF TYPE "T" BRIDGE END SECTION
6" X 12" WOOD BLOCKOUT
6" X 12" MODIFIED WOOD BLOCKOUT
PLAN
ELEVATION FOR WOOD POST
ELEVATION FOR STEEL POST
CROSS-SECTION VIEW OF C6 x 8.2
GENERAL NOTES:
1. POSTS 1 THROUGH 9 REQUIRE AN ADDITIONAL HOLE TO ATTACH LOWER BLOCKOUTS. STEEL POST REQUIRE 2 HOLES ON EITHER SIDE OF THE POST.
2. RUBRAIL BLOCKOUTS SHALL BE SECURED WITH ⅝" BUTTONHEAD BOLT FOR STEEL POST AND 20" BOLT FOR WOOD POST. (SEE PROFILE VIEW FOR LENGTHS)
3. RUBRAIL & LONG BLOCKOUT (POST 9) ARE NOT REQUIRED IN CURB & GUTTER SECTIONS OF ROADWAY.
4. ATTACH RUBRAIL CONNECTOR PLATE AND RUBRAIL WITH ⅝" X 1½" HEX HEAD BOLTS "F"
PROFILE VIEW OF POSTS
GUARDRAIL BOLT "C" WITH RECTANGULAR GUARDRAIL PLATE WASHER UNDER HEAD AND PLAIN ROUND WASHER "F" UNDER RECESSED NUT.
6" X 12" MODIFIED WOOD BLOCKOUT, 29½" LONG
#6 X 9 STEEL POST, 5'-6" LONG
C6 x 8.2
10¹/₂ SLOPE OR FLATTER
GUARDRAIL BOLT (15") WITH RECTANGULAR GUARDRAIL PLATE WASHER UNDER HEAD AND PLAIN ROUND WASHER "F" UNDER RECESSED NUT.
* NOTE: UNLESS SPECIFIED OTHERWISE ON THE PLANS.
STEEL POST
RECESSED NUT WITH PLAIN ROUND WASHER "F"
GUARDRAIL BOLT (25") NO WASHER.
6" X 12" WOOD BLOCKOUT, 29½" LONG
10¹/₂ SLOPE OR FLATTER
10" X 10" WOOD POST, 6'-0" LONG
WOOD POST
POST BOLT SLOTS ¾" X 2½" (TYP.)
DRILL ¾" DIA. HOLE (TYP.)
LONGITUDINAL RUB RAIL
C6 x 8.2
¾" DIA HOLE FOR ⅝" DIA. LAG SCREW OR BOLT
DRILL ¾" DIA. HOLE (TYP.)
6.25" (MEASURED ALONG RUB RAIL)
DIAGONAL RUB RAIL
RUB RAIL CONNECTOR BRACKET
¾" DIAMETER
16° BEND
¾" X 1½" SLOTS
"L" BRACKET
⅝" - 11 UNC THREAD
HEX NUT AND BOLT "F"
PLAIN ROUND WASHER "F"
BUTTON HEAD
OVAL SHOULDER
25" OR 15" GUARDRAIL BOLT



GUARDRAIL BOLTS		
BOLT	L	T (MIN.)
"A"	1¼"	1"
"B"	12"	4"
"C"	14"	4"
"D"	22"	4"
"E"	24"	4"
"F"	3½"	4"
"G"	5"	1¾"
"H"	10"	4"
"I"	25"	4"

PLAIN ROUND WASHERS			
WASHER	A (NOM.)	B (NOM.)	C (NOM.)
"F"	¾"	1¾"	⅝"
"H"	1⅛"	2"	⅝"


STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
TYPICAL INSTALLATION AND DETAILS OF DELINEATORS AND DISTANCE REFERENCE SIGNS
WORKING NUMBER SN-8
SHEET NUMBER 6314
ISSUE DATE: AUGUST 01, 2017
REVISED TEXT
DETAIL OF DOUBLE WHITE OR DOUBLE YELLOW DELINEATOR
REAR VIEW OF DELINEATOR ASSEMBLY
DETAIL OF SINGLE WHITE OR SINGLE YELLOW DELINEATOR
MOUNTING DETAIL
GENERAL NOTES:
DETAIL OF TYPE 3 OBJECT MARKER
REAR VIEW OF TYPE 3 OBJECT MARKER OR DISTANCE REFERENCE SIGN ASSEMBLY
DETAIL OF TYPE 3 OBJECT MARKER INSTALLATION
DISTANCE REFERENCE SIGN MOUNTING ON OUTSIDE SHOULDER ALONG MAIN FACILITY
DELINEATOR MOUNTING ON OUTSIDE SHOULDER ALONG MAIN FACILITY OR RAMP
DELINEATOR MOUNTING ON OUTSIDE SHOULDER WITH MOUNTABLE CURB ALONG MAIN FACILITY OR RAMP
DELINEATOR MOUNTING ON INTERCHANGE LOOPS WITH UNMOUNTABLE CURB ON INSIDE

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SECTION 904 – NOTICE TO BIDDERS NO. 8341 **CODE: (SP)**

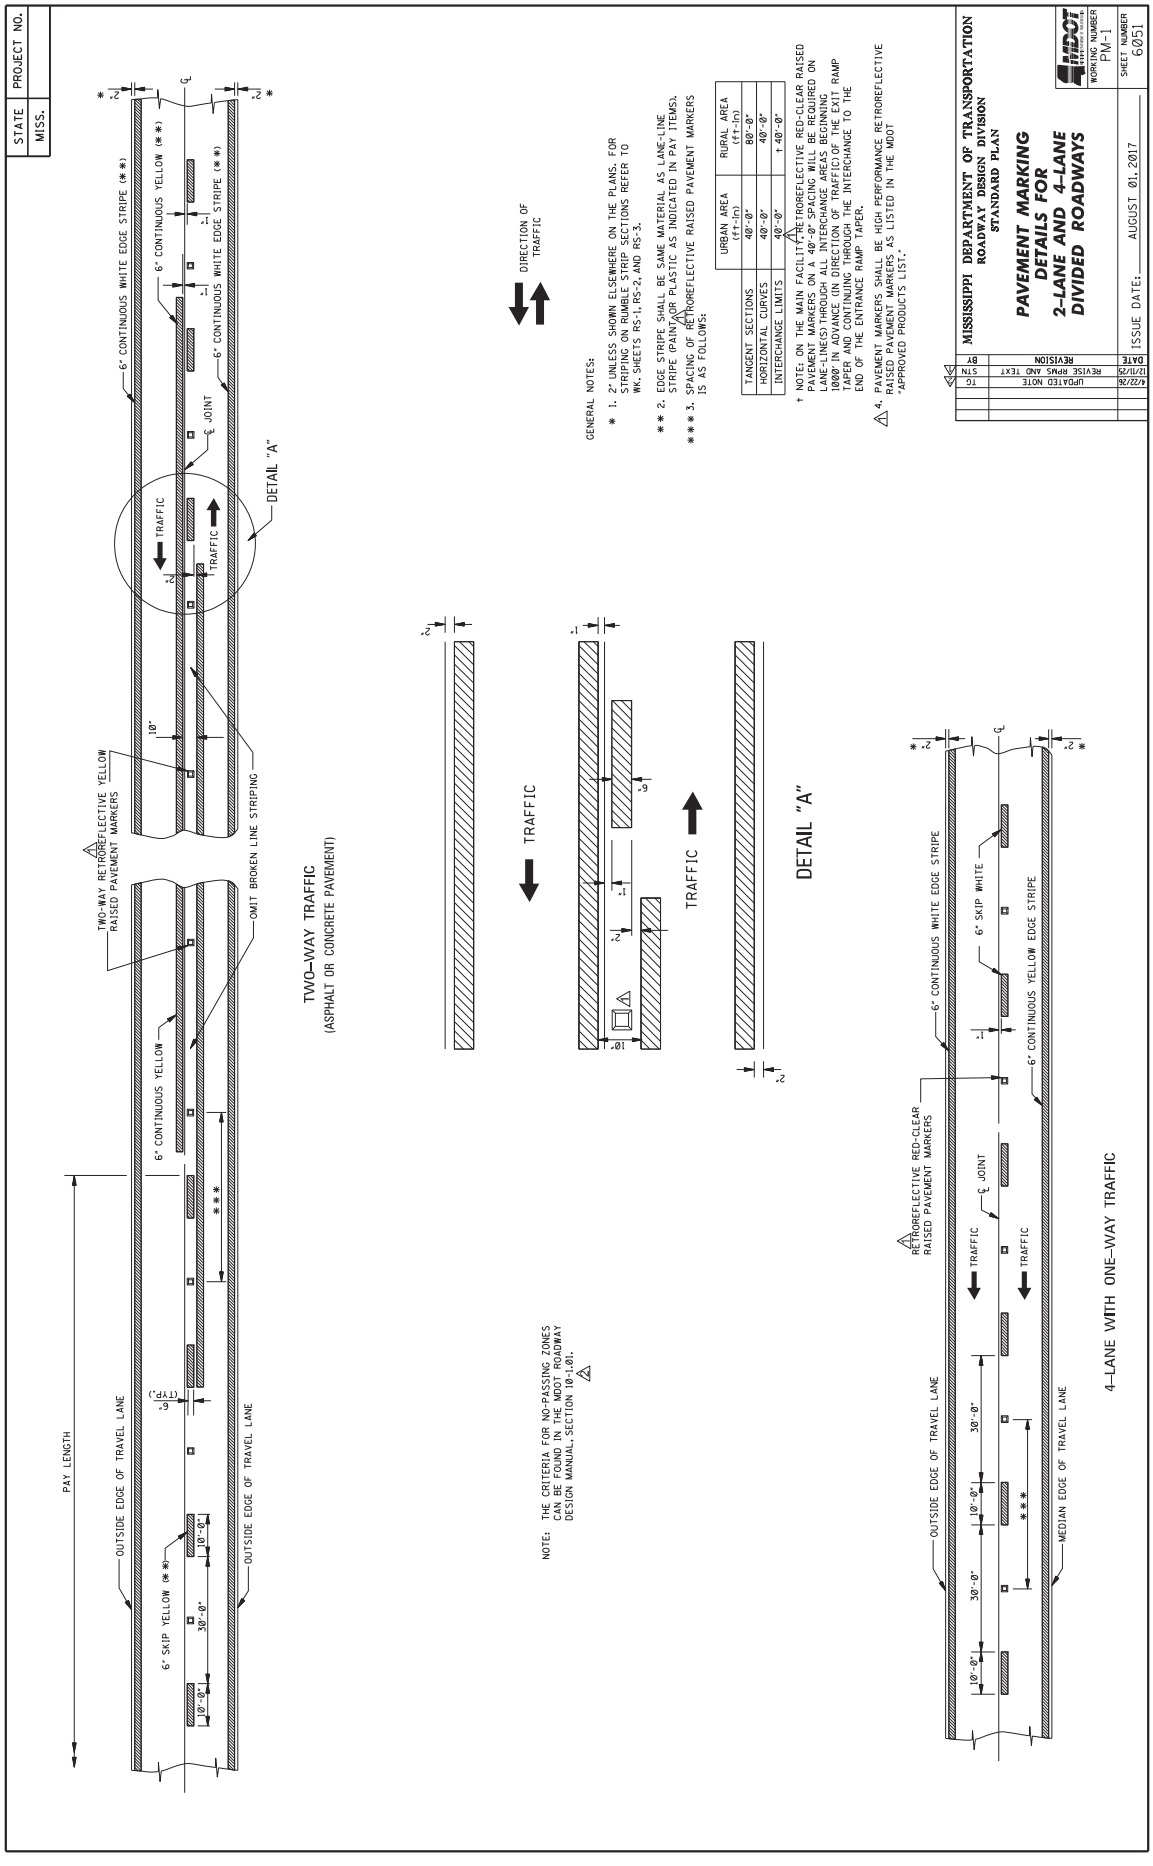
DATE: 08/27/2026

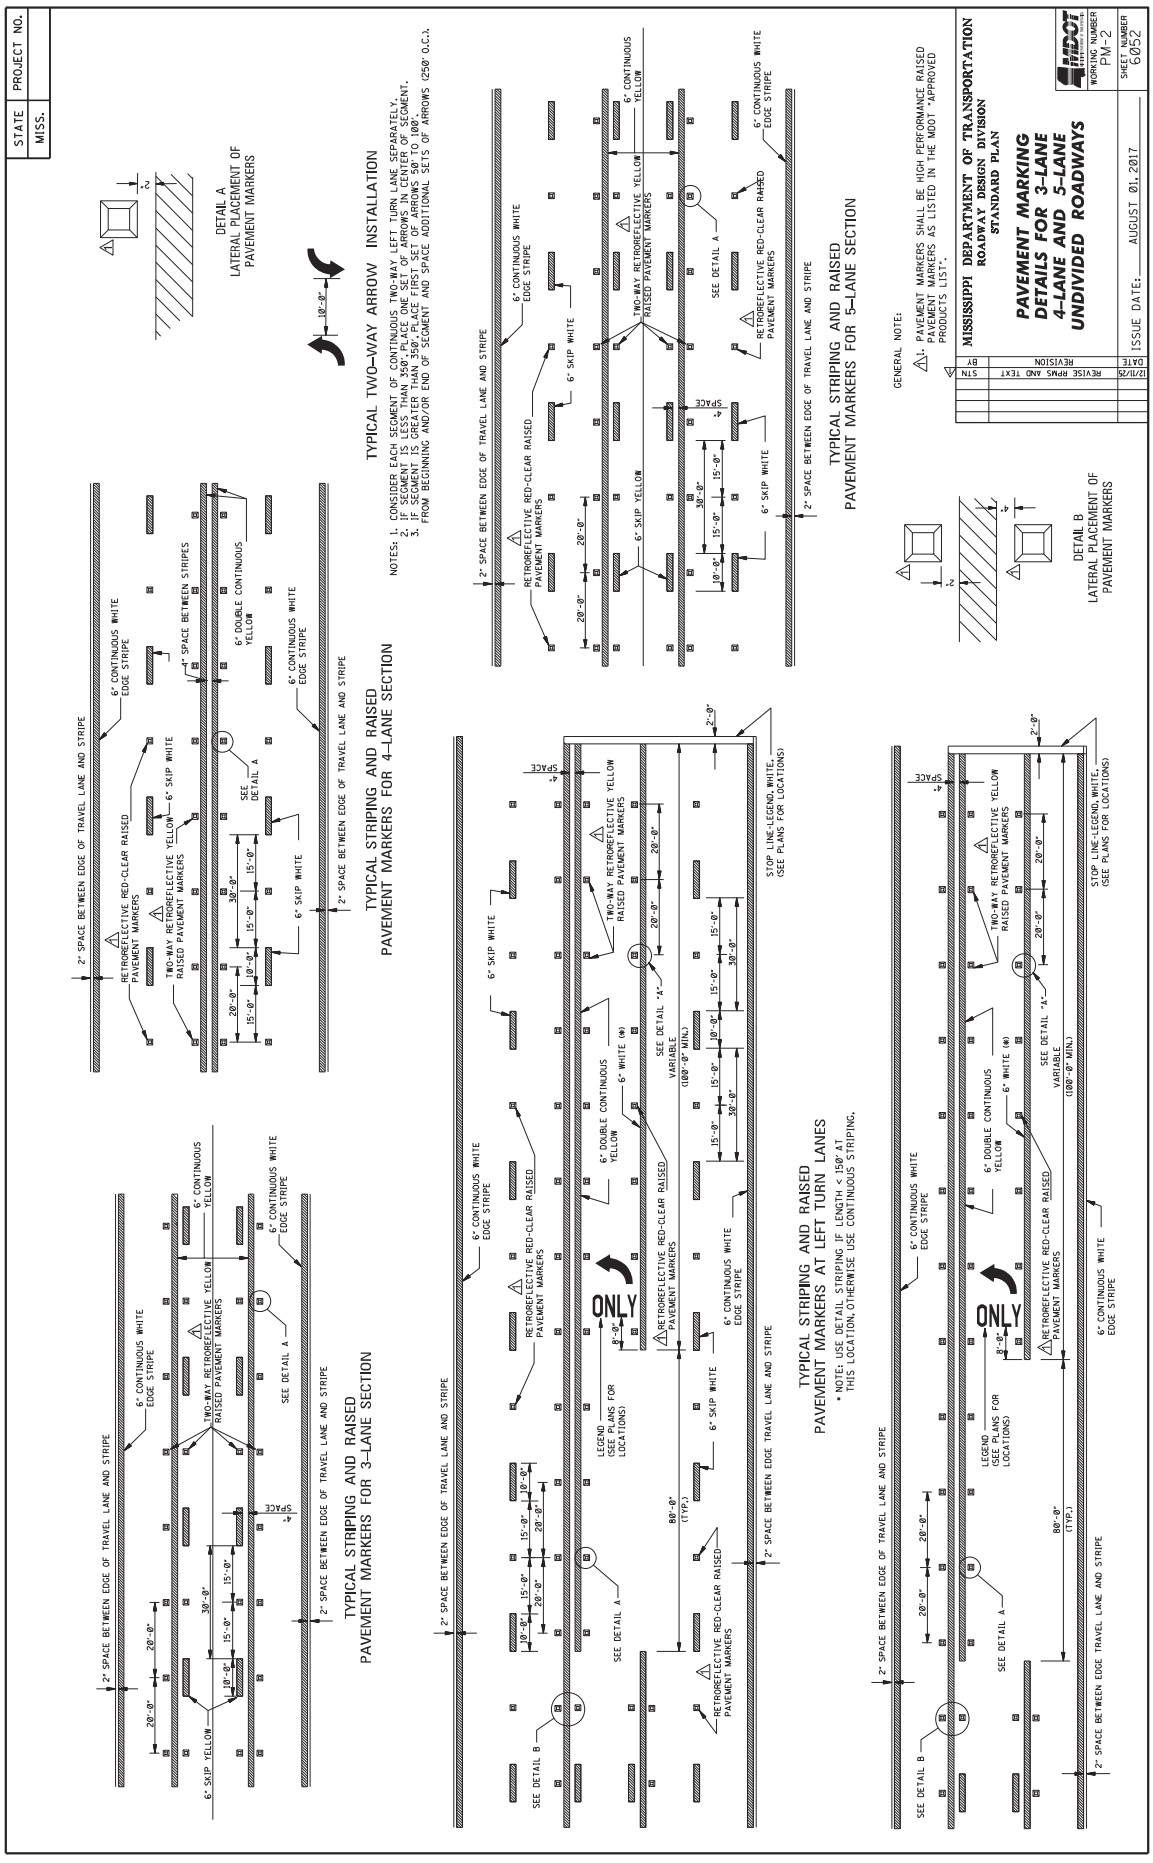
SUBJECT: Standard Drawings

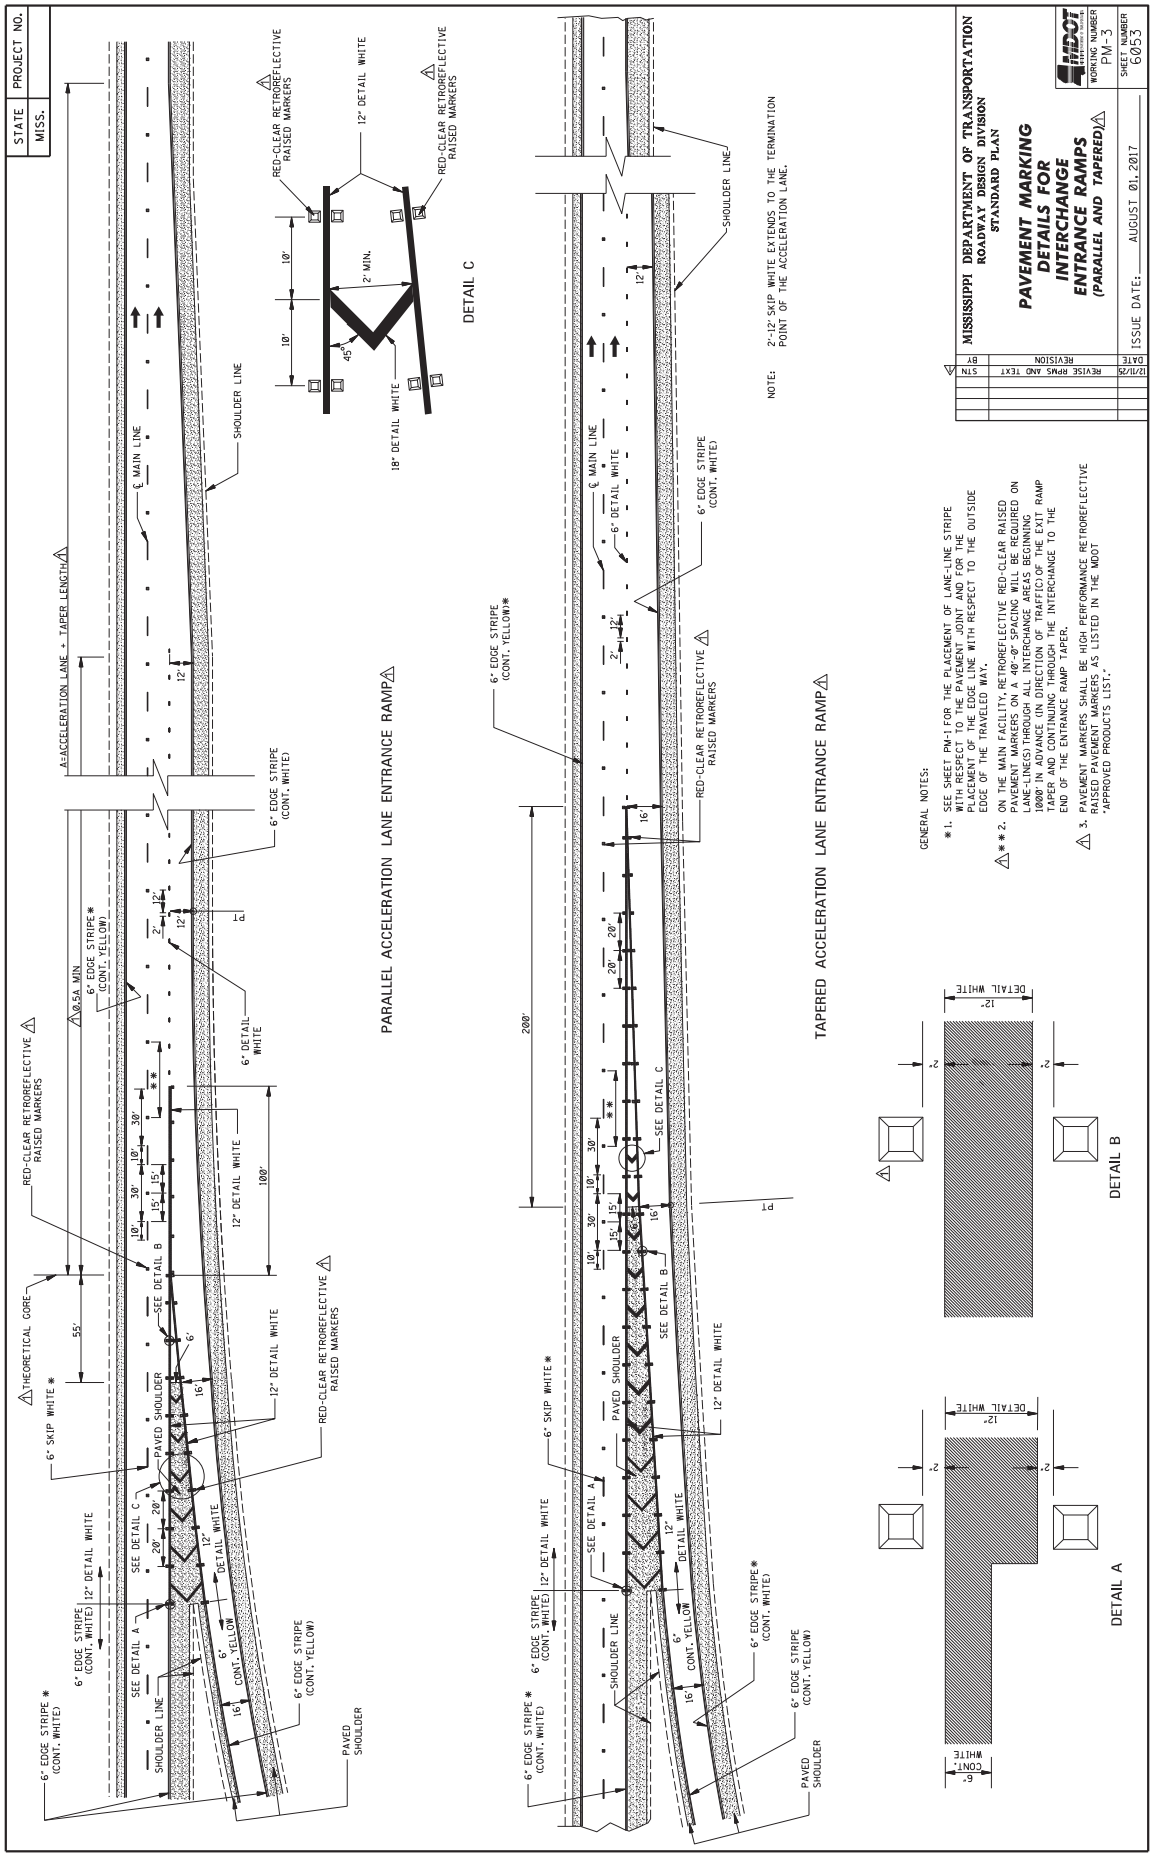
Standard Drawings attached hereto shall govern appropriate items of required work.

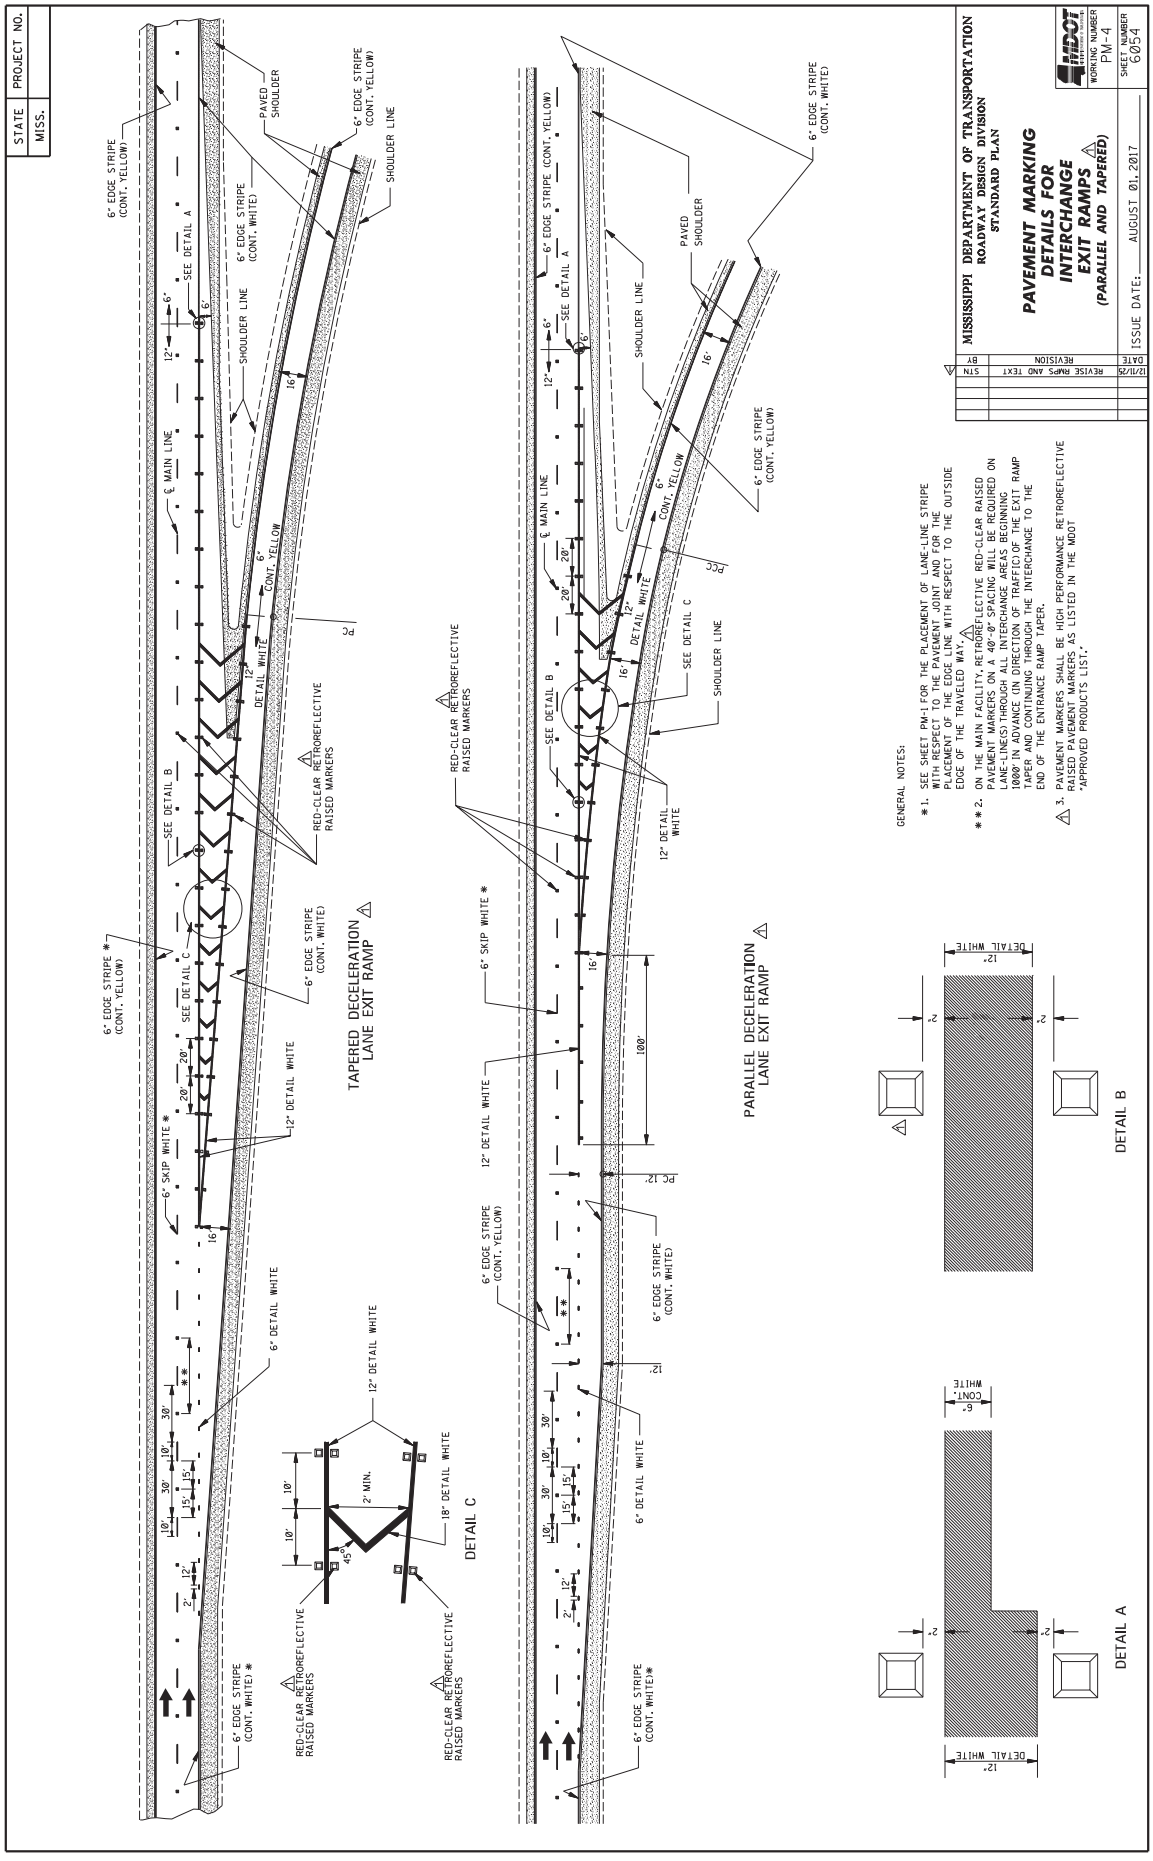
Larger copies of Standard Drawings may be purchased from:

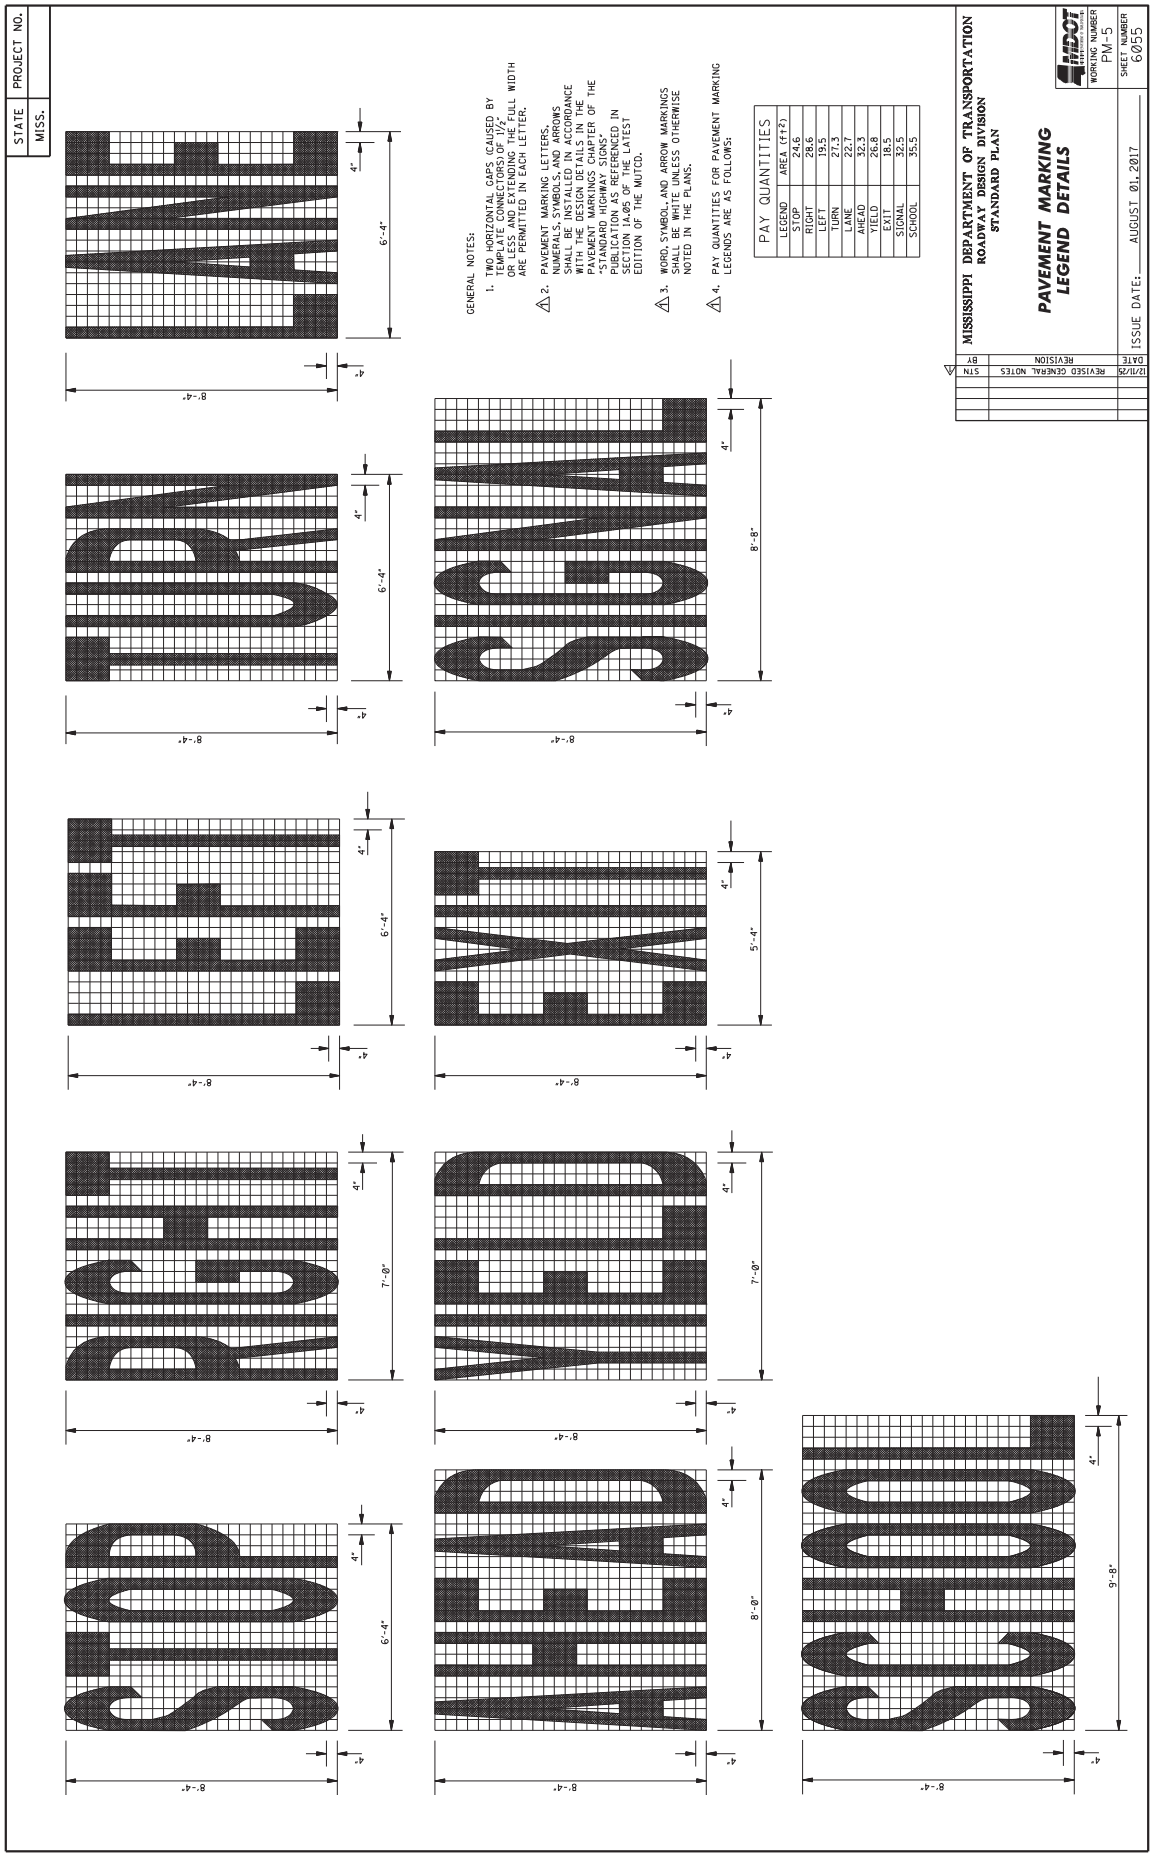
MDOT Plans Print Shop
MDOT Shop Complex, Building C, Room 114
2567 North West Street
P.O. Box 1850
Jackson, MS 39215-1850
Telephone: (601) 359-7460
or FAX: (601) 359-7461
or e-mail: plans@mdot.state.ms.us

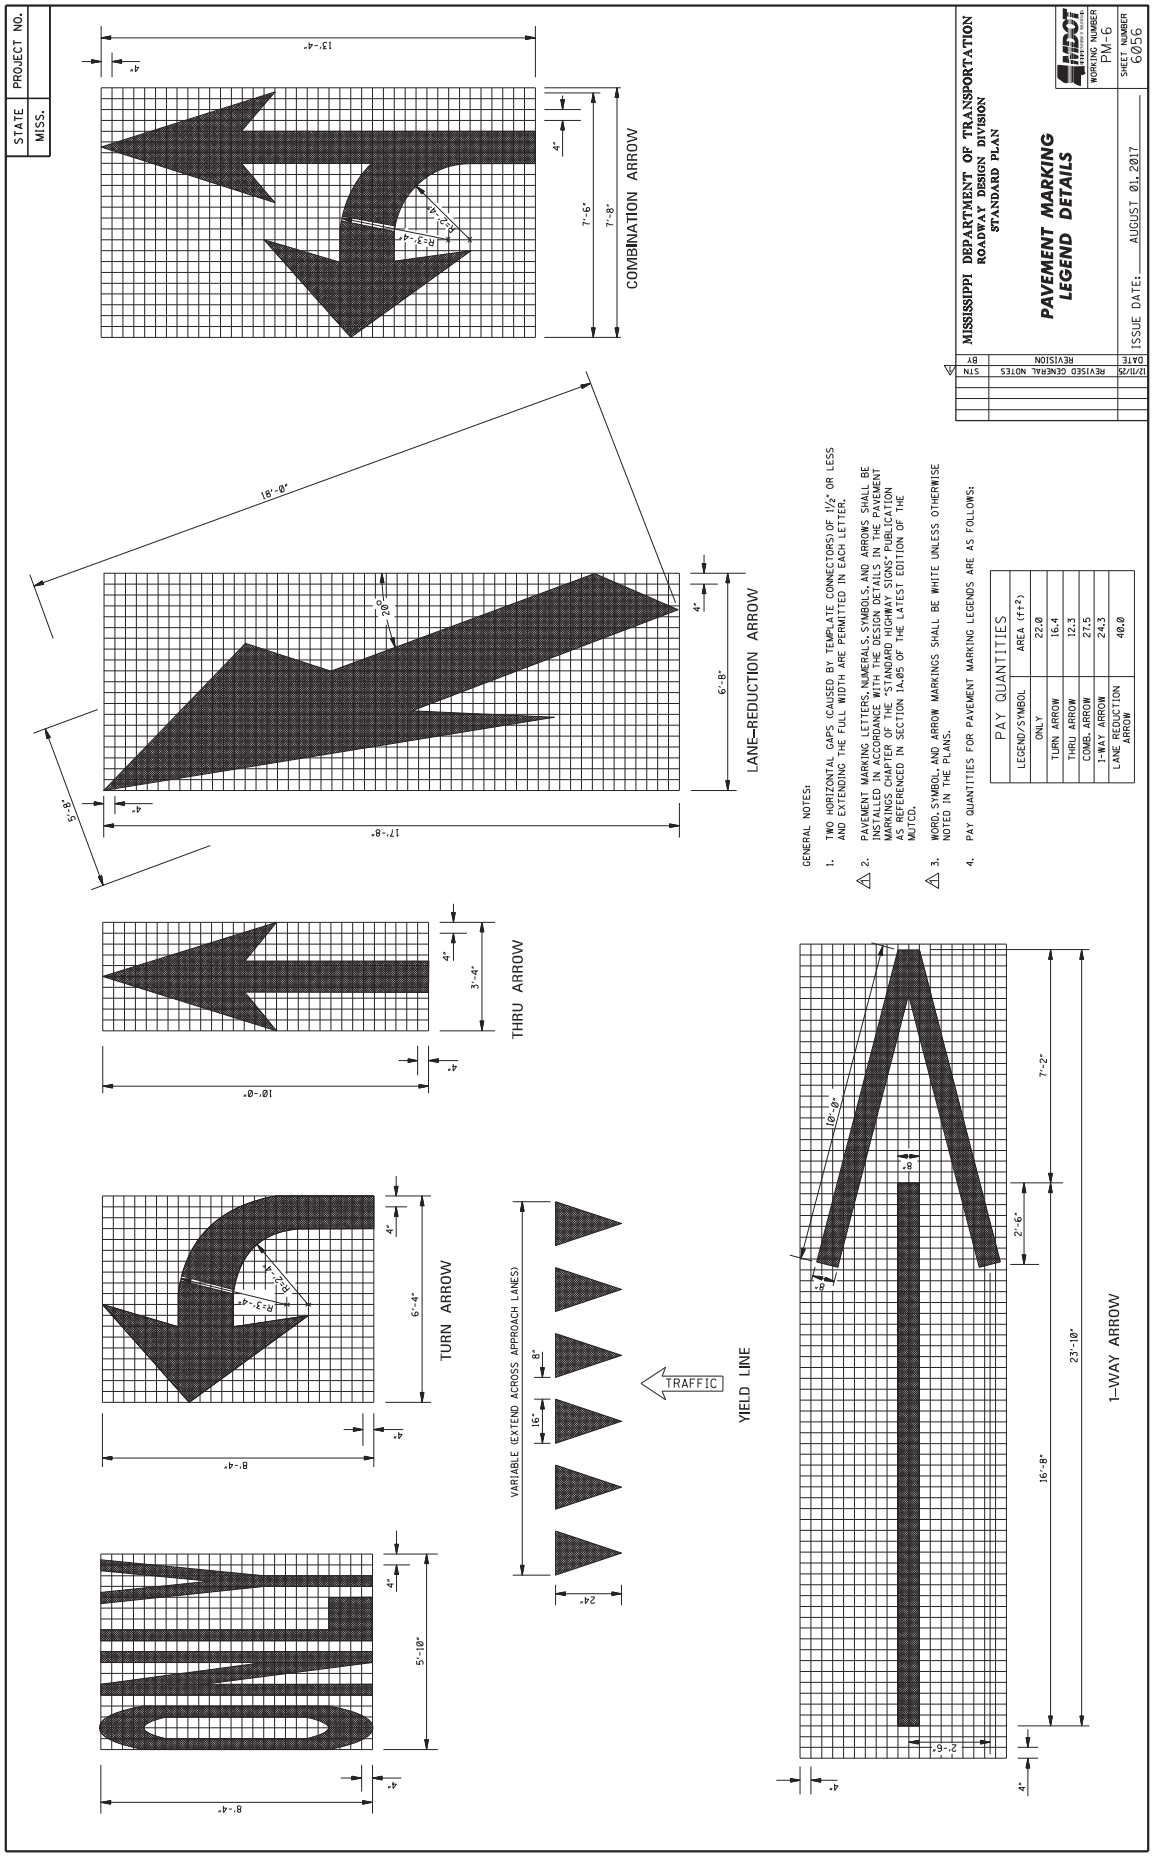

STATE
MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
PAVEMENT MARKING DETAILS FOR 2-LANE AND 4-LANE DIVIDED ROADWAYS
WORKING NUMBER FM-1
SHEET NUMBER 6051
ISSUE DATE: AUGUST 01, 2017
REVISION
DATE
BY
4/22/26 UPDATED NOTE TC
12/11/25 REVISE RPMS AND TEXT STN
PAY LENGTH
OUTSIDE EDGE OF TRAVEL LANE
6" SKIP YELLOW (* *)
6" CONTINUOUS YELLOW
6" CONTINUOUS WHITE EDGE STRIPE (* *)
OUTSIDE EDGE OF TRAVEL LANE
TWO-WAY RETROREFLECTIVE YELLOW RAISED PAVEMENT MARKERS
OMIT BROKEN LINE STRIPING
TWO-WAY TRAFFIC
(ASPHALT OR CONCRETE PAVEMENT)
DETAIL "A"
TRAFFIC
DIRECTION OF TRAFFIC
GENERAL NOTES:
* 1. 2" UNLESS SHOWN ELSEWHERE ON THE PLANS. FOR STRIPING ON RUMBLE STRIP SECTIONS REFER TO MK. SHEETS RS-1, RS-2, AND RS-3.
** 2. EDGE STRIPE SHALL BE SAME MATERIAL AS LANE-LINE STRIPE (PAINT OR PLASTIC AS INDICATED IN PAY ITEMS).
*** 3. SPACING OF RETROREFLECTIVE RAISED PAVEMENT MARKERS IS AS FOLLOWS:
URBAN AREA (ft-in) | RURAL AREA (ft-in)
TANGENT SECTIONS 40'-0" 80'-0"
HORIZONTAL CURVES 40'-0" 40'-0"
INTERCHANGE LIMITS 40'-0" † 40'-0"
† NOTE: ON THE MAIN FACILITY, RETROREFLECTIVE RED-CLEAR RAISED PAVEMENT MARKERS SHALL BE REQUIRED ON LANE-LINE(S) THROUGH ALL INTERCHANGE AREAS BEGINNING 1000' IN ADVANCE (IN DIRECTION OF TRAFFIC) OF THE EXIT RAMP TAPER AND CONTINUING THROUGH THE INTERCHANGE TO THE END OF THE ENTRANCE RAMP TAPER.
4. PAVEMENT MARKERS SHALL BE HIGH PERFORMANCE RETROREFLECTIVE RAISED PAVEMENT MARKERS AS LISTED IN THE MDOT "APPROVED PRODUCTS LIST."
NOTE: THE CRITERIA FOR NO-PASSING ZONES CAN BE FOUND IN THE MDOT ROADWAY DESIGN MANUAL, SECTION 10-1.01.
RETROREFLECTIVE RED-CLEAR RAISED PAVEMENT MARKERS
6" CONTINUOUS WHITE EDGE STRIPE
6" SKIP WHITE
6" CONTINUOUS YELLOW EDGE STRIPE
MEDIAN EDGE OF TRAVEL LANE
4-LANE WITH ONE-WAY TRAFFIC

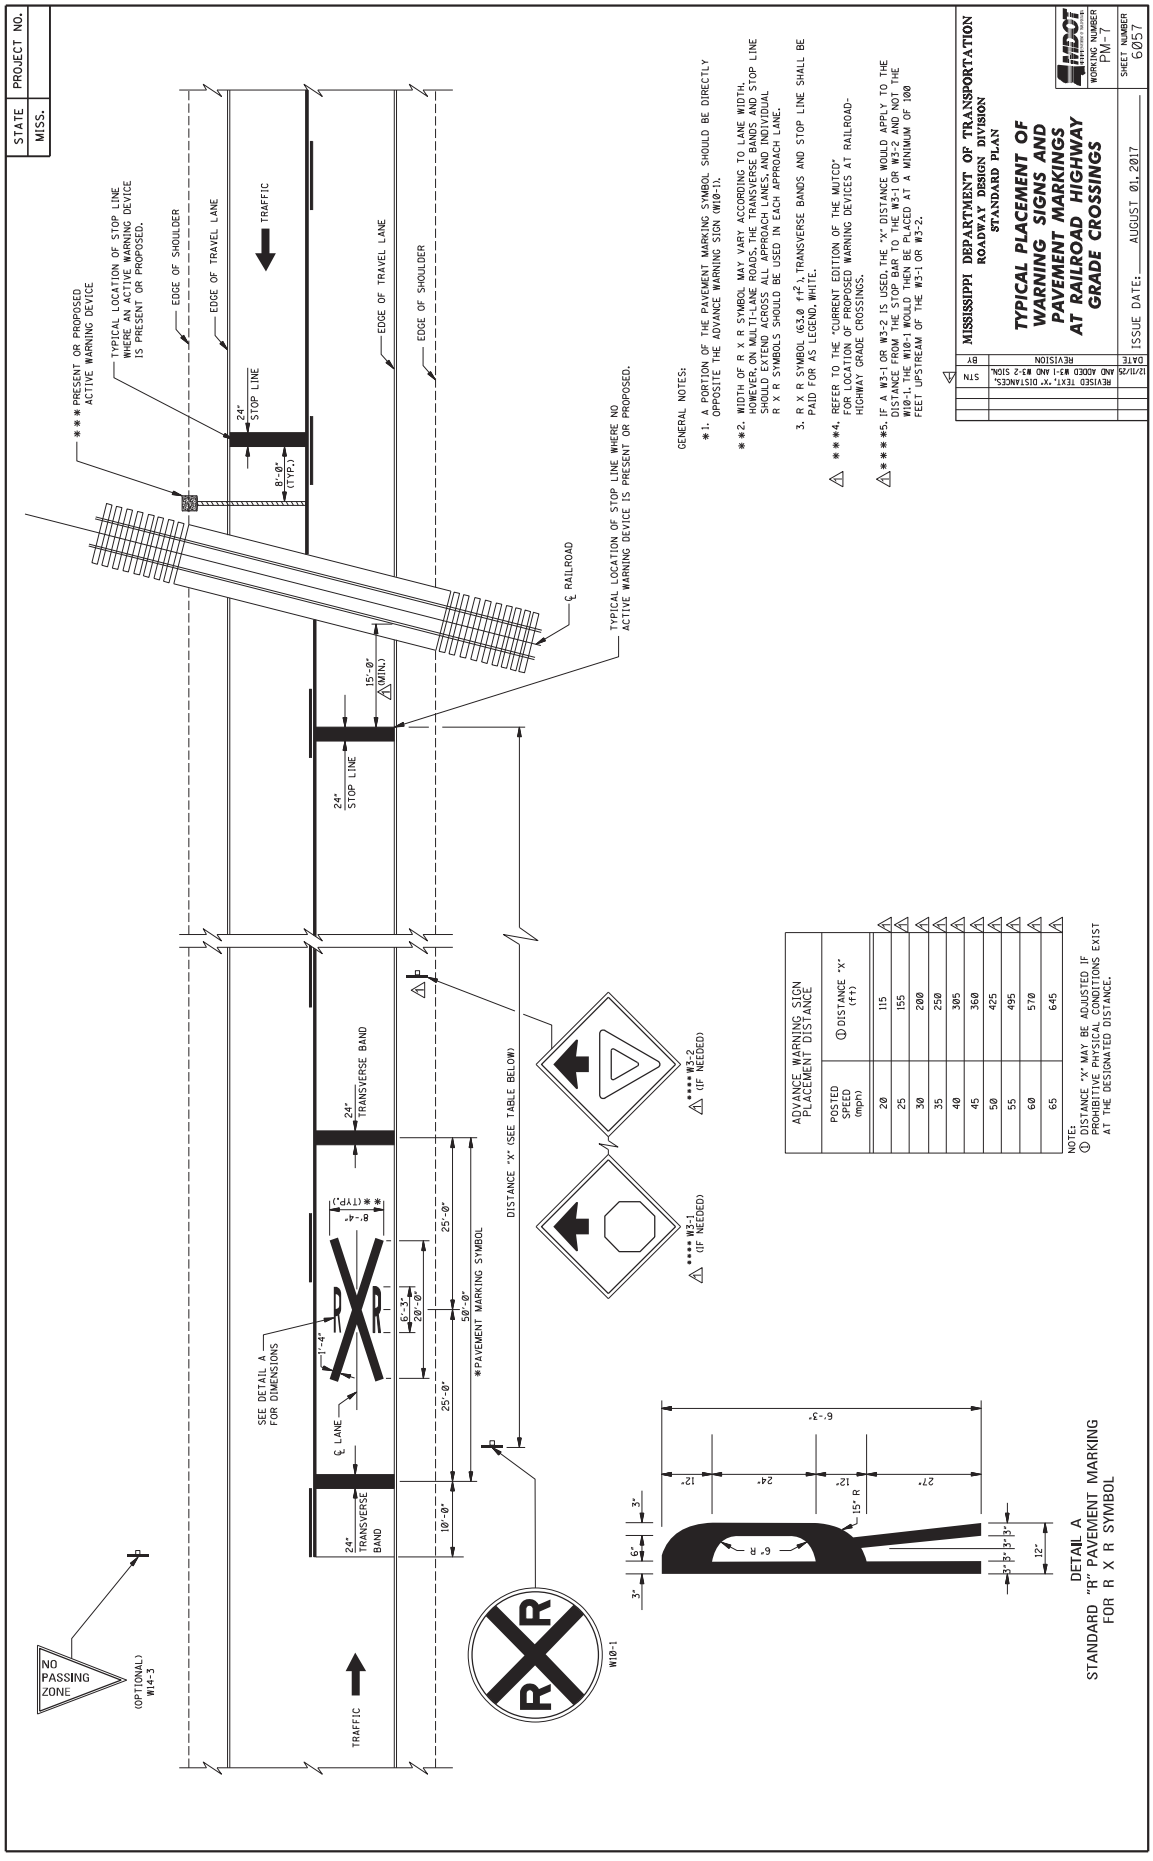

STATE
MISS.
PROJECT NO.
TYPICAL STRIPING AND RAISED PAVEMENT MARKERS FOR 3-LANE SECTION
TYPICAL STRIPING AND RAISED PAVEMENT MARKERS FOR 4-LANE SECTION
TYPICAL TWO-WAY ARROW INSTALLATION
NOTES: 1. CONSIDER EACH SEGMENT OF CONTINUOUS TWO-WAY LEFT TURN LANE SEPARATELY.
2. IF SEGMENT IS LESS THAN 350', PLACE ONE SET OF ARROWS AT MIDPOINT OF SEGMENT.
3. IF SEGMENT IS GREATER THAN 350', PLACE FIRST SET OF ARROWS 50' TO 100' FROM BEGINNING AND/OR END OF SEGMENT AND SPACE ADDITIONAL SETS OF ARROWS (250' O.C.).
DETAIL A
LATERAL PLACEMENT OF PAVEMENT MARKERS
TYPICAL STRIPING AND RAISED PAVEMENT MARKERS FOR 5-LANE SECTION
TYPICAL STRIPING AND RAISED PAVEMENT MARKERS AT LEFT TURN LANES
* NOTE: USE DETAIL STRIPING IF LENGTH < 150' AT THIS LOCATION, OTHERWISE USE CONTINUOUS STRIPING.
DETAIL B
LATERAL PLACEMENT OF PAVEMENT MARKERS
GENERAL NOTE:
1. PAVEMENT MARKERS SHALL BE HIGH PERFORMANCE RAISED PAVEMENT MARKERS AS LISTED IN THE MDOT "APPROVED PRODUCTS LIST".
STN
DATE
REVISION
BY
12/11/20
REVISE RPMS AND TEXT
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
PAVEMENT MARKING DETAILS FOR 3-LANE 4-LANE AND 5-LANE UNDIVIDED ROADWAYS
ISSUE DATE: AUGUST 01, 2017
WORKING NUMBER PM-2
SHEET NUMBER 6052

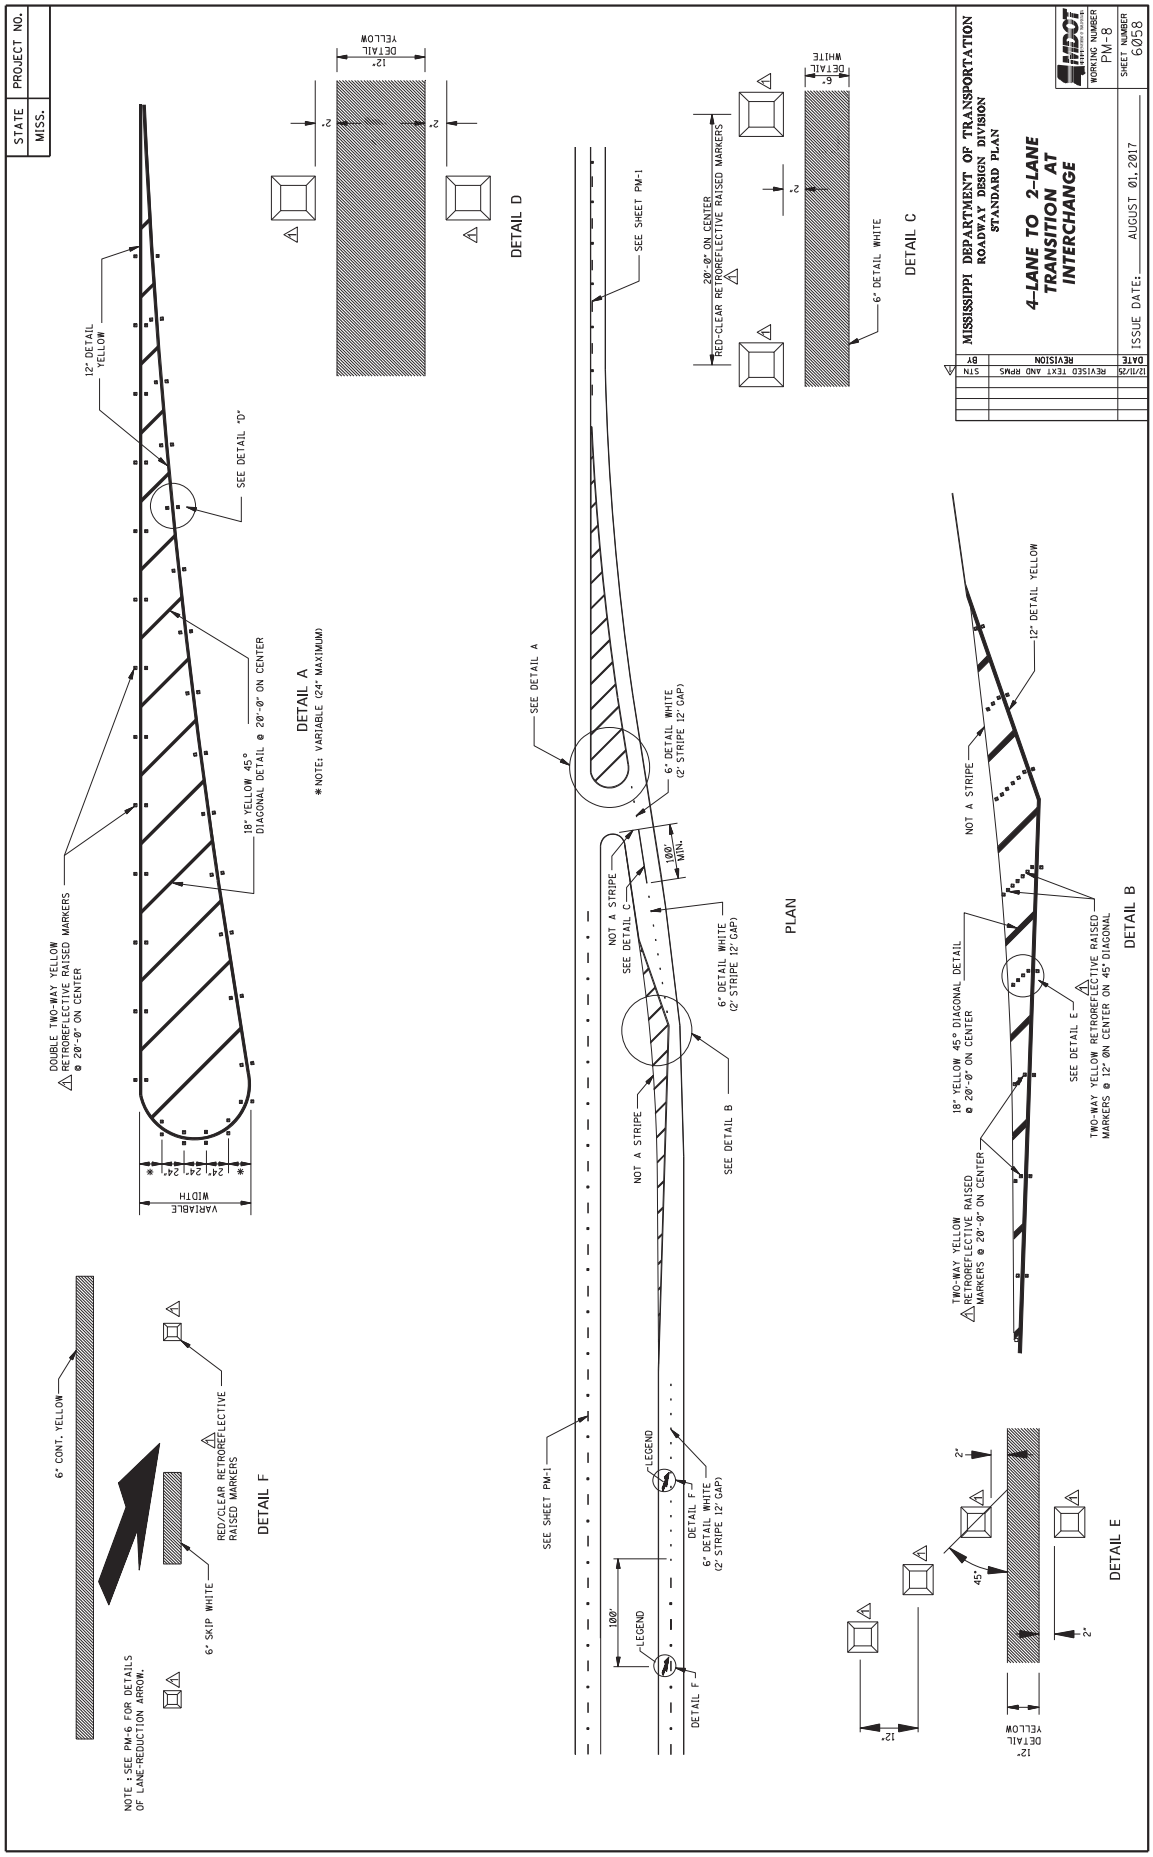

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
PAVEMENT MARKING DETAILS FOR INTERCHANGE ENTRANCE RAMPS (PARALLEL AND TAPERED)
WORKING NUMBER PM-3
SHEET NUMBER 6053
ISSUE DATE: AUGUST 01, 2017
REVISE RPMS AND TEXT STN 12/11/20
PARALLEL ACCELERATION LANE ENTRANCE RAMP
TAPERED ACCELERATION LANE ENTRANCE RAMP
DETAIL A
DETAIL B
DETAIL C
GENERAL NOTES:
*1. SEE SHEET PM-1 FOR THE PLACEMENT OF LANE-LINE STRIPE WITH RESPECT TO THE PAVEMENT JOINT AND FOR THE PLACEMENT OF THE EDGE LINE WITH RESPECT TO THE OUTSIDE EDGE OF THE TRAVELED WAY.
**2. ON THE MAIN FACILITY, RETROREFLECTIVE RED-CLEAR RAISED PAVEMENT MARKERS ON A 40'-0" SPACING WILL BE REQUIRED ON LANE-LINE(S) THROUGH ALL INTERCHANGE AREAS BEGINNING 1000' IN ADVANCE (IN DIRECTION OF TRAFFIC) OF THE EXIT RAMP TAPER AND CONTINUING THROUGH THE INTERCHANGE TO THE END OF THE ENTRANCE RAMP TAPER.
3. PAVEMENT MARKERS SHALL BE HIGH PERFORMANCE RETROREFLECTIVE RAISED PAVEMENT MARKERS AS LISTED IN THE MDOT "APPROVED PRODUCTS LIST."
NOTE: 2'-12" SKIP WHITE EXTENDS TO THE TERMINATION POINT OF THE ACCELERATION LANE.

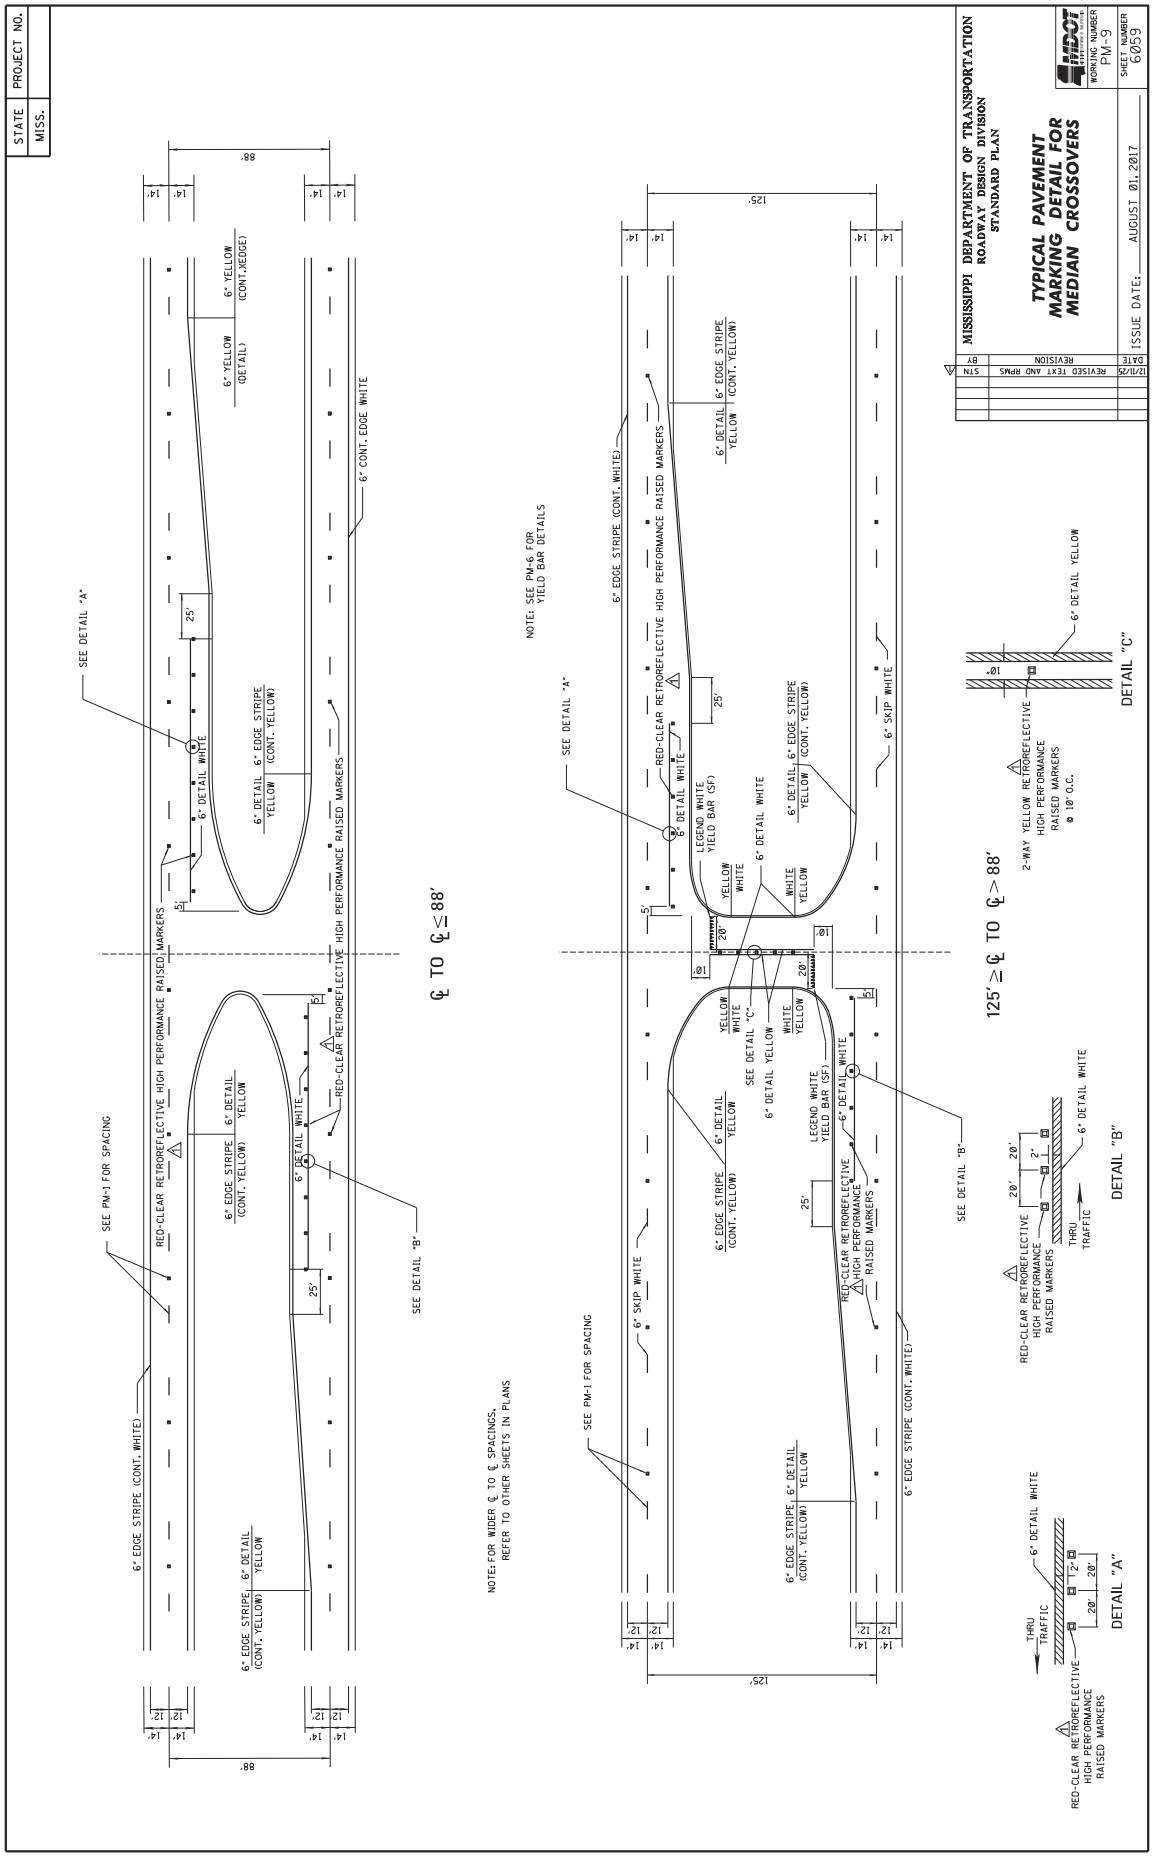

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
PAVEMENT MARKING DETAILS FOR INTERCHANGE EXIT RAMPS
(PARALLEL AND TAPERED)
WORKING NUMBER PM-4
SHEET NUMBER 6054
ISSUE DATE: AUGUST 01, 2017
DATE 12/11/25 BY STN REVISION REVISE RAMPS AND TEXT
TAPERED DECELERATION LANE EXIT RAMP
PARALLEL DECELERATION LANE EXIT RAMP
DETAIL A
DETAIL B
DETAIL C
GENERAL NOTES:
*1. SEE SHEET PM-1 FOR THE PLACEMENT OF LANE-LINE STRIPE WITH RESPECT TO THE PAVEMENT JOINTS AND FOR THE PLACEMENT OF THE EDGE LINE WITH RESPECT TO THE OUTSIDE EDGE OF THE TRAVELED WAY.
**2. ON THE MAIN FACILITY, RETROREFLECTIVE RED-CLEAR RAISED PAVEMENT MARKERS ON A 40'-0" SPACING WILL BE REQUIRED ON LANE-LINE(S) THROUGH ALL INTERCHANGE AREAS BEGINNING 1000' IN ADVANCE (IN DIRECTION OF TRAFFIC) OF THE EXIT RAMP TAPER AND CONTINUING THROUGH THE INTERCHANGE TO THE END OF THE ENTRANCE RAMP TAPER.
3. PAVEMENT MARKERS SHALL BE HIGH PERFORMANCE RETROREFLECTIVE RAISED PAVEMENT MARKERS AS LISTED IN THE MDOT "APPROVED PRODUCTS LIST."

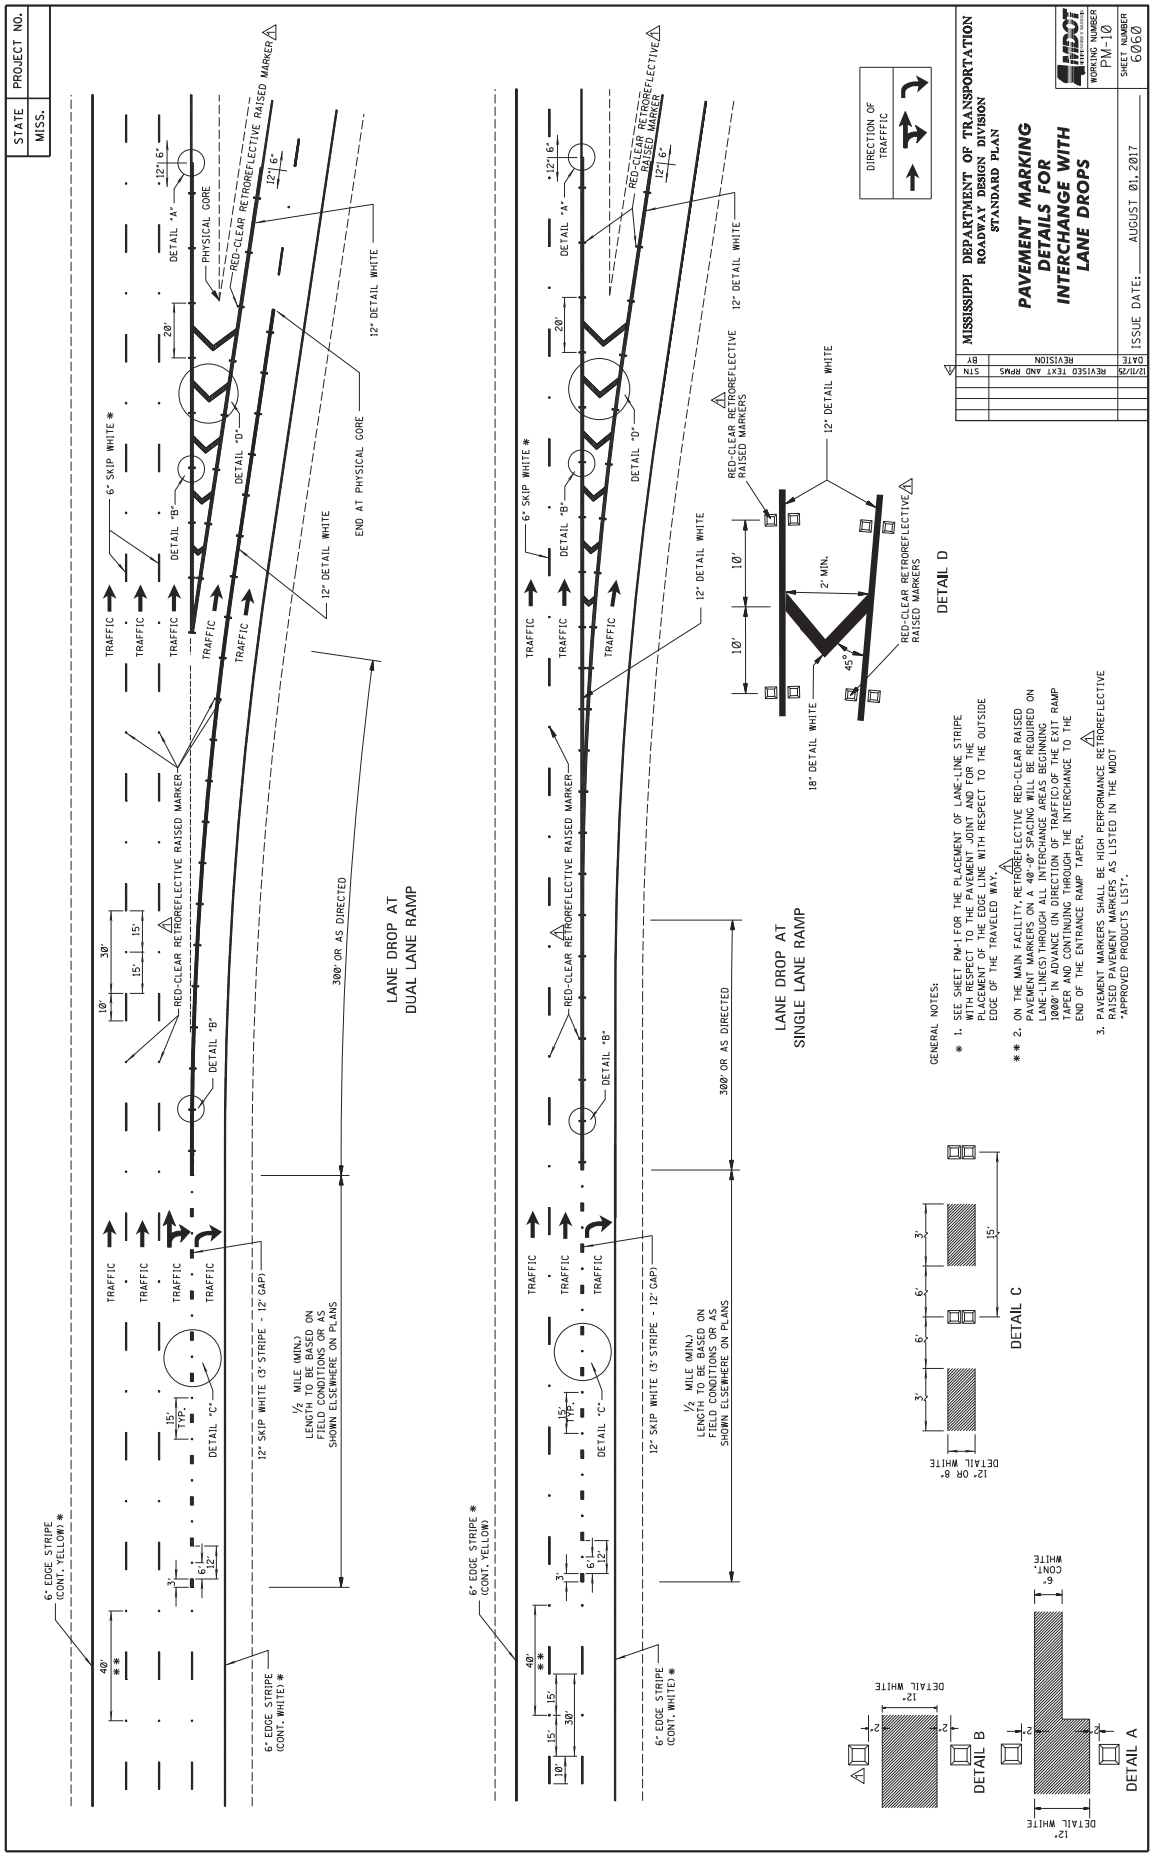

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
PAVEMENT MARKING LEGEND DETAILS
WORKING NUMBER PM-5
SHEET NUMBER 6055
ISSUE DATE: AUGUST 01, 2017
GENERAL NOTES:
1. TWO HORIZONTAL GAPS (CAUSED BY TEMPLATE CONNECTORS) OF 1/2" OR LESS AND EXTENDING THE FULL WIDTH ARE PERMITTED IN EACH LETTER.
2. PAVEMENT MARKING LETTERS, NUMERALS, SYMBOLS, AND ARROWS SHALL BE INSTALLED IN ACCORDANCE WITH THE DESIGN DETAILS IN THE PAVEMENT MARKINGS CHAPTER OF THE STANDARD HIGHWAY SIGNS PUBLICATION AS REFERENCED IN SECTION 1A.05 OF THE LATEST EDITION OF THE MUTCD.
3. WORD, SYMBOL, AND ARROW MARKINGS SHALL BE WHITE UNLESS OTHERWISE NOTED IN THE PLANS.
4. PAY QUANTITIES FOR PAVEMENT MARKING LEGENDS ARE AS FOLLOWS:
PAY QUANTITIES
LEGEND | AREA (FT²)
STOP 24.6
RIGHT 28.6
LEFT 19.5
TURN 27.3
LANE 22.7
AHEAD 32.3
YIELD 26.8
EXIT 18.5
SIGNAL 32.5
SCHOOL 35.5
STN BY REVISION DATE
12/1/25 REVISED GENERAL NOTES

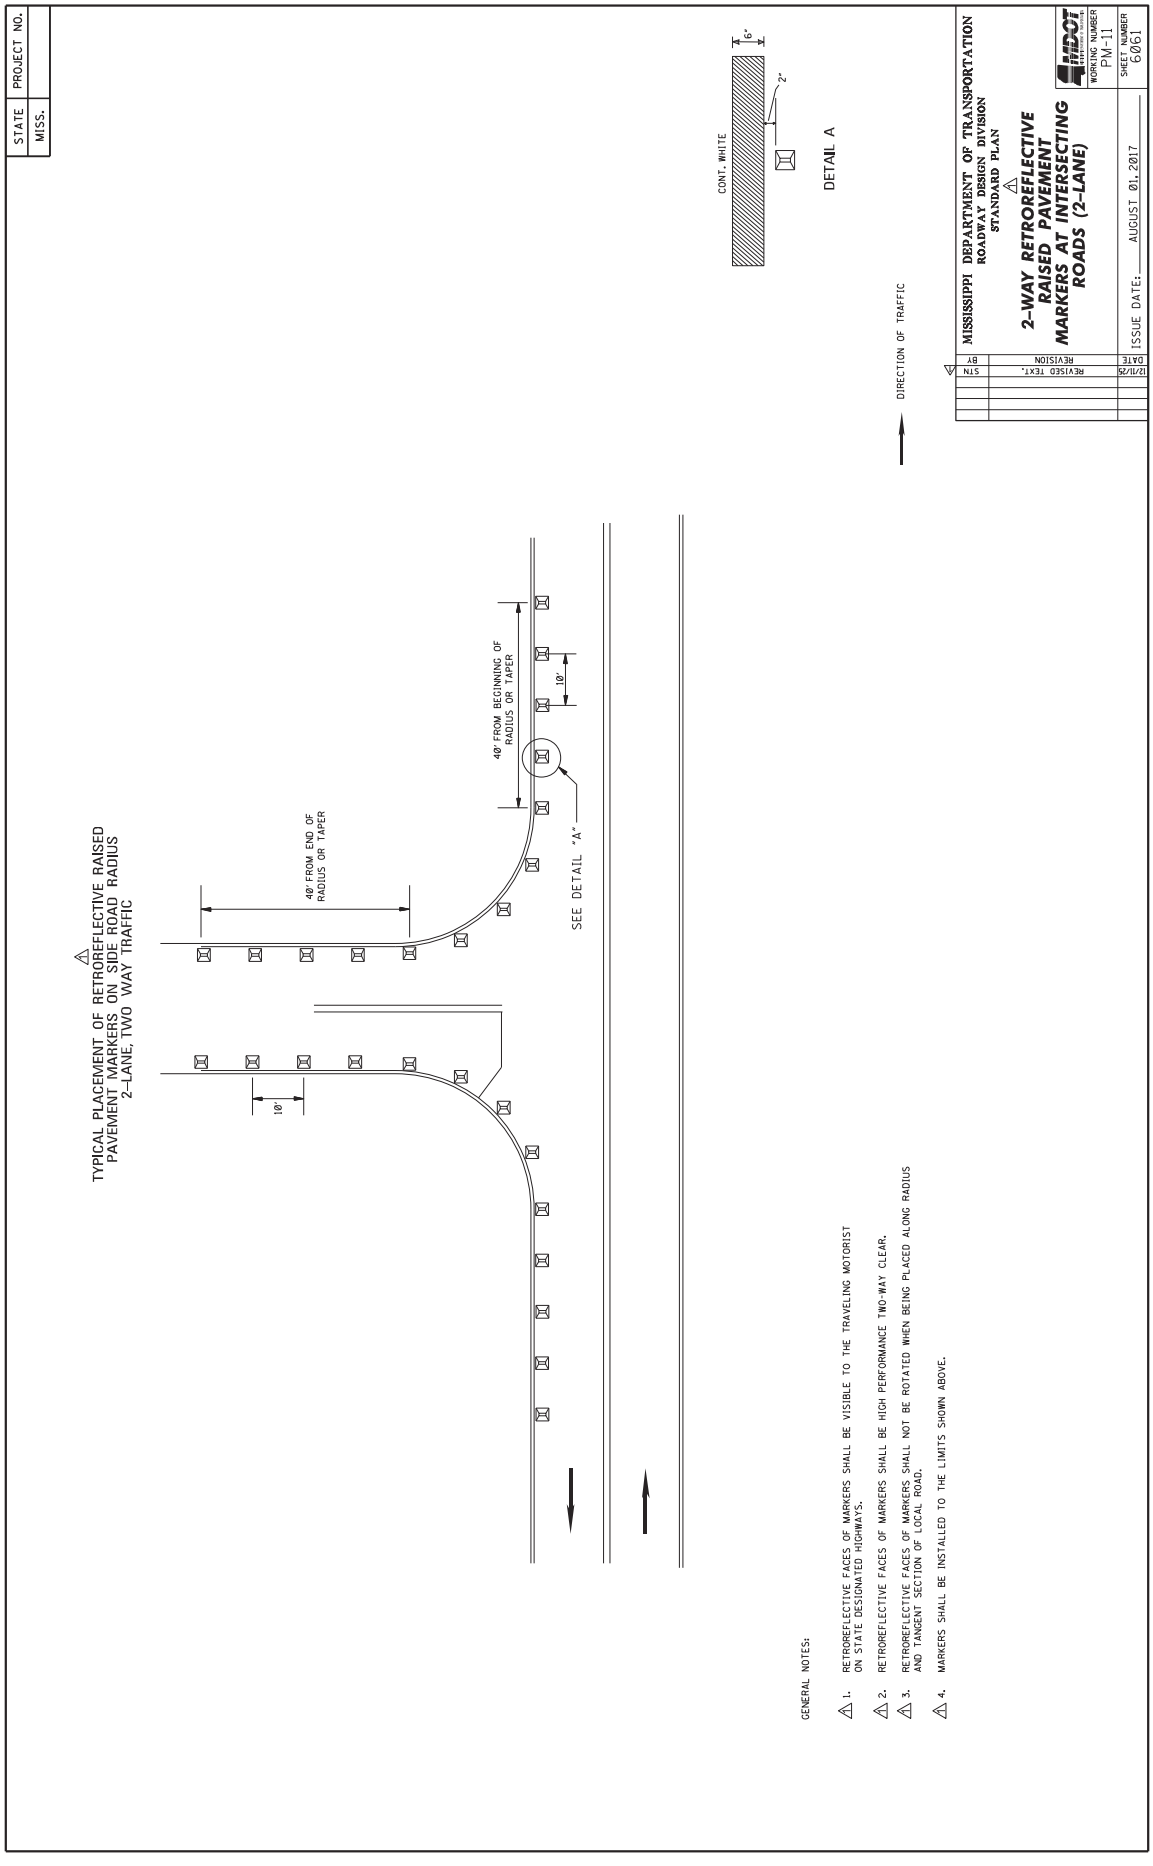

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
PAVEMENT MARKING LEGEND DETAILS
WORKING NUMBER PM-6
SHEET NUMBER 6056
ISSUE DATE: AUGUST 01, 2017
DATE REVISION BY
12/1/23 REVISED GENERAL NOTES STN
GENERAL NOTES:
1. TWO HORIZONTAL GAPS (CAUSED BY TEMPLATE CONNECTORS) OF 1½" OR LESS AND EXTENDING THE FULL WIDTH ARE PERMITTED IN EACH LETTER.
2. PAVEMENT MARKING LETTERS, NUMERALS, SYMBOLS, AND ARROWS SHALL BE INSTALLED IN ACCORDANCE WITH THE DESIGN DETAILS IN THE PAVEMENT MARKINGS CHAPTER OF THE "STANDARD HIGHWAY SIGNS" PUBLICATION AS REFERENCED IN SECTION 1A.05 OF THE LATEST EDITION OF THE MUTCD.
3. WORD, SYMBOL AND ARROW MARKINGS SHALL BE WHITE UNLESS OTHERWISE NOTED IN THE PLANS.
4. PAY QUANTITIES FOR PAVEMENT MARKING LEGENDS ARE AS FOLLOWS:
PAY QUANTITIES
LEGEND/SYMBOL ONLY
AREA (ft²)
TURN ARROW 22.0
THRU ARROW 16.4
COMB. ARROW 12.3
1-WAY ARROW 27.5
LANE REDUCTION ARROW 24.3
40.0
COMBINATION ARROW
LANE-REDUCTION ARROW
THRU ARROW
TURN ARROW
YIELD LINE
TRAFFIC
VARIABLE (EXTEND ACROSS APPROACH LANES)
1-WAY ARROW
STOP

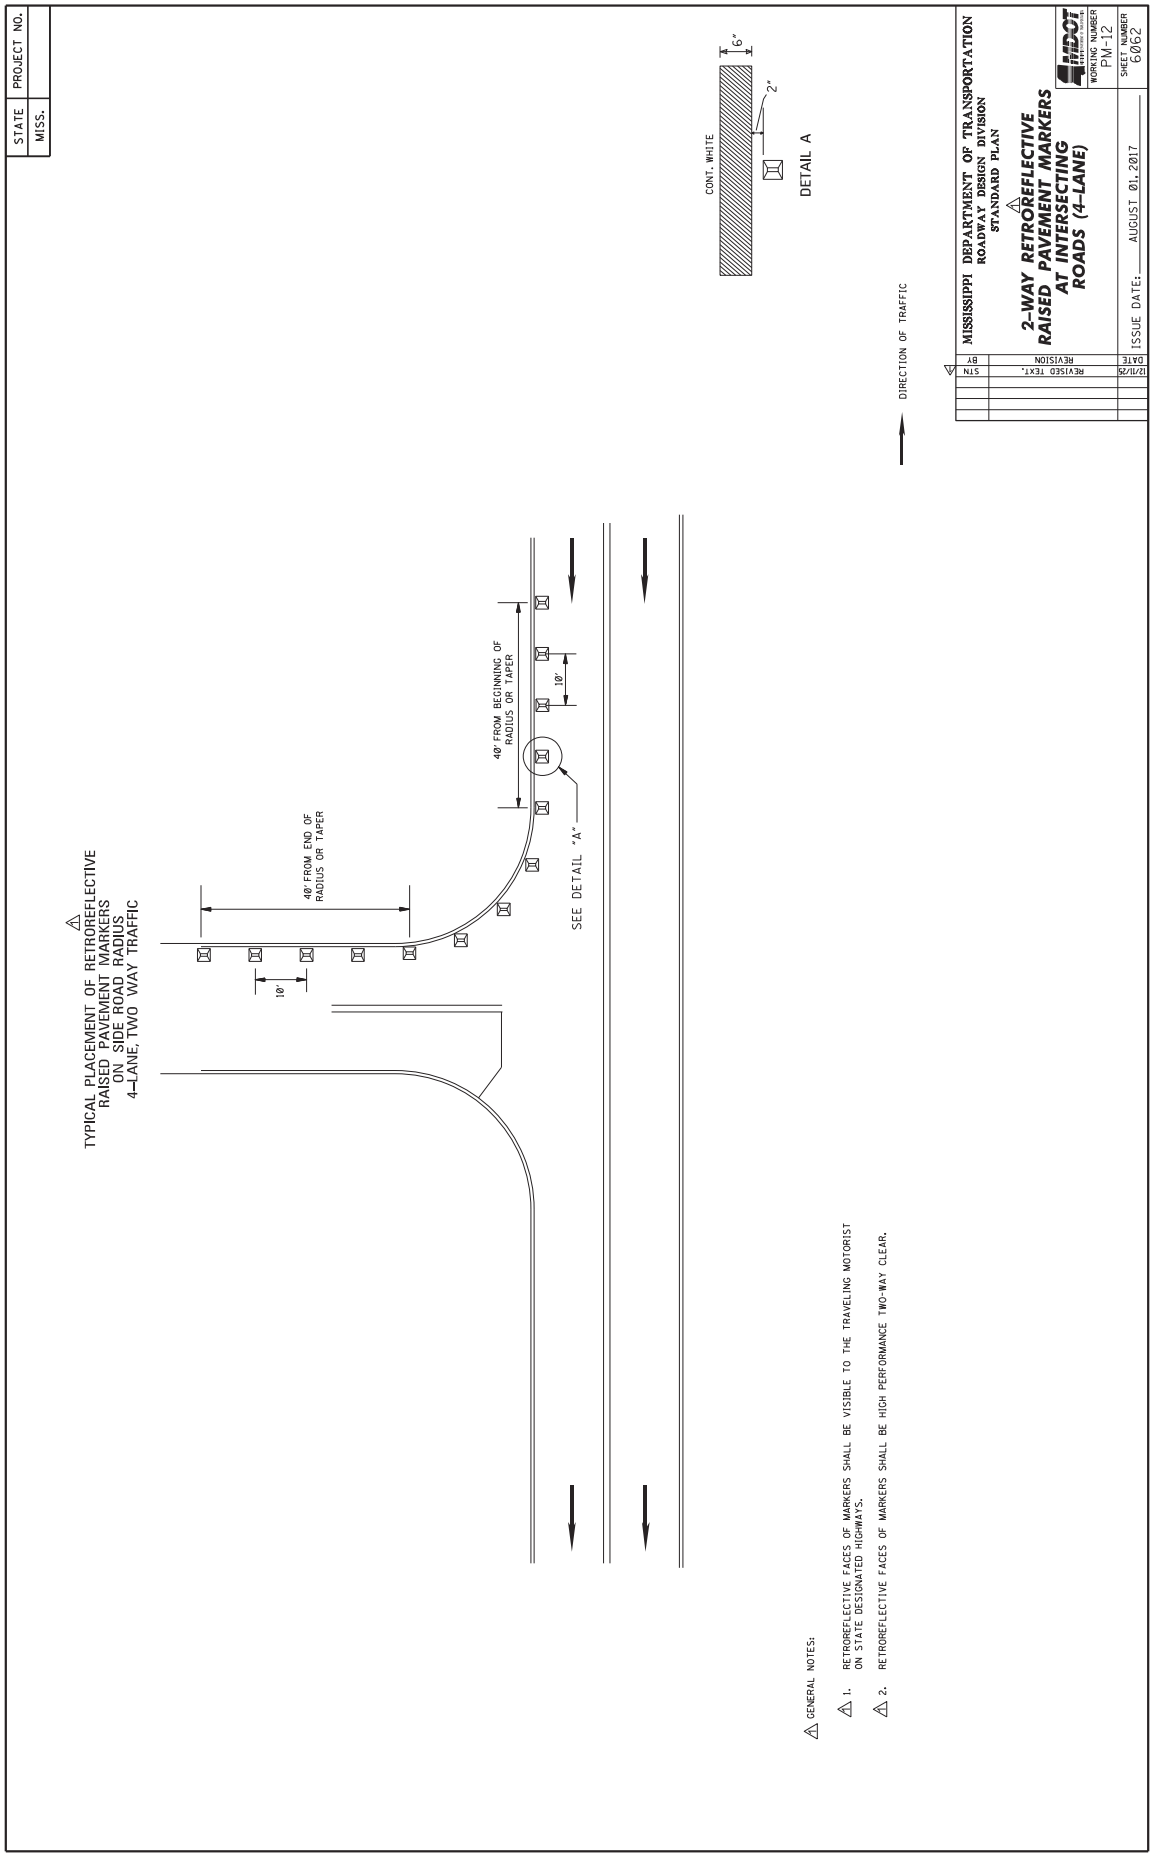

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
TYPICAL PLACEMENT OF WARNING SIGNS AND PAVEMENT MARKINGS AT RAILROAD HIGHWAY GRADE CROSSINGS
WORKING NUMBER FM-1
SHEET NUMBER 6057
ISSUE DATE: AUGUST 01, 2017
REVISION
DATE
BY
12/11/25 REVISED TEXT, 'X' DISTANCES, AND ADDED M3-1 AND M3-2 SIGNS
STN
GENERAL NOTES:
*1. A PORTION OF THE PAVEMENT MARKING SYMBOL SHOULD BE DIRECTLY OPPOSITE THE ADVANCE WARNING SIGN (W10-1).
**2. WIDTH OF R X R SYMBOL MAY VARY ACCORDING TO LANE WIDTH. HOWEVER, ON MULTI-LANE ROADS, THE TRANSVERSE BANDS AND STOP LINE SHOULD EXTEND ACROSS ALL APPROACH LANES, AND INDIVIDUAL R X R SYMBOLS SHOULD BE USED IN EACH APPROACH LANE.
3. R X R SYMBOL (63.0 ft²), TRANSVERSE BANDS AND STOP LINE SHALL BE PAID FOR AS LEGEND, WHITE.
***4. REFER TO THE "CURRENT EDITION OF THE MUTCD" FOR LOCATION OF PROPOSED WARNING DEVICES AT RAILROAD-HIGHWAY GRADE CROSSINGS.
*****5. IF A W3-1 OR W3-2 IS USED, THE "X" DISTANCE WOULD APPLY TO THE DISTANCE FROM THE STOP BAR TO THE W10-1. ON W10-1 AND TO THE W10-1, THE W10-1 WOULD THEN BE PLACED AT A MINIMUM OF 100 FEET UPSTREAM OF THE W3-1 OR W3-2.
TYPICAL LOCATION OF STOP LINE WHERE NO ACTIVE WARNING DEVICE IS PRESENT OR PROPOSED.
*** PRESENT OR PROPOSED ACTIVE WARNING DEVICE
TYPICAL LOCATION OF STOP LINE WHERE AN ACTIVE WARNING DEVICE IS PRESENT OR PROPOSED.
EDGE OF SHOULDER
EDGE OF TRAVEL LANE
TRAFFIC
24" STOP LINE
8'-0" (TYP.)
℄ RAILROAD
15'-0" (MIN.)
24" TRANSVERSE BAND
SEE DETAIL A FOR DIMENSIONS
1'-4"
6'-3"
20'-0"
25'-0"
50'-0"
*PAVEMENT MARKING SYMBOL
DISTANCE "X" (SEE TABLE BELOW)
10'-0"
℄ LANE
**** W3-2 (IF NEEDED)
**** W3-1 (IF NEEDED)
W10-1
NO PASSING ZONE
(OPTIONAL) W14-3
ADVANCE WARNING SIGN PLACEMENT DISTANCE
POSTED SPEED (mph)
① DISTANCE "X" (ft)
20 115
25 155
30 200
35 250
40 305
45 360
50 425
55 495
60 570
65 645
NOTE:
① DISTANCE "X" MAY BE ADJUSTED IF PROHIBITIVE PHYSICAL CONDITIONS EXIST AT THE DESIGNATED DISTANCE.
6'-3"
12'
24'
27'
15° R
6" R
3"
6"
DETAIL A
STANDARD "R" PAVEMENT MARKING FOR R X R SYMBOL

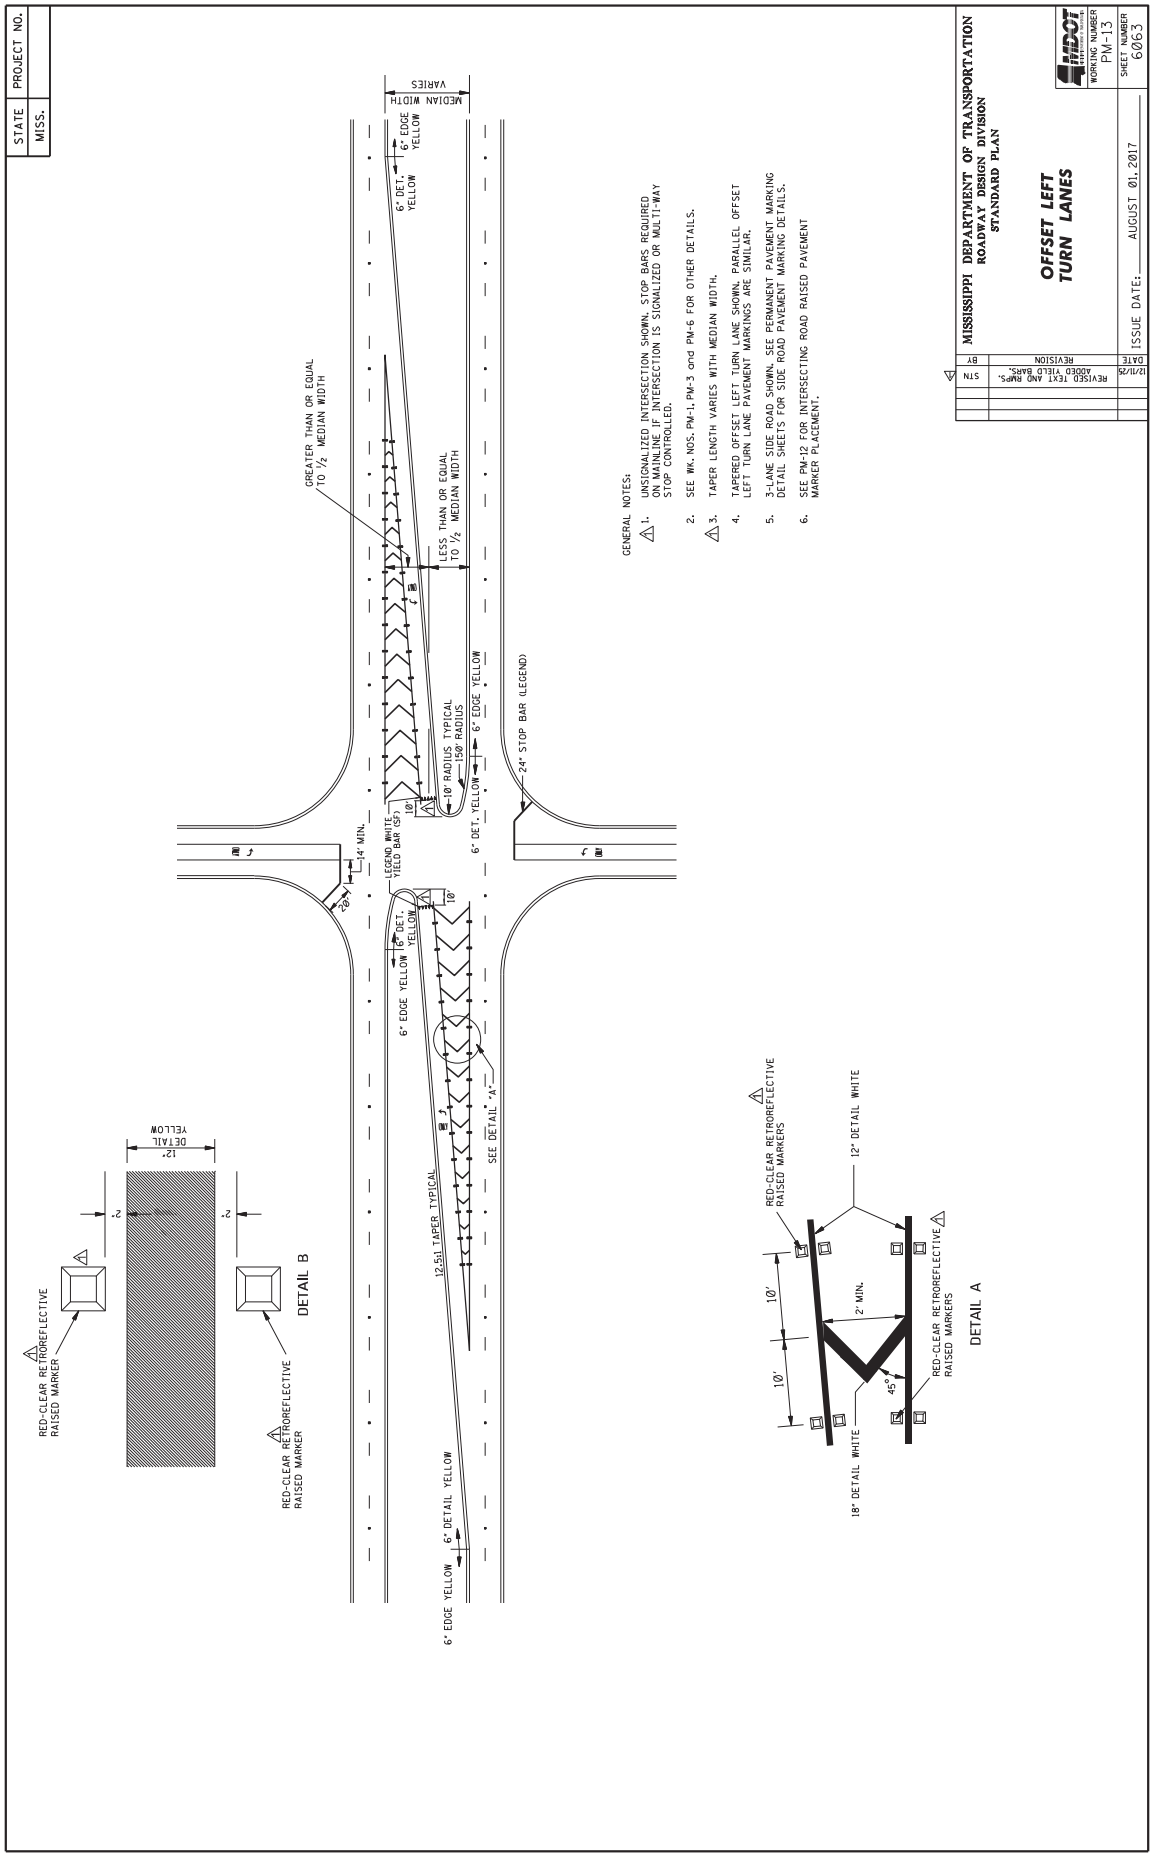

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
4-LANE TO 2-LANE TRANSITION AT INTERCHANGE
WORKING NUMBER PM-8
SHEET NUMBER 6058
ISSUE DATE: AUGUST 01, 2017
DATE REVISION BY STN
12/1/25 REVISED TEXT AND RPMS
DOUBLE TWO-WAY YELLOW RETROREFLECTIVE RAISED MARKERS @ 20'-0" ON CENTER
12" DETAIL YELLOW
SEE DETAIL "D"
18" YELLOW 45° DIAGONAL DETAIL @ 20'-0" ON CENTER
VARIABLE WIDTH
24" 24" 24" 24"
DETAIL A
*NOTE: VARIABLE (24" MAXIMUM)
DETAIL D
12" DETAIL YELLOW
2"
20'-0" ON CENTER
RED-CLEAR RETROREFLECTIVE RAISED MARKERS
6" DETAIL WHITE
DETAIL C
SEE SHEET PM-1
SEE DETAIL A
6" DETAIL WHITE (2" STRIPE 12' GAP)
100' MIN.
NOT A STRIPE
SEE DETAIL C
6" DETAIL WHITE (2" STRIPE 12' GAP)
SEE DETAIL B
PLAN
SEE SHEET PM-1
LEGEND
DETAIL F
6" DETAIL WHITE (2" STRIPE 12' GAP)
100'
LEGEND
DETAIL F
NOT A STRIPE
12" DETAIL YELLOW
18" YELLOW 45° DIAGONAL DETAIL @ 20'-0" ON CENTER
TWO-WAY YELLOW RETROREFLECTIVE RAISED MARKERS @ 20'-0" ON CENTER
SEE DETAIL E
TWO-WAY YELLOW RETROREFLECTIVE RAISED MARKERS @ 12' ON CENTER ON 45° DIAGONAL
DETAIL B
6" CONT. YELLOW
RED/CLEAR RETROREFLECTIVE RAISED MARKERS
6" SKIP WHITE
NOTE : SEE PM-6 FOR DETAILS OF LANE-REDUCTION ARROW.
DETAIL F
2"
45°
2"
12"
12" DETAIL YELLOW
DETAIL E

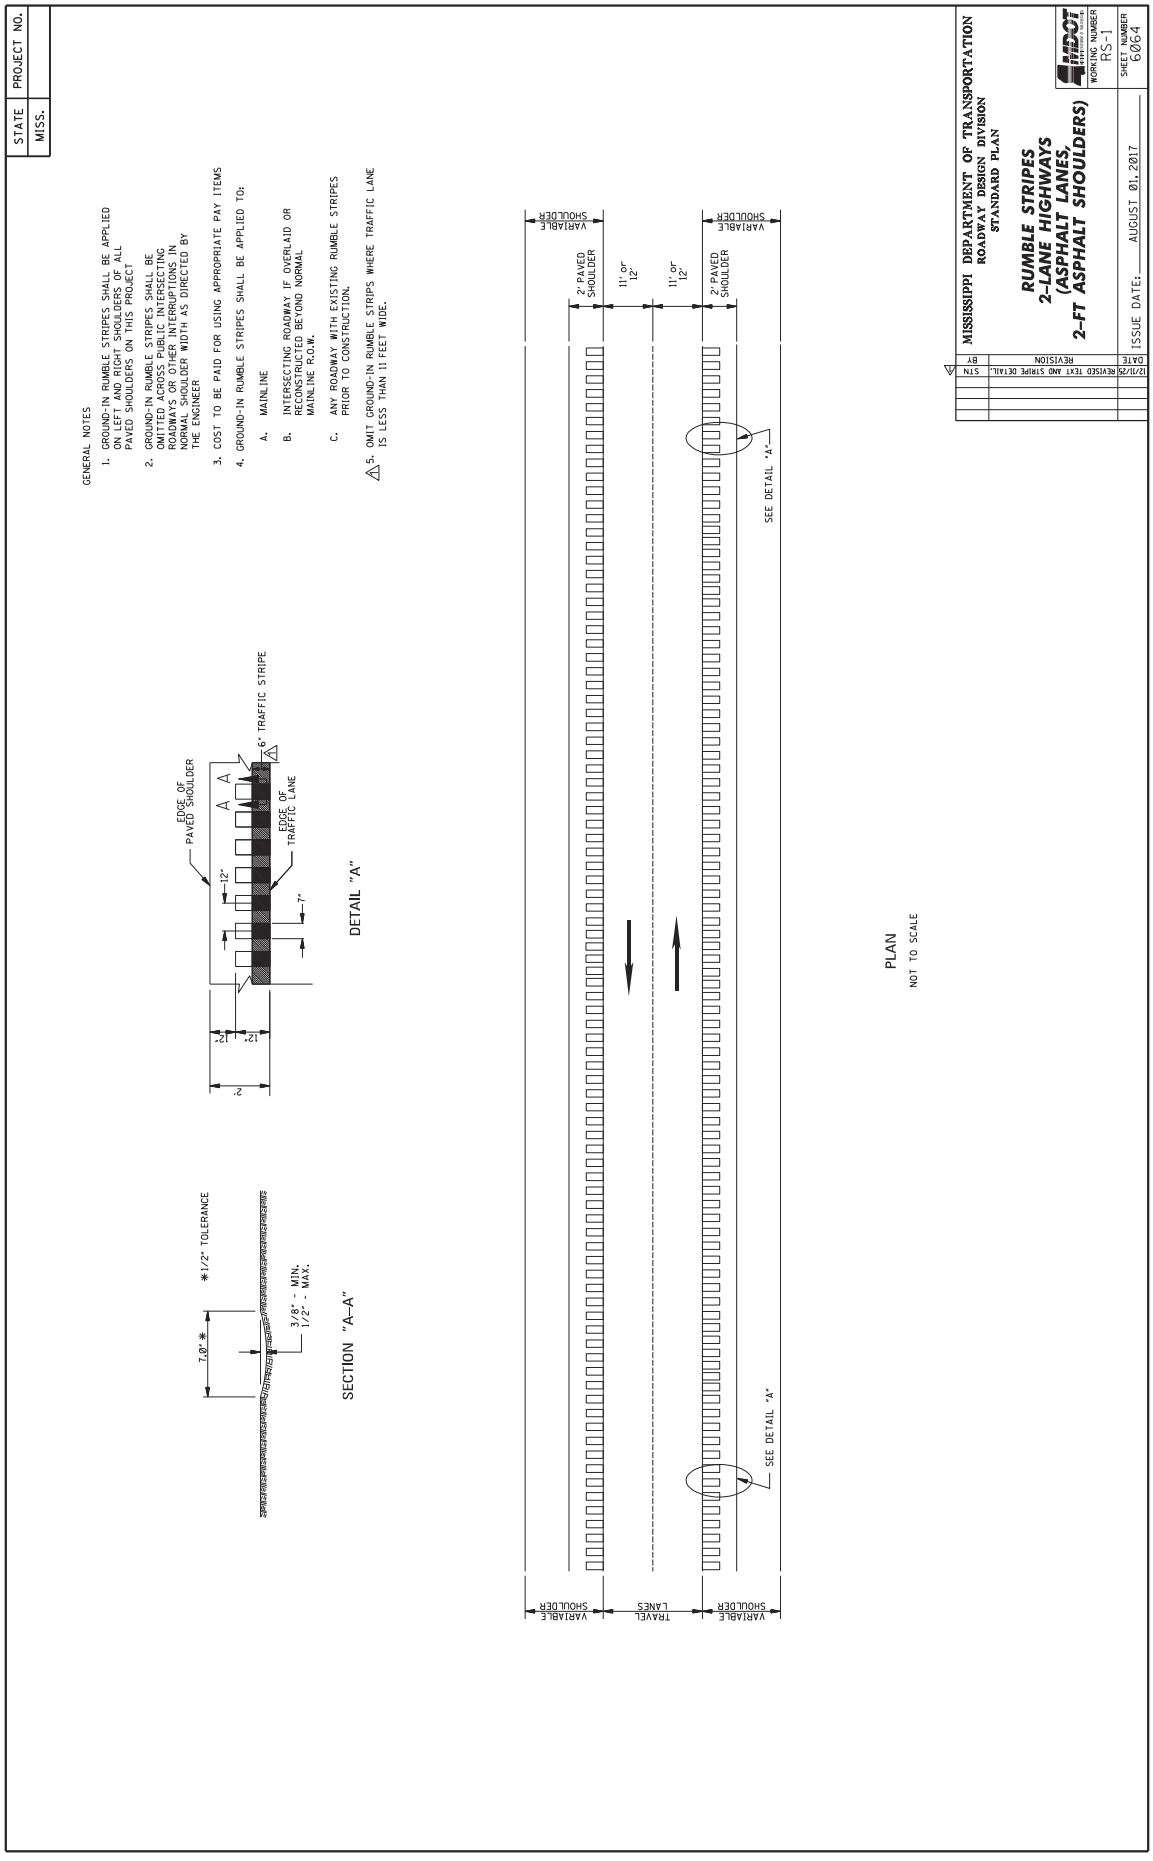

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
TYPICAL PAVEMENT MARKING DETAIL FOR MEDIAN CROSSOVERS
WORKING NUMBER PM-9
SHEET NUMBER 6059
ISSUE DATE: AUGUST 01, 2017
REVISION
BY
DATE
12/11/25 REVISED TEXT AND RPMS STN
SEE DETAIL "A"
SEE DETAIL "B"
SEE PM-1 FOR SPACING
RED-CLEAR RETROREFLECTIVE HIGH PERFORMANCE RAISED MARKERS
6" EDGE STRIPE (CONT. WHITE)
6" DETAIL WHITE
6" DETAIL YELLOW
6" EDGE STRIPE (CONT. YELLOW)
6" YELLOW (DETAIL)
6" YELLOW (CONT.XEDGE)
6" CONT. EDGE WHITE
℄ TO ℄≤88'
NOTE: FOR WIDER ℄ TO ℄ SPACINGS, REFER TO OTHER SHEETS IN PLANS
NOTE: SEE PM-6 FOR YIELD BAR DETAILS
6" SKIP WHITE
LEGEND WHITE YIELD BAR (SF)
SEE DETAIL "C"
125'≥℄ TO ℄>88'
2-WAY YELLOW RETROREFLECTIVE HIGH PERFORMANCE RAISED MARKERS @ 10' O.C.
DETAIL "C"
DETAIL "B"
DETAIL "A"
THRU TRAFFIC

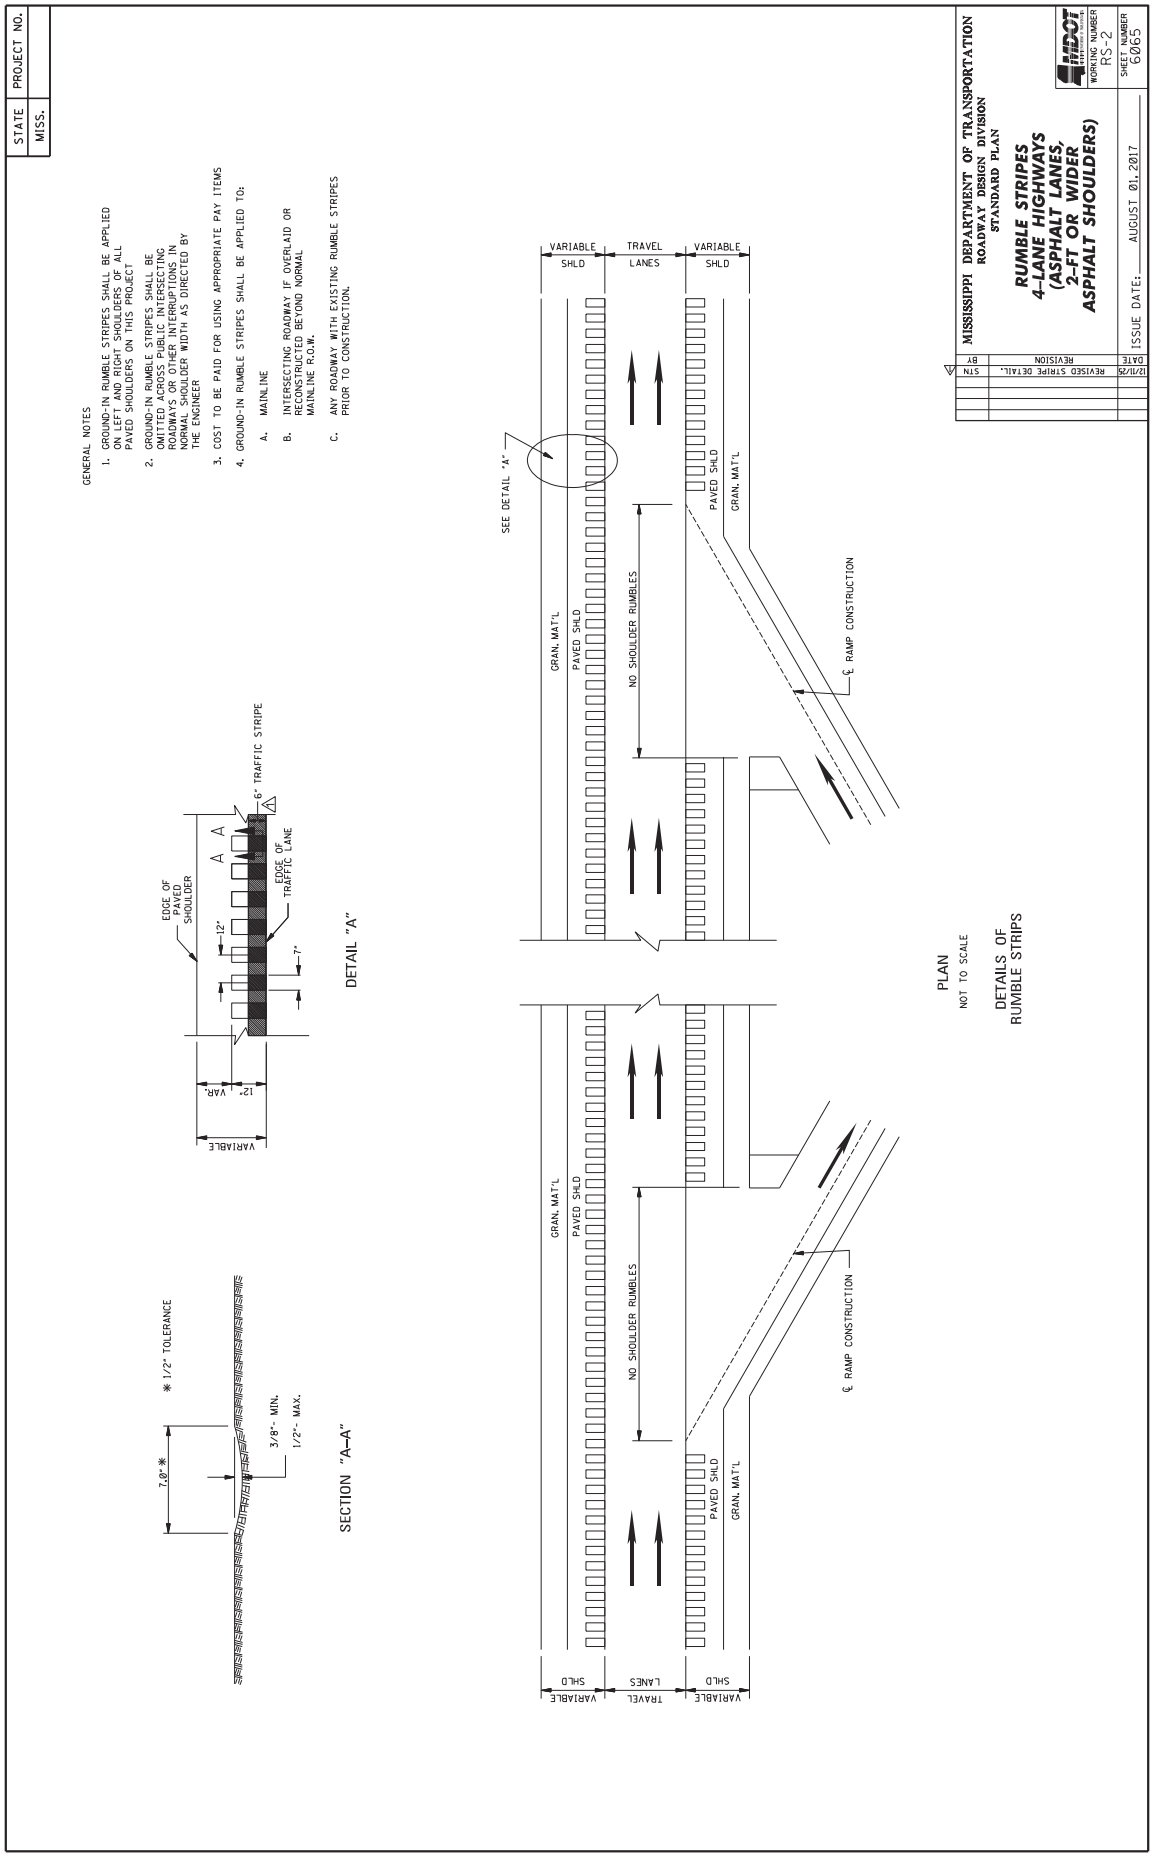

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
PAVEMENT MARKING DETAILS FOR INTERCHANGE WITH LANE DROPS
WORKING NUMBER PM-10
SHEET NUMBER 6060
ISSUE DATE: AUGUST 01, 2017
REVISED TEXT AND RPMS
DIRECTION OF TRAFFIC
LANE DROP AT DUAL LANE RAMP
LANE DROP AT SINGLE LANE RAMP
6" EDGE STRIPE (CONT. YELLOW) *
6" EDGE STRIPE (CONT. WHITE) *
6" SKIP WHITE *
RED-CLEAR RETROREFLECTIVE RAISED MARKER
PHYSICAL GORE
END AT PHYSICAL GORE
12" DETAIL WHITE
12" SKIP WHITE (3' STRIPE - 12' GAP)
300' OR AS DIRECTED
½ MILE (MIN.) LENGTH TO BE BASED ON FIELD CONDITIONS OR AS SHOWN ELSEWHERE ON PLANS
DETAIL A
DETAIL B
DETAIL C
DETAIL D
18" DETAIL WHITE
RED-CLEAR RETROREFLECTIVE RAISED MARKERS
GENERAL NOTES:
* 1. SEE SHEET PM-1 FOR THE PLACEMENT OF LANE-LINE STRIPE WITH RESPECT TO THE PAVEMENT JOINT AND FOR THE PLACEMENT OF THE EDGE LINE WITH RESPECT TO THE OUTSIDE EDGE OF THE TRAVELED WAY.
** 2. ON THE MAIN FACILITY, RETROREFLECTIVE RED-CLEAR RAISED PAVEMENT MARKERS ON A 40'-0" SPACING WILL BE REQUIRED ON LANE-LINE(S) THROUGH ALL INTERCHANGE AREAS BEGINNING 1000' IN ADVANCE (IN DIRECTION OF TRAFFIC) OF THE EXIT RAMP TAPER AND CONTINUING THROUGH THE INTERCHANGE TO THE END OF THE ENTRANCE RAMP TAPER.
3. PAVEMENT MARKERS SHALL BE HIGH PERFORMANCE RETROREFLECTIVE RAISED PAVEMENT MARKERS AS LISTED IN THE MDOT "APPROVED PRODUCTS LIST".

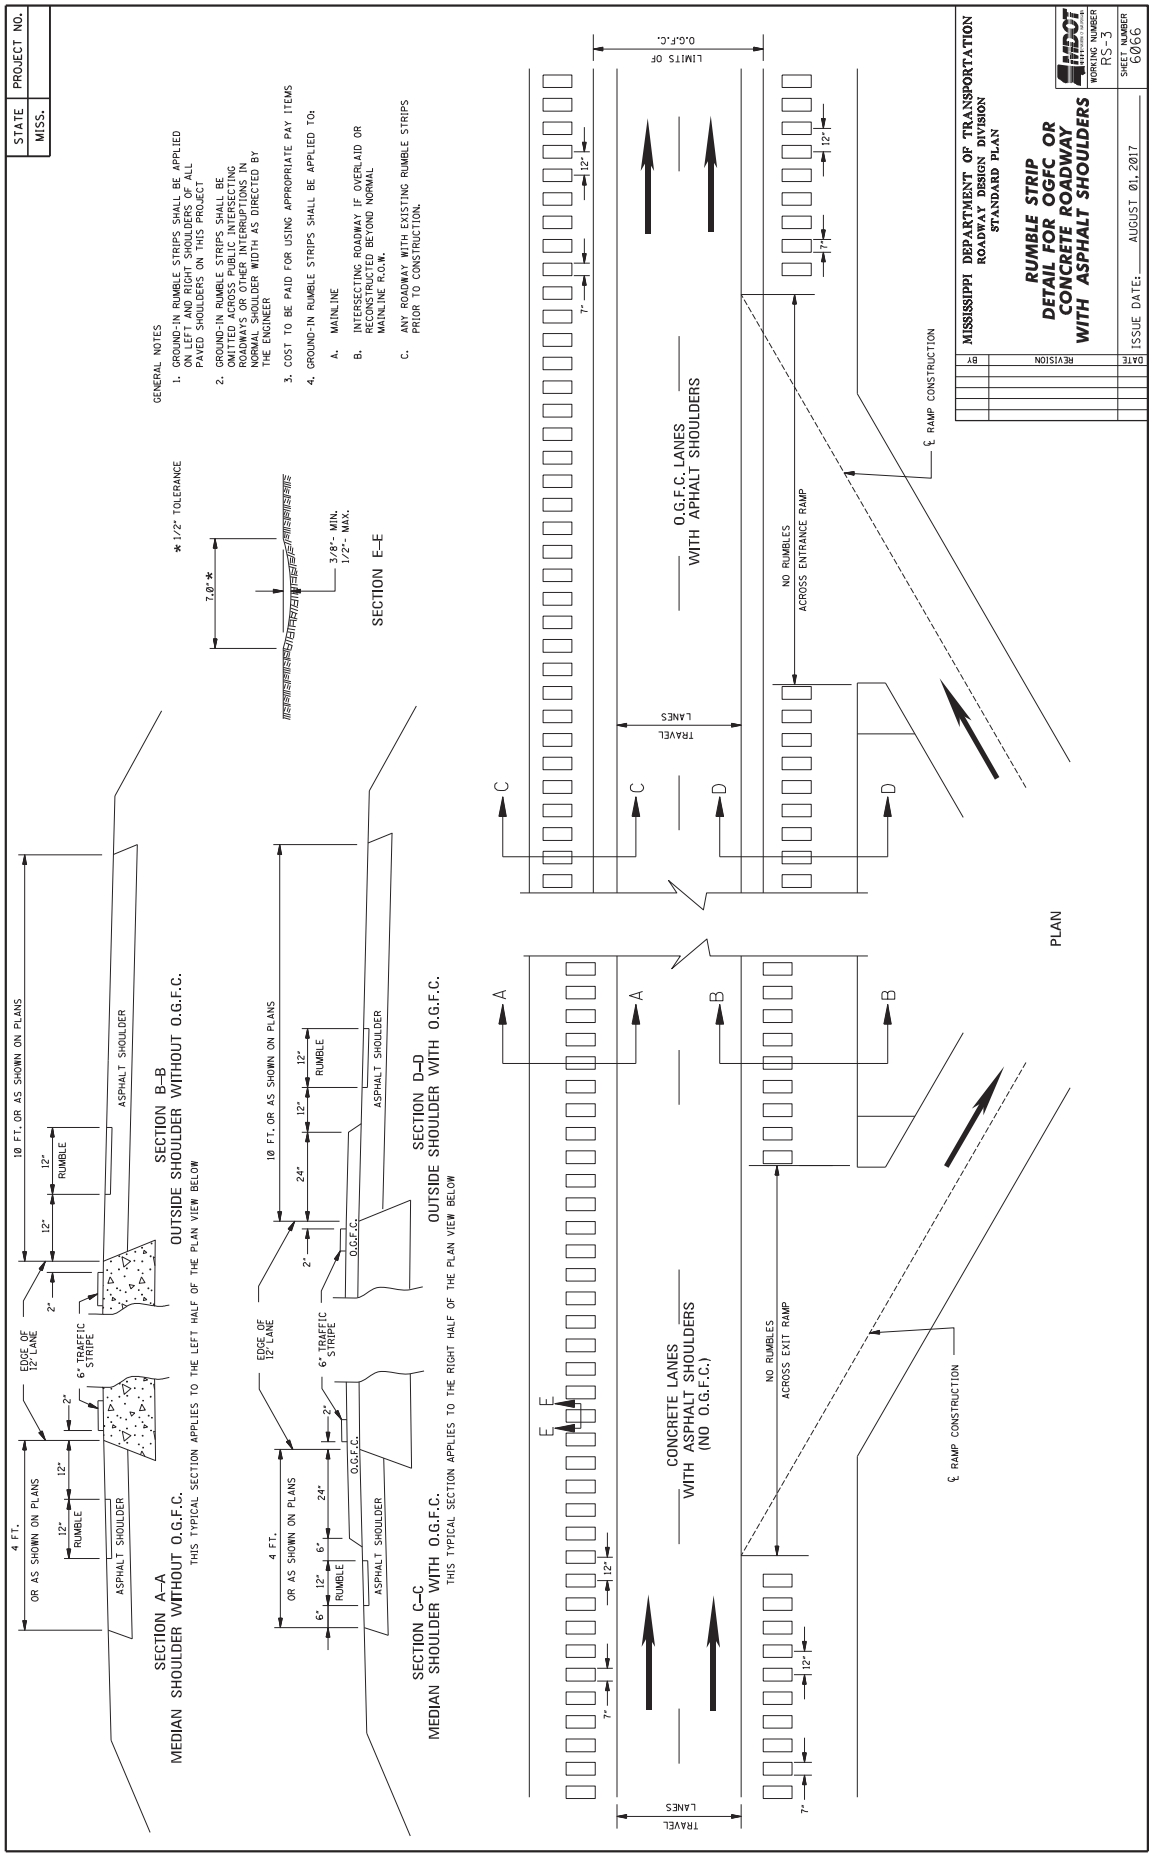

STATE
MISS.
PROJECT NO.
TYPICAL PLACEMENT OF RETROREFLECTIVE RAISED PAVEMENT MARKERS ON SIDE ROAD RADIUS 2-LANE, TWO WAY TRAFFIC
40' FROM END OF RADIUS OR TAPER
40' FROM BEGINNING OF RADIUS OR TAPER
10'
10'
SEE DETAIL "A"
DIRECTION OF TRAFFIC
CONT. WHITE
6"
2"
DETAIL A
GENERAL NOTES:
1. RETROREFLECTIVE FACES OF MARKERS SHALL BE VISIBLE TO THE TRAVELING MOTORIST ON STATE DESIGNATED HIGHWAYS.
2. RETROREFLECTIVE FACES OF MARKERS SHALL BE HIGH PERFORMANCE TWO-WAY CLEAR.
3. RETROREFLECTIVE FACES OF MARKERS SHALL NOT BE ROTATED WHEN BEING PLACED ALONG RADIUS AND TANGENT SECTION OF LOCAL ROAD.
4. MARKERS SHALL BE INSTALLED TO THE LIMITS SHOWN ABOVE.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
2-WAY RETROREFLECTIVE RAISED PAVEMENT MARKERS AT INTERSECTING ROADS (2-LANE)
WORKING NUMBER PM-11
SHEET NUMBER 6061
ISSUE DATE: AUGUST 01, 2017
DATE
REVISION
BY
12/11/20
REVISED TEXT.
STN

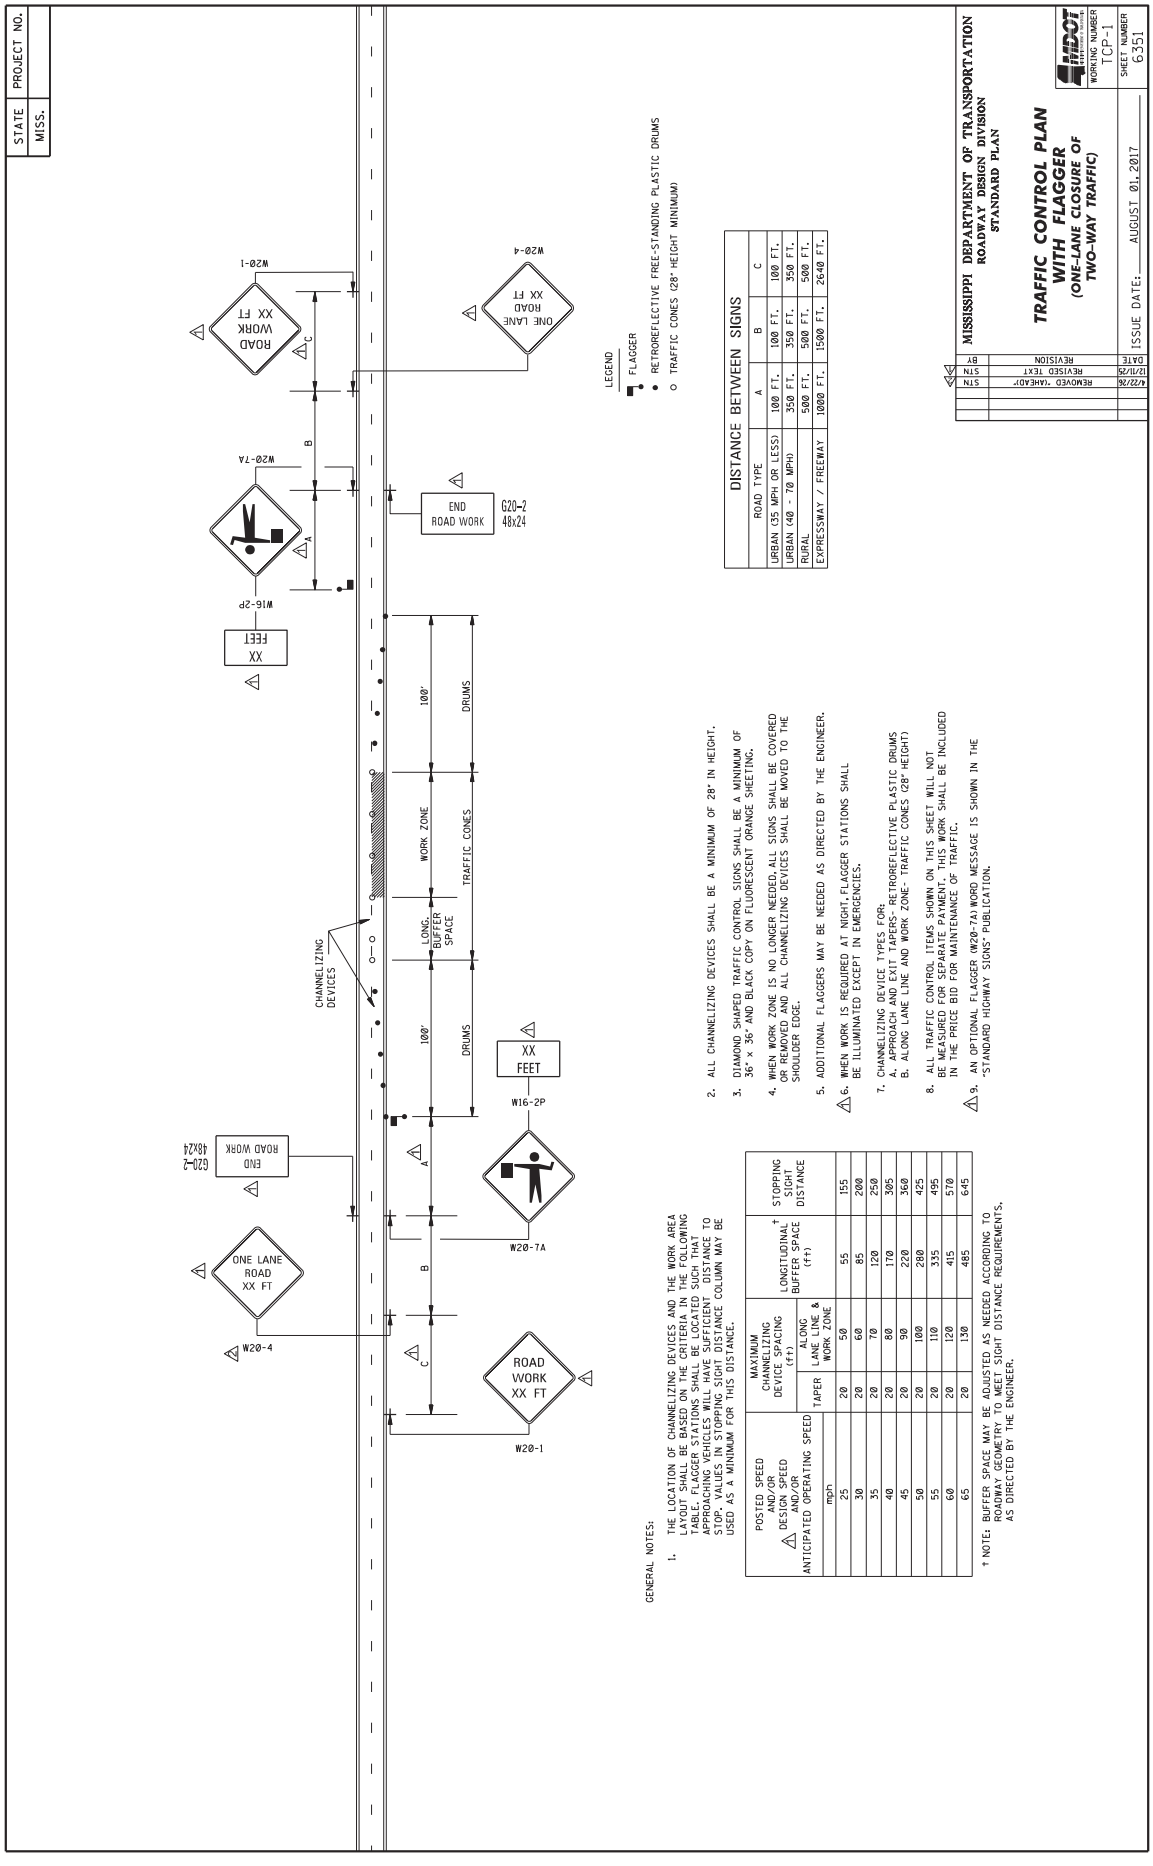

STATE
MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
2-WAY RETROREFLECTIVE RAISED PAVEMENT MARKERS AT INTERSECTING ROADS (4-LANE)
WORKING NUMBER PM-12
SHEET NUMBER 6062
ISSUE DATE: AUGUST 01, 2017
DATE
REVISION
BY
12/11/20
REVISED TEXT.
STM
TYPICAL PLACEMENT OF RETROREFLECTIVE RAISED PAVEMENT MARKERS ON SIDE ROAD RADIUS 4-LANE, TWO WAY TRAFFIC
40' FROM END OF RADIUS OR TAPER
40' FROM BEGINNING OF RADIUS OR TAPER
10'
10'
SEE DETAIL "A"
DIRECTION OF TRAFFIC
CONT. WHITE
6"
2"
DETAIL A
GENERAL NOTES:
1. RETROREFLECTIVE FACES OF MARKERS SHALL BE VISIBLE TO THE TRAVELING MOTORIST ON STATE DESIGNATED HIGHWAYS.
2. RETROREFLECTIVE FACES OF MARKERS SHALL BE HIGH PERFORMANCE TWO-WAY CLEAR.

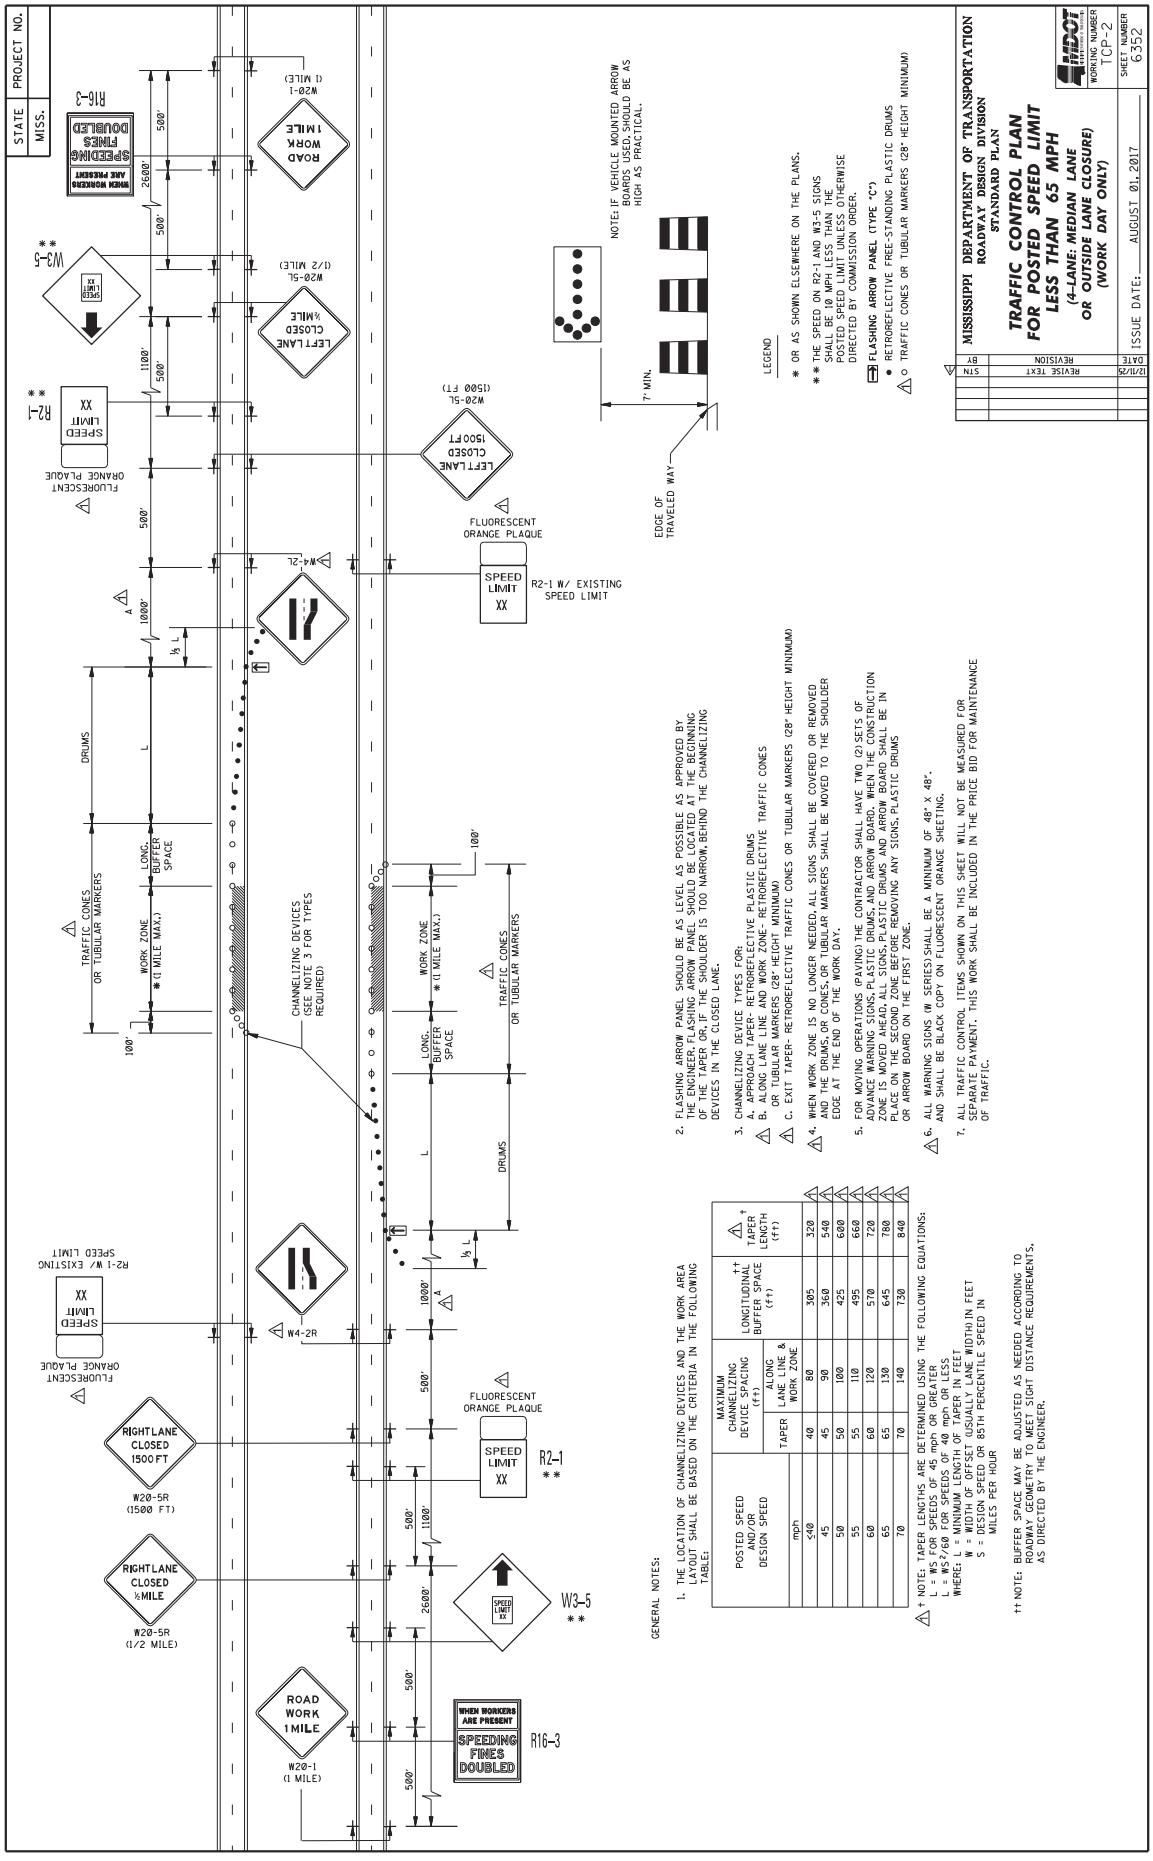

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
OFFSET LEFT TURN LANES
WORKING NUMBER PM-13
SHEET NUMBER 6063
ISSUE DATE: AUGUST 01, 2017
REVISION
ADDED TEXT AND DWGS, ADDED YIELD BARS.
DATE 12/11/25
BY STN
GENERAL NOTES:
1. UNSIGNALIZED INTERSECTION SHOWN. STOP BARS REQUIRED ONLY WHERE INTERSECTION IS SIGNALIZED OR MULTI-WAY STOP CONTROLLED.
2. SEE MK. NOS. PM-1, PM-3 and PM-6 FOR OTHER DETAILS.
3. TAPER LENGTH VARIES WITH MEDIAN WIDTH.
4. TAPERED OFFSET LEFT TURN LANE SHOWN. PARALLEL OFFSET LEFT TURN LANE PAVEMENT MARKINGS ARE SIMILAR.
5. 3-LANE SIDE ROAD SHOWN. SEE PERMANENT PAVEMENT MARKING DETAIL SHEETS FOR SIDE ROAD PAVEMENT MARKING DETAILS.
6. SEE PM-12 FOR INTERSECTING ROAD RAISED PAVEMENT MARKER PLACEMENT.
MEDIAN WIDTH VARIES
6" EDGE YELLOW
6" DET. YELLOW
GREATER THAN OR EQUAL TO ½ MEDIAN WIDTH
LESS THAN OR EQUAL TO ½ MEDIAN WIDTH
10' RADIUS TYPICAL
150' RADIUS
6" DET. YELLOW
6" EDGE YELLOW
24" STOP BAR (LEGEND)
14' MIN.
LEGEND WHITE YIELD BAR (SP)
6" DET. YELLOW
6" EDGE YELLOW
12.5:1 TAPER TYPICAL
SEE DETAIL "A"
6" EDGE YELLOW
6" DETAIL YELLOW
RED-CLEAR RETROREFLECTIVE RAISED MARKER
DETAIL B
12" DETAIL YELLOW
2"
RED-CLEAR RETROREFLECTIVE RAISED MARKER
RED-CLEAR RETROREFLECTIVE RAISED MARKERS
12" DETAIL WHITE
10'
10'
2' MIN.
45°
18" DETAIL WHITE
DETAIL A

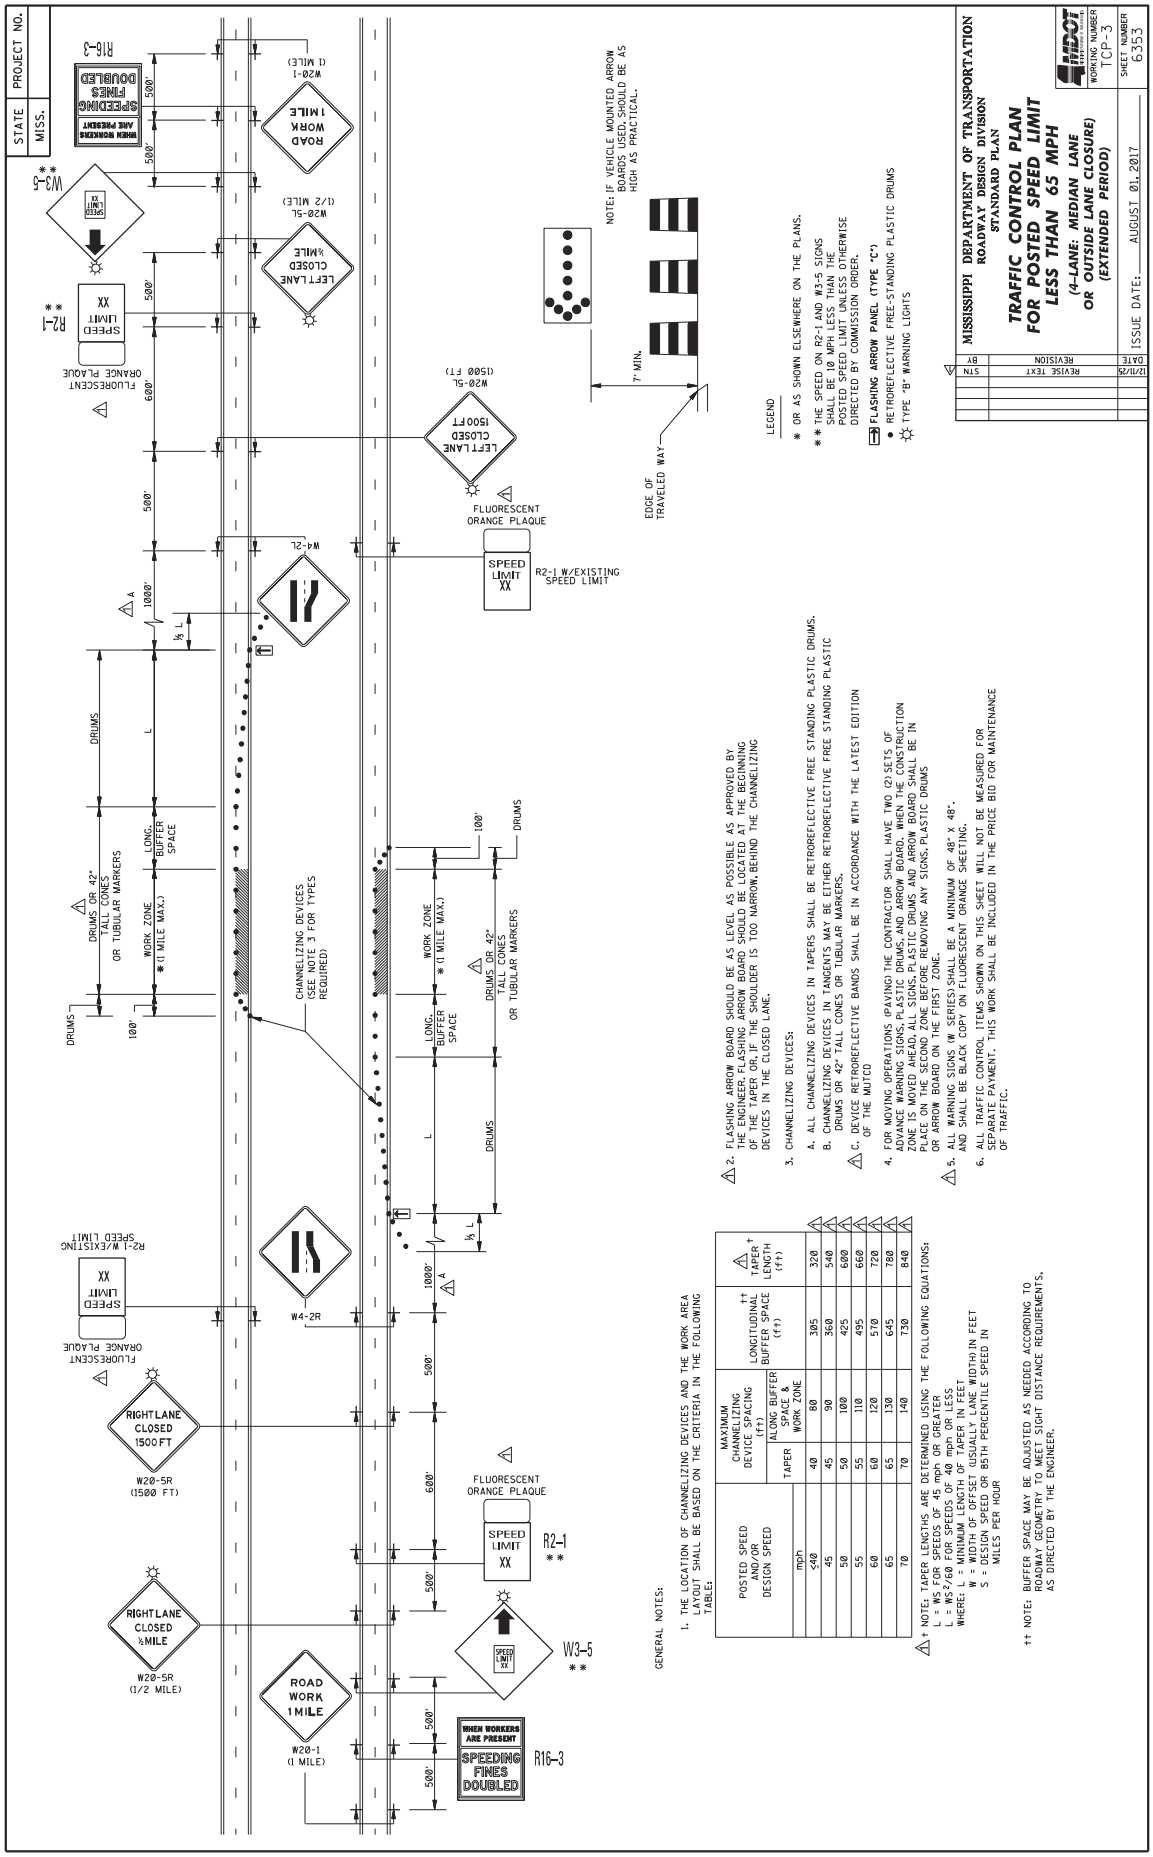

STATE
MISS.
PROJECT NO.
GENERAL NOTES
1. GROUND-IN RUMBLE STRIPES SHALL BE APPLIED ON LEFT AND RIGHT SHOULDERS OF ALL PAVED SHOULDERS ON THIS PROJECT
2. GROUND-IN RUMBLE STRIPES SHALL BE OMITTED ACROSS PUBLIC INTERSECTING ROADWAYS OR OTHER INTERRUPTIONS IN NORMAL SHOULDER WIDTH AS DIRECTED BY THE ENGINEER
3. COST TO BE PAID FOR USING APPROPRIATE PAY ITEMS
4. GROUND-IN RUMBLE STRIPES SHALL BE APPLIED TO:
A. MAINLINE
B. INTERSECTING ROADWAY IF OVERLAID OR RECONSTRUCTED BEYOND NORMAL MAINLINE R.O.W.
C. ANY ROADWAY WITH EXISTING RUMBLE STRIPES PRIOR TO CONSTRUCTION.
5. OMIT GROUND-IN RUMBLE STRIPS WHERE TRAFFIC LANE IS LESS THAN 11 FEET WIDE.
EDGE OF PAVED SHOULDER
6" TRAFFIC STRIPE
EDGE OF TRAFFIC LANE
12"
7"
DETAIL "A"
7.0" *
*1/2" TOLERANCE
3/8" - MIN.
1/2" - MAX.
SECTION "A-A"
VARIABLE SHOULDER
2' PAVED SHOULDER
11' or 12'
TRAVEL LANES
SEE DETAIL "A"
PLAN
NOT TO SCALE
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
RUMBLE STRIPES
2-LANE HIGHWAYS
(ASPHALT LANES,
2-FT ASPHALT SHOULDERS)
WORKING NUMBER RS-1
SHEET NUMBER 6064
ISSUE DATE: AUGUST 01, 2017
STN
BY
REVISION
DATE
12/11/25 REVISED TEXT AND STRIPE DETAIL.

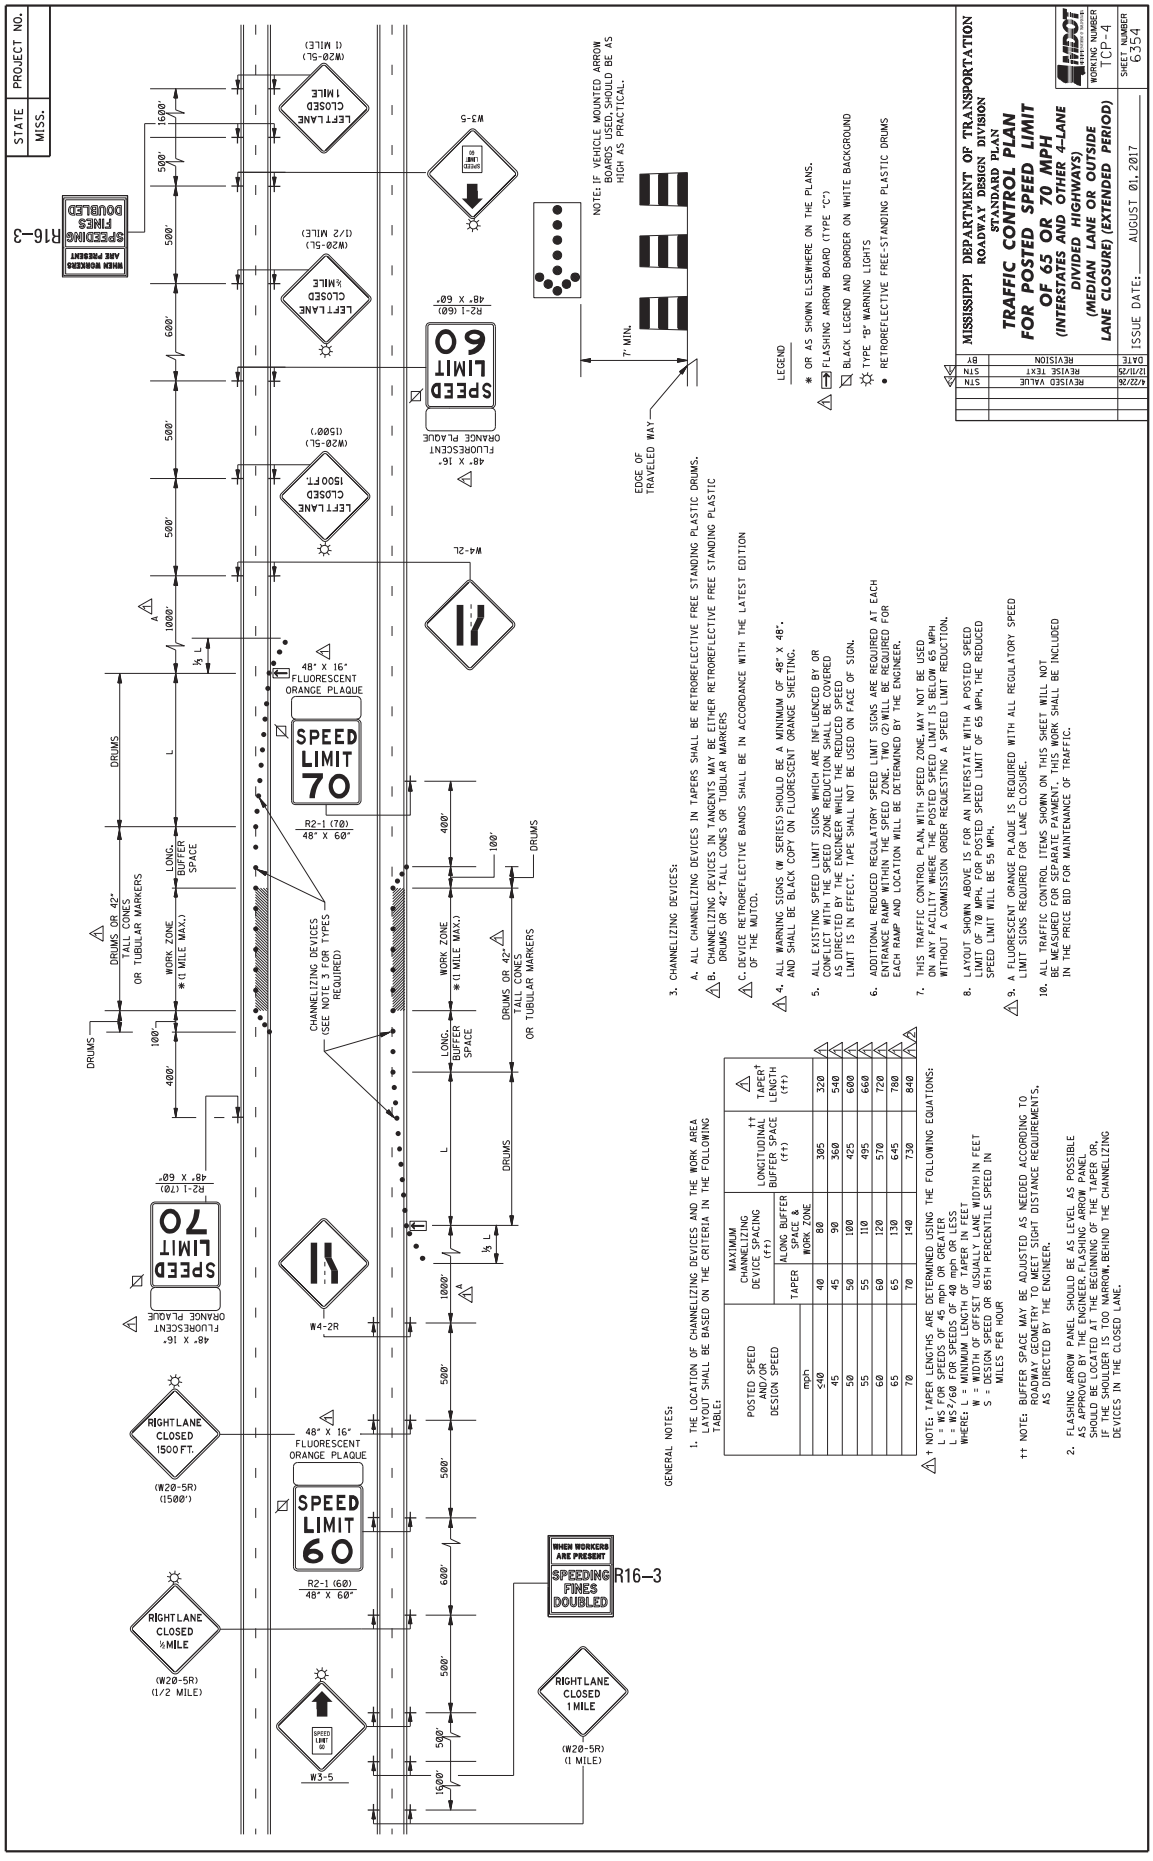

STATE
MISS.
PROJECT NO.
GENERAL NOTES
1. GROUND-IN RUMBLE STRIPES SHALL BE APPLIED ON LEFT AND RIGHT SHOULDERS OF ALL PAVED SHOULDERS ON THIS PROJECT
2. GROUND-IN RUMBLE STRIPES SHALL BE OMITTED ACROSS PUBLIC INTERSECTING ROADWAYS OR OTHER INTERRUPTIONS IN NORMAL SHOULDER WIDTH AS DIRECTED BY THE ENGINEER
3. COST TO BE PAID FOR USING APPROPRIATE PAY ITEMS
4. GROUND-IN RUMBLE STRIPES SHALL BE APPLIED TO:
A. MAINLINE
B. INTERSECTING ROADWAY IF OVERLAID OR RECONSTRUCTED BEYOND NORMAL MAINLINE R.O.W.
C. ANY ROADWAY WITH EXISTING RUMBLE STRIPES PRIOR TO CONSTRUCTION.
6" TRAFFIC STRIPE
EDGE OF PAVED SHOULDER
EDGE OF TRAFFIC LANE
12"
7"
12" VAR.
VARIABLE
DETAIL "A"
7.0"*
* 1/2" TOLERANCE
3/8"- MIN.
1/2"- MAX.
SECTION "A–A"
VARIABLE SHLD
TRAVEL LANES
VARIABLE SHLD
SEE DETAIL "A"
GRAN. MAT'L
PAVED SHLD
NO SHOULDER RUMBLES
PAVED SHLD
GRAN. MAT'L
℄ RAMP CONSTRUCTION
PLAN
NOT TO SCALE
DETAILS OF RUMBLE STRIPS
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
RUMBLE STRIPES
4-LANE HIGHWAYS
(ASPHALT LANES,
2-FT OR WIDER
ASPHALT SHOULDERS)
WORKING NUMBER
RS-2
SHEET NUMBER
6065
ISSUE DATE: AUGUST 01, 2017
STN
BY
REVISION
DATE
12/1/23
REVISED STRIPE DETAIL.

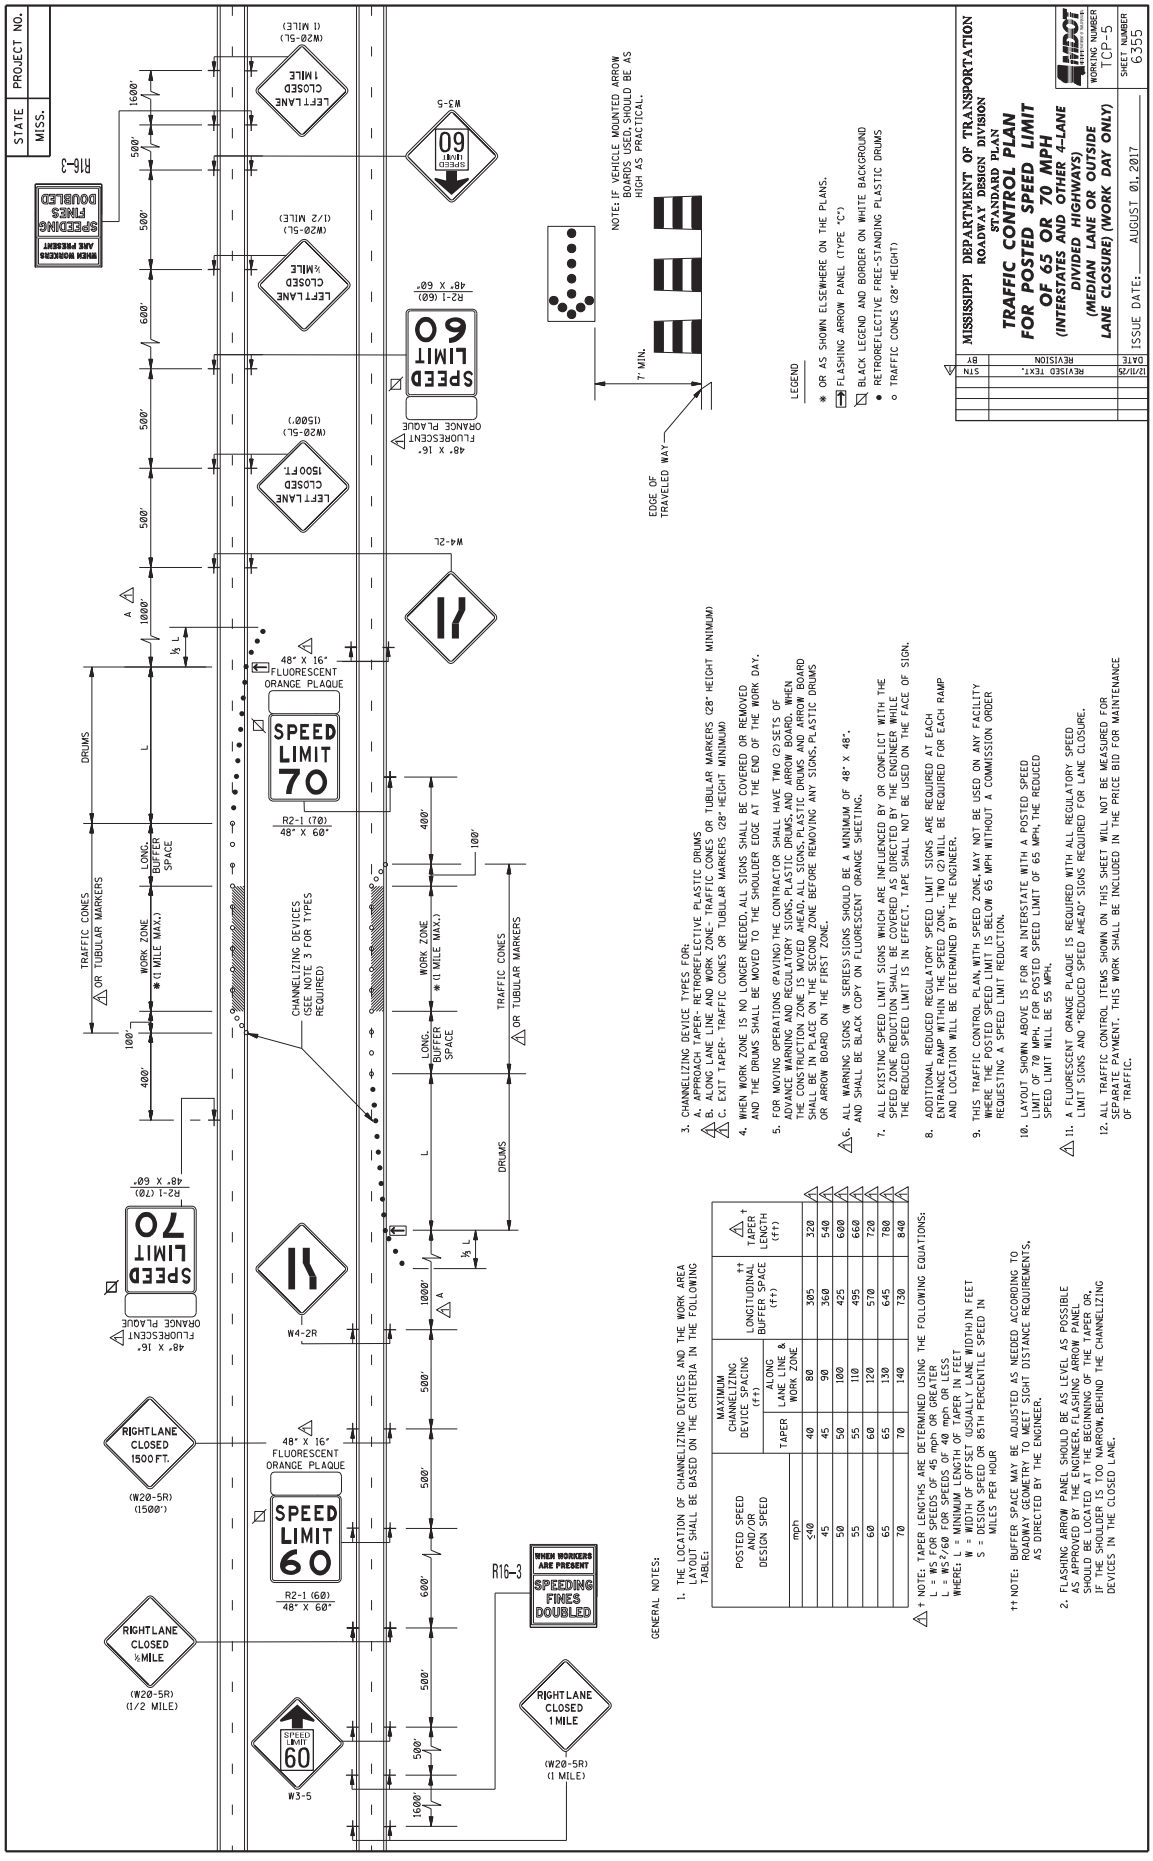

STATE MISS.
PROJECT NO.
GENERAL NOTES
1. GROUND-IN RUMBLE STRIPS SHALL BE APPLIED ON LEFT AND RIGHT SHOULDERS OF ALL PAVED SHOULDERS ON THIS PROJECT
2. GROUND-IN RUMBLE STRIPS SHALL BE OMITTED ACROSS PUBLIC INTERSECTING ROADWAYS OR OTHER INTERRUPTIONS IN NORMAL SHOULDER WIDTH AS DIRECTED BY THE ENGINEER
3. COST TO BE PAID FOR USING APPROPRIATE PAY ITEMS
4. GROUND-IN RUMBLE STRIPS SHALL BE APPLIED TO:
A. MAINLINE
B. INTERSECTING ROADWAY IF OVERLAID OR RECONSTRUCTED BEYOND NORMAL MAINLINE R.O.W.
C. ANY ROADWAY WITH EXISTING RUMBLE STRIPS PRIOR TO CONSTRUCTION.
* 1/2" TOLERANCE
7.0"*
3/8"- MIN. 1/2"- MAX.
SECTION E–E
SECTION A–A
MEDIAN SHOULDER WITHOUT O.G.F.C.
THIS TYPICAL SECTION APPLIES TO THE LEFT HALF OF THE PLAN VIEW BELOW
4 FT. OR AS SHOWN ON PLANS
EDGE OF 12' LANE
6" TRAFFIC STRIPE
12" RUMBLE
ASPHALT SHOULDER
SECTION B–B
OUTSIDE SHOULDER WITHOUT O.G.F.C.
10 FT. OR AS SHOWN ON PLANS
SECTION C–C
MEDIAN SHOULDER WITH O.G.F.C.
THIS TYPICAL SECTION APPLIES TO THE RIGHT HALF OF THE PLAN VIEW BELOW
O.G.F.C.
SECTION D–D
OUTSIDE SHOULDER WITH O.G.F.C.
PLAN
LIMITS OF O.G.F.C.
TRAVEL LANES
O.G.F.C. LANES WITH APHALT SHOULDERS
CONCRETE LANES WITH ASPHALT SHOULDERS (NO O.G.F.C.)
NO RUMBLES ACROSS ENTRANCE RAMP
NO RUMBLES ACROSS EXIT RAMP
℄ RAMP CONSTRUCTION
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
RUMBLE STRIP DETAIL FOR OGFC OR CONCRETE ROADWAY WITH ASPHALT SHOULDERS
WORKING NUMBER RS-3
SHEET NUMBER 6066
ISSUE DATE: AUGUST 01, 2017
BY REVISION DATE

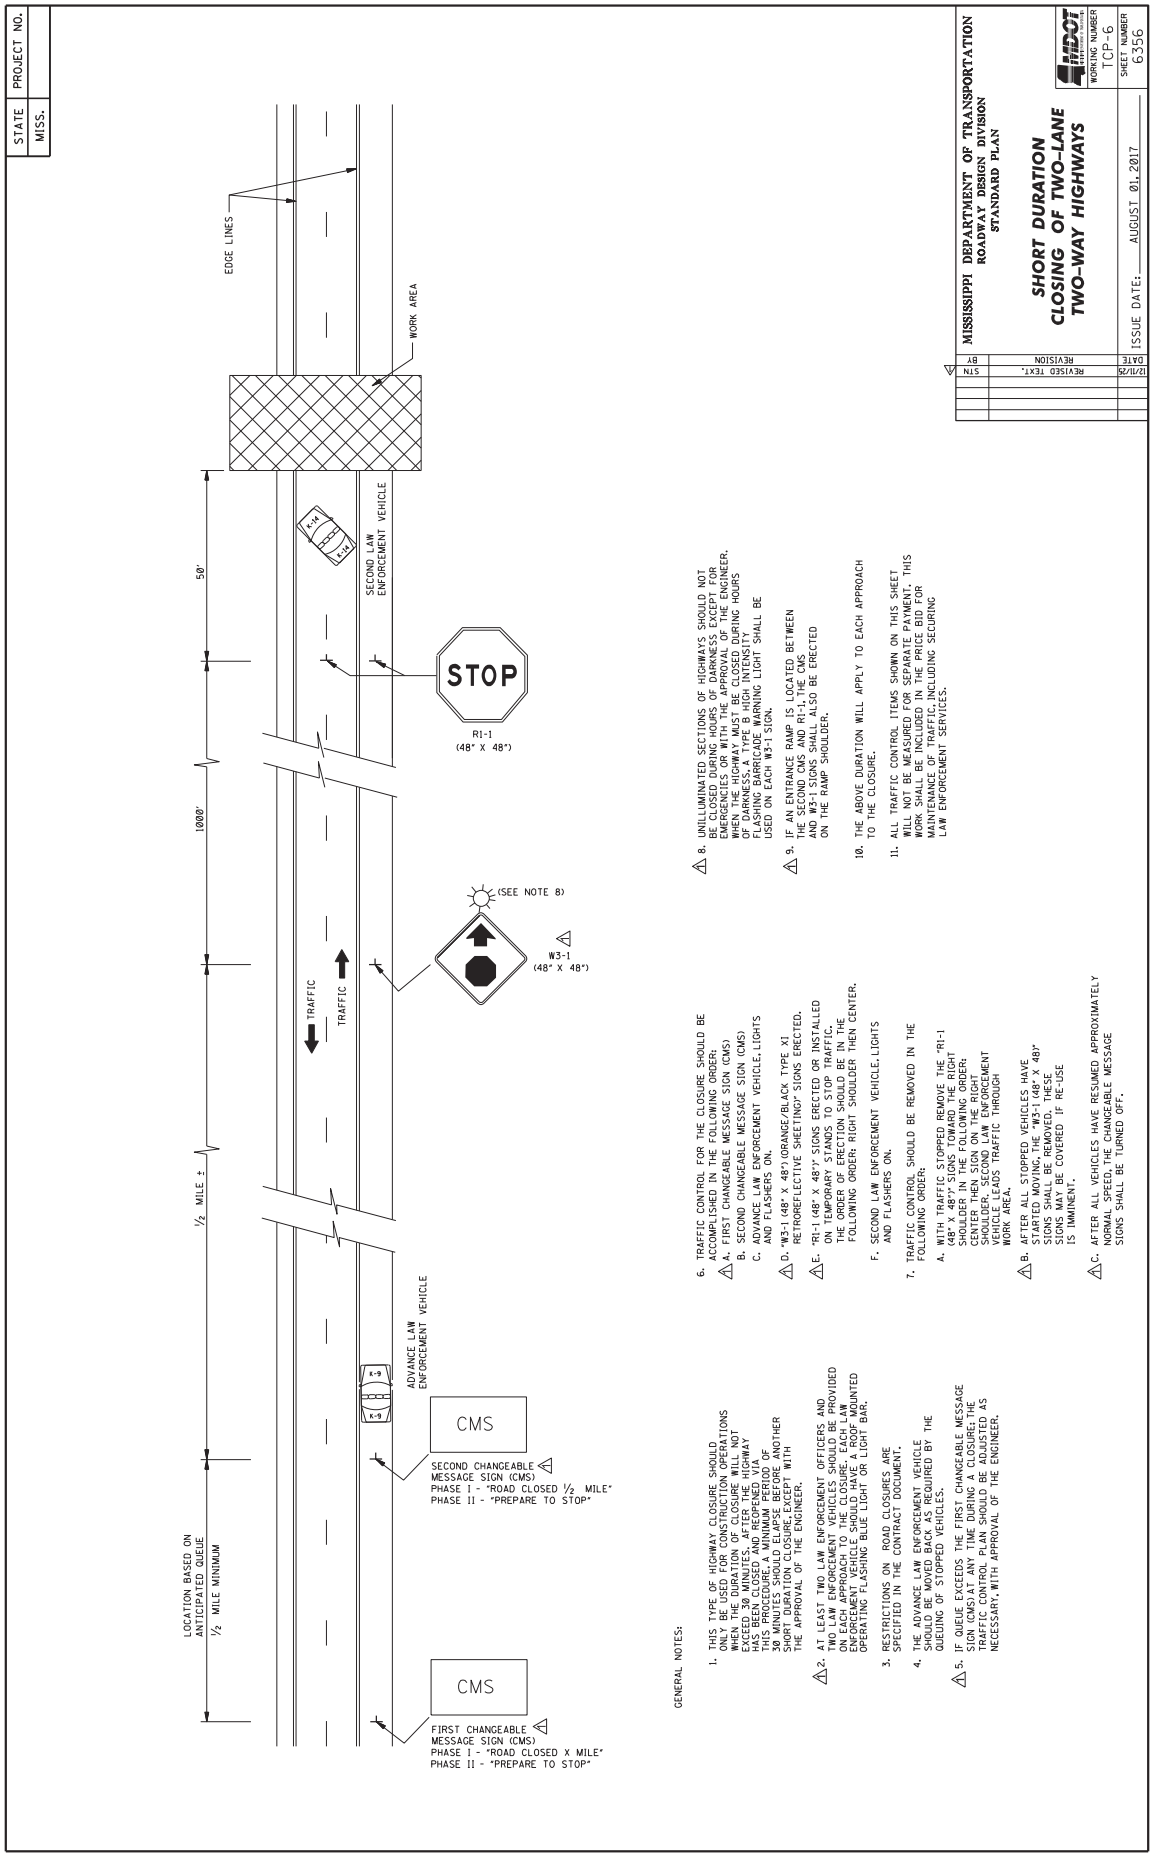

STATE
MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
TRAFFIC CONTROL PLAN
WITH FLAGGER
(ONE-LANE CLOSURE OF TWO-WAY TRAFFIC)
WORKING NUMBER TCP-1
SHEET NUMBER 6351
ISSUE DATE: AUGUST 01, 2017
DATE
REVISION
BY
4/22/26 REMOVED "AHEAD" STN
12/1/25 REVISED TEXT STN
ROAD WORK XX FT
W20-1
ONE LANE ROAD XX FT
W20-4
END ROAD WORK
G20-2 48x24
W20-7A
XX FEET
W16-2P
CHANNELIZING DEVICES
LONG. BUFFER SPACE
WORK ZONE
TRAFFIC CONES
DRUMS
100'
LEGEND
FLAGGER
RETROREFLECTIVE FREE-STANDING PLASTIC DRUMS
TRAFFIC CONES (28" HEIGHT MINIMUM)
DISTANCE BETWEEN SIGNS
ROAD TYPE
A
B
C
URBAN (35 MPH OR LESS)
100 FT.
100 FT.
100 FT.
URBAN (40 - 70 MPH)
350 FT.
350 FT.
350 FT.
RURAL
500 FT.
500 FT.
500 FT.
EXPRESSWAY / FREEWAY
1000 FT.
1500 FT.
2640 FT.
GENERAL NOTES:
1. THE LOCATION OF CHANNELIZING DEVICES AND THE WORK AREA LAYOUT SHALL BE BASED ON THE CRITERIA IN THE FOLLOWING TABLE. FLAGGER STATIONS SHALL BE LOCATED SUCH THAT APPROACHING VEHICLES WILL HAVE SUFFICIENT DISTANCE TO STOP. VALUES IN STOPPING SIGHT DISTANCE COLUMN MAY BE USED AS A MINIMUM FOR THIS DISTANCE.
2. ALL CHANNELIZING DEVICES SHALL BE A MINIMUM OF 28" IN HEIGHT.
3. DIAMOND SHAPED TRAFFIC CONTROL SIGNS SHALL BE A MINIMUM OF 36" x 36" AND BLACK COPY ON FLUORESCENT ORANGE SHEETING.
4. WHEN WORK ZONE IS NO LONGER NEEDED, ALL SIGNS SHALL BE COVERED OR REMOVED AND ALL CHANNELIZING DEVICES SHALL BE MOVED TO THE SHOULDER EDGE.
5. ADDITIONAL FLAGGERS MAY BE NEEDED AS DIRECTED BY THE ENGINEER.
6. WHEN WORK IS REQUIRED AT NIGHT, FLAGGER STATIONS SHALL BE ILLUMINATED EXCEPT IN EMERGENCIES.
7. CHANNELIZING DEVICE TYPES FOR:
A. APPROACH AND EXIT TAPERS- RETROREFLECTIVE PLASTIC DRUMS
B. ALONG LANE LINE AND WORK ZONE- TRAFFIC CONES (28" HEIGHT)
8. ALL TRAFFIC CONTROL ITEMS SHOWN ON THIS SHEET WILL NOT BE MEASURED FOR SEPARATE PAYMENT. THIS WORK SHALL BE INCLUDED IN THE PRICE BID FOR MAINTENANCE OF TRAFFIC.
9. AN OPTIONAL FLAGGER (W20-7A) WORD MESSAGE IS SHOWN IN THE "STANDARD HIGHWAY SIGNS" PUBLICATION.
POSTED SPEED AND/OR DESIGN SPEED AND/OR ANTICIPATED OPERATING SPEED
MAXIMUM CHANNELIZING DEVICE SPACING (FT)
TAPER
ALONG LANE LINE & WORK ZONE
LONGITUDINAL† BUFFER SPACE (FT)
STOPPING SIGHT DISTANCE
mph
25 20 50 55 155
30 20 60 85 200
35 20 70 120 250
40 20 80 170 305
45 20 90 220 360
50 20 100 280 425
55 20 110 335 495
60 20 120 415 570
65 20 130 485 645
† NOTE: BUFFER SPACE MAY BE ADJUSTED AS NEEDED ACCORDING TO ROADWAY GEOMETRY TO MEET SIGHT DISTANCE REQUIREMENTS, AS DIRECTED BY THE ENGINEER.

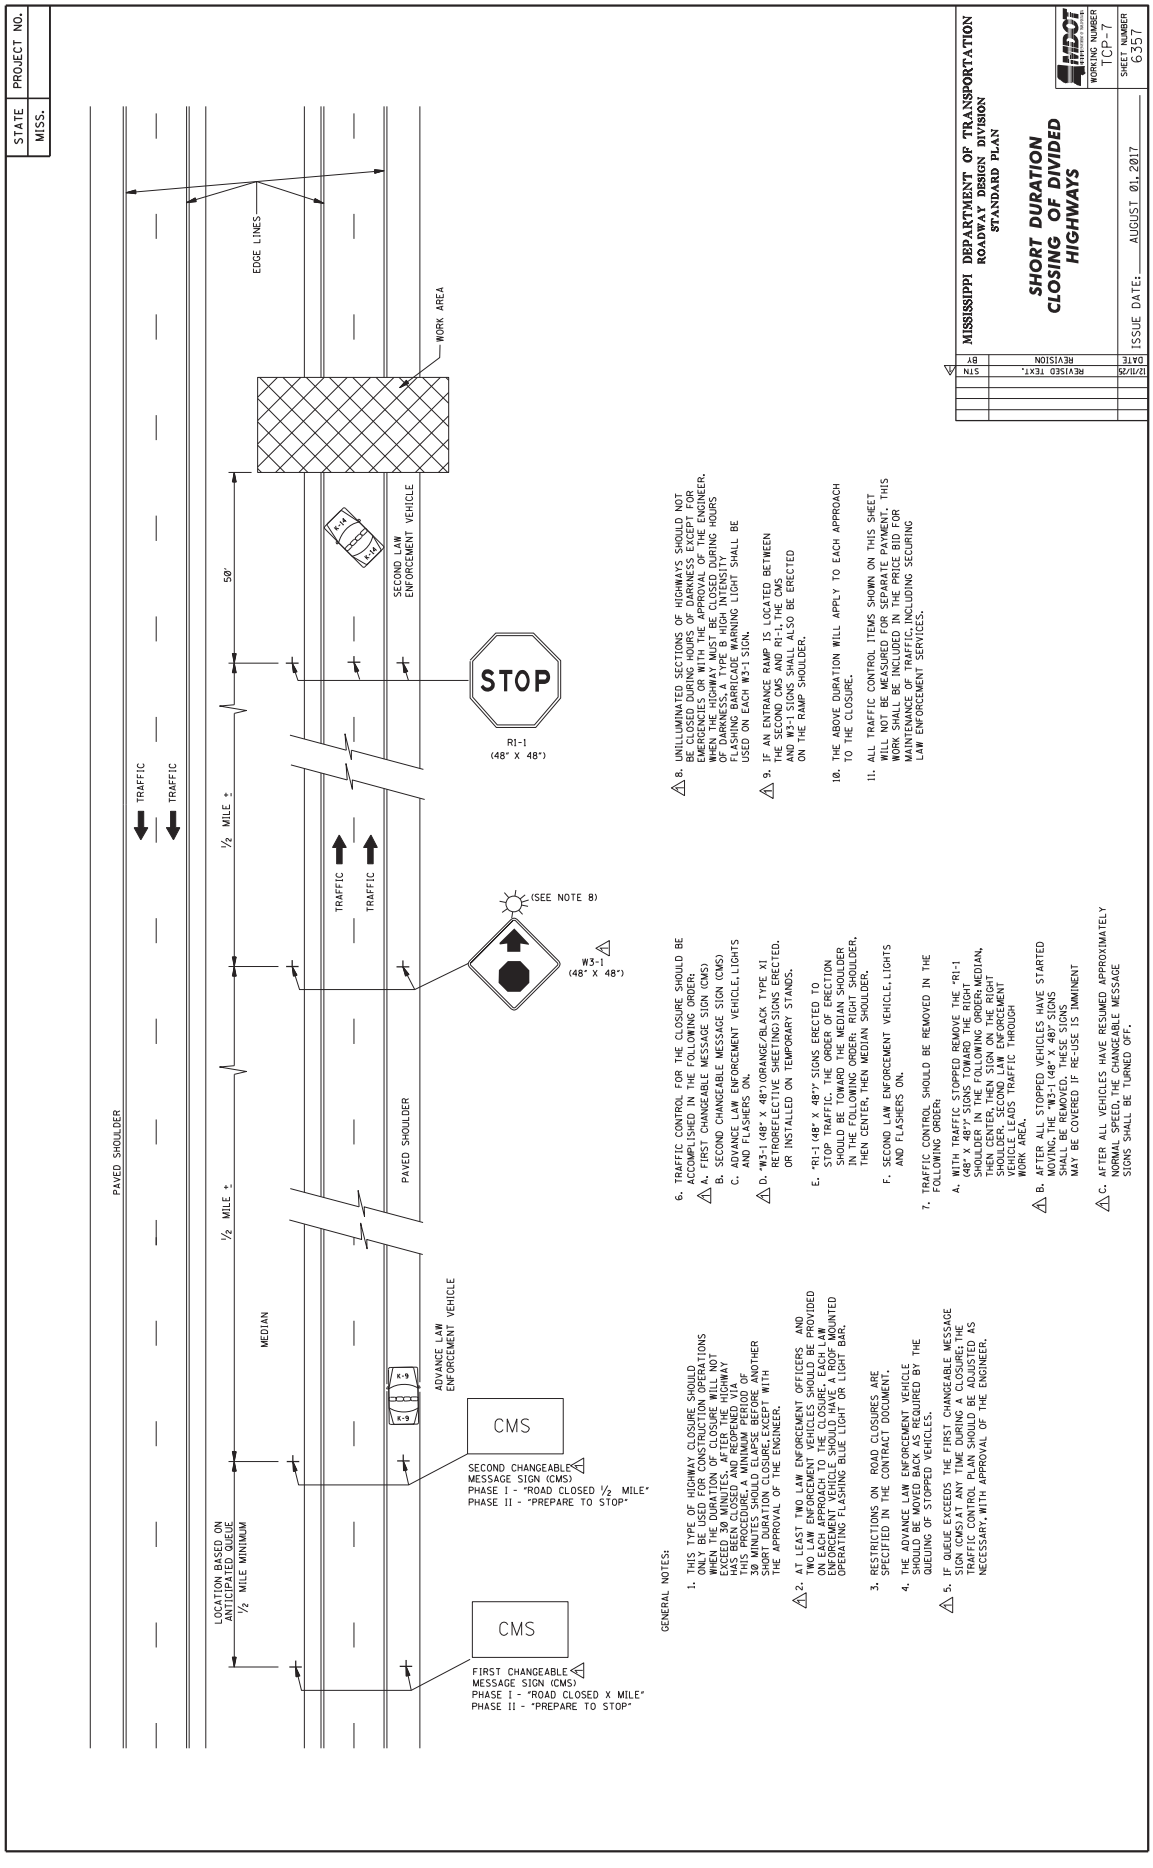

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
TRAFFIC CONTROL PLAN
FOR POSTED SPEED LIMIT
LESS THAN 65 MPH
(4-LANE: MEDIAN LANE
OR OUTSIDE LANE CLOSURE)
(WORK DAY ONLY)
WORKING NUMBER TCP-2
SHEET NUMBER 6352
ISSUE DATE: AUGUST 01, 2017
REVISION BY DATE
REVISE TEXT STN 12/1/25
LEGEND
* OR AS SHOWN ELSEWHERE ON THE PLANS.
** THE SPEED ON R2-1 AND W3-5 SIGNS SHALL BE 10 MPH LESS THAN THE POSTED SPEED LIMIT UNLESS OTHERWISE DIRECTED BY COMMISSION ORDER.
FLASHING ARROW PANEL (TYPE "C")
RETROREFLECTIVE FREE-STANDING PLASTIC DRUMS
TRAFFIC CONES OR TUBULAR MARKERS (28" HEIGHT MINIMUM)
NOTE: IF VEHICLE MOUNTED ARROW BOARDS USED, SHOULD BE AS HIGH AS PRACTICAL.
7' MIN.
EDGE OF TRAVELED WAY
ROAD WORK 1 MILE
W20-1 (1 MILE)
LEFT LANE CLOSED ½ MILE
W20-5L (1/2 MILE)
LEFT LANE CLOSED 1500 FT
W20-5L (1500 FT)
WHEN WORKERS ARE PRESENT SPEEDING FINES DOUBLED
R16-3
W3-5 **
SPEED LIMIT XX
R2-1 **
FLUORESCENT ORANGE PLAQUE
R2-1 W/ EXISTING SPEED LIMIT
W4-2L
W4-2R
RIGHT LANE CLOSED 1500 FT
W20-5R (1500 FT)
RIGHT LANE CLOSED ½MILE
W20-5R (1/2 MILE)
TRAFFIC CONES OR TUBULAR MARKERS
LONG. BUFFER SPACE
WORK ZONE * (1 MILE MAX.)
DRUMS
CHANNELIZING DEVICES (SEE NOTE 3 FOR TYPES REQUIRED)
100'
500'
1000'
1100'
2600'
⅓ L
L
A
GENERAL NOTES:
1. THE LOCATION OF CHANNELIZING DEVICES AND THE WORK AREA LAYOUT SHALL BE BASED ON THE CRITERIA IN THE FOLLOWING TABLE:
2. FLASHING ARROW PANEL SHOULD BE AS LEVEL AS POSSIBLE AS APPROVED BY THE ENGINEER. FLASHING ARROW PANEL SHOULD BE LOCATED AT THE BEGINNING OF THE TAPER OR, IF THE SHOULDER IS TOO NARROW, BEHIND THE CHANNELIZING DEVICES IN THE CLOSED LANE.
3. CHANNELIZING DEVICE TYPES FOR:
A. APPROACH TAPER- RETROREFLECTIVE PLASTIC DRUMS
B. ALONG LANE LINE AND WORK ZONE- RETROREFLECTIVE TRAFFIC CONES OR TUBULAR MARKERS (28" HEIGHT MINIMUM)
C. EXIT TAPER- RETROREFLECTIVE TRAFFIC CONES OR TUBULAR MARKERS (28" HEIGHT MINIMUM)
4. WHEN WORK ZONE IS NO LONGER NEEDED, ALL SIGNS SHALL BE COVERED OR REMOVED AND VEHICLE CONES OR TUBULAR MARKERS SHALL BE MOVED TO THE SHOULDER EDGE AT THE END OF THE WORK DAY.
5. FOR MOVING OPERATIONS (PAVING) THE CONTRACTOR SHALL HAVE TWO (2) SETS OF ADVANCE WARNING SIGNS, PLASTIC DRUMS, AND ARROW BOARD. WHEN THE CONSTRUCTION ZONE IS MOVED AHEAD, ALL SIGNS, PLASTIC DRUMS AND ARROW BOARD SHALL BE IN PLACE ON THE SECOND SET BEFORE REMOVING ANY SIGNS, PLASTIC DRUMS OR ARROW BOARD ON THE "FIRST ZONE.
6. ALL WARNING SIGNS (W SERIES) SHALL BE A MINIMUM OF 48" X 48", AND SHALL BE BLACK COPY ON FLUORESCENT ORANGE SHEETING.
7. ALL TRAFFIC CONTROL ITEMS SHOWN ON THIS SHEET WILL NOT BE MEASURED FOR SEPARATE PAYMENT. THIS WORK SHALL BE INCLUDED IN THE PRICE BID FOR MAINTENANCE OF TRAFFIC.
POSTED SPEED AND/OR DESIGN SPEED
MAXIMUM CHANNELIZING DEVICE SPACING (ft)
TAPER
ALONG LANE LINE & WORK ZONE
LONGITUDINAL BUFFER SPACE (ft) ††
TAPER † LENGTH (ft)
mph
≤40 40 80 305 320
45 40 90 360 540
50 50 100 425 600
55 55 110 495 660
60 60 120 570 720
65 65 130 645 780
70 70 140 730 840
† NOTE: TAPER LENGTHS ARE DETERMINED USING THE FOLLOWING EQUATIONS:
L = WS FOR SPEEDS OF 45 mph OR GREATER
L = WS²/60 FOR SPEEDS OF 40 mph OR LESS
WHERE: L = MINIMUM LENGTH OF TAPER IN FEET
W = WIDTH OF OFFSET (USUALLY LANE WIDTH) IN FEET
S = DESIGN SPEED OR 85TH PERCENTILE SPEED IN MILES PER HOUR
†† NOTE: BUFFER SPACE MAY BE ADJUSTED AS NEEDED ACCORDING TO ROADWAY GEOMETRY TO MEET SIGHT DISTANCE REQUIREMENTS, AS DIRECTED BY THE ENGINEER.

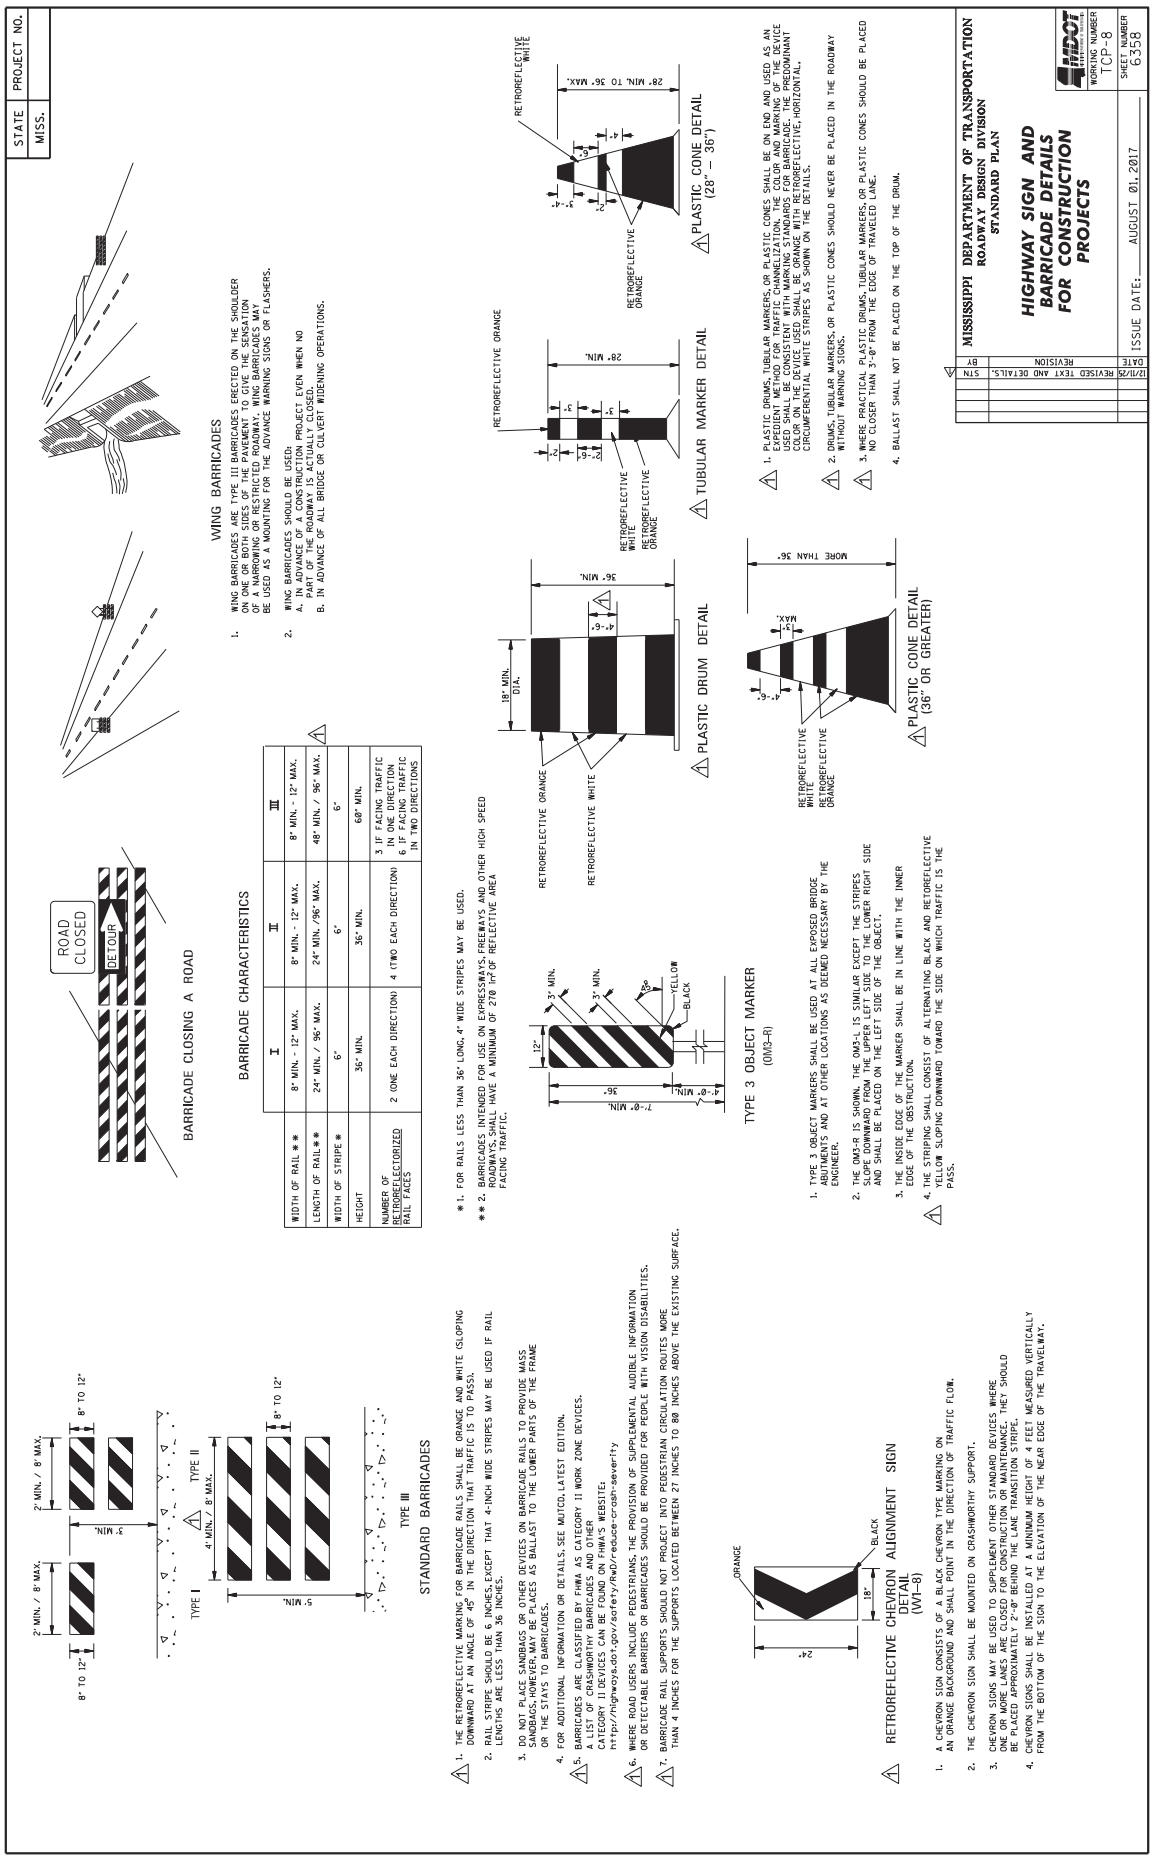

STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
TRAFFIC CONTROL PLAN
FOR POSTED SPEED LIMIT
LESS THAN 65 MPH
(4-LANE: MEDIAN LANE OR OUTSIDE LANE CLOSURE) (EXTENDED PERIOD)
WORKING NUMBER TCP-3
SHEET NUMBER 6353
ISSUE DATE: AUGUST 01, 2017
DATE REVISION BY
12/11/25 REVISE TEXT STN
LEGEND
* OR AS SHOWN ELSEWHERE ON THE PLANS.
** THE SPEED ON R2-1 AND W3-5 SIGNS SHALL BE 10 MPH LESS THAN THE POSTED SPEED LIMIT UNLESS OTHERWISE DIRECTED BY COMMISSION ORDER.
FLASHING ARROW PANEL (TYPE "C")
RETROREFLECTIVE FREE-STANDING PLASTIC DRUMS
TYPE "B" WARNING LIGHTS
NOTE: IF VEHICLE MOUNTED ARROW BOARDS USED, SHOULD BE AS HIGH AS PRACTICAL.
EDGE OF TRAVELED WAY
7' MIN.
ROAD WORK 1 MILE
W20-1 (1 MILE)
LEFT LANE CLOSED ½ MILE
W20-5L (1/2 MILE)
LEFT LANE CLOSED 1500 FT
W20-5L (1500 FT)
RIGHT LANE CLOSED ½ MILE
W20-5R (1/2 MILE)
RIGHT LANE CLOSED 1500 FT
W20-5R (1500 FT)
SPEED LIMIT XX
R2-1 **
R2-1 W/EXISTING SPEED LIMIT
FLUORESCENT ORANGE PLAQUE
W3-5 **
SPEED LIMIT XX
WHEN WORKERS ARE PRESENT
SPEEDING FINES DOUBLED
R16-3
W4-2R
W4-2L
DRUMS
DRUMS OR 42" TALL CONES OR TUBULAR MARKERS
WORK ZONE * (1 MILE MAX.)
LONG. BUFFER SPACE
CHANNELIZING DEVICES (SEE NOTE 3 FOR TYPES REQUIRED)
100'
500'
600'
1000'
A
½ L
L
GENERAL NOTES:
1. THE LOCATION OF CHANNELIZING DEVICES AND THE WORK AREA LAYOUT SHALL BE BASED ON THE CRITERIA IN THE FOLLOWING TABLE:
POSTED SPEED / DESIGN SPEED
MAXIMUM CHANNELIZING DEVICE SPACING (ft)
TAPER
ALONG BUFFER SPACE & WORK ZONE
LONGITUDINAL †† BUFFER SPACE (ft)
TAPER† LENGTH (ft)
mph
≤40 40 80 305 320
45 45 90 360 540
50 50 100 425 600
55 55 110 495 660
60 60 120 570 720
65 65 130 645 780
70 70 140 730 840
† NOTE: TAPER LENGTHS ARE DETERMINED USING THE FOLLOWING EQUATIONS:
L = WS²/60 FOR SPEEDS OF 45 mph OR GREATER
L = WS/60 FOR SPEEDS OF 40 mph OR LESS
WHERE: L = MINIMUM LENGTH OF TAPER IN FEET
W = WIDTH OF OFFSET (USUALLY LANE WIDTH) IN FEET
S = DESIGN SPEED OR 85TH PERCENTILE SPEED IN MILES PER HOUR
†† NOTE: BUFFER SPACE MAY BE ADJUSTED AS NEEDED ACCORDING TO ROADWAY GEOMETRY TO MEET SIGHT DISTANCE REQUIREMENTS, AS DIRECTED BY THE ENGINEER.
2. FLASHING ARROW BOARD SHOULD BE AS LEVEL AS POSSIBLE AS APPROVED BY THE ENGINEER. FLASHING ARROW BOARD SHOULD BE LOCATED AT THE BEGINNING OF THE TAPER ON THE SHOULDER IS TOO NARROW, BEHIND THE CHANNELIZING DEVICES IN THE CLOSED LANE.
3. CHANNELIZING DEVICES:
A. ALL CHANNELIZING DEVICES IN TAPERS SHALL BE RETROREFLECTIVE FREE STANDING PLASTIC DRUMS.
B. CHANNELIZING DEVICES IN TANGENTS MAY BE EITHER RETROREFLECTIVE FREE STANDING PLASTIC DRUMS OR 42" TALL CONES OR TUBULAR MARKERS.
C. DEVICE RETROREFLECTIVE BANDS SHALL BE IN ACCORDANCE WITH THE LATEST EDITION OF THE MUTCD
4. FOR MOVING OPERATIONS (PAVING) THE CONTRACTOR SHALL HAVE TWO (2) SETS OF ADVANCE WARNING SIGNS, PLASTIC DRUMS, AND ARROW BOARD. WHEN THE CONSTRUCTION ZONE IS MOVED AHEAD, ALL SIGNS, PLASTIC DRUMS AND ARROW BOARD SHALL BE IN PLACE ON THE SECOND ZONE BEFORE REMOVING ANY SIGNS, PLASTIC DRUMS OR ARROW BOARD ON THE FIRST ZONE.
5. ALL WARNING SIGNS (W SERIES) SHALL BE A MINIMUM OF 48" X 48", AND SHALL BE BLACK COPY ON FLUORESCENT ORANGE SHEETING.
6. ALL TRAFFIC CONTROL ITEMS SHOWN ON THIS SHEET WILL NOT BE MEASURED FOR SEPARATE PAYMENT. THIS WORK SHALL BE INCLUDED IN THE PRICE BID FOR MAINTENANCE OF TRAFFIC.


STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
TRAFFIC CONTROL PLAN
FOR POSTED SPEED LIMIT
OF 65 OR 70 MPH
(INTERSTATES AND OTHER 4-LANE DIVIDED HIGHWAYS)
(MEDIAN LANE OR OUTSIDE LANE CLOSURE) (EXTENDED PERIOD)
WORKING NUMBER TCP-4
SHEET NUMBER 6354
ISSUE DATE: AUGUST 01, 2017
DATE REVISION BY
4/22/26 REVISED VALUE STN
12/1/25 REVISE TEXT STN
LEGEND
* OR AS SHOWN ELSEWHERE ON THE PLANS.
FLASHING ARROW BOARD (TYPE "C")
BLACK LEGEND AND BORDER ON WHITE BACKGROUND
TYPE "B" WARNING LIGHTS
RETROREFLECTIVE FREE-STANDING PLASTIC DRUMS
GENERAL NOTES:
1. THE LOCATION OF CHANNELIZING DEVICES AND THE WORK AREA LAYOUT SHALL BE BASED ON THE CRITERIA IN THE FOLLOWING TABLE:
POSTED SPEED AND/OR DESIGN SPEED
MAXIMUM CHANNELIZING DEVICE SPACING (FEET)
ALONG BUFFER SPACE & WORK ZONE
TAPER
LONGITUDINAL BUFFER SPACE (ft)
TAPER† LENGTH (ft)
mph
<40 40 80 305 320
45 45 90 360 540
50 50 100 425 600
55 55 110 495 660
60 60 120 570 720
65 65 130 645 780
70 70 140 730 840
† NOTE: TAPER LENGTHS ARE DETERMINED USING THE FOLLOWING EQUATIONS:
L = WS FOR SPEEDS OF 45 mph OR GREATER
L = WS²/60 FOR SPEEDS OF 40 mph OR LESS
WHERE: L = MINIMUM LENGTH OF TAPER IN FEET
W = WIDTH OF OFFSET (USUALLY LANE WIDTH) IN FEET
S = DESIGN SPEED OR 85TH PERCENTILE SPEED IN MILES PER HOUR
†† NOTE: BUFFER SPACE MAY BE ADJUSTED AS NEEDED ACCORDING TO ROADWAY GEOMETRY TO ALLOW SIGHT DISTANCE REQUIREMENTS AS DIRECTED BY THE ENGINEER.
2. FLASHING ARROW PANEL SHOULD BE AS LEVEL AS POSSIBLE AS APPROVED BY THE ENGINEER. FLASHING ARROW PANEL SHOULD BE LOCATED AT THE BEGINNING OF THE TAPER OR, IF NO SHOULDER IS TO BE NARROW, BEHIND THE CHANNELIZING DEVICES IN THE CLOSED LANE.
3. CHANNELIZING DEVICES:
A. ALL CHANNELIZING DEVICES IN TAPERS SHALL BE RETROREFLECTIVE FREE STANDING PLASTIC DRUMS.
B. CHANNELIZING DEVICES IN TANGENTS MAY BE EITHER RETROREFLECTIVE FREE STANDING PLASTIC DRUMS OR 42" TALL CONES OR TUBULAR MARKERS
C. DEVICE RETROREFLECTIVE BANDS SHALL BE IN ACCORDANCE WITH THE LATEST EDITION OF THE MUTCD.
4. ALL WARNING SIGNS (W SERIES) SHOULD BE A MINIMUM OF 48" X 48". AND SHALL BE BLACK COPY ON FLUORESCENT ORANGE SHEETING.
5. ALL EXISTING SPEED LIMIT SIGNS WHICH ARE INFLUENCED BY OR CONFLICT WITH THE SPEED ZONE REDUCTION SHALL BE COVERED AS DIRECTED BY THE ENGINEER WHILE THE REDUCED SPEED LIMIT IS IN EFFECT. TAPE SHALL NOT BE USED ON FACE OF SIGN.
6. ADDITIONAL REDUCED REGULATORY SPEED LIMIT SIGNS ARE REQUIRED AT EACH ENTRANCE RAMP WITHIN THE SPEED ZONE. TWO (2) WILL BE REQUIRED FOR EACH RAMP AND LOCATION WILL BE DETERMINED BY THE ENGINEER.
7. THIS TRAFFIC CONTROL PLAN, WITH SPEED ZONE, MAY NOT BE USED ON ANY FACILITY WHERE THE POSTED SPEED LIMIT IS BELOW 65 MPH WITHOUT A COMMISSION ORDER REQUESTING A SPEED LIMIT REDUCTION.
8. LAYOUT SHOWN ABOVE IS FOR AN INTERSTATE WITH A POSTED SPEED LIMIT OF 70 MPH. FOR A POSTED SPEED LIMIT OF 65 MPH, THE REDUCED SPEED LIMIT WILL BE 55 MPH.
9. A FLUORESCENT ORANGE PLAQUE IS REQUIRED WITH ALL REGULATORY SPEED LIMIT SIGNS REQUIRED FOR LANE CLOSURE.
10. ALL TRAFFIC CONTROL ITEMS SHOWN ON THIS SHEET WILL NOT BE MEASURED FOR SEPARATE PAYMENT. THIS WORK SHALL BE INCLUDED IN THE PRICE BID FOR MAINTENANCE OF TRAFFIC.
NOTE: IF VEHICLE MOUNTED ARROW BOARDS USED, SHOULD BE AS HIGH AS PRACTICAL.
7' MIN.
EDGE OF TRAVELED WAY
W4-2L
W3-5
R2-1 (60) 48" X 60"
SPEED LIMIT 60
48" X 16" FLUORESCENT ORANGE PLAQUE
R16-3
WHEN WORKERS ARE PRESENT
SPEEDING FINES DOUBLED
LEFT LANE CLOSED 1 MILE (M20-5L) (1 MILE)
LEFT LANE CLOSED ½MILE (M20-5L) (1/2 MILE)
LEFT LANE CLOSED 1500FT (M20-5L) (1500')
RIGHT LANE CLOSED 1500 FT. (W20-5R) (1500')
RIGHT LANE CLOSED ½MILE (W20-5R) (1/2 MILE)
RIGHT LANE CLOSED 1 MILE (W20-5R) (1 MILE)
R2-1 (70) 48" X 60"
SPEED LIMIT 70
48" X 16" FLUORESCENT ORANGE PLAQUE
W4-2R
W3-5
DRUMS
DRUMS OR 42" TALL CONES OR TUBULAR MARKERS
LONG. BUFFER SPACE
WORK ZONE *(1 MILE MAX.)
CHANNELIZING DEVICES (SEE NOTE 3 FOR TYPES REQUIRED)
L
½ L
A
100'
400'
500'
600'
1000'
1500'


STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
TRAFFIC CONTROL PLAN
FOR POSTED SPEED LIMIT
OF 65 OR 70 MPH
(INTERSTATES AND OTHER 4-LANE DIVIDED HIGHWAYS)
(MEDIAN LANE OR OUTSIDE LANE CLOSURE) (WORK DAY ONLY)
ISSUE DATE: AUGUST 01, 2017
WORKING NUMBER TCP-5
SHEET NUMBER 6355
REVISED TEXT.
12/11/25
STN
BY
DATE
REVISION
BY
LEGEND
* OR AS SHOWN ELSEWHERE ON THE PLANS.
FLASHING ARROW PANEL (TYPE "C")
BLACK LEGEND AND BORDER ON WHITE BACKGROUND
RETROREFLECTIVE FREE-STANDING PLASTIC DRUMS
TRAFFIC CONES (28" HEIGHT)
NOTE: IF VEHICLE MOUNTED ARROW BOARDS USED, SHOULD BE AS HIGH AS PRACTICAL.
7' MIN.
EDGE OF TRAVELED WAY
GENERAL NOTES:
1. THE LOCATION OF CHANNELIZING DEVICES AND THE WORK AREA LAYOUT SHALL BE BASED ON THE CRITERIA IN THE FOLLOWING TABLE:
POSTED SPEED AND/OR DESIGN SPEED
MAXIMUM CHANNELIZING DEVICE SPACING (††)
TAPER
ALONG LANE LINE & WORK ZONE
LONGITUDINAL BUFFER SPACE (††)
TAPER † (††)
mph
40 80 305 320
45 90 360 540
50 100 425 600
55 110 495 660
60 120 570 720
65 130 645 780
70 140 730 840
† NOTE: TAPER LENGTHS ARE DETERMINED USING THE FOLLOWING EQUATIONS:
L = WS FOR SPEEDS OF 45 mph OR GREATER
L = WS²/60 FOR SPEEDS OF 40 mph OR LESS
WHERE: L = MINIMUM LENGTH OF TAPER IN FEET
W = WIDTH OF OFFSET (USUALLY LANE WIDTH) IN FEET
S = DESIGN SPEED OR 85TH PERCENTILE SPEED IN MILES PER HOUR
†† NOTE: BUFFER SPACE MAY BE ADJUSTED AS NEEDED ACCORDING TO ROADWAY GEOMETRY TO MEET SIGHT DISTANCE REQUIREMENTS, AS DIRECTED BY THE ENGINEER.
2. FLASHING ARROW PANEL SHOULD BE AS LEVEL AS POSSIBLE AS APPROVED BY THE ENGINEER. FLASHING ARROW PANEL SHOULD BE LOCATED AT THE BEGINNING OF THE TAPER OR, IF THE SHOULDER IS TOO NARROW, BEHIND THE CHANNELIZING DEVICES IN THE CLOSED LANE.
3. CHANNELIZING DEVICE TYPES FOR:
A. APPROACH TAPER- RETROREFLECTIVE PLASTIC DRUMS
B. ALONG LANE LINE AND WORK ZONE- TRAFFIC CONES OR TUBULAR MARKERS (28" HEIGHT MINIMUM)
C. EXIT TAPER- TRAFFIC CONES OR TUBULAR MARKERS (28" HEIGHT MINIMUM)
4. WHEN WORK ZONE IS NO LONGER NEEDED, ALL SIGNS SHALL BE COVERED OR REMOVED AND THE DRUMS SHALL BE MOVED TO THE SHOULDER EDGE AT THE END OF THE WORK DAY.
5. FOR MOVING OPERATIONS (PAVING) THE CONTRACTOR SHALL HAVE TWO (2) SETS OF ADVANCE WARNING AND REGULATORY SIGNS, PLASTIC DRUMS, AND ARROW BOARD. WHEN THE CONSTRUCTION ZONE IS MOVED AHEAD, ALL SIGNS, PLASTIC DRUMS AND ARROW BOARD SHALL BE IN PLACE ON THE SECOND ZONE BEFORE REMOVING ANY SIGNS, PLASTIC DRUMS OR ARROW BOARD ON THE FIRST ZONE.
6. ALL WARNING SIGNS (W SERIES) SIGNS SHOULD BE A MINIMUM OF 48" X 48", AND SHALL BE BLACK COPY ON FLUORESCENT ORANGE SHEETING.
7. ALL EXISTING SPEED LIMIT SIGNS WHICH ARE INFLUENCED BY OR CONFLICT WITH THE SPEED ZONE REDUCTION SHALL BE COVERED AS DIRECTED BY THE ENGINEER WHILE THE REDUCED SPEED LIMIT IS IN EFFECT. TAPE SHALL NOT BE USED ON THE FACE OF SIGN.
8. ADDITIONAL REDUCED REGULATORY SPEED LIMIT SIGNS ARE REQUIRED AT EACH ENTRANCE RAMP WITHIN THE SPEED ZONE. TWO (2) WILL BE REQUIRED FOR EACH RAMP AND LOCATION WILL BE DETERMINED BY THE ENGINEER.
9. THIS TRAFFIC CONTROL PLAN, WITH SPEED ZONE, MAY NOT BE USED ON ANY FACILITY WHERE THE POSTED SPEED LIMIT IS BELOW 65 MPH WITHOUT A COMMISSION ORDER REQUESTING A SPEED LIMIT REDUCTION.
10. LAYOUT SHOWN ABOVE IS FOR AN INTERSTATE WITH A POSTED SPEED LIMIT OF 70 MPH. FOR POSTED SPEED LIMIT OF 65 MPH, THE REDUCED SPEED LIMIT WILL BE 55 MPH.
11. A FLUORESCENT ORANGE PLAQUE IS REQUIRED WITH ALL REGULATORY SPEED LIMIT SIGNS AND "REDUCED SPEED AHEAD" SIGNS REQUIRED FOR LANE CLOSURE.
12. ALL TRAFFIC CONTROL ITEMS SHOWN ON THIS SHEET WILL NOT BE MEASURED FOR SEPARATE PAYMENT. THIS WORK SHALL BE INCLUDED IN THE PRICE BID FOR MAINTENANCE OF TRAFFIC.
TRAFFIC CONES OR TUBULAR MARKERS
DRUMS
LONG. BUFFER SPACE
WORK ZONE * (1 MILE MAX.)
CHANNELIZING DEVICES (SEE NOTE 3 FOR TYPES REQUIRED)
48" X 16" FLUORESCENT ORANGE PLAQUE
SPEED LIMIT 70
R2-1 (70) 48" X 60"
SPEED LIMIT 60
R2-1 (60) 48" X 60"
48" X 16" FLUORESCENT ORANGE PLAQUE
SPEED LIMIT 60
48" X 16" FLUORESCENT ORANGE PLAQUE
SPEED LIMIT 70
R2-1 (70) 48" X 60"
W4-2R
W4-2L
W3-5
R16-3
WHEN WORKERS ARE PRESENT
SPEEDING FINES DOUBLED
RIGHT LANE CLOSED 1500 FT.
(W20-5R) (1500')
RIGHT LANE CLOSED ½ MILE
(W20-5R) (1/2 MILE)
RIGHT LANE CLOSED 1 MILE
(W20-5R) (1 MILE)
LEFT LANE CLOSED 1 MILE
(W20-5L) (1 MILE)
LEFT LANE CLOSED ½ MILE
(W20-5L) (1/2 MILE)
LEFT LANE CLOSED 1500 FT.
(W20-5L) (1500')
SPEED LIMIT 60
R2-1 (60) 48" X 60"
ORANGE PLAQUE
FLUORESCENT
48" X 16"
SPEED LIMIT 60
R2-1 (60) 48" X 60"
ORANGE PLAQUE
FLUORESCENT
48" X 16"
SPEED LIMIT 60
W3-5
WHEN WORKERS ARE PRESENT
SPEEDING FINES DOUBLED
R16-3
A
1000'
½ L
L
100'
400'
500'
600'
1600'

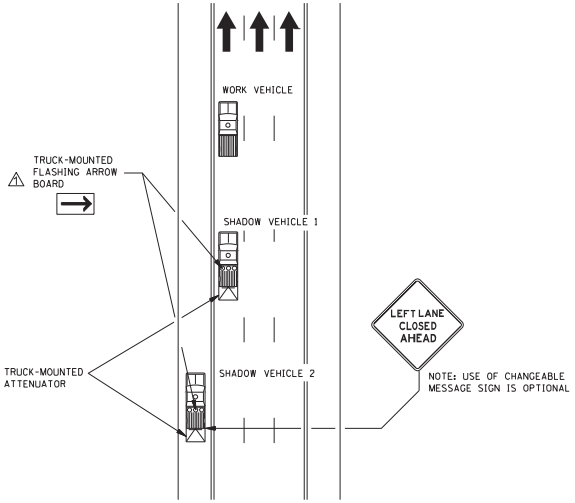

STATE
MISS.
PROJECT NO.
EDGE LINES
WORK AREA
SECOND LAW ENFORCEMENT VEHICLE
STOP
R1-1
(48" X 48")
50'
1000'
½ MILE ±
TRAFFIC
TRAFFIC
(SEE NOTE 8)
W3-1
(48" X 48")
LOCATION BASED ON ANTICIPATED QUEUE
½ MILE MINIMUM
ADVANCE LAW ENFORCEMENT VEHICLE
CMS
SECOND CHANGEABLE MESSAGE SIGN (CMS)
PHASE I - "ROAD CLOSED ½ MILE"
PHASE II - "PREPARE TO STOP"
CMS
FIRST CHANGEABLE MESSAGE SIGN (CMS)
PHASE I - "ROAD CLOSED X MILE"
PHASE II - "PREPARE TO STOP"
GENERAL NOTES:
1. THIS TYPE OF HIGHWAY CLOSURE SHOULD ONLY BE USED FOR CONSTRUCTION OPERATIONS WHEN THE DURATION OF CLOSURE WILL NOT EXCEED 30 MINUTES. AFTER THE HIGHWAY HAS BEEN CLOSED AND ESCORTED VIA THIS PROCEDURE, A MINIMUM PERIOD OF 30 MINUTES SHOULD ELAPSE BEFORE ANOTHER SHORT DURATION CLOSURE, EXCEPT WITH THE APPROVAL OF THE ENGINEER.
2. AT LEAST TWO LAW ENFORCEMENT OFFICERS AND TWO LAW ENFORCEMENT VEHICLES SHOULD BE PROVIDED ON EACH APPROACH TO THE CLOSURE. EACH LAW ENFORCEMENT VEHICLE SHOULD HAVE A ROOF-MOUNTED OPERATING FLASHING BLUE LIGHT OR LIGHT BAR.
3. RESTRICTIONS ON ROAD CLOSURES ARE SPECIFIED IN THE CONTRACT DOCUMENT.
4. THE ADVANCE LAW ENFORCEMENT VEHICLE SHOULD BE MOVED BACK AS REQUIRED BY THE QUEUING OF STOPPED VEHICLES.
5. IF QUEUE EXCEEDS THE FIRST CHANGEABLE MESSAGE SIGN (CMS) AT ANY TIME DURING A CLOSURE, THE TRAFFIC CONTROL PLAN SHOULD BE ADJUSTED AS NECESSARY, WITH APPROVAL OF THE ENGINEER.
6. TRAFFIC CONTROL FOR THE CLOSURE SHOULD BE ACCOMPLISHED IN THE FOLLOWING ORDER:
A. FIRST CHANGEABLE MESSAGE SIGN (CMS)
B. SECOND CHANGEABLE MESSAGE SIGN (CMS)
C. ADVANCE LAW ENFORCEMENT VEHICLE, LIGHTS AND FLASHERS ON.
D. W3-1 (48" X 48") ORANGE/BLACK TYPE XI RETROREFLECTIVE SHEETING" SIGNS ERECTED.
E. "R1-1 (48" X 48")" SIGNS ERECTED OR INSTALLED ON TEMPORARY STANDS TO STOP TRAFFIC. THE ORDER OF ERECTION SHOULD BE IN THE FOLLOWING ORDER: RIGHT SHOULDER THEN CENTER.
F. SECOND LAW ENFORCEMENT VEHICLE, LIGHTS AND FLASHERS ON.
7. TRAFFIC CONTROL SHOULD BE REMOVED IN THE FOLLOWING ORDER:
A. WITH TRAFFIC STOPPED REMOVE THE "R1-1 (48" X 48")" SIGNS COMMENCING THE RIGHT SHOULDER IN THE FOLLOWING ORDER: CENTER THEN SIGN ON THE RIGHT SHOULDER. SECOND LAW ENFORCEMENT VEHICLE LEADS TRAFFIC THROUGH WORK AREA.
B. AFTER ALL STOPPED VEHICLES HAVE STARTED MOVING, W3-1 (48" X 48") SIGNS SHALL BE REMOVED. THESE SIGNS MAY BE COVERED IF RE-USE IS IMMINENT.
C. AFTER ALL VEHICLES HAVE RESUMED APPROXIMATELY NORMAL SPEED, THE CHANGEABLE MESSAGE SIGNS SHALL BE TURNED OFF.
8. UNILLUMINATED SECTIONS OF HIGHWAYS SHOULD NOT BE CLOSED DURING HOURS OF DARKNESS EXCEPT FOR EMERGENCIES OR WITH THE APPROVAL OF THE ENGINEER. WHEN THE HIGHWAY MUST BE CLOSED DURING HOURS OF DARKNESS, A TYPE B HIGH INTENSITY FLASHING BARRICADE WARNING LIGHT SHALL BE USED ON EACH W3-1 SIGN.
9. IF AN ENTRANCE RAMP IS LOCATED BETWEEN THE SECOND CMS AND R1-1, THE CMS AND W3-1 SIGNS SHALL ALSO BE ERECTED ON THE RAMP SHOULDER.
10. THE ABOVE DURATION WILL APPLY TO EACH APPROACH TO THE CLOSURE.
11. ALL TRAFFIC CONTROL ITEMS SHOWN ON THIS SHEET WILL NOT BE MEASURED FOR SEPARATE PAYMENT; THIS WORK SHALL BE INCLUDED IN THE PRICE BID FOR MAINTENANCE OF TRAFFIC, INCLUDING SECURING LAW ENFORCEMENT SERVICES.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
SHORT DURATION
CLOSING OF TWO-LANE
TWO-WAY HIGHWAYS
WORKING NUMBER
TCP-6
SHEET NUMBER
6356
ISSUE DATE: AUGUST 01, 2017
STN
BY
DATE
REVISION
12/11/25
REVISED TEXT.


STATE
MISS.
PROJECT NO.
PAVED SHOULDER
TRAFFIC
TRAFFIC
½ MILE *
MEDIAN
½ MILE *
LOCATION BASED ON ANTICIPATED QUEUE
½ MILE MINIMUM
EDGE LINES
WORK AREA
50'
SECOND LAW ENFORCEMENT VEHICLE
STOP
R1-1
(48" X 48")
TRAFFIC
TRAFFIC
PAVED SHOULDER
(SEE NOTE 8)
W3-1
(48" X 48")
ADVANCE LAW ENFORCEMENT VEHICLE
CMS
SECOND CHANGEABLE MESSAGE SIGN (CMS)
PHASE I - "ROAD CLOSED ½ MILE"
PHASE II - "PREPARE TO STOP"
CMS
FIRST CHANGEABLE MESSAGE SIGN (CMS)
PHASE I - "ROAD CLOSED X MILE"
PHASE II - "PREPARE TO STOP"
GENERAL NOTES:
1. THIS TYPE OF HIGHWAY CLOSURE SHOULD ONLY BE USED FOR CONSTRUCTION OPERATIONS WHEN THE DURATION OF CLOSURE WILL NOT EXCEED 30 MINUTES, AFTER THE HIGHWAY HAS BEEN CLOSED AND REOPENED VIA THIS PROCEDURE, A MINIMUM PERIOD OF 30 MINUTES SHOULD ELAPSE BEFORE ANOTHER SHORT DURATION CLOSURE EXCEPT WITH THE APPROVAL OF THE ENGINEER.
2. AT LEAST TWO LAW ENFORCEMENT OFFICERS AND TWO LAW ENFORCEMENT VEHICLES SHOULD BE PROVIDED ON EACH APPROACH TO THE CLOSURE. EACH LAW ENFORCEMENT VEHICLE SHOULD HAVE A ROOF MOUNTED OPERATING FLASHING BLUE LIGHT OR LIGHT BAR.
3. RESTRICTIONS ON ROAD CLOSURES ARE SPECIFIED IN THE CONTRACT DOCUMENT.
4. THE ADVANCE LAW ENFORCEMENT VEHICLE SHOULD BE MOVED BACK AS REQUIRED BY THE QUEUING OF STOPPED VEHICLES.
5. IF QUEUE EXCEEDS THE FIRST CHANGEABLE MESSAGE SIGN (CMS) AT ANY TIME DURING A CLOSURE, THE TRAFFIC CONTROL PLAN SHOULD BE ADJUSTED AS NECESSARY, WITH APPROVAL OF THE ENGINEER.
6. TRAFFIC CONTROL FOR THE CLOSURE SHOULD BE ACCOMPLISHED IN THE FOLLOWING ORDER:
A. FIRST CHANGEABLE MESSAGE SIGN (CMS)
B. SECOND CHANGEABLE MESSAGE SIGN (CMS)
C. ADVANCE LAW ENFORCEMENT VEHICLE, LIGHTS AND FLASHERS ON.
D. "W3-1 (48" X 48") (ORANGE/BLACK TYPE XI RETROREFLECTIVE SHEETING) SIGNS ERECTED. OR INSTALLED ON TEMPORARY STANDS.
E. "R1-1 (48" X 48") SIGNS ERECTED TO STOP TRAFFIC, THE ORDER OF ERECTION SHOULD BE TOWARD THE MEDIAN SHOULDER ON THE FOLLOWING ORDER: RIGHT SHOULDER, THEN CENTER, THEN MEDIAN SHOULDER.
F. SECOND LAW ENFORCEMENT VEHICLE, LIGHTS AND FLASHERS ON.
7. TRAFFIC CONTROL SHOULD BE REMOVED IN THE FOLLOWING ORDER:
A. WITH TRAFFIC STOPPED REMOVE THE "R1-1 (48" X 48") SIGNS TOWARD THE RIGHT SHOULDER, THEN TOWARD THE MEDIAN, THEN CENTER, THEN SIGN ON THE RIGHT SHOULDER, SECOND LAW ENFORCEMENT VEHICLE LEADS TRAFFIC THROUGH WORK AREA.
B. AFTER ALL STOPPED VEHICLES HAVE STARTED MOVING, THE "W3-1 (48" X 48" SIGNS SHALL BE REMOVED. WHEN SIGNS MAY BE COVERED IF RE-USE IS IMMINENT
C. AFTER ALL VEHICLES HAVE RESUMED APPROXIMATELY NORMAL SPEED, THE CHANGEABLE MESSAGE SIGNS SHALL BE TURNED OFF.
8. UNILLUMINATED SECTIONS OF HIGHWAYS SHOULD NOT BE CLOSED DURING HOURS OF DARKNESS EXCEPT FOR EMERGENCIES OR WITH THE APPROVAL OF THE ENGINEER. WHEN SUCH HIGHWAYS ARE CLOSED DURING HOURS OF DARKNESS, A TYPE 'B' HIGH INTENSITY FLASHING BARRICADE WARNING LIGHT SHALL BE USED ON EACH W3-1 SIGN.
9. IF AN ENTRANCE RAMP IS LOCATED BETWEEN THE SECOND CMS AND R1-1, THE CMS AND W3-1 SIGNS SHALL ALSO BE ERECTED ON THE RAMP SHOULDER.
10. THE ABOVE DURATION WILL APPLY TO EACH APPROACH TO THE CLOSURE.
11. ALL TRAFFIC CONTROL ITEMS SHOWN ON THIS SHEET WILL NOT BE MEASURED FOR SEPARATE PAYMENT. THIS WORK SHALL BE INCLUDED IN THE PRICE BID FOR MAINTENANCE OF TRAFFIC INCLUDING SECURING LAW ENFORCEMENT SERVICES.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
SHORT DURATION CLOSING OF DIVIDED HIGHWAYS
WORKING NUMBER TCP-7
SHEET NUMBER 6357
ISSUE DATE: AUGUST 01, 2017
DATE 12/11/25
REVISION REVISED TEXT.
BY STM


STATE
MISS.
PROJECT NO.
ROAD CLOSED
DETOUR
BARRICADE CLOSING A ROAD
WING BARRICADES
1. WING BARRICADES ARE TYPE III BARRICADES ERECTED ON THE SHOULDER ON ONE OR BOTH SIDES OF THE PAVEMENT TO GIVE THE SENSATION OF A NARROWING OR RESTRICTED ROADWAY. WING BARRICADES MAY BE USED AS A MOUNTING FOR THE ADVANCE WARNING SIGNS OR FLASHERS.
2. WING BARRICADES SHOULD BE USED:
A. IN ADVANCE OF A CONSTRUCTION PROJECT EVEN WHEN NO PART OF THE ROADWAY IS ACTUALLY CLOSED.
B. IN ADVANCE OF ALL BRIDGE OR CULVERT WIDENING OPERATIONS.
BARRICADE CHARACTERISTICS
I
II
III
WIDTH OF RAIL**
8" MIN. - 12" MAX.
8" MIN. - 12" MAX.
8" MIN. - 12" MAX.
LENGTH OF RAIL**
24" MIN. / 96" MAX.
24" MIN. /96" MAX.
48" MIN. / 96" MAX.
WIDTH OF STRIPE*
6"
6"
6"
HEIGHT
36" MIN.
36" MIN.
60" MIN.
NUMBER OF RETROREFLECTORIZED RAIL FACES
2 (ONE EACH DIRECTION)
4 (TWO EACH DIRECTION)
3 IF FACING TRAFFIC IN ONE DIRECTION
6 IF FACING TRAFFIC IN TWO DIRECTIONS
2' MIN. / 8' MAX.
8' TO 12"
5' MIN.
TYPE I
TYPE II
4' MIN. / 8' MAX.
TYPE III
STANDARD BARRICADES
* 1. FOR RAILS LESS THAN 36" LONG, 4" WIDE STRIPES MAY BE USED.
** 2. BARRICADES INTENDED FOR USE ON EXPRESSWAYS, FREEWAYS AND OTHER HIGH SPEED ROADWAYS, SHALL HAVE A MINIMUM OF 270 in² OF REFLECTIVE AREA FACING TRAFFIC.
1. THE RETROREFLECTIVE MARKING FOR BARRICADE RAILS SHALL BE ORANGE AND WHITE (SLOPING DOWNWARD AT AN ANGLE OF 45° IN THE DIRECTION THAT TRAFFIC IS TO PASS.
2. RAIL STRIPE SHOULD BE 6 INCHES, EXCEPT THAT 4-INCH WIDE STRIPES MAY BE USED IF RAIL LENGTHS ARE LESS THAN 36 INCHES.
3. DO NOT PLACE SANDBAGS OR OTHER DEVICES ON BARRICADE RAILS TO PROVIDE MASS SANDBAGS, HOWEVER, MAY BE PLACES AS BALLAST TO THE LOWER PARTS OF THE FRAME OR THE STAYS TO BARRICADES.
4. FOR ADDITIONAL INFORMATION OR DETAILS, SEE MUTCD, LATEST EDITION.
5. BARRICADES ARE CLASSIFIED BY FHWA AS CATEGORY II WORK ZONE DEVICES. A LIST OF CRASHWORTHY BARRICADES AND OTHER CATEGORY II DEVICES CAN BE FOUND ON FHWA'S WEBSITE: http://safety.fhwa.dot.gov/roadway_dev/policy/mutcd/fhwaca_orders.htm
6. WHERE ROAD USERS INCLUDE PEDESTRIANS, THE PROVISION OF SUPPLEMENTAL AUDIBLE INFORMATION OR DETECTABLE BARRIERS OR BARRICADES SHOULD BE PROVIDED FOR PEOPLE WITH VISION DISABILITIES.
7. BARRICADE RAIL SUPPORTS SHOULD NOT PROJECT INTO PEDESTRIAN CIRCULATION ROUTES MORE THAN 4 INCHES FOR THE SUPPORTS LOCATED BETWEEN 27 INCHES TO 80 INCHES ABOVE THE EXISTING SURFACE.
RETROREFLECTIVE CHEVRON ALIGNMENT SIGN (W1-8)
ORANGE
24"
18"
BLACK
1. A CHEVRON SIGN CONSISTS OF A BLACK CHEVRON TYPE MARKING ON AN ORANGE BACKGROUND AND SHALL POINT IN THE DIRECTION OF TRAFFIC FLOW.
2. THE CHEVRON SIGN SHALL BE MOUNTED ON CRASHWORTHY SUPPORT.
3. CHEVRON SIGNS MAY BE USED TO SUPPLEMENT OTHER STANDARD DEVICES WHERE ONE OR MORE LANES ARE CLOSED FOR CONSTRUCTION OR MAINTENANCE. THEY SHOULD BE PLACED APPROXIMATELY 2'-0" BEHIND THE LANE TRANSITION STRIPE.
4. CHEVRON SIGNS SHALL BE INSTALLED AT A MINIMUM HEIGHT OF 4 FEET MEASURED VERTICALLY FROM THE BOTTOM OF THE SIGN TO THE ELEVATION OF THE NEAR EDGE OF THE TRAVELWAY.
TYPE 3 OBJECT MARKER (OM3-R)
12"
3" MIN.
3" MIN.
36"
7'-0" MIN.
4'-0" MIN.
YELLOW
BLACK
1. TYPE 3 OBJECT MARKERS SHALL BE USED AT ALL EXPOSED BRIDGE APPROACHES AND AT OTHER LOCATIONS AS DEEMED NECESSARY BY THE ENGINEER.
2. THE OM3-R IS SHOWN. THE OM3-L IS SIMILAR EXCEPT THE STRIPES SLOPE DOWNWARD FROM THE LOWER LEFT TO THE UPPER RIGHT SIDE AND SHALL BE PLACED ON THE LEFT SIDE OF THE OBJECT.
3. THE INSIDE EDGE OF THE MARKER SHALL BE IN LINE WITH THE INNER EDGE OF THE OBSTRUCTION.
4. THE STRIPING SHALL CONSIST OF ALTERNATING BLACK AND RETOREFLECTIVE YELLOW SLOPING DOWNWARD TOWARD THE SIDE ON WHICH TRAFFIC IS THE PASS.
PLASTIC DRUM DETAIL
18" MIN. DIA.
36" MIN.
4'-6"
RETROREFLECTIVE ORANGE
RETROREFLECTIVE WHITE
PLASTIC CONE DETAIL (36" OR GREATER)
MORE THAN 36".
4'-6"
6" MAX.
RETROREFLECTIVE WHITE
RETROREFLECTIVE ORANGE
1. PLASTIC DRUMS, TUBULAR MARKERS, OR PLASTIC CONES SHALL BE ON END AND USED AS AN EXPEDIENT METHOD FOR TRAFFIC CHANNELIZATION, THE COLOR AND MARKING OF THE DEVICE USED SHALL BE CONSISTENT WITH MARKING STANDARDS FOR BARRICADE. THE PREDOMINANT COLOR ON THESE DEVICES SHALL BE ORANGE WITH RETROREFLECTIVE, HORIZONTAL, CIRCUMFERENTIAL WHITE STRIPES AS SHOWN ON THE DETAILS.
2. DRUMS, TUBULAR MARKERS, OR PLASTIC CONES SHOULD NEVER BE PLACED IN THE ROADWAY WITHOUT WARNING SIGNS.
3. WHERE PRACTICAL PLASTIC DRUMS, TUBULAR MARKERS, OR PLASTIC CONES SHOULD BE PLACED NO CLOSER THAN 3'-0" FROM THE EDGE OF TRAVELED LANE.
4. BALLAST SHALL NOT BE PLACED ON THE TOP OF THE DRUM.
TUBULAR MARKER DETAIL
RETROREFLECTIVE ORANGE
28" MIN.
RETROREFLECTIVE WHITE
RETROREFLECTIVE ORANGE
PLASTIC CONE DETAIL (28" – 36")
RETROREFLECTIVE WHITE
28" MIN. TO 36" MAX.
RETROREFLECTIVE ORANGE
STR
BY
REVISION
DATE
12/11/20 REVISED TEXT AND DETAILS.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
HIGHWAY SIGN AND BARRICADE DETAILS FOR CONSTRUCTION PROJECTS
MDOT
WORKING NUMBER
TCP-8
ISSUE DATE: AUGUST 01, 2017
SHEET NUMBER
6358

STATE	PROJECT NO.
MISS.	

MOBILE OPERATIONS ON MULTILANE ROAD

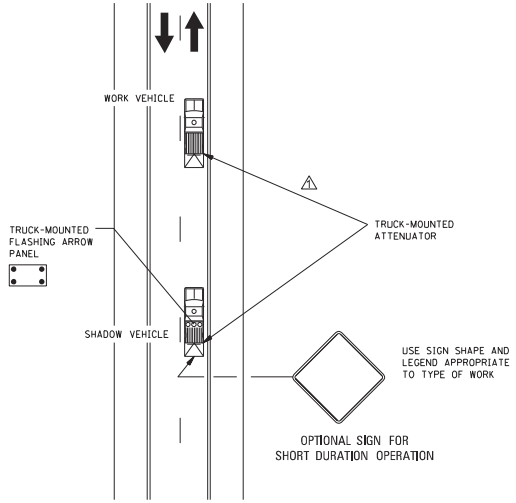


MOBILE OPERATIONS ON MULTILANE ROAD

NOTES FOR MULTILANE LANE OPERATION:

1. SHADOW AND WORK VEHICLES SHALL DISPLAY HIGH-INTENSITY ROTATING, FLASHING, OSCILLATING, OR STROBE LIGHTS. AN ARROW BOARD SHALL BE USED WHEN A FREEWAY LANE IS CLOSED. WHEN MORE THAN ONE FREEWAY LANE IS CLOSED, A SEPARATE ARROW BOARD SHALL BE USED FOR EACH CLOSED LANE.
2. SHADOW VEHICLE 2 SHOULD BE EQUIPPED WITH AN ARROW BOARD AND TRUCK MOUNTED ATTENUATOR (TMA), AN APPROPRIATE LANE CLOSURE SIGN SHOULD BE PLACED ON SHADOW VEHICLE 2 SO AS NOT TO OBSCURE THE ARROW BOARD.
3. SHADOW VEHICLE 1 SHOULD BE EQUIPPED WITH AN ARROW BOARD AND TRUCK-MOUNTED ATTENUATOR (TMA).
4. SHADOW VEHICLE 2 SHOULD TRAVEL AT A VARYING DISTANCE FROM THE WORK OPERATION SO AS TO PROVIDE ADEQUATE SIGHT DISTANCE FOR TRAFFIC APPROACHING FROM THE REAR.
5. THE SPACING BETWEEN THE WORK VEHICLES AND THE SHADOW VEHICLES, AND BETWEEN EACH SHADOW VEHICLE, SHOULD BE MINIMIZED TO DETER ROAD USERS FROM DRIVING IN BETWEEN.
6. ON HIGH-SPEED ROADWAYS, A THIRD SHADOW VEHICLE (NOT SHOWN) MAY BE USED WITH SHADOW VEHICLE 1 IN THE CLOSED LANE, SHADOW VEHICLE 2 STRADDLING THE EDGE LINE, AND SHADOW VEHICLE 3 ON THE SHOULDER.
7. ARROW BOARD SHALL BE AS A MINIMUM TYPE B, 60" X 30" IN ACCORDANCE WITH THE CRITERIA PRESENTED IN THE MUTCD.
8. WORK SHOULD NORMALLY BE DONE DURING OFF-PEAK HOURS.
9. VEHICLE-MOUNTED SIGNS SHOULD BE MOUNTED WITH THE BOTTOM OF THE SIGN LOCATED AT A MINIMUM HEIGHT OF 48" ABOVE THE PAVEMENT AND SHALL NOT BE OBSCURED BY EQUIPMENT OR SUPPLIES. SIGN LEGENDS SHALL BE COVERED OR TURNED FROM VIEW WHEN WORK IS NOT IN PROGRESS.
10. WHEN THE WORK VEHICLE OCCUPIES AN INTERIOR LANE (A LANE OTHER THAN THE FAR RIGHT OR FAR LEFT) OF A DIRECTIONAL ROADWAY HAVING A RIGHT-HAND SHOULDER 10 FEET OR MORE IN WIDTH, SHADOW VEHICLE 2 SHOULD DRIVE ON THE RIGHT-HAND SHOULDER WITH A SIGN INDICATING THAT WORK IS TAKING PLACE IN THE INTERIOR LANE.
11. ON HIGH-SPEED ROADWAYS, A THIRD SHADOW VEHICLE (NOT SHOWN) MAY BE USED WITH SHADOW VEHICLE 1 IN THE CLOSED LANE, SHADOW VEHICLE 2 STRADDLING THE EDGE LINE, AND SHADOW VEHICLE 3 ON THE SHOULDER.
12. WHERE ADEQUATE SHOULDER WIDTH IS NOT AVAILABLE, SHADOW VEHICLE 3 MAY ALSO STRADDLE THE EDGE LINE.
13. ALL TRAFFIC CONTROL ITEMS SHOWN ON THIS SHEET WILL NOT BE MEASURED FOR SEPARATE PAYMENT. THIS WORK SHALL BE INCLUDED IN THE PRICE BID FOR MAINTENANCE OF TRAFFIC.

MOBILE OPERATIONS ON TWO–LANE ROAD



MOBILE OPERATIONS ON TWO–LANE ROAD

NOTES FOR TWO-LANE OPERATION:

1. WHERE PRACTICAL AND WHEN NEEDED, THE WORK AND SHADOW VEHICLES SHOULD PULL OVER PERIODICALLY TO ALLOW TRAFFIC TO PASS. IF THIS CAN NOT BE DONE FREQUENTLY, AS AN ALTERNATIVE, A "DO NOT PASS" SIGN MAY BE PLACED ON THE REAR OF THE VEHICLE BLOCKING THE LANE.
2. THE DISTANCE BETWEEN THE WORK AND SHADOW VEHICLES MAY VARY ACCORDING TO TERRAIN, PAINT DRYING TIME, AND OTHER FACTORS. SHADOW VEHICLES ARE USED TO WARN TRAFFIC OF THE OPERATION AHEAD. WHENEVER ADEQUATE STOPPING SIGHT DISTANCE EXISTS TO THE REAR, THE SHADOW VEHICLE SHOULD MAINTAIN THE MINIMUM DISTANCE AND PROCEED AT THE SAME SPEED AS THE WORK VEHICLE. THE SHADOW VEHICLE SHOULD SLOW DOWN IN ADVANCE OF VERTICAL OR HORIZONTAL CURVES THAT RESTRICT SIGHT DISTANCE.
3. ADDITIONAL SHADOW VEHICLES TO WARN AND REDUCE THE SPEED OF ONCOMING OR OPPOSING TRAFFIC MAY BE USED. POLICE PATROL CARS MAY BE USED FOR THIS PURPOSE.
4. A TRUCK-MOUNTED ATTENUATOR (TMA) SHOULD BE USED ON THE SHADOW VEHICLE AND MAY BE USED ON THE WORK VEHICLE.
5. THE WORK VEHICLE SHALL BE EQUIPPED WITH BEACONS, AND THE SHADOW VEHICLES SHALL BE EQUIPPED WITH TWO HIGH-INTENSITY FLASHING LIGHTS MOUNTED ON THE REAR, ADJACENT TO THE SIGN. SHADOW AND WORK VEHICLES SHALL DISPLAY FLASHING OR ROTATING BEACONS BOTH FORWARD AND TO THE REAR.
6. VEHICLE-MOUNTED SIGNS SHOULD BE MOUNTED WITH THE BOTTOM OF THE SIGN LOCATED AT A MINIMUM HEIGHT OF 48" ABOVE THE PAVEMENT AND SHALL NOT BE OBSCURED BY EQUIPMENT OR SUPPLIES. SIGN LEGENDS SHALL BE COVERED OR TURNED FROM VIEW WHEN WORK IS NOT IN PROGRESS.
7. ARROW BOARD TO BE USED IN CAUTION MODE.
8. ALL TRAFFIC CONTROL ITEMS SHOWN ON THIS SHEET WILL NOT BE MEASURED FOR SEPARATE PAYMENT. THIS WORK SHALL BE INCLUDED IN THE PRICE BID FOR MAINTENANCE OF TRAFFIC.

DATE	REVISION	BY
12/17/25	REVISED TEXT AND DETAILS.	STN

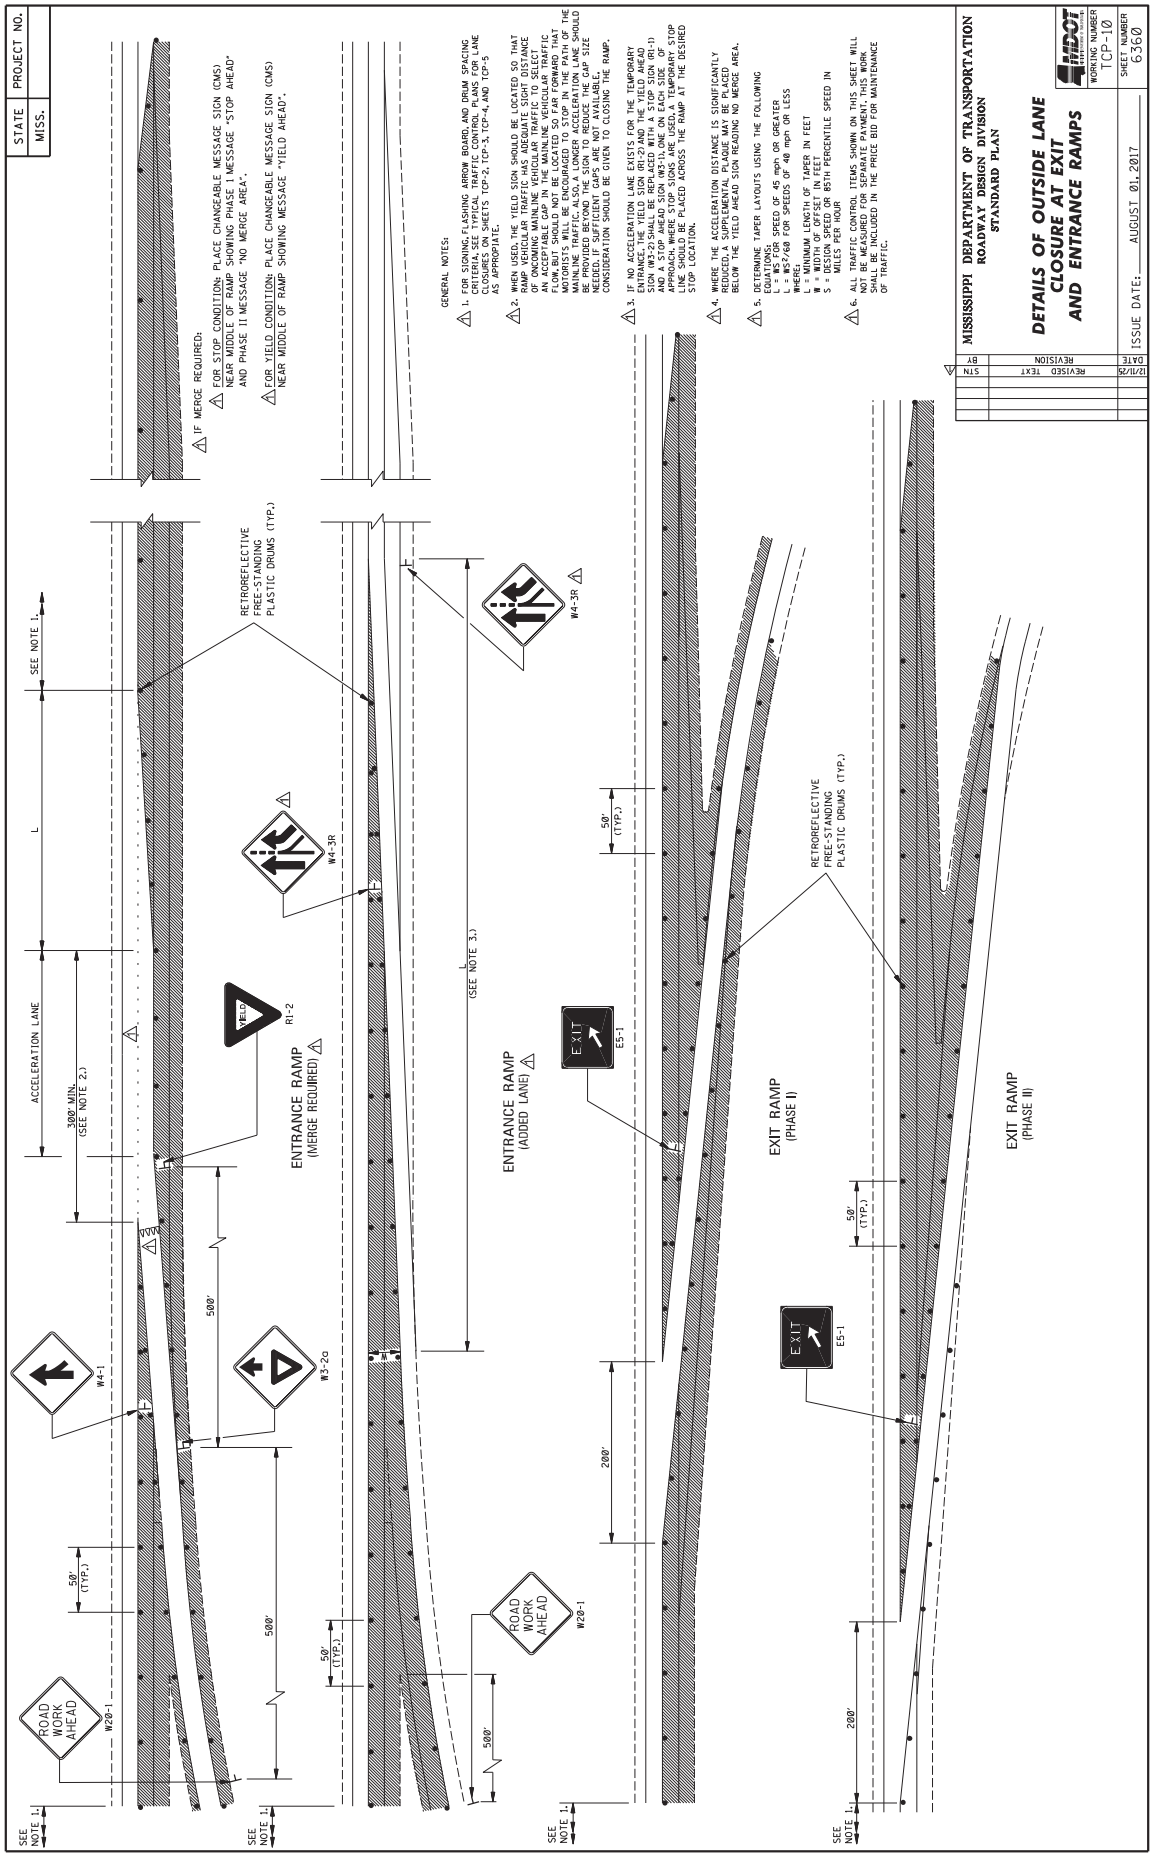
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN

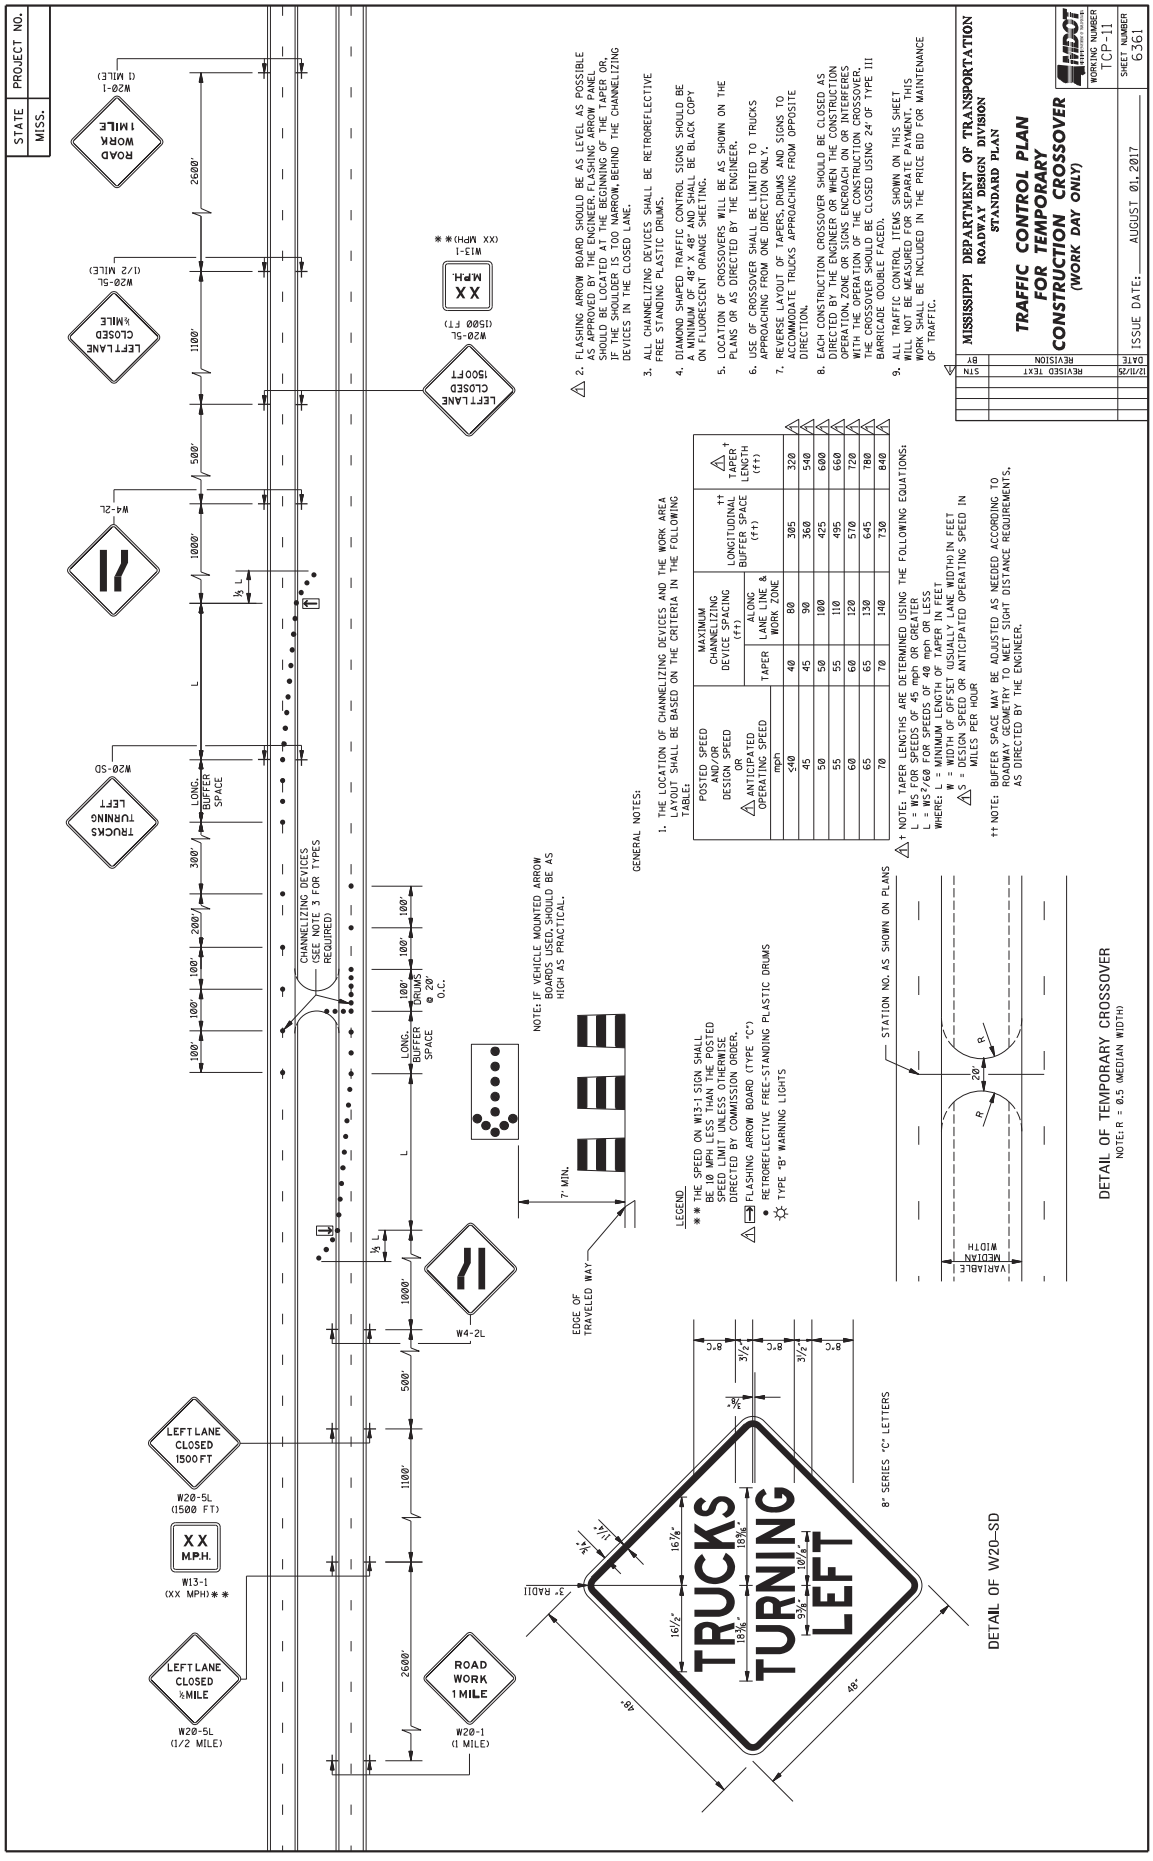
TRAFFIC CONTROL PLAN
MOBILE OPERATIONS
MULTILANE ROADS
AND
TWO–LANE ROADS

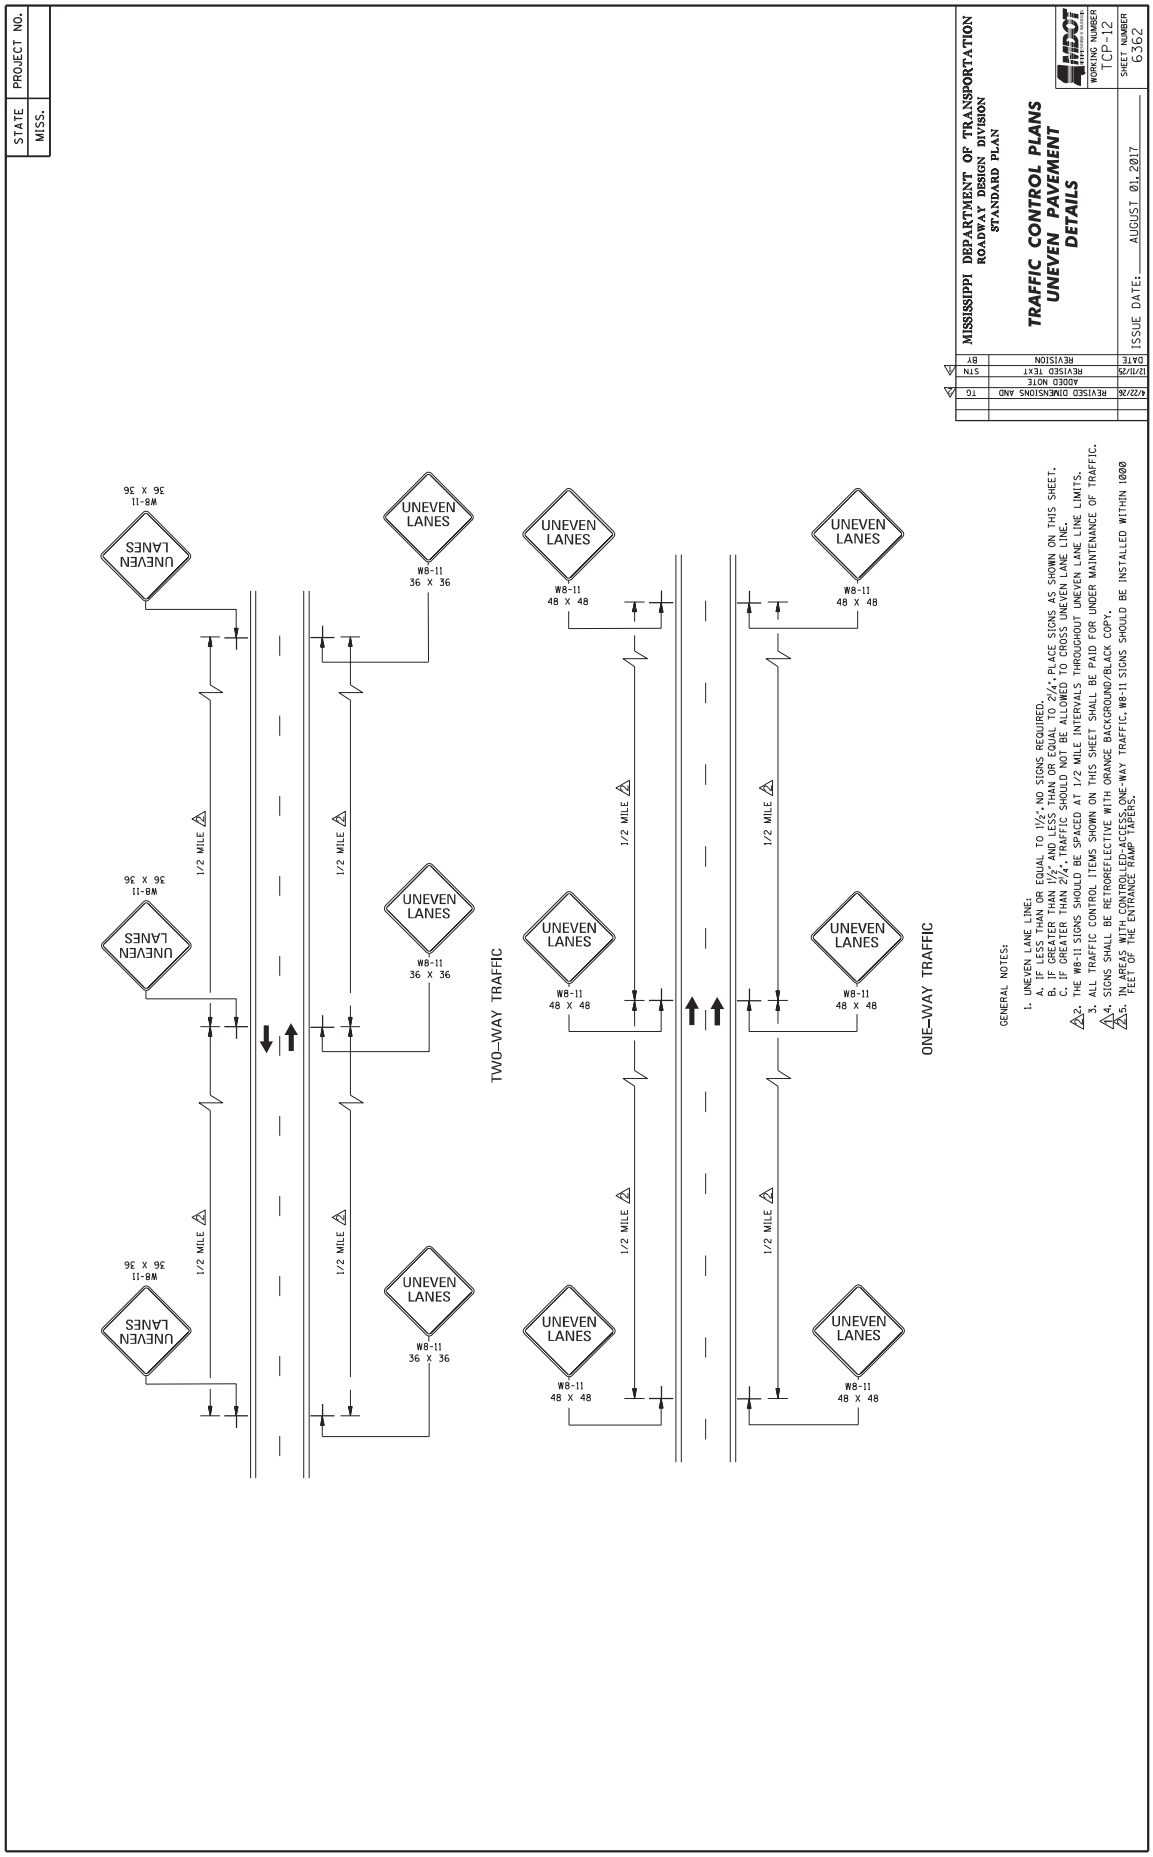
WORKING NUMBER: TCP-9

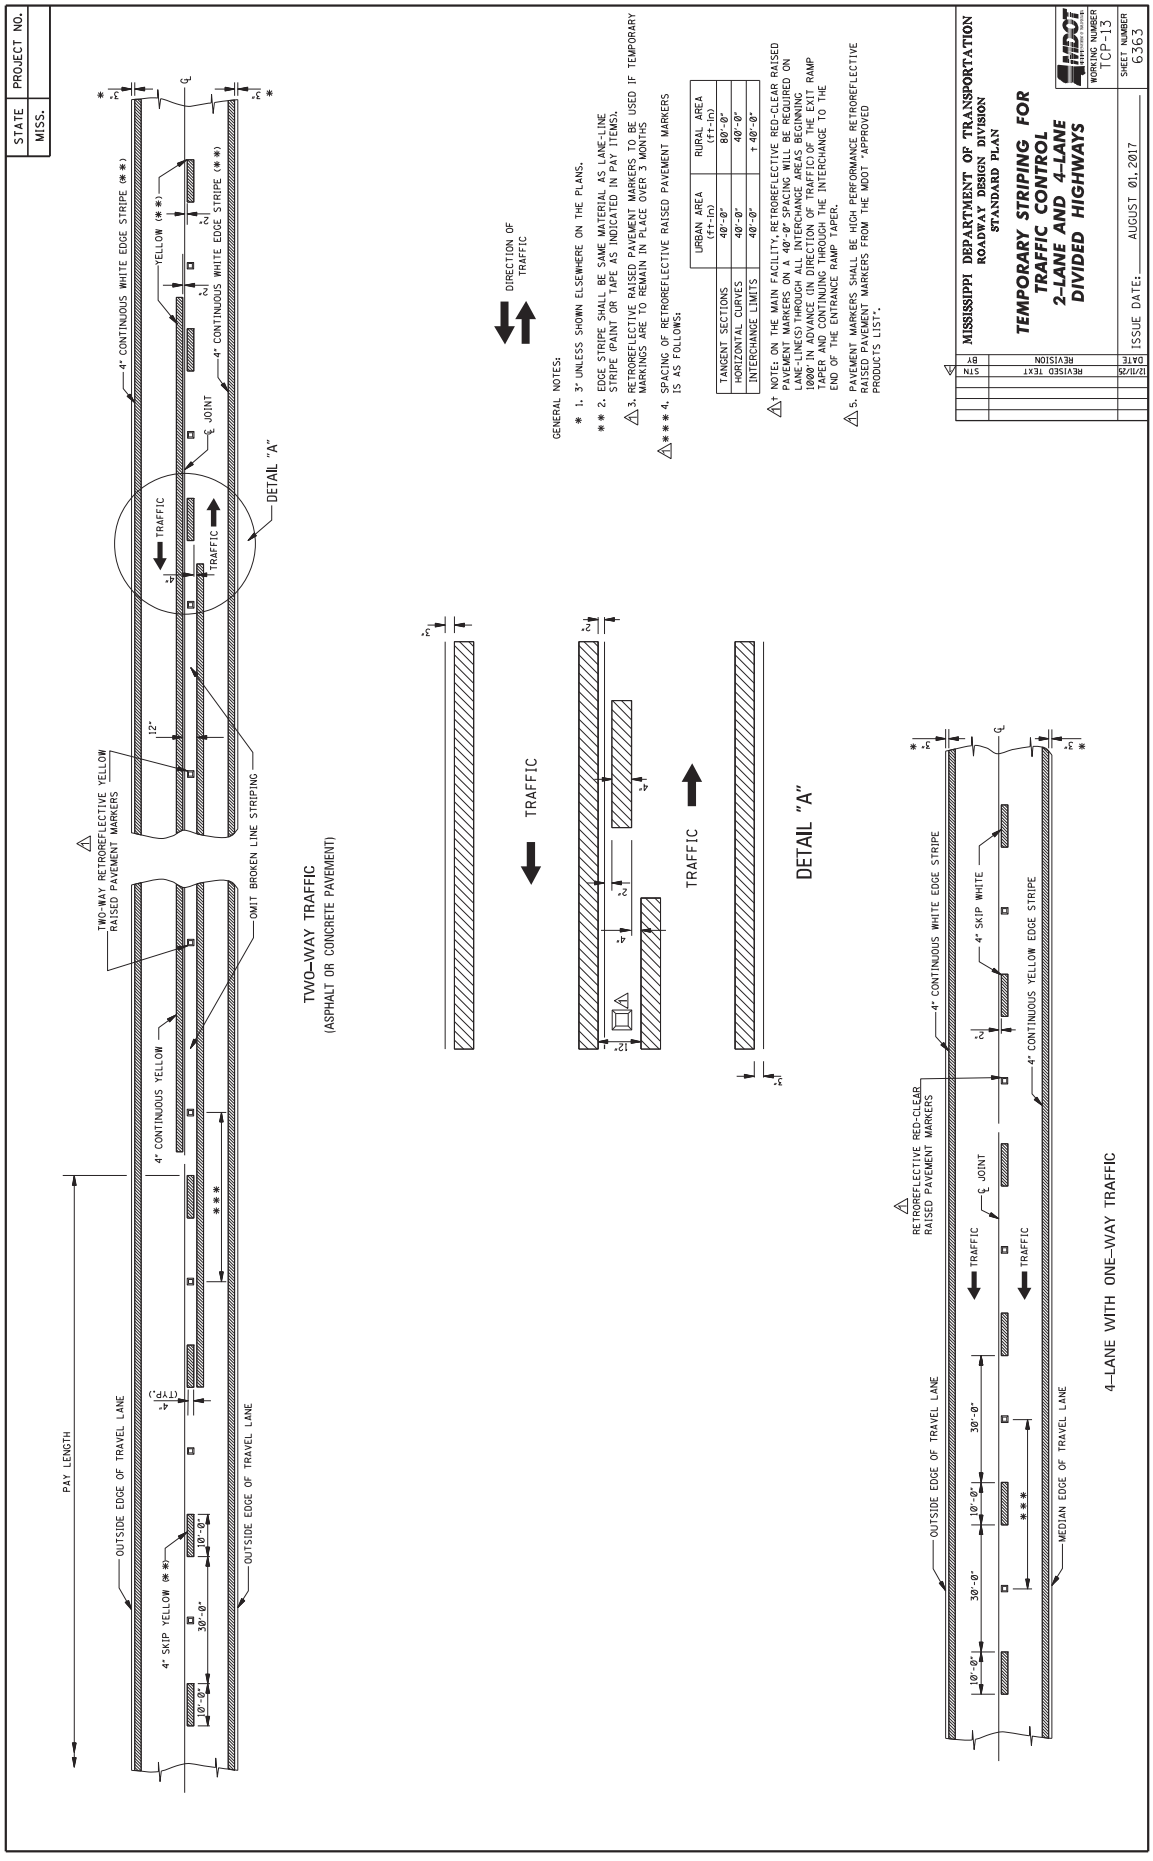
ISSUE DATE: AUGUST 01, 2017

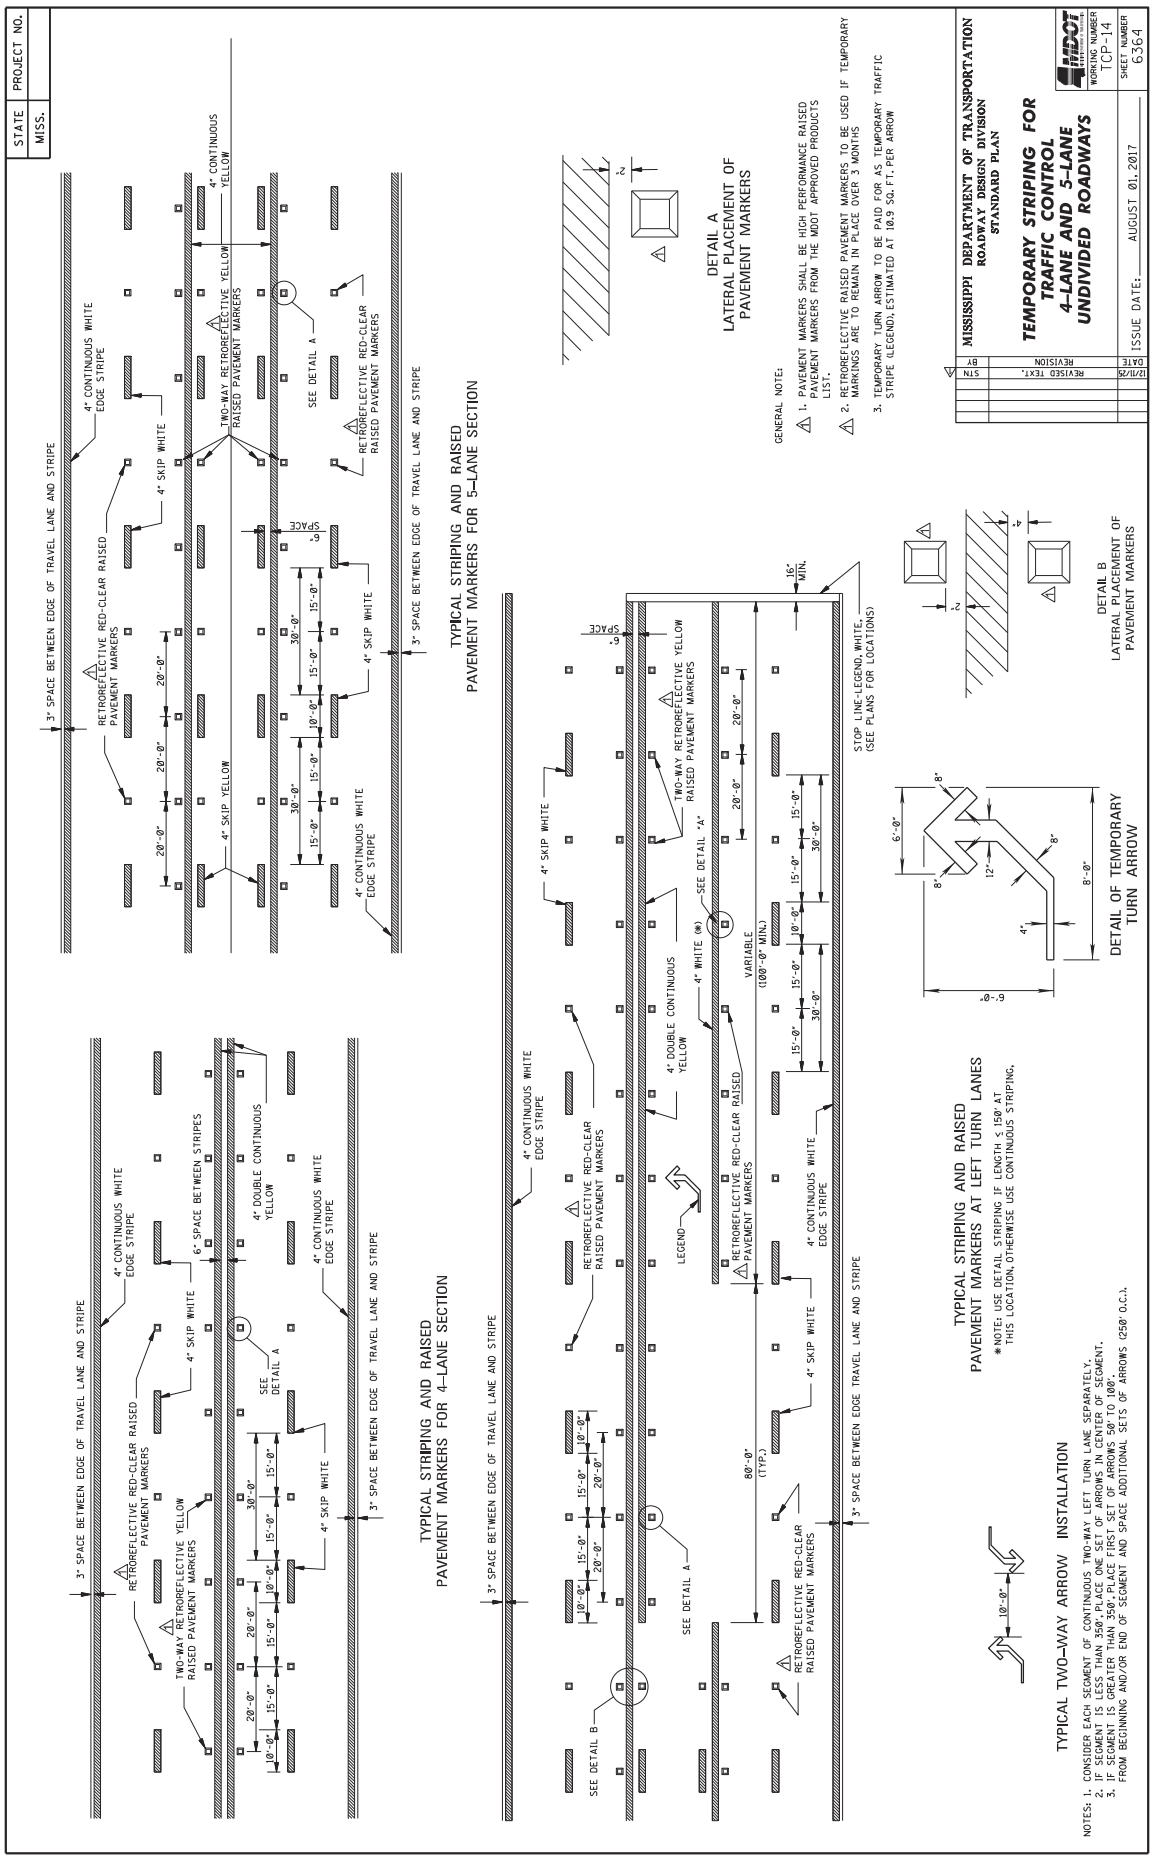
SHEET NUMBER: 6359

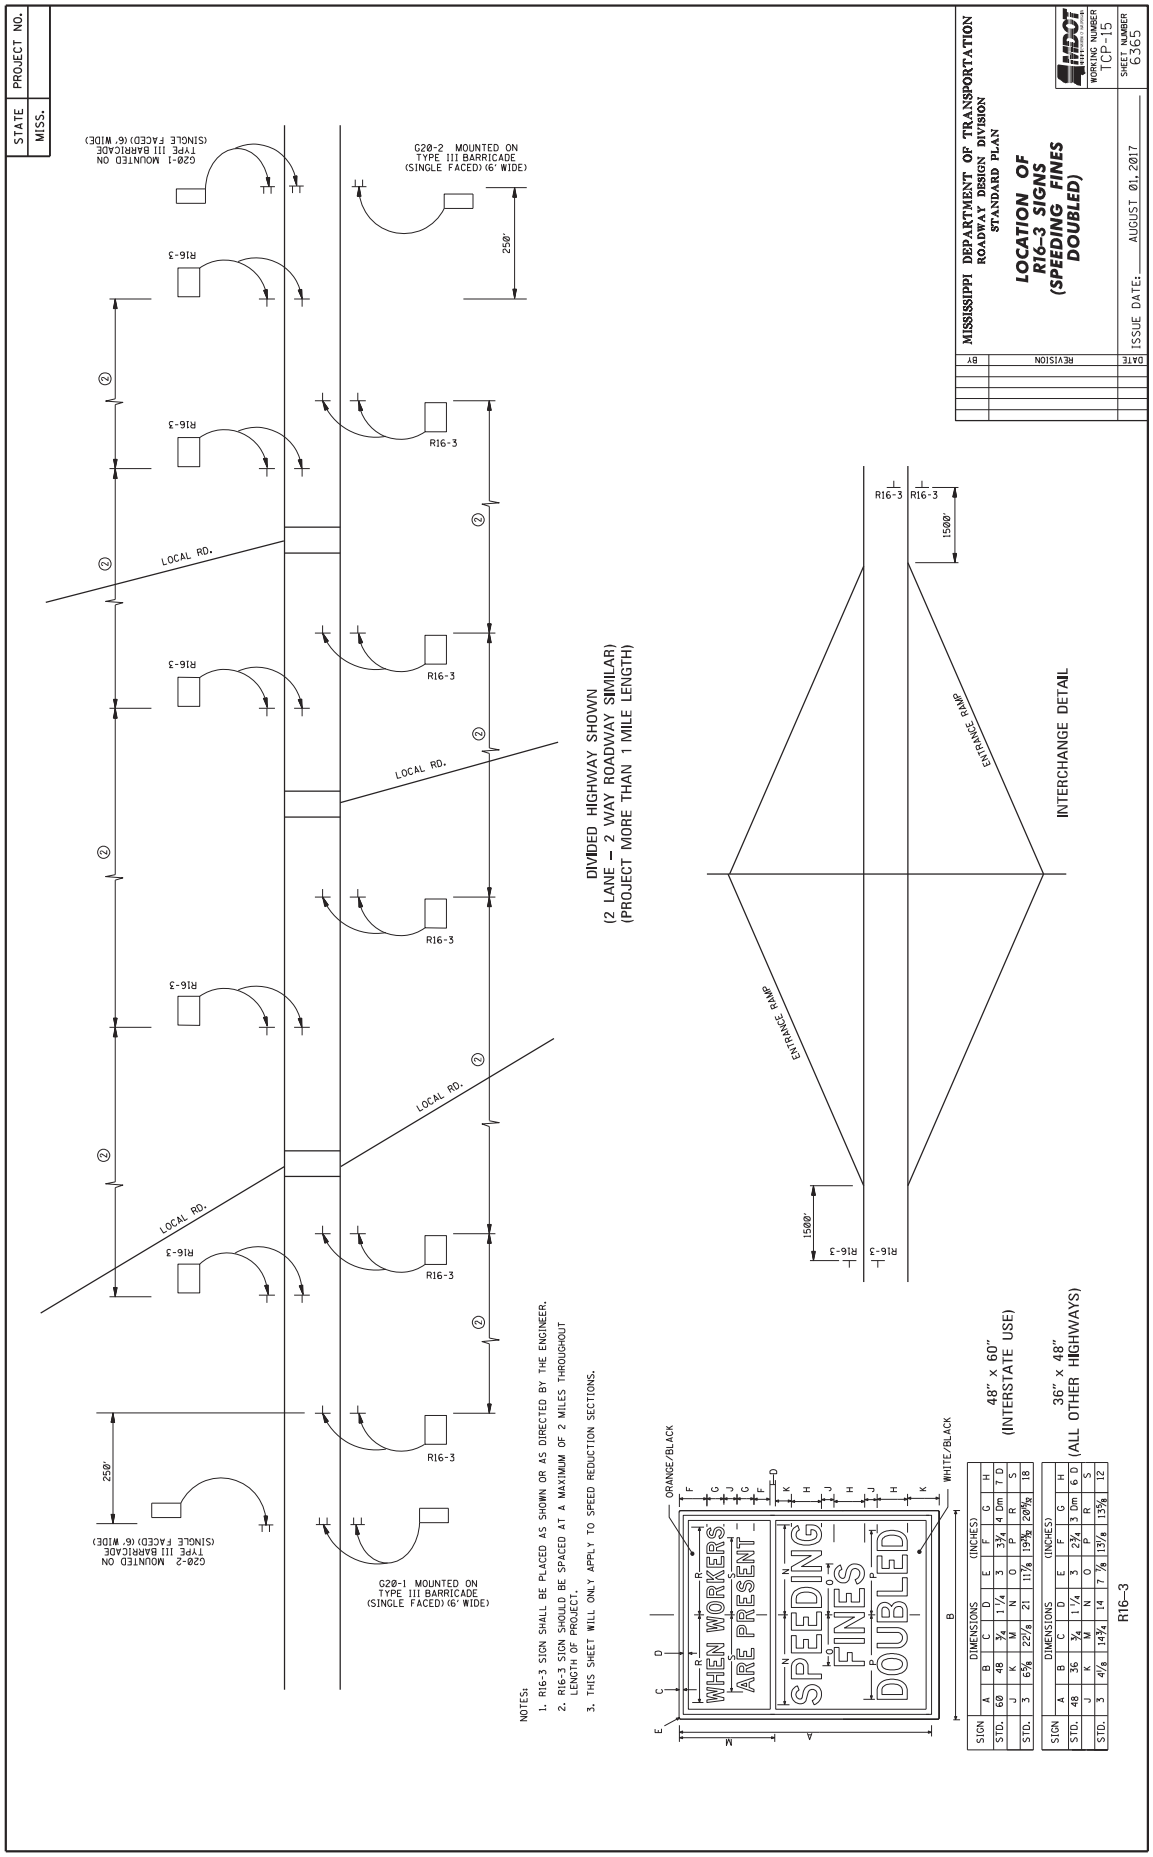

STATE MISS.
PROJECT NO.
GENERAL NOTES:
1. FOR SIGNING, FLASHING ARROW BOARD, AND DRUM SPACING CRITERIA SEE TYPICAL TRAFFIC CONTROL PLANS FOR LANE CLOSURES ON SHEETS TCP-2, TCP-3, TCP-4, AND TCP-5 AS APPROPRIATE.
2. WHEN USED, THE YIELD SIGN SHOULD BE LOCATED SO THAT RAMP VEHICULAR TRAFFIC HAS ADEQUATE SIGHT DISTANCE OF ONCOMING MAINLINE VEHICULAR TRAFFIC TO SELECT AN ACCEPTABLE GAP. THE MAINLINE VEHICULAR TRAFFIC FLOW, BUT SHOULD NOT BE LOCATED SO FAR FORWARD THAT MOTORISTS WILL BE ENCOURAGED TO STOP IN THE PATH OF THE MAINLINE TRAFFIC. ALSO, A LONGER ACCELERATION LANE SHOULD BE PROVIDED BEFORE THE MERGE POINT TO PROVIDE THE GAP SIZE NEEDED. IF SUFFICIENT GAPS ARE NOT AVAILABLE, CONSIDERATION SHOULD BE GIVEN TO CLOSING THE RAMP.
3. IF NO ACCELERATION LANE EXISTS FOR THE TEMPORARY ENTRANCE YIELD ISLAND, THE YIELD AHEAD SIGN (W3-2) SHALL BE REPLACED WITH A STOP SIGN (R1-1) AND A STOP AHEAD SIGN (W3-1), ONE ON EACH SIDE OF APPROACHING TRAFFIC. ALSO, A SUPPLEMENTAL STOP LINE SHOULD BE PLACED ACROSS THE RAMP AT THE DESIRED STOP LOCATION.
4. WHERE THE ACCELERATION DISTANCE IS SIGNIFICANTLY REDUCED, A SUPPLEMENTAL PLAQUE MAY BE PLACED BELOW THE YIELD AHEAD SIGN READING NO MERGE AREA.
5. DETERMINE TAPER LAYOUTS USING THE FOLLOWING GUIDELINES:
L = WS FOR SPEED OF 45 mph OR GREATER
L = WS²/60 FOR SPEEDS OF 40 mph OR LESS
WHERE:
L = MINIMUM LENGTH OF TAPER IN FEET
W = WIDTH OF OFFSET IN FEET
S = DESIGN SPEED OR 85TH PERCENTILE SPEED IN MPH, IF KNOWN
6. ALL TRAFFIC CONTROL ITEMS SHOWN ON THIS SHEET WILL NOT BE MEASURED FOR SEPARATE PAYMENT; THIS WORK SHALL BE INCLUDED IN THE PRICE BID FOR MAINTENANCE OF TRAFFIC.
IF MERGE REQUIRED:
FOR STOP CONDITION: PLACE CHANGEABLE MESSAGE SIGN (CMS) NEAR MIDDLE OF RAMP SHOWING PHASE I MESSAGE "STOP AHEAD" AND PHASE II MESSAGE "NO MERGE AREA".
FOR YIELD CONDITION: PLACE CHANGEABLE MESSAGE SIGN (CMS) NEAR MIDDLE OF RAMP SHOWING MESSAGE "YIELD AHEAD".
RETROREFLECTIVE FREE-STANDING PLASTIC DRUMS (TYP.)
ACCELERATION LANE
L
300' MIN. (SEE NOTE 2.)
SEE NOTE 1.
ENTRANCE RAMP (MERGE REQUIRED)
ENTRANCE RAMP (ADDED LANE)
EXIT RAMP (PHASE I)
EXIT RAMP (PHASE II)
W4-1
W3-2a
R1-2
W4-3R
E5-1
EXIT
ROAD WORK AHEAD
W20-1
W20-1
50' (TYP.)
500'
200'
(SEE NOTE 3.)
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
DETAILS OF OUTSIDE LANE CLOSURE AT EXIT AND ENTRANCE RAMPS
WORKING NUMBER TCP-10
SHEET NUMBER 6360
ISSUE DATE: AUGUST 01, 2017
DATE REVISION BY
12/1/25 REVISED TEXT STN


STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
TRAFFIC CONTROL PLAN FOR TEMPORARY CONSTRUCTION CROSSOVER
(WORK DAY ONLY)
WORKING NUMBER TCP-11
SHEET NUMBER 6361
ISSUE DATE: AUGUST 01, 2017
REVISION
DATE
BY
12/11/25 REVISED TEXT STN
GENERAL NOTES:
1. THE LOCATION OF CHANNELIZING DEVICES AND THE WORK AREA LAYOUT SHALL BE BASED ON THE CRITERIA IN THE FOLLOWING TABLE:
2. FLASHING ARROW BOARD SHOULD BE AS LEVEL AS POSSIBLE AS APPROVED BY THE ENGINEER. FLASHING ARROW PANEL SHOULD BE LOCATED AT THE BEGINNING OF THE TAPER OR IF THERE IS NO TAPER, TOWARD, BEHIND THE CHANNELIZING DEVICES IN THE CLOSED LANE.
3. ALL CHANNELIZING DEVICES SHALL BE RETROREFLECTIVE FREE STANDING PLASTIC DRUMS.
4. DIAMOND SHAPED TRAFFIC CONTROL SIGNS SHOULD BE A MINIMUM OF 48" X 48" AND SHALL BE BLACK COPY ON FLUORESCENT ORANGE SHEETING.
5. LOCATION OF CROSSOVERS WILL BE AS SHOWN ON THE PLANS OR AS DIRECTED BY THE ENGINEER.
6. USE OF CROSSOVER SHALL BE LIMITED TO TRUCKS APPROACHING FROM ONE DIRECTION ONLY.
7. REVERSE LAYOUT OF TAPERS, DRUMS AND SIGNS TO ACCOMMODATE TRUCKS APPROACHING FROM OPPOSITE DIRECTION.
8. EACH CONSTRUCTION CROSSOVER SHOULD BE CLOSED AS DIRECTED BY THE ENGINEER OR WHEN THE CONSTRUCTION OPERATION, ZONE OR SIGNS ENCROACH ON OR INTERFERES WITH THE OPERATION OF THE CONSTRUCTION CROSSOVER. THE CROSSOVER SHOULD BE CLOSED USING 24" OF TYPE III BARRICADE, DOUBLE FACED.
9. ALL TRAFFIC CONTROL ITEMS SHOWN ON THIS SHEET WILL NOT BE MEASURED FOR SEPARATE PAYMENT. THIS WORK SHALL BE INCLUDED IN THE PRICE BID FOR MAINTENANCE OF TRAFFIC.
POSTED SPEED AND/OR DESIGN SPEED OR ANTICIPATED OPERATING SPEED mph
MAXIMUM CHANNELIZING DEVICE SPACING (ft) TAPER
MAXIMUM CHANNELIZING DEVICE SPACING (ft) ALONG LANE LINE & WORK ZONE
LONGITUDINAL BUFFER SPACE (ft) ††
TAPER LENGTH (ft) †
<40 40 80 305 320
45 45 90 360 540
50 50 100 425 600
55 55 110 495 660
60 60 120 570 720
65 65 130 645 780
70 70 140 730 840
† NOTE: TAPER LENGTHS ARE DETERMINED USING THE FOLLOWING EQUATIONS:
L = WS FOR SPEEDS OF 45 mph OR GREATER
L = WS²/60 FOR SPEEDS OF 40 mph OR LESS
WHERE: L = MINIMUM LENGTH OF TAPER IN FEET
W = WIDTH OF OFFSET (USUALLY LANE WIDTH) IN FEET
S = DESIGN SPEED OR ANTICIPATED OPERATING SPEED IN MILES PER HOUR
†† NOTE: BUFFER SPACE MAY BE ADJUSTED AS NEEDED ACCORDING TO ROADWAY GEOMETRY TO MEET SIGHT DISTANCE REQUIREMENTS, AS DIRECTED BY THE ENGINEER.
LEGEND
** THE SPEED ON W13-1 SIGN SHALL BE 10 MPH LESS THAN THE POSTED SPEED LIMIT UNLESS OTHERWISE DIRECTED BY COMMISSION ORDER.
FLASHING ARROW BOARD (TYPE "C")
RETROREFLECTIVE FREE-STANDING PLASTIC DRUMS
TYPE "B" WARNING LIGHTS
NOTE: IF VEHICLE MOUNTED ARROW BOARDS USED, SHOULD BE AS HIGH AS PRACTICAL.
7' MIN.
EDGE OF TRAVELED WAY
W4-2L
CHANNELIZING DEVICES (SEE NOTE 3 FOR TYPES REQUIRED)
LONG. BUFFER SPACE
DRUMS @ 20' O.C.
100' 100' 100' 200' 300' 500' 1000' 1100' 2600'
½ L
L
W20-5D TRUCKS TURNING LEFT
W4-2L
W20-5L LEFT LANE CLOSED ½MILE (½ MILE)
W20-1 ROAD WORK 1 MILE (1 MILE)
W20-5L LEFT LANE CLOSED 1500FT (1500 FT)
W13-1 XX MPH (XX MPH)**
STATION NO. AS SHOWN ON PLANS
VARIABLE MEDIAN WIDTH
20'
R
DETAIL OF TEMPORARY CROSSOVER
NOTE: R = 0.5 MEDIAN WIDTH)
8" SERIES "C" LETTERS
3" RADII
TRUCKS TURNING LEFT
48"
DETAIL OF W20-5D


STATE
MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
TRAFFIC CONTROL PLANS
UNEVEN PAVEMENT
DETAILS
WORKING NUMBER
TCP-12
SHEET NUMBER
6362
ISSUE DATE: AUGUST 01, 2017
DATE
BY
REVISION
12/11/25
STM
REVISED TEXT
4/22/26
TG
REVISED DIMENSIONS AND
ADDED NOTE
TWO-WAY TRAFFIC
ONE-WAY TRAFFIC
UNEVEN LANES
W8-11
36 X 36
48 X 48
1/2 MILE
GENERAL NOTES:
1. UNEVEN LANE LINE:
A. IF LESS THAN OR EQUAL TO 1½", NO SIGNS REQUIRED.
B. IF GREATER THAN 1½" AND LESS THAN OR EQUAL TO 2¼", PLACE SIGNS AS SHOWN ON THIS SHEET.
C. IF GREATER THAN 2¼", TRAFFIC SHOULD NOT BE ALLOWED TO CROSS UNEVEN LANE LINE.
2. THE W8-11 SIGNS SHOULD BE SPACED AT 1/2 MILE INTERVALS THROUGHOUT UNEVEN LANE LINE LIMITS.
3. ALL TRAFFIC CONTROL ITEMS SHOWN ON THIS SHEET SHALL BE PAID FOR UNDER MAINTENANCE OF TRAFFIC.
4. SIGNS SHALL BE RETROREFLECTIVE WITH ORANGE BACKGROUND/BLACK COPY.
5. IN AREAS WITH CONTROLLED ACCESS, ONE-WAY TRAFFIC, W8-11 SIGNS SHOULD BE INSTALLED WITHIN 1000 FEET OF THE ENTRANCE RAMP TAPERS.

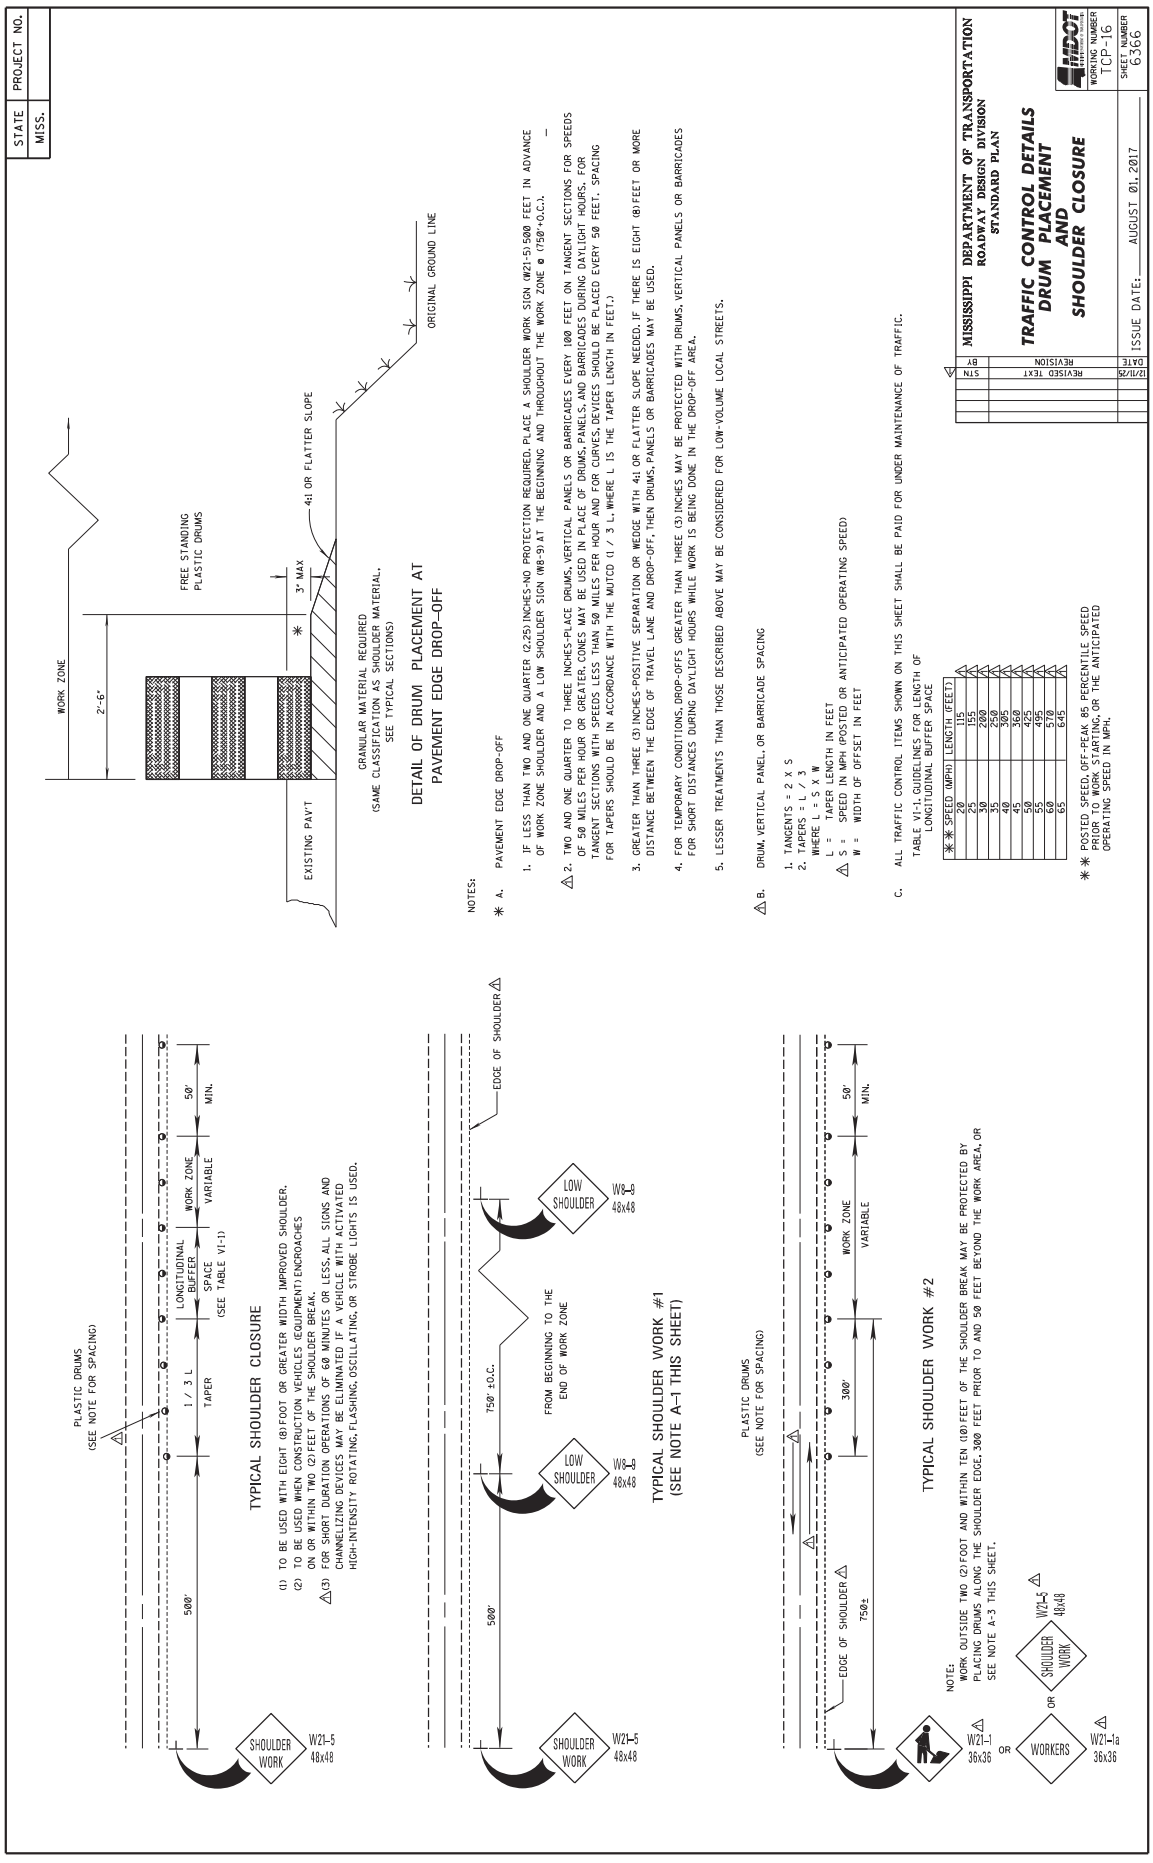

STATE
MISS.
PROJECT NO.
PAY LENGTH
OUTSIDE EDGE OF TRAVEL LANE
4" SKIP YELLOW (**)
4" CONTINUOUS YELLOW
TWO-WAY RETROREFLECTIVE YELLOW RAISED PAVEMENT MARKERS
OMIT BROKEN LINE STRIPING
OUTSIDE EDGE OF TRAVEL LANE
4" CONTINUOUS WHITE EDGE STRIPE (**)
YELLOW (**)
4" CONTINUOUS WHITE EDGE STRIPE (**)
℄ JOINT
TRAFFIC
DETAIL "A"
TWO-WAY TRAFFIC
(ASPHALT OR CONCRETE PAVEMENT)
DIRECTION OF TRAFFIC
GENERAL NOTES:
* 1. 3" UNLESS SHOWN ELSEWHERE ON THE PLANS.
** 2. EDGE STRIPE SHALL BE SAME MATERIAL AS LANE-LINE STRIPE (PAINT OR TAPE AS INDICATED IN PAY ITEMS).
△3. RETROREFLECTIVE RAISED PAVEMENT MARKERS TO BE USED IF TEMPORARY MARKINGS ARE TO REMAIN IN PLACE OVER 3 MONTHS
△*** 4. SPACING OF RETROREFLECTIVE RAISED PAVEMENT MARKERS IS AS FOLLOWS:
URBAN AREA (ft-in) / RURAL AREA (ft-in)
TANGENT SECTIONS 40'-0" / 80'-0"
HORIZONTAL CURVES 40'-0" / 40'-0"
INTERCHANGE LIMITS 40'-0" / † 40'-0"
△+ NOTE: ON THE MAIN FACILITY, RETROREFLECTIVE RED-CLEAR RAISED PAVEMENT MARKERS ON A 40'-0" SPACING WILL BE REQUIRED ON LANE-LINES) THROUGH ALL INTERCHANGE AREAS BEGINNING (ADJACENT TO ENTRANCE RAMP TAPER) AT THE GORE POINT OF EXIT RAMP TAPER AND CONTINUING THROUGH THE INTERCHANGE TO THE END OF THE ENTRANCE RAMP TAPER.
△5. PAVEMENT MARKERS SHALL BE HIGH PERFORMANCE RETROREFLECTIVE RAISED PAVEMENT MARKERS FROM THE MDOT "APPROVED PRODUCTS LIST".
DETAIL "A"
4-LANE WITH ONE-WAY TRAFFIC
RETROREFLECTIVE RED-CLEAR RAISED PAVEMENT MARKERS
4" CONTINUOUS WHITE EDGE STRIPE
4" SKIP WHITE
4" CONTINUOUS YELLOW EDGE STRIPE
OUTSIDE EDGE OF TRAVEL LANE
MEDIAN EDGE OF TRAVEL LANE
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
TEMPORARY STRIPING FOR TRAFFIC CONTROL 2-LANE AND 4-LANE DIVIDED HIGHWAYS
WORKING NUMBER TCP-13
ISSUE DATE: AUGUST 01, 2017
SHEET NUMBER 6363
STN / REVISED TEXT / DATE / BY
12/1/25


STATE MISS.
PROJECT NO.
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
TEMPORARY STRIPING FOR TRAFFIC CONTROL 4-LANE AND 5-LANE UNDIVIDED ROADWAYS
WORKING NUMBER TCP-14
SHEET NUMBER 6364
ISSUE DATE: AUGUST 01, 2017
STR BY DATE REVISION
12/11/25 REVISED TEXT.
TYPICAL STRIPING AND RAISED PAVEMENT MARKERS FOR 4-LANE SECTION
TYPICAL STRIPING AND RAISED PAVEMENT MARKERS FOR 5-LANE SECTION
TYPICAL STRIPING AND RAISED PAVEMENT MARKERS AT LEFT TURN LANES
* NOTE: USE DETAIL STRIPING IF LENGTH ≤ 150' AT THIS LOCATION, OTHERWISE USE CONTINUOUS STRIPING.
TYPICAL TWO-WAY ARROW INSTALLATION
DETAIL A LATERAL PLACEMENT OF PAVEMENT MARKERS
DETAIL B LATERAL PLACEMENT OF PAVEMENT MARKERS
DETAIL OF TEMPORARY TURN ARROW
GENERAL NOTE:
1. PAVEMENT MARKERS SHALL BE HIGH PERFORMANCE RAISED PAVEMENT MARKERS FROM THE MDOT APPROVED PRODUCTS LIST.
2. RETROREFLECTIVE RAISED PAVEMENT MARKERS TO BE USED IF TEMPORARY MARKINGS ARE TO REMAIN IN PLACE OVER 3 MONTHS
3. TEMPORARY TURN ARROW TO BE PAID FOR AS TEMPORARY TRAFFIC STRIPE (LEGEND), ESTIMATED AT 10.9 SQ. FT. PER ARROW
NOTES: 1. CONSIDER EACH SEGMENT OF CONTINUOUS TWO-WAY LEFT TURN LANE SEPARATELY.
2. IF SEGMENT IS LESS THAN 350', PLACE ONE SET OF ARROWS IN CENTER OF SEGMENT.
3. IF SEGMENT IS GREATER THAN 350', PLACE FIRST SET OF ARROWS 50' TO 100' FROM BEGINNING AND/OR END OF SEGMENT AND SPACE ADDITIONAL SETS OF ARROWS @250 O.C.).



SIGN	A	B	C	D	E	F	G	H
STD.	60	48	¾	1 ¼	3	3¾	4 Dm	7 D
	J	K	M	N	O	P	R	S
STD.	3	6⅝	22⅛	21	11⅞	19⅜	20⅝	18

SIGN	A	B	C	D	E	F	G	H
STD.	48	36	¾	1 ¼	3	2¾	3 Dm	6 D
	J	K	M	N	O	P	R	S
STD.	3	4⅛	14⅜	14	7 ⅛	13⅜	13⅝	12


STATE MISS.
PROJECT NO.
WORK ZONE
2'-6"
FREE STANDING PLASTIC DRUMS
3" MAX
4:1 OR FLATTER SLOPE
EXISTING PAVT
GRANULAR MATERIAL REQUIRED (SAME CLASSIFICATION AS SHOULDER MATERIAL, SEE TYPICAL SECTIONS)
ORIGINAL GROUND LINE
DETAIL OF DRUM PLACEMENT AT PAVEMENT EDGE DROP-OFF
NOTES:
* A. PAVEMENT EDGE DROP-OFF
1. IF LESS THAN TWO AND ONE QUARTER (2.25) INCHES-NO PROTECTION REQUIRED. PLACE A SHOULDER WORK SIGN (W21-5) 500 FEET IN ADVANCE OF WORK ZONE SHOULDER AND A LOW SHOULDER SIGN (W8-9) AT THE BEGINNING AND THROUGHOUT THE WORK ZONE @ (750'+O.C.).
△2. TWO AND ONE QUARTER TO THREE INCHES-PLACE DRUMS, VERTICAL PANELS OR BARRICADES EVERY 100 FEET ON TANGENT SECTIONS FOR SPEEDS OF 50 MILES PER HOUR OR GREATER. CONES MAY BE USED IN PLACE OF DRUMS, PANELS, AND BARRICADES DURING DAYLIGHT HOURS. FOR TANGENT SECTIONS WITH SPEEDS LESS THAN 50 MILES PER HOUR AND FOR CURVES, DEVICES SHOULD BE PLACED EVERY 50 FEET. SPACING FOR TAPERS SHOULD BE IN ACCORDANCE WITH THE MUTCD (1 / 3 L, WHERE L IS THE TAPER LENGTH IN FEET.)
3. GREATER THAN THREE (3) INCHES-POSITIVE SEPARATION OR WEDGE WITH 4:1 OR FLATTER SLOPE NEEDED. IF THERE IS EIGHT (8) FEET OR MORE DISTANCE BETWEEN THE EDGE OF TRAVEL LANE AND DROP-OFF, THEN DRUMS, PANELS OR BARRICADES MAY BE USED.
4. FOR TEMPORARY CONDITIONS, DROP-OFFS GREATER THAN THREE (3) INCHES MAY BE PROTECTED WITH DRUMS, VERTICAL PANELS OR BARRICADES FOR SHORT DISTANCES DURING DAYLIGHT HOURS WHILE WORK IS BEING DONE IN THE DROP-OFF AREA.
5. LESSER TREATMENTS THAN THOSE DESCRIBED ABOVE MAY BE CONSIDERED FOR LOW-VOLUME LOCAL STREETS.
△B. DRUM, VERTICAL PANEL, OR BARRICADE SPACING
1. TANGENTS = 2 X S
2. TAPERS = L / 3
WHERE L = S X W
L = TAPER LENGTH IN FEET
△S = SPEED IN MPH (POSTED OR ANTICIPATED OPERATING SPEED)
W = WIDTH OF OFFSET IN FEET
C. ALL TRAFFIC CONTROL ITEMS SHOWN ON THIS SHEET SHALL BE PAID FOR UNDER MAINTENANCE OF TRAFFIC.
TABLE VI-1, GUIDELINES FOR LENGTH OF LONGITUDINAL BUFFER SPACE
** SPEED (MPH) | LENGTH (FEET)
20 | 115
25 | 155
30 | 200
35 | 245
40 | 320
45 | 360
50 | 425
55 | 495
60 | 570
65 | 645
** POSTED SPEED, OFF-PEAK 85 PERCENTILE SPEED PRIOR TO WORK STARTING, OR THE ANTICIPATED OPERATING SPEED IN MPH.
PLASTIC DRUMS (SEE NOTE FOR SPACING)
1 / 3 L
TAPER
LONGITUDINAL BUFFER SPACE (SEE TABLE VI-1)
WORK ZONE VARIABLE
50' MIN.
500'
SHOULDER WORK
W21-5 48x48
TYPICAL SHOULDER CLOSURE
(1) TO BE USED WITH EIGHT (8) FOOT OR GREATER WIDTH IMPROVED SHOULDER.
(2) TO BE USED WHEN CONSTRUCTION VEHICLES (EQUIPMENT) ENCROACHES ON OR WITHIN TWO (2) FEET OF THE SHOULDER BREAK.
△(3) FOR SHORT DURATION OPERATIONS OF 60 MINUTES OR LESS, ALL SIGNS AND CHANNELIZING DEVICES MAY BE ELIMINATED IF A VEHICLE WITH ACTIVATED HIGH-INTENSITY ROTATING, FLASHING, OSCILLATING, OR STROBE LIGHTS IS USED.
EDGE OF SHOULDER △
750' ±O.C.
FROM BEGINNING TO THE END OF WORK ZONE
LOW SHOULDER
W8-9 48x48
500'
SHOULDER WORK
W21-5 48x48
TYPICAL SHOULDER WORK #1
(SEE NOTE A-1 THIS SHEET)
PLASTIC DRUMS (SEE NOTE FOR SPACING)
EDGE OF SHOULDER △
750±
300'
WORK ZONE VARIABLE
50' MIN.
NOTE: WORK OUTSIDE TWO (2) FOOT AND WITHIN TEN (10) FEET OF THE SHOULDER BREAK MAY BE PROTECTED BY PLACING DRUMS ALONG THE SHOULDER EDGE. 300 FEET PRIOR TO AND 50 FEET BEYOND THE WORK AREA, OR SEE NOTE A-3 THIS SHEET.
△W21-1 36x36
OR
WORKERS
W21-1a 36x36
OR
SHOULDER WORK
W21-5 48x48
TYPICAL SHOULDER WORK #2
△ REVISED TEXT STN 12/11/25
REVISION BY DATE
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN
TRAFFIC CONTROL DETAILS
DRUM PLACEMENT AND
SHOULDER CLOSURE
MDOT
WORKING NUMBER TCP-16
ISSUE DATE: AUGUST 01, 2017
SHEET NUMBER 6366

General Decision Number: MS20260123 05/18/2026

State: Mississippi

Construction Types: Highway

Counties: Mississippi Counties of
Yazoo

Modification Number	Publication Date
0	01/02/2026
1	05/18/2026

SUMS2010-046 08/04/2014

	Rates	Fringes
TRUCK DRIVER: SEMI/TRAILER TRUCK	$ 17.34	0.00
TRUCK DRIVER: DUMP TRUCK (ALL TYPES)	$ 13.58	0.00
TRUCK DRIVER: WATER TRUCK	$ 13.15	0.00
TRUCK DRIVER: OFF THE ROAD TRUCK	$ 12.31	0.00
TRUCK DRIVER: MECHANIC	$ 12.35	0.00
TRUCK DRIVER: LOWBOY TRUCK	$ 12.49	0.00
TRUCK DRIVER: FLATBED TRUCK	$ 13.29	0.00
OPERATOR: TRENCHER	$ 15.00	0.00
OPERATOR: TRACTOR	$ 9.98	0.00
OPERATOR: SCRAPER	$ 12.63	0.00
OPERATOR: ROLLER (ALL TYPES)	$ 12.14	0.00
OPERATOR: PILEDRIVER	$ 15.13	0.00
OPERATOR: PAVER (ASPHALT, AGGREGATE, AND CONCRETE)	$ 13.01	0.00
OPERATOR: OILER	$ 13.08	0.48
OPERATOR: MIXER	$ 14.85	0.00
OPERATOR: MILLING MACHINE	$ 15.38	0.00
OPERATOR: MECHANIC	$ 16.28	0.00
OPERATOR: LOADER	$ 11.73	0.00
OPERATOR: GRADER/BLADE	$ 13.84	0.00
OPERATOR: DRILL	$ 19.22	0.00
OPERATOR: DISTRIBUTOR	$ 11.70	0.00
OPERATOR: CRANE	$ 16.00	0.00
OPERATOR: CONCRETE SAW	$ 13.60	0.00
OPERATOR: BULLDOZER	$ 15.69	0.00
OPERATOR: BROOM/SWEEPER	$ 10.17	0.00
OPERATOR: BACKHOE/EXCAVATOR/TRACKHOE	$ 13.28	0.00
OPERATOR: ASPHALT SPREADER	$ 16.13	0.00
LABORER: LABORER-CONES/ BARRICADES/BARRELS - SETTER/MOVER/SWEEPER	$ 10.53	0.00
LABORER: PIPELAYER	$ 13.13	0.00
LABORER: MASON TENDER - CEMENT/CONCRETE	$ 11.69	0.00
LABORER: LANDSCAPE	$ 9.82	0.00
LABORER: GRADE CHECKER	$ 10.46	0.00

LABORER: FLAGGER.....$ 9.83 0.00
LABORER: COMMON OR GENERAL, INCLUDING ASPHALT
RAKING, SHOVELING, SPREADING AND CONCRETE WORK.....$ 10.92 0.00
IRONWORKER, REINFORCING.....$ 16.43 0.00
INSTALLER - SIGN.....$ 11.56 0.00
INSTALLER - GUARDRAIL.....$ 11.42 0.00
HIGHWAY/PARKING LOT STRIPING: TRUCK DRIVER (LINE
STRIPING TRUCK).....$ 12.63 0.00
ELECTRICIAN.....$ 22.64 7.73
CEMENT MASON/CONCRETE FINISHER.....$ 13.23 0.00
CARPENTER, EXCLUDES FORM WORK.....$ 14.21 0.00
CARPENTER (FORM WORK ONLY).....$ 12.26 0.12

WELDERS - Receive rate prescribed for craft performing
operation to which welding is incidental.
==========
Note: Executive Order (EO) 13706, Establishing Paid Sick Leave
for Federal Contractors applies to all contracts subject to the
Davis-Bacon Act for which the contract is awarded (and any
solicitation was issued) on or after January 1, 2017. If this
contract is covered by the EO, the contractor must provide
employees with 1 hour of paid sick leave for every 30 hours
they work, up to 56 hours of paid sick leave each year.
Employees must be permitted to use paid sick leave for their
own illness, injury or other health-related needs, including
preventive care; to assist a family member (or person who is
like family to the employee) who is ill, injured, or has other
health-related needs, including preventive care; or for reasons
resulting from, or to assist a family member (or person who is
like family to the employee) who is a victim of, domestic
violence, sexual assault, or stalking. Additional information
on contractor requirements and worker protections under the EO
is available at
https://www.dol.gov/agencies/whd/government-contracts.

Note: Executive Order 13658 generally applies to contracts subject
to the Davis-Bacon Act that were awarded on or between January 1,
2015 and January 29, 2022, and that have not been renewed or
extended on or after January 30, 2022. Executive Order 13658 does
not apply to contracts subject only to the Davis-Bacon Related Acts
regardless of when they were awarded. If a contract is subject to
Executive Order 13658, the contractor must pay all covered workers
at least $13.65 per hour (or the applicable wage rate listed on this
wage determination, if it is higher) for all hours spent performing on
the contract from May 11, 2026, through December 31, 2026. The
applicable Executive Order minimum wage rate will be adjusted annually.
Additional information on contractor requirements and worker
protections under Executive Order 13658 is available at
www.dol.gov/whd/govcontracts.

Unlisted classifications needed for work not included within
the scope of the classifications listed may be added after
award only as provided in the labor standards contract clauses
(29CFR 5.5 (a) (1) (iii)).

The body of each wage determination lists the classifications and wage rates that have been found to be prevailing for the type(s) of construction and geographic area covered by the wage determination. The classifications are listed in alphabetical order under rate identifiers indicating whether the particular rate is a union rate (current union negotiated rate), a survey rate, a weighted union average rate, a state adopted rate, or a supplemental classification rate.

Union Rate Identifiers

A four-letter identifier beginning with characters other than **SU**, **UAVG**, **SA**, or **SC** denotes that a union rate was prevailing for that classification in the survey. Example: PLUM0198-005 07/01/2024. PLUM is an identifier of the union whose collectively bargained rate prevailed in the survey for this classification, which in this example would be Plumbers. 0198 indicates the local union number or district council number where applicable, i.e., Plumbers Local 0198. The next number, 005 in the example, is an internal number used in processing the wage determination. The date, 07/01/2024 in the example, is the effective date of the most current negotiated rate.

Union prevailing wage rates are updated to reflect all changes over time that are reported to WHD in the rates in the collective bargaining agreement (CBA) governing the classification.

Union Average Rate Identifiers

The UAVG identifier indicates that no single rate prevailed for those classifications, but that 100% of the data reported for the classifications reflected union rates. EXAMPLE: UAVG-OH-0010 01/01/2024. UAVG indicates that the rate is a weighted union average rate. OH indicates the State of Ohio. The next number, 0010 in the example, is an internal number used in producing the wage determination. The date, 01/01/2024 in the example, indicates the date the wage determination was updated to reflect the most current union average rate.

A UAVG rate will be updated once a year, usually in January, to reflect a weighted average of the current rates in the collective bargaining agreements on which the rate is based.

Survey Rate Identifiers

The **SU** identifier indicates that either a single non-union rate prevailed (as defined in 29 CFR 1.2) for this classification in the survey or that the rate was derived by computing a weighted average rate based on all the rates reported in the survey for that classification. As a weighted average rate includes all rates reported in the survey, it may include both union and non-union rates. Example: SUFL2022-007 6/27/2024. SU indicates the rate is a single non-union prevailing rate or a weighted average of survey data for that classification. FL indicates the State of Florida. 2022 is the year of the survey on which these classifications and rates are based. The next number, 007 in the example, is an internal

number used in producing the wage determination. The date, 6/27/2024 in the example, indicates the survey completion date for the classifications and rates under that identifier.

•SU• wage rates typically remain in effect until a new survey is conducted. However, the Wage and Hour Division (WHD) has the discretion to update such rates under 29 CFR 1.6(c)(1).

State Adopted Rate Identifiers

The •SA• identifier indicates that the classifications and prevailing wage rates set by a state (or local) government were adopted under 29 C.F.R 1.3(g)-(h). Example: SAME2023-007 01/03/2024. SA reflects that the rates are state adopted. ME refers to the State of Maine. 2023 is the year during which the state completed the survey on which the listed classifications and rates are based. The next number, 007 in the example, is an internal number used in producing the wage determination. The date, 01/03/2024 in the example, reflects the date on which the classifications and rates under the •SA• identifier took effect under state law in the state from which the rates were adopted.

WAGE DETERMINATION APPEALS PROCESS

1) Has there been an initial decision in the matter? This can be:

a) a survey underlying a wage determination
b) an existing published wage determination
c) an initial WHD letter setting forth a position on a wage determination matter
d) an initial conformance (additional classification and rate) determination

On survey related matters, initial contact, including requests for summaries of surveys, should be directed to the WHD Branch of Wage Surveys. Requests can be submitted via email to davisbaconinfo@dol.gov or by mail to:

Branch of Wage Surveys
Wage and Hour Division
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

Regarding any other wage determination matter such as conformance decisions, requests for initial decisions should be directed to the WHD Branch of Construction Wage Determinations. Requests can be submitted via email to BCWD-Office@dol.gov or by mail to:

Branch of Construction Wage Determinations
Wage and Hour Division
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

2) If an initial decision has been issued, then any interested party (those affected by the action) that disagrees with the decision can request review and reconsideration from the Wage and Hour Administrator (See 29 CFR Part 1.8 and 29 CFR Part 7). Requests for review and reconsideration can be submitted via email to dba.reconsideration@dol.gov or by mail to:

Wage and Hour Administrator

U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

The request should be accompanied by a full statement of the interested party's position and any information (wage payment data, project description, area practice material, etc.) that the requestor considers relevant to the issue.

3) If the decision of the Administrator is not favorable, an interested party may appeal directly to the Administrative Review Board (formerly the Wage Appeals Board). Write to:

Administrative Review Board
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210.

==========

END OF GENERAL DECISION

SUPPLEMENT TO FORM FHWA-1273

DATE: 07/25/2026

SUBJECT: Federal Contract Provisions for Subcontracts

Federal Contract Provisions for Subcontracts

All subcontracts shall be in writing and contain all pertinent provisions and requirements of the prime contract.

Each "Request for Permission to Subcontract" (Mississippi Department of Transportation Form CAD-720) shall include a copy of the subcontract. The federal contract provisions (FHWA-1273, SUPPLEMENT TO FORM FHWA-1273, NOTICE OF NON-DISCRIMINATION AND DAVIS-BACON AND RELATED ACT PROVISIONS (WAGE RATES)) must be physically incorporated as part of the subcontract. A completed Mississippi Department of Transportation Form CAD-725 must be attached to the CAD-720.

CONTRACT PROVISIONS FOR FEDERAL-AID CONSTRUCTION CONTRACTS

I. General
II. Nondiscrimination
III. Davis-Bacon and Related Act Provisions
IV. Contract Work Hours and Safety Standards Act Provisions
V. Subletting or Assigning the Contract
VI. Safety: Accident Prevention
VII. False Statements Concerning Highway Projects
VIII. Implementation of Clean Air Act and Federal Water Pollution Control Act
IX. Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion
X. Certification Regarding Use of Contract Funds for Lobbying
XI. Use of United States-Flag Vessels

ATTACHMENTS

A. Employment and Materials Preference for Appalachian Development Highway System or Appalachian Local Access Road Contracts (included in Appalachian contracts only).

I. GENERAL

1. Historically, contracting agencies using Federal-aid highway funds were required to ensure Form FHWA-1273 was physically incorporated into all contracts and subcontracts. Effective June 10, 2026, this requirement was eliminated [91 FR 25492]. Future use of Form FHWA-1273 is now optional on the part of the contracting agency using Federal-aid highway funds. FHWA continues to make Form FHWA-1273 available as a convenience to contracting agencies. Contracting agencies must continue to ensure compliance with the provisions cited in Form FHWA-1273 in accordance with the provisions regardless of the use of Form FHWA-1273. Accordingly, the contracting agency retains the authority to determine whether the contractor must use Form FHWA-1273 to physically incorporate required contract provisions in each subcontract and in lower tier contracts. Where permitted by the contracting agency, the contractor may choose other ways to include required contract provisions in each subcontract, besides incorporating Form FHWA-1273. Contract provisions in Form FHWA-1273 are not required to be physically included in subcontracts for design services on Federal-aid design-build contracts, or in purchase orders, rental agreements and other agreements for supplies or services.

The applicable provisions of Form FHWA-1273 are incorporated by reference for work done under any purchase order, rental agreement or agreement for other services. The prime contractor or design-builder shall be responsible for compliance by any subcontractor, lower-tier subcontractor or service provider.

Contracting agencies may reference Form FHWA-1273 in solicitation-for-bids or request-for-proposals documents.

2. Subject to the applicability criteria noted in the following sections, these contract provisions shall apply to all work performed on the contract by the contractor's own organization and with the assistance of workers under the contractor's immediate superintendence and to all work performed on the contract by piecework, station work, or by subcontract.

3. A breach of any of the stipulations contained in these Required Contract Provisions may be sufficient grounds for withholding of progress payments, withholding of final payment, termination of the contract, suspension / debarment or any other action determined to be appropriate by the contracting agency and FHWA.

4. Selection of Labor: During the performance of this contract, the contractor shall not use convict labor for any purpose within the limits of a construction project on a Federal-aid highway unless it is labor performed by convicts who are on parole, supervised release, or probation. 23 U.S.C. 114(b). The term Federal-aid highway does not include roadways functionally classified as local roads or rural minor collectors. 23 U.S.C. 101(a).

II. NONDISCRIMINATION

The contractor and all subcontractors must comply with the following policies: 29 CFR Parts 1625-1627, 23 U.S.C. 140, Section 504 of the Rehabilitation Act of 1973, as amended (29 U.S.C. 794), Title VI of the Civil Rights Act of 1964, as amended (42 U.S.C. 2000d et seq.), and related regulations including 49 CFR Parts 21, 26, and 27, including any amendments thereto.

Note: The U.S. Department of Labor has exclusive authority to determine compliance with 29 CFR Parts 1625-1627. The contracting agency and the FHWA have the authority and the responsibility to ensure compliance with 23 U.S.C. 140, Section 504 of the Rehabilitation Act of 1973, as amended (29 U.S.C. 794), and Title VI of the Civil Rights Act of 1964, as amended (42 U.S.C. 2000d et seq.), and related regulations including 49 CFR Parts 21, 26, and 27, including any amendments thereto.

The provisions of the Americans with Disabilities Act of 1990 (42 U.S.C. 12101 et seq.) set forth under 28 CFR Part 35 and 29 CFR Part 1630 are incorporated by reference in this contract.

1. Assurances Required:

a. The requirements of 49 CFR Part 26, including any amendments thereto, and the State DOT's FHWA-approved Disadvantaged Business Enterprise (DBE) program are incorporated by reference.

b. The contractor, subrecipient or subcontractor shall not discriminate on the basis of race, color, national origin, or sex in the performance of this contract. The contractor shall carry out applicable requirements of 49 CFR part 26, including any amendments thereto, in the award and administration of DOT-assisted contracts. Failure by the contractor to carry out these requirements is a material breach of this contract, which may result in the termination of this contract or such other remedy as the recipient deems appropriate, which may include, but is not limited to:

(1) Withholding monthly progress payments;
(2) Assessing sanctions;
(3) Liquidated damages; and/or
(4) Disqualifying the contractor from future bidding as non-responsible.

c. The Title VI and nondiscrimination provisions of U.S. DOT Order 1050.2A at Appendixes A and E, including any amendments thereto, are incorporated by reference. 49 CFR Part 21.

III. DAVIS-BACON AND RELATED ACT PROVISIONS

This section is applicable to all Federal-aid construction projects exceeding $2,000 and to all related subcontracts and lower-tier subcontracts (regardless of subcontract size), in accordance with 29 CFR 5.5. The requirements apply to all projects located within the right-of-way of a roadway that is functionally classified as Federal-aid highway. 23 U.S.C. 113. This excludes roadways functionally classified as local roads or rural minor collectors, which are exempt. 23 U.S.C. 101. Where applicable law requires that projects be treated as a project on a Federal-aid highway, the provisions of this subpart will apply regardless of the location of the project. Examples include: Surface Transportation Block Grant Program projects funded under 23 U.S.C. 133 [excluding recreational trails projects], the Nationally Significant Freight and Highway Projects funded under 23 U.S.C. 117, and National Highway Freight Program projects funded under 23 U.S.C. 167.

The following provisions are from the U.S. Department of Labor regulations in 29 CFR 5.5 “Contract provisions and related matters” with minor revisions to conform to the FHWA-1273 format and FHWA program requirements.

1. Minimum wages (29 CFR 5.5)

a. *Wage rates and fringe benefits.* All laborers and mechanics employed or working upon the site of the work (or otherwise working in construction or development of the project under a development statute), will be paid unconditionally and not less often than once a week, and without subsequent deduction or rebate on any account (except such payroll deductions as are permitted by regulations issued by the Secretary of Labor under the Copeland Act (29 CFR part 3)), the full amount of basic hourly wages and bona fide fringe benefits (or cash equivalents thereof) due at time of payment computed at rates not less than those contained in the wage determination of the Secretary of Labor which is attached hereto and made a part hereof, regardless of any contractual relationship which may be alleged to exist between the contractor and such laborers and mechanics. As provided in paragraphs (d) and (e) of 29 CFR 5.5, the appropriate wage determinations are effective by operation of law even if they have not been attached to the contract. Contributions made or costs reasonably anticipated for bona fide fringe benefits under the Davis-Bacon Act (40 U.S.C. 3141(2)(B)) on behalf of laborers or mechanics are considered wages paid to such laborers or mechanics, subject to the provisions of paragraph 1.e. of this section; also, regular contributions made or costs incurred for more than a weekly period (but not less often than quarterly) under plans, funds, or programs which cover the particular weekly period, are deemed to be constructively made or incurred during such weekly period. Such laborers and mechanics must be paid the appropriate wage rate and fringe benefits on the wage determination for the classification(s) of work actually performed, without regard to skill, except as provided in paragraph 4. of this section. Laborers or mechanics performing work in more than one classification may be compensated at the rate specified for each classification for the time actually worked therein: *Provided,* That the employer's payroll records accurately set forth the time spent in each classification in which work is performed. The wage determination (including any additional classifications and wage rates conformed under paragraph 1.c. of this section) and the Davis-Bacon poster (WH–1321) must be posted at all times by the contractor and its subcontractors at the site of the work in a prominent and accessible place where it can be easily seen by the workers.

b. *Frequently recurring classifications.* (1) In addition to wage and fringe benefit rates that have been determined to be prevailing under the procedures set forth in 29 CFR part 1, a wage determination may contain, pursuant to § 1.3(f), wage and fringe benefit rates for classifications of laborers and mechanics for which conformance requests are regularly submitted pursuant to paragraph 1.c. of this section, provided that:

(i) The work performed by the classification is not performed by a classification in the wage determination for which a prevailing wage rate has been determined;

(ii) The classification is used in the area by the construction industry; and

(iii) The wage rate for the classification bears a reasonable relationship to the prevailing wage rates contained in the wage determination.

(2) The Administrator will establish wage rates for such classifications in accordance with paragraph 1.c.(1)(iii) of this section. Work performed in such a classification must be paid at no less than the wage and fringe benefit rate listed on the wage determination for such classification.

c. *Conformance.* (1) The contracting officer must require that any class of laborers or mechanics, including helpers, which is not listed in the wage determination and which is to be employed under the contract be classified in conformance with the wage determination. Conformance of an additional classification and wage rate and fringe benefits is appropriate only when the following criteria have been met:

(i) The work to be performed by the classification requested is not performed by a classification in the wage determination; and

(ii) The classification is used in the area by the construction industry; and

(iii) The proposed wage rate, including any bona fide fringe benefits, bears a reasonable relationship to the wage rates contained in the wage determination.

(2) The conformance process may not be used to split, subdivide, or otherwise avoid application of classifications listed in the wage determination.

(3) If the contractor and the laborers and mechanics to be employed in the classification (if known), or their representatives, and the contracting officer agree on the

classification and wage rate (including the amount designated for fringe benefits where appropriate), a report of the action taken will be sent by the contracting officer by email to DBAconformance@dol.gov. The Administrator, or an authorized representative, will approve, modify, or disapprove every additional classification action within 30 days of receipt and so advise the contracting officer or will notify the contracting officer within the 30–day period that additional time is necessary.

(4) In the event the contractor, the laborers or mechanics to be employed in the classification or their representatives, and the contracting officer do not agree on the proposed classification and wage rate (including the amount designated for fringe benefits, where appropriate), the contracting officer will, by email to DBAconformance@dol.gov, refer the questions, including the views of all interested parties and the recommendation of the contracting officer, to the Administrator for determination. The Administrator, or an authorized representative, will issue a determination within 30 days of receipt and so advise the contracting officer or will notify the contracting officer within the 30–day period that additional time is necessary.

(5) The contracting officer must promptly notify the contractor of the action taken by the Wage and Hour Division under paragraphs 1.c.(3) and (4) of this section. The contractor must furnish a written copy of such determination to each affected worker or it must be posted as a part of the wage determination. The wage rate (including fringe benefits where appropriate) determined pursuant to paragraph 1.c.(3) or (4) of this section must be paid to all workers performing work in the classification under this contract from the first day on which work is performed in the classification.

d. *Fringe benefits not expressed as an hourly rate.* Whenever the minimum wage rate prescribed in the contract for a class of laborers or mechanics includes a fringe benefit which is not expressed as an hourly rate, the contractor may either pay the benefit as stated in the wage determination or may pay another bona fide fringe benefit or an hourly cash equivalent thereof.

e. *Unfunded plans.* If the contractor does not make payments to a trustee or other third person, the contractor may consider as part of the wages of any laborer or mechanic the amount of any costs reasonably anticipated in providing bona fide fringe benefits under a plan or program, *Provided,* That the Secretary of Labor has found, upon the written request of the contractor, in accordance with the criteria set forth in § 5.28, that the applicable standards of the Davis-Bacon Act have been met. The Secretary of Labor may require the contractor to set aside in a separate account assets for the meeting of obligations under the plan or program.

f. *Interest.* In the event of a failure to pay all or part of the wages required by the contract, the contractor will be required to pay interest on any underpayment of wages.

2. Withholding (29 CFR 5.5)

a. *Withholding requirements.* The contracting agency may, upon its own action, or must, upon written request of an authorized representative of the Department of Labor, withhold or cause to be withheld from the contractor so much of the accrued payments or advances as may be considered necessary to satisfy the liabilities of the prime contractor or any subcontractor for the full amount of wages and monetary relief, including interest, required by the clauses set forth in this section for violations of this contract, or to satisfy any such liabilities required by any other Federal contract, or federally assisted contract subject to Davis-Bacon labor standards, that is held by the same prime contractor (as defined in § 5.2). The necessary funds may be withheld from the contractor under this contract, any other Federal contract with the same prime contractor, or any other federally assisted contract that is subject to Davis-Bacon labor standards requirements and is held by the same prime contractor, regardless of whether the other contract was awarded or assisted by the same agency, and such funds may be used to satisfy the contractor liability for which the funds were withheld. In the event of a contractor's failure to pay any laborer or mechanic, including any apprentice or helper working on the site of the work all or part of the wages required by the contract, or upon the contractor's failure to submit the required records as discussed in paragraph 3.d. of this section, the contracting agency may on its own initiative and after written notice to the contractor, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds until such violations have ceased.

b. *Priority to withheld funds.* The Department has priority to funds withheld or to be withheld in accordance with paragraph 2.a. of this section or Section IV, paragraph 3.a., or both, over claims to those funds by:

(1) A contractor's surety(ies), including without limitation performance bond sureties and payment bond sureties;

(2) A contracting agency for its reprocurement costs;

(3) A trustee(s) (either a court-appointed trustee or a U.S. trustee, or both) in bankruptcy of a contractor, or a contractor's bankruptcy estate;

(4) A contractor's assignee(s);

(5) A contractor's successor(s); or

(6) A claim asserted under the Prompt Payment Act, 31 U.S.C. 3901–3907.

3. Records and certified payrolls (29 CFR 5.5)

a. *Basic record requirements* (1) *Length of record retention.* All regular payrolls and other basic records must be maintained by the contractor and any subcontractor during the course of the work and preserved for all laborers and mechanics working at the site of the work (or otherwise working in construction or development of the project under a development statute) for a period of at least 3 years after all the work on the prime contract is completed.

(2) *Information required.* Such records must contain the name; Social Security number; last known address, telephone number, and email address of each such worker; each worker's correct classification(s) of work actually performed; hourly rates of wages paid (including rates of contributions or costs anticipated for bona fide fringe benefits or cash equivalents thereof of the types described in 40 U.S.C. 3141(2)(B) of the Davis-Bacon Act); daily and weekly number

of hours actually worked in total and on each covered contract; deductions made; and actual wages paid.

(3) *Additional records relating to fringe benefits.* Whenever the Secretary of Labor has found under paragraph 1.e. of this section that the wages of any laborer or mechanic include the amount of any costs reasonably anticipated in providing benefits under a plan or program described in 40 U.S.C. 3141(2)(B) of the Davis-Bacon Act, the contractor must maintain records which show that the commitment to provide such benefits is enforceable, that the plan or program is financially responsible, and that the plan or program has been communicated in writing to the laborers or mechanics affected, and records which show the costs anticipated or the actual cost incurred in providing such benefits.

(4) *Additional records relating to apprenticeship.* Contractors with apprentices working under approved programs must maintain written evidence of the registration of apprenticeship programs, the registration of the apprentices, and the ratios and wage rates prescribed in the applicable programs.

b. *Certified payroll requirements* (1) *Frequency and method of submission.* The contractor or subcontractor must submit weekly, for each week in which any DBA- or Related Acts-covered work is performed, certified payrolls to the contracting agency. The prime contractor is responsible for the submission of all certified payrolls by all subcontractors. A contracting agency or prime contractor may permit or require contractors to submit certified payrolls through an electronic system, as long as the electronic system requires a legally valid electronic signature; the system allows the contractor, the contracting agency, and the Department of Labor to access the certified payrolls upon request for at least 3 years after the work on the prime contract has been completed; and the contracting agency or prime contractor permits other methods of submission in situations where the contractor is unable or limited in its ability to use or access the electronic system.

(2) *Information required.* The certified payrolls submitted must set out accurately and completely all of the information required to be maintained under paragraph 3.a.(2) of this section, except that full Social Security numbers and last known addresses, telephone numbers, and email addresses must not be included on weekly transmittals. Instead, the certified payrolls need only include an individually identifying number for each worker (*e.g.,* the last four digits of the worker's Social Security number). The required weekly certified payroll information may be submitted using Optional Form WH–347 or in any other format desired. Optional Form WH–347 is available for this purpose from the Wage and Hour Division website at *https://www.dol.gov/sites/dolgov/files/WHD/legacy/files/wh347/.pdf* or its successor website. It is not a violation of this section for a prime contractor to require a subcontractor to provide full Social Security numbers and last known addresses, telephone numbers, and email addresses to the prime contractor for its own records, without weekly submission by the subcontractor to the contracting agency.

(3) *Statement of Compliance.* Each certified payroll submitted must be accompanied by a "Statement of Compliance," signed by the contractor or subcontractor, or the contractor's or subcontractor's agent who pays or supervises the payment of the persons working on the contract, and must certify the following:

(i) That the certified payroll for the payroll period contains the information required to be provided under paragraph 3.b. of this section, the appropriate information and basic records are being maintained under paragraph 3.a. of this section, and such information and records are correct and complete;

(ii) That each laborer or mechanic (including each helper and apprentice) working on the contract during the payroll period has been paid the full weekly wages earned, without rebate, either directly or indirectly, and that no deductions have been made either directly or indirectly from the full wages earned, other than permissible deductions as set forth in 29 CFR part 3; and

(iii) That each laborer or mechanic has been paid not less than the applicable wage rates and fringe benefits or cash equivalents for the classification(s) of work actually performed, as specified in the applicable wage determination incorporated into the contract.

(4) *Use of Optional Form WH–347.* The weekly submission of a properly executed certification set forth on the reverse side of Optional Form WH–347 will satisfy the requirement for submission of the "Statement of Compliance" required by paragraph 3.b.(3) of this section.

(5) *Signature.* The signature by the contractor, subcontractor, or the contractor's or subcontractor's agent must be an original handwritten signature or a legally valid electronic signature.

(6) *Falsification.* The falsification of any of the above certifications may subject the contractor or subcontractor to civil or criminal prosecution under 18 U.S.C. 1001 and 31 U.S.C. 3729.

(7) *Length of certified payroll retention.* The contractor or subcontractor must preserve all certified payrolls during the course of the work and for a period of 3 years after all the work on the prime contract is completed.

c. *Contracts, subcontracts, and related documents.* The contractor or subcontractor must maintain this contract or subcontract and related documents including, without limitation, bids, proposals, amendments, modifications, and extensions. The contractor or subcontractor must preserve these contracts, subcontracts, and related documents during the course of the work and for a period of 3 years after all the work on the prime contract is completed.

d. *Required disclosures and access* (1) *Required record disclosures and access to workers.* The contractor or subcontractor must make the records required under paragraphs 3.a. through 3.c. of this section, and any other documents that the contracting agency, the State DOT, the FHWA, or the Department of Labor deems necessary to determine compliance with the labor standards provisions of any of the applicable statutes referenced by § 5.1, available for inspection, copying, or transcription by authorized representatives of the contracting agency, the State DOT, the FHWA, or the Department of Labor, and must permit such representatives to interview workers during working hours on the job.

(2) *Sanctions for non-compliance with records and worker access requirements.* If the contractor or subcontractor fails to submit the required records or to make them available, or refuses to permit worker interviews during working hours on the job, the Federal agency may, after written notice to the contractor, sponsor, applicant, owner, or other entity, as the case may be, that maintains such records or that employs such workers, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds. Furthermore, failure to submit the required records upon request or to make such records available, or to permit worker interviews during working hours on the job, may be grounds for debarment action pursuant to § 5.12. In addition, any contractor or other person that fails to submit the required records or make those records available to WHD within the time WHD requests that the records be produced will be precluded from introducing as evidence in an administrative proceeding under 29 CFR part 6 any of the required records that were not provided or made available to WHD. WHD will take into consideration a reasonable request from the contractor or person for an extension of the time for submission of records. WHD will determine the reasonableness of the request and may consider, among other things, the location of the records and the volume of production.

(3) *Required information disclosures.* Contractors and subcontractors must maintain the full Social Security number and last known address, telephone number, and email address of each covered worker, and must provide them upon request to the contracting agency, the State DOT, the FHWA, the contractor, or the Wage and Hour Division of the Department of Labor for purposes of an investigation or other compliance action.

4. Apprentices and equal employment opportunity (29 CFR 5.5)

a. *Apprentices* (1) *Rate of pay.* Apprentices will be permitted to work at less than the predetermined rate for the work they perform when they are employed pursuant to and individually registered in a bona fide apprenticeship program registered with the U.S. Department of Labor, Employment and Training Administration, Office of Apprenticeship (OA), or with a State Apprenticeship Agency recognized by the OA. A person who is not individually registered in the program, but who has been certified by the OA or a State Apprenticeship Agency (where appropriate) to be eligible for probationary employment as an apprentice, will be permitted to work at less than the predetermined rate for the work they perform in the first 90 days of probationary employment as an apprentice in such a program. In the event the OA or a State Apprenticeship Agency recognized by the OA withdraws approval of an apprenticeship program, the contractor will no longer be permitted to use apprentices at less than the applicable predetermined rate for the work performed until an acceptable program is approved.

(2) *Fringe benefits.* Apprentices must be paid fringe benefits in accordance with the provisions of the apprenticeship program. If the apprenticeship program does not specify fringe benefits, apprentices must be paid the full amount of fringe benefits listed on the wage determination for the applicable classification. If the Administrator determines that a different practice prevails for the applicable apprentice classification, fringe benefits must be paid in accordance with that determination.

(3) *Apprenticeship ratio.* The allowable ratio of apprentices to journeyworkers on the job site in any craft classification must not be greater than the ratio permitted to the contractor as to the entire work force under the registered program or the ratio applicable to the locality of the project pursuant to paragraph 4.a.(4) of this section. Any worker listed on a payroll at an apprentice wage rate, who is not registered or otherwise employed as stated in paragraph 4.a.(1) of this section, must be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed. In addition, any apprentice performing work on the job site in excess of the ratio permitted under this section must be paid not less than the applicable wage rate on the wage determination for the work actually performed.

(4) *Reciprocity of ratios and wage rates.* Where a contractor is performing construction on a project in a locality other than the locality in which its program is registered, the ratios and wage rates (expressed in percentages of the journeyworker's hourly rate) applicable within the locality in which the construction is being performed must be observed. If there is no applicable ratio or wage rate for the locality of the project, the ratio and wage rate specified in the contractor's registered program must be observed.

b. *Equal employment opportunity.* The use of apprentices and journeyworkers under this part must be in conformity with 29 CFR part 30, including any amendments thereto.

c. Apprentices and Trainees (programs of the U.S. DOT).

Apprentices and trainees working under apprenticeship and skill training programs which have been certified by the Secretary of Transportation as promoting EEO in connection with Federal-aid highway construction programs are not subject to the requirements of paragraph 4 of this Section III. 23 CFR 230.111(e)(2). The straight time hourly wage rates for apprentices and trainees under such programs will be established by the particular programs. The ratio of apprentices and trainees to journeyworkers shall not be greater than permitted by the terms of the particular program.

5. Compliance with Copeland Act requirements. The contractor shall comply with the requirements of 29 CFR part 3, which are incorporated by reference in this contract as provided in 29 CFR 5.5.

6. Subcontracts. The contractor or subcontractor must insert in any subcontracts the clauses set forth in paragraphs (1) through (11) of this section, along with the applicable wage determination(s) and such other clauses or contract modifications as the contracting agency may by appropriate instructions require, and a clause requiring the subcontractors to include these clauses and wage determination(s) in any lower tier subcontracts. The prime contractor is responsible for the compliance by any subcontractor or lower tier subcontractor with all the contract clauses in this section. In the event of any violations of these clauses, the prime contractor and any subcontractor(s) responsible will be liable for any unpaid wages and monetary relief, including interest from the date of the underpayment or loss, due to any workers of lower-tier subcontractors, and may be subject to debarment, as appropriate. 29 CFR 5.5.

7. Contract termination: debarment. A breach of the contract clauses in 29 CFR 5.5 may be grounds for termination of the

contract, and for debarment as a contractor and a subcontractor as provided in 29 CFR 5.12.

8. Compliance with Davis-Bacon and Related Act requirements. All rulings and interpretations of the Davis-Bacon and Related Acts contained in 29 CFR parts 1, 3, and 5 are herein incorporated by reference in this contract as provided in 29 CFR 5.5.

9. Disputes concerning labor standards. As provided in 29 CFR 5.5, disputes arising out of the labor standards provisions of this contract shall not be subject to the general disputes clause of this contract. Such disputes shall be resolved in accordance with the procedures of the Department of Labor set forth in 29 CFR parts 5, 6, and 7. Disputes within the meaning of this clause include disputes between the contractor (or any of its subcontractors) and the contracting agency, the U.S. Department of Labor, or the employees or their representatives.

10. Certification of eligibility. a. By entering into this contract, the contractor certifies that neither it nor any person or firm who has an interest in the contractor's firm is a person or firm ineligible to be awarded Government contracts by virtue of 40 U.S.C. 3144(b) or § 5.12(a).

b. No part of this contract shall be subcontracted to any person or firm ineligible for award of a Government contract by virtue of 40 U.S.C. 3144(b) or § 5.12(a).

c. The penalty for making false statements is prescribed in the U.S. Code, Title 18 Crimes and Criminal Procedure, 18 U.S.C. 1001.

11. Anti-retaliation. It is unlawful for any person to discharge, demote, intimidate, threaten, restrain, coerce, blacklist, harass, or in any other manner discriminate against, or to cause any person to discharge, demote, intimidate, threaten, restrain, coerce, blacklist, harass, or in any other manner discriminate against, any worker or job applicant for:

a. Notifying any contractor of any conduct which the worker reasonably believes constitutes a violation of the DBA, Related Acts, this part, or 29 CFR part 1 or 3;

b. Filing any complaint, initiating or causing to be initiated any proceeding, or otherwise asserting or seeking to assert on behalf of themselves or others any right or protection under the DBA, Related Acts, this part, or 29 CFR part 1 or 3;

c. Cooperating in any investigation or other compliance action, or testifying in any proceeding under the DBA, Related Acts, this part, or 29 CFR part 1 or 3; or

d. Informing any other person about their rights under the DBA, Related Acts, this part, or 29 CFR part 1 or 3.

IV. CONTRACT WORK HOURS AND SAFETY STANDARDS ACT

Pursuant to 29 CFR 5.5(b), the following clauses apply to any Federal-aid construction contract in an amount in excess of $100,000 and subject to the overtime provisions of the Contract Work Hours and Safety Standards Act. These clauses shall be inserted in addition to the clauses required by 29 CFR 5.5(a) or 29 CFR 4.6. As used in this paragraph, the terms laborers and mechanics include watchpersons and guards.

1. Overtime requirements. No contractor or subcontractor contracting for any part of the contract work which may require or involve the employment of laborers or mechanics shall require or permit any such laborer or mechanic in any workweek in which he or she is employed on such work to work in excess of forty hours in such workweek unless such laborer or mechanic receives compensation at a rate not less than one and one-half times the basic rate of pay for all hours worked in excess of forty hours in such workweek. 29 CFR 5.5.

2. Violation; liability for unpaid wages; liquidated damages. In the event of any violation of the clause set forth in paragraph 1. of this section the contractor and any subcontractor responsible therefor shall be liable for the unpaid wages and interest from the date of the underpayment. In addition, such contractor and subcontractor shall be liable to the United States (in the case of work done under contract for the District of Columbia or a territory, to such District or to such territory), for liquidated damages. Such liquidated damages shall be computed with respect to each individual laborer or mechanic, including watchpersons and guards, employed in violation of the clause set forth in paragraph 1. of this section, in the sum currently provided in 29 CFR 5.5(b)(2)* for each calendar day on which such individual was required or permitted to work in excess of the standard workweek of forty hours without payment of the overtime wages required by the clause set forth in paragraph 1. of this section.

* $33 as of January 15, 2025 (See 90 FR 1859) as may be adjusted annually by the Department of Labor, pursuant to the Federal Civil Penalties Inflation Adjustment Act of 1990.

3. Withholding for unpaid wages and liquidated damages

a. *Withholding process.* The FHWA or the contracting agency may, upon its own action, or must, upon written request of an authorized representative of the Department of Labor, withhold or cause to be withheld from the contractor so much of the accrued payments or advances as may be considered necessary to satisfy the liabilities of the prime contractor or any subcontractor for any unpaid wages; monetary relief, including interest; and liquidated damages required by the clauses set forth in this section on this contract, any other Federal contract with the same prime contractor, or any other federally assisted contract subject to the Contract Work Hours and Safety Standards Act that is held by the same prime contractor (as defined in § 5.2). The necessary funds may be withheld from the contractor under this contract, any other Federal contract with the same prime contractor, or any other federally assisted contract that is subject to the Contract Work Hours and Safety Standards Act and is held by the same prime contractor, regardless of whether the other contract was awarded or assisted by the same agency, and such funds may be used to satisfy the contractor liability for which the funds were withheld.

b. *Priority to withheld funds.* The Department has priority to funds withheld or to be withheld in accordance with Section III paragraph 2.a. or paragraph 3.a. of this section, or both, over claims to those funds by:

(1) A contractor's surety(ies), including without limitation performance bond sureties and payment bond sureties;

(2) A contracting agency for its reprocurement costs;

(3) A trustee(s) (either a court-appointed trustee or a U.S. trustee, or both) in bankruptcy of a contractor, or a contractor's bankruptcy estate;

(4) A contractor's assignee(s);

(5) A contractor's successor(s); or

(6) A claim asserted under the Prompt Payment Act, 31 U.S.C. 3901–3907.

4. Subcontracts. The contractor or subcontractor must insert in any subcontracts the clauses set forth in paragraphs 1. through 5. of this section and a clause requiring the subcontractors to include these clauses in any lower tier subcontracts. The prime contractor is responsible for compliance by any subcontractor or lower tier subcontractor with the clauses set forth in paragraphs 1. through 5. In the event of any violations of these clauses, the prime contractor and any subcontractor(s) responsible will be liable for any unpaid wages and monetary relief, including interest from the date of the underpayment or loss, due to any workers of lower-tier subcontractors, and associated liquidated damages and may be subject to debarment, as appropriate.

5. Anti-retaliation. It is unlawful for any person to discharge, demote, intimidate, threaten, restrain, coerce, blacklist, harass, or in any other manner discriminate against, or to cause any person to discharge, demote, intimidate, threaten, restrain, coerce, blacklist, harass, or in any other manner discriminate against, any worker or job applicant for:

a. Notifying any contractor of any conduct which the worker reasonably believes constitutes a violation of the Contract Work Hours and Safety Standards Act (CWHSSA) or its implementing regulations in this part;

b. Filing any complaint, initiating or causing to be initiated any proceeding, or otherwise asserting or seeking to assert on behalf of themselves or others any right or protection under CWHSSA or this part;

c. Cooperating in any investigation or other compliance action, or testifying in any proceeding under CWHSSA or this part; or

d. Informing any other person about their rights under CWHSSA or this part.

V. SUBLETTING OR ASSIGNING THE CONTRACT

This provision is applicable to all Federal-aid construction contracts on the National Highway System pursuant to 23 CFR 635.116.

1. The contractor shall perform with its own organization contract work amounting to not less than 30 percent (or a greater percentage if specified elsewhere in the contract) of the total original contract price, excluding any specialty items designated by the contracting agency. Specialty items may be performed by subcontract and the amount of any such specialty items performed may be deducted from the total original contract price before computing the amount of work required to be performed by the contractor's own organization (23 CFR 635.116).

a. The term “perform work with its own organization” in paragraph 1. of this section refers to workers employed or leased by the prime contractor, and equipment owned or rented by the prime contractor, with or without operators. Such term does not include employees or equipment of a subcontractor or lower tier subcontractor, agents of the prime contractor, or any other assignees. The term may include payments for the costs of hiring leased employees from an employee leasing firm meeting all relevant Federal and State regulatory requirements. Leased employees may only be included in this term if the prime contractor meets all of the following conditions: (based on longstanding interpretation)

(1) the prime contractor maintains control over the supervision of the day-to-day activities of the leased employees;
(2) the prime contractor remains responsible for the quality of the work of the leased employees;
(3) the prime contractor retains all power to accept or exclude individual employees from work on the project; and
(4) the prime contractor remains ultimately responsible for the payment of predetermined minimum wages, the submission of payrolls, statements of compliance and all other Federal regulatory requirements.

b. "Specialty Items" shall be construed to be limited to work that requires highly specialized knowledge, abilities, or equipment not ordinarily available in the type of contracting organizations qualified and expected to bid or propose on the contract as a whole and in general are to be limited to minor components of the overall contract. 23 CFR 635.102.

2. Pursuant to 23 CFR 635.116(a), the contract amount upon which the requirements set forth in paragraph 1. of this section is computed includes the cost of material and manufactured products which are to be purchased or produced by the contractor under the contract provisions.

3. Pursuant to 23 CFR 635.116(c), the contractor shall furnish (a) a competent superintendent or supervisor who is employed by the firm, has full authority to direct performance of the work in accordance with the contract requirements, and is in charge of all construction operations (regardless of who performs the work) and (b) such other of its own organizational resources (supervision, management, and engineering services) as the contracting officer determines is necessary to assure the performance of the contract.

4. No portion of the contract shall be sublet, assigned or otherwise disposed of except with the written consent of the contracting officer, or authorized representative, and such consent when given shall not be construed to relieve the contractor of any responsibility for the fulfillment of the contract. Written consent will be given only after the contracting agency has assured that each subcontract is evidenced in writing and that it contains all pertinent provisions and requirements of the prime contract. (based on long-standing interpretation of 23 CFR 635.116).

5. The 30-percent self-performance requirement of paragraph (1) is not applicable to design-build contracts; however,

contracting agencies may establish their own self-performance requirements. 23 CFR 635.116(d).

VI. SAFETY: ACCIDENT PREVENTION

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

1. In the performance of this contract the contractor shall comply with all applicable Federal, State, and local laws governing safety, health, and sanitation (23 CFR Part 635). The contractor shall provide all safeguards, safety devices and protective equipment and take any other needed actions as it determines, or as the contracting officer may determine, to be reasonably necessary to protect the life and health of employees on the job and the safety of the public and to protect property in connection with the performance of the work covered by the contract. 23 CFR 635.108.

2. It is a condition of this contract, and shall be made a condition of each subcontract, which the contractor enters into pursuant to this contract, that the contractor and any subcontractor shall not permit any employee, in performance of the contract, to work in surroundings or under conditions which are unsanitary, hazardous or dangerous to his/her health or safety, as determined under construction safety and health standards (29 CFR Part 1926) promulgated by the Secretary of Labor, in accordance with Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C. 3704). 29 CFR 1926.10.

3. Pursuant to 29 CFR 1926.3, it is a condition of this contract that the Secretary of Labor or authorized representative thereof, shall have right of entry to any site of contract performance to inspect or investigate the matter of compliance with the construction safety and health standards and to carry out the duties of the Secretary under Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C. 3704).

VII. FALSE STATEMENTS CONCERNING HIGHWAY PROJECTS

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

In order to assure high quality and durable construction in conformity with approved plans and specifications and a high degree of reliability on statements and representations made by engineers, contractors, suppliers, and workers on Federal-aid highway projects, it is essential that all persons concerned with the project perform their functions as carefully, thoroughly, and honestly as possible. Willful falsification, distortion, or misrepresentation with respect to any facts related to the project is a violation of Federal law. To prevent any misunderstanding regarding the seriousness of these and similar acts, Form FHWA-1022 shall be posted on each Federal-aid highway project (23 CFR Part 635) in one or more places where it is readily available to all persons concerned with the project:

18 U.S.C. 1020 reads as follows:

"Whoever, being an officer, agent, or employee of the United States, or of any State or Territory, or whoever, whether a person, association, firm, or corporation, knowingly makes any false statement, false representation, or false report as to the character, quality, quantity, or cost of the material used or to be used, or the quantity or quality of the work performed or to be performed, or the cost thereof in connection with the submission of plans, maps, specifications, contracts, or costs of construction on any highway or related project submitted for approval to the Secretary of Transportation; or

Whoever knowingly makes any false statement, false representation, false report or false claim with respect to the character, quality, quantity, or cost of any work performed or to be performed, or materials furnished or to be furnished, in connection with the construction of any highway or related project approved by the Secretary of Transportation; or

Whoever knowingly makes any false statement or false representation as to material fact in any statement, certificate, or report submitted pursuant to provisions of the Federal-aid Roads Act approved July 11, 1916, (39 Stat. 355), as amended and supplemented;

Shall be fined under this title or imprisoned not more than 5 years or both."

VIII. IMPLEMENTATION OF CLEAN AIR ACT AND FEDERAL WATER POLLUTION CONTROL ACT (42 U.S.C. 7606; 2 CFR 200.88; EO 11738)

This provision is applicable to all Federal-aid construction contracts in excess of $150,000 and to all related subcontracts. 48 CFR 2.101; 2 CFR 200.327.

By submission of this bid/proposal or the execution of this contract or subcontract, as appropriate, the bidder, proposer, Federal-aid construction contractor, subcontractor, supplier, or vendor agrees to comply with all applicable standards, orders or regulations issued pursuant to the Clean Air Act (42 U.S.C. 7401-7671q) and the Federal Water Pollution Control Act, as amended (33 U.S.C. 1251-1387). Violations must be reported to the Federal Highway Administration and the Regional Office of the Environmental Protection Agency. 2 CFR Part 200, Appendix II.

The contractor agrees to include or cause to be included the requirements of this Section in every subcontract, and further agrees to take such action as the contracting agency may direct as a means of enforcing such requirements. 2 CFR 200.327.

IX. CERTIFICATION REGARDING DEBARMENT, SUSPENSION, INELIGIBILITY AND VOLUNTARY EXCLUSION

This provision is applicable to all Federal-aid construction contracts, design-build contracts, subcontracts, lower-tier subcontracts, purchase orders, lease agreements, consultant contracts or any other covered transaction requiring FHWA approval or that is estimated to cost $25,000 or more – as defined in 2 CFR Parts 180 and 1200. 2 CFR 180.220 and 1200.220.

1**. Instructions for Certification – First Tier Participants:**

a. By signing and submitting this proposal, the prospective first tier participant is providing the certification set out below.

b. The inability of a person to provide the certification set out below will not necessarily result in denial of participation in this

covered transaction. The prospective first tier participant shall submit an explanation of why it cannot provide the certification set out below. The certification or explanation will be considered in connection with the department or agency's determination whether to enter into this transaction. However, failure of the prospective first tier participant to furnish a certification or an explanation shall disqualify such a person from participation in this transaction. 2 CFR 180.320.

c. The certification in this clause is a material representation of fact upon which reliance was placed when the contracting agency determined to enter into this transaction. If it is later determined that the prospective participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the contracting agency may terminate this transaction for cause of default. 2 CFR 180.325.

d. The prospective first tier participant shall provide immediate written notice to the contracting agency to whom this proposal is submitted if any time the prospective first tier participant learns that its certification was erroneous when submitted or has become erroneous by reason of changed circumstances. 2 CFR 180.345 and 180.350.

e. The terms "covered transaction," "debarred," "suspended," "ineligible," "participant," "person," "principal," and "voluntarily excluded," as used in this clause, are defined in 2 CFR Parts 180, Subpart I, 180.900-180.1020, and 1200. “First Tier Covered Transactions” refers to any covered transaction between a recipient or subrecipient of Federal funds and a participant (such as the prime or general contract). “Lower Tier Covered Transactions” refers to any covered transaction under a First Tier Covered Transaction (such as subcontracts). “First Tier Participant” refers to the participant who has entered into a covered transaction with a recipient or subrecipient of Federal funds (such as the prime or general contractor). “Lower Tier Participant” refers any participant who has entered into a covered transaction with a First Tier Participant or other Lower Tier Participants (such as subcontractors and suppliers).

f. The prospective first tier participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency entering into this transaction. 2 CFR 180.330.

g. The prospective first tier participant further agrees by submitting this proposal that it will include the clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transactions," provided by the department or contracting agency, entering into this covered transaction, without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions exceeding the $25,000 threshold. 2 CFR 180.220 and 180.300.

h. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. 2 CFR 180.300; 180.320, and 180.325. A participant is responsible for ensuring that its principals are not suspended, debarred, or otherwise ineligible to participate in covered transactions. 2 CFR 180.335. To verify the eligibility of its principals, as well as the eligibility of any lower tier prospective participants, each participant may, but is not required to, check the System for Award Management website (https://www.sam.gov/). 2 CFR 180.300, 180.320, and 180.325.

i. Nothing contained in the foregoing shall be construed to require the establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of the prospective participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.

j. Except for transactions authorized under paragraph (f) of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the department or agency may terminate this transaction for cause or default. 2 CFR 180.325.

* * * * *

2. Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion – First Tier Participants:

a. The prospective first tier participant certifies to the best of its knowledge and belief, that it and its principals:

(1) Are not presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participating in covered transactions by any Federal department or agency, 2 CFR 180.335;

(2) Have not within a three-year period preceding this proposal been convicted of or had a civil judgment rendered against them for commission of fraud or a criminal offense in connection with obtaining, attempting to obtain, or performing a public (Federal, State, or local) transaction or contract under a public transaction; violation of Federal or State antitrust statutes or commission of embezzlement, theft, forgery, bribery, falsification or destruction of records, making false statements, or receiving stolen property, 2 CFR 180.800;

(3) Are not presently indicted for or otherwise criminally or civilly charged by a governmental entity (Federal, State or local) with commission of any of the offenses enumerated in paragraph (a)(2) of this certification, 2 CFR 180.700 and 180.800; and

(4) Have not within a three-year period preceding this application/proposal had one or more public transactions (Federal, State or local) terminated for cause or default. 2 CFR 180.335(d).

(5) Are not a corporation that has been convicted of a felony violation under any Federal law within the two-year period preceding this proposal (USDOT Order 4200.6 implementing appropriations act requirements); and

(6) Are not a corporation with any unpaid Federal tax liability that has been assessed, for which all judicial and administrative remedies have been exhausted, or have lapsed, and that is not being paid in a timely manner pursuant to an agreement with the authority responsible for collecting the tax liability (USDOT Order 4200.6 implementing appropriations act requirements).

b. Where the prospective participant is unable to certify to any of the statements in this certification, such prospective participant should attach an explanation to this proposal. 2 CFR 180.335 and 180.340.

* * * * *

3. **Instructions for Certification - Lower Tier Participants:**

(Applicable to all subcontracts, purchase orders, and other lower tier transactions requiring prior FHWA approval or estimated to cost $25,000 or more - 2 CFR Parts 180 and 1200). 2 CFR 180.220 and 1200.220.

a. By signing and submitting this proposal, the prospective lower tier participant is providing the certification set out below.

b. The certification in this clause is a material representation of fact upon which reliance was placed when this transaction was entered into. If it is later determined that the prospective lower tier participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the department, or agency with which this transaction originated may pursue available remedies, including suspension and/or debarment.

c. The prospective lower tier participant shall provide immediate written notice to the person to which this proposal is submitted if at any time the prospective lower tier participant learns that its certification was erroneous by reason of changed circumstances. 2 CFR 180.365.

d. The terms "covered transaction," "debarred," "suspended," "ineligible," "participant," "person," "principal," and "voluntarily excluded," as used in this clause, are defined in 2 CFR Parts 180, Subpart I, 180.900 – 180.1020, and 1200. You may contact the person to which this proposal is submitted for assistance in obtaining a copy of those regulations. “First Tier Covered Transactions” refers to any covered transaction between a recipient or subrecipient of Federal funds and a participant (such as the prime or general contract). “Lower Tier Covered Transactions” refers to any covered transaction under a First Tier Covered Transaction (such as subcontracts). “First Tier Participant” refers to the participant who has entered into a covered transaction with a recipient or subrecipient of Federal funds (such as the prime or general contractor). “Lower Tier Participant” refers any participant who has entered into a covered transaction with a First Tier Participant or other Lower Tier Participants (such as subcontractors and suppliers).

e. The prospective lower tier participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency with which this transaction originated. 2 CFR 1200.220 and 1200.332.

f. The prospective lower tier participant further agrees by submitting this proposal that it will include this clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transaction," without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions exceeding the $25,000 threshold. 2 CFR 180.220 and 1200.220.

g. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A participant is responsible for ensuring that its principals are not suspended, debarred, or otherwise ineligible to participate in covered transactions. To verify the eligibility of its principals, as well as the eligibility of any lower tier prospective participants, each participant may, but is not required to, check the System for Award Management website (https://www.sam.gov/), which is compiled by the General Services Administration. 2 CFR 180.300, 180.320, 180.330, and 180.335.

h. Nothing contained in the foregoing shall be construed to require establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.

i. Except for transactions authorized under paragraph e of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the department or agency with which this transaction originated may pursue available remedies, including suspension and/or debarment. 2 CFR 180.325.

* * * * *

4. Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion--Lower Tier Participants:

a. The prospective lower tier participant certifies, by submission of this proposal, that neither it nor its principals:

(1) is presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participating in covered transactions by any Federal department or agency, 2 CFR 180.355;

(2) is a corporation that has been convicted of a felony violation under any Federal law within the two-year period preceding this proposal (USDOT Order 4200.6 implementing appropriations act requirements); and

(3) is a corporation with any unpaid Federal tax liability that has been assessed, for which all judicial and administrative remedies have been exhausted, or have lapsed, and that is not being paid in a timely manner pursuant to an agreement with the authority responsible for collecting the tax liability. (USDOT Order 4200.6 implementing appropriations act requirements)

b. Where the prospective lower tier participant is unable to certify to any of the statements in this certification, such prospective participant should attach an explanation to this proposal.

* * * * *

X. CERTIFICATION REGARDING USE OF CONTRACT FUNDS FOR LOBBYING

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts which exceed $100,000. 49 CFR Part 20, App. A.

1. The prospective participant certifies, by signing and submitting this bid or proposal, to the best of his or her knowledge and belief, that:

a. No Federal appropriated funds have been paid or will be paid, by or on behalf of the undersigned, to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with the awarding of any Federal contract, the making of any Federal grant, the making of any Federal loan, the entering into of any cooperative agreement, and the extension, continuation, renewal, amendment, or modification of any Federal contract, grant, loan, or cooperative agreement.

b. If any funds other than Federal appropriated funds have been paid or will be paid to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with this Federal contract, grant, loan, or cooperative agreement, the undersigned shall complete and submit Standard Form-LLL, "Disclosure Form to Report Lobbying," in accordance with its instructions.

2. This certification is a material representation of fact upon which reliance was placed when this transaction was made or entered into. Submission of this certification is a prerequisite for making or entering into this transaction imposed by 31 U.S.C. 1352. Any person who fails to file the required certification shall be subject to a civil penalty of not less than $10,000 and not more than $100,000 for each such failure.

3. The prospective participant also agrees by submitting its bid or proposal that the participant shall require that the language of this certification be included in all lower tier subcontracts, which exceed $100,000 and that all such recipients shall certify and disclose accordingly.

XI. USE OF UNITED STATES-FLAG VESSELS:

This provision is applicable to all Federal-aid construction contracts, design-build contracts, subcontracts, lower-tier subcontracts, purchase orders, lease agreements, or any other covered transaction. 46 CFR Part 381.

This requirement applies to material or equipment that is acquired for a specific Federal-aid highway project. 46 CFR 381.7. It is not applicable to goods or materials that come into inventories independent of an FHWA funded-contract.

When oceanic shipments (or shipments across the Great Lakes) are necessary for materials or equipment acquired for a specific Federal-aid construction project, the bidder, proposer, contractor, subcontractor, or vendor agrees:

1. To utilize privately owned United States-flag commercial vessels to ship at least 50 percent of the gross tonnage (computed separately for dry bulk carriers, dry cargo liners, and tankers) involved, whenever shipping any equipment, material, or commodities pursuant to this contract, to the extent such vessels are available at fair and reasonable rates for United States-flag commercial vessels. 46 CFR 381.7.

2. To furnish within 20 days following the date of loading for shipments originating within the United States or within 30 working days following the date of loading for shipments originating outside the United States, a legible copy of a rated, ‘on-board’ commercial ocean bill-of-lading in English for each shipment of cargo described in paragraph (b)(1) of this section to both the Contracting Officer (through the prime contractor in the case of subcontractor bills-of-lading) and to the Office of Cargo and Commercial Sealift (MAR-620), Maritime Administration, Washington, DC 20590. (MARAD requires copies of the ocean carrier's (master) bills of lading, certified onboard, dated, with rates and charges. These bills of lading may contain business sensitive information and therefore may be submitted directly to MARAD by the Ocean Transportation Intermediary on behalf of the contractor). 46 CFR 381.7.

ATTACHMENT A - EMPLOYMENT AND MATERIALS PREFERENCE FOR APPALACHIAN DEVELOPMENT HIGHWAY SYSTEM OR APPALACHIAN LOCAL ACCESS ROAD CONTRACTS (40 U.S.C. sections 14501(d) and 14701 and the Appalachian Regional Commission Code as authorized under 40 U.S.C. section 14302)
This provision is applicable to all Federal-aid projects funded under the Appalachian Regional Development Act of 1965.

1. During the performance of this contract, the contractor undertaking to do work which is, or reasonably may be, done as on-site work, shall give preference to qualified persons who regularly reside in the labor area as designated by the DOL wherein the contract work is situated, or the subregion, or the Appalachian counties of the State wherein the contract work is situated, except:

a. To the extent that qualified persons regularly residing in the area are not available.

b. For the reasonable needs of the contractor to employ supervisory or specially experienced personnel necessary to assure an efficient execution of the contract work.

c. For the obligation of the contractor to offer employment to present or former employees as the result of a lawful collective bargaining contract, provided that the number of nonresident persons employed under this subparagraph (1c) shall not exceed 20 percent of the total number of employees employed by the contractor on the contract work, except as provided in subparagraph (4) below.

2. The contractor shall place a job order with the State Employment Service indicating (a) the classifications of the laborers, mechanics and other employees required to perform the contract work, (b) the number of employees required in each classification, (c) the date on which the participant estimates such employees will be required, and (d) any other pertinent information required by the State Employment Service to complete the job order form. The job order may be placed with the State Employment Service in writing or by telephone. If during the course of the contract work, the information submitted by the contractor in the original job order is substantially modified, the participant shall promptly notify the State Employment Service.

3. The contractor shall give full consideration to all qualified job applicants referred to him by the State Employment Service. The contractor is not required to grant employment to any job applicants who, in his opinion, are not qualified to perform the classification of work required.

4. If, within one week following the placing of a job order by the contractor with the State Employment Service, the State Employment Service is unable to refer any qualified job applicants to the contractor, or less than the number requested, the State Employment Service will forward a certificate to the contractor indicating the unavailability of applicants. Such certificate shall be made a part of the contractor's permanent project records. Upon receipt of this certificate, the contractor may employ persons who do not normally reside in the labor area to fill positions covered by the certificate, notwithstanding the provisions of subparagraph (1c) above.

5. The provisions of 40 U.S.C. 14501 allow the contracting agency to provide a contractual preference for the use of mineral resource materials native to the Appalachian region.

6. The contractor shall include the provisions of Sections 1 through 4 of this Attachment A in every subcontract for work which is, or reasonably may be, done as on-site work.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-101-1 **CODE: (IS)**

DATE: 07/20/2023

SUBJECT: Definitions and Terms

Section 101, Definitions and Terms, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

907-101.01--Abbreviations. After the abbreviation API on page 1, add the following.

APL Approved Products List

Replace the abbreviation for AWPA on page 1 with the following.

AWPA American Wood Protection Association

907-101.02--Definitions. Delete the sentence after the list of holidays in Subsection 101.02 on page 6 under **holidays, legal**, and substitute the following.

When a legal holiday falls on a Saturday or Sunday, the succeeding Monday, or as proclaimed by the Governor, will be observed as a legal holiday.

Delete the definition for Notice to Proceed in Subsection 101.02 on page 8, and substitute the following.

Notice to Proceed - Written notice to the Contractor to proceed with the contract work.

Delete the definition for "Plans" in Subsection 101.02 on page 8, and substitute the following.

plans - The approved plans, profiles, typical cross-sections, working drawings and supplemental drawings, or exact reproduction thereof, that show the location, character, dimensions, and details of the work to be done. The plans may also include electronic files, referred to on the plans as Electronic Files Identified as Plans, which may include engineering models, spreadsheets, CADD files or other electronic files used to convey design intent. When the contract does not have an official set of plans, reference to the plans shall mean the contract documents.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-102-2 **CODE: (IS)**

DATE: 11/22/2017

SUBJECT: Bidding Requirements and Conditions

Section 102, Bidding Requirements and Conditions, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

907-102.01--Prequalification of Bidders. Delete the last sentence of the third paragraph of Subsection 102.01 on page 13, and substitute the following.

The Bidder's Certificate of Responsibility number must be on file with the Department's Contract Administration Division prior to request for permission to bid.

907-102.02--Contents of Proposal Forms. Delete the fourth paragraph in Subsection 102.02 on page 13, and substitute the following.

Prospective bidders must complete an online request for permission to be eligible to bid a project. Upon approval, the bidder will be authorized to submit a bid electronically using Bid Express at http://bidx.com.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-104-2 **CODE: (SP)**

DATE: 06/17/2025

SUBJECT: Minor Alteration to the Contract

Section 104, Scope of Work, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows:

907-104.02--Alterations of Plans or Character of Work.

907-104.02.3--Minor Alteration to the Contract. In the first paragraph of Subsection 104.02.3 on page 25, change $10,000.00 to $25,000.00.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-105-3 **CODE: (SP)**

DATE: 07/21/2026

SUBJECT: Control of Work

Section 105, Control of Work, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

907-105.01--Authority of the Engineer. Delete the first sentence of the second paragraph of Subsection 105.01 on page 31, and substitute the following.

The Engineer has the right to suspend the work wholly or in part and to withhold payments because of the Contractor's failure to correct conditions unsafe for workmen or the general public, for failure to carry out provisions of the Contract, or for failure to carry out orders.

907-105.02--Plans and Working Drawings. Delete the first paragraph of Subsection 105.02 on page 31, and substitute the following.

After the contract is executed by the Executive Director, the Contractor will receive, free of charge, two bound copies of the proposal and contract documents (one executed and one blank) and five half-scale copies of the Plans and Electronic Files Identified as Plans. The Contractor shall have one copy of the proposal and contract documents and one half-scale copy of the plans available at all times during work activity on the project.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-106-5 **CODE: (IS)**

DATE: 4/20/2026

SUBJECT: Control of Materials

Section 106, Control of Materials, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

After Subsection 106.13 on page 47, add the following:

907-106.14--Buy America/Build America. Buy America (BABA) Materials Sourcing Requirements for Federal-Aid Projects.

The "Infrastructure Investment and Jobs Act" (the "Act"), or Bipartisan Infrastructure Law (BIL), was enacted on November 15, 2021 (See Public Law No. 117-58, Sections 70901-70953). The Build America, Buy America (BABA) provisions of the Act expand the previous Buy America requirements beyond what was currently required for steel and iron products.

Articles, materials, or supplies will only be classified under one of the following categories: iron or steel products, construction materials, manufactured products, or excluded materials (as further described in subsection 907-700.01.1). An article, material, or supply shall not be considered to fall under multiple categories. The applicable classification of the article, material, or supply being permanently incorporated into a construction project will be based on the status at the time the article, material, or supply is brought to the project work site.

Any iron or steel products, construction materials, and manufactured products that are permanently incorporated into a construction project, shall be domestically manufactured and compliant with current requirements of the Act, including 2 CFR 184, 2 CFR 200.322, 0MB 24-02 Memo and related requirements therein, and with the current requirements within 23 CFR 635.410.

It is the prime Contractor's responsibility to ensure all submittals and/or certifications required by the above listed Buy America/BABA provisions are submitted to the Project Engineer prior to the article, material, or supply being incorporated into the work.

Buy America/BABA provisions do not apply to temporarily used articles, materials, or supplies that:
(1) are specified to be removed at the end of the project per the contract provisions, or (2) are specified to remain in place per the contract provisions and are also documented by the Department in the contract provisions to be removed in a subsequent imminent, near-term phased project.

The following categories, as described above, require Domestic Materials Self-Certification Form (as described within Subsection 907-700.01.2) on construction projects:

Iron or Steel Products
Construction Materials
Manufactured Products.

Buy America/BABA provisions do not apply to excluded materials.

A non-exclusive list of items that must comply with the above listed Buy America/BABA requirements and require the submittal of the Buy America Domestic Materials Self- Certification Form may be viewed at www.goMDOT.com under Business Center ➔ Engineering Standards/Guides/Manuals ➔ Construction Materials.

The list of items referenced above is not all-inclusive. All iron or steel products, construction material, and manufactured products permanently incorporated into the project shall comply with the applicable Buy America/Build America (BABA) requirements, regardless of whether such items are specifically Identified.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-108-4 **CODE: (SP)**

DATE: 10/07/2020

SUBJECT: Subletting of Contract

Section 108, Prosecution and Progress, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

907-108.01--Subletting of Contract.

907-108.01.1--General. Delete the third sentence of the tenth paragraph of Subsection 108.01.1 on the bottom of page 72.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-108-6 **CODE: (SP)**

DATE: 03/11/2025

SUBJECT: Default and Termination of Contract

Section 108, Prosecution and Progress, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

907-108.08--Default and Termination of Contract. At the end of the Subsection 108.08 on page 85, add the following.

907-108.08.1--Debarment of Contractor. If the Contractor is declared to be in default under this Subsection and the Contract terminated for the reason(s) indicated in Subsections 108.08 (d), (f), or (g) above, the Commission may, in its discretion and in addition to default and termination, declare the Contractor to be debarred from bidding on any other projects for a period of one (1) year from the date of the termination letter. If the debarred Contractor has multiple on-going Contracts with the Commission and receives a one (1) year debarment, the on-going Contract(s) may continue; however, the Contractor will not be allowed to bid another project until one (1) year has passed from date of the termination letter.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-109-5 **CODE: (IS)**

DATE: 11/14/2023

SUBJECT: Measurement and Payment

Section 109, Measurement and Payment, of the 2017 Edition of the Mississippi StandardSpecifications for Road and Bridge Construction is hereby amended as follows.

907-109.01--Measurement of Quantities. Delete the sixth full paragraph of Subsection 109.01on page 88, and substitute the following.

If appropriate based on the specific circumstances of the project, the Contractor may request that material specified to be measured by the cubic yard or ton be converted to the other measure. The Contractor must submit this request to the Engineer. The Engineer will provide an approval or denial in writing. The decision is in the sole discretion of the Engineer. If approved, factors for this conversion will be determined by the District Materials Engineer and agreed to by the Contractor. The conversion of the materials along with the conversion factor will be incorporated into the Contract by supplemental agreement. The supplemental agreement must be executed before such method of measurement is used.

907-109.04--Extra Work.

907-109.04.1--Supplemental Agreement. Delete the second paragraph of Subsection 109.04.1 on page 90.

907-109.04.2--Force Account Agreement. Delete the last sentence of subparagraph (c) in Subsection 109.04.2 on page 91, and substitute the following.

An amount will be added equal to fifteen percent (15%) of the sum thereof, excluding sales tax.

Delete subparagraph (d) in Subsection 109.04.2 on pages 91 & 92, and substitute the following.

(d) **Equipment.** Equipment used for force account work shall be of sufficient size and type necessary to perform the required work in an economic and expeditious manner. The Contractor must provide the manufacturer, make, model, year, type of fuel and other necessary information to determine proper hourly payment rates. Subject to advance approval of the Engineer, actual transportation cost for a distance of not more than 200 miles will be reimbursed for equipment not already on the project.

For equipment authorized by the Engineer for use on the force account work, the Engineer will use the equipment rental rates from the "*Rental Rate Blue Book*" as published on the Equipment Watch website www.equipmentwatch.com for the time period the force account work is authorized to determine payment to the Contractor. The maximum allowable rates

are determined as follows:

1. The hourly equipment rate will equal the FHWA total hourly rate. This rate takes into account adjustment factors for age and region.
2. The hourly estimated operating costs have been included in the FHWA total hourly rate.
3. The idle and standby rates shall be as listed in the "*Rental Rate Blue Book*" as reported by *Equipment Watch*.
4. These rates include the basic machine plus any necessary attachments.

Standby rates shall apply when equipment is not in operation and is approved by the Engineer to standby for later use to complete the work. Idle rates shall apply to equipment located on the project and the engine is burning fuel but no ground engaging or other components are actively engaged in meaningful work. In general, idle or standby rates shall apply when equipment is not in use, but will be needed again to complete the work and the cost of moving the equipment will exceed the accumulated standby cost. If the idle standby cost should exceed the equipment moving cost to or from the work site, the Contractor will be entitled to the moving cost only. Idle or standby rates will be used under the following conditions:

1. The equipment is totally dedicated to the force account work and not used intermittently on other work.
2. Idle or standby cost will be considered only after equipment has been operated on force account work.
3. The sum of idle or standby time and operating time shall not exceed eight (8) hours per day or 40 hours in a week.
4. Idle or standby payment will not apply to days not normally considered to be work days such as holidays, weekends, or days of inclement weather when no other work is taking place.

The Department will not pay for idle or standby time when equipment is inoperable, for time spent repairing equipment, or for the time elapsed after the Engineer has advised the Contractor that the equipment is no longer needed. The Department will determine if it will be more cost effective to pay standby time on approved equipment on site or for multiple mobilizations.

If equipment is needed, which is not included in the *Rental Rate Blue Book* as reported by *Equipment Watch*, the Department and Contractor will agree upon reasonable rental rates in writing before the equipment is used.

All equipment shall be subject to approval from day to day in accordance with the requirements of Subsection 108.05.

907-109.06--Partial Payment.

907-109.06.2--Advancement on Materials.
Delete the next to last paragraph of Subsection 109.06.2 on page 95, and substitute the following.

Materials for which an advanced payment has been allowed must be paid for by the Contractor within 30 days of the estimate on which the advanced payment was first allowed and proof of said payment must be verified by the supplier. If proof of payment is not furnished within the allowable 30 days, the advanced payment will be deducted on subsequent current estimates until such time that proof of payment is furnished.

907-109.07--Changes in Material Costs. After the fifth paragraph of Subsection 109.07 on page 96, change the web address to the following.

https://mdot.ms.gov/portal/current_letting

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-618-12 **CODE: (SP)**

DATE: 05/03/2024

SUBJECT: Traffic Control Management

Section 618, Maintenance of Traffic and Traffic Control Plan, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

907-618.01--Description.

907-618.01.2--Traffic Control Management. Delete subparagraph (g) of Subsection 618.01.2 on page 441, and substitute the following.

g) Perform a minimum of once-a-week inspections from the Notice to Proceed until a Partial or Final Maintenance Release is obtained. Once work begins, daily daytime inspections and weekly nighttime inspections are required on projects with predominantly daytime work, and daily nighttime inspections and weekly daytime inspections are required on projects with predominantly nighttime work. Weekly inspections will be allowed for periods outside of active construction. When lane closures are present or any non-fixed signs or traffic handling devices such as cones or barrels are in place, inspections shall be performed daily whether work is being performed or not.

907-618.05--Basis of Payment. Delete pay item 618-A on page 449 and substitute the following.

907-618-A: Maintenance of Traffic - lump sum

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-619-5 **CODE: (IS)**

DATE: 01/17/2018

SUBJECT: Traffic Control for Construction Zones

Section 619, Traffic Control for Construction Zones, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

907-619.02--Materials.

907-619.02.8--Traffic Signals and Flashers. Delete Subsection 619.02.8.1 on pages 452 thru 455, and substitute the following.

907-619.02.8.1-Portable Traffic Signals. Portable traffic signals shall be trailer or pedestal mounted units that provide for easy, legal transportation and quick setup and deployment. Each unit shall be self-contained. The types of portable traffic signals are as follows.

- Type 1 portable traffic signal shall include two signal heads per trailer with one signal head mounted on an overhead mast arm that can be extended over the travel lane, and the other signal head shall be mounted on the vertical upright of the trailer.

- Type 2 portable traffic signal shall include one signal head that is mounted on the vertical upright of the pedestal/cart or trailer. Pedestal/Cart mounted shall be designated as Type 2A and Trailer mounted shall be designated as Type 2B. Type 2 portable traffic signals shall be tested to MASH Standards or NCHRP Test Level 3 crash testing requirements by an accredited independent test facility, with supporting documentation available upon request.

- Type 3 portable traffic signal shall be the same as Type 1 mentioned above but with enhanced capabilities as mentioned in each applicable section below.

The portable traffic signals shall be MUTCD Compliant and utilize standard ITE signal heads, and adhere to the ITE Specifications and Standards for Vehicle Traffic Control Signal Heads, Light Emitting Diode (LED) Circular Signal Supplement. The units shall be battery powered with a solar charging system, and be equipped with an onboard battery charger capable of being used with a 120V AC power source. Portable traffic signals shall be able to communicate with other portable signals via 900 MHz or other accepted wireless communications. If wireless connectivity is not feasible, hardwired connectivity shall be an acceptable alternative, as approved by the Engineer. Portable Traffic Signals shall include all the major components listed below or be able to perform the functions of these components. The major components of the unit shall include, but are not limited to, the trailer or pedestal/cart, telescoping mast arm (on Type 1 and 3), signal head(s) and back plates, traffic signal controller with operating software, solar charging system with batteries, input and output devices, vehicle detection, flasher units, conflict monitor, relays,

communications system and other equipment required for the safe operation and installation of the unit.

907-619.02.8.1.1--Signal Heads. The signal heads and all applicable components of the portable traffic signal shall meet the physical display and operational requirements of conventional traffic signals as specific in the Manual on Uniform Traffic Control Devices (MUTCD). The signal heads shall be cast aluminum or polycarbonate and shall meet the requirements laid out in the Mississippi Standard Specification for traffic signal heads and associated MDOT material specifications for traffic signal heads. The signal heads shall accommodate standard 12-inch LED indications meeting the ITE Specification "Vehicle Traffic Control Signal Heads" and ITE Specifications and Standards for Vehicle Traffic Control Signal Heads, Light Emitting Diode (LED) Circular Signal Supplement.

For Type 1, Type 2 and Type 3 portable traffic signals, the signal heads shall have the ability to be rotated 180 degrees to face in the opposite direction and shall have the ability to rotate and lock in approximately 10 degree increments to position the signal head for the optimum visibility to motorists.

For Type 1 portable traffic signals, each unit shall contain two signal heads with one signal head mounted on an overhead mast arm that can be extended over the travel lane with a minimum clearance of 17 feet measured from the bottom of the signal head unit to the road surface. The lower signal head shall be mounted to the vertical upright of the trailer at a minimum height of eight feet (8') from the bottom of the signal head unit to the road surface.

For Type 2 portable traffic signals, the signal head shall be mounted to the vertical upright of the trailer at a minimum height of eight feet (8') from the bottom of the signal head unit to the road surface.

For Type 3 portable traffic signals, each unit shall be the same as Type 1 mentioned above but with enhanced capabilities as mentioned below.

907-619.02.8.1.2--Controller and Operating Requirements. The portable traffic signal (Types 1, 2, and 3) shall include a solid state Controller Unit (CU) that is in compliance with NEMA TS 5 Performance Standard. The CU shall have an easy to read front panel backlit display for viewing and programming the configuration settings and CU status. The CU shall be capable of operating the portable traffic signal system in a fixed time, traffic actuated or manual control mode. Multiple portable traffic signals shall have the capability to be interconnected to form a portable traffic signal system. Each portable traffic signal within a connected system shall have the capability to serve as either the master or remote signal. Each portable traffic signal shall include a Conflict Monitor Unit (CMU), or Malfunction Management Unit (MMU) to ensure phase conflicts do not exist during operation.

For Type 1 and Type 2 portable traffic signals, a minimum of five (5) automatic time-of-day timing plans within a 24-hour period should be available in fixed time mode. The CU should have the ability to control a minimum of four (4) traffic phases with programmable cycle time adjustments and user adjustable red, amber, minimum green and maximum green times. The CU shall have

the capability of programming green and red times from 1 to 999 seconds and yellow times up to 15 seconds in one-second increments. The CU shall also have the capability of facilitating standby modes of red, red flash and yellow flash.

For Type 3 portable traffic signals, a minimum of ten (10) automatic time-of-day timing plans within a 24-hour period should be available in fixed time mode. The CU should have the ability to control a minimum of 16 traffic phases with programmable cycle time adjustments and user adjustable red, amber, minimum green and maximum green times. The CU shall have the capability of programming green and red times from 1 to 999 seconds and yellow times up to 15 seconds in one-second increments. The CU shall also have the capability of facilitating standby modes of red, red flash and yellow flash.

The system shall also have the ability to operate in vehicle actuation mode when vehicle detection components are used. The operating system shall have the capability to allow the Portable Traffic Signal to be connected to and controlled by a standard NEMA controller.

The system shall have the capability to be controlled remotely using a hardwired or wireless remote. The wireless radio remote shall be capable of communicating at a clear line of site distance up to ¼ mile from the master.

The CU shall have the capability of interfacing with a Remote Monitoring System (RMS) capable of reporting signal location, battery voltage, and system faults. The RMS shall include a password-protected web site, viewable via an internet connection. In the event of a system fault, the RMS shall provide specific information concerning the cause of the system fault (example: "red lamp on signal number 1 out"). The RMS shall immediately contact previously designated individuals via SMS text messaging or email, upon a fault event.

The active timing program operating the PTS system shall be available and viewable through the RMS website at all times. The RMS shall maintain a history of the operating system in each signal including total operating hours, alerts, and the location of the PTS trailer.

907-619.02.8.1.3--Wireless Communications. The portable traffic signals shall communicate with other portable traffic signals within the signal system via license-free wireless 900 MHZ radio link communications as specified in Subsection 662.02.2 of the radio Interconnect System specification. The radio units shall maintain communications at a minimum distance of one (1) mile. The radio system shall conform to the applicable Federal Communications Commission requirements and all applicable state and local requirements.

The portable traffic signals shall be in direct communication at all times either by wireless or hardwire connection to provide for the required conflict monitoring / malfunction management system.

907-619.02.8.1.4--Power Requirements. Each Portable Traffic Signal shall be equipped with a power source consisting of a solar collection array, solar controller and/or charging unit and batteries sufficient to operate the signal system. The number and size of batteries shall be sufficient to operate the Type 1 and Type 3 signals for a minimum of 30 days and Type 2A signals for

minimum of five (5) days, and Type 2B signals for minimum of 15 days without additional charging or assist from the solar array. An on-board battery charger shall be compatible with both the solar array and with a 120V AC power source.

For Type 1 signals, the solar panel array shall provide for a minimum of 440 watts of solar collection capability.

For Type 2A signals, the solar panel array shall provide for a minimum of 90 watts of solar collection capability.

For Type 2B signals, the solar panel array shall provide for a minimum of 110 watts of solar collection capability.

For Type 3 signals, the solar panel array shall provide for a minimum of 480 watts of solar collection capability and shall include a tilt and rotate system to optimally position the panels.

All instrumentation for the electrical system and battery compartment shall be contained in a lockable weatherproof enclosure. Solar panels shall be secured to the mounting brackets for theft prevention.

907-619.02.8.1.5--Trailer and Lift System. The trailer or pedestal/cart and all mounted components shall conform to the wind loading requirements as follows: 100 mph minimum for Type 1 portable traffic signals, 55 mph minimum for Type 2A portable traffic signals, 75 mph minimum for Type 2B portable traffic signals, and 90 mph minimum for Type 3 portable traffic signals as described in the AASHTO *Standard Specifications for Highway Signs, Luminaries and Traffic Signals*, as specified in the plans including all interims and updates. At the request of the Engineer, proof of conformance to these wind load ratings shall be verified by a third-party. No additional loose ballast shall be used to meet these wind load requirements. The trailer shall be made of structural steel and shall include four (4) leveling/stabilizer jacks capable of lifting the trailer a minimum of six inches (6").

The trailer or pedestal shall be equipped with a mechanical, hydraulic or electric lift system sufficient for one person to be able to raise and lower the vertical upright and/or horizontal mast arm to and from the operating position.

For Type 1, 2B, and Type 3 signals, the trailer shall be equipped to provide legal and safe transport on the public highway system at speeds up to 55 mph.

All exterior metal surfaces, except signal heads and back plates, shall be powder-coat painted highway safety orange.

907-619.02.9--Impact Attenuators. Delete the sentence in the first paragraph of Subsection 619.02.9 on page 455, and substitute the following.

Impact attenuators must be listed on the Department's APL.

907-619.02.11--Snap-Back Delineators. Delete the sentence in the paragraph of Subsection 619.02.11 on page 456, and substitute the following.

Snap-back delineators shall be selected from the list of surface mounted flexible delineator posts as shown on the Department's APL.

907-619.02.14--Changeable Message Sign.

907-619.02.14.5--PCMS Controller and Storage Cabinets. Delete the fifth sentence in the first paragraph of Subsection 619.02.14.5 on pages 462 and 463, and substitute the following.

The controller cabinet shall be illuminated.

907-619.05--Basis of Payment. Add the following to the list of pay items ending on page 480.

907-619-E3: Changeable Message Sign ***** - per each

907-619-H2: Traffic Signal, Portable, Type ___ - per each

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-700-3 **CODE: (IS)**

DATE: 4/20/2026

SUBJECT: Materials and Tests

Section 700, Materials and Tests, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

Delete fourth, fifth, sixth, and seventh paragraph of Subsection 700.01 on page 713, and add the following.

907-700.01.1--Buy America/Build America. Buy America (BABA) Requirements.

Iron or Steel Products. Iron or steel or wire products (including prestressed cables and strands) are products that consist wholly or predominantly of iron or steel or a combination of both.

Predominantly of iron or steel or a combination of both means that the cost of the iron and steel content exceeds 50 percent of the total cost of all components. The cost of iron and steel is the cost of the iron or steel mill products (such as bar, billet, slab, wire, plate, or sheet), castings, or forgings utilized in the manufacture of the product and a good faith estimate of the cost of the iron and steel components.

Iron or steel or wire products, as described above, that are permanently incorporated into a construction project must be produced domestically. All manufacturing processes for iron or steel or wire products, from the initial melting stage through the application of coatings, that are permanently incorporated into a construction project, must occur domestically. However, pig iron and processed, pelletized, and reduced iron ore manufactured outside of the United States may be used in the domestic manufacturing process for iron and/or steel and/or wire products. Coating includes all processes that protect or enhance the value of the material to which the coating is applied.

Construction Materials. Construction materials are articles, materials, or supplies that consist of only one of the items listed (non-ferrous metals, plastic and polymer-based products, glass, fiber-optic cables (including drop cables), optical fibers, lumber, drywall, and engineered woods). Minor additions of articles, materials, supplies, or binding agents to a construction material do not change the categorization of the construction material. All manufacturing processes for the listed construction materials, from the initial processes as described within 2 CFR 184.6 to the final processes as described within 2 CFR 184.6, that are permanently incorporated into a construction project, must occur domestically.

Manufactured Products. Manufactured products are articles, materials, or supplies that have been processed into a specific form or shape; or when combined with other articles, materials, or supplies create a product with different properties than the individual articles, materials, or supplies. An item that is classified as an iron or steel product, a construction material, or an excluded material is not a manufactured product. However, an article, material, or supply classified as a manufactured product

may include components that are iron or steel products, excluded materials, or other product categories as specified by law or in 2 CFR part 184. Mixtures of excluded materials delivered to a work site without final form for incorporation into a project are not a manufactured product. For construction projects obligated on or after October 1, 2025, the manufactured product must be manufactured domestically. For construction projects obligated on or after October 1, 2026, the manufactured product must be manufactured domestically and the cost of the components of the manufactured product that are mined, produced, or manufactured domestically is greater than 55 percent of the total cost of all components of the manufactured product.

Excluded Materials. Excluded materials, as listed in Section 70917(c) of the Build America, Buy America (BABA) Act, are cement and cementitious materials; aggregates such as stone, sand, or gravel; or aggregate binding agents or additives. However, an article, material, or supply classified as a manufactured product may include components that are iron or steel products, excluded materials, or other product categories as specified by law or in 2 CFR part 184. Mixtures of excluded materials delivered to a work site without final form for incorporation into a project are not a manufactured product.

Domestically shall be understood to mean all States of the United States, District of Columbia, Puerto Rico, American Samoa, Guam, and Virgin Islands and any other place subject to the jurisdiction of the United States.

907-700.01.2—Certificate of Compliance Requirements. Prior to incorporation into the work, the Contractor shall furnish the Project Engineer with a Domestic Materials Self-Certification Form documenting conformance to the requirements of Subsection 907-106.14. Attached hereto is the Domestic Materials Self-Certification Form that shall be furnished by the Contractor to the Project Engineer.

Domestic Materials
Self-Certification Form

This certification is for a manufacturer/supplier to certify the below articles, materials, or supplies are in compliance with the applicable domestic material content procurement preferences found in the Buy America Act requirements (23 CFR 635.410) and the Build America, Buy America Act (BABA) requirements (2 CFR part 184). The individual completing this form takes full responsibility for the information included in the form. State agencies have the authority to request additional details related to the information provided in the form. All forms shall be submitted via AASHTO DataMine for delivery to authorized governmental users through the Industry Document Repository. The manufacturer/supplier is required to include updates to process changes within 10 days of the change occurring via uploading a revised form into DataMine.

PART 1: COMPANY CONTACT INFORMATION

Company/Producer/Manufacturer Name:

Supplier Representative Name:

Contact Email Address: Contact Phone Number:

Date Form is Being Submitted: mm/dd/yyyy

PART 2: DETAILS OF THE ARTICLE, MATERIAL, OR SUPPLY:

Using Table 1 below, provide the classification of the article, material, or supply as one of the following: (1) iron or steel product; (2) construction material (3) manufactured product; or (4) excluded materials including Section 70917(c) materials.

Classification	
Producer of the Article, Material, or Supply:	
Product/Model/Part/Material:	
Manufacturing Address:	
Manufacturing City:	
Manufacturing State:	
Manufacturing Zip Code:	
DataMine # (if applicable):	
Federal/State/Local Project number(s):	
Pay Code Number (PCN):	
Project Item code:	
Project Item Description:	
Quantity Certified:	

TABLE 1: Material Classifications

(1) Iron or Steel Product	
Wholly or predominantly Iron or Steel, or a combination of both (23 CFR 635.410(b)(1)(ii))	Certification requires predominantly of iron or steel or a combination of both means that the cost of the iron and steel content exceeds 50 percent of the total cost of all its components. The cost of iron and steel is the cost of the iron or steel mill products (such as bar, billet, slab, wire, plate, or sheet), castings, or forgings utilized in the manufacture of the product and a good faith estimate of the cost of iron or steel components.
(2) Construction Material	
Non-Ferrous Metals (2 CFR 184.6(a)(1))	Certification requires all manufacturing processes, from initial smelting or melting through final shaping, coating, and assembly, occurred in the United States.
Plastic and Polymer based products (including polyvinyl chloride, composite building materials, and polymers used in fiber optic cables) (2 CFR 184.6(a)(2))	Certification requires all manufacturing processes, from initial combination of constituent plastic or polymer-based inputs, or where applicable, constituent composite materials, until the item is in its final form, occurred in the United States.
Glass (including optic glass) (2 CFR 184.6(a)(3))	Certification requires all manufacturing processes, from initial batching and melting of raw materials through annealing, cooling, and cutting, occurred in the United States.
Fiber Optic Cable (including drop cable) (2 CFR 184.6(a)(4))	Certification requires all manufacturing processes, from the initial ribboning (if applicable), through buffering, fiber stranding and jacking, occurred in the United States. All manufacturing processes also include the standards for glass and optical fiber, but not for non-ferrous metals, plastics and polymer-based products, or any others.
Optical Fiber (2 CFR 184.6(a)(5))	Certification requires all manufacturing processes, from the initial preform fabrication stage through the completion of the draw, occurred in the United States
Lumber (2 CFR 184.6(a)(6))	Certification requires all manufacturing processes, from initial debarking through treatment and planing, occurred in the United States.
Drywall (2 CFR 184.6(a)(7))	Certification requires all manufacturing processes, from initial blending of mined or synthetic gypsum plaster and additives through cutting and drying of sandwiched panels, occurred in the United States.
Engineered Wood (2 CFR 184.6(a)(8))	Certification requires all manufacturing processes, from initial combination of constituent materials until the wood product is in its final form, occurred in the United States.
(3) Manufactured Product	
Manufactured Products other than Precast Concrete Products and Intelligent Transportation Systems and Other Electronic Hardware Systems Installed on the Highway ROW or Other Real Property (23 CFR 635.410(c)(1)(vii)) and 23 CFR 635.410(c)(1)(iv)	• Certification requires for projects obligated before October 1, 2025, no certification is required (excludes EV chargers). • Certification requires for projects obligated on or after October 1, 2025, certification requires the final manufacturing process occurred in the United States (excludes EV chargers). • Certification requires for projects obligated on or after October 1, 2026, and all EV chargers , certification requires the final manufacturing process occurred in the United States and the cost of the components that are mined,

	produced, or manufactured in the United States is greater than 55 percent of the total cost of all components of the manufactured product.
Precast Concrete Products (23 CFR 635.410(c)(2)(i))	Classified as a manufactured product must comply with both the wholly or predominantly iron or steel or a combination of both product and manufactured product certification requirements as stated above.
Intelligent Transportation Systems and Other Electronic Hardware Systems Installed on the Highway ROW or Other Real Property (23 CFR 635.410(c)(2)(ii))	Classified as a manufactured product must comply with both the wholly or predominantly iron or steel or a combination of both product certification requirements for any iron or steel enclosures as well as the manufacturing certification requirements as stated above.
(4) Excluded Materials	
Excluded Materials Including Section 70917(c) Materials (23 CFR 635.410(c)(1)(ii))	No certification is required for excluded materials including Section 70917(c) materials. Section 70917(c) materials means cement and cementitious materials; aggregates such as stone, sand, or gravel; or aggregate binding agents or additives.

PART 3: DECLARATION OF SUBMITTAL

Do the articles, materials, or supplies submitted in this form comply with applicable domestic materials content procurement preferences found in the Buy America Act requirements (23 CFR 635.410) and the Build America, Buy America Act requirements (2 CFR part 184) (Y/N)? _____

PART 4: CERTIFICATION (Read and check all boxes before signing)
Note: State Departments of Transportation may have different language requirements for this section.

☐ I certify that the description above is a true and accurate description of the article, material, or supply provided, and that the undersigned is in a position to legally bind the Company/Organization represented in this form.

☐ I certify that the iron or steel product, construction material, or manufactured product complies with the applicable Buy America or BABA requirements.

Signature: Date: mm/dd/yyyy

Printed Name:
Title:
Company/Organization:
Company/Organization address:

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SUPPLEMENT TO SPECIAL PROVISION NO. 907-701-4

DATE: 11/05/2024

SUBJECT: Hydraulic Cement

907-701.04--Blended Hydraulic Cement.

907-701.04.1--Types of Blended Hydraulic Cement. After the last paragraph of Subsection 907-701.04.1 on page 1, add the following.

Blended cement Types IL meeting the "HE" high early strength requirement listed in AASHTO M 240, Table 3 shall have the "(HE)" suffix added to the type designation.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-701-4 **CODE: (IS)**

DATE: 11/21/2023

SUBJECT: Hydraulic Cement

Section 701, Hydraulic Cement, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

907-701.01--General. In the first sentence of the second paragraph of Subsection 701.01 on page 718, change "mills" to "plants."

In the second sentence of the sixth paragraph of Subsection 701.01 on pages 718 and 719, change "shall" to "will."

907-701.02--Portland Cement.

907-701.02.1-General. Delete Subsections 701.02.1.1, 701.02.1.2, 701.02.2, 701.02.2.1, and 701.02.2.2 on pages 719 and 720, and substitute the following.

907-701.02.1.1--Types of Portland Cement. Portland cement shall be either Type I, Type II, or Type III conforming to AASHTO M85 or Type III (MS). Type III (MS) is defined as a Type III cement conforming to AASHTO M85 having a maximum tricalcium aluminate (C_3A) content of 8%.

907-701.02.2--Blank.

907-701.02.2.1--Blank.

907-701.02.2.2--Blank.

Delete Subsection 701.04 on pages 720 and 721, and substitute the following.

907-701.04--Blended Hydraulic Cement.

907-701.04.1--Types of Blended Hydraulic Cement. Blended hydraulic cements (blended cements) shall be of the following types and conform to AASHTO M 240:

Type IL – Portland-limestone cement
Type IP – Portland-pozzolan cement
Type IS – Portland blast-furnace slag cement

Blended cement Types IL, IP, and IS meeting the "MS" sulfate resistance requirement listed in AASHTO M 240, Table 3 shall have the "(MS)" suffix added to the type designation.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-702-4 **CODE: (IS)**

DATE: 09/11/2018

SUBJECT: Bituminous Materials

Section 702, Bituminous Materials, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

907-702.04--Sampling. Delete the sentence in Subsection 702.04 on page 722, and substitute the following.

Sampling of bituminous materials shall be as set out in AASHTO R 66.

907-702.07--Emulsified Asphalt. Delete the last sentence in Subsection 702.07 on page 724, and substitute the following.

Asphalt for fog seal shall conform to the requirements of Subsection 907-702.12, Table V.

907-702.12--Tables. Delete Table V in Subsection 702.12 on page 729, and substitute the following.

TABLE V
SPECIFICATION FOR FOG SEAL

	LD-7		CHPF-1		
Test Requirements	**Min.**	**Max.**	**Min.**	**Max.**	**Test Method**
Viscosity, Saybolt Furol, @ 25°C, Sec.	10	100	-	100	AASHTO T 72
Storage Stability Test, 24 hr, %	-	1	-	1	AASHTO T 59
Settlement, 5 day, %	-	5	-	-	AASHTO T 59
Oil Distillate, %	-	1	-	-	AASHTO T 59
Sieve Test, % *	-	0.3	-	0.1	AASHTO T 59
Residue by Distillation, %	40	-	40	-	AASHTO T 59
Test on Residue from Distillation					
Penetration @ 25°C, 100g, 5 sec	-	20	40	90	AASHTO T 49
Softening Point, °C	65	-	-	-	ASTM D 36
Solubility in trichloroethylene, %	97.5	-	-	-	AASHTO T 44
Elastic Recovery @ 25°C, %	-	-	40	-	AASHTO T 301
Original DSR @ 82° (G*/Sinδ, 10 rad/sec)	1	-	-	-	AASHTO T 111

* The Sieve Test result is tested for reporting purposes only and may be waived if no application problems are present in the field.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-703-2 **CODE: (SP)**

DATE: 11/29/2022

SUBJECT: Gradation

Section 703, Aggregates, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

907-703.03--Coarse Aggregates for Hydraulic Cement Concrete.

907-703.03.2--Detail Requirements.

907-703.03.2.4--Gradation. In the table in Subsection 703.03.2.4 on page 734, add 100 for the percent passing by weight on the 1½-inch sieve for Size No. 67 aggregates.

Delete Note 2 under the table in Subsection 703.03.2.4 on page 734, and substitute the following.

Note [2] – 100 percent shall pass the 1-inch sieve for Size 67 used in Class F and Class FX concrete.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-705-1 **CODE: (IS)**

DATE: 06/13/2018

SUBJECT: Stone Riprap

Section 705, Stone Blanket Protection and Filter Blanket Materials, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

907-705.04--Stone Riprap. Delete the last sentence of the first paragraph of Subsection 705.04 on page 750, and substitute the following.

Quality requirements for rock to be furnished under these specifications will come from a pre-approved source and be visually approved prior to use.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-707-3 **CODE: (IS)**

DATE: **10/27/2021**

SUBJECT: **Joint Materials**

Section 707, Joint Materials, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

907-707.02--Joint Filler.

907-707.02.2--Preformed Sponge, Rubber, Cork and Closed-Cell Polypropylene Foam Joint Fillers for concrete Paving and Structural Constructions. Delete the two paragraphs of Subsection 707.02.2 on page 755, and substitute the following.

Preformed joint filler shall conform to AASHTO M 153 for sponge, rubber, and cork and tested according to ASTM D545. The type required will be indicated on the plans.

Closed-cell polypropylene foam shall conform to the requirements in ASTM D8139 and tested in accordance with ASTM D545.

907-707.02.3--Wood. Delete paragraph (b) of Subsection 707.02.3 on page 755, and substitute the following:

(b) Dimensions shall be as shown on the plans Dimensions shown on the plans are "dressed" sizes in accordance with Table 3 of the American Softwood Lumber Standard, SP-20. At the discretion of the Engineer, a 3/4-inch dressed board may be used in lieu of a 1-inch dressed board. A tolerance of plus or minus 1/16 inch thickness and plus or minus 1/8 inch width will be permitted. For slip-form paving a tolerance of minus 1/4 inch on each end in length will be permitted.

907-707.06--Flexible Plastic Gasket for Joining Conduit. Delete the third paragraph of Subsection 707.06 on page 756, and substitute the following.

The Department may require the performance test described in ASTM C 990.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-711-2 **CODE: (IS)**

DATE: 09/11/2018

SUBJECT: Plain Steel Wire

Section 711, Reinforcement and Wire Rope, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

907-711.02--Deformed and Plain Carbon-Steel Bars for Concrete Reinforcing.

907-711.02.3--Steel Welded and Non-Welded Wire Reinforcement, Plain and Deformed, for Concrete.

907-711.02.3.1--Plain Steel Wire. Delete the sentence in Subsection 711.02.3.1 on pages 780 and 781, and substitute the following.

Plain steel wire and plain steel welded wire shall conform to the requirements of AASHTO M 336.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-712-1 **CODE: (SP)**

DATE: 12/07/2021

SUBJECT: Fence and Guardrail

Section 712, Fence and Guardrail, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

907-712.01--General. After the sentence in Subsection 712.01 on page 785, add the following.

All materials' inspection, testing, and certification will be performed in accordance with the requirements of the current version of the Department's *Materials Division Inspection, Testing, and Certification Manual*.

Delete Subsections 712.02 and 712.03 on page 785, and substitute the following.

907-712.02--Barbed Wire. Barbed wire shall conform to the requirements of AASHTO M 280. In the coastal counties of Hancock, Harrison, and Jackson, either Coating Type Z Class 3 or Coating Type A shall be furnished. In all other areas of the State, either Coating Type Z Class 1, Coating Type Z Class 3, Coating Type ZA Class 60, or Coating Type A shall be furnished.

907-712.03--Metallic-Coated, Steel Woven Wire Fence Fabric. Woven wire fencing (i.e., "hog wire") shall conform to the requirements of AASHTO M 279. In the coastal counties of Hancock, Harrison, and Jackson, either Coating Type Z Class 3 or Coating Type A shall be furnished. In all other areas of the State, either Coating Type Z Class 1, Coating Type Z Class 3, Coating Type ZA Class 60, or Coating Type A shall be furnished.

907-712.04--Chain Link Fence. Delete Subsections 712.04.1 thru 712.04.7 on pages 785 & 786, and substitute the following.

907-712.04.1--Fabric. In the coastal counties of Hancock, Harrison, and Jackson, either Type I Class D, Type II, Type III, or Type IV fabrics shall be furnished. In all other areas of the State, either Type I Class C, Type I Class D, Type II, Type III, or Type IV fabrics shall be furnished.

907-712.04.2--Tie Wire. Tie wire shall be of the same material as the fencing wire being used, shall be of good commercial quality, and shall meet the requirements of AASHTO M 181. Either Type I, Type II, Type III, or Type IV tie wire shall be furnished.

907-712.04.3--Tension Wire. Tension wire shall be of the same material as the fencing wire being used, shall be of good commercial quality, and shall meet the requirements of AASHTO M 181. In the coastal counties of Hancock, Harrison, and Jackson, either Type I Class 3, Type II, Type III, or Type IV tension shall be furnished. In all other areas of the State, either Type II, Type III, Type IV, or Type I Classes 1, 2, or 3 tension wires shall be furnished.

907-712.04.4--Posts Rails, Gate Frames, and Expansion Sleeves. Posts, rails, gate frames, and expansion sleeves shall conform to the requirements for posts in Subsection 712.05.2, unless otherwise designated in the contract.

907-712.04.5--Miscellaneous Fittings and Hardware. Miscellaneous fittings and hardware shall conform to the requirements of Subsection 712.16.

907-712.05--Fence Posts and Braces.

907-712.05.1--Treated Timber Posts and Braces.

907-712.05.1.1--General. Delete the third, fourth, fifth, and sixth paragraphs of Subsection 712.05.1.1 on page 787, and substitute the following.

All wood posts and braces shall be treated in accordance with Subsections 718.03 and 718.04.

907-712.05.1.2--Round Posts. Delete the last sentence of the last paragraph of Subsection 712.05.1.2 on page 788.

907-712.05.1.3--Sawed Posts. Delete the last sentence of the paragraph of Subsection 712.05.1.3 on page 788.

907-712.05.1.4--Sawed Braces. Delete the last sentence of the paragraph of Subsection 712.05.1.4 on page 788.

Delete Subsection 712.05.2 on page 788, and substitute the following.

907-712.05.2--Metal Posts.

907-712.05.2.1--Round Steel Pipe. Round steel pipe shall meet the requirements of AASHTO M 181, either Grade 1 (i.e., meeting the requirements in ASTM F 1083) or Grade 2 (i.e., meeting the requirements of ASTM F 1043).

Round steel pipe shall be sized in accordance with NPS (nominal pipe size) designations as shown on Plans, and not according to the outer or inner pipe diameter.

907-712.05.2.2--Steel Fence Post and Assemblies, Hot-Wrought. Steel posts with the following section shapes, Tee, channel or U, and Y-Bar shall meet the requirements of AASHTO M 281, galvanized in accordance with the requirements of AASHTO M 111, unless otherwise specified in the contract. Acceptance of these steel posts shall be by certification from the manufacturer, producer, supplier, or fabricator, as applicable.

907-712.05.2.3--Blank.

907-712.05.2.4--Steel H-Beam Posts. Steel H-Beam posts shall be produced from structural quality weldable steel having a minimum yield strength of 45,000 psi and shall be galvanized in accordance with ASTM A 123. Steel H-Beam line posts shall be 2.250 inches by 1.625 inches and shall weigh 3.43 pounds per foot. A tolerance of plus or minus 5.0 percent is allowed for

weight per foot. A tolerance of plus or minus 1.0 percent is allowed for dimensions.

907-712.05.2.5--Aluminum-Alloy Posts and Assemblies. Round aluminum-alloy posts shall meet the requirements of ASTM B 241, Alloy 6061, T6. Aluminum-Alloy H-Beam posts shall meet the requirements of ASTM B 221, Alloy 6061, T6.

907-712.05.2.6--Formed Steel Section Posts. Formed steel section posts, "C" sections, shall be formed from sheet steel conforming to ASTM A 1011, Grade 45, and shall be galvanized in accordance with ASTM A 123.

907-712.06--Guard and Guardrail Posts.

907-712.06.2--Treated Wood Posts.

907-712.06.2.1--Square Posts. Delete the paragraph in Subsection 712.06.2.1 on page 789, and substitute the following.

All square posts shall be inspected for conformance with Section 712.05, except that the posts may be rough and shall be within ±3/8" of the dimensions shown on the plans.

907-712.06.2.2--Round Posts. Delete the paragraph in Subsection 712.06.2.2 on page 789, and substitute the following.

All round posts shall be inspected for conformance with Section 712.05, except that the posts shall be of the shape and dimensions shown on the plans.

907-712.06.5--Treated Wood Blocks for Use with Metal Guardrail Posts. Delete the paragraphs of Subsection 712.06.5 on pages 789 & 790, and substitute the following.

Treated wood blocks for use with metal guardrail posts shall be within ±3/8" of the size and dimensions shown on the plans, except that a minus tolerance shall not be allowed for the slotted width in which the metal post must fit.

Delete Subsection 712.16 on page 791, and substitute the following.

907-712.16--Hardware. All ferrous metal hardware for fencing such as bolts, nuts, washers, and metal straps shall be as specified on the plans and galvanizing shall not be less than 1.0 ounce per square foot of uncoated area. Aluminum coated hardware shall be coated with aluminum meeting the requirements of AASHTO M 181 for aluminum coating and at the rate of not less than 0.4 ounces per square foot of uncoated area.

Aluminum alloy hardware shall conform to the requirements of ASTM B 221 for extruded aluminum alloy 6063, T6. The finished members shall be of uniform quality.

Aluminum-zinc coated hardware shall be coated with an aluminum-zinc alloy meeting the chemical requirements and weight of coating specified for aluminum-zinc alloy coated metal gates.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-714-4 **CODE: (SP)**

DATE: **07/28/2025**

SUBJECT: **Miscellaneous Materials**

Section 714, Miscellaneous Materials, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

907-714.01--Water.

907-714.01.1--General. Delete the last sentence of the second paragraph in Subsection 714.01.1 on page 794.

907-714.01.2--Water for Use in Concrete. Delete Subsection 714.01.2 on page 794, and substitute the following:

Water from municipal sources is permitted be used as mixing water in concrete, mortar, and grout without Department testing. Water from non-municipal water sources used in mixing of concrete, mortar, and grout which does not meet the requirements in Subsection 714.01.1 shall be tested for conformance as required in AASHTO M157, Table 1 and Table 2.

907-714.01.3--Water for Use in Chemically Stabilized Based. Delete the first sentence of first paragraph in Subsection 714.01.3 on page 794, and substitute the following:

Water used in the construction of bases that contain cement, lime, or other chemical additive shall be as set out in Subsection 714.01.1. Water from municipal sources is permitted to be used without testing for conformance to the requirements below. If water is not from a municipal source, it shall not contain impurities in excess of the following limits:

Delete Subsection 714.01.6 on page 795, and substitute the following.

907-714.01.6--Blank.

907-714.05--Fly Ash.

907-714.05.1--General. Delete the first sentence of the fifth paragraph in Subsection 714.05.1 on page 797.

Delete Subsection 714.06 on page 798, and substitute the following.

907-714.06--Slag Cement.

907-714.06.1--General. The slag cement source must be approved for listing in the Department's

APL prior to use. The acceptance of slag cement shall be based on certified test reports, certification of shipment from the supplier, and tests performed on samples obtained after delivery in accordance with the Department's *Materials Division Inspection, Testing, and Certification Manual* and Department SOP.

The Contractor shall provide suitable means for storing and protecting the slag cement against dampness and contamination. Separate storage silos, bins, or containers shall be provided for slag cement. Slag cement that is partially set, caked or contains lumps shall not be used.

The State Materials Engineer shall be notified in writing of the nature, amount and identity of any processing or other additions made to the slag cement during production.

Slag cement from different mills shall not be mixed or used alternately in any one class of construction or structure without written permission from the Engineer; except that this requirement will not be applicable to cement treatment of design soils or bases.

No additional cementitious materials, such as blended hydraulic cement, fly ash, metakaolin, or others, shall be added to or as a replacement for hydraulic cement when used with slag cement in the production of concrete. The replacement of hydraulic cement with slag cement shall be in accordance with the applicable replacement content specified in Subsection 701.02.2.

907-714.06.2--Specific Requirements. Slag cement shall meet the requirements of AASHTO M 302, Grade 100 or 120. Slag cement shall contain no chlorides.

907-714.13--Geotextiles.

907-714.13.11--Tables. Delete Table 1 in Subsection 714.13.11 on page 813, and substitute the following.

Table 1 - Geotextiles

Type Designation	I[1]	II[1]	III	IV	V	VI		VII		VIII	IX	
	Sediment Control		Drainage	Paving	Separation & Drainage	Separation, Stabilization & Reinforcement				High Strength		
Physical Property[2]						Woven	Non-Woven	Woven	Non-Woven			**Test Method**
Grab Strength (lb)	50	90	110	90	200	280	180	450	280	----	----	ASTM D 4632
Elongation (%)	----	50% max @ 45 lb	20% min	50% min @ break	50% min	50% max	50% Min	50% max	50% Min	----	----	ASTM D 4632
Seam Strength (lb)	----	----	70	----	180	240	160	400	240	----	----	ASTM D 4632
Puncture Strength (lb)	----	----	40	----	80	110	75	180	115	----	----	ASTM D 6241
Trapezoidal Tear (lb)	----	----	40	----	80	100	70	150	100	----	----	ASTM D 4533
Asphalt Retention (gal/yd^2)	----	----	----	0.2	----	----	----	----	----	----	----	ASTM D 6140
Permittivity (sec^{-1}) min	0.05	0.05	0.5	----	0.2	0.2	0.2	0.2	0.2	----	----	ASTM D 4491
AOS Woven (mm) max	0.60	0.60	0.6	----	0.6	0.43	----	0.43	----	----	----	ASTM D 4751
AOS Non-Woven (mm) max	0.84	0.84	0.43	----	0.43	----	0.43	----	0.43	----	----	
Tensile Strength after UV (% Retained)	70% @ 500 hr	70% @ 500 hr	50% @ 500 hr	----	50% @ 500 hr	50% @ 500 hr	50% @ 500 hr	50% @ 500 hr	50% @ 500 hr	----	----	ASTM D 4355
Melting Point °(F)	----	----	----	325	----	----	----	----	----	----	----	ASTM D 276
Minimum Ultimate Tensile Strength[3] (lb/in)	----	----	----	----	----	----	----	----	----	660	2000	ASTM D 4595

Notes: 1 - All property values, with the exception of apparent opening size (AOS), represent minimum average roll values in the weakest principal direction. Values for AOS represent the maximum average roll values, 2 - Values not identified in this table should meet manufacturer certification for the use and application, 3- Machine direction

Delete Subsec

907-714.15--Geogrids.

907-714.15.1–General. A geogrid is defined as a geosynthetic formed by a regular network of connected elements with apertures greater than 0.25 inch to allow interlocking with surrounding soil, rock, and other surrounding materials to function primarily as reinforcement.

Geogrid shall be manufactured from an expanded strain hardened monolithic polymer sheet composed of one or more synthetic polymers and shall be mildew resistant and inert to biological degradation and naturally encountered chemicals, alkalis and acids. The geogrid shall contain stabilizers and/or inhibitors, or a resistance finish or covering to make it resistant to deterioration from direct sunlight, ultraviolet rays, and heat.

Geogrid manufacturers shall participate in and be in compliance with the American Association of State Highway Transportation Officials (AASHTO) National Transportation Product Evaluation Program's (NTPEP) Geosynthetics audit program. Geogrid shall meet the requirements of Table II for the application and type shown on the plans and shall be selected from the Department's Approved Lists.

907-714.15.1.1--Geogrid for Retaining Walls and Reinforced Soil Slopes. Geogrid for retaining walls and reinforced soil slopes shall be creep tested in accordance with AASHTO R69 and meet Long Term Design Load, Minimum Ultimate Tensile Strength, and open area criteria listed in Table II. Manufacturers shall perform at least one long-term creep test for no less than 10,000 hours in accordance to ASTM D 5262 for each polymer or composition of polymers from which the geogrid is produced. The long-term design load that shall be reported for design use, shall be that load at which no more than 10% strain occurs over a 100-year design life of the geogrid, as calculated in accordance with AASHTO R69. Long-term design loads shall be reported unfactored, and the AASHTO strength reduction factors (Durability and Installation, and safety factors) will be considered by the Department's Geotechnical Branch on a site specific design basis.

907-714.15.1.2--Geogrid for Subgrade Stabilization. Geogrid for subgrade stabilization shall meet Minimum Ultimate Tensile Strength and open area criteria listed in Table II.

907-714.15.2--Marking, Shipment, and Storage. Each roll or container of geogrid shall be visibly labeled with the name of the manufacturer, trade name of the product, lot number, and quantity of material. In addition, each roll or container shall be clearly tagged to show the type designation that corresponds to that required by the plans. During shipment and storage the geogrid shall be protected from direct sunlight, and temperatures above 120°F or below 0°F. The geogrid shall either be wrapped and maintained in a heavy duty protective covering or stored in a safe enclosed area to protect from damage during prolonged storage.

907-714.15.3--Manufacturer Certification. The Contractor shall furnish the Engineer three copies of the manufacturer's certified test reports indicating that the geogrid furnished conforms to the requirements of the specifications and is of the same composition as the originally approved by the Department.

907-714.15.4--Acceptance Sampling and Testing. Final acceptance of each shipment will be

based upon results of tests performed by the Department on verification samples submitted from the project, as compared to the manufacturer's certified test reports. The Engineer will select one roll or container at random from each shipment for sampling. As sample extending full width of the randomly selected roll or container and being at least five (5) square yards in area will be obtained and submitted by the Engineer. All material samples shall be provided at no cost to the State.

TABLE II
GEOGRIDS

Physical Properties	Type Designation						Test Method
	I	II	III	IV	V	VI	
Long Term Design Load[1], pounds per foot, Machine Direction	250	500	750	1500	2500	3500	AASHTO R69, ASTM D5262
Minimum Ultimate Tensile Strength[2], pounds per foot, Machine Direction	500	1000	1500	3000	5000	7000	ASTM D6637
Open Area, percent	70	70	50	50	50	50	Direct Measurement

[1] Minimum design criteria requirement.
[2] Minimum Average Roll Value (MARV).

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-718-1 **CODE: (SP)**

DATE: 12/07/2021

SUBJECT: Timber and Dimension Lumber

Section 718, Timber and Dimension Lumber, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

Delete the Subsections in Section 718 on pages 836 thru 838, and substitute the following.

907-718.01--General. All timber and dimension lumber shall be Southern pine and shall conform in all respects to applicable requirements of AASHTO M 168. The Department reserves the right to sample and to test all materials at any time; all inspection, testing, and certification of materials will be performed in accordance with the requirements of the current version of the Department's *Materials Division Inspection, Testing, and Certification Manual*.

Timber and dimension lumber shall be furnished in the sizes shown on the plans or as specified. Unless otherwise specified, timber and dimension lumber shall be No. 1, or better, graded according to the latest American Lumber Standards.

Only one type of preservative shall be used for the treatment of materials for any one class of construction on a project, unless otherwise specified.

Where treated timber and dimensional lumber is to be used in non-highway construction or use, such as decking, handrails in walking trails, or in any manner where general public exposure by touch is possible, the treatment requirements will be as per project plans and/or approved by the State Materials Engineer.

907-718.02--Untreated Timber and Dimension Lumber. Untreated timber and dimension lumber shall conform to the requirements of AASHTO M 168.

907-718.03--Treated Timber and Dimension Lumber. Timber and dimension lumber to be treated shall meet the requirements herein specified and shall be treated as specified. Treated timber or dimensional lumber will not be accepted for use unless it has been inspected by an authorized representative of the Department and found to be satisfactory after treatment.

907-718.03.1--Blank.

907-718.03.2--Treatment.

907-718.03.2.1--General. All materials shall be treated in accordance with AASHTO M 133 unless otherwise directed by the Environmental Protection Agency (EPA).

907-718.03.2.2--Blank.

907-718.03.2.3--Inspection. Treated timber and dimension lumber shall be inspected by an authorized representative of the Department before being incorporated into the work. Treatment reports shall be provided to the Department for each lot of material supplied.

907-718.03.3--Blank.

907-718.03.4--Storage of Treated Material. All material treated for stock shall be stacked as compactly as possible on a well-drained surface. Material shall be supported on sills spaced as necessary, not to exceed 10 foot intervals and shall have at least one foot of air space beneath the stacks.

All materials treated with preservatives for use in buildings and applications where painting is required shall be dried after treatment. The treated wood shall be dried in accordance with American Lumber Standards.

907-718.04--Preservative. Preservatives shall be as specified in AASHTO M 133 unless otherwise directed by the Environmental Protection Agency (EPA).

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-720-4 **CODE: (IS)**

DATE: **06/17/2025**

SUBJECT: **Pavement Marking Materials**

Section 720, Pavement Marking Materials, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

Delete Section 720 on pages 840 thru 854, and substitute the following.

SECTION 720 - PAVEMENT MARKING MATERIALS

907-720.01--General. The Department reserves the right to perform sampling and testing of any materials at any time. Upon request of the Engineer, samples of the material shall be furnished.

907-720.02--Color Requirements. All pavement markings except raised pavement markers are required to meet the color requirements of ASTM D6628.

907-720.03--Optics. Optics used in thermoplastic pavement markings shall consist of a double-drop system of glass beads or advanced optics.

907-720.03.1--Glass Beads. The manufacturer shall furnish the Engineer with a certified test report indicating that the glass beads meet AASHTO M 247. AASHTO Type 4 beads shall be applied to the newly placed stripe first, followed by the application of AASHTO Type 1 or Type 2 beads. Type 1, 2, and 4 glass beads shall be transparent, clean, colorless glass, smooth and spherically shaped, free from milkiness, pits, or excessive air bubbles. Type 1, 2, and 4 glass beads shall be coated with a bead coating that is compatible with the traffic marking material to which the glass beads will be applied and will provide adequate moisture proofing, increased adhesion, and optimum embedment of the glass beads.

907-720.03.1.1—Acceptance Procedure. The Contractor shall furnish the Engineer with a copy of the manufacturer's certified test reports for the lot(s) of materials from which the shipment originated. The test report shall show all the test results for the material properties and characteristics as specified herein. The test report shall state that the material represented by the test results meets all the requirements of the contract. It shall be the Contractor's responsibility to furnish the manufacturer's test report to the Engineer for each shipment of material to the project.

Acceptance sampling and testing will be in accordance with the Materials Division Inspection, Testing, and Certification Manual (Materials Manual).

907-720.03.2--Advanced Optics. Advanced optics are materials that do not meet the specific requirements of AASHTO M 247 but produce a final drop-on optics system that meets or exceeds the reflectivity requirements in Special Provision 907-626. Advanced optics shall be a double-

drop system that is pre-approved and listed on the Department's Approved Products List.

907-720.03.2.1—Acceptance Procedure. The Contractor shall furnish the Engineer with a copy of the manufacturer's certified test reports for the lot(s) of materials from which the shipment originated. The test report shall show all the test results for the material properties and characteristics as specified herein. The test report shall state that the material represented by the test results meets all the requirements of the contract. It shall be the Contractor's responsibility to furnish the manufacturer's test report to the Engineer for each shipment of material to the project.

Acceptance sampling and testing may be conducted at the request of the Engineer.

907-720.04--Thermoplastic Marking Material. Thermoplastic marking material shall meet the color requirements of Subsection 907-720.02.

There shall be no obvious change in the color of the material if held at its plastic temperature for a period of four (4) hours nor by reason of four (4) re-heatings to its plastic temperature.

The pavement markings shall maintain its original dimension and placement. The material shall not be slippery when wet and it shall not lift from the pavement in freezing weather.

907-720.04.1--Extruded Thermoplastic Material. Extruded thermoplastic pavement marking material shall meet the requirements of AASHTO M 249, and shall meet the requirements of 907-720.04 with the following exceptions:

- Blue - ADA thermoplastic marking material shall meet the requirements of Subsection 907-720.04.2 with the exception that the color shall be Blue – ADA, and the Contractor may use hot applied thermoplastic materials meeting the satisfaction of the Engineer.

907-720.04.2--Spray-Applied Thermoplastic Material. Spray-applied thermoplastic pavement marking material shall meet the requirements of AASHTO M 249 and shall meet the requirements of 907-720.04.

907-720.04.3--Pre-formed Thermoplastic Material. Heat-fused, pre-formed thermoplastic pavement marking material shall meet the color requirements of 907-720.02.

907-720.04.4—Acceptance Procedure. The Contractor shall furnish the Engineer with a copy of the manufacturer's certified test reports for the lot(s) of materials from which the shipment originated. The test report shall show all the test results for the material properties and characteristics as specified herein. The test report shall state that the material represented by the test results meets all the requirements of the contract. It shall be the Contractor's responsibility to furnish the manufacturer's test report to the Engineer for each shipment of material to the project.

907-720.05--Pavement Marking Tape. Pavement marking tape shall be listed on the Department's Approved Lists.

907-720.05.1—Cold Plastic Pavement Markings (Permanent Pavement Marking Tape). Pavement marking tape for use in roadway applications shall be designated on the Department's Approved Lists as permanent.

The prefabricated markings described shall consist of white or yellow pigmented plastic films with reflective optics uniformly distributed throughout their entire cross-sectional area, and be capable of being affixed by either a pressure sensitive pre-coated adhesive or a liquid contact cement. The markings shall be provided complete in a form that will facilitate rapid application and protect the markings in shipment and storage. The manufacturer shall identify proper solvents and/or adhesives to be applied at the time of application, all equipment necessary for proper application, and recommendations for application that will assure an effective performance life.

Prefabricated legends and symbols shall conform to the applicable shapes and sizes as outlined in the current "Manual on Uniform Traffic Control Devices."

907-720.05.1.1--Specific Requirements. Unless otherwise indicated on the plans, the patterned material without adhesive shall have a minimum caliper of 0.065 inch at the thickest portion of the patterned cross-section and a minimum caliper of 0.020 inch at the thinnest portion of the cross-section. The material shall be a pliant polymer film with 50±15% of the surface are raised and presenting a near vertical face angle of 0° to 60° to traffic from any direction. The channels between the raised areas shall be substantially free of exposed optics or particles.

The size and quality of the optics will be such that performance requirements of Subsection 907-720.02 for the retroreflective pliant polymer film shall be met. The pigments shall be selected and blended to provide a marking film that is white or yellow conforming to the performance requirements of Subsection 907-720.02 through the expected life of the film.

907-720.05.1.2--Conformability and Resealing. The marking shall be capable of conforming to pavement contours, breaks, faults, etc. through the action of traffic at normal pavement temperatures.

The marking shall have resealing characteristics that allows it to be capable of fusing with itself and previously applied marking of the same composition under normal conditions of use. The marking shall be capable of use for patching worn areas of the same type in accordance with manufacturer's instructions.

907-720.05.1.3--Tensile Strength and Elongation. The material shall have a minimum tensile strength of 40 pounds per square inch of cross section when tested according to ASTM D 638. A 6-inch x 1-inch x 0.06-inch sample shall be tested at a temperature between 70°F and 80°F using a jaw speed of 12 inches per minute.

The material shall have a minimum elongation of 75% at break when tested according to ASTM D 638 using a jaw speed of 12 inches per minute.

907-720.05.1.4--Skid Resistance. The surface of the material shall provide a minimum skid resistance value of 45 BPN when tested according to ASTM E 303 except values will be taken at

downweb and at a 45-degree angle from downweb. These two values will then be averaged to find the skid resistance of the patterned surface.

907-720.05.1.5--Effective Performance Life and Warranty. When applied according to the recommendations of the manufacturer the pavement marking tape shall provide a neat and durable marking that will not flow or distort due to temperature if the pavement surface remains stable. The film shall be weather resistant and through normal traffic wear shall show no appreciable fading, lifting, or shrinkage throughout the useful life of the marking, nor shall it show significant tearing, roll back, or other signs of poor adhesion.

All manufacturer's standard warranties and guarantees on pavement marking tape, which are provided as customary trade practice, shall be delivered to the Engineer at the final inspection. All warranties and guarantees shall be made out to the Department.

907-720.05.1.6—Acceptance Procedure. The Contractor shall furnish the Engineer with a copy of the manufacturer's certified test reports for the lot(s) of materials from which the shipment originated. The test report shall show all the test results for the material properties and characteristics as specified herein. The test report shall state that the material represented by the test results meets all the requirements of the contract. It shall be the Contractor's responsibility to furnish the manufacturer's test report to the Engineer for each shipment of material to the project.

Acceptance sampling and testing will be in accordance with the Materials Division Inspection, Testing, and Certification Manual (Materials Manual). Samples of the material shall be furnished and shall be provided at no cost to the State.

907-720.05.2--Preformed Pavement Markings for Construction Zones. Preformed pavement markings for construction zones shall be designated Department's Approved Lists as temporary. Retroreflective preformed pavement markings for construction zones shall be as specified on the plans or in the contract documents.

The markings shall be provided in specified widths and shapes. Preformed words and symbols shall conform to the applicable shapes and sizes as outlined in the current "Manual on Uniform Traffic Control Devices for Streets and Highways," or as modified.

The materials shall be packaged in accordance with accepted commercial standards and when stored indoors in a cool dry place, shall be suitable for use one year after date of purchase.

907-720.05.2.1--Specific Requirements. Preformed markings shall consist of retroreflective materials on a conformable backing and shall meet the performance requirements of Subsection 907-720.02. The markings shall consist of a mixture of high-quality polymeric materials, pigments, and optics with a reflective layer of optics bonded to the top surface. The markings shall be pre-coated with a pressure sensitive adhesive capable of adhering to pavement in accordance with the manufacturer's instructions without the use of heat, solvents, or other additional adhesives. The markings and/or adhesive shall not require any curing time after application. A coated non-metallic medium shall be incorporated with the pressure sensitive adhesive to facilitate removal.

907-720.05.2.2—Acceptance Procedure. The Contractor shall furnish the Engineer with a copy of the manufacturer's certified test reports for the lot(s) of materials from which the shipment originated. The test report shall show all the test results for the material properties and characteristics as specified herein. The test report shall state that the material represented by the test results meets all the requirements of the contract. It shall be the Contractor's responsibility to furnish the manufacturer's test report to the Engineer for each shipment of material to the project.

907-720.06--Raised Pavement Markers. Pavement markers shall be listed on the Department's Approved Lists and shall conform to ASTM D 4280.

907-720.06.1--Packaging. Shipments shall be made in containers acceptable to common carriers and packaged in such a manner as to ensure delivery in perfect condition. All damaged shipments shall be replaced by the Contractor. Each package shall be clearly marked as to the name of the manufacturer, type, quantity enclosed, lot number, and date of manufacture.

907-720.06.2--Non-Reflective Pavement Markers. Non-reflective pavement markers are occasionally referred to as "jiggle markers". Non-reflective markers consisting of a heat-fired, vitreous, ceramic base, and a heat-fired, opaque, glazed surface are permitted for use; the bottom of the marker shall not be glazed. Ceramic markers shall be produced from any suitable combination of intimately mixed clays, shales, talcs, flints, feldspars, or other inorganic material. Ceramic markers shall be thoroughly and evenly matured, and all non-reflective pavement markers shall be free from defects which affect appearance or serviceability.

Ceramic non-reflective markers shall conform to the following finish and testing requirements in Table 2 below.

Table 2

Ceramic Non-Reflective Marker Requirements	
Glaze Thickness	0.005 inch, minimum
Mohs Hardness	6, minimum
Autoclave	Glaze shall not spall, craze, or peel.
Compressive Strength	750 psi, minimum
Water Absorption	2.0%, maximum

907-720.06.3—Acceptance Procedure. The Contractor shall furnish the Engineer with a copy of the manufacturer's certified test reports for the lot(s) of materials from which the shipment originated. The test report shall show all the test results for the material properties and characteristics as specified herein. The test report shall state that the material represented by the test results meets all the requirements of the contract. It shall be the Contractor's responsibility to furnish the manufacturer's test report to the Engineer for each shipment of material to the project.

907-720.07--Adhesive for Pavement Markers. The adhesive shall be listed on the Department's Approved Lists and shall be an asphaltic material suitable for bonding pavement markers to surfaces when the road surface and marker temperatures are in the range of 50°F to 160°F. The composition of the adhesive must be such that its properties will not deteriorate when heated to and applied at temperatures up to 425°F. Samples may be submitted in the form of an adhesive

testing package from each batch or material obtained from a package shipped to the project.

907-720.07.1--Packaging and Labeling. The adhesive shall be packaged in self-releasing cardboard containers that will stack properly. The label shall show the manufacturer, quantity, and lot or batch number. "Adhesive for Pavement Markers" or "Adhesive for Traffic Markers" shall be printed in bold lettering on the label.

907-720.07.2--Bituminous Adhesive. The asphaltic adhesive material shall be flexible type.

907-720.07.2.1--Flexible Bituminous Adhesive. Flexible bituminous adhesive shall be designated on the Department's Approved Lists as flexible and shall comply with requirements of Table 3 below.

Table 3

Flexible Bituminous Adhesive Properties			
	Min	Max	Test Method
Penetration @ 77°F	-	25	ASTM D 5
Softening Point, °F	200	-	ASTM D 36
Brookfield Viscosity @ 400°F, cp.	-	10,000	ASTM D 3236
Ductility @ 77°F, 5 cm/min	15	-	ASTM D 113
Ductility @ 39.2°F, 1 cm/min	5	-	ASTM D 113
Asphalt Compatibility	Pass		ASTM D 5329
Flexibility @ 20°F	Pass		Per Subsection

907-720.07.3—Acceptance Procedure. The Contractor shall furnish the Engineer with a copy of the manufacturer's certified test reports for the lot(s) of materials from which the shipment originated. The test report shall show all the test results for the material properties and characteristics as specified herein. The test report shall state that the material represented by the test results meets all the requirements of the contract. It shall be the Contractor's responsibility to furnish the manufacturer's test report to the Engineer for each shipment of material to the project.

Acceptance sampling and testing will be in accordance with the Materials Division Inspection, Testing, and Certification Manual (Materials Manual). Samples of the material shall be furnished and shall be provided at no cost to the State.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-721-4 **CODE: (IS)**

DATE: **04/19/2022**

SUBJECT: **Materials for Signing**

Section 721, Materials for Signing, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

907-721.06--Reflective Sheeting.

907-721.06.2--Performance Requirements. Delete Table 4 and Table 5 in Subsection 721.06.2 on pages 860 & 861, and substitute the following.

MINIMUM COEFFICIENTS OF RETROREFLECTION
Candela per foot candle per square foot (cd/fc/ft^2)
Per ASTM Designation D4956

TABLE 4
Type IX Sheeting

Observation Angle	Entrance Angle	White	Yellow	Green	Red	Blue	Fluorescent Yellow/Green	Fluorescent Yellow	Fluorescent Orange
0.2°	-4.0°	380	285	38	76	17	300	230	115
0.2°	+30.0°	215	162	22	43	10	170	130	65
0.5°	-4.0°	240	180	24	48	11	190	145	72
0.5°	+30.0°	135	100	14	27	6.0	110	81	41
1.0°	-4.0°	80	60	8.0	16	3.6	64	48	24
1.0°	+30.0°	45	34	4.5	9.0	2.0	36	27	14

TABLE 5
Type XI Sheeting

Observation Angle	Entrance Angle	White	Yellow	Green	Red	Blue	Brown	Fluorescent Yellow/Green	Fluorescent Yellow	Fluorescent Orange
0.2°	-4.0°	580	435	58	87	26	17	460	350	175
0.2°	+30.0°	220	165	22	33	10	7.0	180	130	66
0.5°	-4.0°	420	315	42	63	19	13	340	250	125
0.5°	+30.0°	150	110	15	23	7.0	5.0	120	90	45
1.0°	-4.0°	120	90	12	18	5.0	4.0	96	72	36
1.0°	+30.0°	45	34	5.0	7.0	2.0	1.0	36	27	14

After Subsection 721.10 on page 864, add the following.

907-721.11--Digital Applied Printing. The following addresses the requirements for digitally printed finished retroreflective traffic control signs on flat sheet aluminum and digitally printed traffic sign faces intended to be applied to a sign substrate.

907-721.11.1--Digitally Printed Ink Systems. Traffic signs must be produced using components, and processes that comply with the retroreflective sheeting manufacturer's recommendations.

Digital printed ink systems used to print traffic signs must meet and comply with daytime and nighttime chromaticity (color standards) as recognized in ASTM D4956 "Standard Specification for Retroreflective Sheeting for Traffic Control."

Digital printed ink systems must meet 70% of the initial retroreflectivity specifications of each respective reflective film color as found in ASTM D4956 "Standard Specification for Retroreflective Sheeting for Traffic Control."

Prior to fabrication and preferably at the preconstruction meeting, the Contractor shall advise the Project Engineer in writing as to which signs on the project will be digitally printed and which ones will be screen printed. The Contractor shall submit to the Project Engineer certifications for all digitally printed signs, which will be forwarded to the State Traffic Engineer for review.

907-721.11.2--Protective Overlay Film. Permanent traffic signs printed with digital ink systems will be fabricated with a full sign protective overlay film designed to provide a smooth surface needed for retroreflectivity, and to protect the sign from fading and UV degradation. The overlaminate shall comply with the retroreflective sheeting manufacturer's recommendations to ensure proper adhesion and transparency and will also meet the reflective film durability as identified in Table 1.

Table 1
Retroreflective Film Minimum Durability Requirements

ASTM D4956 Type	Full Sign Replacement Term (years)	Sheeting Replacement Term (years)
IV	7	10
VIII	7	10
IX	7	12
XI	7	12

Temporary signs used in work zones printed with black ink only will not require a protective overlay film as long as the finished sign is warranted for a minimum outdoor durability of three years by the sheeting manufacturer.

907-721.11.3--Inspection. During fabrication, the Contractor shall provide sufficient testing and quality control throughout fabrication to insure good workmanship. Once the material has been received, it may be subject to random testing to ensure compliance with all requirements. If any test samples do not conform to the requirements, the entire order may be returned at the vendor's expense.

907-721.11.4--Traffic Sign Performance Warranty Provisions. Based on the ASTM Type of sheeting specified, traffic control signs shall be warranted for the duration shown in Table 1. The Contractor shall supply a copy of the warranty document with complete details of terms and conditions upon request of the Department.

907-721.11.5--Certified Digital Sign Fabricator. Sign fabricators using digital imaging methods to produce regulated traffic signs must be certified by the reflective sheeting manufacturer whose materials are used to produce the delivered signs.

Certified sign fabricators must undergo an audit process by the sheeting manufacturer to ensure they have the proper equipment, manufacturing capabilities, manufacturing application processes and the materials required to fulfill the sheeting manufacturer's warranty obligations. Sign fabricators must recertify annually with reflective sheeting manufacturers or utilize a 3rd party certifier approved by the reflective sheeting manufacturer.

The Contractor shall submit proof of Sign Fabricator Certification as issued by the retroreflective sign sheeting manufacturer to the Project Engineer upon delivery of the signs, or with the Shop Drawings.

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION NO. 907-824-4 **CODE: (SP)**

DATE: **09/09/2025**

SUBJECT: **Routine Bridge Repair**

Section 907-824, Routine Bridge Repair, is hereby added to and made a part of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction as follows.

SECTION 907-824 – ROUTINE BRIDGE REPAIR

907-824.01--Description. This work shall consist of constructing and installing routine bridge repair items including General Epoxy Repair, Bi-directional or Uni-directional Fiber Reinforced Polymer (FRP) Wrap, Cap Cleaning, Bearing Replacements, Epoxy Injection, and Encapsulated Field Painting in accordance with the details on the plans, and the requirements set out herein.

Minor changes in detail of design or construction procedure may be authorized by the Director of Structures, State Bridge Engineer provided such changes will not be cause for contract price adjustment.

It shall be the responsibility of the Contractor to protect the existing structure from damage which might occur during construction. The Contractor shall replace or repair, as directed by the Engineer, any structures damaged by the Contractor during the life of the contract. No payment will be made for replacement or repair of damaged items.

All details are based on the dimensions shown on the original plans for the existing structure. The Contractor shall be responsible for adjusting the elements of the new construction to ensure a proper fit with the existing structure. The Contractor shall verify all dimensions of the existing structure prior to beginning work.

During construction, care shall be exercised to ensure that no debris falls into the crossing below the structure. All debris, including any material that has accumulated on the bridge deck or caps, shall become the property of the Contractor and shall be removed from the construction site and disposed of properly.

For additional information and details, see work related items below and on the standard drawings. At the Contractor's request, Bridge Division will provide a complete set of As-Built plans for the existing bridge.

907-824.02--Materials.

907-824.02.1--General Epoxy Repair. Materials for general epoxy repair shall be as follows or a material approved by the Director of Structures, State Bridge Engineer.

Epoxy Resin. Resin shall be selected from the MDOT Approved Products List and meet the requirements of ASTM C881, Type I, Grade 2, Class C.

Silica Sand. The materials shall be bagged general purpose cleaning sand.

Epoxy Mortar Mix. The epoxy mortar mix shall consist of part liquid epoxy and part clean dry sand mixed in the ratio recommended by the Manufacturer.

907-824.02.2--FRP Wrap. FRP wrap shall be one of the following products, or an approved equal, and shall be applied according to the Manufacturer's recommendations:

- "FRP Wrap" as manufactured by Fyfe Co. LLC, www.aegion.com/about/our-brands/fyfe
- "FRP Wrap" as manufactured by BASF Building Systems LLC, www.master-builders-solutions.basf.us
- "FRP Wrap" as manufactured by Sikawrap Inc. www.usa.sika.com
- "FRP Wrap" as manufactured by MAPEI Corp., www.mapei.com/us/en-us/

907-824.03--Construction Requirements.

907-824.03.1--General Epoxy Repair. Epoxy repair under this pay item is for general concrete spall repairs, and shall be bid such that the item may be increased, decreased or eliminated as directed by the Project Engineer. All epoxy repairs shall be performed in accordance with the details shown on the Drawings and in accordance with the notes herein. Repair concrete spalled areas on the bridge as directed by the Project Engineer and the locations listed in the plans using epoxy mortar. The Contractor shall determine the depth of reinforcement prior to any saw cutting. Spalled areas where pack rust has developed around or on reinforcement shall be blasted clean prior to repairing the spalled location. All areas of the bridge repaired with epoxy mortar shall be restored to the original dimensions as shown in the information plans, unless noted otherwise.

A Representative of the epoxy manufacturer must be present for sufficient time to ensure that the Contractor is properly schooled in the use of the epoxy material.

Prior to placement of the mortar mix, the prepared surface shall be lightly primed with neat epoxy.

Acetone alcohol may be used to clean and lubricate trowels.

Curing time shall be in accordance with the Manufacturer's recommendations.

907-824.03.2--FRP Wrap. After all spalled locations on the bent caps, beams or piling are repaired, the repair locations on all bent caps shall be wrapped with FRP wrap in accordance with the notes below and the drawings.

FRP wrap shall be applied to bent caps, beams or piling as designated in the plans. FRP wrap shall be either bi-directional or uni-directional.

The Contractor shall furnish all submittals indicating the materials, tools, equipment, transportation, necessary storage, labor, installation plan and supervision required for the application of the composite or polymer system to the Director of Structures, State Bridge Engineer through the Project Engineer prior to construction. Products shall be stored according the manufacturer's requirements and shall avoid contact with moisture, dust and chemical exposure. All FRP composite systems shall be proprietary systems consisting of all associated fiber reinforcement and polymer adhesives/resins. FRP composites consisting of fiber reinforcement and polymers provided by more than one manufacturer are not allowed. The FRP composite system shall utilize carbon fiber reinforcement as the primary fiber material (primary structural component). The FRP system shall be top coated with a coating approved by the FRP system supplier. The coating color shall be selected by the Project Engineer.

FRP wraps shall not be installed when the ambient temperature is below 40°F or above 130°F. In cold conditions, auxiliary heat may be applied to raise the ambient temperature to a suitable level. Clean heat sources shall be utilized for this purpose (e.g., electric or propane) that do not contaminate the substrate with carbonation.

FRP wraps shall not be installed when surface moisture is present on the substrate or when rainfall or condensation is anticipated in the work areas. If water leakage exists through cracks or concrete joints, water flow shall be stopped prior to FRP installation. Resins (including primers and fillers) shall be mixed according to the FRP system manufacturer's installation instructions. All resin components shall be at a proper temperature and mixed in the manufacturer's prescribed mix ratio until there is a uniform and complete mixing of components.

Resin components are often contrasting colors, so full mixing is achieved when color streaks are eliminated. Resins should be mixed for the Manufacturer's prescribed mixing time and visually inspected for uniformity of color. A representative of the FRP wrap manufacturer must be present for sufficient time to assure that the Contractor is properly schooled in the installation of FRP wrap. Prior to installation of FRP wraps, the Contractor shall repair concrete spall areas in accordance with general epoxy repair notes herein and the details in the plans. The fibrous reinforcement system shall have a minimum tensile force as shown in the plan details. The direction of the fiber wrap shall be in the direction shown on the Contract Plans.

In addition to the Manufacturer's requirements, the Contractor shall ensure the structural and durability of the reinforced fiber wrap system by meeting the following acceptance guidelines:

Small delaminations, less than two inches (2") each, are permissible as long as the delaminated area is less than 5% of the total laminate area and there are no more than 10 such delamination per 10 feet.

Large delaminations, greater than 25 inches, can affect the performance of the installed system and shall be repaired by selectively cutting away the affected sheet and applying an overlapping sheet patch of equivalent piles. Delaminations less than 25 inches may be repaired by ply replacement.

The Contractor shall submit an FRP repair procedure to the Project Engineer for review and approval by the Director of Structures, State Bridge Engineer. This must be performed prior to repairing and delaminated areas.

907-824.03.3--Cap Cleaning. The caps at every bent shall be cleaned to the satisfaction of the Project Engineer after all other work has been done. All large debris shall be removed by hand while other debris, including but not limited to dirt and rust, shall be removed by pressure washing the bent caps. The pressure washer shall be able to maintain 3,500 psi of pressure. Prior to construction, the Contractor shall submit a proposed containment plan to the Project Engineer for approval by the Director of Structures, State Bridge Engineer.

907-824.03.4--Bearing Replacements. All bearings should be removed and replaced according to Bearing Assembly Details. All structural steel shall conform to ASTM A709, Grade 50. All steel shall be new. Extreme care shall be exercised in removing the existing bearing plates that are welded to the anchor plates embedded in the prestressed beams. Existing anchor bolts shall be ground to ¼" below the concrete surface and grouted with epoxy mortar.

The bottom of the existing anchor plates shall be finished smooth to accommodate the new steel plates and painted with approved encapsulating paint. All pack rust and scale within the designated areas shall be removed by using small hand tools, mechanical process, or needle gun. All areas required to be painted containing grease films after the initial cleaning shall be cleaned with a biodegradable solvent. All debris removed from the existing structure shall become property of the Contractor and shall be disposed of properly. The Contractor shall provide technical data for the proposed encapsulating paint to be used on this project to the Project Engineer for approval by the Director of Structures, State Bridge Engineer. New paint shall be applied by hand, with either a brush or roller.

The new steel plates shall be cleaned and then painted with one shop coat of inorganic zinc, one field intermediate coat of acrylic latex, and one field top coat of acrylic latex per Section 814 of the Standard Specifications. Painting of new steel plates and existing anchor plates shall not be measured for separate pay and all costs shall be included in the price bid for Bearing Replacement.

Prior to any construction or fabrication, the Contractor shall comply with the submittal requirements listed in the bearing replacement details. The Contractor shall be responsible for adjusting the elements of the new construction to ensure a proper fit with the existing structure.

The Contractor shall provide adequate bracing and jacking arrangements as required to replace the existing bearings. The beam end shall only be raised to ¼" from its original position. Traffic shall be maintained on the bridge during the duration of the repair.

The Contractor shall employ the service of a Mississippi Registered Professional Engineer who is knowledgeable in the field of Bridge Design. A complete set of bracing and jacking arrangement plans along with design calculations shall be submitted to the Director of Structures, State Bridge Engineer through the Project Engineer for review prior to construction and shall bear the design Engineer's seal.

Jacks shall be coupled to a common manifold. Jacking point shall be under the bottom flange of the beam at the bent and no jacking points will be allowed under any diaphragm or bay. After the beam is raised into position, temporary blocking shall be provided to secure the beam in this position while work is being performed. Temporary blocking points shall be under the bottom flange of the beam at the bent and no temporary blocking will be allowed under any diaphragm or bay.

Any damage to the bridge resulting from uneven or improper jacking shall be repaired by the Contractor at no additional cost to the State.

907-824.03.5--Epoxy Injection. All cracks greater than 1/32" shall be injected with an approved epoxy resin adhesive of the gel type. Prior to injecting any cracks, the crack shall be cleaned with a high velocity filtered air jet.

A representative of the epoxy manufacturer shall be present for sufficient time to ensure that the Contractor is properly schooled in the use of the epoxy material. Epoxy resin adhesive shall be installed in strict accordance with the manufacturer recommendations. Curing time shall be in accordance with manufacturer's recommendations. After epoxy injection is complete, all injection ports shall be removed.

907-824.03.6--Encapsulating Field Painting. The Contractor should be aware that the existing paint on the steel structure may contain lead.

Prior to construction, the Contractor shall submit a Temporary Containment Plan for the removal of the existing paint and rust from the designated repair areas to the Project Engineer for approval by the Director of Structures, State Bridge Engineer. Also, the Contractor shall submit a Temporary Containment Plan for painting the designated repair areas.

All pack rust and scale within the designated areas shall be removed by using small hand tools, mechanical process, or needle gun. All areas required to be painted containing grease films after the initial cleaning shall be cleaned with a biodegradable solvent. Existing paint shall be roughened to ensure the new paint will adhere to the existing painted surface. All debris and paint removed from the existing structure shall become the property of the Contractor and shall be disposed of properly.

All exposed steel surfaces in the repair areas shall be painted with an encapsulating paint designed to encapsulate lead-based paints, and applied according to the manufacturer's recommendations. This will include but is not limited to: existing bearings, beams, and diaphragm assemblies, etc.

The Contractor shall provide technical data for the proposed encapsulating paint to be used on this project to the Project Engineer for approval by the Director of Structures, State Bridge Engineer.

New paint shall be applied by hand with brush or roller.

907-824.04--Method of Measurement. Epoxy Repair, completed in accordance with the plans and specifications, will be measured per square foot. All items of work related to epoxy repair shall be included in the square foot unit price.

FRP Wrap, Bi-directional and Uni-directional, completed in accordance with the plans and specifications, will be measured per linear foot or square foot.

Cap Cleaning, completed in accordance with the plans and specifications, will be measured per each.

Bearing Replacements, completed in accordance with the plans and specifications, will be measured per each.

Epoxy injection, complete in accordance with the plans and specifications, will be measured by the linear foot.

Encapsulating Field Painting, complete in accordance with the plans and specifications, will be measured by the square foot.

907-824.05--Basis of Payment. Epoxy Repair, measured as prescribed above, will be paid for at the contract unit price per square foot, which price shall be full compensation for materials, labor, equipment, and incidentals necessary to complete the work.

FRP Wrap, Bi-directional and Uni-directional, measured as prescribed above, will be paid for at the contract unit price per linear foot or square foot, which price shall be full compensation for all labor, materials, surface preparation, and incidentals associated with the installation of FRP wraps, including epoxy mortar repairs, necessary to complete the work.

Cap Cleaning, measured as prescribed above, will be paid for at the contract unit price per each, which price shall be full compensation for all materials, labor, equipment and incidentals necessary to complete the work.

Bearing Replacements, measured as prescribed above, will be paid for at the contract unit price per each, which price shall be full compensation for all materials, labor, equipment and incidentals necessary to complete the work.

Epoxy Injection, measured as prescribed above, will be paid for at the contract unit price per linear foot, which price shall be full compensation for all materials, labor, equipment and incidentals necessary to complete the work.

Encapsulating Field Painting, measured as prescribed above, will be paid for at the contract unit price per square foot, which price shall be full compensation for all materials, labor, equipment, cleaning, and incidentals necessary to complete the work.

Payment will made under:

907-824-A:	General Epoxy Repair	- per square foot
907-824-B:	FRP Wrap, *	- per linear foot or square foot
907-824-C:	Cap Cleaning	- per each
907-824-D:	Bearing Replacements **	- per each
907-824-E:	Epoxy Injection	- per linear foot
907-824-F:	Encapsulating Field Painting	- per square foot

* Indicate Bi-directional, Uni-directional, etc.

** Type of Bearing (Prestressed Concrete Girder, Concrete Box Girder or Steel Girder) may be specified.

S E C T I O N 9 0 5 - P R O P O S A L

Date _____

Mississippi Transportation Commission
Jackson, Mississippi

Sirs: The following proposal is made on behalf of _____
_____ of _____
_____
for constructing the following designated project(s) within the time(s) hereinafter specified.

The plans are composed of drawings and blue prints on file in the offices of the Mississippi Department of Transportation, Jackson, Mississippi.

The Specifications are the current Standard Specifications of the Mississippi Department of Transportation approved by the Federal Highway Administration, except where superseded or amended by the plans, Special Provisions and Notice(s) to Bidders attached hereto and made a part thereof.

I (We) certify that I (we) possess a copy of said Standard and any Supplemental Specifications.

Evidence of my (our) authority to submit the Proposal is hereby furnished. The proposal is made without collusion on the part of any person, firm or corporation. I (We) certify that I (we) have carefully examined the Plans, the Specifications, including the Special Provisions and Notice(s) to Bidders, herein, and have personally examined the site of the work. On the basis of the Specifications, Special Provisions, Notice(s) to Bidders, and Plans, I (we) propose to furnish all necessary machinery, tools, apparatus and other means of construction and do all the work and furnish all the materials in the manner specified. I (We) understand that the quantities mentioned herein are approximate only and are subject to either increase or decrease, and hereby propose to perform any increased or decreased quantities of work at the unit prices bid, in accordance with the above.

I (We) acknowledge that this proposal will be found irregular and/or non-responsive unless a certified check, cashier's check, or Proposal Guaranty Bond in the amount as required in the Advertisement (or, by law) is submitted electronically with the proposal or is delivered to the Contract Administration Engineer prior to the bid opening time specified in the advertisement.

INSTRUCTION TO BIDDERS: Alternate and Optional Items on Bid Schedule.

1. Two or more items entered opposite a single unit quantity WITHOUT DEFINITE DESIGNATION AS "ALTERNATE ITEMS" are considered as "OPTIONAL ITEMS". Bidders may or may not indicate on bids the Optional Item proposed to be furnished or performed WITHOUT PREJUDICE IN REGARD TO IRREGULARITY OF BIDS.
2. Items classified on the bid schedule as "ALTERNATE ITEMS" and/or "ALTERNATE TYPES OF CONSTRUCTION" must be preselected and indicated on bids. However, "Alternate Types of Construction" may include Optional Items to be treated as set out in Paragraph 1, above.
3. Optional items not preselected and indicated on the bid schedule MUST be designated in accordance with Subsection 102.06 prior to or at the time of execution of the contract.
4. Optional and Alternate items designated must be used throughout the project.

I (We) further propose to perform all "force account or extra work" that may be required of me (us) on the basis provided in the Specifications and to give such work my (our) personal attention in order to see that it is economically performed.

I (We) further propose to execute the attached contract agreement (Section 902) as soon as the work is awarded to me (us), and to begin and complete the work within the time limit(s) provided for in the Specifications and Advertisement. I (We) also propose to execute the attached contract bond (Section 903) in an amount not less than one hundred (100) percent of the total of my (our) part, but also to guarantee the excellence of both workmanship and materials until the work is finally accepted.

I (We) shall submit electronically with our proposal or deliver prior to the bid opening time a certified check, cashier's check or bid bond for **five percent (5%) of total bid** and hereby agree that in case of my (our) failure to execute the contract and furnish bond within Ten (10) days after notice of award, the amount of this check (bid bond) will be forfeited to the State of Mississippi as liquidated damages arising out of my (our) failure to execute the contract as proposed. It is understood that in case I am (we are) not awarded the work, the check will be returned as provided in the Specifications.

For Informational Purposes Only

SECTION 905 -- PROPOSAL (CONTINUED)

I (We) hereby certify by digital signature and electronic submission via Bid Express of the Section 905 proposal below, that all certifications, disclosures and affidavits incorporated herein are deemed to be duly executed in the aggregate, fully enforceable and binding upon delivery of the bid proposal. I (We) further acknowledge that this certification shall not extend to the bid bond or alternate security which must be separately executed for the benefit of the Commission. This signature does not cure deficiencies in any required certifications, disclosures and/or affidavits. I (We) also acknowledge the right of the Commission to require full and final execution on any certification, disclosure or affidavit contained in the proposal at the Commission's election upon award. Failure to so execute at the Commission's request within the time allowed in the Standard Specifications for execution of all contract documents will result in forfeiture of the bid bond or alternate security.

Respectfully Submitted,

DATE _____

_____
Contractor

BY _____
Signature

TITLE _____

ADDRESS _____

CITY, STATE, ZIP _____

PHONE _____

FAX _____

E-MAIL _____

(To be filled in if a corporation)

Our corporation is chartered under the Laws of the State of _____ and the names, titles and business addresses of the executives are as follows:

_____
President Address

_____
Secretary Address

_____
Treasurer Address

The following is my (our) itemized proposal.

For Informational Purposes Only

Bridge Repair on SR 433 over Mound Creek (Bridge No. 11.6), known as Federal Aid Project No. STBG-0510-00(012) / 110184301 in Yazoo County.

Line no.	Item Code	Adj Code	Quantity	Units	Description[Fixed Unit Price]
			Roadway Items		
0010	619-D1001		16	Square Feet	Standard Roadside Construction Signs, Less than 10 Square Feet
0020	619-D2001		32	Square Feet	Standard Roadside Construction Signs, 10 Square Feet or More
0030	619-G4005		24	Linear Feet	Barricades, Type III, Single Faced
0040	620-A001		1	Lump Sum	Mobilization
0050	907-618-A001		1	Lump Sum	Maintenance of Traffic
0060	907-619-E3001		2	Each	Changeable Message Sign
			Bridge Items		
0070	907-824-A003		5	Square Feet	General Epoxy Repair
0080	907-824-B003		240	Square Feet	FRP Wrap, Bi-directional
0090	907-824-E001		48	Linear Feet	Epoxy Injection
0100	907-824-PP004		1	Lump Sum	Bridge Repair, Bank Reshaping, Per Plans
0110	907-824-PP004		1	Lump Sum	Bridge Repair, Removal of Concrete Debris

For Informational Purposes Only

CONDITIONS FOR COMBINATION BID

If a bidder elects to submit a combined bid for two or more of the contracts listed for this month's letting, the bidder must complete and execute these sheets of the proposal in each of the individual proposals to constitute a combination bid. In addition to this requirement, each individual contract shall be completed, executed and submitted in the usual specified manner.

Failure to execute this Combination Bid Proposal in each of the contracts combined will be just cause for each proposal to be received and evaluated as a separate bid.

It is understood that the Mississippi Transportation Commission not only reserves the right to reject any and all proposals, but also the right to award contracts upon the basis of lowest separate bids or combination bids most advantageous to the State.

It is further understood and agreed that the Combination Bid Proposal is for comparison of bids only and that each contract shall operate in every respect as a separate contract in accordance with its proposal and contract documents.

I (We) agree to complete each contract on or before its specified completion date.

* * * *

SECTION 905 - COMBINATION BID PROPOSAL (Continued)

Project Number	Pay Item Number	Unit	Unit Price Reduction	Total Item Reduction	Total Contract Reduction
1. _____	_____	_____	_____	_____	
2. _____	_____	_____	_____	_____	
3. _____	_____	_____	_____	_____	
4. _____	_____	_____	_____	_____	
5. _____	_____	_____	_____	_____	
6. _____	_____	_____	_____	_____	
7. _____	_____	_____	_____	_____	
8. _____	_____	_____	_____	_____	

For Informational Purposes Only

Project Number	Pay Item Number	Unit	Unit Price Reduction	Total Item Reduction	Total Contract Reduction
9. _____	_____ _____	_____ _____	_____ _____	_____ _____	
10. _____	_____ _____	_____ _____	_____ _____	_____ _____	

(c) If Combination C has been selected, then initial and complete ONE of the following.

_____ I (We) desire to be awarded work not to exceed a total monetary value of $ _____.

_____ I (We) desire to be awarded work not to exceed _____ number of contracts.

For Informational Purposes Only

Certification with regard to the Performance of Previous Contracts or Subcontracts subject to the Equal Opportunity Clause and the filing of Required Reports

The Bidder hereby certifies that he has ___, has not ___, participated in a previous contract or subcontract subject to the Equal Opportunity Clause, as required by Executive Orders 10925, or 11114, and that he has ___, has not ___, filed with the Joint Reporting Committee, the Director of the Office of Federal Contract Compliance, a Federal Government contracting or administering agency, or the former President's Committee on Equal Employment Opportunity, all reports due under the applicable filing requirements.

_____
(COMPANY)

DATE: _____

NOTE: The above certification is required by the Equal Employment Opportunity Regulations of the Secretary of Labor (41 CFR 60-1.7 (b) (1)), and must be submitted by bidders and proposed subcontractors only in connection with contracts and subcontracts which are subject to the Equal Opportunity Clause. Contracts and Subcontracts which are exempt from the Equal Opportunity Clause are set forth in 41 CFR 60-1.5. (Generally only contracts or subcontracts of $10,000 or under are exempt.)

Currently, Standard Form 100 (EE0-1) is the only report required by the Executive Orders or their implementing regulations.

Proposed prime Contractors and Subcontractors who have participated in a previous contract or subcontract subject to the Executive orders and have not filed the required reports should note that 41 CFR 60-1.7 (b) (1) prevents the award of contracts and subcontracts unless such Contractors submit a report covering the delinquent period or such other period specified by the Federal Highway Administration or by the Director, Office of Federal Contract Compliance, U. S. Department of Labor.

For Informational Purposes Only

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

CERTIFICATION

I,_____,
(Name of person signing bid)

individually, and in my capacity as_____ of
(Title of person signing bid)

_____do hereby certify under
(Name of Firm, partnership, or Corporation)

penalty of perjury under the laws of the United States and the State of Mississippi that_____

_____, Bidder
(Name of Firm, Partnership, or Corporation)

on Project No. **STBG-0510-00(012)/ 110184301000**

in **Yazoo** County(ies), Mississippi, has not either

directly or indirectly entered into any agreement, participated in any collusion; or otherwise taken any action in restraint of free competitive bidding in connection with this contract; nor have any of its corporate officers or principal owners.

Except as noted hereafter, it is further certified that said legal entity and its corporate officers, principal owners, managers, auditors and others in a position of administering federal funds:

a) Are not presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from covered transactions by any Federal department or agency;

b) Have not within a three-year period preceding this proposal been convicted of or had a civil judgment rendered against them for commission of fraud or a criminal offense in connection with obtaining, attempting to obtain, or performing a public (Federal, State or local) transaction or contract under a public transaction; violation of Federal or State antitrust statutes or commission of embezzlement, theft, forgery, bribery, falsification or destruction of records, making false statements, or receiving stolen property;

c) Are not presently indicted for or otherwise criminally or civilly charged by a governmental entity (Federal, State or local) with commission of any of the offenses enumerated in (b) above; and

d) Have not within a three-year period preceding this application/ proposal had one or more public transactions (Federal, State or local) terminated for cause or default.

Do exceptions exist and are made a part thereof? Yes / No

Any exceptions shall address to whom it applies, initiating agency and dates of such action.

For Informational Purposes Only

Note: Exceptions will not necessarily result in denial of award but will be considered in determining bidder responsibility. Providing false information may result in criminal prosecution or administrative sanctions.

The bidder further certifies that the certification requirements contained in Section XI of Form FHWA 1273, will be or have been included in all subcontracts, material supply agreements, purchase orders, etc. except those procurement contracts for goods or services that are expected to be less than the Federal procurement small purchase threshold fixed at 10 U.S.C. 2304(g) and 41 U.S.C. 253(g) (currently $25,000) which are excluded from the certification requirements.

The bidder further certifies, to the best of his or her knowledge and belief, that:

1) No Federal appropriated funds have been paid or will be paid to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with the awarding of any Federal contract, the making of any Federal grant, the making of any Federal loan, the entering into of any cooperative agreement, and the extension, continuation, renewal, amendment, or modification of any Federal contract, grant, loan, or cooperative agreement.

2) If any funds other than Federal appropriated funds have been paid or will be paid to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with this contract, Standard Form-LLL, Disclosure Form to Report Lobbying, in accordance with its instructions will be completed and submitted.

The certification contained in (1) and (2) above is a material representation of fact upon which reliance is placed and a prerequisite imposed by Section 1352, Title 31, U.S. Code prior to entering into this contract. Failure to comply shall be subject to a civil penalty of not less than $10,000 and not more than $100,000. The bidder shall include the language of the certification in all subcontracts exceeding $100,000 and all subcontractors shall certify and disclose accordingly.

All of the foregoing is true and correct.

Executed on _____ _____

Signature

(01/2016 F)

For Information Purposes Only

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SAM.GOV Registration and Unique Entity ID

Bidders are advised that the Prime Contractor must register and maintain a current registration in the **System for Award Management** (http://sam.gov) at all times during the project. Upon registration, the Contractor will be assigned a SAM Unique Entity ID.

Bidders are advised that prior to the award of this contract, they MUST be registered in the System for Award Management.

I (We) acknowledge that this contract cannot be awarded if I (We) are not registered in the System for Award Management prior to the award of this contract. _____ (Yes / No)

I (We) have a SAM Unique Entity ID. _____ (Yes / No)

SAM Unique Entity ID: _____

Company Name: _____

Company e-mail address: _____

For Informational Purposes Only

SECTION 902

CONTRACT FOR _____
LOCATED IN THE COUNTY(IES) OF _____

STATE OF MISSISSIPPI
COUNTY OF HINDS

This Contract is entered into by and between the Mississippi Transportation Commission (the "Commission") and the undersigned contractor (the "Contractor"), as follows:

As consideration for this Contract, the Commission agrees to pay the Contractor the amount(s) set out in the Proposal attached hereto. Said payment will be made in the manner and at the time(s) specified in the Specifications and/or Special Provisions, if any. In exchange for said consideration, the Contractor hereby agrees to accept the prices stated in the Proposal as full compensation for the furnishing of all labor, materials and equipment, and the execution of the scope of work identified for this referenced Project as contemplated in this Contract, and as more fully outlined in the Contract Documents (the "Work"). The Contract Documents consist of the Advertisement, the Notice to Bidders, the Proposal, the Specifications, the Special Provisions, and the approved Plans, all of which are hereby made a part of this Contract and incorporated herein by reference.

The Contractor shall be responsible for all loss or damage arising out of, or in any way in connection with the Work, or from any unforeseen obstructions or difficulties that may be encountered in the prosecution of the Work, and for all risks of every description connected with the Work, with the exception of any items specifically excluded in the Contract Documents. The Contractor shall fully and faithfully complete the Work in a good and workmanlike manner, according to the Contract Documents and any Supplemental Agreements thereto.

The Contractor further agrees that the Work shall be done under the direct supervision of, and to the complete satisfaction of, the Executive Director of the Mississippi Department of Transportation, or his authorized representative(s), and, when federal funds are involved, subject to the inspection and approval of the Federal Highway Administration, or its agents, and/or the agents of any other state or federal agency whose funds are involved. Further, the Work shall be done in accordance with any applicable state and federal laws, and any such rules and regulations issued by the Commission and/or any relevant Federal Agency.

The Contractor agrees that all labor as outlined in the Contract Documents may be secured from a list furnished by the Manager of the Win Job Center nearest the project location, or any successor thereto.

It is agreed and understood that each and every provision of law and clause required by law to be inserted into this Contract shall be deemed to be inserted herein, and this Contract shall be read and enforced as though it were included herein. If through mere mistake or otherwise, any such provision is not inserted, then upon the application of either party hereto, the Contract shall be physically amended to make such insertion.

For Informational Purposes Only

The Contractor agrees that he has read each and every clause of the Contract Documents, and fully understands the meaning of same, and hereby acknowledges that he will comply with all terms, covenants and agreements therein.

Witness our signatures, this the _____ day of _____, 20___.

_____
Contractor

By: _____
Title: _____

_____
Signed and sealed in the presence of: (name and address of witness)

_____
_____

MISSISSIPPI TRANSPORTATION COMMISSION

_____
Executive Director

_____
Secretary to the Commission

Award authorized by the Mississippi Transportation Commission in session on the ____ day of _____, _____, Minute Book No._____, Page No. _____.

For Informational Purposes Only

SECTION 903
PERFORMANCE BOND

PERFORMANCE BOND FOR THE FOLLOWING CONTRACT:
Project No.: _____

For the construction of: _____

Contract date: _____ Contract Price: _____

FOR OWNER: MISSISSIPPI TRANSPORTATION COMMISSION, 401 N. WEST STREET, JACKSON, MISSISSIPPI 39201.

CONTRACTOR (full legal name, contact person, phone number and address):
_____
_____
_____
_____

SURETY (legal name, phone number, principal place of business and address ***for notice purposes***):
_____
_____
_____

Second Surety (if applicable):
_____
_____
_____

The Contractor and Surety, jointly and severally, bind themselves, their heirs, executors, administrators, successors and assigns, to the Owner for the performance of the Contract, which is incorporated herein by reference, and subject to the following terms:

1. If the Contractor fully and faithfully performs the Contract, the Surety and the Contractor shall have no obligation under this Bond.

2. The Surety's obligation under this Bond shall arise after:
   (a) the Owner first provides notice to the Contractor and the Surety that termination is imminent, pursuant to the current edition of the Mississippi Standard Specifications for Road and Bridge Construction, which is a part of the Contract; and
   (b) the Owner declares a Contractor Default, terminates the Contract, and notifies the Surety.

3. Within 20 calendar days as set forth in Section 108.08 of the current edition of the Mississippi Standard Specifications for Road and Bridge Construction, the Surety shall, after discussions with and consent from the Owner, and at the Surety's expense, elect to take one of the following actions:
   (a) Arrange for the Contractor, with the consent of the Owner, to perform and complete the Contract;
   (b) Undertake to perform and complete the Contract itself, through its agents or independent contractors;
   (c) Waive its right to perform and complete, arrange for completion, or obtain a new contractor, and after investigation, determine the amount for which it may be liable to the Owner (subject to the consent of the Owner) and as soon as practicable after the amount is determined, make payment to the Owner.

For Informational Purposes Only

4. If the Surety does not proceed, within a reasonable time frame, to enact and carry out the election made in Paragraph 3, then the Surety shall be deemed to be in default on this Bond, and the Owner shall be entitled to enforce any remedy available to it under the Contract and applicable law.

5. Subject to the commitment by the Owner to pay the Balance of the Contract Price, the Surety is obligated, without duplication, for
   (a) the responsibilities of the Contractor for correction of defective work and completion of the Contract;
   (b) additional legal, design professional and delay costs resulting from the Contractor's Default, and resulting from the actions or failure to act of the Surety under Paragraph 3; and
   (c) liquidated damages, or if no liquidated damages are specified in the Contract, actual damages caused by delayed performance or non-performance of the Contractor.

6. The Surety hereby waives notice of any change, including changes of time, to the Contract or to related subcontracts, purchase orders and other obligations.

7. The penal sum of the Bond shall be equal to the Contract Price; however, the penal sum may be increased or decreased as the result of any subsequent Supplemental Agreements and/or final contract quantities.

8. Notice to the Surety, the Owner or the Contractor shall be mailed or delivered to the address listed for notice purposes on the first page of this Bond.

CONTRACTOR AS PRINCIPAL
Company: _____

Signature: _____
Name: _____
Title: _____
Address: _____
_____

SURETY
Company: _____

Signature: _____ MS Insurance ID # _____
Name: _____
Title: _____
Address: _____
_____

SURETY (if applicable)
Company: _____

Signature: _____ MS Insurance ID # _____
Name: _____
Title: _____
Address: _____
_____

For Informational Purposes Only

SECTION 903
PAYMENT BOND

PAYMENT BOND FOR THE FOLLOWING CONTRACT:
Project No.: _____

For the construction of: _____

Contract date: _____ Contract Price: _____

FOR OWNER: MISSISSIPPI TRANSPORTATION COMMISSION, 401 N. WEST STREET, JACKSON, MISSISSIPPI 39201.

CONTRACTOR (full legal name, contact person, phone number and address):
_____
_____
_____

SURETY (legal name, phone number, principal place of business and address ***for notice purposes***):
_____
_____
_____
Second Surety (if applicable):
_____
_____
_____

The Contractor and Surety, jointly and severally, bind themselves, their heirs, executors, administrators, successors and assigns, to the Owner for payment of labor, materials and equipment furnished for use in the performance of the Contract, which is incorporated herein by reference, subject to the following terms:

1. If the Contractor promptly makes payment of all sums due to any and all subcontractors, sub-subcontractors, suppliers to the Contractor, suppliers to subcontractors and/or laborers who have performed work on the project site, and defends, indemnifies and holds harmless the Owner from claims, demands, liens or suits by any person or entity seeking payment for labor, materials or equipment furnished for use in the performance of the Contract, then the Surety and the Contractor shall have no obligation under this Bond.

2. The Owner shall provide notice to the Surety of any claims, demands, liens or suits against the Owner or the Owner's property that it receives from any person or entity ("Claimants") seeking payment for labor, materials or equipment furnished for use in the performance of the Contract.

3. Upon notice of any claims, demands, liens or suits provided by the Owner or Contractor or given to the Surety by a Claimant, the Surety shall promptly and at the Surety's expense, defend, indemnify and hold harmless the Owner against said claim, demand, lien or suit and shall take the following additional actions:
    (a) Send an answer to the Claimant, with a copy to the Owner, within sixty (60) days after receipt of the Claim, stating the amounts that are undisputed and the basis for challenging any amounts that are disputed; and
    (b) Pay or arrange for payment of any undisputed amounts.

For Informational Purposes Only

4. The Surety shall not be liable to the Owner, Claimants or others for obligations of the Contractor that are unrelated to the Contract. The Owner shall not be liable for the payment of any costs or expenses of any Claimant under this Bond and shall have no obligation under this Bond to make payments to, or give notice on behalf of, Claimants, or otherwise have any obligations to Claimants under this Bond.

5. The Surety hereby waives notice of any change, including changes of time, to the Contract or to related subcontracts, purchase orders and other obligations.

6. The penal sum of the Bond shall be equal to the Contract Price; however, the penal sum may be increased or decreased as the result of any subsequent Supplemental Agreements and/or final contract quantities.

CONTRACTOR AS PRINCIPAL
Company: _____

Signature: _____
Name: _____
Title: _____
Address: _____
_____

SURETY
Company: _____

Signature: _____ MS Insurance ID # _____
Name: _____
Title: _____
Address: _____
_____

SURETY (if applicable)
Company: _____

Signature: _____ MS Insurance ID # _____
Name: _____
Title: _____
Address: _____
_____

For Informational Purposes Only

BID BOND

KNOW ALL MEN BY THESE PRESENTS, that we_____
Contractor

_____
Address

_____
City, State ZIP

As principal, hereinafter called the Principal, and _____
Surety

a corporation duly organized under the laws of the state of _____

as Surety, hereinafter called the Surety, are held and firmly bound unto **State of Mississippi, Jackson, Mississippi**

As Obligee, hereinafter called Obligee, in the sum of **Five Per Cent (5%) of Amount Bid**

Dollars($_____)

for the payment of which sum will and truly to be made, the said Principal and said Surety, bind ourselves, our heirs, executors, administrators, successors and assigns, jointly and severally, firmly by these presents.

WHEREAS, the Principal has submitted a bid for **Bridge Repair on SR 433 over Mound Creek (Bridge No. 11.6), known as Federal Aid Project No. STBG-0510-00(012) / 110184301 in Yazoo County.**

NOW THEREFORE, the condition of this obligation is such that if the aforesaid Principal shall be awarded the contract, the said Principal will, within the time required, enter into a formal contract and give a good and sufficient bond to secure the performance of the terms and conditions of the contract, then this obligation to be void; otherwise the Principal and Surety will pay unto the Obligee the difference in money between the amount of the bid of the said Principal and the amount for which the Obligee legally contracts with another party to perform the work if the latter amount be in excess of the former, but in no event shall liability hereunder exceed the penal sum hereof.

Signed and sealed this _____day of _____, 20___

_____
(Principal) (Seal)

_____ By:_____
(Witness) (Name) (Title)

_____
(Surety) (Seal)

_____ By:_____
(Witness) (Attorney-in-Fact)

_____
(MS Agent)

_____
Mississippi Insurance ID Number

FORM CSD-612
Rev. 1 / 2015

YEAR 2026 PROGRESS SCHEDULE YEAR 2027

PROJECT NUMBER STBG-0510-00(012) / 110184301
COUNTY Yazoo

WORK PHASE NO.	DESCRIPTION	LINE NUMBERS	JAN	FEB	MAR	APRIL	MAY	JUNE	JULY	AUGUST	SEPTEMBER	OCTOBER	NOV	DEC	JAN	FEB	MAR	APRIL	MAY	JUNE	JULY	AUGUST	SEPTEMBER	OCTOBER	NOV	DEC	
1	Miscellaneous	10-60											0														46
2	Bridge Repairs	70-110														24											46
3																											
4																											
5																											
	LET:	9/22/2026																									
	NOA:	10/13/2026																									
	NTP/BCT:	11/12/2026																									
	W.D.:	46																									

MONTH	JAN	FEB	MAR	APRIL	MAY	JUNE	JULY	AUGUST	SEPTEMBER	OCTOBER	NOV	DEC	JAN	FEB	MAR	APRIL	MAY	JUNE	JULY	AUGUST	SEPTEMBER	OCTOBER	NOV	DEC	172 WORKING DAYS PER YEAR
ANTICIPATED WORKING DAYS PER MONTH	6	7	11	15	19	20	21	21	20	16	11	5	6	7	11	15	19	20	21	21	20	16	11	5	

NOTE: THE ANTICIPATED WORKING DAYS SHOWN ON THIS SCHEDULE ARE FOR INFORMATIONAL PURPOSES ONLY.
THE ACTUAL WORKING DAY TOTAL AS ASSESSED BY THE PROJECT ENGINEER ON FORM CSD-765 SHALL GOVERN.