P.E.

FED. ROAD REG. NO.	STATE	PROJECT NO.	SHEET NO.
4	MISS.		1

GENERAL INDEX

FOR DETAILED INDEX OF PLANS SEE SHEET NO. 2

DESCRIPTION	NUMBER OF SHEETS
TITLE SHEET	
DETAILED INDEX	
GENERAL NOTES	
TYPICAL SECTIONS	
QUANTITIES	
PLAN AND PROFILES	
SPECIAL DESIGN – ROADWAY ITEMS	
BRIDGE DRAWINGS	
SPECIAL DESIGN – BRIDGES	
CROSS-SECTIONS	
TOTAL SHEETS	

11-15-04

STATE OF MISSISSIPPI

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

PLAN AND PROFILE OF PROPOSED STATE HIGHWAY FED. AID PROJECT NO. STP–9629–00(001)

FMS CON 104386/301000

MS HWY. NO. 145
THROUGH BOONEVILLE
PRENTISS COUNTY

SCALES

PLAN		1 IN. = 100 FT.
PROFILE	HOR.	1 IN. = 100 FT.
	VERT.	1 IN. = 10 FT.
LAYOUT		1 IN. = FT.

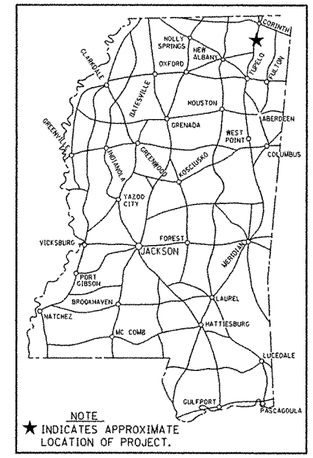

NOTE
★ INDICATES APPROXIMATE LOCATION OF PROJECT.

BRIDGE STRUCTURES REQ'D.
NONE

BOX BRIDGES REQ'D.
NONE

STA. 404+00 END OF PROJECT

STA. 246+00 BEGINNING OF PROJECT

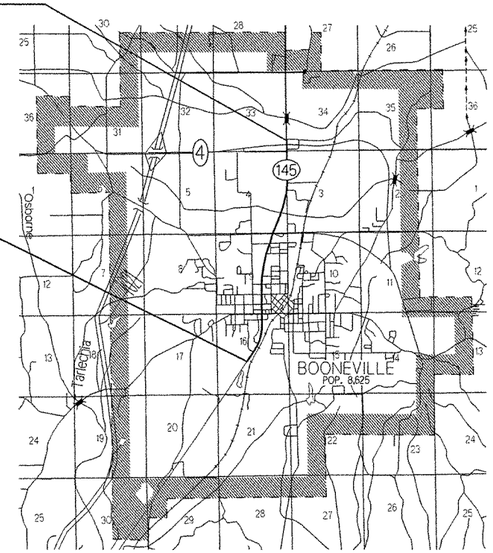

PERMITS ACQUIRED BY MDOT

WETLANDS AND WATERS PERMITS
(NECESSARY FOR ULTIMATE IMPROVEMENTS ONLY):

	WATERS	WETLANDS
NATIONWIDE #14	✓	✓
NATIONWIDE (OTHER)*	✓	✓
GENERAL*	✓	✓
INDIVIDUAL (404)*	✓	✓

* ACQUISITION OF PERMITS FOR TEMPORARY IMPACTS DURING CONSTRUCTION ARE THE RESPONSIBILITY OF THE CONTRACTOR

STORMWATER PERMIT ✓

Y	REQUIRED, CNOI SUBMITTED BY MDOT (DISTRIBUTED AREA = 5 ACRES +)(NTB 6484)
S	REQUIRED, SCNOI TO BE SUBMITTED BY CONTRACTOR (1 TO 4.99 ACRES)(NTB 6483)
N	NO STORMWATER PERMIT REQUIRED (<1 ACRE)

APPROVED BY: JMR DATE: 11/15/04

CONVENTIONAL SYMBOLS

COUNTY LINE
TOWN CORPORATION LINE
SECTION LINE
EXISTING ROAD OR TRAVELED WAY
PROPOSED ROAD OR TRAVELED WAY
RAILROAD
SURVEY LINE
BRIDGES

EQUATIONS

NONE

EXCEPTIONS

NONE

LENGTH DATA

LENGTH OF ROADWAY	15,800.00 FT.	2.992	MI.
LENGTH OF BRIDGES	NONE FT.	0.000	MI.
LENGTH OF PROJECT (NET)		2.992	MI.
LENGTH OF EXCEPTIONS	NONE FT.	0.000	MI.
LENGTH OF PROJECT (GROSS)		2.992	MI.

REVISIONS | BY | DATE

APPROVED: 11/15/04
CHIEF ENGINEER DATE

11-15-04
CHIEF ENGINEER MISSISSIPPI DEPARTMENT OF TRANSPORTATION

APPROVED:

DIVISION ADMINISTRATOR DATE

FEDERAL HIGHWAY ADMINISTRATION
DEPARTMENT OF TRANSPORTATION

ROADWAY DESIGN DIVISION C.A.D.D. SECTION
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
TITLE

STATE	PROJECT NO.
MISS.	

DESCRIPTION OF SHEET	WKG. NO.	SH. NO.
TITLE AND LAYOUT		1
DETAILED INDEX	DI-1	2
TYPICAL SECTIONS	TS-1	3
SUMMARY OF QUANTITIES	SQ-1	4
DETAIL OF CONSTRUCTION SIGNING	DCS-1	5
PAVEMENT MARKING DETAILS FOR 4 AND 5 LANE UNDIVIDED HIGHWAYS	PM-2	121
PAVEMENT MARKING LEGEND DETAILS	PM-5	124
PAVEMENT MARKING LEGEND DETAILS	PM-6	125
TRAFFIC CONTROL PLAN FOR POSTED SPEED LIMIT LESS THAN 65 MPH (4-LANE: MEDIAN LANE OR OUTSIDE LANE CLOSURE) (WORK DAY ONLY)	TCP-2	251
HIGHWAY SIGN AND BARRICADE DETAILS FOR CONSTRUCTION PROJECTS	TCP-10	259
TRAFFIC CONTROL PLAN MOBILE OPERATIONS MULTILANE ROADS AND TWO-LANE ROADS	TCP-11	260
TEMPORARY STRIPING FOR TRAFFIC CONTROL 2-LANE AND 4-LANE DIVIDED HIGHWAYS	TCP-16	265

PS & E PLANS-DATE: 11-3-2004		
FMS CON. 104386/301000		
REVISIONS		
DATE	SHEET NO.	BY

DATE	REVISION	BY

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

DETAILED INDEX

PROJECT NO. STP-9629-00(001)
COUNTY : PRENTISS

FILENAME: INDEX.DGN
DESIGN TEAM _____ CHECKED _____ DATE _____

WORKING NUMBER DI-1
SHEET NUMBER 2

ROADWAY DESIGN DIVISION
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
PLAN
11/15/2004 9:28 AM INDEX.DGN