FED. ROAD REG. NO.	STATE	PROJECT NO.	SHEET NO.
4	MISS.		1

GENERAL INDEX

FOR DETAILED INDEX OF PLANS SEE SHEET NO. 2

DESCRIPTION	NUMBER OF SHEETS
TITLE SHEET	1
DETAILED INDEX	1
GENERAL NOTES	
TYPICAL SECTIONS	
QUANTITIES	
PLAN AND PROFILES	
SPECIAL DESIGN – BUILDING ITEMS	103
BRIDGE DRAWINGS	
SPECIAL DESIGN – BRIDGES	
CROSS-SECTIONS	
TOTAL SHEETS	105

STATE OF MISSISSIPPI

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

PLANS OF PROPOSED
DISTRICT HEADQUARTERS BUILDING AT HATTIESBURG
STATE PROJECT NO. BWO–6098–18(001)

002-02-05

501427/301000

FORREST COUNTY

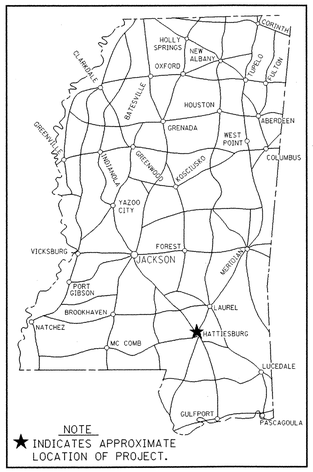

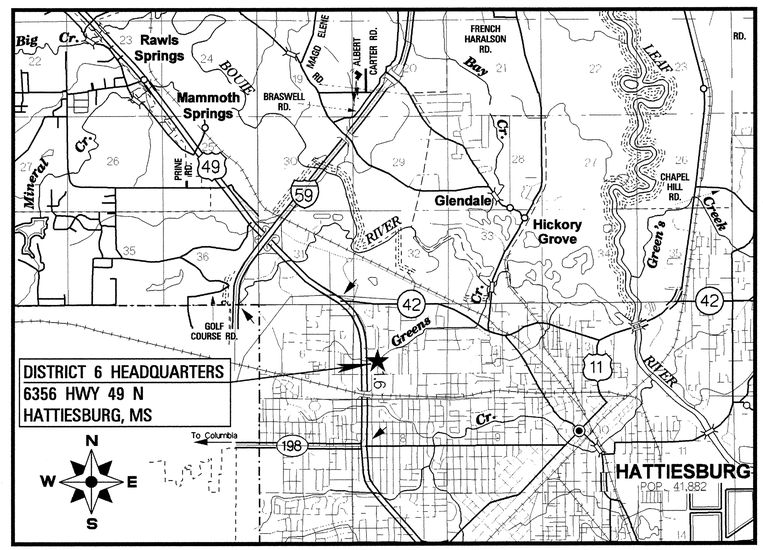

DESIGN CONTROL
_____ MPH = V (SPEED DESIGN)
ADT (____) = _____ : ADT (____) = _____
DHV = _____ : D = _____% T= _____%

PERMITS ACQUIRED BY MDOT

WETLANDS AND WATERS PERMITS (NECESSARY FOR ULTIMATE IMPROVEMENTS ONLY):

	WATERS	WETLANDS
NATIONWIDE #14	N	N
NATIONWIDE (OTHER)*	N	N
GENERAL*	N	N
INDIVIDUAL (404)*	N	N

* ACQUISITION OF PERMITS FOR TEMPORARY IMPACTS DURING CONSTRUCTION ARE THE RESPONSIBILITY OF THE CONTRACTOR

STORMWATER PERMIT	S
Y	REQUIRED, CNOI SUBMITTED BY MDOT (DISTRIBUTED AREA = 5 ACRES +)(NTB 6484)
S	REQUIRED, SCNOI TO BE SUBMITTED BY CONTRACTOR (1 TO 4.99 ACRES)(NTB 6483)
N	NO STORMWATER PERMIT REQUIRED (<1 ACRE)

APPROVED BY: CKP DATE: 2/2/05

CONVENTIONAL SYMBOLS

COUNTY LINE
TOWN CORPORATION LINE
SECTION LINE
EXISTING ROAD OR TRAVELED WAY
PROPOSED ROAD OR TRAVELED WAY
RAILROAD
SURVEY LINE
BRIDGES

REVISIONS	BY	DATE

APPROVED: Harry Lee James 2-2-05
CHIEF ENGINEER — DATE

2-2-05
EXECUTIVE DIRECTOR — DATE

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

APPROVED:

DIVISION ADMINISTRATOR — DATE

FEDERAL HIGHWAY ADMINISTRATION
DEPARTMENT OF TRANSPORTATION

STATE	PROJECT NO.
MISS.	BWO-6098-18(001)/501427

BWO-6098-18(001)/501427

DISTRICT HEADQUARTERS BUILDING

DISTRICT SIX

HATTIESBURG, MISSISSIPPI

ARCHITECTS:

CANIZARO • CAWTHON ▾ DAVIS

Architecture · Planning · Interior Design

129 South President Street Jackson Mississippi 39201 601.948.7337

LANDSCAPE ARCHITECTS

WEATHERFORD / McDADE

STRUCTURAL ENGINEERS:

SPENCER ENGINEERS

MECHANICAL ENGINEERS:

HESM&A

ELECTRICAL ENGINEERS:

HESM&A

ABBREVIATIONS:

AFF	ABOVE FINISH FLOOR
ACT	ACOUSTICAL CEILING TILE
AL	ALUMINUM
CPT	CARPET
CLG	CEILING
CT	CERAMIC TILE
CMU	CONCRETE MASONRY UNIT
CG	CORNER GUARD
CORR	CORRIDOR
DP	DEEP
DET	DETAIL
DIA	DIAMETER
DN	DOWN
E	EAST
EXIST/EX	EXISTING
E.J.	EXPANSION JOINT
FWC	FABRIC WALL COVERING
FEC	FIRE EXTINGUISHER/CABINET
FFE	FINISH FLOOR ELEVATION
GB	GRAB BAR
GWB/GYP. BD.	GYPSUM WALL BOARD
HW	HARDWARE
HM	HOLLOW METAL
HR	HOUR
LAM	LAMINATE
LTG	LIGHTING
MR	MIRROR
MISC	MISCELLANEOUS
N	NORTH
O.C.	ON CENTER
P	PAINT/PAINTED
PTD	PAPER TOWEL DISPENSER
PWD	PLYWOOD
PT	PAVER TILE
RB	RUBBER BASE
SIM	SIMILAR
SD	SOAP DISPENSER
S	SOUTH
SS	STAINLESS STEEL
STL	STEEL
THK	THICK
TBR	TO BE REMOVED
TME	TO MATCH EXISTING
TLT	TOILET
TOS	TOP OF STEEL
UNO	UNLESS NOTED OTHERWISE
VCT	VINYL COMPOSITE TILE
W/	WITH
W	WEST
WD	WOOD

SYMBOL LEGEND

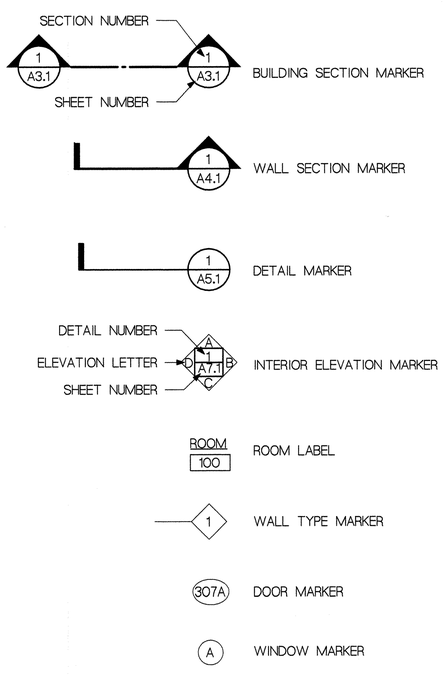

LIST OF DRAWINGS

WRK. NO.	SHT NO.	DESCRIPTION
1	1	LAYOUT SHEET
T1.1	2	TITLE
DM	3	EXISTING CONDITIONS / SITE DEMOLITION PLAN
L	4	LAYOUT PLAN
G1	5	GRADING PLAN
G2	6	GRADING PLAN (CRAWL SPACE)
SWPPP	7	STORM WATER POLLUTION PREVENTION PLAN
A1.1	8	FIRST FLOOR DEMOLITION PLAN
A2.1	9	FIRST FLOOR PLAN & REFLECTED CEILING PLAN
A2.2	10	SECOND FLOOR PLAN & REFLECTED CEILING PLAN
A2.3	11	ROOF PLAN
A3.1	12	EXTERIOR ELEVATIONS
A3.2	13	EXTERIOR ELEVATIONS
A3.3	14	BUILDING SECTION
A3.4	15	BUILDING SECTION
A3.5	16	BUILDING SECTION
A4.1	17	WALL SECTIONS
A4.2	18	WALL SECTIONS
A4.3	19	WALL SECTIONS
A4.4	20	WALL SECTIONS
A4.5	21	WALL SECTIONS
A4.6	22	WALL SECTION, ELEVATOR SECTION AND PLAN
A4.7	23	MONUMENTAL STAIR SECTION AND PLANS
A4.8	24	SCREEN WALL SECTIONS
A4.9	25	WALL SECTIONS
A4.11	26	WALL SECTIONS
A4.12	27	DETAILS
A4.13	28	DETAILS
A4.14	29	DETAILS
A4.15	30	DETAILS
A5.1	31	FINISH SCHEDULES
A5.2.1	32	FIRST FLOOR DOOR OPENING SCHEDULE
A5.2.2	33	SECOND FLOOR DOOR OPENING SCHEDULE
A5.3	34	CURTAIN WALL, HM FRAME, DOORS, LOUVER ELEV
A5.4	35	DOOR AND WINDOW DETAILS
A5.5	36	DOOR AND WINDOW DETAILS
A5.6	37	DOOR AND WINDOW DETAILS AND MISC. DETAILS
A6.1.1	38	PARTIAL FIRST FLOOR LARGE SCALE PLAN
A6.1.2	39	PARTIAL FIRST FLOOR LARGE SCALE PLAN
A6.1.3	40	PARTIAL FIRST FLOOR LARGE SCALE PLAN
A6.1.4	41	PARTIAL FIRST FLOOR LARGE SCALE PLAN
A6.2.1	42	PARTIAL SECOND FLOOR LARGE SCALE PLAN
A6.2.2	43	PARTIAL SECOND FLOOR LARGE SCALE PLAN
A6.2.3	44	PARTIAL SECOND FLOOR LARGE SCALE PLAN
A6.2.4	45	PARTIAL SECOND FLOOR LARGE SCALE PLAN
A6.6	46	INTERIOR ELEVATIONS
A6.7	47	INTERIOR ELEVATIONS
A6.8	48	INTERIOR ELEVATIONS
A6.9	49	INTERIOR ELEVATIONS
A6.11	50	INTERIOR ELEVATIONS
A6.12	51	MILLWORK DETAILS
A6.13	52	MILLWORK DETAILS
A6.14	53	MILLWORK DETAILS
A6.15	54	MILLWORK DETAILS

WRK. NO.	SHT NO.	DESCRIPTION
S1.0	55	STRUCTURAL GENERAL NOTES
S1.1	56	PART A FOUNDATION FRAMING PLAN
S1.2	57	PART B FOUNDATION FRAMING PLAN
S1.3	58	PART A FIRST FLOOR FRAMING PLAN
S1.4	59	PART B FIRST FLOOR FRAMING PLAN
S1.5	60	PART A SECOND FLOOR FRAMING PLAN
S1.6	61	PART B SECOND FLOOR FRAMING PLAN
S1.7	62	PART A ROOF SUPPORT FRAMING PLAN
S1.8	63	PART B ROOF SUPPORT FRAMING PLAN
S1.9	64	PART A ROOF FRAMING PLAN
S1.10	65	PART B ROOF FRAMING PLAN
S2.1	66	FOUNDATION DETAILS
S2.2	67	FOUNDATION DETAILS
S2.3	68	FOUNDATION DETAILS
S3.1	69	STEEL DETAILS
S3.2	70	STEEL DETAILS
S3.3	71	STEEL DETAILS
S3.4	72	STEEL DETAILS
S3.5	73	STEEL DETAILS
S3.6	74	STEEL DETAILS
S4.1	75	COLUMN SCHEDULE AND DETAILS
S4.2	76	COLUMN SCHEDULE AND DETAILS
P0.1	77	PLUMBING LEGEND, ABBREV, AND GENERAL NOTES
P1.0	78	SITE PLAN PLUMBING
P2.1	79	FIRST FLOOR PLAN PLUMBING
P2.2	80	SECOND FLOOR PLAN PLUMBING
P3.1	81	PLUMBING SCHEDULES, DETAILS, AND RISERS
M0.1	82	HVAC LEGEND, ABBREVIATIONS, AND GENERAL NOTES
M2.1	83	FIRST FLOOR PLAN HVAC
M2.2	84	AUDITORIUM FLOOR PLAN HVAC
M2.3	85	SECOND FLOOR PLAN HVAC
M3.1	86	MECHANICAL ROOM SECTION HVAC
M3.2	87	MECHANICAL ROOM SECTION HVAC
M4.1	88	HVAC DETAILS
M5.1	89	HVAC SCHEDULES
M5.2	90	HVAC SCHEDULES AND DETAILS
E0.1	91	ELECTRICAL LEGEND, ABBREV, AND GENERAL NOTES
E1.0	92	SITE PLAN ELECTRICAL
E2.1	93	FIRST FLOOR PLAN LIGHTING
E2.2	94	SECOND FLOOR PLAN LIGHTING
E2.3	95	FIRST FLOOR PLAN POWER & COMMUNICATIONS
E2.4	96	SECOND FLOOR PLAN POWER & COMMUNICATIONS
E2.5	97	AUDITORIUM PLAN ELECTRICAL
E2.6	98	FIRST FLR PLN - FIRE ALARM, SECURITY, & MECH EQUIP ELEC CONN
E2.7	99	SECOND FLR PLN - FIRE ALARM, SECURITY, & MECH EQUIP ELEC CONN
E2.8	100	CRAWL SPACE PLAN - ELECTRICAL
E3.1	101	ELECTRICAL DETAILS & FIRE ALARM RISER DIAGRAM
E3.2	102	ELECTRICAL PANEL SCHEDULES
E3.3	103	ELECTRICAL PANEL SCHEDULES
E3.4	104	ELECTRICAL PANEL SCHEDULES
E4.1	105	LIGHTING FIXTURE SCHEDULE & POWER RISER DIAGRAM

CODE INFORMATION

BUILDING CODE:
2000 INTERNATION BUILDING CODE

OCCUPANCY CLASSIFICATION:
GROUP B - BUSINESS
GROUP A3 - ASSEMBLY (AUDITORIUM)

TOTAL BUILING AREA (GROSS SQ. FT.):
16,749 SQ. FT. PER FLOOR

BUILDING HEIGHT:
2 STORIES

DISTANCE TO PROPERTY LINE:
GREATER THAN 30 FEET

TYPE CONSTRUCTION:
TYPE III, UNPROTECTED

FIRE PROTECTION:
FULLY SPRINKLERED

PS & E PLANS - DATE 02/02/05		
REVISIONS		
DATE	SHEET NO.	BY

ASU

DATE	REVISION	BY

MISSISSIPPI DEPARTMENT OF TRANSPORTATION
DISTRICT HEADQUARTERS BUILDING
AT HATTIESBURG

TITLE

BWO-6098-18(001)/501427 FORREST COUNTY

WORKING NUMBER T1.1

FILENAME:
DESIGN TEAM CHECKED DATE 01/31/2005

SHEET NUMBER 2