P.E. 103316/101000

FED. ROAD REG. NO.	STATE	PROJECT NO.	SHEET NO.
4	MISS.	STP-0010-01(093)	1

1 st O. REV.

GENERAL INDEX

FOR DETAILED INDEX OF PLANS SEE SHEET NO. 2

DESCRIPTION	NUMBER OF SHEETS
TITLE SHEET	1
DETAILED INDEX AND GENERAL NOTES	1
TYPICAL SECTIONS	
QUANTITIES	1
PLAN AND PROFILES	
SPECIAL DESIGN – SITE IMPROVEMENTS	18 △1
BRIDGE DRAWINGS	
SPECIAL DESIGN – BRIDGES	
CROSS-SECTIONS	
STANDARD DRAWINGS	10
TOTAL SHEETS	31 △1

STATE OF MISSISSIPPI

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

PLANS OF PROPOSED SITE IMPROVEMENTS TO JACKSON COUNTY WELCOME CENTER PHASE I

FEDERAL AID PROJECT NO. STP-0010-01(093)

FMS #103316/301000

1 8-13-03
RE: 1 3-24-04
RE: 1 01-14-05

I-10 WESTBOUND
JACKSON COUNTY

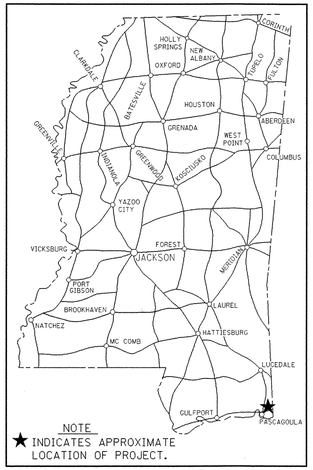

NOTE
★ INDICATES APPROXIMATE LOCATION OF PROJECT.

PROJECT LOCATION
WESTBOUND I-10, 2.4 MILES FROM MS/AL STATE LINE, BETWEEN FRANKLIN CREEK RD. AND THE ESCATAWPA RIVER

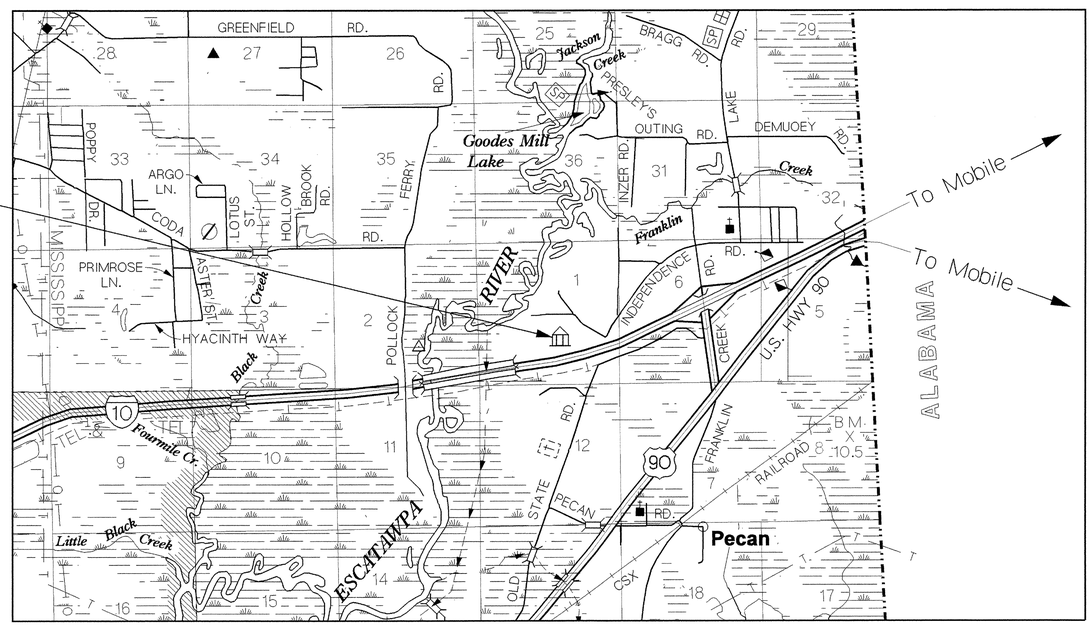

DESIGN CONTROL
_____ MPH = V (SPEED DESIGN)
ADT (____) = _____ : ADT (____) = _____
DHV = _____ : D = _____% T= _____%

PERMITS ACQUIRED BY MDOT
WETLANDS AND WATERS PERMITS (NECESSARY FOR ULTIMATE IMPROVEMENTS ONLY):

	WATERS	WETLANDS
NATIONWIDE #14	Y	N
NATIONWIDE (OTHER)*	N	N
GENERAL*	N	N
INDIVIDUAL (404)*	N	N

* ACQUISITION OF PERMITS FOR TEMPORARY IMPACTS DURING CONSTRUCTION ARE THE RESPONSIBILITY OF THE CONTRACTOR

STORMWATER PERMIT S

Y	REQUIRED, CNOI SUBMITTED BY MDOT (DISTRIBUTED AREA = 5 ACRES +)(NTB 6484)
S	REQUIRED, SCNOI TO BE SUBMITTED BY CONTRACTOR (1 TO 4.99 ACRES)(NTB 6483)
N	NO STORMWATER PERMIT REQUIRED (<1 ACRE)

APPROVED BY: [signature] DATE: 01-12-05

CONVENTIONAL SYMBOLS

COUNTY LINE
TOWN CORPORATION LINE
SECTION LINE
EXISTING ROAD OR TRAVELED WAY
PROPOSED ROAD OR TRAVELED WAY
RAILROAD
SURVEY LINE
BRIDGES

ASA

DATE	REVISIONS	BY
03-21-05	CHANGED SHEET TOTALS	BLL

APPROVED:
CHIEF ENGINEER [signature] DATE 1/12/05
EXECUTIVE DIRECTOR [signature] DATE 1-13-05
MISSISSIPPI DEPARTMENT OF TRANSPORTATION

APPROVED:
DIVISION ADMINISTRATOR DATE
FEDERAL HIGHWAY ADMINISTRATION
DEPARTMENT OF TRANSPORTATION

TITLE
ROADWAY DESIGN DIVISION
MISSISSIPPI DEPARTMENT OF TRANSPORTATION

1/12/2005 9:49 AM TITLE.DGN

1 st O. REV. 1 st O. REV. 1 st O. REV.

STATE	PROJECT NO.
MISS.	STP-0010-01(093)

INDEX TO DRAWINGS

DESCRIPTION OF SHEET	WORKING NUMBER	SHEET NUMBER
MDOT TITLE SHEET		1
DETAILED INDEX AND GENERAL NOTES	DI-1	2
SUMMARY OF QUANTITIES	SQ1	3
OVERALL SITE PLAN	SP	4
EXISTING CONDITIONS/DEMOLITION PLAN	DM	5
STORM WATER POLLUTION PREVENTION PLAN	SWPPP	6
TRAFFIC CONTROL PLAN	TCP	7
OVERALL LAYOUT PLAN	L1	8
LAYOUT PLAN	L2	9
LAYOUT PLAN	L3	10
CONCRETE PAVEMENT JOINT PLAN	JP	11
OVERALL GRADING PLAN	G1	12
GRADING PLAN	G2	13
GRADING PLAN	G3	14
PLAN AND PROFILE PLAN	PL1	15
PLAN AND PROFILE PLAN	PL2	16
PLAN AND PROFILE PLAN	PL3	17
PLAN AND PROFILE PLAN	PL4	18
SITE DETAILS	D1	19
ELECTRICAL DEMOLITION PLAN	ED	20
⚠1 VEGETATION SCHEDULE	VS	21

STANDARD DRAWINGS		
CONTINUOUSLY REINFORCED CONCRETE PAVEMENT	CRP-1A	102
DETAILS OF DITCH TREATMENT	DT-1	145
CONCRETE PAVEMENT JOINTS	PJ-1	104
CONCRETE PAVEMENT JOINTS (LONGITUDINAL) (3-1-02)	PJ-2	105
PAVEMENT MARKING LEGEND DETAILS	PM-5	124
PAVEMENT MARKING LEGEND DETAILS	PM-6	125
HIGHWAY SIGN AND BARRICADE DETAILS FOR CONSTRUCTION PROJECTS	TCP-10	259
DRIVEWAYS, CURB & GUTTER, & SIDEWALK	SD-1	287
DRIVEWAYS, INTEGRAL CURB, & SIDEWALK	SD-2	288
FLARED END SECTION FOR CONCRETE PIPE	FE1	328
	TOTAL	30

GENERAL NOTES:

1. CONTRACTOR SHALL KEEP THE SITE OPEN AND ACCESSIBLE TO THE GENERAL PUBLIC 24 HOURS A DAY, 7 DAYS A WEEK DURING THE CONTRACT. THE CONTRACTOR SHALL PROVIDE THE NECESSARY BARRICADES, SURROUNDING THE ENTIRE WORK AREA, TO ROUTE THE GENERAL PUBLIC AROUND THE WORK AREAS IN ACCORDANCE WITH MUTCD (MANUAL OF UNIFORM TRAFFIC CONTROL DEVICES – LATEST EDITION BARRICADES SHALL CONSIST OF KEYSTONE RED BRAND STUDDED T-POSTS (FENCE POSTS), TYPE III BARRICADES FOR TRUCK PARKING, GREEN, 6'-0" LONG, 10'-0" O.C.; TENEX ORANGE SAFETY FENCE, 4'-0" HIGH, SECURE WITH ALUMINUM FENCE TIES OR TIE WIRE, OR APPROVED EQUAL MATERIALS.
2. STRUCTURES OR UTILITIES DAMAGED BY THE CONSTRUCTION OPERATION, AS DETERMINED BY THE ENGINEER, SHALL BE REPLACED OR REPAIRED BY THE CONTRACTOR AT NO COST TO THE DEPARTMENT.
3. CARE SHOULD BE TAKEN BY THE CONTRACTOR AROUND EXISTING LIVE OAKS NEAR EXISTING WELCOME CENTER BUILDING. TO NOT DAMAGE ROOT SYSTEMS. HAND DIG ONLY WITHIN THE TREE'S DRIPLINE AREA.
4. IF THE CONTRACTOR, IN THE COURSE OF THE WORK, FINDS OR SUSPECTS ANY DISCREPANCY BETWEEN THE DRAWINGS AND THE PHYSICAL CONDITIONS OF THE SITE OR WORK OR ANY ERRORS OR OMISSIONS IN THE CONTRACT DOCUMENTS OR SPECIFICATIONS, HE SHALL IMMEDIATELY NOTIFY THE ENGINEER, AND THE ENGINEER SHALL PROMPTLY VERIFY THE SAME. ANY WORK DONE AFTER SUCH DISCOVERY, UNLESS AUTHORIZED, SHALL BE DONE AT THE CONTRACTOR'S RISK.

**NOTES:

1. SCREENED OUT PORTIONS IN DRAWINGS ARE TO BE DONE BY OTHERS.

FMS-103316/301000

PS & E PLANS - DATE 01-14-05

REVISIONS		
DATE	SHEET NO.	BY
2/28/05	3	CEB
3/11/05	2, 3, & 21	CEB
3/21/05	1	BLL
3/22/05	3 & 21	CEB

BASE DATA PROVIDED BY MISSISSIPPI DEPT. OF TRANSPORTATION TO WEATHERFORD/ MCDADE ON DESIGN DEVELOPMENT FOR

PREPARED BY: Weatherford McDade, Ltd. PLANNING CONSULTANTS ■ LANDSCAPE ARCHITECTS

DATE	REVISION	BY
3/11/05	ADDED SHEETS	CEB

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SITE IMPROVEMENTS TO JACKSON COUNTY WELCOME CENTER-PHASE I

DETAILED INDEX AND GENERAL NOTES

PROJECT NO: STP-0010-01(093) JACKSON CO.

FILENAME: 99124-03DI.dwg

DESIGN TEAM CEB CHECKED PLM DATE 1/13/05

WORKING NUMBER DI-1

SHEET NUMBER 2

PLAN
ROADWAY DESIGN DIVISION A.A.D. SECTION
MISSISSIPPI DEPARTMENT OF TRANSPORTATION