FED. ROAD REG. NO.	STATE	PROJECT NO.	SHEET NO.
	MISS.	IM-0020-01(178)	1

GENERAL INDEX

FOR DETAILED INDEX OF PLANS SEE SHEET NO. 2

DESCRIPTION	NUMBER OF SHEETS
TITLE SHEET	1
DETAILED INDEX	1
GENERAL NOTES	1
TYPICAL SECTIONS	1
QUANTITIES	6
PLAN AND PROFILES	4
SPECIAL DESIGN – ROADWAY ITEMS	49
BRIDGE DRAWINGS	–
SPECIAL DESIGN – BRIDGES	–
CROSS-SECTIONS	–
TOTAL SHEETS	63

①02-13-06

STATE OF MISSISSIPPI

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

PLAN AND PROFILE OF PROPOSED

FEDERAL-AID PROJECT NO. IM-0020-01(178)

MILLING AND OVERLAYING INTERSTATE 20
FROM I-20 GREENFIELD ROAD TO BRANDON EXIT 56
IN RANKIN COUNTY

104515/301000

SCALES

LAYOUT 1 IN.= 1600 FT.

BOP 540+00 RT LANE
540+00 LT LANE

EOP 653+62.36 RT LANE
653+10.76 LT LANE

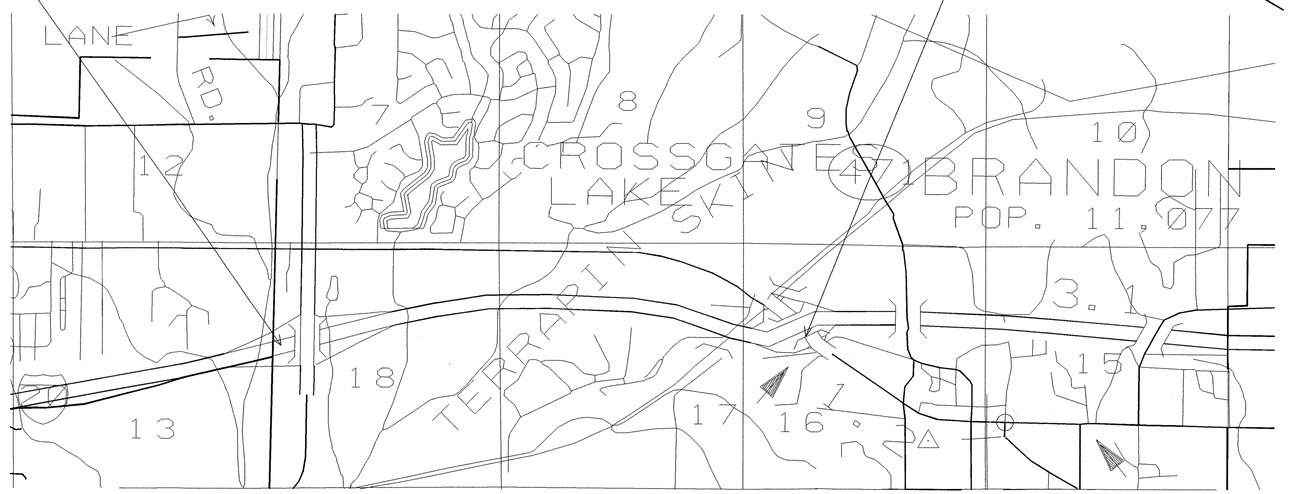

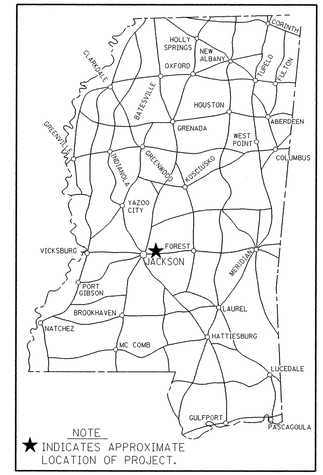

NOTE
★ INDICATES APPROXIMATE LOCATION OF PROJECT.

DESIGN CONTROL

70 MPH = V (SPEED DESIGN)

ADT (2008) = 44.000 : ADT (2028) = 65.000

DHV = 5.900 : D = 55 % T= 24 %

PERMITS ACQUIRED BY MDOT

WETLANDS AND WATERS PERMITS (NECESSARY FOR ULTIMATE IMPROVEMENTS ONLY):

	WATERS	WETLANDS
NATIONWIDE #14	N	N
NATIONWIDE (OTHER)*	N	N
GENERAL*	N	N
INDIVIDUAL (404)*	N	N

* ACQUISITION OF PERMITS FOR TEMPORARY IMPACTS DURING CONSTRUCTION ARE THE RESPONSIBILITY OF THE CONTRACTOR

STORMWATER PERMIT N

Y REQUIRED, CNOI SUBMITTED BY MDOT (DISTRIBUTED AREA = 5 ACRES +)(NTB 6484)

S REQUIRED, SCNOI TO BE SUBMITTED BY CONTRACTOR (1 TO 4.99 ACRES)(NTB 6483)

N NO STORMWATER PERMIT REQUIRED (<1 ACRE)

APPROVED BY: DBS DATE: 2/13/06

CONVENTIONAL SYMBOLS

COUNTY LINE
TOWN CORPORATION LINE
SECTION LINE
EXISTING ROAD OR TRAVELED WAY
PROPOSED ROAD OR TRAVELED WAY
RAILROAD
SURVEY LINE
BRIDGES

LENGTH DATA

LENGTH OF ROADWAY	FT.	2.261	MI.
LENGTH OF BRIDGES	FT.	0.000	MI.
LENGTH OF PROJECT (NET)		2.261	MI.
LENGTH OF EXCEPTIONS	FT.	0.000	MI.
LENGTH OF PROJECT (GROSS)		2.261	MI.

EXCEPTIONS
NONE

118

APPROVED:

Harry Lee James 2-13-06
CHIEF ENGINEER DATE

[signature] 2-13-06
EXECUTIVE DIRECTOR DATE

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

APPROVED:

DIVISION ADMINISTRATOR DATE

FEDERAL HIGHWAY ADMINISTRATION
DEPARTMENT OF TRANSPORTATION

REVISIONS BY DATE

TITLE
ROADWAY DESIGN DIVISION C.A.D.D. SECTION
MISSISSIPPI DEPARTMENT OF TRANSPORTATION

1 st O. REV.

STATE	PROJECT NO.
MISS.	IM-0020-01(178)

TABLE OF CONTENTS ENGLISH VERSION

WORKING NUMBER	TITLE	SHEET NUMBER
	TITLE SHEET	1
	DETAILED INDEX & GENERAL NOTES	
DI-1	DETAILED INDEX	2
GN-1	GENERAL NOTES	3
	TYPICAL SECTION SHEETS	
TS-1	TYPICAL SECTION : PAVEMENT OVERLAY	4
	QUANTITY SHEETS	
SQ-1	SUMMARY OF QUANTITIES	5
SQ-2	SUMMARY OF QUANTITIES	6
SQ-3	SUMMARY OF QUANTITIES	7
EQ-1	ESTIMATED QUANTITIES FOR GUARDRAIL, GUARDPOSTS, AND FENCE	8
EQ-2	ESTIMATED QUANTITIES FOR CONCRETE PAVEMENT REPAIR	9
EQ-3	ESTIMATED QUANTITIES FOR , PIPE REPAIRS & PAVED DITCH REPAIR	10
	PLAN & PROFILE SHEETS	
WK-1	MAINLINE - STATION 540+00 (B0P) TO 570+00	11
WK-2	MAINLINE - STATION 570+00 TO 600+00	12
WK-3	MAINLINE - STATION 600+00 TO 630+00	13
WK-4	MAINLINE - STATION 630+00 TO 660+00	14
	SPECIAL DESIGN SHEETS	
LCD-1	LANE CLOSURE DETAILS FOR FULL DEPTH CONCRETE PAVEMENT REPAIR	15
LRS-1	LOCATION OF R16-3 SIGNS	16
MPD-1	MISCELLANEOUS MILLING & PAVING DETAILS	17
TCP-SC	TRAFFIC CONTROL DETAILS: DRUM PLACEMENT AND SHOULDER CLOSURE	18
CSS-1	TRAFFIC CONTROL PLAN - CONSTRUCTION SIGN SCHEDULE	19
PR-1A	TYPICAL CRC PAVEMENT REPAIR (OPTIONAL WELDING METHOD) (11-13-91)	20
PR-1B	TYPICAL CRC PAVEMENT REPAIR	21
VS-1	VEGETATION SCHEDULE	22
B-4	END BENT DETAILS	23
DP-1	DITCH PLUG	24
GP-1A	GUARD POST DETAILS	25

WORKING NUMBER	TITLE		SHEET NUMBER
	STANDARD DRAWINGS PAVEMENT		
CRP-1	CONTINUOUS REINFORCED CONCRETE PAVEMENT 24' WIDE		101
	PAVEMENT MARKING		
PM-1	PAVEMENT MARKING DETAILS FOR 2 & 4-LANE DIVIDED ROADWAYS	(12-01-99)	120
PM-3	PAVEMENT MARKING DETAILS FOR INTERCHANGE ENTRANCE RAMPS (PARALLEL & TAPER)	(12-01-99)	122
PM-4	PAVEMENT MARKING DETAILS FOR INTERCHANGE EXIT RAMPS (PARALLEL & TAPER)	(12-01-99)	123
	EROSION CONTROL		
EC-1	EROSION CONTROL		140
TEC-1	TYPICAL TEMPORARY EROSION CONTROL MEASURES (SILT FENCE, HAY BALES, & BRUSH BARRIER)		142
DT-1	DETAILS OF DITCH TREATMENT		145
	FENCING		
CL-1	FENCE: CHAIN LINK- CLASS I	(03-01-02)	162
FI-2	FENCE: TYPICAL INSTALLATION AT DRAINAGE STRUCTURES		165
FI-3	FENCE: INSTALLATION AT DITCH XINGS		166
CLG-1	FENCE: CHAIN LINK GATE		168
	PROTECTIVE BARRIERS		
GR-1	GUARD RAIL: 'W' BEAM (WOOD POSTS)		180
GR-1B	GUARD RAIL: 'W' BEAM (STEEL POSTS)		182
GR-2	GUARD RAIL: BRIDGE END SECTION-TYPE A & C		184
GR-3	GUARD RAIL: TYPE 1 CABLE ANCHORAGE (FOUNDATION TUBE)		192
GR-3A	GUARD RAIL: TYPE 1 CABLE ANCHORAGE (CONCRETE FOOTING)		193
GR-4	GUARD RAIL: TYPICAL INSTALLATION AT BRIDGE APPROACHES FOR DIVIDED HIGHWAYS	(12-01-99)	194
GR-4C	GUARD RAIL: TYPICAL INSTALLATION FOR ROADSIDE HAZARDS ON DIVIDED HIGHWAYS	(12-01-99)	197

WORKING NUMBER	TITLE		SHEET NUMBER
	SIGNING		
SN-8	TYPICAL INSTALLATION AND DETAILS OF DELINEATORS AND DISTANCE REFERENCE SIGNS		233
SN-8A	TYPICAL INSTALLATION OF DELINEATORS		234
SN-8C	TYPICAL GUARD RAIL DELINEATION		236
	TRAFFIC CONTROL PLANS		
TCP-4	TRAFFIC CONTROL PLAN FOR POSTED SPEED LIMIT OF 65 OR 70 MPH (INTERSTATES AND OTHER 4-LANE DIVIDED HIGHWAYS) (MEDIAN LANE OR OUTSIDE LANE CLOSURE) (EXTENDED PERIOD)		253
TCP-5	TRAFFIC CONTROL PLAN FOR POSTED SPEED LIMIT OF 65 OR 70 MPH (INTERSTATES AND OTHER 4-LANE DIVIDED HIGHWAYS) (MEDIAN LANE OR OUTSIDE LANE CLOSURE)		254
TCP-9	SHORT DURATION CLOSING OF DIVIDED HIGHWAYS		258
TCP-10	HIGHWAY SIGN AND BARRICADE DETAILS FOR CONSTRUCTION PROJECTS		259
TCP-11	TRAFFIC CONTROL PLAN MOBILE OPERATIONS MULTILANE ROADS AND TWO-LANE RDOADS	(12-01-99)	260
TCP-12	DETAILS OF OUTSIDE LANE CLOSURE AT EXIT AND ENTRANCE RAMPS		261
TCP-13	TRAFFIC CONTROL PLAN FOR TEMPORARY CONSTRUCTION CROSSOVER (WORK DAY ONLY)		262
TCP-14	TRAFFIC CONTROL PLAN: UNEVEN PAVEMENT DETAILS		263
TCP-15	TEMPORARY STRIPING FOR TRAFFIC CONTROL 2-LANE AND 4-LANE DIVIDED HIGHWAYS	(12-01-99)	264
	MISCELLANEOUS ROADWAY DETAILS		
IR-1	INTERCHANGE DESIGN FOR HIGH-SPEED TAPERED EXIT RAMP		283
IR-1A	INTERCHANGE DESIGN FOR HIGH-SPEED PARALLEL EXIT RAMP	(12-01-99)	284
IR-2A	INTERCHANGE DESIGN FOR HIGH-SPEED PARALLEL ENTRANCE RAMP		286
PF-1	DETAILS OF PAVED FLUMES		291
	DRAINAGE		
PC-1	PIPE COLLAR-CONCRETE		301
MI-4A	MEDIAN INLET (FLUSH WITH DITCH PLUG)		313
PA-1	PAVED INLET APRON AND MEDIAN DITCH PLUG		318
B-9	DROP INLET AND GRATE DETAILS FOR PIPE AND BOX CULVERT		325
		SHEET TOTAL	63

District 5
FMS# 104515/301000

PS & E PLANS-DATE:RC10/2006 REVISIONS		
DATE	SHEET NO.	BY
02-23-06	5	YDZJ
03-07-06	5,6,7	YDZJ

118

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

DETAILED INDEX

PROJECT NO. IM-0020-01(178) 104515/301000
COUNTY: RANKIN

WORKING NUMBER DI-1

SHEET NUMBER 2

FILENAME:
DESIGN TEAM CHECKED DATE

REVISION BY DATE

PLAN
ROADWAY DESIGN DIVISION
MISSISSIPPI DEPARTMENT OF TRANSPORTATION

DETAILED INDEX.DGN

3/8/2005