FED. ROAD REG. NO.	STATE	PROJECT NO.	SHEET NO.
	MISS.	STP-0024-04(022)	1

GENERAL INDEX

FOR DETAILED INDEX OF PLANS SEE SHEET NO. 2

DESCRIPTION	NUMBER OF SHEETS
TITLE SHEET	1
DETAILED INDEX	1
GENERAL NOTES	1
TYPICAL SECTIONS	1
QUANTITIES	1
PLAN AND PROFILES	5
SPECIAL DESIGN – ROADWAY ITEMS	3
STANDARD DRAWINGS	16
TOTAL SHEETS	29

STATE OF MISSISSIPPI

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

PLAN AND PROFILE OF PROPOSED

FEDERAL-AID PROJECT NO. STP-0024-04(022)

① 02-21-06

104618

MILLING AND OVERLAYING HWY 16
THRU DOWNTOWN PHILADELPHIA
EASTBOUND & WESTBOUND LANES
IN NESHOBA COUNTY

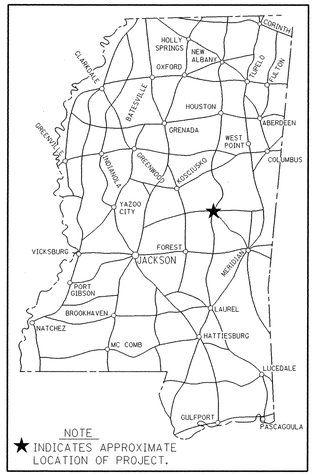

NOTE
★ INDICATES APPROXIMATE LOCATION OF PROJECT.

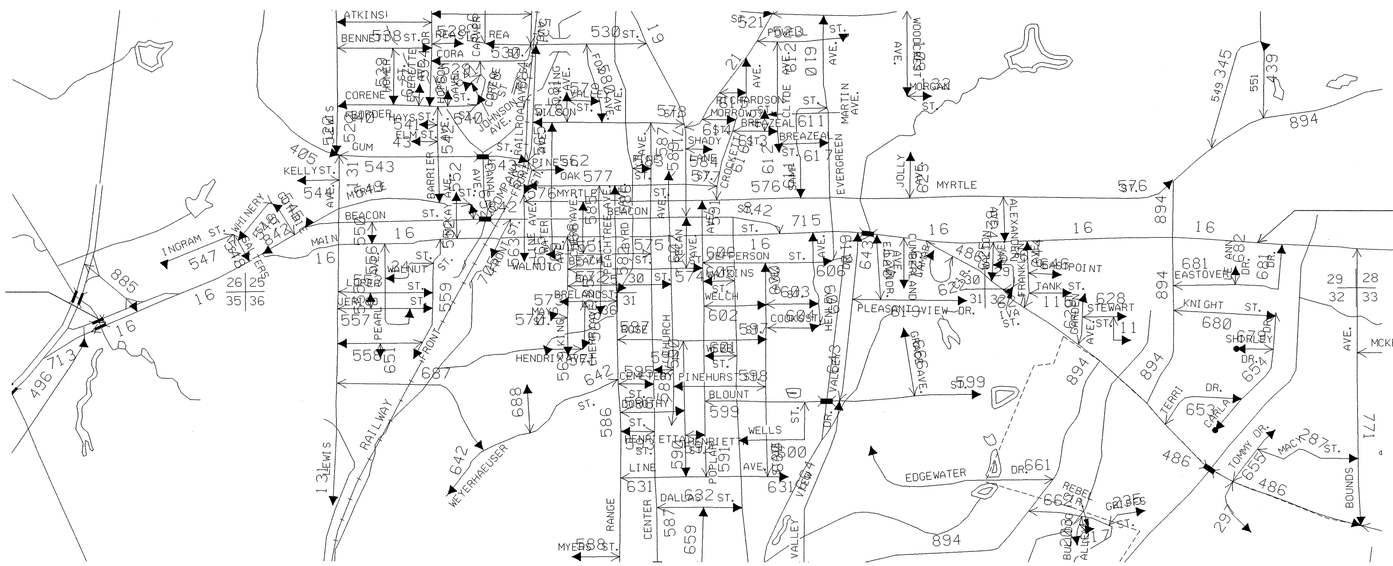

PERMITS ACQUIRED BY MDOT		
WETLANDS AND WATERS PERMITS (NECESSARY FOR ULTIMATE IMPROVEMENTS ONLY):	WATERS	WETLANDS
NATIONWIDE #14	N	N
NATIONWIDE (OTHER)*	N	N
GENERAL*	N	N
INDIVIDUAL (404)*	N	N
* ACQUISITION OF PERMITS FOR TEMPORARY IMPACTS DURING CONSTRUCTION ARE THE RESPONSIBILITY OF THE CONTRACTOR		
STORMWATER PERMIT	N	
Y	REQUIRED, CNOI SUBMITTED BY MDOT (DISTRIBUTED AREA = 5 ACRES +)(NTB 6484)	
S	REQUIRED, SCNOI TO BE SUBMITTED BY CONTRACTOR (1 TO 4.99 ACRES)(NTB 6483)	
N	NO STORMWATER PERMIT REQUIRED (<1 ACRE)	
APPROVED BY: DBS	DATE: 02/17/06	

CONVENTIONAL SYMBOLS

COUNTY LINE
TOWN CORPORATION LINE
SECTION LINE
EXISTING ROAD OR TRAVELED WAY
PROPOSED ROAD OR TRAVELED WAY
RAILROAD
SURVEY LINE
BRIDGES

EQUATIONS
NONE

EXCEPTIONS
NONE

LENGTH DATA

LENGTH OF PROJECT (NET) 3.1 MILES

120

APPROVED:
Harry Lee James 2-21-06
CHIEF ENGINEER DATE
[signature] 2-21-06
EXECUTIVE DIRECTOR DATE
MISSISSIPPI DEPARTMENT OF TRANSPORTATION

APPROVED:
DIVISION ADMINISTRATOR DATE
FEDERAL HIGHWAY ADMINISTRATION
DEPARTMENT OF TRANSPORTATION

REVISIONS BY DATE

1 st O. REV.

STATE	PROJECT NO.
MISS.	STP-0024-04(022)

DESCRIPTION OF SHEET	WKG. NO.	SH. NO.
TITLE SHEET (1)		1
DETAILED INDEX & GENERAL NOTES (2)		
DETAILED INDEX	DI-1	2
GENERAL NOTES	GN-1	3
TYPICAL SECTION SHEETS (1)		
TYPICAL SECTION - MAINLINE	TS-1	4
QUANTITY SHEETS (1)		
SUMMARY OF QUANTITIES	SQ-1	5
PLAN & PROFILE SHEETS (5)		
STA. 200+00 TO STA. 235+00	3	6
STA. 235+00 TO STA. 265+00	4	7
STA. 265+00 TO STA. 300+00	5	8
STA. 300+00 TO STA. 330+00	6	9
STA. 330+00 TO STA. 362+90	7	10
SPECIAL DESIGN SHEETS (2)		
CONSTRUCTION SIGN DETAIL	CSD-1	11
TRAFFIC CONTROL DETAILS DRUM PLACEMENT AND SHOULDER CLOSURE	TCP-SC	12
MISCELLANEOUS PAVING DETAIL	MPD-1	60
STANDARD DRAWINGS - ROADWAY SHEETS (16)		
PAVEMENT MARKING DETAILS FOR 2 & 4-LANE DIVIDED ROADWAYS (12-01-99)	PM-1	120
PAVEMENT MARKING DETAILS FOR 4-LANE AND 5-LANE UNDIVIDED ROADWAYS	PM-2	121
PAVEMENT MARKING LEGEND DETAILS	PM-5	124
PAVEMENT MARKING LEGEND DETAILS	PM-6	125
TYPICAL PLACEMENT OF WARNING SIGNS AND PAVEMENT MARKINGS AT RAILROAD CROSSINGS	PM-7	126
GUARDRAIL: BRIDGE END SECTION TYPE "I" (WOOD POSTS)	GR-2F	190
GUARDRAIL: BRIDGE END SECTION TYPE "I" (STEEL POSTS)	GR-2G	191
GUARDRAIL: RUB RAIL HARDWARE SHEET	GR-RR	192
GUARDRAIL: TYPICAL INSTALLATION AT BRIDGE APPROACHES FOR DIVIDED HIGHWAYS	GR-4	194
TYPICAL GUARDRAIL DELINEATION	SN-8C	236
TRAFFIC CONTROL PLAN WITH FLAGGER (ONE LANE OF TWO-WAY TRAFFIC)	TCP-1	250
TRAFFIC CONTROL PLAN FOR POSTED SPEED LIMIT LESS THAN 65 MPH (WORK DAY ONLY)	TCP-2	251
TRAFFIC CONTROL PLAN FOR POSTED SPEED LIMIT LESS THAN 65 MPH (EXTENDED PERIOD)	TCP-3	252
4-LANE TO 2-LANE TRANSITION	TCP-6	255
2-LANE TO 4-LANE TRANSITION	TCP-7	256
TRAFFIC CONTROL PLANS UNEVEN PAVEMENT DETAILS	TCP-14	263
TOTAL SHEETS		29

DISTRICT V

PS & E PLANS- 02/21/06		
FMS CON. # 104618/301000		
REVISIONS		
DATE	SHEET NO.	BY
03/10/06	5	MA

120

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

DETAILED INDEX

PROJECT NO. **STP-0024-04(022)**

COUNTY : **NESHOBA**

WORKING NUMBER DI-1

SHEET NUMBER 2

FILENAME: DETAIL INDEX.DGN

DESIGN TEAM_____ CHECKED_____ DATE_____

REVISION | BY | DATE

PLAN
ROADWAY DESIGN DIVISION
MISSISSIPPI DEPARTMENT OF TRANSPORTATION

3/10/2006 16OVERLAY.DGN