STP-0055-03(083)

FMS PE 105573/101000

FED. ROAD REG. NO.	STATE	PROJECT NO.	SHEET NO.
4	MISS		1

FOR DETAILED INDEX OF PLANS SEE SHEET NO. 2

STATE OF MISSISSIPPI

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

CARROLL COUNTY REST AREA SITE IMPROVEMENTS

FEDERAL AID PROJECT NUMBER STP-0055-03(083)

①06-26-09

FMS CON 105573/301000

CARROLL COUNTY

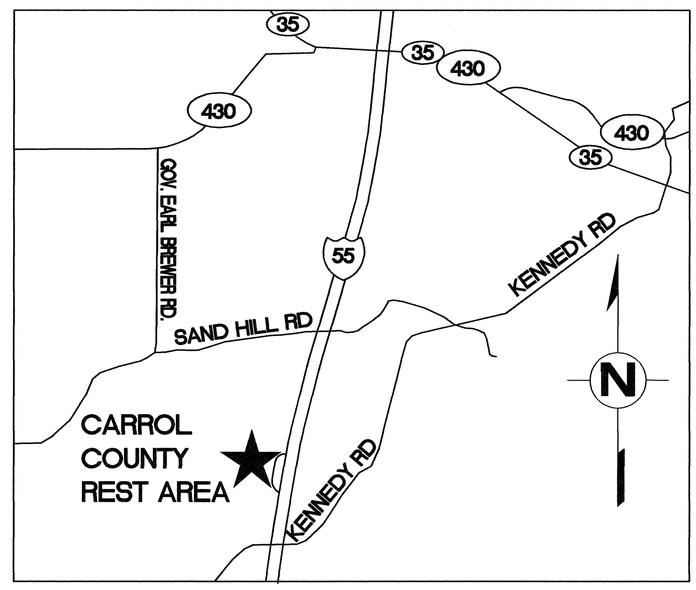

CARROLL COUNTY AREA MAP

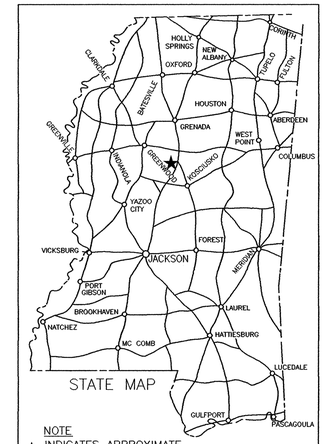

STATE MAP

NOTE
★ INDICATES APPROXIMATE LOCATION OF PROJECT.

LAT. N 33° 18' 19" LONG. W 89° 47' 4"
(APPROX. MIDDLE OF PROJECT)

DESIGN CONTROL
MPH = V (SPEED DESIGN)
ADT ( ) = : ADT ( ) =
DHV = : D = % T= %

PERMITS ACQUIRED BY MDOT

WETLANDS AND WATERS PERMITS (NECESSARY FOR ULTIMATE IMPROVEMENTS ONLY):

	WATERS	WETLANDS
NATIONWIDE #14	N	N
NATIONWIDE (OTHER)*	N	N
GENERAL*	N	N
INDIVIDUAL (404)*	N	N

* ACQUISITION OF PERMITS FOR TEMPORARY IMPACTS DURING CONSTRUCTION ARE THE RESPONSIBILITY OF THE CONTRACTOR

STORMWATER PERMIT N

Y REQUIRED, CNOI SUBMITTED BY MDOT (DISTRIBUTED AREA=5 ACRES+)(NTB 6484)

S REQUIRED, SCNOI TO BE SUBMITTED BY CONTRACTOR (1 TO 4.99 ACRES)(NTB 6483)

N NO STORMWATER PERMIT REQUIRED (<1 ACRE)

APPROVED BY: JW DATE: 6-24-09

CONVENTIONAL SYMBOLS

COUNTY LINE
TOWN CORPORATION LINE
SECTION LINE
EXISTING ROAD OR TRAVELED WAY
EXISTING DIVIDED HIGHWAY
RAILROAD
SURVEY LINE
BRIDGES

REGISTERED PROFESSIONAL ENGINEER AND ARCHITECT 152 STATE OF MISSISSIPPI 6-24-09

ASU

APPROVED:
CHIEF ENGINEER 6/25/09 DATE
EXECUTIVE DIRECTOR 6/25/09 DATE
MISSISSIPPI DEPARTMENT OF TRANSPORTATION

APPROVED:
DIVISION ADMINISTRATOR DATE
FEDERAL HIGHWAY ADMINISTRATION
DEPARTMENT OF TRANSPORTATION

REVISIONS | DATE | BY

CARROLL COUNTY 1

TITLE ROADWAY DESIGN DIVISION MISSISSIPPI DEPARTMENT OF TRANSPORTATION

MMDDYY 00:00 AMPMDGNFILENAME

1 st O. REV.

STATE	PROJECT NO.
MISS.	STP-0055-03(083)

INDEX TO DRAWINGS

DESCRIPTION OF SHEET	WORKING NUMBER	SHEET NUMBER
MDOT TITLE SHEET		1
DETAILED INDEX AND GENERAL NOTES	DI-1	2
SUMMARY OF QUANTITIES	SQ1	3
EXISTING CONDITIONS AND DEMOLITION PLAN	EX	4
LAYOUT PLAN	L1	5
LAYOUT PLAN	L2	6
GRADING PLAN	G	7
PLANTING PLAN	LA	8
VEGETATION SCHEDULE	VS	9
SITE DETAILS	D1	10
PLANTING DETAILS	D2	11
ELECTRICAL	E1.1	12

STANDARD MDOT DRAWINGS

TYPE I MEDIAN INLET (24" PIPE AND UNDER) (3-01-02)	MI-1	306

GENERAL NOTES:

1. IF THE CONTRACTOR, IN THE COURSE OF THE WORK, FINDS OR SUSPECTS ANY DISCREPANCY BETWEEN THE DRAWINGS AND THE PHYSICAL CONDITIONS OF THE SITE OR WORK OR ANY ERRORS OR OMISSIONS IN THE CONTRACT DOCUMENTS OR SPECIFICATIONS, HE SHALL IMMEDIATELY NOTIFY THE ENGINEER, AND THE ENGINEER SHALL PROMPTLY VERIFY THE SAME. ANY WORK DONE AFTER SUCH DISCOVERY, UNLESS AUTHORIZED, SHALL BE DONE AT THE CONTRACTOR'S RISK.

2. THIS SITE WILL BE CLOSED DURING CONSTRUCTION. THE DEPARTMENT WILL BE RESPONSIBLE FOR SIGNS AND BARRICADES FOR CLOSING THE SITE TO THE PUBLIC. CONTRACT MOWING OPERATIONS (BY OTHERS) WILL CONTINUE AND CONTRACTOR SHALL COORDINATE WITH ENGINEER TO FACILITATE MOWING OPERATIONS.

3. EXISTING STRUCTURES, SITE ELEMENTS INCLUDING LANDSCAPING OR UTILITIES, NOT DESIGNATED FOR DEMOLITION/UPGRADE, DAMAGED BY THE CONSTRUCTION OPERATION, AS DETERMINED BY THE ENGINEER, SHALL BE REPLACED OR REPAIRED BY THE CONTRACTOR, AT NO COST TO THE DEPARTMENT.

4. THE CONTRACTOR WILL BE PERMITTED TO USE WATER THAT IS AVAILABLE ON THE SITE DURING THE PLANTING AND ESTABLISHING OF THE TREES AND SHRUBS. FALLEN LIMBS, LITTER AND DEBRIS SHALL BE REMOVED FROM THE SITE FOR THE LIFE OF THE CONTRACT. THE CONTRACTOR SHALL PROVIDE TREE PROTECTION DURING CONSTRUCTION.

5. THE CONTRACTOR SHALL NOTIFY MISSISSIPPI ONE CALL CENTER BEFORE WORK IS PERFORMED AND SHALL PROVIDE IN WRITING THAT CONTACT HAS BEEN MADE, AND RESULTS OF THE CONTACT.

6. WIRE FENCE BACKING WILL BE REQUIRED FOR ALL SILT FENCE.

7. UNDERGROUND UTILITIES ARE NOT SHOWN ON THESE PLANS. THE CONTRACTOR SHALL BE RESPONSIBLE FOR MAKING HIS OWN INDEPENDENT INVESTIGATIONS, INCLUDING SUBSURFACE INVESTIGATIONS AS MAY BE NECESSARY TO LOCATE UTILITIES WITHIN PROJECT WORK LIMITS. IN ADDITION, CONTRACTOR SHALL CONTACT MISSISSIPPI ONE CALL BEFORE EXCAVATION BEGINS, AND NOTIFY MDOT DISTRICT 2 MAINTENANCE PERSONNEL (CONTACT: JESSE STEWART) AT LEAST TWO WEEKS IN ADVANCE OF WORK AT EACH SITE SO THAT MDOT UTILITIES (E.G. LIGHTING CONDUIT) CAN BE FIELD LOCATED.

FMS CON. 105573/301000

PS & E PLANS - DATE 6/26/09		
REVISIONS		
DATE	SHEET NO.	BY
7/14/09	3	MRS

Weatherford McDade, Ltd.

REGISTERED LANDSCAPE ARCHITECT 192 STATE OF MISSISSIPPI

6-26-09

ASL

DATE	REVISION	BY

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

CARROLL COUNTY REST AREA
SITE IMPROVEMENTS

DETAILED INDEX AND GENERAL NOTES

PROJECT NO: STP-0055-03(083)
CARROLL COUNTY

FILENAME: 002-09104DI.DWG
DESIGN TEAM JWE CHECKED PLM DATE 06/24/09

WORKING NUMBER DI-1

SHEET NUMBER 2