FED. ROAD REG. NO.	STATE	PROJECT NO.	SHEET NO.
4	MISS.	BWO–1180–41(001)	1

STATE OF MISSISSIPPI

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

PLANS OF PROPOSED
DISTRICT HEADQUARTERS BUILDING AT TUPELO
STATE PROJECT NO. BWO–1180–41(001)

501637/301000

LEE COUNTY

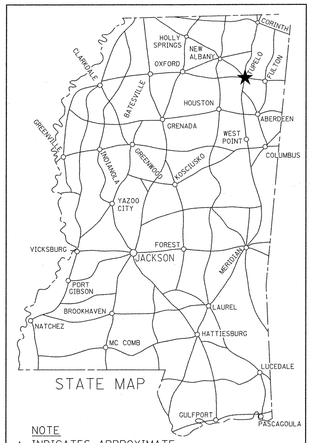

NOTE
★ INDICATES APPROXIMATE LOCATION OF PROJECT.

LAT.	LONG.
(APPROX. MIDDLE OF PROJECT)	

PROJECT SITE
1909 NORTH GLOSTER ST

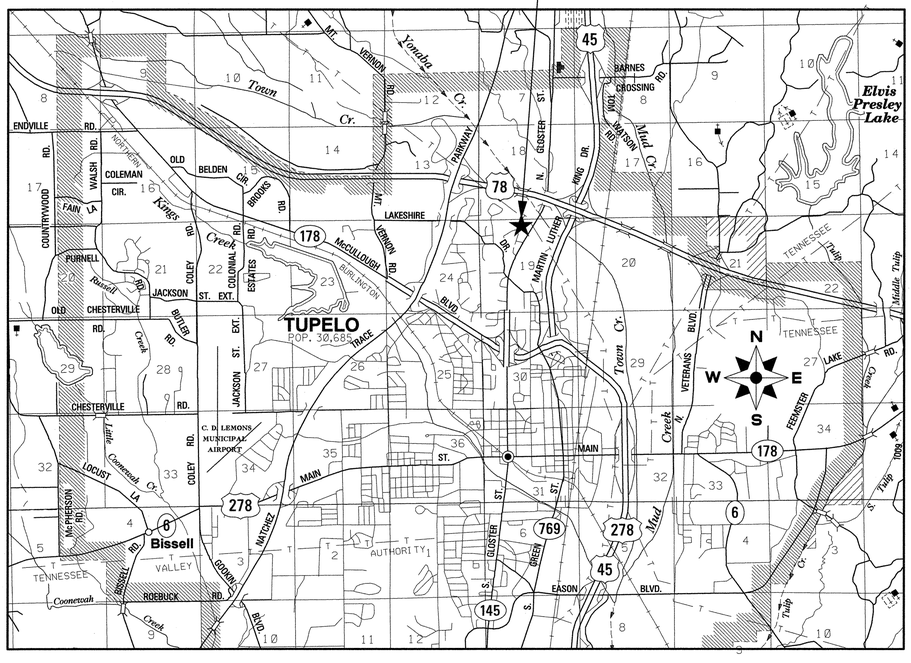

CONVENTIONAL SYMBOLS

COUNTY LINE .....

TOWN CORPORATION LINE .....

SECTION LINE .....

EXISTING ROAD OR TRAVELED WAY .....

PROPOSED ROAD OR TRAVELED WAY .....

RAILROAD .....

SURVEY LINE .....

BRIDGES .....

DESIGN CONTROL

_____ MPH = V (SPEED DESIGN)

ADT (____) = _____ : ADT (____) = _____

DHV = _____ : D = _____% T= _____%

PERMITS ACQUIRED BY MDOT

WETLANDS AND WATERS PERMITS (NECESSARY FOR ULTIMATE IMPROVEMENTS ONLY):

	WATERS	WETLANDS
NATIONWIDE #14	N	N
NATIONWIDE (OTHER)*	N	N
GENERAL*	N	N
INDIVIDUAL (404)*	N	N

* ACQUISITION OF PERMITS FOR TEMPORARY IMPACTS DURING CONSTRUCTION ARE THE RESPONSIBILITY OF THE CONTRACTOR

STORMWATER PERMIT S

Y	REQUIRED, CNOI SUBMITTED BY MDOT (DISTURBED AREA = 5 ACRES +)(NTB 586)
S	REQUIRED, SCNOI TO BE SUBMITTED BY CONTRACTOR (1 TO 4.99 ACRES)(NTB 14)
N	NO STORMWATER PERMIT REQUIRED (<1 ACRE)

APPROVED BY: _____ DATE: 4/22/10

ASU

REVISIONS

BY	DATE

APPROVED:

CHIEF ENGINEER — DATE 4/22/10

EXECUTIVE DIRECTOR — DATE 4/22/10

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

APPROVED:

DIVISION ADMINISTRATOR — DATE

FEDERAL HIGHWAY ADMINISTRATION
DEPARTMENT OF TRANSPORTATION

TITLE
ROADWAY DESIGN DIVISION
MISSISSIPPI DEPARTMENT OF TRANSPORTATION

4/22/2010 8:59 AM TITLE.DGN

1 st O. REV.

BWO-1180-41(001)

STATE	PROJECT NO.
MISS.	BWO-1180-41(001)

DISTRICT HEADQUARTERS BUILDING

DISTRICT ONE

TUPELO, MISSISSIPPI

ARCHITECTS:

CANIZARO • CAWTHON ▾ DAVIS

Architecture · Planning · Interior Design

129 South President Street Jackson Mississippi 39201 601.948.7337

CIVIL ENGINEERS

ABMB ENGINEERS, INC.
200 N CONGRESS ST, SUITE 600
JACKSON, MISSISSIPPI 39201
601.354.0696

STRUCTURAL ENGINEERS:

SPENCER ENGINEERS, INC.
P O BOX 4328
JACKSON, MISSISSIPPI 39296
601.982.7766

MECHANICAL ENGINEERS:

HESM & A
315 NEWPOINTE DRIVE
RIDGELAND, MISSISSIPPI 39157
601.856.5138

ELECTRICAL ENGINEERS:

WATKINS-O'GWYNN
4523 OFFICE PARK DRIVE
JACKSON, MISSISSIPPI 39206
601.982.3313

ABBREVIATIONS:

AFF	ABOVE FINISH FLOOR
ACT	ACOUSTICAL CEILING TILE
AL	ALUMINUM
CPT	CARPET
CLG	CEILING
CT	CERAMIC TILE
CMU	CONCRETE MASONRY UNIT
CG	CORNER GUARD
CORR	CORRIDOR
DP	DEEP
DET	DETAIL
DIA	DIAMETER
DN	DOWN
E	EAST
EXIST/EX	EXISTING
E.J.	EXPANSION JOINT
FWC	FABRIC WALL COVERING
FEC	FIRE EXTINGUISHER/CABINET
FFE	FINISH FLOOR ELEVATION
GB	GRAB BAR
GWB/GYP. BD.	GYPSUM WALL BOARD
HW	HARDWARE
HM	HOLLOW METAL
HR	HOUR
LAM	LAMINATE
LTG	LIGHTING
MR	MIRROR
MISC	MISCELLANEOUS
N	NORTH
O.C.	ON CENTER
P	PAINT/PAINTED
PTD	PAPER TOWEL DISPENSER
PWD	PLYWOOD
PT	PAVER TILE
RB	RUBBER BASE
SIM	SIMILAR
SD	SOAP DISPENSER
S	SOUTH
SS	STAINLESS STEEL
STL	STEEL
THK	THICK
TBR	TO BE REMOVED
TME	TO MATCH EXISTING
TLT	TOILET
TOS	TOP OF STEEL
UNO	UNLESS NOTED OTHERWISE
VCT	VINYL COMPOSITE TILE
W/	WITH
W	WEST
WD	WOOD

SYMBOL LEGEND

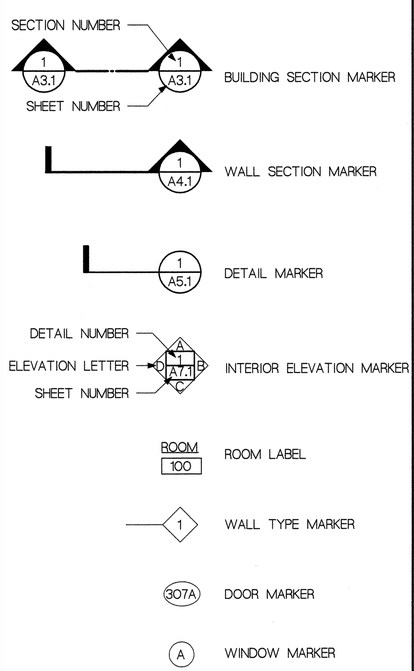

LIST OF DRAWINGS

WRK. NO.	SHT NO.	DESCRIPTION
T1.1	2	INDEX
C-1	3	PRE-DEMOLITION CONDITIONS
C-1.1	4	MISCELLANEOUS DETAILS
C-1.2	5	MISCELLANEOUS DETAILS
C-2.1	6	OWNER DEMOLITION LAYOUT
C-2.2	7	OWNER SITE PREPARATION
C-3	8	CONTRACTOR DEMOLITION LAYOUT
C-4	9	SITE LAYOUT
C-5	10	GRADING LAYOUT
C-6	11	DRAINAGE LAYOUT
C-7	12	PROPOSED EROSION CONTROL PLAN
C-8.1	13	UTILITY LAYOUT
C-8.2	14	UTILITY LAYOUT
C-9.1	15	MISCELLANEOUS DETAILS
C-9.2	16	CROSS-SECTIONS
C-9.3	17	MISCELLANEOUS DETAILS
C-9.4	18	MISCELLANEOUS DETAILS
C-9.5	19	MISCELLANEOUS DETAILS
C-10	20	RETAINING WALL SECTIONS
A2.1	21	FIRST FLR PLAN/ CEILING PLN
A2.2	22	SECOND FLR PLAN/ CEILING PLN
A2.3	23	ROOF PLAN
A3.1	24	EXTERIOR ELEVATIONS
A3.3	25	BUILDING SECTION
A3.4	26	BUILDING SECTION
A3.5	27	BUILDING SECTIONS
A4.1	28	WALL SECTIONS
A4.2	29	WALL SECTIONS
A4.3	30	WALL SECTIONS
A4.4	31	WALL SECTIONS
A4.5	32	WALL SECTION
A4.6	33	WALL SECTION & ELEV SECTION & PLN
A4.8	34	SCREEN WALL DETAILS
A4.9	35	WALL SECTIONS
A4.11	36	WALL SECTIONS
A4.13	37	DETAILS
A4.14	38	PLAN DETAILS
A4.15	39	DETAILS
A5.1.1	40	FINISH SCHEDULE FIRST FLOOR
A5.1.2	41	FINISH SCHEDULE SECOND FLOOR
A5.2.1	42	DOOR SCHEDULE FIRST FLOOR
A5.2.2	43	DOOR SCHEDULE SECOND FLOOR
A5.3	44	CURTAINWALL, FRAME, DOORS TYPES
A5.4	45	DOOR AND WINDOW DETAILS
A5.5	46	DOOR AND WINDOW DETAILS
A5.6	47	DOOR AND WINDOW DETAILS & DETAILS
A6.1.1	48	PARTIAL FIRST FLR LRG SCALE PLN
A6.1.2	49	PARTIAL FIRST FLR LRG SCALE PLN
A6.1.3	50	PARTIAL FIRST FLR LRG SCALE PLN
A6.1.4	51	PARTIAL FIRST FLR LRG SCALE PLN
A6.2.1	52	PARTIAL SECOND FLR LRG SCALE PLN
A6.2.2	53	PARTIAL SECOND FLR LRG SCALE PLN
A6.2.3	54	PARTIAL SECOND FLR LRG SCALE PLN
A6.2.4	55	PARTIAL SECOND FLR LRG SCALE PLN
A6.6	56	INTERIOR ELEVATIONS
A6.7	57	INTERIOR ELEVATIONS
A6.8	58	INTERIOR ELEVATIONS
A6.9	59	INTERIOR ELEVATIONS
A6.10	60	RECEPTION DESK DETAILS
A6.12	61	MILLWORK DETAILS
A6.13	62	MILLWORK DETAILS
A6.14	63	MILLWORK DETAILS
S1.0	64	STRUCTURAL GENERAL NOTES
S1.1	65	FOUNDATION AND FIRST FLR FRAMING PLN- PART A
S1.2	66	FOUNDATION AND FIRST FLR FRAMING PLN- PART B
S1.3	67	SECOND FLOOR FRAMING PLAN - PART A
S1.4	68	SECOND FLOOR FRAMING PLAN - PART B
S1.5	69	ROOF SUPPORT FRAMING PLAN - PART A
S1.6	70	ROOF SUPPORT FRAMING PLAN - PART B
S1.7	71	ROOF FRAMING PLAN - PART A
S1.8	72	ROOF FRAMING PLAN - PART B
S2.1	73	FOUNDATION DETAILS
S2.2	74	FOUNDATION DETAILS
S3.1	75	STEEL DETAILS
S3.2	76	STEEL DETAILS
S3.3	77	STEEL DETAILS
S3.4	78	STEEL DETAILS
S3.5	79	STEEL DETAILS
S3.6	80	STEEL DETAILS
S4.1	81	COLUMN SCHEDULE & DETAILS
S4.2	82	COLUMN SCHEDULE & DETAILS
E0.1	83	ELECTRICAL SITE PLAN
E1.1	84	FIRST FLR PLN LIGHTING PART A
E1.2	85	SECOND FLR PLN LIGHTING PART A
E1.3	86	FIRST & SECOND FLR PLNS LIGHTING PART B
E2.1	87	FIRST FLR PLN POWER/COMM PART A
E2.2	88	SECOND FLR PLAN POWER/COMM PART A
E2.3	89	FIRST & SECOND FLR PLNS POWER/COMM PART B
E3.1	90	DETAILS
E3.2	91	DETAILS
E3.3	92	ACCESS CONTROL DETAIL CCTV DIAGRAM
E3.4	93	COMMUNICATION RISER DIAGRAM
E3.5	94	ELECTRICAL SITE DETAILS AND COMM RISERS
E3.6	95	POWER RISER DIAGRAM
E3.7	96	ELECTRICAL SCHEDULES
E3.8	97	SCHEDULES AND LEGEND
M0.1	98	HVAC LEGEND, ABBREVIATIONS, NOTES
M2.1	99	FIRST FLR PLAN- HVAC
M2.2	100	AUDITORIUM PLAN- HVAC
M2.3	101	SECOND FLR PLAN- HVAC
M3.1	102	FIRST FLR ISOMETRIC- HVAC
M3.2	103	SECOND FLR ISOMETRIC- HVAC
M3.3	104	AUDITORIUM ISOMETRIC- HVAC
M4.1	105	HVAC DETAILS
M4.2	106	HVAC DETAILS
M5.1	107	HVAC SCHEDULES
M5.2	108	HVAC SCHEDULES
M5.3	109	HVAC CONTROLS
P0.1	110	PLUMBING LEGEND, ABBREVIATIONS, NOTES
P2.1	111	FIRST FLR PLAN- PART A- PLUMBING
P2.2	112	SECOND FLR PLN- PART A- PLUMBING
P2.3	113	FIRST & SECOND FLR PLN- PART B- PLUMBING
P3.1	114	SCHEDULES, DETAILS, RISERS

CODE INFORMATION

BUILDING CODE:
2006 INTERNATIONAL BUILDING CODE

OCCUPANCY CLASSIFICATION:
GROUP B - BUSINESS
GROUP A-3 - ASSEMBLY (AUDITORIUM)

TOTAL BUILING AREA (GROSS SQ. FT.):
16,668 SQ. FT. PER FLOOR

BUILDING HEIGHT:
2 STORIES

DISTANCE TO PROPERTY LINE:
30 FEET

TYPE CONSTRUCTION:
TYPE III, UNPROTECTED

FIRE PROTECTION:
FULLY SPRINKLERED

PS & E PLANS-DATE : 04/26/2010

FMS CON. # 501637/301000

FMS CON. # -

REVISIONS

	DATE	SHEET NO.	BY
1	05/03/2010	4 AND 5	SMH
2	05/13/2010	4, 5, 6, 7, AND 8	SMH
3	05/19/2010	4 AND 5	SMH

MISSISSIPPI DEPARTMENT OF TRANSPORTATION
DISTRICT HEADQUARTERS BUILDING
AT TUPELO, MS

INDEX

ASU

BWO-1180-41(001) LEE COUNTY

WORKING NUMBER T1.1

SHEET NUMBER 2

REVISION BY

DATE

FILENAME:

DESIGN TEAM CHECKED DATE APRIL 26, 2010