Keyed

11 -



SM No. CBR2905000011

## PROPOSAL AND CONTRACT DOCUMENTS

#### FOR THE CONSTRUCTION OF

11

Bridge Replacements on SR 178 between Potts Camp and Myrtle, Bridge Nos. 47.1, 50.9, & 51.3, known as Federal Aid Project No. BR-2905-00(001) / 103328301 in Benton County.

Project Completion: 228 Working Days

(STATE DELEGATED)

#### NOTICE

BIDDERS MUST COMPLETE AN ONLINE REQUEST FOR PERMISSION TO BID THIS PROJECT.

Electronic addendum updates will be posted on www.gomdot.com

## **SECTION 900**

OF THE CURRENT 2017 STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION

JACKSON, MISSISSIPPI

## MISSISSIPPI DEPARTMENT OF TRANSPORTATION TABLE OF CONTENTS

### PROJECT: BR-2905-00(001)/103328301 - Benton

Section 901 - Advertisement

| Section 904 - Notice to | o Bidders  |
|-------------------------|--|
| #1                      | Governing Specification  |
| #2                      | Status of ROW, w/ Attachments  |
| #3                      | Final Cleanup  |
| #6                      | Storm Water Discharge Associated with Construction Activity (> 5 Acres)              |
| #7                      | Disadvantaged Business Enterprise In Federal-Aid Highway Construction, w/ Supplement |
| #9                      | Federal Bridge Formula   |
| #14                     | Railway-Highway Provision, w/Supplement  |
| #21                     | Intermediate Diaphragms  |
| #113                    | Tack Coat  |
| #114                    | Right-of-Way Plat  |
| #296                    | Reduced Speed Limit Signs  |
| #445                    | Mississippi Agent and Qualified Nonresident Agent                                    |
| #516                    | Errata and Modifications to the 2017 Standard Specifications                         |
| #757                    | Additional Erosion Control Requirements  |
| #977                    | DUNS Requirement For Federal Funded Projects   |
| #1206                   | MASH Compliant Devices   |
| #1225                   | Early Notice to Proceed  |
| #1226                   | Material Storage Under Bridges   |
| #1241                   | Fuel and Material Adjustments  |
| #1434                   | Erosion Control Plan   |
| #1513                   | Contract Time  |
| #1514                   | Specialty Items  |
| #1515                   | Placement of Fill Material in Federally Regulated Areas                              |
| #1516                   | Road Closure Restrictions  |
| #1517                   | Pay Item Correction  |
| 906                     | Required Federal Contract Provisions FHWA 1273, w/Supplements                        |
| Section 907 - Special   | Provisions   |
| 907-102-2               | Bidding Requirements and Conditions  |
| 907-103-2               | Award and Execution of Contract  |
| 907-107-2               | Contractor's Erosion Control Plan  |
| 907-253-1               | Coir Fiber Baffle  |
| 907-619-5               | Traffic Control for Construction Zones   |
| 907-701-1               | Hydraulic Cement   |
| 907-702-4               | Bituminous Materials   |
| 907-703-1               | Gradation  |
| 907-705-1               | Stone Riprap   |
| 907-711-2               | Plain Steel Wire   |
| 907-720-2               | Acceptance Procedure for Glass Beads   |
|                         |  |

#### PROJECT: BR-2905-00(001)/103328301 - Benton

907-803-4 Test Piles

907-804-6 Concrete Bridges and Structures 907-899-1 Railway-Highway Provisions

Section 905 - Proposal, Proposal Bid Items, Combination Bid Proposal

Certification of Performance - Prior Federal-Aid Contracts

Certification Regarding Non-Collusion, Debarment and Suspension

SAM.GOV Registration and DUNS Number

Section 902 - Contract Form

Section 903 - Contract Bond Forms

Form -- OCR-485

Pile and Driving Equipment Data Form

Progresss Schedule

(REVISIONS TO THE ABOVE WILL BE INDICATED ON THE SECOND SHEET OF SECTION 905 AS ADDENDA)

05/01/2019 11:16 AM

#### **SECTION 901 - ADVERTISEMENT**

Electronic bids will be received by the Mississippi Transportation Commission at <u>10:00 o'clock A.M.</u>, Wednesday, May 29, 2019, from the Bid Express Service and shortly thereafter publicly read on the Sixth Floor for:

Bridge Replacements on SR 178 between Potts Camp and Myrtle, Bridge Nos. 47.1, 50.9, & 51.3, known as Federal Aid Project No. BR-2905-00(001) / 103328301 in Benton County.

The attention of bidders is directed to the Contract Provisions governing selection and employment of labor. Minimum wage rates have been predetermined by the Secretary of Labor and are subject to Public Law 87-581, Work Hours Act of 1962, as set forth in the Contract Provisions.

The Mississippi Department of Transportation hereby notifies all bidders that it will affirmatively insure that in any contract entered into pursuant to this advertisement, disadvantaged business enterprises will be afforded full opportunity to submit bids in response to this invitation and will not be discriminated against on the grounds of race, color, sex, age, disability, religion or national origin in consideration for an award.

## The award of this contract will be contingent upon the Contractor satisfying the DBE requirements.

Contractors may request permission to bid online at <a href="http://shopmdot.ms.gov">http://shopmdot.ms.gov</a> at no cost. Upon approval, Contractors shall be eligible to submit a bid using Bid Express at <a href="http://bidx.com">http://bidx.com</a>. Specimen proposals may be viewed and downloaded online at no cost at <a href="http://mdot.ms.gov">http://mdot.ms.gov</a> or purchased online at <a href="http://shopmdot.ms.gov">http://shopmdot.ms.gov</a> at a cost of Ten Dollars (\$10.00) per proposal plus a small convenience fee. <a href="Cash or checks will not be accepted as payment">Cash or checks will not be accepted as payment</a>.

Plans must be purchased online at <a href="https://shopmdot.ms.gov">https://shopmdot.ms.gov</a>. Costs of plans will be on a per sheet basis plus a small convenience fee. If you have any questions, you can contact the MDOT Plans Print Shop at (601) 359-7460, or e-mail at <a href="mailto:plans@mdot.state.ms.us">plans will be shipped upon receipt of payment.</a>. Cash or checks will not be accepted as payment.

Bid bond, signed or countersigned by a Mississippi Agent or Qualified Nonresident Agent, with Power of Attorney attached, a Cashier's check or Certified Check for five (5%) percent of bid, payable to STATE OF MISSISSIPPI, must accompany each proposal.

The attention of bidders is directed to the provisions of Subsection 102.07 pertaining to irregular proposals and rejection of bids.

MELINDA L. MCGRATH EXECUTIVE DIRECTOR

SECTION 904 - NOTICE TO BIDDERS NO. 1 CODE: (IS)

**DATE:** 03/01/2017

**SUBJECT:** Governing Specifications

The current (2017) Edition of the Standard Specifications for Road and Bridge Construction adopted by the Mississippi Transportation Commission is made a part hereof fully and completely as if it were attached hereto, except where superseded by special provisions, or amended by revisions of the Specifications contained within this proposal. Copies of the specification book may be purchased from the MDOT Construction Division, or online at <a href="mailto:shopmdot/default.aspx?StoreIndex=1.">shopmdot/default.aspx?StoreIndex=1.</a>

A reference in any contract document to controlling requirements in another portion of the contract documents shall be understood to apply equally to any revision or amendment thereof included in the contract.

In the event the plans or proposal contain references to the 2004 Edition of the Standard Specifications for Road and Bridge Construction, it is to be understood that such references shall mean the comparable provisions of the 2017 Edition of the Standard Specifications.

SECTION 904 - NOTICE TO BIDDERS NO. 2 CODE: (IS)

**DATE:** 03/01/2017

**SUBJECT:** Status of Right-of-Way

Although it is desirable to have acquired all rights-of-way and completed all railroad agreements, utility adjustments and work to be performed by others prior to receiving bids, sometimes it is not considered to be in the public interest to wait until each and every such clearance has been obtained. The bidder is hereby advised of possible unacquired rights-of-way, relocates, railroad agreements and utilities adjustments which have not been completed.

The status of right-of-way acquisition, utility adjustments, encroachments, potentially contaminated sites, railroad facilities, improvements, and asbestos contamination are set forth in the following attachments.

In the event right of entry is not available to <u>ALL</u> parcels of right-of-way and/or all work that is to be accomplished by others on the date set forth in the contract for the Notice to Proceed is not complete, the Department will issue a restricted Notice to Proceed.

#### STATUS OF RIGHT-OF-WAY

BR-2905-00(001) 103328/301000 Benton County March 19, 2019

All rights of way and legal rights of entry have been acquired,  $\underline{except}$ :

None

# ASBESTOS CONTAMINATION STATUS OF BUILDINGS TO BE REMOVED BY THE CONTRACTOR BR-2905-00(001) 103328-301000 Benton County January 2, 2019

Reference is made to notices to bidders entitled "Asbestos National Emission Standards for Hazardous Air Pollutants (NESHAP)" and "Removal of Obstructions".

The following pertinent information is furnished concerning asbestos containing materials (ACMs), if any, found in buildings to be removed by the Contractor.

There are no buildings in the contract to be removed.

STATUS OF POTENTIALLY CONTAMINATED SITES
BR-2905-00(001)
103328-301000
Benton County
January 2, 2019

This project has been inspected and there was no visible indication of potentially contaminated sites within the proposed right of way.

#### Inter-Departmental Memorandum

TO:

ROW DIVISION

Trudi Loflin

**DATEMarch** 18, 2019

FROM:

Tony Sheffield

subject or project no.  $$\operatorname{BR-2905-00}(001)$$ 

COUNTY: Benton

District 2 Construction Engineer 65 File

> Wooley (73-01) Shows (84-01)

- 1. STATUS OF RIGHT OF WAY: All ROW for Construction has been acquired.
- 2. RIGHT OF WAY CLEARANCE: There are no encroachments on the ROW.
- 3. STATUS OF AFFECTED RAILROAD OPERATIN FACILITIES. None Affected.
- 4. STATUS OF REQUIRED UTILITU LOCATIONS: No utility conflicts.
- 5. STATUS OF CONSTRUCTION AGREEMENT: None required.

Improvements to be included in Notice to Bidders to be removed by the Construction Contractor

FMS Construction Project No: 103328-301000 FMS ROW Project No: 103328-201000 External ROW No: BR-2905-00(001)

Parcel No: Station No: Property Owner: Description/Pictures:

#### NA

#### **SECTION 904 - NOTICE TO BIDDERS NO. 3**

CODE: (SP)

**DATE:** 01/17/2017

**SUBJECT:** Final Clean-Up

Immediately prior to final inspection for release of maintenance, the Contractor shall pick up, load, transport and properly dispose of all litter from the entire highway right-of-way that is within the termini of the project.

Litter shall include, but not be limited to, solid wastes such a glass, paper products, tires, wood products, metal, synthetic materials and other miscellaneous debris.

Litter removal is considered incidental to other items of work and will not be measured for separate payment.

CODE: (SP)

SECTION 904 - NOTICE TO BIDDERS NO. 6

**DATE:** 01/17/2017

**SUBJECT:** Storm Water Discharge Associated with Construction Activity

 $(\geq 5 \text{ Acres})$ 

**PROJECT:** BR-2905-00(001) / 103328301 – Benton County

A Construction Storm Water General NPDES Permit to discharge storm water associated with construction activity is required.

The Department has acquired Certificate of Permit Coverage MSR-107904 under the Mississippi Department of Environmental Quality's (MDEQ) Storm Water Large Construction General Permit. Projects issued a certificate of permit coverage are granted permission to discharge treated storm water associated with construction activity into State waters. Copies of said permit, completed Large Construction Notice of Intent (LCNOI), and Storm Water Pollution Prevention Plan (SWPPP) are on file with the Department.

Prior to the execution of the contract, the successful bidder shall execute and deliver to the Executive Director an original signed copy of the completed Prime Contractor Certification Forms.

Failure of the bidder to execute and file the completed Prime Contractor Certification Forms shall be just cause for the cancellation of the award.

The executed Prime Contractor Certification Forms shall be prima facie evidence that the bidder has examined the permit, is satisfied as to the terms and conditions contained therein, and that the bidder has the primary responsibility for meeting all permit terms including, but not limited to, the inspection and reporting requirements. For this project, the Contractor shall furnish, set up and read, as needed, an on-site rain gauge.

The Contractor shall make inspections in accordance with condition No. S-5, page 23, and shall furnish the Project Engineer with the results of each weekly inspection as soon as possible following the date of inspection. A copy of the inspection form is provided with the packet. The weekly inspections must be documented monthly on the Inspection and Certification Form. The Contractor's representative and the Project Engineer shall jointly review and discuss the results of the inspections so that corrective action can be taken. The Project Engineer shall retain copies of the inspection reports.

The Engineer will have the authority to suspend all work and/or withhold payments for failure of the Contractor to carry out provisions of MDEQ's Storm Water Construction General Permit, the erosion control plan, updates to the erosion control plan, and /or proper maintenance of the BMPs.

Upon successful completion of all permanent erosion and sediment controls, accepted and documented by the full maintenance release, the Construction Division shall submit a completed Request for Termination (RFT) of Coverage to the Office of Pollution Control.

Securing a permit (s) for storm water discharge associated with the Contractor's activity on any other regulated area the Contractor occupies, shall be the responsibility of the Contractor.

#### SUPPLEMENT TO NOTICE TO BIDDERS NO. 7

**DATE:** 01/17/2017

The goal is <u>4</u> percent for the Disadvantaged Business Enterprise. The low bidder is required to submit Form OCR-481 for all DBEs. Bidders are advised to check the bid tabulation link for this project on the MDOT website at:

http://sp.gomdot.com/Contract%20Administration/BidSystems/Pages/letting%20calendar.aspx

Bid tabulations are usually posted by 3:00 pm on Letting Day.

CODE: (IS)

#### **SECTION 904 - NOTICE TO BIDDERS NO. 7**

**DATE:** 03/01/2017

**SUBJECT:** Disadvantaged Business Enterprises In Federal-Aid Highway Construction

This contract is subject to the "Moving Ahead for Progress in the 21st Century Act (MAP-21)" and applicable requirements of "Part 26, Title 49, Code of Federal Regulations". Portions of the Act are set forth in this Notice as applicable to compliance by the Contractor and all of the Act, and the MDOT DBE Program, is incorporated by reference herein.

The Department has developed a Disadvantaged Business Enterprise Program that is applicable to this contract and is made a part thereof by reference.

Copies of the program may be obtained from:

Office of Civil Rights Mississippi Department of Transportation P. O. Box 1850 Jackson, Mississippi 39215-1850

#### **POLICY**

It is the policy of the Mississippi Department of Transportation to provide a level playing field, to foster equal opportunity in all federally assisted contracts, to improve the flexibility of the DBE Program, to reduce the burdens on small businesses, and to achieve that amount of participation that would be obtained in a non-discriminatory market place. In doing so, it is the policy of MDOT that there will be no discrimination in the award and performance of federally assisted contracts on the basis of race, color, sex, age, religion, national origin, or any handicap.

#### ASSURANCES THAT CONTRACTORS MUST TAKE

MDOT will require that each contract which MDOT signs with a sub-recipient or a Contractor, and each subcontract the Prime Contractor signs with a Subcontractor, includes the following assurances:

"The Contractor, sub-recipient or Subcontractor shall not discriminate on the basis of race, color, national origin, or sex in the performance of this contract. The Contractor shall carry out applicable requirements of 49 CFR 26 in the award and administration of federally assisted contracts. Failure by the Contractor to carry out these requirements is a material breach of this contract, which may result in the termination of this contract or such other remedy as MDOT deems appropriate."

#### **DEFINITIONS**

For purposes of this provision the following definitions will apply:

"Disadvantaged Business" means a small business concern: (a) which is at least 51 percent owned by one or more socially and economically disadvantaged individual(s) or in the case of any publicly owned business, at least 51 percent of the stock of which is owned by one or more socially and economically disadvantaged individual(s); and (b) whose management and daily business operations are controlled by one or more of the socially and economically disadvantaged individual(s) who own it. It is important to note that the business owners themselves must control the operations of the business. Absentee ownership or title ownership by an individual who does not take an active role in controlling the business is not consistent with eligibility as a DBE under CFR 49 Part 26.71.

#### **CONTRACTOR'S OBLIGATION**

The Contractor and all Subcontractors shall take all necessary and reasonable steps to ensure that DBE firms can compete for and participate in the performance of a portion of the work in this contract and shall not discriminate on the basis of race, color, national origin, religion or sex. Failure on the part of the Contractor to carry out the DBE requirements of this contract constitutes a breach of contract and after proper notification the Department may terminate the contract or take other appropriate action as determined by the Department.

When a contract requires a zero percent (0%) DBE goal, the Contractor still has the responsibility to take all necessary and reasonable steps to ensure that DBE firms can compete for and participate in the performance of the work in the contract. In this case, all work performed by a certified DBE firm is considered to be a "race neutral" measure and the Department will receive DBE credit towards the overall State goals when the DBE firm is paid for their work. If the Prime Contractor is a certified DBE firm, the Department can receive DBE credit only for the work performed by the Prime Contractor's work force or any work subcontracted to another DBE firm. Work performance by a non-DBE Subcontractor is not eligible for DBE credit.

#### **CONTRACT GOAL**

The goal for participation by DBEs is established for this contract in the attached Supplement. The Contractor shall exercise all necessary and reasonable steps to ensure that participation is equal to or exceeds the contract goal.

If the percentage of the contract that is proposed for DBEs is 1% or greater, the Contractor shall agree to meet or exceed the contract goal on the last bid sheet of the proposal.

The apparent lowest responsive bidder shall submit to the Office of Civil Rights Form OCR-481, signed by the Prime Contractor and the DBE Subcontractors, no later than the 3<sup>rd</sup> business day after opening of the bids.

Form OCR-481 is available on the MDOT website at GoMDOT.com, then Divisions, Civil Rights, Forms, DBE, MDOT Projects, or by calling 601-359-7466.

The OCR-481 Form must contain the following information:

The name and address of each certified DBE Contractor / Supplier;

The Reference Number, percent of work and the dollar amount of each item. If a portion of an item is subcontracted, a breakdown of that item including quantities and unit price must be attached, detailing what part of the item the DBE firm is to perform and who will perform the remainder of the item.

If the DBE Commitment shown on the last bid sheet of the proposal, does not equal or exceed the contract goal, the bidder must submit, to MDOT Contract Administration Division prior to bid opening, information to satisfy the Department that adequate good faith efforts have been made to meet the contract goal.

Failure of the lowest bidder to furnish acceptable proof of good faith efforts, <u>submitted to MDOT Contract Administration Division prior to bid opening</u>, shall be just cause for rejection of the proposal. Award may then be made to the next lowest responsive bidder or the work may be readvertised.

The following factors are illustrative of matters the Department will consider in judging whether or not the bidder has made adequate good faith effort to satisfy the contract goal.

- (1) Whether the bidder attended the pre-bid meeting that was scheduled by the Department to inform DBEs of subcontracting opportunities;
- (2) Whether the bidder advertised in general circulation, trade association, and minority-focus media concerning the subcontracting opportunities;
- (3) Whether the bidder provided written notice to a reasonable number of specific DBEs that their interest in the contract is being solicited;
- (4) Whether the bidder followed up initial solicitations of interest by contacting DBEs to determine with certainty whether they were interested;
- (5) Whether the bidder selected portions of the work to be performed by DBEs in order to increase the likelihood of meeting the contract goal;
- (6) Whether the bidder provided interested DBEs with adequate information about the plans, specifications and requirements of the contract;
- (7) Whether the bidder negotiated in good faith with interested DBEs and did not reject them as unqualified without sound reasons based on a thorough investigation of their capabilities; and
- (8) Whether the bidder made efforts to assist interested DBEs in obtaining any required bonding or insurance.
- (9) Whether the bidder has written notification to certified DBE Contractors soliciting subcontracting for items of work in the contract.
- (10) Whether the bidder has a statement of why an agreement was not reached.

The bidder's execution of the signature portion of the proposal shall constitute execution of the following assurance:

The bidder hereby gives assurance pursuant to the applicable requirements of "Moving Ahead for Progress in the 21<sup>st</sup> Century Act (MAP-21)" and applicable requirements of "Part 26, Title 49, Code of Federal Regulations" that the bidder has made a good faith effort to meet the contract goal for DBE participation for which this proposal is submitted.

#### **DIRECTORY**

A list of "Certified DBE Contractors" which have been certified as such by the Mississippi Department of Transportation and other Unified Certification Partners (UPC) can be found on the Mississippi Department of Transportation website at <a href="www.gomdot.com">www.gomdot.com</a>. The list is in the top left corner of the current Letting Calendar under Contracts & Letting. The DBE firm must be certified at the time the project is let and approved by MDOT to count towards meeting the DBE goal.

#### **REPLACEMENT**

If a DBE Subcontractor cannot perform satisfactorily, and this causes the OCR-481 commitment to fall below the contract goal, the Contractor shall take all necessary reasonable steps to replace the DBE with another certified DBE Subcontractor or submit information to satisfy the Mississippi Department of Transportation that adequate good faith efforts have been made to replace the DBE. The replacement DBE must be a DBE who was on the Department's list of "Certified DBE Contractors" when the job was let, and who is still active. All DBE replacements must be approved by the Department.

Under no circumstances shall the <u>Prime</u> or any Subcontractor perform the DBE's work (as shown on the OCR-481) without prior written approval from the Department. See "Sanctions" at the end of this document for penalties for performing DBE's work.

When a Contractor proposes to substitute/replace/terminate a DBE that was originally named on the OCR-481, the Contractor must obtain a release, in writing, from the named DBE explaining why the DBE Subcontractor cannot perform the work. A copy of the original DBE's release must be attached to the Contractor's written request to substitute/replace/terminate along with appropriate Subcontract Forms for the substitute/replacement/terminated Subcontractor, all of which must be submitted to the DBE Coordinator and approved, in advance, by MDOT.

#### **GOOD FAITH EFFORTS**

To demonstrate good faith efforts to replace any DBE that is unable to perform successfully, the Contractor must document steps taken to subcontract with another certified DBE Contractor. Such documentation shall include no less than the following:

(1) Proof of written notification to certified DBE Contractors by certified mail that their interest is solicited in subcontracting the work defaulted by the previous DBE or in subcontracting other items of work in the contract.

- (2) If the Prime Contractor is a certified DBE firm, only the value of the work actually performed by the DBE Prime can be counted towards the project goal, along with any work subcontracted to a certified DBE firm.
- (3) If the Contractor is not a DBE, the work subcontracted to a certified DBE Contractor will be counted toward the goal.
- (4) The Contractor may count toward the goal a portion of the total dollar value of a contract with a joint venture eligible under the standards of this provision equal to the percentage of the DBE partner in the joint venture.
- (5) Expenditures to DBEs that perform a commercially useful function may be counted toward the goal. A business is considered to perform a commercially useful function when it is responsible for the execution of a distinct element of the work and carries out its responsibilities by actually performing, managing, and supervising the work involved.
- (6) The Contractor may count 100% of the expenditures for materials and supplies obtained from certified DBE suppliers and manufacturers that produce goods from raw materials or substantially alters them for resale provided the suppliers and manufacturers assume the actual and contractual responsibility for the provision of the materials and supplies. The Contractor may count sixty percent (60%) of the expenditures to suppliers that are not manufacturers, provided the supplier performs a commercially useful function in the supply process. Within 30 days after receipt of the materials, the Contractor shall furnish to the DBE Coordinator invoices from the certified supplier to verify the DBE goal.
- (7) Any work that a certified DBE firm subcontracts or sub-subcontracts to a non-DBE firm will not count towards the DBE goal.
- (8) Only the dollars <u>actually paid</u> to the DBE firm may be counted towards the DBE goal.

Failure of the Contractor to demonstrate good faith efforts to replace a DBE Subcontractor that cannot perform as intended with another DBE Subcontractor, when required, shall be a breach of contract and may be just cause to be disqualified from further bidding for a period of up to 12 months after notification by certified mail.

#### **PRE-BID MEETING**

A pre-bid meeting will be held in Amphitheater 1 & 2 of the Hilton Jackson located at I-55 and County Line Road, Jackson, Mississippi at 2:00 P.M. on the day preceding the date of the bid opening.

This meeting is to inform DBE firms of subcontracting and material supply opportunities. Attendance at this meeting is considered of prime importance in demonstrating good faith effort to meet the contract goal.

#### PARTICIPATION / DBE CREDIT

Participation shall be counted toward meeting the goal in this contract as follows:

- (1) If the Prime Contractor is a certified DBE firm, only the value of the work actually performed by the DBE Prime can be counted towards the project goal, along with any work subcontracted to a certified DBE firm.
- (2) If the Contractor is not a DBE, the work subcontracted to a certified DBE Contractor will be counted toward the goal.
- (3) The Contractor may count toward the goal a portion of the total dollar value of a contract with a joint venture eligible under the standards of this provision equal to the percentage of the DBE partner in the joint venture.
- (4) Expenditures to DBEs that perform a commercially useful function may be counted toward the goal. A business is considered to perform a commercially useful function when it is responsible for the execution of a distinct element of the work and carries out its responsibilities by actually performing, managing, and supervising the work involved.
- (5) The Contractor may count 100% of the expenditures for materials and supplies obtained from certified DBE suppliers and manufacturers that produce goods from raw materials or substantially alters them for resale provided the suppliers and manufacturers assume the actual and contractual responsibility for the provision of the materials and supplies. The Contractor may count sixty percent (60%) of the expenditures to suppliers that are not manufacturers, provided the supplier performs a commercially useful function in the supply process. Within 30 days after receipt of the materials, the Contractor shall furnish to the DBE Coordinator invoices from the certified supplier to verify the DBE goal.
- (6) Any work that a certified DBE firm subcontracts or sub-subcontracts to a non-DBE firm <u>will</u> <u>not</u> count towards the DBE goal.
- (7) Only the dollars <u>actually paid</u> to the DBE firm may be counted towards the DBE goal. The participation of a DBE Firm cannot be counted towards the Prime Contractor's DBE goal until the amount being counted towards the goal has been paid to the DBE.

#### **AWARD**

Award of this contract to the low bidder will be contingent upon the following conditions:

- (1) Concurrence from Federal Highway Administration, when applicable.
- (2) Bidder must submit to the Office of Civil Rights for approval, Form OCR-481 (DBE Commitment) no later than the 3<sup>rd</sup> business day after opening of the bids to satisfy the Department and that <u>adequate good faith efforts</u> have been made to meet the contract goal. For answers to questions regarding Form OCR-481, contact the MDOT Office of Civil Rights at (601) 359-7466.
- (3) Bidder must include OCR-485 information with their bid proposal listing all firms that submitted quotes for material supplies or items to be subcontracted. OCR-485 information

must be included with the bid proposal. If the OCR-485 information is not included as part of bid proposal, your bid will be deemed irregular.

Prior to the start of any work, the bidder must notify the Project Engineer, in writing, of the name of the designated "DBE Liaison Officer" for this project. This notification must be posted on the bulletin board at the project site.

#### **DEFAULT**

If the <u>contract goal established</u> by MDOT in this proposal is 1% or greater, it must be met to fulfill the terms of the contract. The Contractor may list DBE Subcontractors and items that exceed MDOT's contract goal, but should unforeseen problems arise that would prevent a DBE from completing its total commitment percentage, the Contractor <u>will</u> meet the terms of the contract as long as it <u>meets</u> or <u>exceeds MDOT's Contract Goal</u>. For additional information, refer to "Replacement" section of this Notice.

#### **DBE REPORTS**

- (1) OCR-481: Refer to "CONTRACT GOAL" section of this Notice to Bidders for information regarding this form.
- (2) OCR-482: At the conclusion of the project, before the final estimate is paid and the project is closed out, the Prime Contractor will submit to the Project Engineer for verification of quantities and further handling Form OCR-482 whereby the Contractor certifies to the amounts of payments made to all Contractors / Suppliers over the life of the contract. The Project Engineer shall submit the completed Form OCR-482 to the DBE Coordinator (Office of Civil Rights). Final acceptance of the project is dependent upon Contract Administration Division's receipt of completed Form OCR-482 which they will receive from the Office of Civil Rights.
- (3) OCR-483: The Project Engineer/Inspector will complete Form OCR-483, the Commercially Useful Function (CUF) Performance Report, in accordance with MDOT S.O.P. No. OCR-03-09-01-483. Evaluations reported on this form are used to determine whether or not the DBE firm is performing a CUF. The Prime Contractor should take corrective action when the report contains any negative evaluations. DBE credit may be disallowed and/or other sanctions imposed if it is determined the DBE firm is not performing a CUF. This form should also be completed and returned to the DBE Coordinator (Office of Civil Rights).
- (4) OCR-484: Each month, the Prime Contractor will submit to the Project Engineer OCR-484 that certifies payments to all Subcontractors and shows all firms even if the Prime Contractor has paid no monies to the firm during that estimate period (negative report). The Project Engineer will attach the form to the monthly estimate before forwarding to the Contract Administration Division for further processing. Failure of the Contractor to submit the OCR-484 will result in the estimate not being processed and paid.

- (5) OCR-485: <u>ALL BIDDERS</u> must submit <u>signed form with bid proposal</u> of all firms that submitted quotes for material supplies or items to be subcontracted. If the OCR-485 information is not included as part of bid proposal, the bid will be deemed irregular.
- (6) OCR-487: Only used by Prime Contractors that are certified DBE firms. This form is used in determining the exact percentage of DBE credit for the specified project. It should be returned to MDOT with the OCR-481 form, or can also be returned with the Permission to Subcontract Forms (CAD-720, CAD-725 and CAD-521).

DBE Forms, can be obtained from the Office of Civil Rights Division, MDOT Administration Building, 401 North West Street, Jackson, MS, or at www.gomdot.com under Divisions, Civil Rights, and Forms.

#### **SANCTIONS**

The Department has the option to enforce any of the following penalties for failure of the Prime Contractor to fulfill the DBE goal as stated on the OCR-481 form or any violations of the DBE program guidelines:

- (1) Disallow credit towards the DBE goal
- (2) Withhold progress estimate payments
- (3) Deduct from the final estimate or recover an amount equal to the unmet portion of the DBE goal which may include additional monetary penalties as outlined below based on the number of offenses and the severity of the violation as determined by MDOT.

| 1 <sup>st</sup> Offense | 10% of unmet portion of goal | or | \$5,000 lump sum payment     | or | Both                                    |
|-------------------------|------------------------------|----|------------------------------|----|---|
| 2 <sup>nd</sup> Offense | 20% of unmet portion of goal | or | \$10,000 lump<br>sum payment | or | Both                                    |
| 3 <sup>rd</sup> Offense | 40% of unmet portion of goal | or | \$20,000 lump<br>sum payment | or | \$20,000 lump sum payment and debarment |

(4) Debar the Contractor involved from bidding on MDOT federally funded projects.

SECTION 904 - NOTICE TO BIDDERS NO. 9

CODE: (IS)

**DATE:** 03/01/2017

**SUBJECT:** Federal Bridge Formula

Bidders are hereby advised that the latest revision of Federal Highway Administration Publication No. FHWA-HOP-06-105, **BRIDGE FORMULA WEIGHTS**, dated August 2006, is made a part of this contract when applicable.

Prior to the preconstruction conference, the Contractor shall advise the Engineer, in writing, what materials, if any, will be delivered to the jobsite via Interstate route(s).

Copies of the **BRIDGE FORMULA WEIGHTS** publication may be obtained by contacting:

Federal Highway Administration 400 7<sup>th</sup> Street, SW Washington, DC 20590 (202) 366-2212

or

http://www.ops.fhwa.dot.gov/Freight/publications/brdg frm wghts/bridge formula all rev.pdf

An on line BRIDGE FORMULA WEIGHTS CALCULATOR is available at

http://ops.fhwa.dot.gov/freight/sw/brdgcalc/calc\_page.htm

CODE: (SP)

#### **SECTION 904 - NOTICE TO BIDDERS NO. 14**

**DATE:** 01/17/2017

**SUBJECT:** Railway-Highway Provisions

Prior to bidding, the Contractor shall contact the Railroad concerning insurance coverage required for this project. In case the railroad requires coverage over and above that required by the Standard Specifications, the railroad requirements shall be met.

The name insured, description of the work and designation of the job site to be shown on the Policy are as follows:

Notice of starting to work, completion of any required forms, and correspondence pertaining to railroad liability insurance shall be directed to the person below.

The Contractor shall not commence, or carry on, any work for installation, maintenance, repair, changing or renewal of any FACILITY, under, over or on RAILROAD property at any location without giving at least ten (10) working days prior notice to the RAILROAD authorized representative at the RAILROAD's office(s) below.

If in the opinion of the RAILROAD, the presence of an authorized representative of the RAILROAD is required to supervise the same, the RAILROAD shall render bills to the Contractor for all expenses incurred by it for such supervision. This includes all labor costs for flagmen or cable locate supplied by the RAILROAD to protect RAILROAD operation, and for the full cost of furnishing, installation and later removal of any temporary supports for said tracks, as the RAILROAD's Chief Engineer's Office may deem necessary.

It will be the Contractor's responsibility to pay all bills associated with railroad flagging and cable locating. Generally, the flagging rate is \$700.00 per day (1 to 8 hours) plus overtime at \$125.00 per hour, however, the Contractor shall contact the RAILROAD to verify all rates.

A flagman is required anytime a Contractor does any work on or near RAILROAD property within twenty-five (25) feet horizontally of the centerline or any work over any railroad track. The RAILROAD, however, also reserves the right to require a flagman for work on RAILROAD property, which is more than twenty-five (25) feet from the centerline of a railroad track when there are other conditions or considerations that would dictate the need for a flagman to safeguard the RAILROAD's operations, property and safety of working personnel.

A cable locate of RAILROAD owned facilities may be required to identify and protect Signal & Communication cables that have been installed to provide power, signal control, wayside communications. These cables are vital to a safe and reliable railway operation. The cable locate will be performed by a qualified RAILROAD employee.

Outside Contractors are prohibited from driving on, along, or across <u>any</u> track that does not have a RAILROAD installed crossing. They may utilize an existing public crossing. The practice of allowing rubber tired equipment to operate over track with no crossing has been banned.

Exceptions to this rule will require the express approval from the RAILROAD Engineers.

SECTION 904 - NOTICE TO BIDDERS NO. 21 CODE: (SP)


**DATE:** 03/01/2017

**SUBJECT: Intermediate Concrete Diaphragms** 

Bidders are advised that the bridge plans for this project indicates that intermediate concrete diaphragms are required between the beams. If the bridge is designed using Load and Resistance Factor Design (LRFD), the intermediate concrete diaphragms may be eliminated at the Contractor's option. If the Contractor desires to make this change, a written request shall be sent to the Project Engineer who will forward it to the Bridge Division for concurrence. If eliminated, any concrete and reinforcement shown on the plans for intermediate diaphragms will not be included in the measurement and payment of concrete and reinforcement.

If the intermediate concrete diaphragms are eliminated, the Contractor shall temporarily brace the beams in accordance with the attached detail sheet.

This bracing shall be addressed in the Contractor's written request to eliminated intermediate diaphragms.

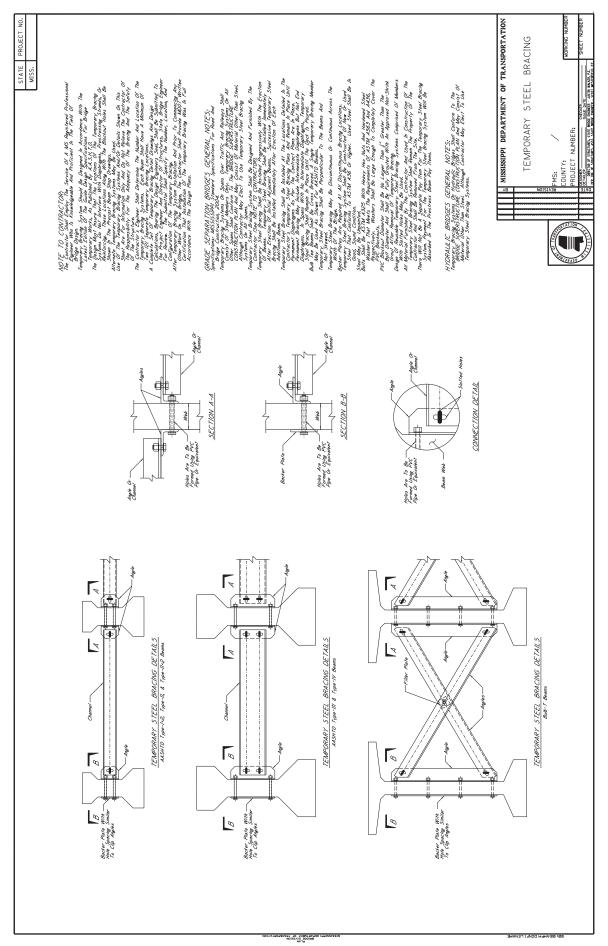

CODE: (SP)

#### **SECTION 904 - NOTICE TO BIDDERS NO. 113**

04/18/2017

**SUBJECT:** Tack Coat

Bidders are advised that in addition to the products listed on the Department's APL as referenced in Subsection 401.03.1.2 on page 256, the Contractor may use one of the following as a tack coat.

• CSS-1

**DATE:** 

- CSS-1h
- SS-1
- SS-1h

SECTION 904 - NOTICE TO BIDDERS NO. 114 CODE: (SP)

**DATE:** 04/18/2017

**SUBJECT:** Right-of-Way Plat

Bidders are advised that pay item 617-A, Right-of-Way Marker not only addresses the requirements for furnishing and placing right-of-way markers but also includes the preparation and submittal of a ROW Plat by a Licensed Professional Surveyor. Since the submittal of the plat is considered a part of the pay item and the pay item is not complete until the plat is received, contract time will not be suspended while waiting on the Contractor to submit the plat.

SECTION 904 - NOTICE TO BIDDERS NO. 296 CODE: (SP)

**DATE:** 07/25/2017

**SUBJECT:** Reduced Speed Limit Signs

Bidders are advised that when the plans or contract documents require the speed limit on a project to be reduced, the Contractor shall begin work within 48 hours of installing the reduced speed limit signs. Should the Contractor not start work or have no plans to start work within 48 hours of installing the signs, the reduced speed limit signs shall be covered and existing speed limit signs uncovered.

SECTION 904 - NOTICE TO BIDDERS NO. 445 CODE: (SP)

**DATE:** 10/10/2017

SUBJECT: Mississippi Agent or Qualified Nonresident Agent

Bidders are hereby advised of the requirements of Subsections 102.08, 103.05.2, and 107.14.2.1 of the 2017 Standard Specifications for Road and Bridge Construction as it refers to bonding agents. Proposal guaranties, bonds, and liability insurance policies must be signed by a **Mississippi Agent or Qualified Nonresident Agent.** 

SECTION 904 - NOTICE TO BIDDERS NO. 516 CODE: (IS)

**DATE:** 11/28/2017

#### **SUBJECT:** Errata and Modifications to the 2017 Standard Specifications

| <u>Page</u> | Subsection | <u>Change</u>  |
|-------------|------------|--|
| 16          | 102.06     | In the seventh full paragraph, change "Engineer" to "Director."  |
| 33          | 105.05.1   | In the sixth sentence, change "Contract Administration Engineer" to "Contract Administration Director."  |
| 34          | 105.05.2.1 | In subparagraph 2, change "SWPPP, ECP" to "SWPPP and the ECP"  |
| 35          | 105.05.2.2 | In subparagraphs 2, add " and" to the end of the sentence. In subparagraph 3, remove ", and" and add ".".  |
| 90          | 109.04.2   | In the last paragraph of subparagraph (a), place a period "." at the end of the sentence.  |
| 93          | 109.04.2   | In the last paragraph of subparagraph (g), place a period "." at the end of the sentence. Also, in the first paragraph of subparagraph (h), place a period "." at the end of the sentence. |
| 97          | 109.07     | Under ADJUSTMENT CODE, subparagraph (A1), change "HMA mixture" to "Asphalt mixtures."  |
| 98          | 109.11     | In the third sentence, change "Engineer" to "Director."  |
| 219         | 308.04     | In the last sentence of the last paragraph, change "Contractor's decision" to "Engineer's decision."   |
| 300         | 405.02.5.9 | In the first sentence of the second paragraph, change "Hot Mix Asphalt" to "Asphalt Mixtures."   |
| 502         | 630.01.1   | In the first paragraph, change "AASHTO" to "AASHTO's LRFD".  |
| 636         | 646.05     | Change "each" to "per each" for the pay item units of payment.   |
| 640         | 656.02.6.2 | In item 7), change "down stream" to "downstream".  |
| 688         | 630.03.2   | Change the subsection number from "630.03.2" to "680.03.2."  |

| 725 | 702.08.3      | In the second sentence of the first paragraph, change "hot-mix" to "asphalt."                     |
|-----|---------------|---|
| 954 | 804.02.13.1.6 | In the definition for "M" in the % Reduction formulas, change "paragraph 7.3" to "paragraph 5.3." |

**SECTION 904 - NOTICE TO BIDDERS NO. 757** 

CODE: (IS)

**DATE:** 03/20/2018

**SUBJECT: Additional Erosion Control Requirements** 

Bidders are hereby advised of the following requirements that relate to erosion control activities on the project.

THE MAXIMUM TOTAL ACREAGE THAT CAN BE DISTURBED, AT ONE TIME, ON THE PROJECT IS NINETEEN (19) ACRES. THE CONTRACTOR SHALL BE REQUIRED TO STABILIZE DISTURBED AREAS PRIOR TO OPENING UP ADDITIONAL SECTIONS OF THE PROJECT. STABILIZED SHALL BE WHEN THE DISTURBED AREA MEETS ONE OF THE FOLLOWING CRITERIA:

- THE AREA HAS BEEN SEEDED, EITHER TEMPORARY OR PERMANENT, AND MULCHED ACCORDING TO THE SPECIFICATIONS, OR
- A CRUSHED STONE COURSE OR A LIFT OF ASPHALT PAVEMENT HAS BEEN PLACED, OR
- THE AREA HAS BEEN CHEMICALLY TREATED USING PORTLAND CEMENT OR LIME-FLY ASH, AND SEALED.

DISTURBED AREAS INCLUDE THE ROADBED, SLOPES AND REMAINING AREA OUT TO THE ROW LINE.

Clearing and Grubbing: Prior to beginning any clearing and grubbing operations on the project, controls shall be in place to address areas such as drainage structures, wetlands, streams, steep slopes and any other sensitive areas in accordance with the approved Erosion Control Plan or as directed by the Engineer. Clearing and grubbing should be limited to the minimum area necessary to construct the project. Grubbing operations should be minimized in areas outside the construction limits and stumps should be cut off flush with the existing ground elevations. A buffer area of at least fifteen (15) feet or as shown in the Plans shall be in place adjacent to the right-of-way line. The buffer area can either be the existing vegetation that is left undisturbed or re-established by planting new vegetation if clearing and grubbing was required. As applicable, see the Riparian Buffer Erosion Control sheet(s) in the Plans for clearing and grubbing limits adjacent to stream banks.

<u>Unclassified Excavation:</u> Cut sections shall be graded in accordance with the typical sections and plan grades. Permanent erosion control BMP's should be placed as soon as possible after the cut material has been moved. Fill sections that are completed shall have permanent erosion control BMP's placed. Fill sections that are not completed shall be either permanently or temporarily seeded until additional material is made available to complete these sections. All unclassified excavation on the project is be required to be moved prior to incorporating any borrow excavation. The Contractor may have to stockpile unclassified excavation in order to comply with the nineteen (19) acre requirement. No additional compensation will be made for stockpiling operations.

Disturbed areas that remain inactive for a period of more than fourteen (14) days shall be temporary grassed and mulched. Temporary grassing and mulching shall only be paid one time for a given area.

SECTION 904 - NOTICE TO BIDDERS NO. 977 CODE: (IS)

**DATE:** 07/25/2018

**SUBJECT: DUNS Requirement for Federal Funded Projects** 

Bidders are advised that the Prime Contractor must maintain a current registration in the System for Award Management (<a href="http://www.sam.gov">http://www.sam.gov</a>) at all times during this project. A Dun and Bradstreet Data Universal Numbering System (DUNS) Number (<a href="http://www.dnb.com">http://www.dnb.com</a>) is one of the requirements for registration in the System for Award Management.

Bidders are also advised that prior to the award of this contract, they <u>MUST</u> be registered, active, and have no active exclusions in the System for Award Management.

CODE: (SP)

SECTION 904 - NOTICE TO BIDDERS NO. 1206

**DATE:** 10/16/2018

**SUBJECT: MASH Compliant Devices** 

Bidders are hereby advised that the Standard Specifications may require certain traffic control and permanent safety hardware devices to meet the requirements of the Manual for Assessing Safety Hardware (MASH). However, devices meeting the requirements of NCHRP Report 350 will be allowed until the mandatory effective date for MASH compliance. The following table shows the effective dates for MASH compliant devices.

| Device   | Effective Date for MASH Compliance |
|--|------------------------------------|
| W-beam barriers, cast-in-place concrete barriers   | December 31, 2017                  |
| W-beam terminals - non-flared  | June 30, 2018                      |
| Crash cushions   | December 31, 2018                  |
| Cable barriers, cable barrier terminals, bridge rails, transitions, all other longitudinal barriers including portable barriers installed permanently, W-beam terminals - flared, all other terminals, sign supports, all other breakaway hardware | December 31, 2019                  |

Temporary work zone devices, including portable barriers manufactured after December 31, 2019, must have been successfully tested to the 2016 Edition of MASH. Such devices manufactured on or before this date and successfully tested to NCHRP Report 350 or the 2009 Edition of MASH may continue to be used throughout their normal service lives.

#### SECTION 904 - NOTICE TO BIDDERS NO. 1225 CODE: (SP)

**DATE:** 11/13/2018

**SUBJECT:** Early Notice to Proceed

Bidders are advised that if an early notice to proceed is allowed by the Department and the Contractor experiences problems or delays between the early notice to proceed date and the original notice to proceed date, this shall not be justification for any monetary compensation or an extension of contract time.

SECTION 904 - NOTICE TO BIDDERS NO. 1226 CODE: (SP)

**DATE:** 11/16/2018

**SUBJECT:** Material Storage Under Bridges

Bidders are advised that Subsection 106.08 of the Standard Specifications allows the Contractor to store materials and equipment on portions of the right-of-way. However, the Contractor will not be allowed to store or stockpile materials under bridges without written permission from the Project Engineer. The Contractor shall submit a detailed request of all proposed materials to be stored under bridges to the Engineer a minimum of 14 calendar days prior to anticipated storage. This detail shall include, but not limited to, bridge location, material type, material quantity, and duration of storage. The Project Engineer and any other needed Division will review this information and determine whether to grant approval. The Contractor shall not store any material under any bridge without written approval from the Project Engineer.

SECTION 904 - NOTICE TO BIDDERS NO. 1241 CODE: (SP)

**DATE:** 11/27/2018

**SUBJECT:** Fuel and Material Adjustments

Bidder's attention is brought to the last paragraph of Subsection 109.07 of the Standard Specifications which states that no fuel or material adjustment will be made after the completion of contract time. Any fuels consumed or materials incorporated into the work during the monthly estimate period falling wholly after the expiration of contract time will not be subject a fuel or material adjustment.

SECTION 904 - NOTICE TO BIDDERS NO. 1434 CODE: (SP)

**DATE:** 03/06/2019

**SUBJECT:** Erosion Control Plan

Bidders are advised that the Best Management Practices (BMPs) shown at sensitive areas on the Erosion Control Sheets in the Plans shall be shown on the Contractor's Erosion Control Plan and shall be used in the field as indicated on the original plans sheets. Should the installation of these BMPs produce an unsatisfactory result, the Contractor shall submit to the Engineer alternate BMPs for approval. Once approved, the Contractor shall revise the Contractor's Erosion Control Plan to include these changes.

SECTION 904 - NOTICE TO BIDDERS NO. 1513 CODE: (SP)

**DATE:** 04/05/2019

**SUBJECT:** Contract Time

**PROJECT:** BR-2905-00(001) / 103328301 – Benton County

The completion of work to be performed by the Contractor for this project will not be a specified date but shall be when all allowable working days are assessed, or any extension thereto as provided in Subsection 108.06. It is anticipated that the Notice of Award will be issued no later than <u>June 11, 2019</u> and the date for Notice to Proceed / Beginning of Contract Time will be <u>August 12, 2019</u>.

Should the Contractor request a Notice to Proceed earlier than <u>August 12, 2019</u> and it is agreeable with the Department for an early Notice to Proceed, the requested date will become the new Notice to Proceed date. Regardless of whether or not an early Notice to Proceed is granted, contract time will start at the original Notice to Proceed date.

All requests for an early Notice to Proceed shall be sent to the Project Engineer who will forward it to the Contract Administration Division.

<u>228</u> Working Days have been allowed for the completion of work on this project.

SECTION 904 - NOTICE TO BIDDERS NO. 1514

DATE: 03/26/2019

SUBJECT: Specialty Items

PROJECT: BR-2905-00(001)/103328301 - BENTON

Pursuant to the provisions of Section 108, the following work items are hereby designated as "Specialty Items" for this contract. Bidders are reminded that these items must be subcontracted in order to be considered as specialty items.

# CATEGORY: EROSION CONTROL

| Line No | Pay Item     | Description                |
|---------|--------------|----------------------------|
| 0130    | 213-C001     | Superphosphate             |
| 0140    | 216-A001     | Solid Sodding              |
| 0150    | 217-A001     | Ditch Liner                |
| 0160    | 219-A001     | Watering                   |
| 0170    | 220-A001     | Insect Pest Control        |
| 0180    | 221-A001     | Concrete Paved Ditch       |
| 0190    | 223-A001     | Mowing                     |
| 0200    | 225-A001     | Grassing                   |
| 0210    | 225-B001     | Agricultural Limestone     |
| 0220    | 225-C001     | Mulch, Vegetative Mulch    |
| 0230    | 226-A001     | Temporary Grassing         |
| 0240    | 234-A001     | Temporary Silt Fence       |
| 0250    | 234-C001     | Super Silt Fence           |
| 0260    | 236-A008     | Silt Basin, Type D         |
| 0270    | 237-A002     | Wattles, 20"               |
| 0280    | 245-A001     | Silt Dike                  |
| 0290    | 246-A001     | Sandbags                   |
| 0300    | 247-A001     | Temporary Stream Diversion |
| 0310    | 249-A001     | Riprap for Erosion Control |
| 0320    | 249-B001     | Remove and Reset Riprap    |
| 0730    | 907-253-A001 | Coir Fiber Baffle          |
|         |              |                            |

## CATEGORY: GUARDRAIL, GUIDERAIL

| Line No | Pay Item | Description                                  |
|---------|----------|--|
| 0460    | 606-B001 | Guard Rail, Class A, Type 1                  |
| 0470    | 606-D022 | Guard Rail, Bridge End Section, Type I       |
| 0480    | 606-E005 | Guard Rail, Terminal End Section, Flared     |
| 0490    | 606-E007 | Guard Rail, Terminal End Section, Non-Flared |

#### CATEGORY: PAVEMENT STRIPING AND MARKING

| Line No | Pay Item | Description  |
|---------|----------|--|
| 0620    | 626-C001 | 6" Thermoplastic Double Drop Edge Stripe, Continuous White |

# CATEGORY: PAVEMENT STRIPING AND MARKING

| Line No | Pay Item | Description   |
|---------|----------|---|
| 0630    | 626-D002 | 6" Thermoplastic Double Drop Traffic Stripe, Skip Yellow  |
| 0640    | 627-L001 | Two-Way Yellow Reflective High Performance Raised Markers |

# CATEGORY: SURVEY AND STAKING

| Line No | Pay Item | Description                 |
|---------|----------|-----------------------------|
| 0690    | 699-A001 | Roadway Construction Stakes |

# CATEGORY: TRAFFIC CONTROL - PERMANENT

| Line No | Pay Item | Description   |
|---------|----------|---|
| 0650    | 630-A003 | Standard Roadside Signs, Sheet Aluminum, 0.125" Thickness |
| 0660    | 630-C003 | Steel U-Section Posts, 3.0 lb/ft                          |
| 0670    | 630-F006 | Delineators, Guard Rail, White                            |
| 0680    | 630-G004 | Type 3 Object Markers, OM-3R or OM-3L                     |

# CATEGORY: TRAFFIC CONTROL - TEMPORARY

| Line No | Pay Item      | Description  |
|---------|---------------|--|
| 0530    | 619-A1003     | Temporary Traffic Stripe, Continuous White, Paint              |
| 0540    | 619-A4003     | Temporary Traffic Stripe, Skip Yellow, Paint                   |
| 0550    | 619-D1001     | Standard Roadside Construction Signs, Less than 10 Square Feet |
| 0560    | 619-D2001     | Standard Roadside Construction Signs, 10 Square Feet or More   |
| 0570    | 619-D3001     | Remove and Reset Signs, All Sizes                              |
| 0580    | 619-G4001     | Barricades, Type III, Double Faced                             |
| 0590    | 619-G4005     | Barricades, Type III, Single Faced                             |
| 0600    | 619-G7001     | Warning Lights, Type "B"                                       |
| 0740    | 907-619-E3001 | Changeable Message Sign  |

## SECTION 904 - NOTICE TO BIDDERS NO. 1515

CODE (SP)

**DATE:** 04/05/2019

**SUBJECT:** Placement of Fill Material in Federally Regulated Areas

**PROJECT:** BR-2905-00(001) / 103328301 – Benton County

A Permit (404, General, Nationwide, etc.) for placing fill material in federally regulated sites is required on this project.

The Department has acquired the following permits for permanently filling at regulated sites that are identified during project development:

Nationwide Permit No. 23 (Wetlands and Waters of the U.S.) -- All Sites (ID No. MVK-2019-327).

Copies of said permit(s) are available at the below referenced link for the appropriate letting date under the column titled "Permit Doc."

http://mdot.ms.gov/Applications/BidSystem/Home.aspx

The permit may have plan sheets attached as reference but these sheets are <u>not</u> to be used for construction. Official plans sheets are those included in the Project Plans.

SECTION 904 - NOTICE TO BIDDERS NO. 1516 CODE: (SP)

**DATE:** 04/09/2019

**SUBJECT:** Road Closure Restrictions

**PROJECT:** BR-2905-00(001) / 103328301 – Benton County

Bidders are hereby advised that test piles required on this project are to be driven on a bridge site prior to the roadway being closed at that site. The test piles in the abutments at Bridges A and B can be driven in one of the permanent pile locations under the endcap wing. The test pile for the intermediate bents on Bridge A will be driven out of position within 3 to 5 pile diameters of a permanent pile location. This work shall be completed and the Contractor shall take delivery of the permanent piling material prior to closing the roadway at a site.

The roadway will only be closed to thru traffic at one site at a time. The Contractor shall notify the Project Engineer, emergency services, and Benton County Board of Supervisors 30 days prior to closing a site.

SECTION 904 -NOTICE TO BIDDERS NO. 1517 CODE: (SP)

**DATE:** 4/30/2019

**SUBJECT:** Pay Item Correction

**PROJECT:** BR-2905-00(001) / 103328301 – Benton County

The Bidder's attention is called to the Summary of Quantities in the Contract Plans.

The pay item 907-899-A001 Railway-Highway Provisions Lump Sum was not included in the plans.

The Bid Sheets are correct.

General Decision Number: MS190128 01/04/2019 MS128

Superseded General Decision Number: MS20180232

State: Mississippi

Construction Type: Highway

County: Benton County in Mississippi.

HIGHWAY CONSTRUCTION PROJECTS

Note: Under Executive Order (EO) 13658, an hourly minimum wage of \$10.60 for calendar year 2019 applies to all contracts subject to the Davis-Bacon Act for which the contract is awarded (and any solicitation was issued) on or after January 1, 2015. If this contract is covered by the EO, the contractor must pay all workers in any classification listed on this wage determination at least \$10.60 per hour (or the applicable wage rate listed on this wage determination, if it is higher) for all hours spent performing on the contract in calendar year 2019. If this contract is covered by the EO and a classification considered necessary for performance of work on the contract does not appear on this wage determination, the contractor must pay workers in that classification at least the wage rate determined through the conformance process set forth in 29 CFR 5.5(a)(1)(ii) (or the EO minimum wage rate, if it is higher than the conformed wage rate). The EO minimum wage rate will be adjusted annually. Please note that this EO applies to the above-mentioned types of contracts entered into by the federal government that are subject to the Davis-Bacon Act itself, but it does not apply to contracts subject only to the Davis-Bacon Related Acts, including those set forth at 29 CFR 5.1(a)(2)-(60). Additional information on contractor requirements and worker protections under the EO is available at www.dol.gov/whd/govcontracts.

Modification Number Publication Date 0 01/04/2019

SUMS2010-051 08/04/2014

|   | Rates    | Fringes |
|---|----------|---------|
| CARPENTER (Form Work Only)              | \$ 13.75 | 0.39    |
| CEMENT MASON/CONCRETE FINISHER          | \$ 12.85 | 0.39    |
| ELECTRICIAN                             | \$ 23.78 | 7.38    |
| FENCE ERECTOR (Barbed Wire, Wood, Silt) | \$ 9.04  | 0.90    |

HIGHWAY/PARKING LOT STRIPING: Truck Driver (Line Striping

| Truck)   | \$  | 18.39 | 0.00 |
|--|---|-------|------|
| INSTALLER  | - GUARDRAIL\$                               | 12.00 | 0.00 |
| IRONWORKER   | , REINFORCING\$                             | 15.57 | 0.00 |
| Including A<br>Shoveling,<br>Concrete W<br>Checking; | and Mason Tending -                         |       |      |
| Cement/Con   | crete\$                                     | 11.26 | 0.00 |
| LABORER:   | Flagger\$                                   | 9.59  | 0.00 |
| LABORER:   | Landscape\$                                 | 9.28  | 0.90 |
| LABORER:   | Luteman\$                                   | 12.88 | 0.00 |
| LABORER:   | Pipelayer\$                                 | 12.93 | 0.00 |
| Barricades   | aborer-Cones/<br>/Barrels -<br>er/Sweeper\$ | 10.25 | 0.00 |
| OPERATOR:  | Asphalt Spreader\$                          | 14.71 | 0.00 |
| OPERATOR:<br>Backhoe/Exc                             | cavator/Trackhoe\$                          | 14.76 | 0.00 |
|  | Bobcat/Skid<br>Loader\$                     | 11.64 | 0.00 |
| OPERATOR:  | Broom/Sweeper\$                             | 12.82 | 0.00 |
| OPERATOR:  | Bulldozer\$                                 | 14.21 | 0.00 |
| OPERATOR:  | Crane\$                                     | 19.97 | 0.00 |
| OPERATOR:  | Grader/Blade\$                              | 15.00 | 0.00 |
| OPERATOR:  | Loader\$                                    | 13.54 | 0.00 |
| OPERATOR:  | Mechanic\$                                  | 20.92 | 0.00 |
| OPERATOR:  | Milling Machine\$                           | 16.20 | 0.00 |
| OPERATOR:  | Oiler\$                                     | 9.50  | 0.00 |
| OPERATOR:<br>Aggregate,                              | Paver (Asphalt, and Concrete)\$             | 11.78 | 0.00 |
| OPERATOR:  | Roller (All Types)\$                        | 13.07 | 0.00 |
| OPERATOR:  | Scraper\$                                   | 12.25 | 0.00 |
| OPERATOR:  | Tractor\$                                   | 10.78 | 0.00 |
| PILEDRIVER   | MAN\$                                       | 12.50 | 1.23 |
|  |   |       |      |

| TRUCK DRIVER: Truck | Semi/Trailer<br>\$ 15.22 | 0.00 |
|---------------------|--------------------------|------|
|                     | Dump Truck (All\$ 12.66  | 0.00 |
| TRUCK DRIVER:       | Water Truck\$ 14.49      | 0.00 |
| TRUCK DRIVER:       | Mechanic \$ 13.00        | 0.00 |
| TRUCK DRIVER:       | Lowboy Truck\$ 12.43     | 0.00 |
| TRUCK DRIVER:       | Flatbed Truck\$ 13.00    | 0.00 |

WELDERS - Receive rate prescribed for craft performing operation to which welding is incidental.

\_\_\_\_\_\_

Note: Executive Order (EO) 13706, Establishing Paid Sick Leave for Federal Contractors applies to all contracts subject to the Davis-Bacon Act for which the contract is awarded (and any solicitation was issued) on or after January 1, 2017. If this contract is covered by the EO, the contractor must provide employees with 1 hour of paid sick leave for every 30 hours they work, up to 56 hours of paid sick leave each year. Employees must be permitted to use paid sick leave for their own illness, injury or other health-related needs, including preventive care; to assist a family member (or person who is like family to the employee) who is ill, injured, or has other health-related needs, including preventive care; or for reasons resulting from, or to assist a family member (or person who is like family to the employee) who is a victim of, domestic violence, sexual assault, or stalking. Additional information on contractor requirements and worker protections under the EO is available at www.dol.gov/whd/govcontracts.

Unlisted classifications needed for work not included within the scope of the classifications listed may be added after award only as provided in the labor standards contract clauses (29CFR 5.5 (a) (1) (ii)).

\_\_\_\_\_\_

The body of each wage determination lists the classification and wage rates that have been found to be prevailing for the cited type(s) of construction in the area covered by the wage determination. The classifications are listed in alphabetical order of "identifiers" that indicate whether the particular rate is a union rate (current union negotiated rate for local), a survey rate (weighted average rate) or a union average rate (weighted union average rate).

Union Rate Identifiers

A four letter classification abbreviation identifier enclosed in dotted lines beginning with characters other than "SU" or

"UAVG" denotes that the union classification and rate were prevailing for that classification in the survey. Example: PLUM0198-005 07/01/2014. PLUM is an abbreviation identifier of the union which prevailed in the survey for this classification, which in this example would be Plumbers. 0198 indicates the local union number or district council number where applicable, i.e., Plumbers Local 0198. The next number, 005 in the example, is an internal number used in processing the wage determination. 07/01/2014 is the effective date of the most current negotiated rate, which in this example is July 1, 2014.

Union prevailing wage rates are updated to reflect all rate changes in the collective bargaining agreement (CBA) governing this classification and rate.

Survey Rate Identifiers

Classifications listed under the "SU" identifier indicate that no one rate prevailed for this classification in the survey and the published rate is derived by computing a weighted average rate based on all the rates reported in the survey for that classification. As this weighted average rate includes all rates reported in the survey, it may include both union and non-union rates. Example: SULA2012-007 5/13/2014. SU indicates the rates are survey rates based on a weighted average calculation of rates and are not majority rates. LA indicates the State of Louisiana. 2012 is the year of survey on which these classifications and rates are based. The next number, 007 in the example, is an internal number used in producing the wage determination. 5/13/2014 indicates the survey completion date for the classifications and rates under that identifier.

Survey wage rates are not updated and remain in effect until a new survey is conducted.

Union Average Rate Identifiers

Classification(s) listed under the UAVG identifier indicate that no single majority rate prevailed for those classifications; however, 100% of the data reported for the classifications was union data. EXAMPLE: UAVG-OH-0010 08/29/2014. UAVG indicates that the rate is a weighted union average rate. OH indicates the state. The next number, 0010 in the example, is an internal number used in producing the wage determination. 08/29/2014 indicates the survey completion date for the classifications and rates under that identifier.

A UAVG rate will be updated once a year, usually in January of each year, to reflect a weighted average of the current negotiated/CBA rate of the union locals from which the rate is based.

-----

#### WAGE DETERMINATION APPEALS PROCESS

1.) Has there been an initial decision in the matter? This can

be:

- \* an existing published wage determination
- \* a survey underlying a wage determination
- \* a Wage and Hour Division letter setting forth a position on a wage determination matter
- \* a conformance (additional classification and rate) ruling

On survey related matters, initial contact, including requests for summaries of surveys, should be with the Wage and Hour Regional Office for the area in which the survey was conducted because those Regional Offices have responsibility for the Davis-Bacon survey program. If the response from this initial contact is not satisfactory, then the process described in 2.) and 3.) should be followed.

With regard to any other matter not yet ripe for the formal process described here, initial contact should be with the Branch of Construction Wage Determinations. Write to:

Branch of Construction Wage Determinations Wage and Hour Division U.S. Department of Labor 200 Constitution Avenue, N.W. Washington, DC 20210

2.) If the answer to the question in 1.) is yes, then an interested party (those affected by the action) can request review and reconsideration from the Wage and Hour Administrator (See 29 CFR Part 1.8 and 29 CFR Part 7). Write to:

Wage and Hour Administrator U.S. Department of Labor 200 Constitution Avenue, N.W. Washington, DC 20210

The request should be accompanied by a full statement of the interested party's position and by any information (wage payment data, project description, area practice material, etc.) that the requestor considers relevant to the issue.

3.) If the decision of the Administrator is not favorable, an interested party may appeal directly to the Administrative Review Board (formerly the Wage Appeals Board). Write to:

Administrative Review Board U.S. Department of Labor 200 Constitution Avenue, N.W. Washington, DC 20210

4.) All decisions by the Administrative Review Board are final.

\_\_\_\_\_

END OF GENERAL DECISION

#### **SUPPLEMENT TO FORM FHWA-1273**

**DATE:** 12/17/2018

**SUBJECT:** Federal Contract Provisions for Subcontracts and Cargo Preference Act

# **Federal Contract Provisions for Subcontracts**

All subcontracts shall be in writing and contain all pertinent provisions and requirements of the prime contract.

Each "Request for Permission to Subcontract" (Mississippi Department of Transportation Form CAD-720) shall include a copy of the subcontract. The federal contract provisions (FHWA-1273, SUPPLEMENT TO FORM FHWA-1273, NOTICE OF REQUIREMENT FOR AFFIRMATIVE ACTION TO ENSURE EQUAL EMPLOYMENT OPPORTUNITY (EXECUTIVE ORDER 11246), DAVIS-BACON AND RELATED ACT PROVISIONS (WAGE RATES)) must be physically incorporated as part of the subcontract. A completed Mississippi Department of Transportation Form CAD-521 and Form CAD-725 must be attached to the CAD-720.

## **Cargo Preference Act**

The Contractor is hereby advised of the requirements set forth in the following Attachment (Title 46 - Shipping) as it pertains to the implementation of Cargo Preference Act (CPA) requirements in the Federal-aid Highway Program.

By signing this contract, the Contractor agrees to conform to the requirements of the CPA.

#### Attachment

# Title 46- Shipping

Volume: 8

Date: 2014-10-01

Original Date: 2014-10-01

Title: Section 381.7 - Federal Grant, Guaranty, Loan and Advance at Funds Agreements. Context: Title 46- Shipping. CHAPTER II- MARITIME ADMINISTRATION, DEPARTMENT OF

TRANSPORTATION. SUBCHAPTER J - MISCELLANEOUS. PART 381 - CARGO PREFERENCE-U.S.-

FLAG VESSELS.

## § 381.7 Federal Grant, Guaranty, Loan and Advance of Funds Agreements.

In order to insure a fair and reasonable participation by privately owned United States-flag commercial vessels in transporting cargoes which are subject to the Cargo Preference Act of 1954 and which are generated by U.S. Government Grant, Guaranty, Loan and/or Advance of Funds Programs, the head of each affected department or agency shall require appropriate clauses to be inserted in those Grant. Guaranty<sub>1</sub> Loan and/or Advance of Funds Agreements and all third party contracts executed between the borrower/grantee and other parties, where the possibility exists for ocean transportation of items procured, contracted for or otherwise obtained by or on behalf of the grantee, borrower, or any of their contractors or subcontractors. The clauses required by this part shall provide that at least 50 percent of the freight revenue and tonnage of cargo generated by the U.S. Government Grant, Guaranty, Loan or Advance of Funds be transported on privately owned United States-flag commercial vessels. These clauses shall also require that all parties provide to the Maritime Administration the necessary shipment information as set forth in § 381.3. A copy of the appropriate clauses required by this part shall be submitted by each affected agency or department to the Secretary, Maritime Administration, for approval no later than 30 days after the effective date of this part. The following are suggested acceptable clauses with respect to the use of United States-flag vessels to be incorporated in the Grant, Guaranty, Loan and/or Advance of Funds Agreements as well as contracts and subcontracts resulting therefrom:

- (a) Agreement Clauses. "Use of United States-flag vessels:
- "(1) Pursuant to Pub. L 664 (43 U.S.C. 1241(b)) at least 50 percent of any equipment, materials or commodities procured, contracted for or otherwise obtained with funds granted, guaranteed, loaned, or advanced by the U.S. Government under this agreement, and which may be transported by ocean vessel, shall be transported on privately owned United States-flag commercial vessels, if available.
- "(2) Within 20 days following the date of loading for shipments originating within the United States or within 30 working days following the date of loading for shipments originating outside the United States, a legible copy of a rated, 'on-board' commercial ocean bill-of-lading in English for each shipment of cargo described in paragraph (a)(1) of this section shall be furnished to both the Contracting Officer (through the prime contractor in the case of subcontractor bills-of-lading) and to the Division of National Cargo, Office of Market Development, Maritime Administration, Washington, DC 20590."
- (b) Contractor and Subcontractor Clauses. "Use of United States-flag vessels: The contractor agrees --
- "(1) To utilize privately owned United States-flag commercial vessels to ship at least 50 percent of the gross tonnage (computed separately for dry bulk carriers, dry cargo liners, and tankers) involved, whenever shipping any equipment, material, or commodities pursuant to this contract, to the extent such vessels are available at fair and reasonable rates for United States-flag commercial vessels.
- (2) To furnish within 20 days following the date of loading for shipments originating within the United

States or within 30 working days following the date of loading for shipments originating outside the United States, a legible copy of a rated, 'on-board' commercial ocean bill-of-lading in English for each shipment of cargo described in paragraph (b) (1) of this section to both the Contracting Officer (through the prime contractor in the case of subcontractor bills-of-lading) and to the Division of National Cargo, Office of Market Development, Maritime Administration, Washington, DC 20590.

"(3) To insert the substance of the provisions of this clause in all subcontracts issued pursuant to this contract."

(Reorganization Plans No.21 of 1950(64 Stat. 1273) and No. 7 of 1961 (75 Stat. 840) as amended by Pub. L 91.469 (84 Stat 1036) and Department of Commerce Organization Order 10-8 (38 FR 19707, July 23, 1973)) (42 FR 57126, Nov. 1, 1977]

# REQUIRED CONTRACT PROVISIONS FEDERAL-AID CONSTRUCTION CONTRACTS

- General
- II. Nondiscrimination
- III. Nonsegregated Facilities
- IV. Davis-Bacon and Related Act Provisions
- V. Contract Work Hours and Safety Standards Act Provisions
- VI. Subletting or Assigning the Contract
- VII. Safety: Accident Prevention
- VIII. False Statements Concerning Highway Projects
- Implementation of Clean Air Act and Federal Water Pollution Control Act
- Compliance with Governmentwide Suspension and Debarment Requirements
- XI. Certification Regarding Use of Contract Funds for Lobbying

#### **ATTACHMENTS**

A. Employment and Materials Preference for Appalachian Development Highway System or Appalachian Local Access Road Contracts (included in Appalachian contracts only)

#### I. GENERAL

1. Form FHWA-1273 must be physically incorporated in each construction contract funded under Title 23 (excluding emergency contracts solely intended for debris removal). The contractor (or subcontractor) must insert this form in each subcontract and further require its inclusion in all lower tier subcontracts (excluding purchase orders, rental agreements and other agreements for supplies or services).

The applicable requirements of Form FHWA-1273 are incorporated by reference for work done under any purchase order, rental agreement or agreement for other services. The prime contractor shall be responsible for compliance by any subcontractor, lower-tier subcontractor or service provider.

Form FHWA-1273 must be included in all Federal-aid designbuild contracts, in all subcontracts and in lower tier subcontracts (excluding subcontracts for design services, purchase orders, rental agreements and other agreements for supplies or services). The design-builder shall be responsible for compliance by any subcontractor, lower-tier subcontractor or service provider.

Contracting agencies may reference Form FHWA-1273 in bid proposal or request for proposal documents, however, the Form FHWA-1273 must be physically incorporated (not referenced) in all contracts, subcontracts and lower-tier subcontracts (excluding purchase orders, rental agreements and other agreements for supplies or services related to a construction contract).

2. Subject to the applicability criteria noted in the following sections, these contract provisions shall apply to all work performed on the contract by the contractor's own organization and with the assistance of workers under the contractor's immediate superintendence and to all work performed on the contract by piecework, station work, or by subcontract.

- 3. A breach of any of the stipulations contained in these Required Contract Provisions may be sufficient grounds for withholding of progress payments, withholding of final payment, termination of the contract, suspension / debarment or any other action determined to be appropriate by the contracting agency and FHWA.
- 4. Selection of Labor: During the performance of this contract, the contractor shall not use convict labor for any purpose within the limits of a construction project on a Federal-aid highway unless it is labor performed by convicts who are on parole, supervised release, or probation. The term Federal-aid highway does not include roadways functionally classified as local roads or rural minor collectors.

#### II. NONDISCRIMINATION

The provisions of this section related to 23 CFR Part 230 are applicable to all Federal-aid construction contracts and to all related construction subcontracts of \$10,000 or more. The provisions of 23 CFR Part 230 are not applicable to material supply, engineering, or architectural service contracts.

In addition, the contractor and all subcontractors must comply with the following policies: Executive Order 11246, 41 CFR 60, 29 CFR 1625-1627, Title 23 USC Section 140, the Rehabilitation Act of 1973, as amended (29 USC 794), Title VI of the Civil Rights Act of 1964, as amended, and related regulations including 49 CFR Parts 21, 26 and 27; and 23 CFR Parts 200, 230, and 633.

The contractor and all subcontractors must comply with: the requirements of the Equal Opportunity Clause in 41 CFR 60-1.4(b) and, for all construction contracts exceeding \$10,000, the Standard Federal Equal Employment Opportunity Construction Contract Specifications in 41 CFR 60-4.3.

Note: The U.S. Department of Labor has exclusive authority to determine compliance with Executive Order 11246 and the policies of the Secretary of Labor including 41 CFR 60, and 29 CFR 1625-1627. The contracting agency and the FHWA have the authority and the responsibility to ensure compliance with Title 23 USC Section 140, the Rehabilitation Act of 1973, as amended (29 USC 794), and Title VI of the Civil Rights Act of 1964, as amended, and related regulations including 49 CFR Parts 21, 26 and 27; and 23 CFR Parts 200, 230, and 633.

The following provision is adopted from 23 CFR 230, Appendix A, with appropriate revisions to conform to the U.S. Department of Labor (US DOL) and FHWA requirements.

1. Equal Employment Opportunity: Equal employment opportunity (EEO) requirements not to discriminate and to take affirmative action to assure equal opportunity as set forth under laws, executive orders, rules, regulations (28 CFR 35, 29 CFR 1630, 29 CFR 1625-1627, 41 CFR 60 and 49 CFR 27) and orders of the Secretary of Labor as modified by the provisions prescribed herein, and imposed pursuant to 23 U.S.C. 140 shall constitute the EEO and specific affirmative action standards for the contractor's project activities under

this contract. The provisions of the Americans with Disabilities Act of 1990 (42 U.S.C. 12101 et seq.) set forth under 28 CFR 35 and 29 CFR 1630 are incorporated by reference in this contract. In the execution of this contract, the contractor agrees to comply with the following minimum specific requirement activities of EEO:

- a. The contractor will work with the contracting agency and the Federal Government to ensure that it has made every good faith effort to provide equal opportunity with respect to all of its terms and conditions of employment and in their review of activities under the contract.
- b. The contractor will accept as its operating policy the following statement:

"It is the policy of this Company to assure that applicants are employed, and that employees are treated during employment, without regard to their race, religion, sex, color, national origin, age or disability. Such action shall include: employment, upgrading, demotion, or transfer; recruitment or recruitment advertising; layoff or termination; rates of pay or other forms of compensation; and selection for training, including apprenticeship, pre-apprenticeship, and/or on-the-job training."

- 2. EEO Officer: The contractor will designate and make known to the contracting officers an EEO Officer who will have the responsibility for and must be capable of effectively administering and promoting an active EEO program and who must be assigned adequate authority and responsibility to do so.
- 3. Dissemination of Policy: All members of the contractor's staff who are authorized to hire, supervise, promote, and discharge employees, or who recommend such action, or who are substantially involved in such action, will be made fully cognizant of, and will implement, the contractor's EEO policy and contractual responsibilities to provide EEO in each grade and classification of employment. To ensure that the above agreement will be met, the following actions will be taken as a minimum:
- a. Periodic meetings of supervisory and personnel office employees will be conducted before the start of work and then not less often than once every six months, at which time the contractor's EEO policy and its implementation will be reviewed and explained. The meetings will be conducted by the EEO Officer.
- b. All new supervisory or personnel office employees will be given a thorough indoctrination by the EEO Officer, covering all major aspects of the contractor's EEO obligations within thirty days following their reporting for duty with the contractor.
- c. All personnel who are engaged in direct recruitment for the project will be instructed by the EEO Officer in the contractor's procedures for locating and hiring minorities and women.
- d. Notices and posters setting forth the contractor's EEO policy will be placed in areas readily accessible to employees, applicants for employment and potential employees.
- e. The contractor's EEO policy and the procedures to implement such policy will be brought to the attention of employees by means of meetings, employee handbooks, or other appropriate means.

- **4. Recruitment:** When advertising for employees, the contractor will include in all advertisements for employees the notation: "An Equal Opportunity Employer." All such advertisements will be placed in publications having a large circulation among minorities and women in the area from which the project work force would normally be derived.
- a. The contractor will, unless precluded by a valid bargaining agreement, conduct systematic and direct recruitment through public and private employee referral sources likely to yield qualified minorities and women. To meet this requirement, the contractor will identify sources of potential minority group employees, and establish with such identified sources procedures whereby minority and women applicants may be referred to the contractor for employment consideration.
- b. In the event the contractor has a valid bargaining agreement providing for exclusive hiring hall referrals, the contractor is expected to observe the provisions of that agreement to the extent that the system meets the contractor's compliance with EEO contract provisions. Where implementation of such an agreement has the effect of discriminating against minorities or women, or obligates the contractor to do the same, such implementation violates Federal nondiscrimination provisions.
- c. The contractor will encourage its present employees to refer minorities and women as applicants for employment. Information and procedures with regard to referring such applicants will be discussed with employees.
- **5. Personnel Actions:** Wages, working conditions, and employee benefits shall be established and administered, and personnel actions of every type, including hiring, upgrading, promotion, transfer, demotion, layoff, and termination, shall be taken without regard to race, color, religion, sex, national origin, age or disability. The following procedures shall be followed:
- a. The contractor will conduct periodic inspections of project sites to insure that working conditions and employee facilities do not indicate discriminatory treatment of project site personnel.
- b. The contractor will periodically evaluate the spread of wages paid within each classification to determine any evidence of discriminatory wage practices.
- c. The contractor will periodically review selected personnel actions in depth to determine whether there is evidence of discrimination. Where evidence is found, the contractor will promptly take corrective action. If the review indicates that the discrimination may extend beyond the actions reviewed, such corrective action shall include all affected persons.
- d. The contractor will promptly investigate all complaints of alleged discrimination made to the contractor in connection with its obligations under this contract, will attempt to resolve such complaints, and will take appropriate corrective action within a reasonable time. If the investigation indicates that the discrimination may affect persons other than the complainant, such corrective action shall include such other persons. Upon completion of each investigation, the contractor will inform every complainant of all of their avenues of appeal.

#### 6. Training and Promotion:

a. The contractor will assist in locating, qualifying, and increasing the skills of minorities and women who are

applicants for employment or current employees. Such efforts should be aimed at developing full journey level status employees in the type of trade or job classification involved.

- b. Consistent with the contractor's work force requirements and as permissible under Federal and State regulations, the contractor shall make full use of training programs, i.e., apprenticeship, and on-the-job training programs for the geographical area of contract performance. In the event a special provision for training is provided under this contract, this subparagraph will be superseded as indicated in the special provision. The contracting agency may reserve training positions for persons who receive welfare assistance in accordance with 23 U.S.C. 140(a).
- c. The contractor will advise employees and applicants for employment of available training programs and entrance requirements for each.
- d. The contractor will periodically review the training and promotion potential of employees who are minorities and women and will encourage eligible employees to apply for such training and promotion.
- 7. Unions: If the contractor relies in whole or in part upon unions as a source of employees, the contractor will use good faith efforts to obtain the cooperation of such unions to increase opportunities for minorities and women. Actions by the contractor, either directly or through a contractor's association acting as agent, will include the procedures set forth below:
- a. The contractor will use good faith efforts to develop, in cooperation with the unions, joint training programs aimed toward qualifying more minorities and women for membership in the unions and increasing the skills of minorities and women so that they may qualify for higher paying employment.
- b. The contractor will use good faith efforts to incorporate an EEO clause into each union agreement to the end that such union will be contractually bound to refer applicants without regard to their race, color, religion, sex, national origin, age or disability.
- c. The contractor is to obtain information as to the referral practices and policies of the labor union except that to the extent such information is within the exclusive possession of the labor union and such labor union refuses to furnish such information to the contractor, the contractor shall so certify to the contracting agency and shall set forth what efforts have been made to obtain such information.
- d. In the event the union is unable to provide the contractor with a reasonable flow of referrals within the time limit set forth in the collective bargaining agreement, the contractor will, through independent recruitment efforts, fill the employment vacancies without regard to race, color, religion, sex, national origin, age or disability; making full efforts to obtain qualified and/or qualifiable minorities and women. The failure of a union to provide sufficient referrals (even though it is obligated to provide exclusive referrals under the terms of a collective bargaining agreement) does not relieve the contractor from the requirements of this paragraph. In the event the union referral practice prevents the contractor from meeting the obligations pursuant to Executive Order 11246, as amended, and these special provisions, such contractor shall immediately notify the contracting agency.
- 8. Reasonable Accommodation for Applicants / Employees with Disabilities: The contractor must be familiar

with the requirements for and comply with the Americans with Disabilities Act and all rules and regulations established there under. Employers must provide reasonable accommodation in all employment activities unless to do so would cause an undue hardship.

- 9. Selection of Subcontractors, Procurement of Materials and Leasing of Equipment: The contractor shall not discriminate on the grounds of race, color, religion, sex, national origin, age or disability in the selection and retention of subcontractors, including procurement of materials and leases of equipment. The contractor shall take all necessary and reasonable steps to ensure nondiscrimination in the administration of this contract.
- a. The contractor shall notify all potential subcontractors and suppliers and lessors of their EEO obligations under this contract.
- b. The contractor will use good faith efforts to ensure subcontractor compliance with their EEO obligations.

#### 10. Assurance Required by 49 CFR 26.13(b):

- a. The requirements of 49 CFR Part 26 and the State DOT's U.S. DOT-approved DBE program are incorporated by reference.
- b. The contractor or subcontractor shall not discriminate on the basis of race, color, national origin, or sex in the performance of this contract. The contractor shall carry out applicable requirements of 49 CFR Part 26 in the award and administration of DOT-assisted contracts. Failure by the contractor to carry out these requirements is a material breach of this contract, which may result in the termination of this contract or such other remedy as the contracting agency deems appropriate.
- 11. Records and Reports: The contractor shall keep such records as necessary to document compliance with the EEO requirements. Such records shall be retained for a period of three years following the date of the final payment to the contractor for all contract work and shall be available at reasonable times and places for inspection by authorized representatives of the contracting agency and the FHWA.
- a. The records kept by the contractor shall document the following:
  - (1) The number and work hours of minority and nonminority group members and women employed in each work classification on the project;
  - (2) The progress and efforts being made in cooperation with unions, when applicable, to increase employment opportunities for minorities and women; and
  - (3) The progress and efforts being made in locating, hiring, training, qualifying, and upgrading minorities and women:
- b. The contractors and subcontractors will submit an annual report to the contracting agency each July for the duration of the project, indicating the number of minority, women, and non-minority group employees currently engaged in each work classification required by the contract work. This information is to be reported on <a href="Form FHWA-1391">FORM FHWA-1391</a>. The staffing data should represent the project work force on board in all or any part of the last payroll period preceding the end of July. If on-the-job training is being required by special provision, the contractor

will be required to collect and report training data. The employment data should reflect the work force on board during all or any part of the last payroll period preceding the end of July.

#### **III. NONSEGREGATED FACILITIES**

This provision is applicable to all Federal-aid construction contracts and to all related construction subcontracts of \$10,000 or more.

The contractor must ensure that facilities provided for employees are provided in such a manner that segregation on the basis of race, color, religion, sex, or national origin cannot result. The contractor may neither require such segregated use by written or oral policies nor tolerate such use by employee custom. The contractor's obligation extends further to ensure that its employees are not assigned to perform their services at any location, under the contractor's control, where the facilities are segregated. The term "facilities" includes waiting rooms, work areas, restaurants and other eating areas, time clocks, restrooms, washrooms, locker rooms, and other storage or dressing areas, parking lots, drinking fountains, recreation or entertainment areas, transportation, and housing provided for employees. The contractor shall provide separate or single-user restrooms and necessary dressing or sleeping areas to assure privacy between sexes.

#### IV. DAVIS-BACON AND RELATED ACT PROVISIONS

This section is applicable to all Federal-aid construction projects exceeding \$2,000 and to all related subcontracts and lower-tier subcontracts (regardless of subcontract size). The requirements apply to all projects located within the right-of-way of a roadway that is functionally classified as Federal-aid highway. This excludes roadways functionally classified as local roads or rural minor collectors, which are exempt. Contracting agencies may elect to apply these requirements to other projects.

The following provisions are from the U.S. Department of Labor regulations in 29 CFR 5.5 "Contract provisions and related matters" with minor revisions to conform to the FHWA-1273 format and FHWA program requirements.

#### 1. Minimum wages

a. All laborers and mechanics employed or working upon the site of the work, will be paid unconditionally and not less often than once a week, and without subsequent deduction or rebate on any account (except such payroll deductions as are permitted by regulations issued by the Secretary of Labor under the Copeland Act (29 CFR part 3)), the full amount of wages and bona fide fringe benefits (or cash equivalents thereof) due at time of payment computed at rates not less than those contained in the wage determination of the Secretary of Labor which is attached hereto and made a part hereof, regardless of any contractual relationship which may be alleged to exist between the contractor and such laborers and mechanics.

Contributions made or costs reasonably anticipated for bona fide fringe benefits under section 1(b)(2) of the Davis-Bacon Act on behalf of laborers or mechanics are considered wages paid to such laborers or mechanics, subject to the provisions of paragraph 1.d. of this section; also, regular contributions made or costs incurred for more than a weekly period (but not less often than quarterly) under plans, funds, or programs which cover the particular weekly period, are deemed to be constructively made or incurred during such weekly period. Such laborers and mechanics shall be paid the appropriate wage rate and fringe benefits on the wage determination for the classification of work actually performed, without regard to skill, except as provided in 29 CFR 5.5(a)(4). Laborers or mechanics performing work in more than one classification may be compensated at the rate specified for each classification for the time actually worked therein: Provided, That the employer's payroll records accurately set forth the time spent in each classification in which work is performed. The wage determination (including any additional classification and wage rates conformed under paragraph 1.b. of this section) and the Davis-Bacon poster (WH-1321) shall be posted at all times by the contractor and its subcontractors at the site of the work in a prominent and accessible place where it can be easily seen by the workers.

- b. (1) The contracting officer shall require that any class of laborers or mechanics, including helpers, which is not listed in the wage determination and which is to be employed under the contract shall be classified in conformance with the wage determination. The contracting officer shall approve an additional classification and wage rate and fringe benefits therefore only when the following criteria have been met:
  - (i) The work to be performed by the classification requested is not performed by a classification in the wage determination; and
  - (ii) The classification is utilized in the area by the construction industry; and
  - (iii) The proposed wage rate, including any bona fide fringe benefits, bears a reasonable relationship to the wage rates contained in the wage determination.
- (2) If the contractor and the laborers and mechanics to be employed in the classification (if known), or their representatives, and the contracting officer agree on the classification and wage rate (including the amount designated for fringe benefits where appropriate), a report of the action taken shall be sent by the contracting officer to the Administrator of the Wage and Hour Division, Employment Standards Administration, U.S. Department of Labor, Washington, DC 20210. The Administrator, or an authorized representative, will approve, modify, or disapprove every additional classification action within 30 days of receipt and so advise the contracting officer or will notify the contracting officer within the 30-day period that additional time is necessary.
- (3) In the event the contractor, the laborers or mechanics to be employed in the classification or their representatives, and the contracting officer do not agree on the proposed classification and wage rate (including the amount designated for fringe benefits, where appropriate), the contracting officer shall refer the questions, including the views of all interested parties and the recommendation of the contracting officer, to the Wage and Hour Administrator for determination. The Wage and Hour Administrator, or an authorized representative, will issue a determination within 30 days of receipt and so advise

the contracting officer or will notify the contracting officer within the 30-day period that additional time is necessary.

- (4) The wage rate (including fringe benefits where appropriate) determined pursuant to paragraphs 1.b.(2) or 1.b.(3) of this section, shall be paid to all workers performing work in the classification under this contract from the first day on which work is performed in the classification.
- c. Whenever the minimum wage rate prescribed in the contract for a class of laborers or mechanics includes a fringe benefit which is not expressed as an hourly rate, the contractor shall either pay the benefit as stated in the wage determination or shall pay another bona fide fringe benefit or an hourly cash equivalent thereof.
- d. If the contractor does not make payments to a trustee or other third person, the contractor may consider as part of the wages of any laborer or mechanic the amount of any costs reasonably anticipated in providing bona fide fringe benefits under a plan or program, Provided, That the Secretary of Labor has found, upon the written request of the contractor, that the applicable standards of the Davis-Bacon Act have been met. The Secretary of Labor may require the contractor to set aside in a separate account assets for the meeting of obligations under the plan or program.

#### 2. Withholding

The contracting agency shall upon its own action or upon written request of an authorized representative of the Department of Labor, withhold or cause to be withheld from the contractor under this contract, or any other Federal contract with the same prime contractor, or any other federallyassisted contract subject to Davis-Bacon prevailing wage requirements, which is held by the same prime contractor, so much of the accrued payments or advances as may be considered necessary to pay laborers and mechanics, including apprentices, trainees, and helpers, employed by the contractor or any subcontractor the full amount of wages required by the contract. In the event of failure to pay any laborer or mechanic, including any apprentice, trainee, or helper, employed or working on the site of the work, all or part of the wages required by the contract, the contracting agency may, after written notice to the contractor, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds until such violations have ceased.

#### 3. Payrolls and basic records

a. Payrolls and basic records relating thereto shall be maintained by the contractor during the course of the work and preserved for a period of three years thereafter for all laborers and mechanics working at the site of the work. Such records shall contain the name, address, and social security number of each such worker, his or her correct classification, hourly rates of wages paid (including rates of contributions or costs anticipated for bona fide fringe benefits or cash equivalents thereof of the types described in section 1(b)(2)(B) of the Davis-Bacon Act), daily and weekly number of hours worked, deductions made and actual wages paid. Whenever the Secretary of Labor has found under 29 CFR 5.5(a)(1)(iv) that the wages of any laborer or mechanic include the amount of any costs reasonably anticipated in providing benefits under a plan or program described in section 1(b)(2)(B) of the Davis-

Bacon Act, the contractor shall maintain records which show that the commitment to provide such benefits is enforceable, that the plan or program is financially responsible, and that the plan or program has been communicated in writing to the laborers or mechanics affected, and records which show the costs anticipated or the actual cost incurred in providing such benefits. Contractors employing apprentices or trainees under approved programs shall maintain written evidence of the registration of apprenticeship programs and certification of trainee programs, the registration of the apprentices and trainees, and the ratios and wage rates prescribed in the applicable programs.

- b. (1) The contractor shall submit weekly for each week in which any contract work is performed a copy of all payrolls to the contracting agency. The payrolls submitted shall set out accurately and completely all of the information required to be maintained under 29 CFR 5.5(a)(3)(i), except that full social security numbers and home addresses shall not be included on weekly transmittals. Instead the payrolls shall only need to include an individually identifying number for each employee ( e.g., the last four digits of the employee's social security number). The required weekly payroll information may be submitted in any form desired. Optional Form WH-347 is available for this purpose from the Wage and Hour Division Web site at http://www.dol.gov/esa/whd/forms/wh347instr.htm or its successor site. The prime contractor is responsible for the submission of copies of payrolls by all subcontractors. Contractors and subcontractors shall maintain the full social security number and current address of each covered worker. and shall provide them upon request to the contracting agency for transmission to the State DOT, the FHWA or the Wage and Hour Division of the Department of Labor for purposes of an investigation or audit of compliance with prevailing wage requirements. It is not a violation of this section for a prime contractor to require a subcontractor to provide addresses and social security numbers to the prime contractor for its own records, without weekly submission to the contracting agency..
- (2) Each payroll submitted shall be accompanied by a "Statement of Compliance," signed by the contractor or subcontractor or his or her agent who pays or supervises the payment of the persons employed under the contract and shall certify the following:
  - (i) That the payroll for the payroll period contains the information required to be provided under §5.5 (a)(3)(ii) of Regulations, 29 CFR part 5, the appropriate information is being maintained under §5.5 (a)(3)(i) of Regulations, 29 CFR part 5, and that such information is correct and complete;
  - (ii) That each laborer or mechanic (including each helper, apprentice, and trainee) employed on the contract during the payroll period has been paid the full weekly wages earned, without rebate, either directly or indirectly, and that no deductions have been made either directly or indirectly from the full wages earned, other than permissible deductions as set forth in Regulations, 29 CFR part 3;
  - (iii) That each laborer or mechanic has been paid not less than the applicable wage rates and fringe benefits or cash equivalents for the classification of work performed, as specified in the applicable wage determination incorporated into the contract.

- (3) The weekly submission of a properly executed certification set forth on the reverse side of Optional Form WH–347 shall satisfy the requirement for submission of the "Statement of Compliance" required by paragraph 3.b.(2) of this section.
- (4) The falsification of any of the above certifications may subject the contractor or subcontractor to civil or criminal prosecution under section 1001 of title 18 and section 231 of title 31 of the United States Code.
- c. The contractor or subcontractor shall make the records required under paragraph 3.a. of this section available for inspection, copying, or transcription by authorized representatives of the contracting agency, the State DOT, the FHWA, or the Department of Labor, and shall permit such representatives to interview employees during working hours on the job. If the contractor or subcontractor fails to submit the required records or to make them available, the FHWA may, after written notice to the contractor, the contracting agency or the State DOT, take such action as may be necessary to guarantee of funds. Furthermore, failure to submit the required records upon request or to make such records available may be grounds for debarment action pursuant to 29 CFR 5.12.

#### 4. Apprentices and trainees

a. Apprentices (programs of the USDOL).

Apprentices will be permitted to work at less than the predetermined rate for the work they performed when they are employed pursuant to and individually registered in a bona fide apprenticeship program registered with the U.S. Department of Labor, Employment and Training Administration, Office of Apprenticeship Training, Employer and Labor Services, or with a State Apprenticeship Agency recognized by the Office, or if a person is employed in his or her first 90 days of probationary employment as an apprentice in such an apprenticeship program, who is not individually registered in the program, but who has been certified by the Office of Apprenticeship Training, Employer and Labor Services or a State Apprenticeship Agency (where appropriate) to be eligible for probationary employment as an apprentice.

The allowable ratio of apprentices to journeymen on the job site in any craft classification shall not be greater than the ratio permitted to the contractor as to the entire work force under the registered program. Any worker listed on a payroll at an apprentice wage rate, who is not registered or otherwise employed as stated above, shall be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed. In addition, any apprentice performing work on the job site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the work actually performed. Where a contractor is performing construction on a project in a locality other than that in which its program is registered, the ratios and wage rates (expressed in percentages of the journeyman's hourly rate) specified in the contractor's or subcontractor's registered program shall be observed.

Every apprentice must be paid at not less than the rate specified in the registered program for the apprentice's level of progress, expressed as a percentage of the journeymen hourly

rate specified in the applicable wage determination. Apprentices shall be paid fringe benefits in accordance with the provisions of the apprenticeship program. If the apprenticeship program does not specify fringe benefits, apprentices must be paid the full amount of fringe benefits listed on the wage determination for the applicable classification. If the Administrator determines that a different practice prevails for the applicable apprentice classification, fringes shall be paid in accordance with that determination.

In the event the Office of Apprenticeship Training, Employer and Labor Services, or a State Apprenticeship Agency recognized by the Office, withdraws approval of an apprenticeship program, the contractor will no longer be permitted to utilize apprentices at less than the applicable predetermined rate for the work performed until an acceptable program is approved.

b. Trainees (programs of the USDOL).

Except as provided in 29 CFR 5.16, trainees will not be permitted to work at less than the predetermined rate for the work performed unless they are employed pursuant to and individually registered in a program which has received prior approval, evidenced by formal certification by the U.S. Department of Labor, Employment and Training Administration.

The ratio of trainees to journeymen on the job site shall not be greater than permitted under the plan approved by the Employment and Training Administration.

Every trainee must be paid at not less than the rate specified in the approved program for the trainee's level of progress, expressed as a percentage of the journeyman hourly rate specified in the applicable wage determination. Trainees shall be paid fringe benefits in accordance with the provisions of the trainee program. If the trainee program does not mention fringe benefits, trainees shall be paid the full amount of fringe benefits listed on the wage determination unless the Administrator of the Wage and Hour Division determines that there is an apprenticeship program associated with the corresponding journeyman wage rate on the wage determination which provides for less than full fringe benefits for apprentices. Any employee listed on the payroll at a trainee rate who is not registered and participating in a training plan approved by the Employment and Training Administration shall be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed. In addition, any trainee performing work on the job site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the work actually performed.

In the event the Employment and Training Administration withdraws approval of a training program, the contractor will no longer be permitted to utilize trainees at less than the applicable predetermined rate for the work performed until an acceptable program is approved.

c. Equal employment opportunity. The utilization of apprentices, trainees and journeymen under this part shall be in conformity with the equal employment opportunity requirements of Executive Order 11246, as amended, and 29 CFR part 30.

d. Apprentices and Trainees (programs of the U.S. DOT).

Apprentices and trainees working under apprenticeship and skill training programs which have been certified by the Secretary of Transportation as promoting EEO in connection with Federal-aid highway construction programs are not subject to the requirements of paragraph 4 of this Section IV. The straight time hourly wage rates for apprentices and trainees under such programs will be established by the particular programs. The ratio of apprentices and trainees to journeymen shall not be greater than permitted by the terms of the particular program.

- **5. Compliance with Copeland Act requirements.** The contractor shall comply with the requirements of 29 CFR part 3, which are incorporated by reference in this contract.
- **6. Subcontracts.** The contractor or subcontractor shall insert Form FHWA-1273 in any subcontracts and also require the subcontractors to include Form FHWA-1273 in any lower tier subcontracts. The prime contractor shall be responsible for the compliance by any subcontractor or lower tier subcontractor with all the contract clauses in 29 CFR 5.5.
- **7. Contract termination: debarment.** A breach of the contract clauses in 29 CFR 5.5 may be grounds for termination of the contract, and for debarment as a contractor and a subcontractor as provided in 29 CFR 5.12.
- **8. Compliance with Davis-Bacon and Related Act requirements.** All rulings and interpretations of the Davis-Bacon and Related Acts contained in 29 CFR parts 1, 3, and 5 are herein incorporated by reference in this contract.
- 9. Disputes concerning labor standards. Disputes arising out of the labor standards provisions of this contract shall not be subject to the general disputes clause of this contract. Such disputes shall be resolved in accordance with the procedures of the Department of Labor set forth in 29 CFR parts 5, 6, and 7. Disputes within the meaning of this clause include disputes between the contractor (or any of its subcontractors) and the contracting agency, the U.S. Department of Labor, or the employees or their representatives.

### 10. Certification of eligibility.

- a. By entering into this contract, the contractor certifies that neither it (nor he or she) nor any person or firm who has an interest in the contractor's firm is a person or firm ineligible to be awarded Government contracts by virtue of section 3(a) of the Davis-Bacon Act or 29 CFR 5.12(a)(1).
- b. No part of this contract shall be subcontracted to any person or firm ineligible for award of a Government contract by virtue of section 3(a) of the Davis-Bacon Act or 29 CFR 5.12(a)(1).
- c. The penalty for making false statements is prescribed in the U.S. Criminal Code, 18 U.S.C. 1001.

# V. CONTRACT WORK HOURS AND SAFETY STANDARDS ACT

The following clauses apply to any Federal-aid construction contract in an amount in excess of \$100,000 and subject to the overtime provisions of the Contract Work Hours and Safety Standards Act. These clauses shall be inserted in addition to the clauses required by 29 CFR 5.5(a) or 29 CFR 4.6. As used in this paragraph, the terms laborers and mechanics include watchmen and guards.

- 1. Overtime requirements. No contractor or subcontractor contracting for any part of the contract work which may require or involve the employment of laborers or mechanics shall require or permit any such laborer or mechanic in any workweek in which he or she is employed on such work to work in excess of forty hours in such workweek unless such laborer or mechanic receives compensation at a rate not less than one and one-half times the basic rate of pay for all hours worked in excess of forty hours in such workweek.
- 2. Violation; liability for unpaid wages; liquidated damages. In the event of any violation of the clause set forth in paragraph (1.) of this section, the contractor and any subcontractor responsible therefor shall be liable for the unpaid wages. In addition, such contractor and subcontractor shall be liable to the United States (in the case of work done under contract for the District of Columbia or a territory, to such District or to such territory), for liquidated damages. Such liquidated damages shall be computed with respect to each individual laborer or mechanic, including watchmen and guards, employed in violation of the clause set forth in paragraph (1.) of this section, in the sum of \$10 for each calendar day on which such individual was required or permitted to work in excess of the standard workweek of forty hours without payment of the overtime wages required by the clause set forth in paragraph (1.) of this section.
- 3. Withholding for unpaid wages and liquidated damages. The FHWA or the contacting agency shall upon its own action or upon written request of an authorized representative of the Department of Labor withhold or cause to be withheld, from any moneys payable on account of work performed by the contractor or subcontractor under any such contract or any other Federal contract with the same prime contractor, or any other federally-assisted contract subject to the Contract Work Hours and Safety Standards Act, which is held by the same prime contractor, such sums as may be determined to be necessary to satisfy any liabilities of such contractor or subcontractor for unpaid wages and liquidated damages as provided in the clause set forth in paragraph (2.) of this section.
- **4. Subcontracts.** The contractor or subcontractor shall insert in any subcontracts the clauses set forth in paragraph (1.) through (4.) of this section and also a clause requiring the subcontractors to include these clauses in any lower tier subcontracts. The prime contractor shall be responsible for compliance by any subcontractor or lower tier subcontractor with the clauses set forth in paragraphs (1.) through (4.) of this section.

#### VI. SUBLETTING OR ASSIGNING THE CONTRACT

This provision is applicable to all Federal-aid construction contracts on the National Highway System.

- 1. The contractor shall perform with its own organization contract work amounting to not less than 30 percent (or a greater percentage if specified elsewhere in the contract) of the total original contract price, excluding any specialty items designated by the contracting agency. Specialty items may be performed by subcontract and the amount of any such specialty items performed may be deducted from the total original contract price before computing the amount of work required to be performed by the contractor's own organization (23 CFR 635.116).
- a. The term "perform work with its own organization" refers to workers employed or leased by the prime contractor, and equipment owned or rented by the prime contractor, with or without operators. Such term does not include employees or equipment of a subcontractor or lower tier subcontractor, agents of the prime contractor, or any other assignees. The term may include payments for the costs of hiring leased employees from an employee leasing firm meeting all relevant Federal and State regulatory requirements. Leased employees may only be included in this term if the prime contractor meets all of the following conditions:
- (1) the prime contractor maintains control over the supervision of the day-to-day activities of the leased employees:
- (2) the prime contractor remains responsible for the quality of the work of the leased employees;
- (3) the prime contractor retains all power to accept or exclude individual employees from work on the project; and
- (4) the prime contractor remains ultimately responsible for the payment of predetermined minimum wages, the submission of payrolls, statements of compliance and all other Federal regulatory requirements.
- b. "Specialty Items" shall be construed to be limited to work that requires highly specialized knowledge, abilities, or equipment not ordinarily available in the type of contracting organizations qualified and expected to bid or propose on the contract as a whole and in general are to be limited to minor components of the overall contract.
- 2. The contract amount upon which the requirements set forth in paragraph (1) of Section VI is computed includes the cost of material and manufactured products which are to be purchased or produced by the contractor under the contract provisions.
- 3. The contractor shall furnish (a) a competent superintendent or supervisor who is employed by the firm, has full authority to direct performance of the work in accordance with the contract requirements, and is in charge of all construction operations (regardless of who performs the work) and (b) such other of its own organizational resources (supervision, management, and engineering services) as the contracting officer determines is necessary to assure the performance of the contract.
- 4. No portion of the contract shall be sublet, assigned or otherwise disposed of except with the written consent of the contracting officer, or authorized representative, and such consent when given shall not be construed to relieve the contractor of any responsibility for the fulfillment of the contract. Written consent will be given only after the

contracting agency has assured that each subcontract is evidenced in writing and that it contains all pertinent provisions and requirements of the prime contract.

5. The 30% self-performance requirement of paragraph (1) is not applicable to design-build contracts; however, contracting agencies may establish their own self-performance requirements.

#### **VII. SAFETY: ACCIDENT PREVENTION**

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

- 1. In the performance of this contract the contractor shall comply with all applicable Federal, State, and local laws governing safety, health, and sanitation (23 CFR 635). The contractor shall provide all safeguards, safety devices and protective equipment and take any other needed actions as it determines, or as the contracting officer may determine, to be reasonably necessary to protect the life and health of employees on the job and the safety of the public and to protect property in connection with the performance of the work covered by the contract.
- 2. It is a condition of this contract, and shall be made a condition of each subcontract, which the contractor enters into pursuant to this contract, that the contractor and any subcontractor shall not permit any employee, in performance of the contract, to work in surroundings or under conditions which are unsanitary, hazardous or dangerous to his/her health or safety, as determined under construction safety and health standards (29 CFR 1926) promulgated by the Secretary of Labor, in accordance with Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C. 3704).
- 3. Pursuant to 29 CFR 1926.3, it is a condition of this contract that the Secretary of Labor or authorized representative thereof, shall have right of entry to any site of contract performance to inspect or investigate the matter of compliance with the construction safety and health standards and to carry out the duties of the Secretary under Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C.3704).

# VIII. FALSE STATEMENTS CONCERNING HIGHWAY PROJECTS

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

In order to assure high quality and durable construction in conformity with approved plans and specifications and a high degree of reliability on statements and representations made by engineers, contractors, suppliers, and workers on Federal-aid highway projects, it is essential that all persons concerned with the project perform their functions as carefully, thoroughly, and honestly as possible. Willful falsification, distortion, or misrepresentation with respect to any facts related to the project is a violation of Federal law. To prevent any misunderstanding regarding the seriousness of these and similar acts, Form FHWA-1022 shall be posted on each Federal-aid highway project (23 CFR 635) in one or more places where it is readily available to all persons concerned with the project:

18 U.S.C. 1020 reads as follows:

"Whoever, being an officer, agent, or employee of the United States, or of any State or Territory, or whoever, whether a person, association, firm, or corporation, knowingly makes any false statement, false representation, or false report as to the character, quality, quantity, or cost of the material used or to be used, or the quantity or quality of the work performed or to be performed, or the cost thereof in connection with the submission of plans, maps, specifications, contracts, or costs of construction on any highway or related project submitted for approval to the Secretary of Transportation; or

Whoever knowingly makes any false statement, false representation, false report or false claim with respect to the character, quality, quantity, or cost of any work performed or to be performed, or materials furnished or to be furnished, in connection with the construction of any highway or related project approved by the Secretary of Transportation; or

Whoever knowingly makes any false statement or false representation as to material fact in any statement, certificate, or report submitted pursuant to provisions of the Federal-aid Roads Act approved July 1, 1916, (39 Stat. 355), as amended and supplemented:

Shall be fined under this title or imprisoned not more than 5 years or both."

# IX. IMPLEMENTATION OF CLEAN AIR ACT AND FEDERAL WATER POLLUTION CONTROL ACT

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

By submission of this bid/proposal or the execution of this contract, or subcontract, as appropriate, the bidder, proposer, Federal-aid construction contractor, or subcontractor, as appropriate, will be deemed to have stipulated as follows:

- 1. That any person who is or will be utilized in the performance of this contract is not prohibited from receiving an award due to a violation of Section 508 of the Clean Water Act or Section 306 of the Clean Air Act.
- 2. That the contractor agrees to include or cause to be included the requirements of paragraph (1) of this Section X in every subcontract, and further agrees to take such action as the contracting agency may direct as a means of enforcing such requirements.

# X. CERTIFICATION REGARDING DEBARMENT, SUSPENSION, INELIGIBILITY AND VOLUNTARY EXCLUSION

This provision is applicable to all Federal-aid construction contracts, design-build contracts, subcontracts, lower-tier subcontracts, purchase orders, lease agreements, consultant contracts or any other covered transaction requiring FHWA approval or that is estimated to cost \$25,000 or more — as defined in 2 CFR Parts 180 and 1200.

#### 1. Instructions for Certification - First Tier Participants:

- a. By signing and submitting this proposal, the prospective first tier participant is providing the certification set out below.
- b. The inability of a person to provide the certification set out below will not necessarily result in denial of participation in this

covered transaction. The prospective first tier participant shall submit an explanation of why it cannot provide the certification set out below. The certification or explanation will be considered in connection with the department or agency's determination whether to enter into this transaction. However, failure of the prospective first tier participant to furnish a certification or an explanation shall disqualify such a person from participation in this transaction.

- c. The certification in this clause is a material representation of fact upon which reliance was placed when the contracting agency determined to enter into this transaction. If it is later determined that the prospective participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the contracting agency may terminate this transaction for cause of default.
- d. The prospective first tier participant shall provide immediate written notice to the contracting agency to whom this proposal is submitted if any time the prospective first tier participant learns that its certification was erroneous when submitted or has become erroneous by reason of changed circumstances.
- "covered transaction," "debarred," terms "suspended," "ineligible," "participant," "person," "principal," and "voluntarily excluded," as used in this clause, are defined in 2 CFR Parts 180 and 1200. "First Tier Covered Transactions" refers to any covered transaction between a grantee or subgrantee of Federal funds and a participant (such as the prime or general contract). "Lower Tier Covered Transactions" refers to any covered transaction under a First Tier Covered Transaction (such as subcontracts). "First Tier Participant" refers to the participant who has entered into a covered transaction with a grantee or subgrantee of Federal funds (such as the prime or general contractor). "Lower Tier Participant" refers any participant who has entered into a covered transaction with a First Tier Participant or other Lower Tier Participants (such as subcontractors and suppliers).
- f. The prospective first tier participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency entering into this transaction.
- g. The prospective first tier participant further agrees by submitting this proposal that it will include the clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transactions," provided by the department or contracting agency, entering into this covered transaction, without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions exceeding the \$25,000 threshold.
- h. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A participant is responsible for ensuring that its principals are not suspended, debarred, or otherwise ineligible to participate in covered transactions. To verify the eligibility of its principals, as well as the eligibility of any lower tier prospective participants, each participant may, but is not required to, check the Excluded Parties List System website (<a href="https://www.epls.gov/">https://www.epls.gov/</a>), which is compiled by the General Services Administration.

- i. Nothing contained in the foregoing shall be construed to require the establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of the prospective participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.
- j. Except for transactions authorized under paragraph (f) of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the department or agency may terminate this transaction for cause or default.

\* \* \* \*

# 2. Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion – First Tier Participants:

- a. The prospective first tier participant certifies to the best of its knowledge and belief, that it and its principals:
- (1) Are not presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participating in covered transactions by any Federal department or agency;
- (2) Have not within a three-year period preceding this proposal been convicted of or had a civil judgment rendered against them for commission of fraud or a criminal offense in connection with obtaining, attempting to obtain, or performing a public (Federal, State or local) transaction or contract under a public transaction; violation of Federal or State antitrust statutes or commission of embezzlement, theft, forgery, bribery, falsification or destruction of records, making false statements, or receiving stolen property;
- (3) Are not presently indicted for or otherwise criminally or civilly charged by a governmental entity (Federal, State or local) with commission of any of the offenses enumerated in paragraph (a)(2) of this certification; and
- (4) Have not within a three-year period preceding this application/proposal had one or more public transactions (Federal, State or local) terminated for cause or default.
- b. Where the prospective participant is unable to certify to any of the statements in this certification, such prospective participant shall attach an explanation to this proposal.

#### 2. Instructions for Certification - Lower Tier Participants:

(Applicable to all subcontracts, purchase orders and other lower tier transactions requiring prior FHWA approval or estimated to cost \$25,000 or more - 2 CFR Parts 180 and 1200)

- a. By signing and submitting this proposal, the prospective lower tier is providing the certification set out below.
- b. The certification in this clause is a material representation of fact upon which reliance was placed when this transaction was entered into. If it is later determined that the prospective lower tier participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the department, or agency with which

this transaction originated may pursue available remedies, including suspension and/or debarment.

- c. The prospective lower tier participant shall provide immediate written notice to the person to which this proposal is submitted if at any time the prospective lower tier participant learns that its certification was erroneous by reason of changed circumstances.
- d. The terms "covered transaction," "debarred," "suspended," "ineligible," "participant," "person," "principal," and "voluntarily excluded," as used in this clause, are defined in 2 CFR Parts 180 and 1200. You may contact the person to which this proposal is submitted for assistance in obtaining a copy of those regulations. "First Tier Covered Transactions" refers to any covered transaction between a grantee or subgrantee of Federal funds and a participant (such as the prime or general contract). "Lower Tier Covered Transactions" refers to any covered transaction under a First Tier Covered Transaction (such as subcontracts). "First Tier Participant" refers to the participant who has entered into a covered transaction with a grantee or subgrantee of Federal funds (such as the prime or general contractor). "Lower Tier Participant" refers any participant who has entered into a covered transaction with a First Tier Participant or other Lower Tier Participants (such as subcontractors and suppliers).
- e. The prospective lower tier participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency with which this transaction originated.
- f. The prospective lower tier participant further agrees by submitting this proposal that it will include this clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transaction," without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions exceeding the \$25,000 threshold.
- g. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A participant is responsible for ensuring that its principals are not suspended, debarred, or otherwise ineligible to participate in covered transactions. To verify the eligibility of its principals, as well as the eligibility of any lower tier prospective participants, each participant may, but is not required to, check the Excluded Parties List System website (<a href="https://www.epls.gov/">https://www.epls.gov/</a>), which is compiled by the General Services Administration.
- h. Nothing contained in the foregoing shall be construed to require establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.
- i. Except for transactions authorized under paragraph e of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the

department or agency with which this transaction originated may pursue available remedies, including suspension and/or debarment.

\* \* \* \* \*

# Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion--Lower Tier Participants:

- 1. The prospective lower tier participant certifies, by submission of this proposal, that neither it nor its principals is presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participating in covered transactions by any Federal department or agency.
- 2. Where the prospective lower tier participant is unable to certify to any of the statements in this certification, such prospective participant shall attach an explanation to this proposal.

\* \* \* \* \*

# XI. CERTIFICATION REGARDING USE OF CONTRACT FUNDS FOR LOBBYING

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts which exceed \$100,000 (49 CFR 20).

- 1. The prospective participant certifies, by signing and submitting this bid or proposal, to the best of his or her knowledge and belief, that:
- a. No Federal appropriated funds have been paid or will be paid, by or on behalf of the undersigned, to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with the awarding of any Federal contract, the making of any Federal grant, the making of any Federal loan, the entering into of any cooperative agreement, and the extension, continuation, renewal, amendment, or modification of any Federal contract, grant, loan, or cooperative agreement.
- b. If any funds other than Federal appropriated funds have been paid or will be paid to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with this Federal contract, grant, loan, or cooperative agreement, the undersigned shall complete and submit Standard Form-LLL, "Disclosure Form to Report Lobbying," in accordance with its instructions.
- 2. This certification is a material representation of fact upon which reliance was placed when this transaction was made or entered into. Submission of this certification is a prerequisite for making or entering into this transaction imposed by 31 U.S.C. 1352. Any person who fails to file the required certification shall be subject to a civil penalty of not less than \$10,000 and not more than \$100,000 for each such failure.
- 3. The prospective participant also agrees by submitting its bid or proposal that the participant shall require that the language of this certification be included in all lower tier subcontracts, which exceed \$100,000 and that all such recipients shall certify and disclose accordingly.

# NOTICE OF REQUIREMENTS FOR AFFIRMATIVE ACTION TO ENSURE EQUAL EMPLOYMENT OPPORTUNITY (EXECUTIVE ORDER 11246)

- 1. The Offeror's or Bidder's attention is called to the "Equal Opportunity Clause" and the "Standard Federal Equal Employment Opportunity Construction Contract Specifications" set forth herein.
- 2. The goal for female participation, expressed in percentage terms for the Contractor's aggregate workforce in each trade on all construction work, is 6.9%.

Until further notice Goals for minority participation for each trade (percent) SHSA Cities: Pascagoula - Moss Point ------ 16.9 Biloxi - Gulfport ------ 19.2 Jackson ----- 30.3 SMSA Counties: Desoto ------ 32.3 Hancock, Harrison, Stone------ 19.2 Hinds, Rankin ----- 30.3 Jackson ------ 16.9 Non-SMSA Counties: George, Greene ------ 26.4 Alcorn, Benton, Bolivar, Calhoun, Carroll, Chickasaw, Clay, Coahoma, Grenada, Itawamba, Lafayette, Lee, Leflore, Marshall, Monroe, Montgomery, Panola, Pontotoc, Prentiss, Quitman, Sunflower, Tallahatchie, Tate, Tippah, Tishomingo, Tunica, Union, Washington, Webster, Yalobusha ------ 26.5 Attala, Choctaw, Claiborne, Clarke, Copiah, Covington, Franklin, Holmes, Humphreys, Issaquena, Jasper, Jefferson, Jefferson Davis, Jones Kemper, Lauderdale, Lawrence, Leake, Lincoln, Lowndes, Madison, Neshoba, Newton, Noxubee, Oktibbeha, Scott, Sharkey, Simpson, Smith, Warren, Wayne, Winston, Yazoo----- 32.0 Forrest, Lamar, Marion, Pearl River, Perry, Pike, Walthall-----27.7 Adams, Amite, Wilkinson ----- 30.4

These goals are applicable to all the Contractor's construction work (whether or not it is Federal or federally assisted) performed in the covered area. If the contractor performs construction work in a geographical area located outside of the covered area, it shall apply the goals established for such geographical area where the work is actually performed. With regard to this second area, the contractor also is subject to the goals for both its federally involved and nonfederally involved construction.

The Contractor's compliance with the Executive Order and the regulations in 41 CFR Part 60-4 shall be based on its implementation of the Equal Opportunity clause, specific affirmative action obligations required by the specifications set forth in 41 CFR 60-4.3(a), and its efforts to meet the goals. The hours of minority and female employment and training must be substantially uniform throughout the length of the contract, and in each trade, and the Contractor shall make a good faith effort to employ minorities and women evenly on each of its projects. The transfer of minority or female employees or trainees from Contractor to Contractor or from project to project for the sole purpose of meeting the Contractor's goals shall be a violation of the contract, the Executive Order and the regulations in 41 CFR Part 60-4.2(d). Compliance with the goals will be measured against the total work hours performed.

- 3. The Contractor shall provide written notification to the Director of the Office of Federal Contract Compliance Programs within 10 working days of award of any construction subcontract in excess of \$10,000 at any tier for construction work under the contract resulting from this solicitation. The notification shall list the name, address and telephone number of the subcontractor, employer identification number of the subcontractor, estimated dollar amount of the subcontract; estimated starting and completion dates of the subcontract; and the geographical area in which the subcontract is to be performed.
- 4. As used in this Notice, and in the contract resulting from this solicitation, the "covered area" is to the county and city (if any), stated in the advertisement.
- 5. The notification required in Paragraph 3 shall be addressed to the following:

Contract Compliance Officer Mississippi Department of Transportation P.O. Box 1850 Jackson, Mississippi 39215-1850

(12/04/2018)

CODE: (IS)

#### SPECIAL PROVISION NO. 907-102-2

**DATE:** 11/22/2017

**SUBJECT: Bidding Requirements and Conditions** 

Section 102, Bidding Requirements and Conditions, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

<u>907-102.01--Prequalification of Bidders.</u> Delete the last sentence of the third paragraph of Subsection 102.01 on page 13, and substitute the following.

The Bidder's Certificate of Responsibility number must be on file with the Department's Contract Administration Division prior to request for permission to bid.

<u>907-102.02--Contents of Proposal Forms</u>. Delete the fourth paragraph in Subsection 102.02 on page 13, and substitute the following.

Prospective bidders must complete an online request for permission to be eligible to bid a project. Upon approval, the bidder will be authorized to submit a bid electronically using Bid Express at <a href="http://bidx.com">http://bidx.com</a>.

CODE: (SP)

#### SPECIAL PROVISION NO. 907-103-2

**DATE:** 06/22/2017

**SUBJECT:** Award and Execution of Contract

Section 103, Award and Execution of Contract, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

<u>907-103.01--Consideration of Proposal.</u> Delete the second and third paragraphs of Subsection 103.01 on page 19, and substitute the following.

<u>907-103.01.1--For Projects Constructed Without Federal Funds.</u> Resident Contractors actually domiciled in Mississippi are to be granted preference over nonresidents in awarding of Contracts financed 100% with State funds.

In consideration of proposals that are equal to or in excess of \$50,000 and financed 100% with State funds, a nonresident bidder domiciled in a state having laws granting preference to local Contractors will be considered for such contracts on the same basis as the nonresident bidder's state awards contracts to Mississippi Contractors bidding under similar circumstances. When a nonresident Contractor submits a bid equal to or in excess of \$50,000 on a contract financed 100% with State funds, a copy of the current laws from the state of domicile and an explanation thereof pertaining to treatment of nonresident Contractors shall be attached. If no preferential treatment is provided for Contractors in the state of domicile and contracts are awarded to the lowest responsible bidder, a statement to this effect shall be attached. Should the attachment not accompany the bid when submitted, the Contractor shall have 10 days following the opening of the bids to furnish the required information to the Contract Administration Director for attachment to the bid. Failure to provide the attachment within 10 days will result in the nonresident Contractor's bid being rejected and not considered for award. As used herein, the term "resident Contractor" includes a nonresident person, firm or corporation that has been qualified to do business in this State and has maintained a permanent full-time office in the State of Mississippi for two years prior to the submission of the bid, and the subsidiaries and affiliates of such a person, firm or corporation.

SPECIAL PROVISION NO. 907-107-2 CODE: (SP)

**DATE:** 01/31/2018

**SUBJECT:** Contractor's Erosion Control Plan

Section 107, Legal Relations and Responsibility to Public, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

907-107.22--Environmental Protection.

<u>907-107.22.1--Contractor's Erosion Control Plan (ECP)</u>. After the first sentence of the first paragraph of Subsection 107.22.1 on page 63, add the following.

The ECP shall be submitted electronically to the Project Engineer who will forward it to the appropriate MDOT Divisions.

Delete the example Narrative in Subsection 107.22.1 on page 65, and substitute the following.

# **EXAMPLE** MISSISSIPPI DEPARTMENT OF TRANSPORTATION Storm Water Pollution Prevention Plan (SWPPP) Narrative

| Proje<br>Coun                     | ral Permit Coverage No: MSR<br>ct Number:<br>tty:<br>e:  |
|-----------------------------------|--|
|                                   | SITE INFORMATION  project consists of grading and installing drainage structures necessary to construct approximately 6 of parallel lanes on SR 31 between the Hinds County Line and the Rankin County Line.   |
| (1<br>c<br>p<br>to                | SEDIMENT AND EROSION CONTROLS  Vegetative Controls: Clearing and grubbing areas will be minimized to comply with the buffer zones minimum of 15 feet along the ROW lines and 5 feet along creeks) as per the contract documents. A ombination of temporary and permanent grassing will be used to protect slopes as construction progresses. Should a disturbed area be left undisturbed for 14 days or more, placement of temporary BMPs (seeding & mulching, silt fences, basins, ditch checks, slope drains, etc.) or termanent erosion control measures (seeding & mulching, riprap, paved ditch, flumes, etc.) will be initiated by the next working day after the land disturbing activities have stopped. |
| 1                                 | <b>Structural Controls:</b> Gravel construction entrance/exit will be installed near Stations 145+50, 59+50, 164+50 & 172+50. Riprap ditch checks will be constructed at Stations 144+50, 151+75, 62+00 & 166+25. The Concrete washout area will be at Stations 140+25, 152+00 & 168+50.   |
| tł                                | <b>Housekeeping Practices:</b> Structural BMPs will be cleaned out when sediment reaches 1/3 to 1/2 of the height of the BMP. Maintenance and repair of equipment will be performed off-site, material washout will occur either off-site or within designated wash out areas.   |
| w<br>m<br>c                       | <b>Post-Construction Control Measures:</b> As construction is completed, permanent vegetative growth will be established on disturbed soils to improve soil stability and provide a buffer zone for loose naterial. Paved ditches and flumes will be placed as specified in the ECP to reduce erosion in oncentrated flow areas and rip rap will be placed as specified to dissipate flow energy and reduce flow relocity.   |
| begin<br>will be<br>activitin sta | IMPLEMENTATION SEQUENCE neter controls will be installed first. Clearing and grubbing will be performed in 19-acre sections uning at the BOP and temporary grassing will be installed as needed. Temporary erosion control BMPs be installed at the drainage structures prior/during construction of the drainage structures. Grading ities will commence at the BOP and proceed towards the EOP, fill slopes will be permanently grassed ages for fill heights that exceed 5 feet. Base materials will be installed on completed grading sections the paving to follow.   |
| rainfa<br>all probelow            | MAINTENANCE PLAN rosion and sediment control practices will be checked for stability and operation following every all but in no case less than once every week. Any needed repairs will be made immediately to maintain ractices as designed. Sediment basins will be cleaned out when the level of sediment reaches 2.0 feet with the top of the riser. Sediment will be removed from the front/upstream end of the BMPs when it mes about 1/3 to 1/2 height of BMP.   |
| Prime                             | e Contractor's Signature Date  |

Title

68

Printed Name

CODE: (SP)

#### SPECIAL PROVISION NO. 907-253-1

**DATE:** 01/17/2017

**SUBJECT:** Coir Fiber Baffle

Section 907-253, Coir Fiber Baffle, is hereby added to and made a part of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction as follows.

# **SECTION 907-253 -- COIR FIBER BAFFLE**

<u>907-253.01--Description</u>. This work consists of furnishing materials, installing, and maintaining coir fiber baffles according to the details in the plans or in locations as directed. Coir fiber baffles shall be installed in silt basins.

# 907-253.02--Materials.

907-253.02.1--Coir Fiber Mat. Matting shall be provided to meet the requirements of Table 1.

TABLE 1 COIR FIBER MAT PROPERTIES

| Property                       | Requirement                     | Method      |
|--------------------------------|---------------------------------|-------------|
| Composition                    | 100% coconut fiber (coir) twine |             |
|                                | woven into high strength matrix | -           |
| Weight, ounces per square yard | 20                              | ASTM D 5261 |
| Open Area, Measured, percent   | 50                              | -           |

In addition to the above, the product shall be on the Department's APL, or an approved equal.

<u>907-253.02.2--Staples</u>. Staples shall be made of 0.125-inch diameter new steel wire formed into a U-shape not less than 12 inches in length with a throat of one inch (1") in width.

907-253.02.3--Posts. Posts shall meet the requirements of Subsection 714.13.2.2.

<u>907-253.02.4--Tension Wire</u>. The tension wire shall be 9-gauge high tension wire strand of variable lengths.

<u>907-253.02.5--Wire Mesh.</u> The wire mesh for the woven wore backing shall meet the requirements of Subsection 714.13.2.1.

<u>907-253.02.6--Attachment Device</u>. The attachment devices shall be No. 9 staples with at least 1½ inches in length, or an approved equal.

907-253.03--Construction Requirements. The coir fiber baffles shall be placed immediately

- 2 -

upon construction of sediment dams and basins. Three (3) baffles shall be placed in the basins with a spacing of 1/4 the basin length and according to the detail sheets. Two (2) coir fiber baffles shall be placed in basins less than 20 feet in length with a spacing of 1/3 the basin length.

Steel posts shall be installed to a depth of two feet (2') below the basin floor, with spacing of no more than four feet (4'). The top height of the coir fiber baffles shall not be below the elevation of the emergency spillway base of dams and basins. A tension wire strand shall be attached to the steel posts at a height of three feet (3') with plastic ties or wire fasteners. A steel post shall be installed into the side of the basin at a variable depth and a height of three feet (3') from the bottom of the basin to anchor coir fiber mat. The anchor post shall be secured to the upright steel post in basin with wire fasteners.

The coir fiber mat shall be draped over the wire strand with at least three feet (3') of material on each side of the strand. The coir fiber mat shall be secured to the posts and wire strand with wire staples or other acceptable methods. Staples shall be placed across the matting at ends and junctions approximately one foot (1') apart at the bottom and side slopes of basin. The matting shall be overlaid at least six inches (6") where two (2) or more widths of matting are installed side by side. The Engineer may require adjustments in the stapling requirements to fit individual site conditions.

<u>907-253.04--Method of Measurement</u>. Coir fiber baffle will be measured per linear feet of coir fiber baffle.

<u>907-253.05--Basis of Payment</u>. Coir fiber baffle, measured as prescribed above, will be paid for at the contract unit prices per linear feet, which price shall be full compensation for all materials, labor, equipment, placing, securing, excavating, and backfilling of coir fiber baffles, and incidentals necessary to complete the work.

Payment will be made under:

907-253-A: Coir Fiber Baffle

- per linear foot

CODE: (IS)

#### SPECIAL PROVISION NO. 907-619-5

**DATE:** 01/17/2018

**SUBJECT:** Traffic Control for Construction Zones

Section 619, Traffic Control for Construction Zones, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

# 907-619.02--Materials.

<u>907-619.02.8--Traffic Signals and Flashers.</u> Delete Subsection 619.02.8.1 on pages 452 thru 455, and substitute the following.

<u>907-619.02.8.1-Portable Traffic Signals.</u> Portable traffic signals shall be trailer or pedestal mounted units that provide for easy, legal transportation and quick setup and deployment. Each unit shall be self-contained. The types of portable traffic signals are as follows.

- Type 1 portable traffic signal shall include two signal heads per trailer with one signal head mounted on an overhead mast arm that can be extended over the travel lane, and the other signal head shall be mounted on the vertical upright of the trailer.
- Type 2 portable traffic signal shall include one signal head that is mounted on the vertical upright of the pedestal/cart or trailer. Pedestal/Cart mounted shall be designated as Type 2A and Trailer mounted shall be designated as Type 2B. Type 2 portable traffic signals shall be tested to MASH Standards or NCHRP Test Level 3 crash testing requirements by an accredited independent test facility, with supporting documentation available upon request.
- Type 3 portable traffic signal shall be the same as Type 1 mentioned above but with enhanced capabilities as mentioned in each applicable section below.

The portable traffic signals shall be MUTCD Compliant and utilize standard ITE signal heads, and adhere to the ITE Specifications and Standards for Vehicle Traffic Control Signal Heads, Light Emitting Diode (LED) Circular Signal Supplement. The units shall be battery powered with a solar charging system, and be equipped with an onboard battery charger capable of being used with a 120V AC power source. Portable traffic signals shall be able to communicate with other portable signals via 900 MHz or other accepted wireless communications. If wireless connectivity is not feasible, hardwired connectivity shall be an acceptable alternative, as approved by the Engineer. Portable Traffic Signals shall include all the major components listed below or be able to perform the functions of these components. The major components of the unit shall include, but are not limited to, the trailer or pedestal/cart, telescoping mast arm (on Type 1 and 3), signal head(s) and back plates, traffic signal controller with operating software, solar charging system with batteries, input and output devices, vehicle detection, flasher units, conflict monitor, relays,

communications system and other equipment required for the safe operation and installation of the unit.

907-619.02.8.1.1--Signal Heads. The signal heads and all applicable components of the portable traffic signal shall meet the physical display and operational requirements of conventional traffic signals as specific in the Manual on Uniform Traffic Control Devices (MUTCD). The signal heads shall be cast aluminum or polycarbonate and shall meet the requirements laid out in the Mississippi Standard Specification for traffic signal heads and associated MDOT material specifications for traffic signal heads. The signal heads shall accommodate standard 12-inch LED indications meeting the ITE Specification "Vehicle Traffic Control Signal Heads" and ITE Specifications and Standards for Vehicle Traffic Control Signal Heads, Light Emitting Diode (LED) Circular Signal Supplement.

For Type 1, Type 2 and Type 3 portable traffic signals, the signal heads shall have the ability to be rotated 180 degrees to face in the opposite direction and shall have the ability to rotate and lock in approximately 10 degree increments to position the signal head for the optimum visibility to motorists.

For Type 1 portable traffic signals, each unit shall contain two signal heads with one signal head mounted on an overhead mast arm that can be extended over the travel lane with a minimum clearance of 17 feet measured from the bottom of the signal head unit to the road surface. The lower signal head shall be mounted to the vertical upright of the trailer at a minimum height of eight feet (8') from the bottom of the signal head unit to the road surface.

For Type 2 portable traffic signals, the signal head shall be mounted to the vertical upright of the trailer at a minimum height of eight feet (8') from the bottom of the signal head unit to the road surface.

For Type 3 portable traffic signals, each unit shall be the same as Type 1 mentioned above but with enhanced capabilities as mentioned below.

907-619.02.8.1.2--Controller and Operating Requirements. The portable traffic signal (Types 1, 2, and 3) shall include a solid state Controller Unit (CU) that is in compliance with NEMA TS 5 Performance Standard. The CU shall have an easy to read front panel backlit display for viewing and programming the configuration settings and CU status. The CU shall be capable of operating the portable traffic signal system in a fixed time, traffic actuated or manual control mode. Multiple portable traffic signals shall have the capability to be interconnected to form a portable traffic signal system. Each portable traffic signal within a connected system shall have the capability to serve as either the master or remote signal. Each portable traffic signal shall include a Conflict Monitor Unit (CMU), or Malfunction Management Unit (MMU) to ensure phase conflicts do not exist during operation.

For Type 1 and Type 2 portable traffic signals, a minimum of five (5) automatic time-of-day timing plans within a 24-hour period should be available in fixed time mode. The CU should have the ability to control a minimum of four (4) traffic phases with programmable cycle time adjustments and user adjustable red, amber, minimum green and maximum green times. The CU shall have

the capability of programming green and red times from 1 to 999 seconds and yellow times up to 15 seconds in one-second increments. The CU shall also have the capability of facilitating standby modes of red, red flash and yellow flash.

For Type 3 portable traffic signals, a minimum of ten (10) automatic time-of-day timing plans within a 24-hour period should be available in fixed time mode. The CU should have the ability to control a minimum of 16 traffic phases with programmable cycle time adjustments and user adjustable red, amber, minimum green and maximum green times. The CU shall have the capability of programming green and red times from 1 to 999 seconds and yellow times up to 15 seconds in one-second increments. The CU shall also have the capability of facilitating standby modes of red, red flash and yellow flash.

The system shall also have the ability to operate in vehicle actuation mode when vehicle detection components are used. The operating system shall have the capability to allow the Portable Traffic Signal to be connected to and controlled by a standard NEMA controller.

The system shall have the capability to be controlled remotely using a hardwired or wireless remote. The wireless radio remote shall be capable of communicating at a clear line of site distance up to ½ mile from the master.

The CU shall have the capability of interfacing with a Remote Monitoring System (RMS) capable of reporting signal location, battery voltage, and system faults. The RMS shall include a password-protected web site, viewable via an internet connection. In the event of a system fault, the RMS shall provide specific information concerning the cause of the system fault (example: "red lamp on signal number 1 out"). The RMS shall immediately contact previously designated individuals via SMS text messaging or email, upon a fault event.

The active timing program operating the PTS system shall be available and viewable through the RMS website at all times. The RMS shall maintain a history of the operating system in each signal including total operating hours, alerts, and the location of the PTS trailer.

<u>907-619.02.8.1.3--Wireless Communications</u>. The portable traffic signals shall communicate with other portable traffic signals within the signal system via license-free wireless 900 MHZ radio link communications as specified in Subsection 662.02.2 of the radio Interconnect System specification. The radio units shall maintain communications at a minimum distance of one (1) mile. The radio system shall conform to the applicable Federal Communications Commission requirements and all applicable state and local requirements.

The portable traffic signals shall be in direct communication at all times either by wireless or hardwire connection to provide for the required conflict monitoring / malfunction management system.

<u>907-619.02.8.1.4--Power Requirements.</u> Each Portable Traffic Signal shall be equipped with a power source consisting of a solar collection array, solar controller and/or charging unit and batteries sufficient to operate the signal system. The number and size of batteries shall be sufficient to operate the Type 1 and Type 3 signals for a minimum of 30 days and Type 2A signals for

minimum of five (5) days, and Type 2B signals for minimum of 15 days without additional charging or assist from the solar array. An on-board battery charger shall be compatible with both the solar array and with a 120V AC power source.

For Type 1 signals, the solar panel array shall provide for a minimum of 440 watts of solar collection capability.

For Type 2A signals, the solar panel array shall provide for a minimum of 90 watts of solar collection capability.

For Type 2B signals, the solar panel array shall provide for a minimum of 110 watts of solar collection capability.

For Type 3 signals, the solar panel array shall provide for a minimum of 480 watts of solar collection capability and shall include a tilt and rotate system to optimally position the panels.

All instrumentation for the electrical system and battery compartment shall be contained in a lockable weatherproof enclosure. Solar panels shall be secured to the mounting brackets for theft prevention.

907-619.02.8.1.5--Trailer and Lift System. The trailer or pedestal/cart and all mounted components shall conform to the wind loading requirements as follows: 100 mph minimum for Type 1 portable traffic signals, 55 mph minimum for Type 2A portable traffic signals, 75 mph minimum for Type 2B portable traffic signals, and 90 mph minimum for Type 3 portable traffic signals as described in the AASHTO Standard Specifications for Highway Signs, Luminaries and Traffic Signals, as specified in the plans including all interims and updates. At the request of the Engineer, proof of conformance to these wind load ratings shall be verified by a third-party. No additional loose ballast shall be used to meet these wind load requirements. The trailer shall be made of structural steel and shall include four (4) leveling/stabilizer jacks capable of lifting the trailer a minimum of six inches (6").

The trailer or pedestal shall be equipped with a mechanical, hydraulic or electric lift system sufficient for one person to be able to raise and lower the vertical upright and/or horizontal mast arm to and from the operating position.

For Type 1, 2B, and Type 3 signals, the trailer shall be equipped to provide legal and safe transport on the public highway system at speeds up to 55 mph.

All exterior metal surfaces, except signal heads and back plates, shall be powder-coat painted highway safety orange.

<u>907-619.02.9--Impact Attenuators.</u> Delete the sentence in the first paragraph of Subsection 619.02.9 on page 455, and substitute the following.

Impact attenuators must be listed on the Department's APL.

<u>907-619.02.11--Snap-Back Delineators.</u> Delete the sentence in the paragraph of Subsection 619.02.11 on page 456, and substitute the following.

Snap-back delineators shall be selected from the list of surface mounted flexible delineator posts as shown on the Department's APL.

#### 907-619.02.14--Changeable Message Sign.

<u>907-619.02.14.5--PCMS Controller and Storage Cabinets.</u> Delete the fifth sentence in the first paragraph of Subsection 619.02.14.5 on pages 462 and 463, and substitute the following.

The controller cabinet shall be illuminated.

907-619.05-Basis of Payment. Add the following to the list of pay items ending on page 480.

907-619-E3: Changeable Message Sign \*\*\*\*\*

- per each
907-619-H2: Traffic Signal, Portable, Type

- per each

CODE: (SP)

#### SPECIAL PROVISION NO. 907-701-1

**DATE:** 10/23/2018

**SUBJECT:** Hydraulic Cement

Section 701, Hydraulic Cement, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

<u>907-701.01--General</u>. In the first sentence of the third paragraph of Subsection 701.01 on page 718, change "mills" to "plants."

In the second sentence of the seventh paragraph of Subsection 701.01 on pages 718 and 719, change "shall" to "will."

#### **907-701.02--Portland Cement.**

#### 907-701.02.1-General.

<u>907-701.02.1.2--Alkali Content.</u> Delete the sentence in Subsection 701.02.1.2 on page 719, and substitute the following.

The Equivalent alkali content for all cement types in this Subsection shall not exceed 0.60%.

<u>907-701.02.2--Replacement by Other Cementitious Materials.</u> Delete the paragraph in Subsection 701.02.2 on page 719, and substitute the following.

The maximum replacement of cement by weight is 25% for fly ash or 50% for ground granulated blast furnace slag (GGBFS). Replacement contents below 20% for fly ash or 45% for GGBFS may be used, but will not be given any special considerations, such as the maximum acceptance temperature for portland cement concrete containing pozzolans in Subsection 804.02.13.1.5. Special considerations shall only apply for replacement of cement by fly ash or GGBFS.

Delete Subsection 701.02.2.1 on pages 719 and 720, and substitute the following.

# 907-701.02.2.1--Portland Cement Concrete Exposed to Soluble Sulfate Conditions or Seawater.

When portland cement concrete is exposed to moderate or severe soluble sulfate conditions, or to seawater, cement types and replacement of cement by Class F fly ash or GGBFS shall be as follows in Table 1. Class C fly ash shall not be used as a replacement for cement in any of the sulfate exposure conditions listed in Table 1.

Water-soluble Sulfate Sulfate (SO<sub>4</sub>) in sulfate (SO<sub>4</sub>) in Cementitious material required Exposure water, ppm soil, % by mass Moderate 0.10 - 0.20 150 - 1.500 Type I cement with one of the following and replacements of cement by weight: Seawater 24.5 - 25.0% Class F fly ash, or 49.5 - 50.0% GGBFS Type II\*,\*\* cement Type I cement with a replacement by weight 0.20 - 2.00Severe 1,500 - 10,000 of 49.5 - 50.0% GGBFS, Type II\* cement with one of the following replacements of cement by weight: 24.5 - 25.0% Class F fly ash, or 49.5 - 50.0% GGBFS

**Table 1- Cementitious Materials for Soluble Sulfate Conditions or Seawater** 

Delete Subsection 701.02.2.2 on page 720, and substitute the following.

<u>907-701.02.2.2--Portland Cement for Soil Stabilization Exposed to Soluble Sulfate Conditions or Seawater.</u> When portland cement for use in soil stabilization is exposed to moderate or severe soluble sulfate conditions, or to seawater, cement types and replacement of cement by Class F fly ash or GGBFS shall meet the requirements of Subsection 701.02.2.1.

#### 907-701.04--Blended Hydraulic Cement.

907-701.04.1--General. Delete Subsection 701.04.1.1 on page 720, and substitute the following.

<u>907-701.04.1.1--Types of Blended Hydraulic Cement</u>. Blended hydraulic cements (blended cements) shall be of the following types and conform to AASHTO M 240:

Type IL - Portland-limestone cement

Type IP – Portland-pozzolan cement

Type IS – Portland blast-furnace slag cement

Blended cement Types IL, IP, and IS meeting the "MS" sulfate resistance requirement listed in AASHTO M 240, Table 3 shall have the "(MS)" suffix added to the type designation.

<u>907-701.04.1.2--Alkali Content</u>. Delete the sentence in Subsection 701.04.1.2 on page 720, and substitute the following.

<sup>\*</sup> Type III cement conforming to AASHTO M85 with a maximum 8% tricalcium aluminate (C<sub>3</sub>A) may be used in lieu of Type II cement as allowed in Subsection 701.02.1; this cement is given the designation "Type III(MS)."

<sup>\*\*</sup> Class F fly ash or GGBFS may be added as a replacement for cement as allowed in Subsection 907-701.02.2.

All blended cement types shall be made with clinker that would result in cement meeting the requirements of Subsection 701.02.1.2 when used in the production of AASHTO M 85, Type I or Type II cement.

<u>907-701.04.2--Replacement by Other Cementitious Materials.</u> Delete the paragraph in Subsection 701.04.2 on page 720, and substitute the following.

The maximum replacement of blended cement Type IL by weight is 35% for fly ash or 50% for GGBFS. Replacement contents below 20% for fly ash or 45% for GGBFS may be used, but will not be given any special considerations, such as the maximum acceptance temperature for blended cement concrete containing pozzolans in Subsection 804.02.13.1.5. Special considerations shall only apply for replacement of blended cement by fly ash or GGBFS.

No additional cementitious materials, such as portland cement, blended cement, fly ash, GGBFS, or others, shall be added to or as a replacement for blended cement Types IP and IS.

Delete Subsection 701.04.2.1 on pages 720 and 721, and substitute the following.

**907-701.04.2.1--Blended Cement Concrete Exposed to Soluble Sulfate Conditions or Seawater.** When blended cement concrete is exposed to moderate or severe soluble sulfate conditions, or to seawater, cement types and replacement of cement by Class F fly ash or GGBFS shall be as follows in Table 2. Class C fly ash shall not be used as a replacement for cement in any of the sulfate exposure conditions listed in Table 2.

Table 2- Cementitious Materials for Soluble Sulfate Conditions or Seawater

| Sulfate  | Water-soluble                 | Sulfate (SO <sub>4</sub> ) | Cementitious material required            |
|----------|-------------------------------|----------------------------|---|
| Exposure | sulfate (SO <sub>4</sub> ) in | in water, ppm              |   |
|          | soil, % by mass               |                            |   |
| Moderate | 0.10 - 0.20                   | 150 - 1,500                | Type IL (MS)* cement,                     |
| and      |                               |                            | Type IL cement with one of the following  |
| Seawater |                               |                            | replacements of cement by weight:         |
|          |                               |                            | 24.5 - 35.0% Class F fly ash, or          |
|          |                               |                            | 49.5 - 50.0% GGBFS,                       |
|          |                               |                            | Type IP (MS) cement,                      |
|          |                               |                            | or  |
|          |                               |                            | Type IS (MS) cement                       |
| Severe   | 0.20 - 2.00                   | 1,500 - 10,000             | Type IL cement with a replacement of      |
|          |                               |                            | cement by weight of 49.5 - 50.0% GGBFS,   |
|          |                               |                            | or  |
|          |                               |                            | Type IL (MS) cement with one of following |
|          |                               |                            | replacements of cement by weight:         |
|          |                               |                            | 24.5 - 35.0% Class F fly ash, or          |
|          |                               |                            | 49.5 - 50.0% GGBFS                        |

\* Class F fly ash or GGBFS may be added as a replacement for cement as allowed in Subsection 907-701.04.2.

Delete Subsection 701.04.2.2 on page 721, and substitute the following.

<u>907-701.04.2.2--Blended Cement for Soil Stabilization Exposed to Soluble Sulfate Conditions</u> <u>or Seawater</u>. When blended cement for use in soil stabilization is exposed to moderate or severe soluble sulfate conditions, or to seawater, cement types and replacement of cement by Class F fly ash or GGBFS shall meet the requirements of Subsection 701.04.2.1.

Delete Subsection 701.04.3 on page 721.

CODE: (IS)

#### SPECIAL PROVISION NO. 907-702-4

**DATE:** 09/11/2018

**SUBJECT:** Bituminous Materials

Section 702, Bituminous Materials, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

<u>907-702.04--Sampling.</u> Delete the sentence in Subsection 702.04 on page 722, and substitute the following.

Sampling of bituminous materials shall be as set out in AASHTO R 66.

<u>907-702.07--Emulsified Asphalt.</u> Delete the last sentence in Subsection 702.07 on page 724, and substitute the following.

Asphalt for fog seal shall conform to the requirements of Subsection 907-702.12, Table V.

<u>907-702.12--Tables.</u> Delete Table V in Subsection 702.12 on page 729, and substitute the following.

TABLE V SPECIFICATION FOR FOG SEAL

|  |      | LD-7 |      | PF-1 |              |
|--|------|------|------|------|--------------|
| Test Requirements                        | Min. | Max. | Min. | Max. | Test Method  |
| Viscosity, Saybolt Furol, @ 25°C, Sec.   | 10   | 100  | -    | 100  | AASHTO T 72  |
| Storage Stability Test, 24 hr, %         | -    | 1    | -    | 1    | AASHTO T 59  |
| Settlement, 5 day, %                     | -    | 5    | -    | -    | AASHTO T 59  |
| Oil Distillate, %                        | -    | 1    | -    | -    | AASHTO T 59  |
| Sieve Test, % *                          | -    | 0.3  | -    | 0.1  | AASHTO T 59  |
| Residue by Distillation, %               | 40   | -    | 40   | -    | AASHTO T 59  |
| Test on Residue from Distillation        |      |      |      |      |              |
| Penetration @ 25°C, 100g, 5 sec          | -    | 20   | 40   | 90   | AASHTO T 49  |
| Softening Point, °C                      | 65   | -    | -    | -    | ASTM D 36    |
| Solubility in trichloroethylene, %       | 97.5 | -    | -    | -    | AASHTO T 44  |
| Elastic Recovery @ 25°C, %               | -    | -    | 40   | -    | AASHTO T 301 |
| Original DSR @ 82° (G*/Sinδ, 10 rad/sec) | 1    | -    | -    | -    | AASHTO T 111 |

<sup>\*</sup> The Sieve Test result is tested for reporting purposes only and may be waived if no application problems are present in the field.

CODE: (IS)

#### **SPECIAL PROVISION NO. 907-703-1**

**DATE:** 06/13/2018

**SUBJECT:** Gradation

Section 703, Aggregates, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

## 907-703.03--Course Aggregates for Hydraulic Cement Concrete.

## 907-703.03.2--Detail Requirements.

<u>907-703.03.2.4--Gradation.</u> In the table in Subsection 703.03.2.4 on page 734, add 100 for the percent passing by weight on the  $1\frac{1}{2}$ -inch sieve for Size No. 67 aggregates.

#### SPECIAL PROVISION NO. 907-705-1

CODE: (IS)

**DATE:** 06/13/2018

**SUBJECT: Stone Riprap** 

Section 705, Stone Blanket Protection and Filter Blanket Materials, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

907-705.04--Stone Riprap. Delete the last sentence of the first paragraph of Subsection 705.04 on page 750, and substitute the following.

Quality requirements for rock to be furnished under these specifications will come from a preapproved source and be visually approved prior to use.

#### **SPECIAL PROVISION NO. 907-711-2**

CODE: (IS)

**DATE:** 09/11/2018

**SUBJECT: Plain Steel Wire** 

Section 711, Reinforcement and Wire Rope, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

907-711.02--Deformed and Plain Carbon-Steel Bars for Concrete Reinforcing.

907-711.02.3--Steel Welded and Non-Welded Wire Reinforcement, Plain and Deformed, for Concrete.

907-711.02.3.1--Plain Steel Wire. Delete the sentence in Subsection 711.02.3.1 on pages 780 and 781, and substitute the following.

Plain steel wire and plain steel welded wire shall conform to the requirements of AASHTO M 336.

CODE: (IS)

#### **SPECIAL PROVISION NO. 907-720-2**

**DATE:** 09/11/2018

**SUBJECT: Acceptance Procedure for Glass Beads** 

Section 720, Pavement Marking Materials, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

#### 907-720.01--Glass Beads.

<u>907-720.01.4--Acceptance Procedures.</u> Delete the last sentence of the paragraph in Subsection 720.01.4 on page 841, and substitute the following.

Acceptance sampling and testing of glass beads will be in accordance with the Department's Materials Division Inspection, Testing, and Certification Manual, Section 2.9.2 -- Glass Beads.

SPECIAL PROVISION NO. 907-803-4

CODE: (SP)

**DATE:** 04/03/2019

**SUBJECT:** Test Piles

Section 803, Deep Foundations, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

907-803.03--Construction Requirement

907-803.03.1--Driven Piles.

907-803.03.1.9--Determination of Bearing Value of Piling.

907-803.03.1.9.3--Determination of Bearing Value by PDA Monitoring (Dynamic Load Testing).

907-803.03.1.9.3.3--PDA Monitored Driving and/or Restrike of Piling.

<u>907-803.03.1.9.3.3.3--Driving Requirements.</u> Delete the first two sentences of the first paragraph of Subsection 803.03.1.9.3.3.3 on page 907, and substitute the following.

Piles to be used in the determination of pile bearing by PDA monitoring shall be driven with PDA instrumentation attached to the pile and shall have a PDA monitored 1-day restrike performed after the initial pile driving. The Engineer may modify the waiting periods that are required before the restrikes are performed. The Engineer may require additional restrikes after the 1-day restrike if deemed necessary when it is determined pile bearing requirements have not be met. Additional restrikes required by the Engineer will be paid for as a PDA restrike.

#### 907-803.04--Method of Measurement.

<u>907-803.04.12--PDA Test Pile.</u> Delete the second paragraph of Subsection 803.04.12 on page 932 and substitute the following.

Completion of this pay item shall include the 1-day restrike after initial driving and individual components will not be considered separately. Any additional restrike required by the Engineer on this type test pile will be paid for as a Pile Restrike.

#### 907-803.05--Basis of Payment.

<u>907-803.05.2--Conventional Pile Load Tests</u>. Delete the paragraph in Subsection 803.05.2 on page 933 and substitute the following.

- 2 -

Conventional static pile load tests, measured as prescribed above, will be paid for at the contract fixed unit price per each.

Delete pay items 803-B, 803-I, and 803-J on page 935 and substitute the following.

907-803-B: Conventional Static Pile Load Test - per each

907-803-I: PDA Test Pile - per each

907-803-J: Pile Restrike - per each

CODE: (SP)

#### SPECIAL PROVISION NO. 907-804-6

DATE: 02/13/2019

**SUBJECT:** Concrete Bridges and Structures

Section 804, Concrete Bridges and Structures, of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction is hereby amended as follows.

#### 907-804.02--Materials.

#### 907-804.02.3—Non-Quality Control / Quality Assurance Concrete.

Delete the third sentence of the first paragraph on page 936 and substitute the following.

The Contractor is required to submit mixture designs to accomplish this work in accordance with Section 804 and perform normal Quality Control functions in accordance with Table 4, Items A and B.

<u>907-804.02.6--Classification and Uses of Concrete.</u> After the last class of concrete listed in Section 804.02.6 on page 938, add the following.

10) Class BDX - Concrete for bridge decks (4,500 psi)

<u>907-804.02.10--Hydraulic Cement Concrete Mixture Design.</u> Add the following to Table 3 in Subsection 804.02.10 on page 941.

| BDX | Bridge Deck <sup>1</sup> | 57 or 67 | 0.42-0.45 | 4500 | 5 [-2.5] | 4.5±1.5<br>6.5±1.5 | N/A |
|-----|--------------------------|----------|-----------|------|----------|--------------------|-----|
|-----|--------------------------|----------|-----------|------|----------|--------------------|-----|

Delete footnote 1 of Table 3 in Subsection 804.02.10 on pages 941 & 942 and substitute the following.

An approved synthetic structural fiber meeting the requirements of Subsection 711.04 shall be incorporated into the mixture at 1.25 times the approved dosage rate. For each additional pound of fibers per cubic yard added in excess of the requirement stated above, an additional inch of slump will be allowed up to a maximum permitted slump of eight (8) inches.

For Class BD, the maximum cementitious material content shall be 550 pounds per cubic yard

For Class BDX, the maximum cementitious material content shall be 564 pounds per cubic yard.

Delete footnote 3 of Table 3 in Subsection 804.02.10 on page 942 and substitute the following:

<sup>3</sup> The design slump selected by the Contractor for the mixture design approval is the maximum slump permitted.

Delete the last sentence of the first paragraph on page 942 and substitute the following.

Other hydraulic cements may be used in accordance with the specifications listed in Section 701. Other small coarse aggregate sizes meeting the requirements of Subsection 703.03.2.4 may be used in conjunction with the coarse aggregate sizes listed in Table 3.

<u>907-804.02.13.1.4--Yield.</u> Delete the first sentence of Subsection 804.02.13.1.4 on page 953 and substitute the following.

If the yield of the concrete mixture is more than plus or minus three percent  $(\pm 3\%)$  of the design volume, the mixture design shall be adjusted by a Class III Certified Technician representing the Contractor to yield the correct volume, plus or minus three percent  $(\pm 3\%)$ .

<u>907.804.02.13.1.7--Static Segregation</u>. Delete the second sentence of Subsection 804.02.13.1.7 on page 954 and substitute the following.

If the static segregation of the concrete mixture design exceeds this requirement, the mixture design shall be adjusted by a Class III Certified Technician representing the Contractor to ensure a static segregation in conformance with the requirement in Table 3.

<u>907-804.03--Construction Requirements.</u> Delete Subsection 804.03.16.1 on pages 970 & 971, and substitute the following.

#### 907-804.03.16.1--Cold Weather Concreting.

**907-804.03.16.1.1--Mixture Acceptance Temperature.** For the purpose of job site acceptance temperature in accordance with Subsection 804.02.13.1.5, in cold weather, the acceptance temperature of the concrete when delivered to the job site shall conform to the temperature limitations of "Temperature Limitations on Concrete when Delivered to Job Site" listed in Table 8 below. For the purpose of job site acceptance temperature in accordance with Subsection 804.02.13.1.5, cold weather is defined as three consecutive days when there is a probability that the daily average of the highest and lowest ambient temperatures is expected to be less than 40°F. This three-day forecast shall be based on the latest information available from the National Weather Service.

TABLE 8
COLD WEATHER TEMPERATURE LIMITATIONS ON CONCRETE
WHEN DELIVERED TO JOB SITE

| Section thickness in the least dimension | Jobsite Acceptance<br>Temperature Range |
|--|---|
| inches                                   | °F                                      |
| Less than 12                             | 55 to 75                                |
| 12 to 36                                 | 50 to 70                                |
| 36 to 72                                 | 45 to 65                                |
| Greater than 72                          | 40 to 60                                |

When this definition of cold weather does not apply, there is no minimum job site acceptance temperature and the maximum job site acceptance temperature shall meet the requirements of Subsection 804.02.13.1.5.

<u>907-804.03.16.1.2--Structural Protection</u>. The Contractor shall assume all risk and added cost connected with the placing and protecting of concrete during cold weather. Permission given by the Engineer to place concrete during such time will in no way relieve the Contractor of responsibility for satisfactory results. Should it be determined at any time that the concrete placed under such conditions is unsatisfactory, it shall be removed and replaced with satisfactory concrete by the Contractor without extra compensation.

When the Contractor proposes to place concrete during seasons when there is a probability of ambient temperatures lower than 40°F, the Contractor shall have available on the project the approved facilities necessary to enclose uncured concrete and to keep the temperature of the air inside the enclosure within the ranges and for the minimum periods specified herein.

The Contractor shall assume all risk and added cost connected with the placing and protecting of concrete during cold weather. Permission given by the Engineer to place concrete during such time will in no way relieve the Contractor of responsibility for satisfactory results. Should it be determined at any time that the concrete placed under such conditions is unsatisfactory, it shall be removed and replaced with satisfactory concrete by the Contractor without extra compensation.

When there are indications of temperatures of less than 40°F during the first four days after placement of the concrete, the concrete shall be protected from cold temperatures by maintaining a temperature between 50°F and 100°F for at least four days after placement and between 40°F and 100°F for at least three additional days. The Contractor shall use such heating equipment such as stoves, salamanders, or steam equipment as deemed necessary to protect the concrete. When dry heat is used, means of maintaining atmospheric moisture shall be provided.

At the option of the Contractor with the approval of the Engineer, when concrete is placed during cold weather and there is a probability of ambient temperatures lower than 40°F, an approved maturity meter may be used to determine concrete strengths by inserting probes into concrete placed in a structure. The minimum number of maturity meter probes required for each structural component shall be in accordance with Table 7. An approved insulating blanketing material shall be used to protect the work when ambient temperatures are less than 40°F and shall remain in place until the required concrete strength in Table 6 is achieved. Procedures for using the maturity meter and developing the strength/maturity relationship shall follow the requirements of AASHTO T 325 and ASTM C 1074 specifications. Technicians using the maturity meter or calculating strength/maturity graphs shall be required to have at least two hours of training prior to using the maturity equipment.

Before placing concrete, all ice or frost shall be removed from the forms and reinforcement.

In the case of concrete placed directly on or in the ground, such as for footings or bottom slabs, protection and curing during cold weather may be provided as set for concrete pavement under Subsection 501.03.20.3.

<u>907-804.03.16.1.3--Batching Considerations.</u> One or more of the aggregates and/or mixing water may be heated. The aggregates may be heated by steam, dry heat, or by placing in the mixing

water that has been heated. Frozen aggregates shall not be used. When either aggregates or water are heated above 100°F, the aggregates and water shall be combined first in the mixer before the cement is added to avoid flash set. Cement shall not be mixed with water or with a mixture of water and aggregate having a temperature greater than 100°F.

The use of salt or other chemical admixtures in lieu of heating will not be permitted.

#### 907-804.03.17--Curing Concrete.

<u>907-804.03.17.1--Water with Waterproof Cover.</u> In the second sentence of the fourth paragraph of Subsection 804.03.17.1 on page 973, delete the word "due".

Delete the first sentence of the fifth paragraph of Subsection 804.03.17.1 on page 973, and substitute the following.

The Contractor shall maintain the burlap in a fully wet condition using powered fogging equipment, such as a commercially available pressure washer, which is capable of producing a fog spray of atomized droplets of water (i.e., producing a very fine and gentle mist that looks like a foggy morning) until the concrete has gained sufficient strength to allow foot traffic without the foot traffic marring the surface of the concrete.

In the second sentence of the eighth paragraph of Subsection 804.03.17.1 on page 973, replace the word "like" with "such as".

<u>907-804.03.17.1.2--Liquid Membrane.</u> In the first sentence of the first paragraph of Subsection 804.03.17.1 on page 973, replace "polyethylene sheets" with "white polyethylene sheets."

<u>907-804.05--Basis of Payment.</u> Delete the first and second pay items listed on page 999, and substitute the following.

| 907-804-A: | Bridge Concrete, Class     | - per cubic yard |
|------------|----------------------------|------------------|
| 907-804-B: | Box Bridge Concrete, Class | - per cubic yard |

CODE: (SP)

#### SPECIAL PROVISION NO. 907-899-1

**DATE:** 01/17/2017

**SUBJECT:** Railway-Highway Provisions

Section 907-899, Railway-Highway Provisions, is hereby added to and made part of the 2017 Edition of the Mississippi Standard Specifications for Road and Bridge Construction as follows:

## **SECTION 907-899--RAILWAY-HIGHWAY PROVISIONS**

<u>907-899.01--Description</u>. This special provision addresses the Contractor's involvement with railroad flagging, Contractor Safety Orientation, Contractor Background Investigation, Contractor Roadway Worker on Track Safety Program and Safety Action Plan, and any other requirements set forth by the Railroad and any attached Exhibits.

Prior to bidding, the Contractor shall read and comply with the requirements of the Railroad and any attached Exhibits. The Contractor shall contact the Railroad concerning insurance coverage requirements, Railroad flagging costs, Contractor Safety Orientation, Contractor Background Investigation, Contractor Roadway Worker on Track Safety Program and Safety Action Plan, and any other requirements set forth by the Railroad and any attached Exhibits. In case the railroad requires coverage over and above that required by the Standard Specifications, the railroad requirements shall be met.

If in the opinion of the RAILROAD, the presence of an authorized representative of the RAILROAD is required to supervise the same, the RAILROAD shall render bills to the Contractor for all expenses incurred by it for such supervision. This includes all labor costs for flagmen or cable locate supplied by the RAILROAD to protect RAILROAD operation, and for the full cost of furnishing, installation and later removal of any temporary supports for said tracks, as the RAILROAD's Chief Engineer's Office may deem necessary.

# It will be the Contractor's responsibility to pay all bills associated with the Railroad requirements and any attached Exhibits.

A cable locate of RAILROAD owned facilities may be required to identify and protect Signal & Communication cables that have been installed to provide power, signal control, wayside communications. These cables are vital to a safe and reliable railway operation. The cable locate will be performed by a qualified RAILROAD employee.

Outside Contractors are prohibited from driving on, along, or across <u>any</u> track that does not have a RAILROAD installed crossing. They may utilize an existing public crossing. The practice of allowing rubber tired equipment to operate over track with no crossing has been banned.

The Contractor shall complete and process any required forms addressed by the Railroad or any attached Exhibits. The Contractor shall not commence or carry on any form of work on, under, above or within the designated distance from the Railroad track prior to getting approval from the Railroad.

#### 907-899.02--Blank.

<u>907-899.03--Construction Requirements</u>. The Contractor shall read and comply with the requirements of the Railroad and any attached Exhibits.

<u>907-899.04--Method of Measurement.</u> Railway-highway provisions will be measured as a unit lump sum quantity. Measurement for payment will be in accordance with the following schedule:

- a) On the first estimate, twenty five percent (25%) of the amount bid for Railway Highway Provision will be paid.
- b) When twenty five percent (25%) of the original contract amount is earned from all direct pay items, fifty percent (50%) of the amount bid for Railway Highway Provision will be paid.
- c) When fifty percent (50%) of the original contract amount is earned from all direct pay items, one hundred percent (100%) of the amount bid for Railway Highway Provision will be paid.

<u>907-899.05--Basis of Payment.</u> Railway-highway provisions, measured a prescribed above, will be paid for at the contract lump sum price, which price shall be payment in full for all insurance coverage requirements, railroad flagging costs, Contractor safety orientation, Contractor background investigation, Contractor safety programs and plans, and any other requirements set forth by the Railroad and any attached Exhibits, and other incidentals necessary to complete the requirements of this work.

Payment will be made under:

907-899-A: Railway-Highway Provisions

- lump sum



# EXHIBIT "C"

#### CONTRACTOR REQUIREMENTS

#### 1.01 General:

- 1.01.01 The Contractor must cooperate with BNSF RAILWAY COMPANY, hereinafter referred to as "Railway" where work is over or under on or adjacent to Railway property and/or right-of-way, hereafter referred to as "Railway Property", during the removal and construction of the S.R. 4 (Salem Avenue) overpass (DOT No. 667242P) located at railroad mllepost 528.35 on Railway's Birmingham Subdivision, Line Segment 1001 in Holly Springs, Mississippi in Marshall County.
- 1.01.02 The Contractor must execute and deliver to the Railway duplicate copies of the Exhibit "C-1" Agreement, in the form attached hereto, obligating the Contractor to provide and maintain in full force and effect the insurance called for under Section 3 of said Exhibit "C-1". Questions regarding procurement of the Railroad Protective Liability Insurance should be directed to Rosa Martinez at Marsh, USA, 214-303-8519.
- 1.01.03 The Contractor must plan, schedule and conduct all work activities so as not to interfere with the movement of any trains on Railway Property.
- 1.01.04 The Contractor's right to enter Railway's Property is subject to the absolute right of Railway to cause the Contractor's work on Railway's Property to cease if, in the opinion of Railway, Contractor's activities create a hazard to Railway's Property. employees, and/or operations. Railway will have the right to stop construction work on the Project if any of the following events take place: (i) Contractor (or any of its subcontractors) performs the Project work in a manner contrary to the plans and specifications approved by Railway; (ii) Contractor (or any of its subcontractors), in Railway's opinion, prosecutes the Project work in a manner which is hazardous to Railway property, facilities or the safe and expeditious movement of railroad traffic: (iii) the insurance described in the attached Exhibit C-1 is canceled during the course of the Project; or (iv) Contractor fails to pay Railway for the Temporary Construction License or the Easement. The work stoppage will continue until all necessary actions are taken by Contractor or its subcontractor to rectify the situation to the satisfaction of Railway's Division Engineer or until additional insurance has been delivered to and accepted by Railway. In the event of a breach of (i) this Agreement, (ii) the Temporary Construction License, or (iii) the Easement, Railway may immediately terminate the Temporary Construction License or the Easement. Any such work stoppage under this provision will not give rise to any liability on the part of Railway. Railway's right to



stop the work is in addition to any other rights Railway may have including, but not limited to, actions or sults for damages or lost profits. In the event that Railway desires to stop construction work on the Project, Railway agrees to immediately notify the following individual in writing:

|             | Timothy L. Rayborn, P.E.        |  |  |  |
|-------------|---------------------------------|--|--|--|
|             | Railroad Contract Engineer      |  |  |  |
| SIN         | Agency: City of Fert Worth      |  |  |  |
| <b>4</b> 0- | P.O. Box 1850                   |  |  |  |
|             | Jackson, Mississippi 39215-1850 |  |  |  |
|             | Phone: 601-359-7192             |  |  |  |
|             | Fax: 601-359-7110               |  |  |  |
|             | E-mail: TLRayborn@mdot.ms.gov   |  |  |  |

- 1.01.05 The Contractor is responsible for determining and complying with all Federal, State and Local Governmental laws and regulations, including, but not limited to environmental laws and regulations (including but not limited to the Resource Conservation and Recovery Act, as amended; the Clean Water Act, the Oil Pollution Act, the Hazardous Materials Transportation Act, CERCLA), and health and safety laws and regulations. The Contractor hereby indemnifies, defends and holds harmless Railway for, from and against all fines or penalties imposed or assessed by Federal, State and Local Governmental Agencies against the Railway which arise out of Contractor's work under this Agreement.
- 1.01.06 The Contractor must notify <u>State of Mississippi (Timothy Raybborn) at Office # 601-359-7192</u> and Railway's Manager Public Projects, telephone number <u>817-352-2902</u> at least thirty (30) calendar days before commencing any work on Railway Property. Contractor's notification to Railway must refer to Railway's file <u>667242P</u>.
- 1.01.07 For any bridge demolition and/or falsework above any tracks or any excavations located with any part of the excavations located within, whichever is greater, twenty-five (25) feet of the nearest track or intersecting a slope from the plane of the top of rail on a 2 horizontal to 1 vertical slope beginning at eleven (11) feet from centerline of the nearest track, both measured perpendicular to center line of track, the Contractor must furnish the Railway five sets of working drawings showing details of construction affecting Railway Property and tracks. The working drawing must include the proposed method of installation and removal of falsework, shoring or cribbing, not included in the contract plans and two sets of structural calculations of any falsework, shoring or cribbing. For all excavation and shoring submittal plans, the current "BNSF-UPRR Guidelines for Temporary Shoring" must be used for determining the design loading conditions to be used in shoring design, and all calculations and submittals must be in accordance with the current "BNSF-UPRR



Guidelines for Temporary Shoring". All submittal drawings and calculations must be stamped by a registered professional engineer licensed to practice in the state the project is located. All calculations must take into consideration railway surcharge loading and must be designed to meet American Railway Engineering and Maintenance-of-Way Association (previously known as American Railway Engineering Association) Coopers E-80 live loading standard. All drawings and calculations must be stamped by a registered professional engineer licensed to practice in the state the project is located. The Contractor must not begin work until notified by the Railway that plans have been approved. The Contractor will be required to use lifting devices such as, cranes and/or winches to place or to remove any falsework over Railway's tracks. In no case will the Contractor be relieved of responsibility for results obtained by the implementation of said approved plans.

1.01.08 Subject to the movement of Railway's trains, Railway will cooperate with the
Contractor such that the work may be handled and performed in an efficient manner.
The Contractor will have no claim whatsoever for any type of damages or for extra or
additional compensation in the event his work is delayed by the Railway.

#### 1.02 Contractor Safety Orientation

• 1.02.01 No employee of the Contractor, its subcontractors, agents or invitees may enter Railway Property without first having completed Railway's Engineering Contractor Safety Orientation, found on the web site www.BNSFContractor.com. The Contractor must ensure that each of its employees, subcontractors, agents or invitees completes Railway's Engineering Contractor Safety Orientation through internet sessions before any work is performed on the Project. Additionally, the Contractor must ensure that each and every one of its employees, subcontractors, agents or invitees possesses a card certifying completion of the Railway Contractor Safety Orientation before entering Railway Property. The Contractor is responsible for the cost of the Railway Contractor Safety Orientation. The Contractor must renew the Railway Contractor Safety Orientation annually. Further clarification can be found on the web site or from the Railway's Representative.

# 1.03 Railway Requirements

1.03.01 The Contractor must take protective measures as are necessary to keep
railway facilities, including track ballast, free of sand, debris, and other foreign objects
and materials resulting from his operations. Any damage to railway facilities resulting
from Contractor's operations will be repaired or replaced by Railway and the cost of
such repairs or replacement must be paid for by the Agency.

PP-102 - 12/12/2017



- 1.03.02 The Contractor must notify the Railway's Division Engineer <u>Justin Lopez</u> at Office # <u>901-433-7400</u> and provide blasting plans to the Railway for review seven (7) calendar days prior to conducting any blasting operations adjacent to or on Railway's Property.
- 1.03.03 The Contractor must abide by the following temporary clearances during construction:

| 111 | 15'-0" | Horizontally from centerline of nearest track |
|-----|--------|---|
|-----|--------|---|

21'-6" Vertically above top of rail

27'-0" Vertically above top of rail for electric wires carrying less than 750 volts

 28'-0" Vertically above top of rail for electric wires carrying 750 volts to 15.000 volts

 30'-0" Vertically above top of rail for electric wires carrying 15,000 volts to 20,000 volts

 34'-0" Vertically above top of rail for electric wires carrying more than 20,000 volts

- 1.03.04 Upon completion of construction, the following clearances shall be maintained:
  - 25' Horizontally from centerline of nearest track
  - 23' 6" Vertically above top of rail
- 1.03.05 Any infringement within State statutory clearances due to the Contractor's operations must be submitted to the Railway and to the <u>State of Mississippi (MDOT)</u> and must not be undertaken until approved in writing by the Railway, and until the <u>State of Mississippi (MDOT)</u> has obtained any necessary authorization from the State Regulatory Authority for the infringement. No extra compensation will be allowed in the event the Contractor's work is delayed pending Railway approval, and/or the State Regulatory Authority's approval.
- 1.03.06 In the case of impaired vertical clearance above top of rail, Railway will have
  the option of installing tell-tales or other protective devices Railway deems necessary
  for protection of Railway operations. The cost of tell-tales or protective devices will be
  borne by the Agency.
- 1.03.07 The details of construction affecting the Railway's Property and tracks not included in the contract plans must be submitted to the Railway by <u>State of Mississippi (MDOT)</u> for approval before work is undertaken and this work must not be undertaken until approved by the Railway.



- 1.03.08 At other than public road crossings, the Contractor must not move any equipment or materials across Railway's tracks until permission has been obtained from the Railway. The Contractor must obtain a "Temporary Construction Crossing Agreement" from the Railway prior to moving his equipment or materials across the Railways tracks. The temporary crossing must be gated and locked at all times when not required for use by the Contractor. The temporary crossing for use of the Contractor will be constructed and, at the completion of the project, removed at the expense of the Contractor.
- 1.03.09 Discharge, release or spill on the Railway Property of any hazardous substances, oil, petroleum, constituents, pollutants, contaminants, or any hazardous waste is prohibited and Contractor must immediately notify the <u>Railway's Resource Operations Center at 1(800) 832-5452</u>, of any discharge, release or spills in excess of a reportable quantity. Contractor must not allow Railway Property to become a treatment, storage or transfer facility as those terms are defined in the Resource Conservation and Recovery Act or any state analogue.
- 1.03.10 The Contractor upon completion of the work covered by this contract, must promptly remove from the Railway's Property all of Contractor's tools, equipment, implements and other materials, whether brought upon said property by said Contractor or any Subcontractor, employee or agent of Contractor or of any Subcontractor, and must cause Railway's Property to be left in a condition acceptable to the Railway's representative.

# 1.04 Contractor Roadway Worker on Track Safety Program and Safety Action Plan:

• 1.04.01 Each Contractor that will perform work within 25 feet of the centerline of a track must develop and implement a Roadway Worker Protection/On Track Safety Program and work with Railway Project Representative to develop an on track safety strategy as described in the guidelines listed in the on track safety portion of the Safety Orientation. This Program must provide Roadway Worker protection/on track training for all employees of the Contractor, its subcontractors, agents or invitees. This training is reinforced at the job site through job safety briefings. Additionally, each Contractor must develop and implement the Safety Action Plan, as provided for on the web site <a href="https://www.BNSFContractor.com">www.BNSFContractor.com</a>, which will be made available to Railway prior to commencement of any work on Railway Property. During the performance of work, the Contractor must audit its work activities. The Contractor must designate an on-site Project Supervisor who will serve as the contact person for the Railway and who will maintain a copy of the Safety Action Plan, safety audits, and Material Safety Datasheets (MSDS), at the job site.



• 1.04.02 Contractor shall have a background investigation performed on all of its employees, subcontractors and agents who will be performing any services for Rallroad under this Agreement which are determined by Railroad in its sole discretion a) to be on Railroad's property, or b) that require access to Railroad Critical Infrastructure, Railroad Critical Information Systems, Railroad's Employees, Hazardous Materials on Railroad's property or is being transported by or otherwise in the custody of Railroad, or Freight in Transit involving Railroad.

The required background screening shall at a minimum meet the rail industry background screening criteria defined by the e-RAILSAFE Program as outlined at <a href="https://www.everifile.com">www.everifile.com</a>, in addition to any other applicable regulatory requirements.

Contractor shall obtain written consent from all its employees, subcontractors or agents screened in compliance with the e-RAILSAFE Program to participate in the Program on their behalf and to release completed background information to Railroad's designee. Contractor shall be subject to periodic audit to ensure compliance.

Contractor subject to the e-RAILSAFE Program hereunder shall not permit any of its employees, subcontractors or agents to perform services hereunder who are not first approved under e-RAILSAFE Program standards. Railroad shall have the right to deny entry onto its premises or access as described in this section above to any of Contractor's employees, subcontractors or agents who do not display the authorized identification badge issued by a background screening service meeting the standards set forth in the e-RAILSAFE Program, or who in Railroad's opinion, which may not be unreasonable, may pose a threat to the safety or security of Railroad's operations, assets or personnel.

Contractors shall be responsible for ensuring that its employees, subcontractors and agents are United States citizens or legally working in the United States under a lawful and appropriate work VISA or other work authorization.

# 1.05 Railway Flagger Services:

1.05.01 The Contractor must give Railway's Roadmaster William Henderson at Office # 662-315-3127 or Mobile # 901-651-4565 and e-mail: William.Henderson2@BNSF.com a minimum of thirty (30) calendar days advance notice when flagging services will be required so that the Roadmaster can make appropriate arrangements (i.e., bulletin the flagger's position). If flagging services are scheduled in advance by the Contractor and it is subsequently determined by the

PP-102 - 12/12/2017 6



parties hereto that such services are no longer necessary, the Contractor must give the Roadmaster five (5) working days advance notice so that appropriate arrangements can be made to abolish the position pursuant to union requirements.

- 1.05.02 Unless determined otherwise by Railway's Project Representative, Railway flagger will be required and furnished when Contractor's work activities are located over, under and/or within twenty-five (25) feet measured horizontally from centerline of the nearest track and when cranes or similar equipment positioned beyond 25-feet from the track centerline could foul the track in the event of tip over or other catastrophic occurrence, but not limited thereto for the following conditions:
  - 1.05.02a When, upon inspection by Railway's Representative, other conditions warrant.
  - 1.05.02b When any excavation is performed below the bottom of tie elevation, if, in the opinion of Railway's representative, track or other Railway facilities may be subject to movement or settlement.
  - 1.05.02c When work in any way interferes with the safe operation of trains at timetable speeds.
  - 1.05.02d When any hazard is presented to Railway track, communications, signal, electrical, or other facilities either due to persons, material, equipment or blasting in the vicinity.
  - 1.05.02e Special permission must be obtained from the Railway before
    moving heavy or cumbersome objects or equipment which might result
    in making the track impassable.
- 1.05.03 Flagging services will be performed by qualified Railway flaggers.
  - 1.05.03a Flagging crew generally consists of one employee. However, additional personnel may be required to protect Railway Property and operations, if deemed necessary by the Railways Representative.
  - 1.05.03b Each time a flagger is called, the minimum period for billing will be the eight (8) hour basic day.
  - 1.05.03c The cost of flagger services provided by the Railway will be borne by <u>CONTRACTOR</u>. The estimated cost for one (1) flagger is approximately between \$800.00-\$1,600.00 for an eight (8) hour basic day with time and one-half or double time for overtime, rest days and holidays. The estimated cost for each flagger includes vacation

PP-102 - 12/12/2017



allowance, paid holidays, Railway and unemployment insurance, public liability and property damage insurance, health and welfare benefits, vehicle, transportation, meals, lodging, radio, equipment, supervision and other costs incidental to performing flagging services. Negotiations for Railway labor or collective bargaining agreements and rate changes authorized by appropriate Federal authorities may increase actual or estimated flagging rates. THE FLAGGING RATE IN EFFECT AT THE TIME OF PERFORMANCE BY THE CONTRACTOR HEREUNDER WILL BE USED TO CALCULATE THE ACTUAL COSTS OF FLAGGING PURSUANT TO THIS PARAGRAPH.

**1.05.03d** The average train traffic on this route is  $\underline{10}$  freight trains per 24-hour period at a timetable speed  $\underline{30}$  MPH and  $\underline{0}$  passenger trains at a timetable speed of  $\underline{n/a}$  MPH.

## 1.06 Contractor General Safety Requirements

- 1.06.01 Work in the proximity of railway track(s) is potentially hazardous where
  movement of trains and equipment can occur at any time and in any direction. All work
  performed by contractors within 25 feet of any track must be in compliance with FRA
  Roadway Worker Protection Regulations.
- 1.06.02 Before beginning any task on Railway Property, a thorough job safety briefing must be conducted with all personnel involved with the task and repeated when the personnel or task changes. If the task is within 25 feet of any track, the job briefing must include the Railway's flagger, as applicable, and include the procedures the Contractor will use to protect its employees, subcontractors, agents or invitees from moving any equipment adjacent to or across any Railway track(s).
- 1.06.03 Workers must not work within 25 feet of the centerline of any track without an on track safety strategy approved by the Railway's Project Representative. When authority is provided, every contractor employee must know: (1) who the Railway flagger is, and how to contact the flagger, (2) limits of the authority, (3) the method of communication to stop and resume work, and (4) location of the designated places of safety. Persons or equipment entering flag/work limits that were not previously job briefed, must notify the flagger immediately, and be given a job briefing when working within 25 feet of the center line of track.
- 1.06.04 When Contractor employees are required to work on the Railway Property
  after normal working hours or on weekends, the Railway's representative in charge of
  the project must be notified. A minimum of two employees must be present at all times.



- 1.06.05 Any employees, agents or invitees of Contractor or its subcontractors under suspicion of being under the influence of drugs or alcohol, or in the possession of same, will be removed from the Railway's Property and subsequently released to the custody of a representative of Contractor management. Future access to the Railway's Property by that employee will be denied.
- 1.06.06 Any damage to Railway Property, or any hazard noticed on passing trains must be reported immediately to the Railway's representative in charge of the project. Any vehicle or machine which may come in contact with track, signal equipment, or structure (bridge) and could result in a train derailment must be reported immediately to the Railway representative in charge of the project and to the Railway's Resource Operations Center at 1(800) 832-5452. Local emergency numbers are to be obtained from the Railway representative in charge of the project prior to the start of any work and must be posted at the job site.
- 1.06.07 For safety reasons, all persons are prohibited from having pocket knives, firearms or other deadly weapons in their possession while working on Railway's Property.
- 1.06.09 THE CONTRACTOR MUST NOT PILE OR STORE ANY MATERIALS, MACHINERY OR EQUIPMENT CLOSER THAN 25'-0" TO THE CENTER LINE OF THE NEAREST RAILWAY TRACK. MATERIALS, MACHINERY OR EQUIPMENT MUST NOT BE STORED OR LEFT WITHIN 250 FEET OF ANY HIGHWAY/RAIL AT-GRADE CROSSINGS OR TEMPORARY CONSTRUCTION CROSSING, WHERE STORAGE OF THE SAME WILL OBSTRUCT THE VIEW OF A TRAIN APPROACHING THE CROSSING. PRIOR TO BEGINNING WORK, THE CONTRACTOR MUST ESTABLISH A STORAGE AREA WITH CONCURRENCE OF THE RAILWAY'S REPRESENTATIVE.
- 1.06.10 Machines or vehicles must not be left unattended with the engine running.



Parked machines or equipment must be in gear with brakes set and if equipped with blade, pan or bucket, they must be lowered to the ground. All machinery and equipment left unattended on Railway's Property must be left inoperable and secured against movement. (See internet Engineering Contractor Safety Orientation program for more detailed specifications)

- 1.06.11 Workers must not create and leave any conditions at the work site that
  would interfere with water drainage. Any work performed over water must meet all
  Federal, State and Local regulations.
- 1.06.12 All power line wires must be considered dangerous and of high voltage unless informed to the contrary by proper authority. For all power lines the minimum clearance between the lines and any part of the equipment or load must be; 200 KV or below 15 feet; 200 to 350 KV 20 feet; 350 to 500 KV 25 feet; 500 to 750 KV 35 feet; and 750 to 1000 KV 45 feet. If capacity of the line is not known, a minimum clearance of 45 feet must be maintained. A person must be designated to observe clearance of the equipment and give a timely warning for all operations where it is difficult for an operator to maintain the desired clearance by visual means.

#### 1.07 Excavation:

- 1.07.01 Before excavating, the Contractor must determine whether any underground pipe lines, electric wires, or cables, including fiber optic cable systems are present and located within the Project work area. The Contractor must determine whether excavation on Railway's Property could cause damage to buried cables resulting in delay to Railway traffic and disruption of service to users. Delays and disruptions to service may cause business interruptions involving loss of revenue and profits. Before commencing excavation, the Contractor must contact BNSF's Roadmaster (William Henderson) at Office # 662-315-3127 and BNSF's Signal Supervisor (Homer Herring) at Office # 662-305-3108. All underground and overhead wires will be considered HIGH VOLTAGE and dangerous until verified with the company having ownership of the line. It is the Contractor's responsibility to notify any other companies that have underground utilities in the area and arrange for the location of all underground utilities before excavating.
- 1.07.02 The Contractor must cease all work and notify the Railway immediately before continuing excavation in the area if obstructions are encountered which do not appear on drawings. If the obstruction is a utility and the owner of the utility can be identified, then the Contractor must also notify the owner immediately. If there is any doubt about the location of underground cables or lines of any kind, no work must be performed until the exact location has been determined. There will be no exceptions to these instructions.



- 1.07.03 All excavations must be conducted in compliance with applicable OSHA
  regulations and, regardless of depth, must be shored where there is any danger to
  tracks, structures or personnel.
- 1.07.04 Any excavations, holes or trenches on the Railway's Property must be covered, guarded and/or protected when not being worked on. When leaving work site areas at night and over weekends, the areas must be secured and left in a condition that will ensure that Railway employees and other personnel who may be working or passing through the area are protected from all hazards. All excavations must be back filled as soon as possible.

# 1.08 Hazardous Waste, Substances and Material Reporting:

• 1.08.01 If Contractor discovers any hazardous waste, hazardous substance, petroleum or other deleterious material, including but not limited to any non-containerized commodity or material, on or adjacent to Railway's Property, in or near any surface water, swamp, wetlands or waterways, while performing any work under this Agreement, Contractor must immediately: (a) notify the Railway's Resource Operations Center at 1(800) 832-5452, of such discovery: (b) take safeguards necessary to protect its employees, subcontractors, agents and/or third parties: and (c) exercise due care with respect to the release, including the taking of any appropriate measure to minimize the impact of such release.

# 1.09 Personal Injury Reporting

• 1.09.01 The Railway is required to report certain injuries as a part of compliance with Federal Railroad Administration (FRA) reporting requirements. Any personal injury sustained by an employee of the Contractor, subcontractor or Contractor's invitees while on the Railway's Property must be reported immediately (by phone mail if unable to contact in person) to the Railway's representative in charge of the project. The Non-Employee Personal Injury Data Collection Form contained herein is to be completed and sent by Fax to the Railway at 1(817) 352-7595 and to the Railway's Project Representative no later than the close of shift on the date of the injury.





# NON-EMPLOYEE PERSONAL INJURY DATA COLLECTION

(If injuries are in connection with rail equipment accident/incident, highway rail grade crossing accident or automobile accident, ensure that appropriate information is obtained, forms completed and that data entry personnel are aware that injuries relate to that specific event.)

| Injured Person Type:  |  |  |
|---|--|--|
| Passenger on train (C)  | Non-employee (N) (i.e., emp of another railroad, company vehicles) | l, ur, non-BNSF emp involved in vehicle accident, including  |
| Contractor/safety sensitive (F)                               | Contractor/non-safet   | ty sensitive (G)   |
| Volunteer/safety sensitive (H)                                | Volunteer/other non-   | safety sensitive (1)   |
| Non-trespasser (D) - to include<br>go around or through gates | highway users involved in high                                     | nway rail grade crossing accidents who did not   |
| Trespasser (E) - to include high<br>or through gates          | vay users involved in highway i                                    | rail grade crossing accidents who went around  |
| Non-trespasser (J) - Off railroad                             | d property   |  |
| · If train involved, Train ID:                                |  |  |
|   | 800-697-6736 <b>or en</b>  | :<br>nail to: <u>Accident-Reporting.Center@BNSF.com</u><br>:R PUBLIC PROJECTS <u>Tim.Huya@BNSF.com</u> |
| (Name)  | (Employee No.)   | (Phone #)  |

REPORT PREPARED TO COMPLY WITH FEDERAL ACCIDENT REPORTING REQUIREMENTS AND PROTECTED FROM DISCLOSURE PURSUANT TO 49 U.S.C. 20903 AND 83 U.S.C. 490

PP-102 - 12/12/2017 12



# NON-EMPLOYEE PERSONAL INJURY DATA COLLECTION

INFORMATION REQUIRED TO BE COLLECTED PURSUANT TO FEDERAL REGULATION. IT SHOULD BE USED FOR COMPLIANCE WITH FEDERAL REBULATIONS ONLY AND IT IS NOT INTENDED TO PRESUME ACCEPTANCE OF RESPONSIBILITY OR LIABILITY.

| I. Accident City/St:  | 2. Oate:                     |                 | Time:                                   |                                       |
|---|------------------------------|-----------------|---|---------------------------------------|
| County:   | 3. Tempera                   | nture:          | 4. Weether:                             |                                       |
| (if non BNSF location)                                      |                              |                 |   | _                                     |
| Mile Post / Line Segment:                                   |                              |                 |   |                                       |
| 5. Driver's License No (and state) or other 10:             |                              | SSN (required). | •                                       |                                       |
| 6. Name (last, first, mi):                                  |                              |                 |   |                                       |
| 7. Address;   | City:                        | St:             | Zip;                                    |                                       |
| 8. Date of Birth:   | and/or Age:<br>(If available | Gender:         |   |                                       |
| Phone Number:   | Employer:                    |                 |   |                                       |
| 9. Injury:  |                              | ID. Body Part:  |   |                                       |
| (i.e., Laceratio  | n, etc.)                     | в.і)            | , Hand, etc.)                           |                                       |
| II. Description of Accident (To include location, action, r | result, etc.):               |                 |   | · · · · · · · · · · · · · · · · · · · |
|   |                              |                 |   |                                       |
|   |                              |                 | 3 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 |                                       |
| 12. Treatment:  |                              |                 |   | •                                     |
| First Ald Only  |                              |                 |   |                                       |
| Required Medical Treatment                                  |                              |                 |   |                                       |
| Other Medical Treatment                                     |                              |                 |   |                                       |
| 13. Dr. Neme:   |                              | Oate;           | ~~~ <del>~</del>                        |                                       |
| 14. Dr. Address:  |                              |                 |   |                                       |
| Street:   | City:                        | St:             | Zip:                                    | ·······                               |
| 15. Hospital Name:  |                              |                 |   |                                       |
| 16. Hospital Address:                                       |                              |                 |   |                                       |
| Street:   | City:                        | St:             | Zip:                                    |                                       |
| !7. Olagnosis:  |                              |                 |   |                                       |

REPORT PREPARED TO COMPLY WITH FEDERAL ACCIDENT REPORTING REQUIREMENTS AND PROTECTED FROM DISCLOSURE PURSUANT TO 49 U.S.C. 20903 AND 83 U.S.C. 490



#### EXHIBIT "C-1"

# Agreement Between BNSF RAILWAY COMPANY and the CONTRACTOR

Railway File:

667242P

Agency Project:

Removal an Construction of SR 4 overpass

(hereinafter called "Contractor"), has entered into an agreement (hereinafter called "Agreement") with the <u>State of Mississippi (MDOT)</u> for the performance of certain work in connection with the following project: <u>removal and construction of the S.R. 4 (Salem Avenue) overpass (DOT No. 667242P)</u> <u>located at railroad milepost 528.35 on Railway's Birmingham Subdivision, Line Segment 1001 in Holly Springs, Mississippl in Marshall County.</u>

Performance of such work will necessarily require Contractor to enter BNSF RAILWAY COMPANY (hereinafter called "Railway") right of way and property (hereinafter called "Railway Property"). The Agreement provides that no work will be commenced within Railway Property until the Contractor employed in connection with said work for <u>State of Mississippi (MDOT)</u> (i) executes and delivers to Railway an Agreement in the form hereof, and (ii) provides insurance of the coverage and limits specified in such Agreement and Section 3 herein. If this Agreement is executed by a party who is not the Owner, General Partner, President or Vice President of Contractor, Contractor must furnish evidence to Railway certifying that the signatory is empowered to execute this Agreement on behalf of Contractor.

Accordingly, in consideration of Railway granting permission to Contractor to enter upon Railway Property and as an inducement for such entry, Contractor, effective on the date of the Agreement, has agreed and does hereby agree with Railway as follows:

# 1) RELEASE OF LIABILITY AND INDEMNITY

Contractor hereby walves, releases, indemnifies, defends and holds harmless Railway for all judgments, awards, claims, demands, and expenses (including attorneys' fees), for injury or death to all persons, including Railway's and Contractor's officers and employees, and for loss and damage to property

Exhibit C-1, BNSF FORM 0107 - 12/12/2017



belonging to any person, arising in any manner from Contractor's or any of Contractor's subcontractors' acts or omissions or any work performed on or about Railway's property or right-of-way. THE LIABILITY ASSUMED BY CONTRACTOR WILL NOT BE AFFECTED BY THE FACT, IF IT IS A FACT, THAT THE DESTRUCTION, DAMAGE, DEATH, OR INJURY WAS OCCASIONED BY OR CONTRIBUTED TO BY THE NEGLIGENCE OF RAILWAY, ITS AGENTS, SERVANTS, EMPLOYEES OR OTHERWISE, EXCEPT TO THE EXTENT THAT SUCH CLAIMS ARE PROXIMATELY CAUSED BY THE INTENSIONAL MISCONDUCT OR GROSS NEGLIGENCE OF RAILWAY.

THE INDEMNIFICATION OBLIGATION ASSUMED BY CONTRACTOR INCLUDES ANY CLAIMS, SUITS OR JUDGMENTS BROUGHT AGAINST RAILWAY UNDER THE FEDERAL EMPLOYEE'S LIABILITY ACT, INCLUDING CLAIMS FOR STRICT LIABILITY UNDER THE SAFETY APPLIANCE ACT OR THE LOCOMOTIVE INSPECTION ACT, WHENEVER SO CLAIMED.

Contractor further agrees, at its expense, in the name and on behalf of Railway, that it will adjust and settle all claims made against Railway, and will, at Railway's discretion, appear and defend any suits or actions of law or in equity brought against Railway on any claim or cause of action arising or growing out of or in any manner connected with any liability assumed by Contractor under this Agreement for which Railway is liable or is alleged to be liable. Railway will give notice to Contractor, in writing, of the receipt or dependency of such claims and thereupon Contractor must proceed to adjust and handle to a conclusion such claims, and in the event of a suit being brought against Railway, Railway may forward summons and complaint or other process in connection therewith to Contractor, and Contractor, at Railway's discretion, must defend, adjust, or settle such suits and protect, indemnify, and save harmless Railway from and against all damages, judgments, decrees, attorney's fees, costs, and expenses growing out of or resulting from or incident to any such claims or suits.

In addition to any other provision of this Agreement, in the event that all or any portion of this Article shall be deemed to be inapplicable for any reason, including without limitation as a result of a decision of an applicable court, legislative enactment or regulatory order, the parties agree that this Article shall be interpreted as requiring Contractor to indemnify Railway to the fullest extent permitted by applicable law. THROUGH THIS AGREEMENT THE PARTIES EXPRESSLY INTEND FOR CONTRACTOR TO INDEMNIFY RAILWAY FOR RAILWAY'S ACTS OF NEGLIGENCE.



It is mutually understood and agreed that the assumption of liabilities and indemnification provided for in this Agreement survive any termination of this Agreement.

### 2) TERM

This Agreement is effective from the date of the Agreement until (i) the completion of the project set forth herein, and (ii) full and complete payment to Railway of any and all sums or other amounts owing and due hereunder.

### 3) **INSURANCE**

Contractor shall, at its sole cost and expense, procure and maintain during the life of this Agreement the following insurance coverage:

- A. Commercial General Liability insurance. This insurance shall contain broad form contractual liability with a combined single limit of a minimum of \$5,000,000 each occurrence and an aggregate limit of at least \$10,000,000 but in no event less than the amount otherwise carried by the Contractor. Coverage must be purchased on a post 2004 ISO occurrence form or equivalent and include coverage for, but not limit to the following:
  - Bodily Injury and Property Damage
  - Personal Injury and Advertising Injury
  - ♦ Fire legal liability
  - Products and completed operations

This policy shall also contain the following endorsements, which shall be indicated on the certificate of insurance:

- ◆ The definition of insured contract shall be amended to remove any exclusion or other limitation for any work being done within 50 feet of railroad property.
- Waver of subrogation in favor of and acceptable to Railway.
- Additional insured endorsement in favor of and acceptable to Railway.
- ♦ Separation of insureds.
- The policy shall be primary and non-contributing with respect to any insurance carried by Railway.

Exhibit C-1, BNSF FORM 0107 - 12/12/2017



It is agreed that the workers' compensation and employers' liability related exclusions in the Commercial General Liability insurance policy(s) required herein are intended to apply to employees of the policy holder and shall not apply to *Railway* employees.

No other endorsements limiting coverage as respects obligations under this Agreement may be included on the policy with regard to the work being performed under this agreement.

- B. Business Automobile Insurance. This Insurance shall contain a combined single limit of at least \$1,000,000 per occurrence, and include coverage for, but not limited to the following:
  - Bodily injury and property damage
  - ♦ Any and all vehicles owned, used or hired

The policy shall also contain the following endorsements or language, which shall be indicated on the certificate of insurance:

- Waiver of subrogation in favor of and acceptable to Railway.
- Additional insured endorsement in favor of and acceptable to Railway.
- Separation of insureds.
- The policy shall be primary and non-contributing with respect to any insurance carried by Railway.
- C. Workers Compensation and Employers Liability insurance including coverage for, but not limited to:
  - Contractor's statutory liability under the worker's compensation laws of the state(s) in which the work is to be performed. If optional under State law, the insurance must cover all employees anyway.
  - ◆ Employers' Liability (Part B) with limits of at least \$500,000 each accident, \$500,000 by disease policy limit, \$500,000 by disease each employee.

This policy shall also contain the following endorsements or language, which shall be indicated on the certificate of insurance:

Waiver of subrogation in favor of and acceptable to Railway.

Exhibit C-1, BNSF FORM 0107 – 12/12/2017



- D. Railroad Protective Liability insurance naming only the *Railway* as the Insured with coverage of at least \$5,000,000 per occurrence and \$10,000,000 in the aggregate. The policy Must be issued on a standard ISO form CG 00 35 12 04 and include the following:
  - Endorsed to include the Pollution Exclusion Amendment
  - Endorsed to include the Limited Seepage and Pollution Endorsement.
  - Endorsed to remove any exclusion for punitive damages.
  - ♦ No other endorsements restricting coverage may be added.
  - ◆ The original policy must be provided to the *Railway* prior to performing any work or services under this Agreement
  - ◆ Definition of "Physical Damage to Property" shall be endorsed to read: "means direct and accidental loss of or damage to all property owned by any named insured and all property in any named insured care, custody, and control arising out of the acts or omissions of the contractor named on the Declarations.

In lieu of providing a Railroad Protective Liability Policy, Licensee may participate (if available) in Railway's Blanket Railroad Protective Liability Insurance Policy.

### Other Requirements:

Where allowable by law, all policies (applying to coverage listed above) shall contain no exclusion for punitive damages.

Contractor agrees to waive its right of recovery against *Railway* for all claims and suits against *Railway*. In addition, its insurers, through the terms of the policy or policy endorsement, waive their right of subrogation against *Railway* for all claims and suits. Contractor further waives its right of recovery, and its insurers also waive their right of subrogation against *Railway* for loss of its owned or leased property or property under Contractor's care, custody or control.

Allocated Loss Expense shall be in addition to all policy limits for coverages referenced above.

Contractor is not allowed to self-insure without the prior written consent of *Railway*. If granted by *Railway*, any self-insured retention or other financial responsibility for claims shall be covered directly by Contractor in lieu of insurance. Any and all *Railway* liabilities that would otherwise, in accordance with the provisions of this Agreement, be covered by Contractor's insurance will be covered as if Contractor



elected not to include a deductible, self-insured retention or other financial responsibility for claims.

Prior to commencing services, Contractor shall furnish to *Railway* an accepta ble certificate(s) of insurance from an authorized representative evidencing the required coverage(s), endorsements, and amendments. The certificate should be directed to the following address:

BNSF Railway Company
c/o CertFocus
P.O. Box 140528
Kansas City, MO 64114
Toll Free: 877-576-2378
Fax number: 817-840-7487
Email: BNSF@certfocus.com
www.certfocus.com

Contractor shall notify *Railway* in writing at least 30 days prior to any cancellation, non-renewal, substitution or material alteration.

Any insurance policy shall be written by a reputable insurance company acceptable to *Railway* or with a current Best's Guide Rating of A- and Class VII or better, and authorized to do business in the state(s) in which the service is to be provided.

If coverage is purchased on a "claims made" basis, Contractor hereby agrees to maintain coverage in force for a minimum of three years after expiration, cancellation or termination of this Agreement. Annually Contractor agrees to provide evidence of such coverage as required hereunder.

Contractor represents that this Agreement has been thoroughly reviewed by Contractor's insurance agent(s)/broker(s), who have been instructed by Contractor to procure the insurance coverage required by this Agreement.

Not more frequently than once every five years, *Railway* may reasonably modify the required insurance coverage to reflect then-current risk management practices in the railroad industry and underwriting practices in the insurance industry.

If any portion of the operation is to be subcontracted by Contractor, Contractor shall require that the subcontractor shall provide and maintain insurance coverage(s) as set forth herein, naming *Railway* as an additional insured, and shall

Exhibit C-1, BNSF FORM 0107 - 12/12/2017



require that the subcontractor shall release, defend and indemnify *Railway* to the same extent and under the same terms and conditions as Contractor is required to release, defend and indemnify *Railway* herein.

Fallure to provide evidence as required by this section shall entitle, but not require, *Railway* to terminate this Agreement immediately. Acceptance of a certificate that does not comply with this section shall not operate as a waiver of Contractor's obligations hereunder.

The fact that insurance (including, without limitation, self-insurance) is obtained by Contractor shall not be deemed to release or diminish the liability of Contractor including, without limitation, liability under the indemnity provisions of this Agreement. Damages recoverable by *Railway* shall not be limited by the amount of the required insurance coverage.

In the event of a claim or lawsuit involving *Railway* arising out of this agreement, Contractor will make available any required policy covering such claim or lawsuit.

These insurance provisions are intended to be a separate and distinct obligation on the part of the Contractor. Therefore, these provisions shall be enforceable and Contractor shall be bound thereby regardless of whether or not indemnity provisions are determined to be enforceable in the jurisdiction in which the work covered hereunder is performed.

For purposes of this section, *Railway* shall mean "Burlington Northern Santa Fe LLC", "BNSF Railway Company" and the subsidiaries, successors, assigns and affiliates of each.

### 4) SALES AND OTHER TAXES

In the event applicable sales taxes of a state or political subdivision of a state of the United States are levied or assessed in connection with and directly related to any amounts invoiced by Contractor to Railway ("Sales Taxes"), Railway shall be responsible for paying only the Sales Taxes that Contractor separately states on the invoice or other billing documents provided to Railway; provided, however, that (i) nothing herein shall preclude Railway from claiming whatever Sales Tax exemptions are applicable to amounts Contractor bills Railway, (ii) Contractor shall be responsible for all sales, use, excise, consumption, services and other taxes which may accrue on all services, materials, equipment, supplies or fixtures that



Contractor and its subcontractors use or consume in the performance of this Agreement, (iii) Contractor shall be responsible for Sales Taxes (together with any penalties, fines or interest thereon) that Contractor fails to separately state on the invoice or other billing documents provided to Railway or fails to collect at the time of payment by Railway of invoiced amounts (except where Railway claims a Sales Tax exemption), and (iv) Contractor shall be responsible for Sales Taxes (together with any penalties, fines or interest thereon) if Contractor fails to issue separate invoices for each state in which Contractor delivers goods, provides services or, if applicable, transfers intangible rights to Railway.

Upon request, Contractor shall provide Railway satisfactory evidence that all taxes (together with any penalties, fines or interest thereon) that Contractor is responsible to pay under this Agreement have been paid. If a written claim is made against Contractor for Sales Taxes with respect to which Railway may be liable for under this Agreement, Contractor shall promptly notify Railway of such claim and provide Railway copies of all correspondence received from the taxing authority. Railway shall have the right to contest, protest, or claim a refund, in Railway's own name, any Sales Taxes paid by Railway to Contractor or for which Railway might otherwise be responsible for under this Agreement; provided, however, that if Railway is not permitted by law to contest any such Sales Tax in its own name, Contractor shall, if requested by Railway at Railway's sole cost and expense, contest in Contractor's own name the validity, applicability or amount of such Sales Tax and allow Railway to control and conduct such contest.

Railway retains the right to withhold from payments made under this Agreement amounts required to be withheld under tax laws of any jurisdiction. If Contractor is claiming a withholding exemption or a reduction in the withholding rate of any jurisdiction on any payments under this Agreement, before any payments are made (and in each succeeding period or year as required by law), Contractor agrees to furnish to Railway a properly completed exemption form prescribed by such jurisdiction. Contractor shall be responsible for any taxes, interest or penalties assessed against Railway with respect to withholding taxes that Railway does not withhold from payments to Contractor.

### 5) EXHIBIT "C" CONTRACTOR REQUIREMENTS

The Contractor must observe and comply with all provisions, obligations, requirements and limitations contained in the Agreement, and the Contractor Requirements set forth on Exhibit "C" attached to the Agreement and this Agreement, including, but not be limited to, payment of all costs incurred for any



damages to Railway roadbed, tracks, and/or appurtenances thereto, resulting from use, occupancy, or presence of its employees, representatives, or agents or subcontractors on or about the construction site. Contractor shall execute a Temporary Construction Crossing Agreement or Private Crossing Agreement (http://www.bnsf.com/communities/faqs/permits-real-estate/), for any temporary crossing requested to aid in the construction of this Project, if approved by BNSF.

### 6) TRAIN DELAY

Contractor is responsible for and hereby indemnifies and holds harmless Railway (including its affiliated railway companies, and its tenants) for, from and against all damages arising from any unscheduled delay to a freight or passenger train which affects Railway's ability to fully utilize its equipment and to meet customer service and contract obligations. Contractor will be billed, as further provided below, for the economic losses arising from loss of use of equipment, contractual loss of incentive pay and bonuses and contractual penalties resulting from train delays, whether caused by Contractor, or subcontractors, or by the Railway performing work under this Agreement. Railway agrees that it will not perform any act to unnecessarily cause train delay.

For loss of use of equipment, Contractor will be billed the current freight train hour rate per train as determined from Railway's records. Any disruption to train traffic may cause delays to multiple trains at the same time for the same period.

Additionally, the parties acknowledge that passenger, U.S. mail trains and certain other grain, intermodal, coal and freight trains operate under incentive/penalty contracts between Railway and its customer(s). Under these arrangements, if Railway does not meet its contract service commitments, Railway may suffer loss of performance or incentive pay and/or be subject to penalty payments. Contractor is responsible for any train performance and incentive penalties or other contractual economic losses actually incurred by Railway which are attributable to a train delay caused by Contractor or its subcontractors.

The contractual relationship between Railway and its customers is proprietary and confidential. In the event of a train delay covered by this Agreement, Railway will share information relevant to any train delay to the extent consistent with Railway confidentiality obligations. The rate then in effect at the time of performance by the Contractor hereunder will be used to calculate the actual costs of train delay pursuant to this agreement.



Contractor and its subcontractors must give Railway's Roadmaster William Henderson at Office # 662-315-3127 or Mobile # 901-651-4565 and email William.Henderson2r@bnsf.com four (4) weeks advance notice of the times and dates for proposed work windows. Railway and Contractor will establish mutually agreeable work windows for the project. Railway has the right at any time to revise or change the work windows due to train operations or service obligations. Railway will not be responsible for any additional costs or expenses resulting from a change in work windows. Additional costs or expenses resulting from a change in work windows shall be accounted for in Contractor's expenses for the project.

Contractor and subcontractors must plan, schedule, coordinate and conduct all Contractor's work so as to not cause any delays to any trains.



IN WITNESS WHEREOF, each of the parties hereto has caused this Agreement to be executed by its duly authorized officer the day and year first above written.

|                 | BNSF Railway Company                  |
|-----------------|---------------------------------------|
| Contractor      |                                       |
| Ву:             | By:                                   |
| Printed Name:   | Manager Public Projects               |
| Title:          | Accepted and effective this day       |
| Address:        | of, 20                                |
| City:           | · · · · · · · · · · · · · · · · · · · |
| State: Zip:     |                                       |
| Fax #:          |                                       |
| Office #:       |                                       |
| Contact Person: | <del></del>                           |
| E-mail:         | <del></del>                           |
| Phone #:        |                                       |

### SECTION 905 - PROPOSAL

|   | Date |  |
|---|------|--|
| Mississippi Transportation Commission             |      |  |
| Jackson, Mississippi                              |      |  |
| Sirs: The following proposal is made on behalf of |      |  |
| of  |      |  |
|   |      |  |

for constructing the following designated project(s) within the time(s) hereinafter specified.

The plans are composed of drawings and blue prints on file in the offices of the Mississippi Department of Transportation, Jackson, Mississippi.

The Specifications are the current Standard Specifications of the Mississippi Department of Transportation approved by the Federal Highway Administration, except where superseded or amended by the plans, Special Provisions and Notice(s) to Bidders attached hereto and made a part thereof.

I (We) certify that I (we) possess a copy of said Standard and any Supplemental Specifications.

Evidence of my (our) authority to submit the Proposal is hereby furnished. The proposal is made without collusion on the part of any person, firm or corporation. I (We) certify that I (we) have carefully examined the Plans, the Specifications, including the Special Provisions and Notice(s) to Bidders, herein, and have personally examined the site of the work. On the basis of the Specifications, Special Provisions, Notice(s) to Bidders, and Plans, I (we) propose to furnish all necessary machinery, tools, apparatus and other means of construction and do all the work and furnish all the materials in the manner specified. I (We) understand that the quantities mentioned herein are approximate only and are subject to either increase or decrease, and hereby propose to perform any increased or decreased quantities of work at the unit prices bid, in accordance with the above.

I (We) acknowledge that this proposal will be found irregular and/or non-responsive unless a certified check, cashier's check, or Proposal Guaranty Bond in the amount as required in the Advertisement (or, by law) is submitted electronically with the proposal or is delivered to the Contract Administration Engineer prior to the bid opening time specified in the advertisement.

INSTRUCTION TO BIDDERS: Alternate and Optional Items on Bid Schedule.

- Two or more items entered opposite a single unit quantity WITHOUT DEFINITE DESIGNATION AS
  "ALTERNATE ITEMS" are considered as "OPTIONAL ITEMS". Bidders may or may not indicate on bids the
  Optional Item proposed to be furnished or performed WITHOUT PREJUDICE IN REGARD TO
  IRREGULARITY OF BIDS.
- 2. Items classified on the bid schedule as "ALTERNATE ITEMS" and/or "ALTERNATE TYPES OF CONSTRUCTION" must be preselected and indicated on bids. However, "Alternate Types of Construction" may include Optional Items to be treated as set out in Paragraph 1, above.
- 3. Optional items not preselected and indicated on the bid schedule MUST be designated in accordance with Subsection 102.06 prior to or at the time of execution of the contract.
- 4. Optional and Alternate items designated must be used throughout the project.

I (We) further propose to perform all "force account or extra work" that may be required of me (us) on the basis provided in the Specifications and to give such work my (our) personal attention in order to see that it is economically performed.

I (We) further propose to execute the attached contract agreement (Section 902) as soon as the work is awarded to me (us), and to begin and complete the work within the time limit(s) provided for in the Specifications and Advertisement. I (We) also propose to execute the attached contract bond (Section 903) in an amount not less than one hundred (100) percent of the total of my (our) part, but also to guarantee the excellence of both workmanship and materials until the work is finally accepted.

I (We) shall submit electronically with our proposal or deliver prior to the bid opening time a certified check, cashier's check or bid bond for <u>five percent (5%) of total bid</u> and hereby agree that in case of my (our) failure to execute the contract and furnish bond within Ten (10) days after notice of award, the amount of this check (bid bond) will be forfeited to the State of Mississippi as liquidated damages arising out of my (our) failure to execute the contract as proposed. It is understood that in case I am (we are) not awarded the work, the check will be returned as provided in the Specifications.

### SECTION 905 -- PROPOSAL (CONTINUED)

I (We) hereby certify by digital signature and electronic submission via Bid Express of the Section 905 proposal below, that all certifications, disclosures and affidavits incorporated herein are deemed to be duly executed in the aggregate, fully enforceable and binding upon delivery of the bid proposal. I (We) further acknowledge that this certification shall not extend to the bid bond or alternate security which must be separately executed for the benefit of the Commission. This signature does not cure deficiencies in any required certifications, disclosures and/or affidavits. I (We) also acknowledge the right of the Commission to require full and final execution on any certification, disclosure or affidavit contained in the proposal at the Commission's election upon award. Failure to so execute at the Commission's request within the time allowed in the Standard Specifications for execution of all contract documents will result in forfeiture of the bid bond or alternate security.

|  | Respectfully Submitted,     |
|--|-----------------------------|
|  | DATE                        |
|  |                             |
|  | Contractor                  |
|  | BYSignature                 |
|  | TITLE                       |
|  | ADDRESS                     |
|  | CITY, STATE, ZIP            |
|  | PHONE                       |
|  | FAX                         |
|  | E-MAIL                      |
| (To be filled in if a corporation)   |                             |
| Our corporation is chartered under the Laws of the names, titles and business addresses of the executives are as | State of and the s follows: |
| President  | Address                     |
| Secretary  | Address                     |
| Treasurer  | Address                     |

Revised 1/2016

The following is my (our) itemized proposal.

Bridge Replacements on SR 178 between Potts Camp and Myrtle, Bridge Nos. 47.1, 50.9, & 51.3, known as Federal Aid Project No. BR-2905-00(001) / 103328301 in Benton County.

| Line no. | Item Code | Adj Code | Quantity | Units           | Description[Fixed Unit Price]                                 |
|----------|-----------|----------|----------|-----------------|---|
| 0010     | 201 4001  |          | 1        | Roadway It      |   |
| 0010     | 201-A001  |          | 1        | Lump Sum        | Clearing and Grubbing   |
| 0020     | 201-B001  |          | 3        | Acre            | Clearing and Grubbing   |
| 0030     | 202-A001  |          | 1        | Lump Sum        | Removal of Obstructions                                       |
| 0040     | 202-B062  |          | 7,135    | Square Yard     | Removal of Concrete Overlayed w/ Asphalt Pavement, All Depths |
| 0050     | 202-B136  |          | 2,076    | Linear Feet     | Removal of Guard Rail   |
| 0060     | 202-B191  |          | 97       | Linear Feet     | Removal of Pipe, 8" And Above                                 |
| 0070     | 203-A001  | (E)      | 13,238   | Cubic Yard      | Unclassified Excavation, FM, AH                               |
| 0080     | 203-EX020 | (E)      | 2,148    | Cubic Yard      | Borrow Excavation, AH, FME, Class B9                          |
| 0090     | 203-G001  | (E)      | 500      | Cubic Yard      | Excess Excavation, FM, AH                                     |
| 0100     | 206-A001  | (S)      | 1,046    | Cubic Yard      | Structure Excavation  |
| 0110     | 206-B001  | (E)      | 138      | Cubic Yard      | Select Material for Undercuts, Contractor Furnished, FM       |
| 0120     | 209-A005  |          | 7,007    | Square Yard     | Geotextile Stabilization, Type V, Non-Woven                   |
| 0130     | 213-C001  |          | 12       | Ton             | Superphosphate  |
| 0140     | 216-A001  |          | 27       | Square Yard     | Solid Sodding   |
| 0150     | 217-A001  |          | 3,000    | Square Yard     | Ditch Liner   |
| 0160     | 219-A001  |          | 1        | Thousand Gallon | Watering (\$20.00)  |
| 0170     | 220-A001  |          | 12       | Acre            | Insect Pest Control (\$30.00)                                 |
| 0180     | 221-A001  | (S)      | 11       | Cubic Yard      | Concrete Paved Ditch  |
| 0190     | 223-A001  |          | 23       | Acre            | Mowing (\$50.00)  |
| 0200     | 225-A001  |          | 23       | Acre            | Grassing  |
| 0210     | 225-B001  |          | 69       | Ton             | Agricultural Limestone  |
| 0220     | 225-C001  |          | 46       | Ton             | Mulch, Vegetative Mulch                                       |
| 0230     | 226-A001  |          | 23       | Acre            | Temporary Grassing  |
| 0240     | 234-A001  |          | 1,000    | Linear Feet     | Temporary Silt Fence  |
| 0250     | 234-C001  |          | 1,200    | Linear Feet     | Super Silt Fence  |
| 0260     | 236-A008  |          | 3        | Each            | Silt Basin, Type D  |
| 0270     | 237-A002  |          | 1,000    | Linear Feet     | Wattles, 20"  |
| 0280     | 245-A001  |          | 100      | Linear Feet     | Silt Dike   |
| 0290     | 246-A001  |          | 100      | Linear Feet     | Sandbags  |
| 0300     | 247-A001  |          | 1        | Each            | Temporary Stream Diversion                                    |
| 0310     | 249-A001  |          | 90       | Ton             | Riprap for Erosion Control                                    |
| 0320     | 249-B001  |          | 33       | Cubic Yard      | Remove and Reset Riprap                                       |
| 0330     | 304-B002  | (GT)     | 4,000    | Ton             | Granular Material, Class 3, Group D                           |
| 0340     | 403-A003  | (BA1)    | 1,139    | Ton             | 12.5-mm, ST, Asphalt Pavement                                 |
| -        |           | ` /      | ,        |                 | , , <u>1</u>  |

| <b>Line no.</b> 0350 | Item Code<br>403-A006 | Adj Code<br>(BA1) | Quantity<br>1,093 | Units<br>Ton | Description[Fixed Unit Price] 19-mm, ST, Asphalt Pavement                  |
|----------------------|-----------------------|-------------------|-------------------|--------------|--|
| 0360                 | 406-A002              |                   | 4,838             | Square Yard  | Cold Milling of Bituminous Pavement, All Depths                            |
| 0370                 | 413-E001              |                   | 187               | Linear Feet  | Sawing and Sealing Transverse Joints in Asphalt Pavement                   |
| 0380                 | 502-A001              | (C)               | 404               | Square Yard  | Reinforced Cement Concrete Bridge End Pavement                             |
| 0390                 | 503-C010              |                   | 144               | Linear Feet  | Saw Cut, Full Depth  |
| 0400                 | 602-A001              | (S)               | 77,317            | Pounds       | Reinforcing Steel  |
| 0410                 | 603-ALT006            | (S)               | 32                | Linear Feet  | 24" Type A Alternate Pipe  |
| 0420                 | 605-AA002             | (S)               | 126               | Square Yard  | Geotextile for Subsurface Drainage, Type V                                 |
| 0430                 | 605-T001              | (S)               | 192               | Linear Feet  | 4" Perforated Pipe for Underdrains   |
| 0440                 | 605-U001              | (S)               | 36                | Linear Feet  | 4" Non-perforated Pipe for Underdrains                                     |
| 0450                 | 605-W001              | (GY)              | 8                 | Cubic Yard   | Filter Material for Combination Storm Drain and/or Underdrains, Type A, FM |
| 0460                 | 606-B001              |                   | 488               | Linear Feet  | Guard Rail, Class A, Type 1  |
| 0470                 | 606-D022              |                   | 8                 | Each         | Guard Rail, Bridge End Section, Type I                                     |
| 0480                 | 606-E005              |                   | 6                 | Each         | Guard Rail, Terminal End Section, Flared                                   |
| 0490                 | 606-E007              |                   | 2                 | Each         | Guard Rail, Terminal End Section, Non-Flared                               |
| 0500                 | 615-A002              | (S)               | 80                | Linear Feet  | Concrete Bridge End Barrier, 33.5"   |
| 0510                 | 617-A001              |                   | 25                | Each         | Right-of-Way Marker  |
| 0520                 | 618-A001              |                   | 1                 | Lump Sum     | Maintenance of Traffic   |
| 0530                 | 619-A1003             |                   | 17,900            | Linear Feet  | Temporary Traffic Stripe, Continuous White, Paint                          |
| 0540                 | 619-A4003             |                   | 8,950             | Linear Feet  | Temporary Traffic Stripe, Skip Yellow, Paint                               |
| 0550                 | 619-D1001             |                   | 32                | Square Feet  | Standard Roadside Construction Signs, Less than 10 Square Feet             |
| 0560                 | 619-D2001             |                   | 478               | Square Feet  | Standard Roadside Construction Signs, 10 Square Feet or More               |
| 0570                 | 619-D3001             |                   | 52                | Each         | Remove and Reset Signs, All Sizes  |
| 0580                 | 619-G4001             |                   | 192               | Linear Feet  | Barricades, Type III, Double Faced   |
| 0590                 | 619-G4005             |                   | 48                | Linear Feet  | Barricades, Type III, Single Faced   |
| 0600                 | 619-G7001             |                   | 16                | Each         | Warning Lights, Type "B"   |
| 0610                 | 620-A001              |                   | 1                 | Lump Sum     | Mobilization   |
| 0620                 | 626-C001              |                   | 8,950             | Linear Feet  | 6" Thermoplastic Double Drop Edge Stripe, Continuous White                 |
| 0630                 | 626-D002              |                   | 4,475             | Linear Feet  | 6" Thermoplastic Double Drop Traffic Stripe, Skip Yellow                   |
| 0640                 | 627-L001              |                   | 56                | Each         | Two-Way Yellow Reflective High Performance Raised Markers                  |
| 0650                 | 630-A003              |                   | 36                | Square Feet  | Standard Roadside Signs, Sheet Aluminum, 0.125" Thickness                  |
| 0660                 | 630-C003              |                   | 60                | Linear Feet  | Steel U-Section Posts, 3.0 lb/ft   |
| 0670                 | 630-F006              |                   | 45                | Each         | Delineators, Guard Rail, White   |
| 0680                 | 630-G004              |                   | 8                 | Each         | Type 3 Object Markers, OM-3R or OM-3L                                      |
| 0690                 | 699-A001              |                   | 1                 | Lump Sum     | Roadway Construction Stakes  |
| 0700                 | 815-A007              | (S)               | 2,405             | Ton          | Loose Riprap, Size 300   |
| 0710                 | 815-E001              | (S)               | 1,253             | Square Yard  | Geotextile under Riprap  |

| 110p030 | ii(Silect 2-3) |          |          |              |  |
|---------|----------------|----------|----------|--------------|--|
| Line no | . Item Code    | Adj Code | Quantity | Units        | Description[Fixed Unit Price]  |
| 0720    | 815-F002       | (S)      | 103      | Ton          | Sediment Control Stone   |
| 0730    | 907-253-A001   |          | 413      | Linear Feet  | Coir Fiber Baffle  |
| 0740    | 907-619-E3001  |          | 6        | Each         | Changeable Message Sign  |
| 0750    | 907-804-B001   | (S)      | 438      | Cubic Yard   | Box Bridge Concrete, Class B   |
| 0760    | 907-899-A001   |          | 1        | Lump Sum     | Railway-Highway Provisions   |
|         |                |          | ALT      | ERNATE GROUP | PAA NUMBER 1   |
| 0770    | 304-F001       | (GT)     | 3,200    | Ton          | 3/4" and Down Crushed Stone Base   |
|         |                |          | ALT      | ERNATE GROUP | P AA NUMBER 2  |
| 0780    | 304-F002       | (GT)     | 3,200    | Ton          | Size 610 Crushed Stone Base  |
|         |                |          | ALT      | ERNATE GROUP | AA NUMBER 3  |
| 0790    | 304-F003       | (GT)     | 3,200    | Ton          | Size 825B Crushed Stone Base   |
|         |                |          |          | ERNATE GROUI |  |
| 0800    | 605-W002       | (GY)     | 78       | Cubic Yard   | Filter Material for Combination Storm Drain and/or Underdrains, Type B, FM |
|         |                |          | ALT      | ERNATE GROUI | P BB NUMBER 2  |
| 0810    | 605-W003       | (GY)     | 78       | Cubic Yard   | Filter Material for Combination Storm Drain and/or Underdrains, Type C, FM |
|         |                |          |          | Bridge Ite   | ems  |
| 0820    | 501-K001       |          | 1,405    | Square Yard  | Transverse Grooving  |
| 0830    | 803-D006       | (S)      | 4,615    | Linear Feet  | HP 14 x 73 Steel Piling  |
| 0840    | 803-P003       | (S)      | 880      | Linear Feet  | 30" Steel Pipe Piling, Wall Thickness 0.500"                               |
| 0850    | 804-C168       | (S)      | 940      | Linear Feet  | 80' Prestressed Concrete Beam, Type FIB-45                                 |
| 0860    | 804-C169       | (S)      | 595      | Linear Feet  | 100' Prestressed Concrete Beam, Type FIB-45                                |
| 0870    | 804-C170       | (S)      | 795      | Linear Feet  | 135' Prestressed Concrete Beam, Type FIB-54                                |
| 0880    | 805-A001       | (S)      | 153,142  | Pounds       | Reinforcement  |
| 0890    | 805-C001       | (S)      | 3,390    | Pounds       | Reinforcement, Corrosion Resistant   |
| 0900    | 813-A002       | (S)      | 790      | Linear Feet  | Concrete Railing, 32"  |
| 0910    | 815-A007       | (S)      | 8,488    | Ton          | Loose Riprap, Size 300   |
| 0920    | 815-E001       | (S)      | 7,806    | Square Yard  | Geotextile under Riprap  |
| 0930    | 907-803-B001   |          | 2        | Each         | Conventional Static Pile Load Test (\$5000.00)                             |
| 0940    | 907-803-I003   | (S)      | 2        | Each         | PDA Test Pile, HP Steel Pile   |
| 0950    | 907-803-I004   | (S)      | 1        | Each         | PDA Test Pile, Steel Pipe Pile   |
| 0960    | 907-803-J001   | (S)      | 2        | Each         | Pile Restrike  |
| 0970    | 907-804-A001   | (S)      | 440      | Cubic Yard   | Bridge Concrete, Class BDX   |
| 0980    | 907-804-A002   | (S)      | 217      | Cubic Yard   | Bridge Concrete, Class AA  |

# SECTION 905 - COMBINATION BID PROPOSAL (Continued)

## CONDITIONS FOR COMBINATION BID

If a bidder elects to submit a combined bid for two or more of the contracts listed for this month's letting, the bidder must complete and execute these sheets of the proposal in each of the individual proposals to constitute a combination bid. In addition to this requirement, each individual contract shall be completed, executed and submitted in the usual specified manner. Failure to execute this Combination Bid Proposal in each of the contracts combined will be just cause for each proposal to be received and evaluated as a separate bid. It is understood that the Mississippi Transportation Commission not only reserves the right to reject any and all proposals, but also the right to award contracts upon the basis of lowest separate bids or combination bids most advantageous to the State. It is further understood and agreed that the Combination Bid Proposal is for comparison of bids only and that each contract shall operate in every respect as a separate contract in accordance with its proposal and contract documents.

I (We) agree to complete each contract on or before its specified completion date.

| • | X                           |  |  |
|---|-----------------------------|--|--|
| • | X                           |  |  |
|   | ĸ                           |  |  |
|   | ×                           |  |  |
| • |                             |  |  |
| ٠ | K                           |  |  |
|   | k                           |  |  |
|   | ĸ                           |  |  |
|   |                             |  |  |
|   | K                           |  |  |
|   | X                           |  |  |
|   | ĸ                           |  |  |
|   |                             |  |  |
|   | K                           |  |  |
| ٠ | К                           |  |  |
|   | ĸ                           |  |  |
|   | ×                           |  |  |
|   |                             |  |  |
| ٠ | X                           |  |  |
|   | X                           |  |  |
|   | X                           |  |  |
|   |                             |  |  |
|   | X                           |  |  |
| • | X                           |  |  |
|   | X                           |  |  |
|   | x                           |  |  |
|   |                             |  |  |
| • | X                           |  |  |
|   | X                           |  |  |
|   | x                           |  |  |
|   |                             |  |  |
|   | K                           |  |  |
| ٠ | K                           |  |  |
|   | ĸ                           |  |  |
|   | ĸ                           |  |  |
|   |                             |  |  |
|   | X                           |  |  |
| • | K                           |  |  |
|   | k                           |  |  |
|   | ••                          |  |  |
|   | K                           |  |  |
| ٠ | К                           |  |  |
|   | K                           |  |  |
|   | ĸ                           |  |  |
|   |                             |  |  |
| ٠ | X                           |  |  |
|   | X                           |  |  |
|   | x                           |  |  |
|   |                             |  |  |
|   |                             |  |  |
|   | X                           |  |  |
|   | ×                           |  |  |
|   | X                           |  |  |
|   | *<br>*                      |  |  |
|   | * * *                       |  |  |
|   | *<br>*                      |  |  |
|   | * * *                       |  |  |
|   | * * * * *                   |  |  |
|   | ****                        |  |  |
|   | * * * * *                   |  |  |
|   | ****                        |  |  |
|   | ****                        |  |  |
|   | ****                        |  |  |
|   | *******                     |  |  |
|   | ****                        |  |  |
|   | *******                     |  |  |
|   | *********                   |  |  |
|   | *********                   |  |  |
|   | **********                  |  |  |
|   | *********                   |  |  |
|   | ***********                 |  |  |
|   | ************                |  |  |
|   | ************                |  |  |
|   | **************              |  |  |
|   | ************                |  |  |
|   | ***************             |  |  |
|   | **************              |  |  |
|   | ****************            |  |  |
|   | ****************            |  |  |
|   | ****************            |  |  |
|   | ******************          |  |  |
|   | ******************          |  |  |
|   | ******************          |  |  |
|   | ******************          |  |  |
|   | *******************         |  |  |
|   | *******************         |  |  |
|   | *******************         |  |  |
|   | ********************        |  |  |
|   | ********************        |  |  |
|   | *******************         |  |  |
|   | *********************       |  |  |
|   | ***********************     |  |  |
|   | *********************       |  |  |
|   | ***********************     |  |  |
|   | *************************   |  |  |
|   | *************************   |  |  |
|   | *************************   |  |  |
|   | *************************   |  |  |
|   | *************************** |  |  |
|   | **************************  |  |  |

COMBINATION BID PROPOSAL

\* of Subsection 102.11 on the following contracts: This proposal is tendered as one part of a Combination Bid Proposal utilizing option \* Option to be shown as either (a), (b), or (c).

| County      |    |    |    |    |     |
|-------------|----|----|----|----|-----|
| Project No. | 6. | 7. | 8. | 9. | 10. |
| County      |    |    |    |    |     |
| Project No. | 1. | 2. | 3. | 4. | 5.  |

- (a) If Combination A has been selected, your Combination Bid is complete.
- (b) If Combination B has been selected, then complete the following page.

SECTION 905 - COMBINATION BID PROPOSAL (Continued)

| Total Contract<br>Reduction |    |    |    |    |    |    |    |    |
|-----------------------------|----|----|----|----|----|----|----|----|
| Total Item<br>Reduction     |    |    |    |    |    |    |    |    |
| Unit Price<br>Reduction     |    |    |    |    |    |    |    |    |
| Unit                        |    |    |    |    |    |    |    |    |
| Pay Item<br>Number          |    |    |    |    |    |    |    |    |
| Project Number              | 1. | 2. | 3. | 4. | 5. | 6. | 7. | 8. |

# SECTION 905 - COMBINATION BID PROPOSAL (Continued)

(c) If Combination C has been selected, then initial and complete ONE of the following.

I (We) desire to be awarded work not to exceed a total monetary value of \$\_

number of contracts. \_ I (We) desire to be awarded work not to exceed \_\_\_

### Certification with regard to the Performance of Previous Contracts or Subcontracts subject to the Equal Opportunity Clause and the filing of Required Reports

|   | has not, participated in a previous contract or         |
|---|---|
| subcontract subject to the Equal Opportunity Clau | ise, as required by Executive Orders 10925, 11114, or   |
| 11246, and that he has, has not, filed w          | with the Joint Reporting Committee, the Director of the |
| Office of Federal Contract Compliance, a Federa   | I Government contracting or administering agency, or    |
| the former President's Committee on Equal Employ  | yment Opportunity, all reports due under the applicable |
| filing requirements.                              |   |
|   | (COMPANY)   |
| DATE:   |   |

NOTE: The above certification is required by the Equal Employment Opportunity Regulations of the Secretary of Labor (41 CFR 60-1.7 (b) (1)), and must be submitted by bidders and proposed subcontractors only in connection with contracts and subcontracts which are subject to the Equal Opportunity Clause. Contracts and Subcontracts which are exempt from the Equal Opportunity Clause are set forth in 41 CFR 60-1.5. (Generally only contracts or subcontracts of \$10,000 or under are exempt.)

Currently, Standard Form 100 (EEO-1) is the only report required by the Executive Orders or their implementing regulations.

Proposed prime Contractors and Subcontractors who have participated in a previous contract or subcontract subject to the Executive orders and have not filed the required reports should note that 41 CFR 60-1.7 (b) (1) prevents the award of contracts and subcontracts unless such Contractors submit a report covering the delinquent period or such other period specified by the Federal Highway Administration or by the Director, Office of Federal Contract Compliance, U. S. Department of Labor.

## MISSISSIPPI DEPARTMENT OF TRANSPORTATION CERTIFICATION

| I,   |  |
|--|--|
| (Name of person signi                                  | ng bid)                                  |
| individually, and in my capacity as                    | of                                       |
| (  | Title of person signing bid)             |
|  | do hereby certify under                  |
| (Name of Firm, partnership, or Corpora                 | ation)                                   |
| penalty of perjury under the laws of the United States | and the State of Mississippi that        |
|  | , Bidder                                 |
| (Name of Firm, Partnership, or C                       | Corporation)                             |
| on Project No. <u>BR-2905-00(001)/ 103328301000</u>    |  |
| in_Benton  | County(ies), Mississippi, has not either |

officers or principal owners.

Except as noted hereafter, it is further certified that said legal entity and its corporate officers, principal

in restraint of free competitive bidding in connection with this contract; nor have any of its corporate

directly or indirectly entered into any agreement, participated in any collusion; or otherwise taken any action

- owners, managers, auditors and others in a position of administering federal funds:
  - a) Are not presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from covered transactions by any Federal department or agency;
  - b) Have not within a three-year period preceding this proposal been convicted of or had a civil judgment rendered against them for commission of fraud or a criminal offense in connection with obtaining, attempting to obtain, or performing a public (Federal, State or local) transaction or contract under a public transaction; violation of Federal or State antitrust statutes or commission of embezzlement, theft, forgery, bribery, falsification or destruction of records, making false statements, or receiving stolen property;
  - c) Are not presently indicted for or otherwise criminally or civilly charged by a governmental entity (Federal, State or local) with commission of any of the offenses enumerated in (b) above; and
  - d) Have not within a three-year period preceding this application/ proposal had one or more public transactions (Federal, State or local) terminated for cause or default.

Do exceptions exist and are made a part thereof? Yes / No

Any exceptions shall address to whom it applies, initiating agency and dates of such action.

Note: Exceptions will not necessarily result in denial of award but will be considered in determining bidder responsibility. Providing false information may result in criminal prosecution or administrative sanctions.

The bidder further certifies that the certification requirements contained in Section XI of Form FHWA 1273, will be or have been included in all subcontracts, material supply agreements, purchase orders, etc. except those procurement contracts for goods or services that are expected to be less than the Federal procurement small purchase threshold fixed at 10 U.S.C. 2304(g) and 41 U.S.C. 253(g) (currently \$25,000) which are excluded from the certification requirements.

The bidder further certifies, to the best of his or her knowledge and belief, that:

- 1) No Federal appropriated funds have been paid or will be paid to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with the awarding of any Federal contract, the making of any Federal grant, the making of any Federal loan, the entering into of any cooperative agreement, and the extension, continuation, renewal, amendment, or modification of any Federal contract, grant, loan, or cooperative agreement.
- 2) If any funds other than Federal appropriated funds have been paid or will be paid to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with this contract, Standard Form-LLL, Disclosure Form to Report Lobbying, in accordance with its instructions will be completed and submitted.

The certification contained in (1) and (2) above is a material representation of fact upon which reliance is placed and a prerequisite imposed by Section 1352, Title 31, U.S. Code prior to entering into this contract. Failure to comply shall be subject to a civil penalty of not less than \$10,000 and not more than \$100,000. The bidder shall include the language of the certification in all subcontracts exceeding \$100,000 and all subcontractors shall certify and disclose accordingly.

| Executed on |           |
|-------------|-----------|
|             | Signature |

(01/2016 F)

All of the foregoing is true and correct.

### MISSISSIPPI DEPARTMENT OF TRANSPORTATION

SAM.GOV Registration and DUNS Number

Bidders are advised that the Prime Contractor must maintain current registration in the **System for Award Management** (http://www.sam.gov) at all times during the project. A Dun and Bradstreet Data Universal Numbering System (DUNS) Number (http://www.dnb.com) is one of the requirements for registration in the System for Award Management.

Bidders are advised that prior to the award of this contract, they MUST be registered in the System for Award Management.

| I (We) acknowledge that this contract cannot be awarded Management prior to the award of this contract. | ` , |
|---|-----|
| I (We) have a DUNS Number(Yes / No)   |     |
| DUNS Number:  |     |
| Company Name:   |     |
| Company e-mail address:   |     |

(6/2015F)

### SECTION 902

### CONTRACT FOR **BR-2905-00(001)**/ **103328301000**

LOCATED IN THE COUNTY(IES) OF **Benton** 

STATE OF MISSISSIPPI, COUNTY OF HINDS

This contract entered into by and between the Mississippi Transportation Commission on one hand, and the undersigned contractor, on the other witnesseth;

That, in consideration of the payment by the Mississippi Transportation Commission of the prices set out in the proposal hereto attached, to the undersigned contractor, such payment to be made in the manner and at the time of times specified in the specifications and the special provisions, if any, the undersigned contractor hereby agrees to accept the prices stated in the proposal in full compensation for the furnishing of all materials and equipment and the executing of all the work contemplated in this contract.

It is understood and agreed that the advertising according to law, the Advertisement, the instructions to bidders, the proposal for the contract, the specifications, the revisions of the specifications, the special provisions, and also the plans for the work herein contemplated, said plans showing more particularly the details of the work to be done, shall be held to be, and are hereby made a part of this contract by specific reference thereto and with like effect as if each and all of said instruments had been set out fully herein in words and figures.

It is further agreed that for the same consideration the undersigned contractor shall be responsible for all loss or damage arising out of the nature of the work aforesaid; or from the action of the elements and unforeseen obstructions or difficulties which may be encountered in the prosecution of the same and for all risks of every description connected with the work, exceptions being those specifically set out in the contract; and for faithfully completing the whole work in good and workmanlike manner according to the approved Plans, Specifications, Special Provisions, Notice(s) to Bidders and requirements of the Mississippi Department of Transportation.

It is further agreed that the work shall be done under the direct supervision and to the complete satisfaction of the Executive Director of the Mississippi Department of Transportation, or his authorized representatives, and when Federal Funds are involved subject to inspection at all times and approval by the Federal Highway Administration, or its agents as the case may be, or the agents of any other Agency whose funds are involved in accordance with those Acts of the Legislature of the State of Mississippi approved by the Governor and such rules and regulations issued pursuant thereto by the Mississippi Transportation Commission and the authorized Federal Agencies.

The Contractor agrees that all labor as outlined in the Special Provisions may be secured from list furnished by

It is agreed and understood that each and every provision of law and clause required by law to be inserted in this contract shall be deemed to be inserted herein and this contract shall be read and enforced as though it were included herein, and, if through mere mistake or otherwise any such provision is not inserted, then upon the application of either party hereto, the contract shall forthwith be physically amended to make such insertion.

The Contractor agrees that he has read each and every clause of this Contract, and fully understands the meaning of same and that he will comply with all the terms, covenants and agreements therein set forth.

| Witness our signa  | atures this the day of   |
|--|--|
| Contractor(s)  | <del>_</del>   |
| By   | MISSISSIPPI TRANSPORTATION COMMISSION                              |
| Title  | By   |
| Signed and sealed in the presence of: (names and addresses of witnesses) | Executive Director   |
|  | Secretary to the Commission  |
|  | Transportation Commission in session on the day of sk No , Page No |
| Revised 8/06/2003  |  |

### SECTION 903 PERFORMANCE AND PAYMENT BOND

CONTRACT BOND FOR: **BR-2905-00(001)**/ **103328301000** 

LOCATED IN THE COUNTY(IES) OF: **Benton** 

STATE OF MISSISSIPPI, COUNTY OF HINDS

| Know all men by these presents: that we,   |  |
|--|--|
| Principal.   | (Contractor)   |
|  | in the State of  |
| and  |  |
| residing at  | (Surety) in the State of,  |
| authorized to do business in the State of Mis  | ssissippi, under the laws thereof, as surety, effective as of the contract date  |
| shown below, are held and firmly bound un  | to the State of Mississippi in the sum of  |
|  | , lawful money of the United States of America, to be paid to it for which   |
|  | ourselves, our heirs, administrators, successors, or assigns jointly and   |
| severally by these presents.   |  |
| The conditions of this bond are such, that w   | hereas the said  |
| day of   | with the Mississippi Transportation Commission, bearing the date of  A.D hereto annexed, for the construction of certain projects(s) in  |
| the State of Mississippi as mentioned in said offices of the Mississippi Department of Tra   | d contract in accordance with the Contract Documents therefor, on file in the ansportation, Jackson, Mississippi.  |
| singular the terms, covenants, conditions, gobserved, done, kept and performed and ematerial and equipment specified in said of specifications and special provisions are in contemplated until its final completion and and save harmless said Mississippi Transported the negligence, wrongful or criminal act, oprincipal (s), his (their) agents, servants, therewith, and shall be liable and responsi Transportation Commission or any officer property, the State may lose or be overcharthe Contractor(s), his (their) agents or emporersons furnishing labor, material, equipment of the contractor | and to and abide by and well and truly observe, do keep and perform all and guarantees and agreements in said contract, contained on his (their) part to be each of them, at the time and in the manner and form and furnish all of the contract in strict accordance with the terms of said contract which said plans included in and form a part of said contract and shall maintain the said work of acceptance as specified in Subsection 109.11 of the approved specifications cortation Commission from any loss or damage arising out of or occasioned by overcharge, fraud, or any other loss or damage whatsoever, on the part of said or employees in the performance of said work or in any manner connected to the State authorized in such cases, for double any amount in money or ged or otherwise defrauded of, by reason of wrongful or criminal act, if any, or loyees, and shall promptly pay the said agents, servants and employees and all ment or supplies therefor, including premiums incurred, for Surety Bonds pensation Insurance; with the additional obligation that such Contractor shall be accepted to the said agents. |

Revised 09/02/2014

any liquidated damages which may arise prior to any termination of said principal's contract, any liquidated damages which may arise after termination of the said principal's contract due to default on the part of said principal, penalties and interest thereon, when and as the same may be due this state, or any county, municipality, board, department, commission or political subdivision: in the course of the performance of said work and in accordance with Sections 31-5-51 et seq. Mississippi Code of 1972, and other State statutes applicable thereto, and shall carry out to the letter and to the satisfaction of the Executive Director of the Mississippi Department of Transportation, all, each and every one of the stipulations, obligations, conditions, covenants and agreements and terms of said contract in accordance with the terms thereof and all of the expense and cost and attorney's fee that may be incurred in the enforcement of the performance of said contract, or in the enforcement of the conditions and obligations of this bond, then this obligation shall be null and void, otherwise to be and remain in full force and virtue.

| (Contractors) Principal | Surety                          |
|-------------------------|---------------------------------|
| By                      | By                              |
|                         | (Signature) Attorney in Fact    |
|                         | Address                         |
|                         |                                 |
| Title                   |                                 |
| (Contractor's Seal)     | (Printed) MS Agent              |
|                         |                                 |
|                         | (Signature) MS Agent            |
|                         | Address                         |
|                         |                                 |
|                         |                                 |
|                         | (Surety Seal)                   |
|                         |                                 |
|                         | Mississippi Insurance ID Number |



## **BID BOND**

| KNOW ALL MEN BY THESE PI   | RESENTS, that we   |   |   |  |  |
|--|--|---|---|--|--|
|  | , <u></u>  |   | Со  | ntractor   |  |
|  |  |   | A   | Address  |  |
|  |  |   |   |  |  |
| As principal, hereinafter called the   | Principal, and   |   | S   | uretv  |  |
| a corporation duly organized unde  |  |   |   |  |  |
| as Surety, hereinafter called the Su   | rrety, are held and firmly b   | oound unto  | State of M  | lississippi, Jacks   | on, Mississippi  |
| As Obligee, hereinafter called Obl   | igee, in the sum of Five F   | Per Cent (5   | %) of Amou  | ınt Bid  |  |
|  |  |   | Dollars(\$  |  | )  |
| for the payment of which sum wi<br>executors, administrators, successor  |  |   |   |  | urselves, our heirs,   |
| said Principal will, within the time<br>performance of the terms and cond<br>will pay unto the Obligee the diffe<br>which the Obligee legally contract<br>but in no event shall liability hereus | e required, enter into a form<br>litions of the contract, then<br>erence in money between the<br>s with another party to per<br>inder exceed the penal sum | nal contract<br>this obliga<br>he amount of<br>form the wo<br>hereof. | and give a g<br>tion to be vo<br>of the bid of<br>ork if the latt | good and sufficientid; otherwise the I<br>the said Principaler amount be in e  | t bond to secure the<br>Principal and Surety<br>and the amount for |
| Signed and sealed this   | day of   |   | , 20  | _  |  |
|  |  | _   |   | (Principal)  | (Seal)   |
|  |  | ]   | Ву:   |  |  |
| (Witness)  |  |   |   | Mississippi, Jackson, Mississippi  bunt Bid  said Surety, bind ourselves, our heirs, hese presents.  78 between Potts Camp and Myrtle, 001) / 103328301 in Benton County. heipal shall be awarded the contract, the good and sufficient bond to secure the oid; otherwise the Principal and Surety f the said Principal and the amount for tter amount be in excess of the former, |  |
|  |  |   |   | (Surety)   | (Seal)   |
|  |  | ]   | Ву:   |  |  |
| (Witness)  |  |   |   | (Attorney-in-Fa  | ct)  |
|  |  |   |   | (MS Agent)   |  |
|  |  |   | Міс   | sissinni Insurance   | ID Number  |

**REV. 1/2016** 

### MISSISSIPPI DEPARTMENT OF TRANSPORTATION OFFICE OF CIVIL RIGHTS JACKSON, MISSISSIPPI

### **LIST OF FIRMS SUBMITTING QUOTES**

I/we received quotes from the following firms on: Letting Date: May 29, 2019

Project No: BR-2905-00(001)/ 103328301000

County: Benton

Disadvantaged Business Enterprise (DBE) Regulations as stated in 49 CFR 26.11 require the Mississippi Department of Transportation (MDOT) to create and maintain a comprehensive list of all firms quoting/bidding subcontracts on prime contracts and quoting/bidding subcontracts on federally-funded transportation projects. For every firm, we require the following information:

| Firm Name:  |          |              |
|---|----------|--------------|
| Contact Name/Title:<br>Firm Mailing Address:<br>Phone Number:               |          |              |
| Firm Name:<br>Contact Name/Title:   | DBE Firm | Non-DBE Firm |
| Firm Mailing Address:<br>Phone Number:                                      | DBE Firm | Non-DBE Firm |
| Firm Name:<br>Contact Name/Title:<br>Firm Mailing Address:<br>Phone Number: | DBE Firm | Non-DBE Firm |
| Firm Name: Contact Name/Title: Firm Mailing Address: Phone Number:          |          |              |
| Firm Name: Contact Name/Title: Firm Mailing Address:                        | DBE Firm | Non-DBE Firm |
| Phone Number:   | DBE Firm | Non-DBE Firm |
|   |          |              |

### MISSISSIPPI DEPARTMENT OF TRANSPORTATION PILE AND DRIVING EQUIPMENT DATA FORM

|   |                             | Bridge No.:<br>Pile Driving Contractor:   |   |                        |
|---|-----------------------------|---|---|------------------------|
|   |                             | County:   |   |                        |
| Hammer Components  Barbara Components  Barbara Components  Barbara Components | Hammer                      | Manufacturer:   | Serial No.: ft to ft to                   | lbs<br>ft<br>lbs<br>ft |
| E C   | Striker<br>Plate            | Weight:kips I Thickness:in.   | Diameter:                                 | in.                    |
|   | Hammer<br>Cushion<br>Helmet | Material #1  Name:  | Area: Thickness/Plate: No. of Plates: in. | in.²<br>in.            |
|   | (Drive Head) Pile Cushion   | Pile Cushion Material: in.²  No. of Sheets:  Total Thickness of Pile Cushion:   | Thickness/Sheet:                          | in.                    |
|   | Pile                        | Pile Type: in.  Wall Thickness: in.  Cross Sectional Area: in.²  Nominal Driving Resistance:  Driving Shoe/Closure Plate Description: | Taper:<br>Weight/ft:<br>Kips              |                        |
|   | Submitted By                | ·   | Date:                                     |                        |

Email Address:

NOTE: THE ANTICIPATED WORKING DAYS SHOWN ON THIS SCHEDULE ARE FOR INFORMATIONAL PURPOSES ONLY. THE ACTUAL WORKING DAY TOTAL AS ASSESSED BY THE PROJECT ENGINEER ON FORM CSD-765 SHALL GOVERN.