P.E. 502689 /101000 & 102000

STATE	PROJECT NO.	SHEET NO.
MISS.	BWO-7079-46(003)	1
	BWO-7149-46(001)	1
	LWO-7061-46(003)	1

STATE OF MISSISSIPPI

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

PLANS OF PROPOSED
PROJECT OFFICE BUILDING AND RENOVATION OF EXISTING BUILDING AT FOXWORTH
STATE PROJECT NO. BWO-7079-46(003)
BWO-7149-46(001) & LWO-7061-46(003)

MARION COUNTY

CONSTRUCTION FMS NOS.
502689/301000
302000
303000

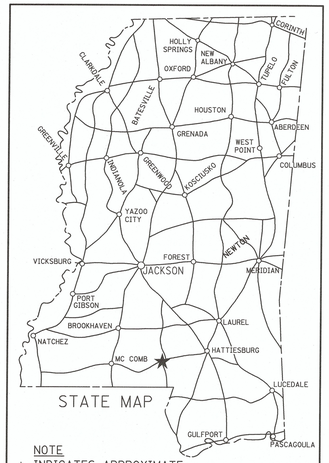

NOTE
★ INDICATES APPROXIMATE LOCATION OF PROJECT.

LAT. 31°13'41.47" LONG. 89°52'08.41"
(APPROX. MIDDLE OF PROJECT)

FOXWORTH COMPLEX
PROJECT SITE

NO. 9 FOXWORTH SRV RD
FOXWORTH, MS 39483

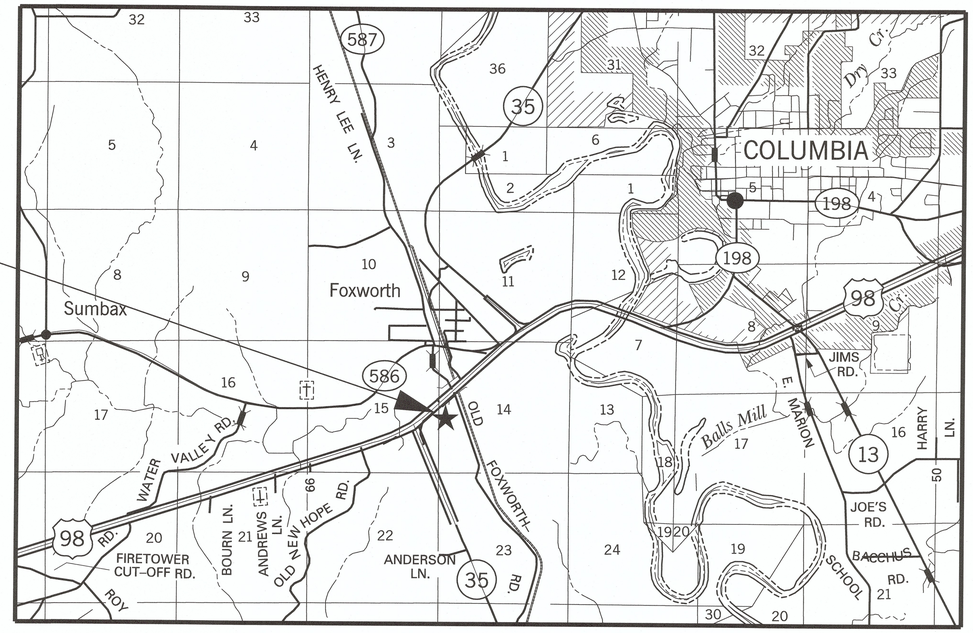

CONVENTIONAL SYMBOLS

COUNTY LINE .....
TOWN CORPORATION LINE .....
SECTION LINE .....
EXISTING ROAD OR TRAVELED WAY .....
EXISTING DIVIDED HIGHWAY .....
RAILROAD .....
SURVEY LINE .....
BRIDGES .....

ARCHITECTURAL
Registered Architect
Jason W. Hawkins
16017
State of Mississippi

ELECTRICAL
Robert Floyd Kelly
Registered Professional Engineer
No. 12586 PE
1/25/16
State of Mississippi

MECHANICAL & PLUMBING
Clyde Bradley
Registered Professional Engineer
16621
1/25/16
State of Mississippi

CIVIL
Jennifer Leatherwood
Registered Professional Engineer
1/25/16
17777
State of Mississippi

PERMITS ACQUIRED BY MDOT		
WETLANDS AND WATERS PERMITS (NECESSARY FOR ULTIMATE IMPROVEMENTS ONLY):	WATERS	WETLANDS
NATIONWIDE #14	N	N
NATIONWIDE (OTHER)*	N	N
GENERAL*	N	N
INDIVIDUAL (404)*	N	N

* ACQUISITION OF PERMITS FOR TEMPORARY IMPACTS DURING CONSTRUCTION ARE THE RESPONSIBILITY OF THE CONTRACTOR

STORMWATER PERMIT	S
Y	REQUIRED, CNOI SUBMITTED BY MDOT (DISTURBED AREA = 5 ACRES)
S	REQUIRED, SCNOI TO BE SUBMITTED BY CONTRACTOR (1 TO 4.99 ACRES)
N	NO STORMWATER PERMIT REQUIRED (<1 ACRE)

APPROVED BY: _____

P S & E DATE: 01/25/16

DEPUTY EXECUTIVE DIRECTOR / CHIEF ENGINEER

EXECUTIVE DIRECTOR

MDOT
MISSISSIPPI DEPARTMENT OF TRANSPORTATION

REVISIONS	BY	DATE

G00TITL.DGN
10:02:58

1st O.REV.

STATE	PROJECT NO.
MISS.	BWO-7079-46(003)
	BWO-7149-46(001)
	LWO-7061-46(003)

DESCRIPTION OF SHEET	WKG. NO.	SH. NO.
TITLE SHEET	——	1
DETAILED INDEX	DI-1	2
GENERAL NOTES	C1.1	3
SUMMARY OF QUANTITIES	C1.2	4
SITE PLAN	C1.3	5
GRADING PLAN	C1.4	6
UTILITY PLAN	C1.5	7
CONSTRUCTION DETAILS	C1.6	8
DRIVEWAYS, CURB & GUTTER & SIDEWALK	SDSD-1	9
CURB RAMPS - RAMP DESIGN ELEMENTS	SDCCR-1	10
ABBREVIATIONS, SYMBOLS AND CODE DATA	A1.0	11
OVERALL SITE PLAN	A1.1	12
FLOOR PLAN	A1.2	13
FLOOR FINISH PLAN	A1.3	14
REFLECTED CEILING PLAN	A1.4	15
PARTIAL FLOOR PLAN	A1.5	16
BUILDING ELEVATIONS AND ROOF PLAN	A2.1	17
INTERIOR ROOM ELEVATIONS	A2.2	18
WALL SECTIONS	A3.1	19
WALL SECTIONS AND DETAILS	A3.2	20
CABINET SECTIONS	A4.1	21
DOOR AND WINDOW DETAILS	A5.1	22
FINISH AND DOOR OPENING SCHEDULES	A6.1	23
FOUNDATION PLAN	S1.1	24
FOUNDATION DETAILS	S5.1	25
DEMOLITION PLAN - EXISTING BUILDING	W1.1	26
FLOOR PLAN - EXISTING BUILDING	W1.2	27
PLUMBING GENERAL NOTES, LEGEND, SCHEDULES AND DETAILS	P0.1	28
FLOOR PLAN PLUMBING	P2.1	29
MECHANICAL GENERAL NOTES AND LEGEND	M0.1	30
FLOOR PLAN MECHANICAL	M2.1	31
EXISTING BUILDING FLOOR PLAN - MECHANICAL RENOVATIONS	M2.2	32
MECHANICAL DETAILS	M5.1	33
MECHANICAL SCHEDULES	M6.1	34
ELECTRICAL GENERAL NOTES, LEGEND AND SCHEDULES	E0.1	35
SITE PLAN - ELECTRICAL	E1.1	36
FLOOR PLAN - LIGHTING	E2.1	37
FLOOR PLAN - POWER	E2.2	38
FLOOR PLAN - SYSTEMS	E2.3	39
EXISTING BUILDING FLOOR PLAN - ELECTRICAL RENOVATIONS	E3.1	40
ELECTRICAL ONE-LINE DIAGRAM, PANEL SCHEDULES AND DETAILS	E5.1	41

ARCHITECTURAL

ELECTRICAL

MECHANICAL & PLUMBING

CIVIL

PS & E PLANS–DATE. 01/25/16		
FMS CON. #502689/301000, 302000 & 303000		
REVISIONS		
DATE	SHEET NO.	BY
2/16/16	4,5,6,7,8,12,20,35,36,37,38,39 40,41	VARIES

MISSISSIPPI DEPARTMENT OF TRANSPORTATION
PROJECT OFFICE BUILDING AND RENOVATION OF EXISTING BUILDING AT FOXWORTH

DETAILED INDEX

BWO-7079-46(003), BWO-7149-46(001)
LWO-7061-46(003) MARION COUNTY

WORKING NUMBER DI-1

FILENAME: DI-1.DGN
DESIGN TEAM KING CHECKED JWV DATE 01/25/16

SHEET NUMBER 2

DATE | REVISION | BY

1/25/2016 10:02:59 DI-1.DGN

STATE	PROJECT NO.
MISS.	LWO-7061-46(003)

GENERAL NOTES

① PUBLIC UTILITIES:
AT&T, RANDY AINSWORTH; 601-583-8787
PEARL RIVER VALLEY EPA; BLAIR POWERS; 601-731-7745
WEST MARION WATER ASSOCIATION; 601-731-2601

② THE LOCATION AND SPACING OF SIGNS, SHOWN ON THE TRAFFIC CONTROL PLANS, ARE APPROXIMATE AND MAY BE ADJUSTED AS NECESSARY TO FIT FIELD CONDITIONS.

③ IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO PROTECT EXISTING STRUCTURES SUCH AS PIPES, INLETS, APRONS, BUILDINGS, ETC., FROM DAMAGE WHICH MIGHT OCCUR DURING CONSTRUCTION. THE CONTRACTOR SHALL REPLACE OR REPAIR, AS DIRECTED BY THE ENGINEER, ANY STRUCTURES DAMAGED DURING THE LIFE OF THE CONTRACT. NO PAYMENT WILL BE MADE FOR REPLACEMENT OR REPAIR OF DAMAGED ITEMS.

④ VOIDS CREATED BY THE REMOVAL OF POSTS, PIPES, FOOTINGS, ETC., SHALL BE BACKFILLED AND TAMPED IN ACCORDANCE WITH SECTION 203 OF THE MISSISSIPPI STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION.

⑤ EXISTING UNDERGROUND UTILITY LINES ARE SHOWN ON THE DRAWINGS BASED UPON THE BEST INFORMATION AVAILABLE TO THE ENGINEER. THE ENGINEER CAN NOT AND DOES NOT WARRANT THAT THIS INFORMATION IS COMPLETE OR ACCURATE. THE CONTRACTOR MUST COORDINATE DIRECTLY WITH THE INVOLVED UTILITY OWNERS TO HAVE UNDERGROUND UTILITY LINES FIELD LOCATED IN ADVANCE OF CONSTRUCTION.

GENERAL NOTES

⑥ ANY WORK ON STRUCTURES FOR THIS PROJECT THAT REQUIRES EXCAVATION IN THE IMMEDIATE VICINITY OF TRAFFIC AND ADJACENT PROPERTIES. THEREFORE, HAS RISK OF A FAILURE OCCURRING DURING THE EXCAVATION. THIS REQUIRES THAT EXTREME CAUTION BE EXERCISED. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO PLACE WHAT BRACING, SHORING OR GROUND SUPPORT SYSTEM THAT IS DEEMED NECESSARY TO PREVENT A FAILURE AND PROTECT THE PERSONS WORKING NEAR THE EXCAVATION, THE PUBLIC THAT MAY BE ABOVE THE EXCAVATION OR ANY STRUCTURE ADJACENT TO THE EXCAVATION. ALL COSTS FOR ANY PROTECTIVE MEASURES, INCLUDING THE MATERIALS AND LABOR FOR DESIGNING, DRAWING AND CONSTRUCTING THE FACILITY, SHALL BE INCLUDED IN THE PRICE BID FOR CONTRACT ITEMS.

⑦ EXISTING SANITARY SEWER TO BE REMOVED, WITHIN PROPOSED BUILDING FOOTPRINT, SHALL BE REMOVED PRIOR TO COMMENCING ANY CONSTRUCTION OF THE PROPOSED BUILDING. PROPOSED ON-SITE SANITARY SEWER TREATMENT FCILITY SHALL ALSO BE OPERATIONAL PIOR TO COMMENCING SAID CONSTRUCTION.

⑧ THE EROSION CONTROL DEVICES REFERENCED IN THESE PLANS ARE A MINIMUM REQUIREMENT. IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO ENSURE THAT SILT DOES NOT LEAVE THE SITE OR CONTAMINATE WATERS OF THE US DURING CONSTRUCTION. THE CONTRACTOR SHALL SUBMIT AN EROSION CONTROL PLAN PRIOR TO COMMENCEMENT OF WORK AND MAINTAIN THE PLAN DURING CONSTRUCTION.

PLAN
ROADWAY DESIGN DIVISION
MISSISSIPPI DEPARTMENT OF TRANSPORTATION

MMDDYY 02:00AM/PMDGNFILENAME

FRANK T. FEATHERSTON
REGISTERED PROFESSIONAL ENGINEER
2/18/16
17777
STATE OF MISSISSIPPI

thompson
ENGINEERING
100 BUSINESS PARK DRIVE, SUITE G
RIDGELAND, MS 39157
OFFICE - 601.899-9252
FAX - 601.899.9253
www.thompsonengineering.com

DEPARTMENT OF TRANSPORTATION
STATE OF MISSISSIPPI

BY	REVISION	DATE

MISSISSIPPI DEPARTMENT OF TRANSPORTATION
PROJECT OFFICE BUILDING AND RENOVATION
OF EXISTING BUILDING AT FOXWORTH

GENERAL NOTES

BWO-7079-46(003), BWO-7149-46(001
LWO-7061-46(003) MARION COUNTY

WORKING NUMBER C1.1

FILENAME: SHT 1 GEN NTS.DGN
DESIGN TEAM LLY CHECKED FEL DATE 01/25/16

SHEET NUMBER 3